

APPENDIX A: SAR TEST DATA

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80813

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.377$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 09/02/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.6 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1530; Calibrated: 1/13/2020
Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 850, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.55 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.130 W/kg

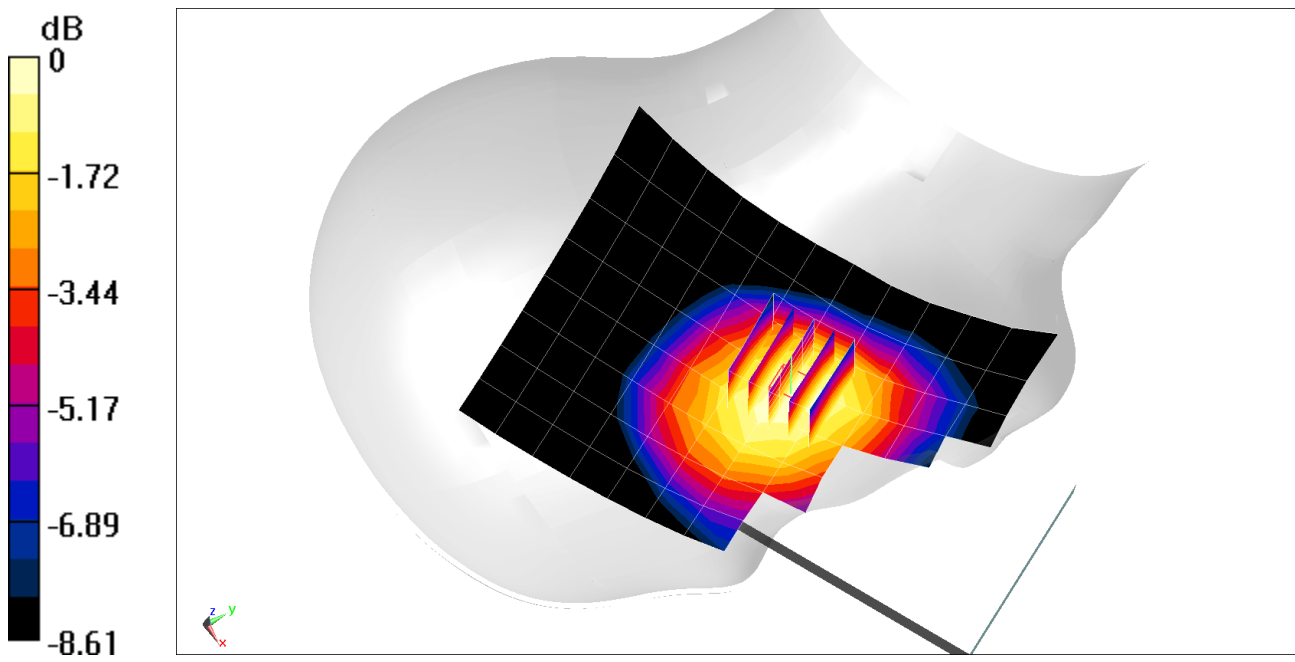

0 dB = 0.151 W/kg = -8.21 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 39.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 08/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 1900, Left Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.499 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.118 W/kg

SAR(1 g) = 0.073 W/kg

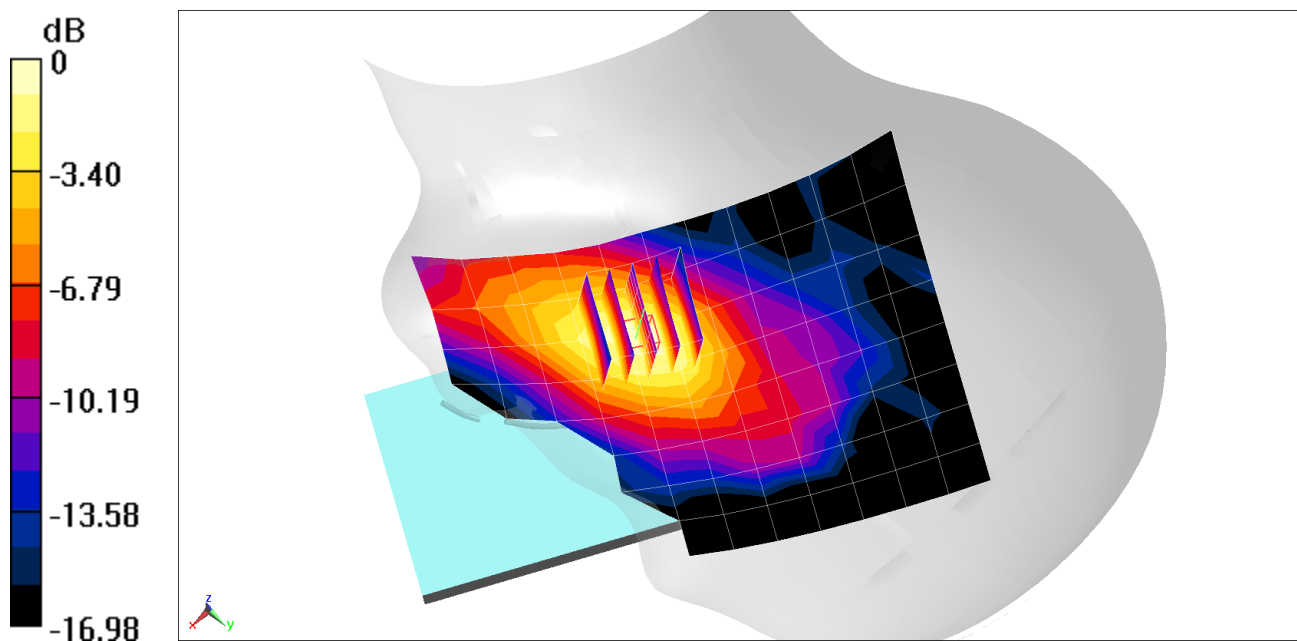

0 dB = 0.102 W/kg = -9.91 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 41.377$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 09/02/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 836.6 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1530; Calibrated: 1/13/2020
Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Right Head, Cheek, Mid.ch


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.79 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.207 W/kg

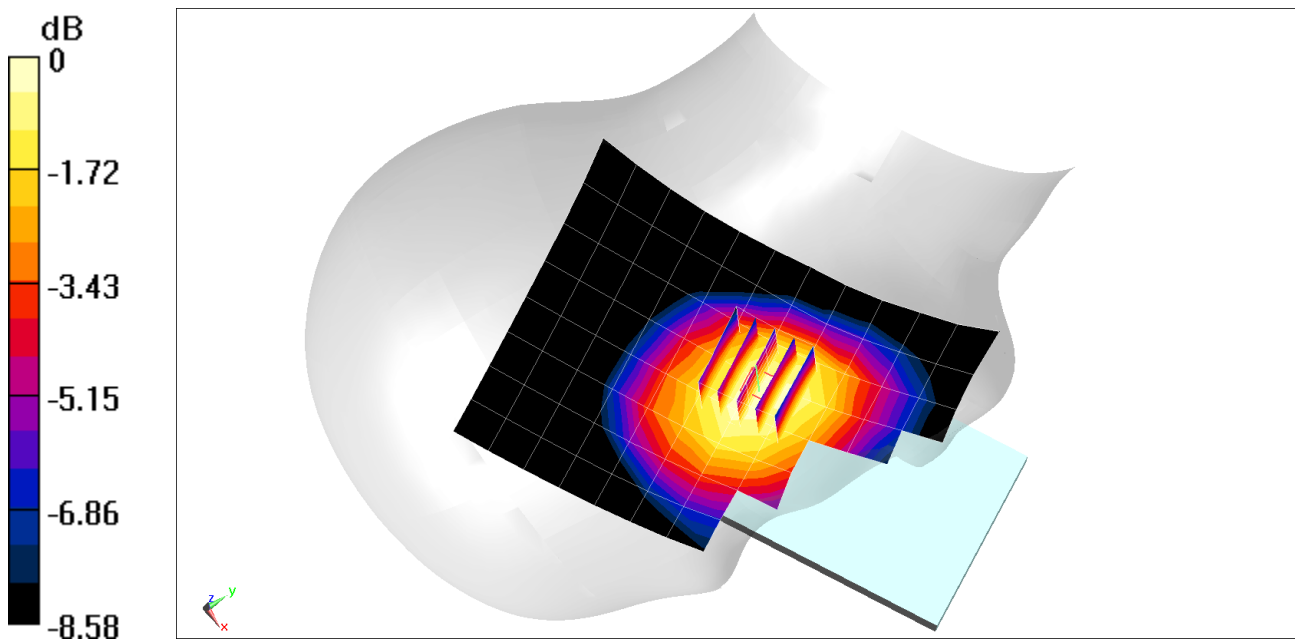

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80813

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Head; Medium parameters used (interpolated):
 $f = 1732.4$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 38.91$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 09/02/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(8.32, 8.32, 8.32) @ 1732.4 MHz; Calibrated: 6/23/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1583; Calibrated: 5/14/2020
Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.830 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.044 W/kg

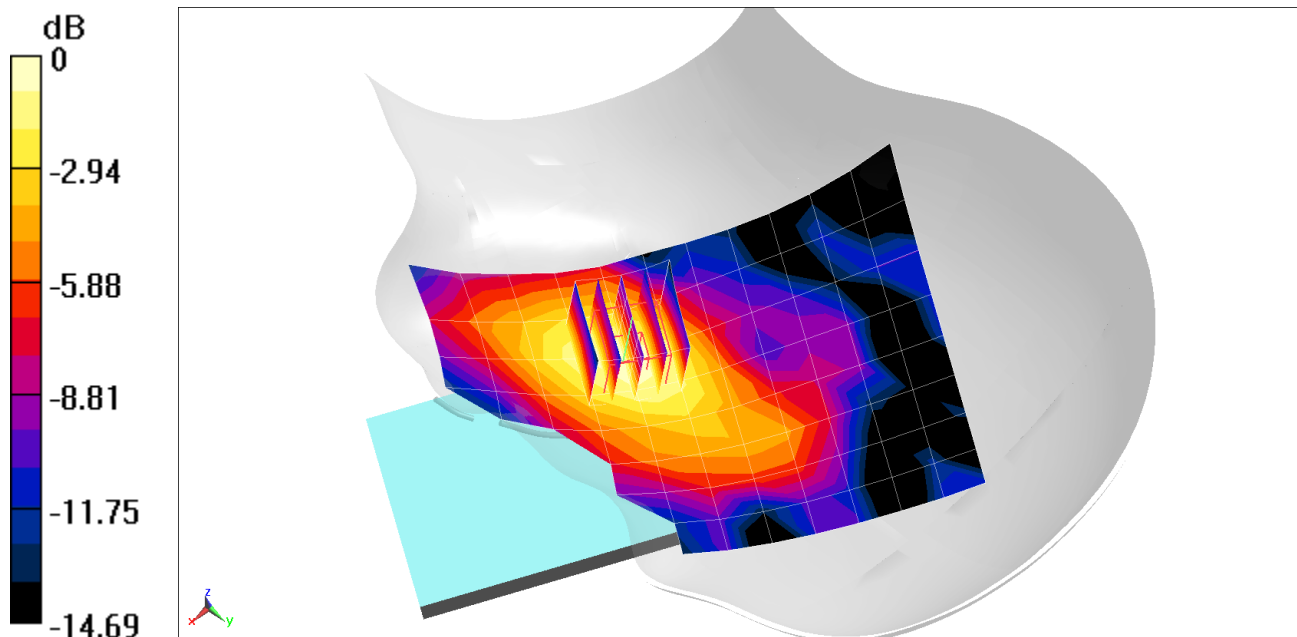

0 dB = 0.0599 W/kg = -12.23 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 39.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 08/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Left Head, Cheek, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.570 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.074 W/kg

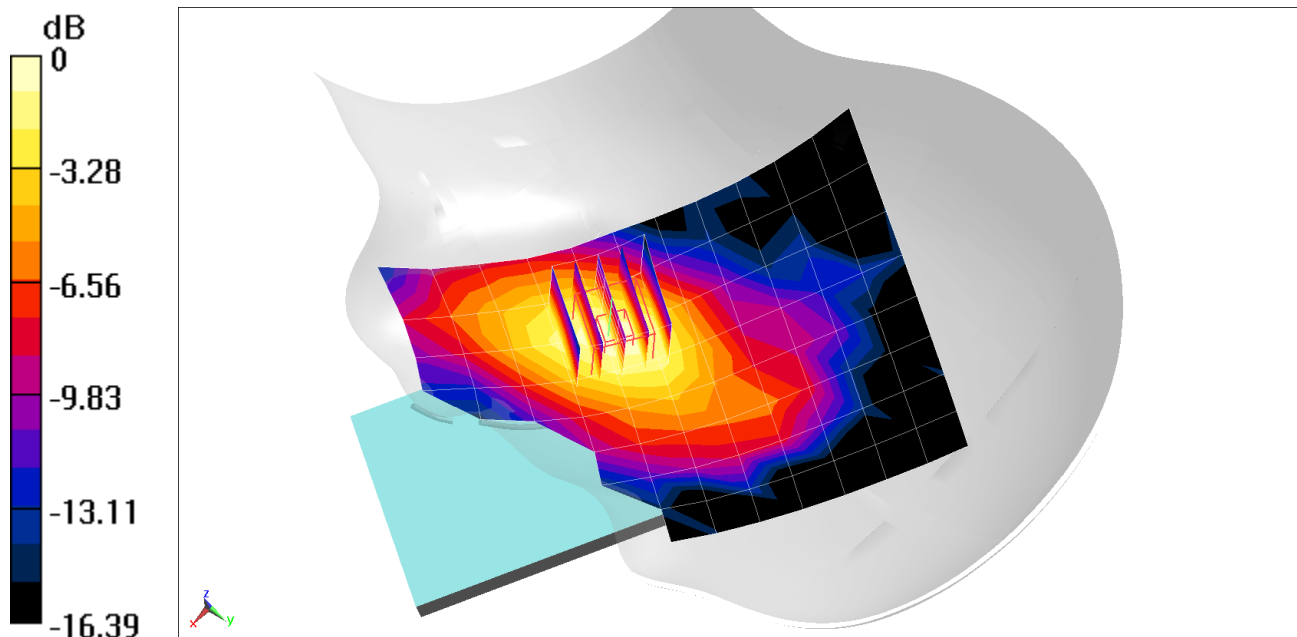

0 dB = 0.101 W/kg = -9.96 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80813

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.936$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 09/08/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(8.7, 8.7, 8.7) @ 707.5 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1558; Calibrated: 1/13/2020
Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK
10 MHz Bandwidth, 1 RB, 25 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.98 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.222 W/kg

SAR(1 g) = 0.179 W/kg

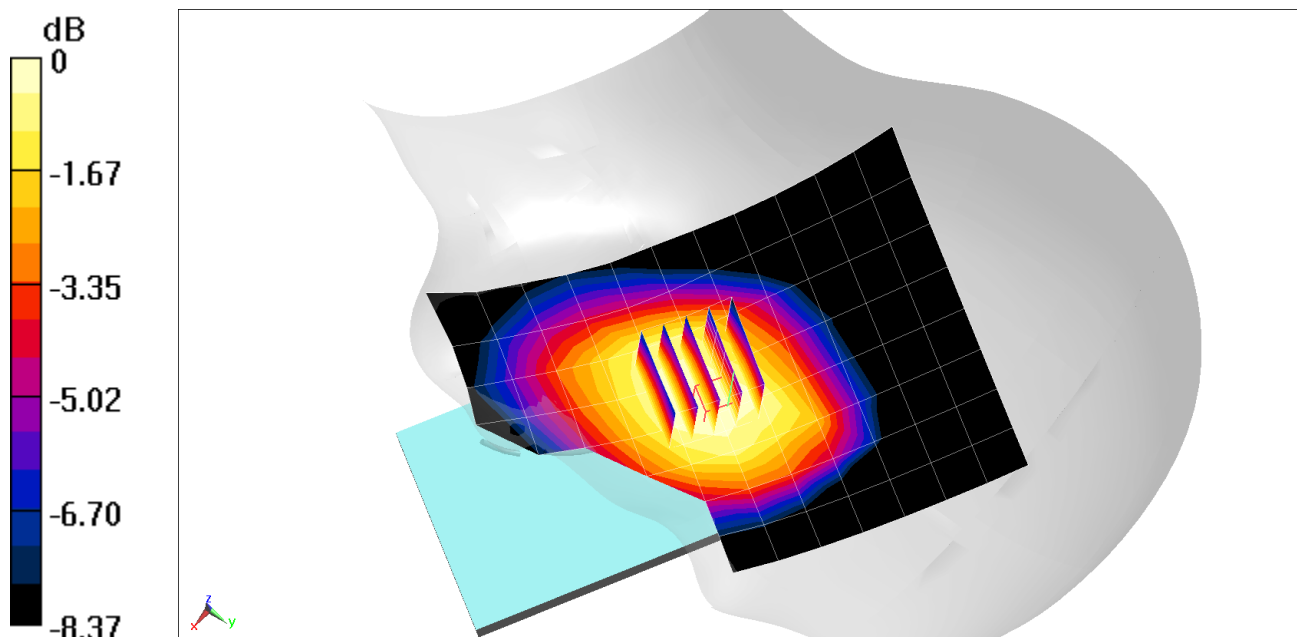

0 dB = 0.207 W/kg = -6.84 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80813

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 43.717$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09/08/2020; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN3589; ConvF(8.7, 8.7, 8.7) @ 782 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK
10 MHz Bandwidth, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.37 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.165 W/kg

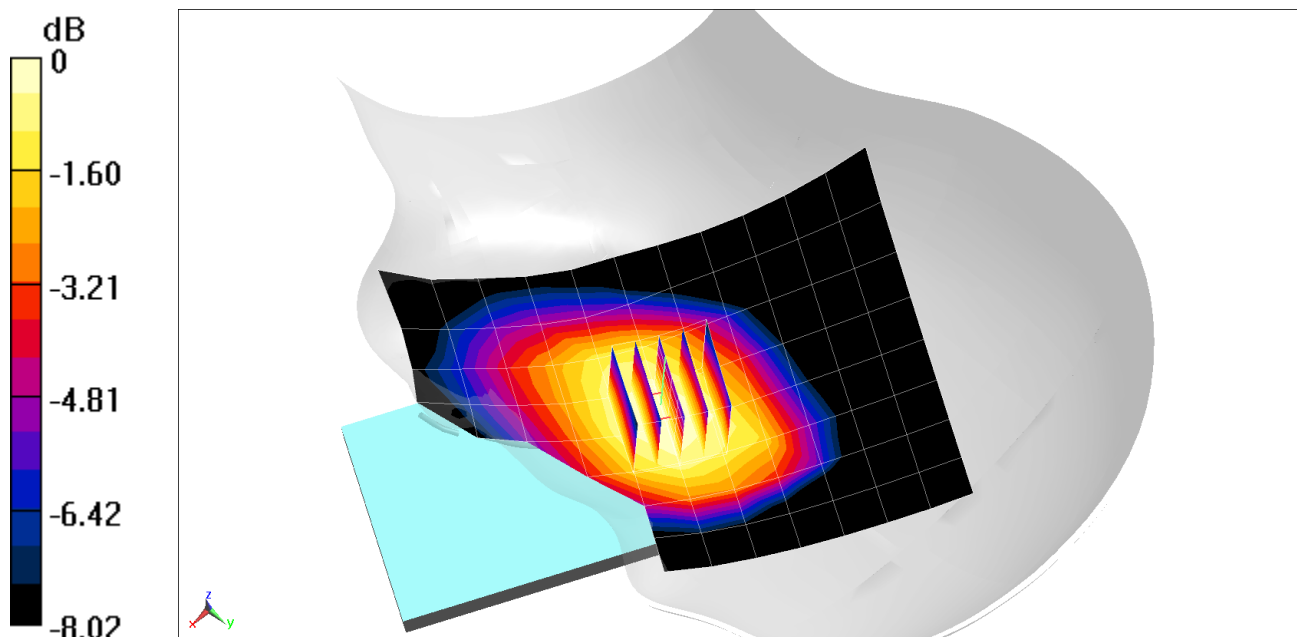

0 dB = 0.193 W/kg = -7.14 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 831.5$ MHz; $\sigma = 0.877$ S/m; $\epsilon_r = 41.401$; $\rho = 1000$ kg/m³
Phantom section: Right Section

Test Date: 09/02/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7488; ConvF(10.21, 10.21, 10.21) @ 831.5 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1530; Calibrated: 1/13/2020
Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.01 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.157 W/kg

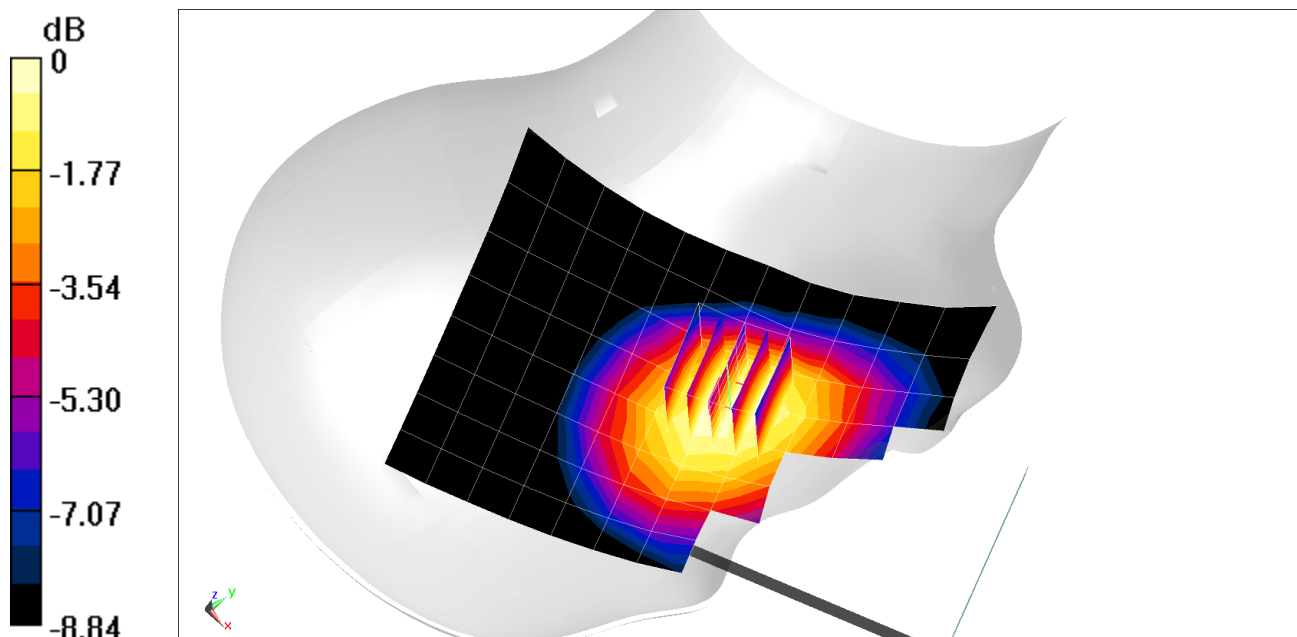

0 dB = 0.180 W/kg = -7.45 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80813

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Head; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.399 \text{ S/m}$; $\epsilon_r = 38.844$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 09/02/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(8.32, 8.32, 8.32) @ 1745 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), Left Head, Cheek, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.784 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.041 W/kg

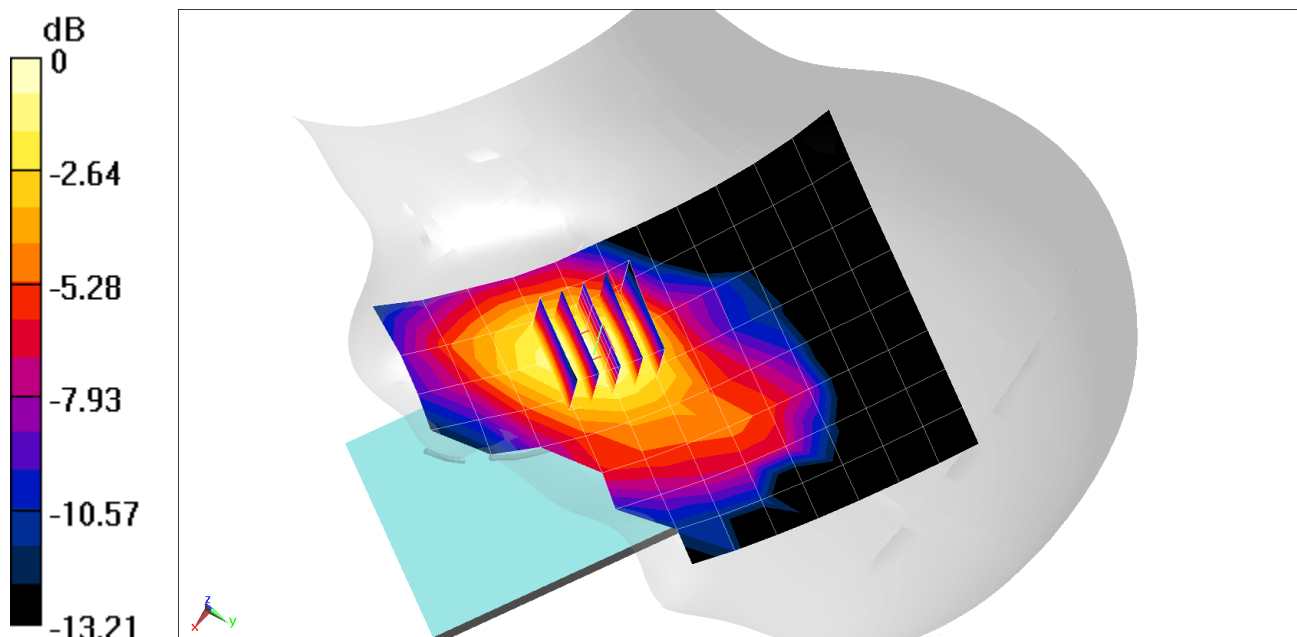

0 dB = 0.0549 W/kg = -12.60 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.449$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 08/27/2020; Ambient Temp: 22.3°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1882.5 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 25 (PCS), Left Head, Cheek, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.777 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.039 W/kg

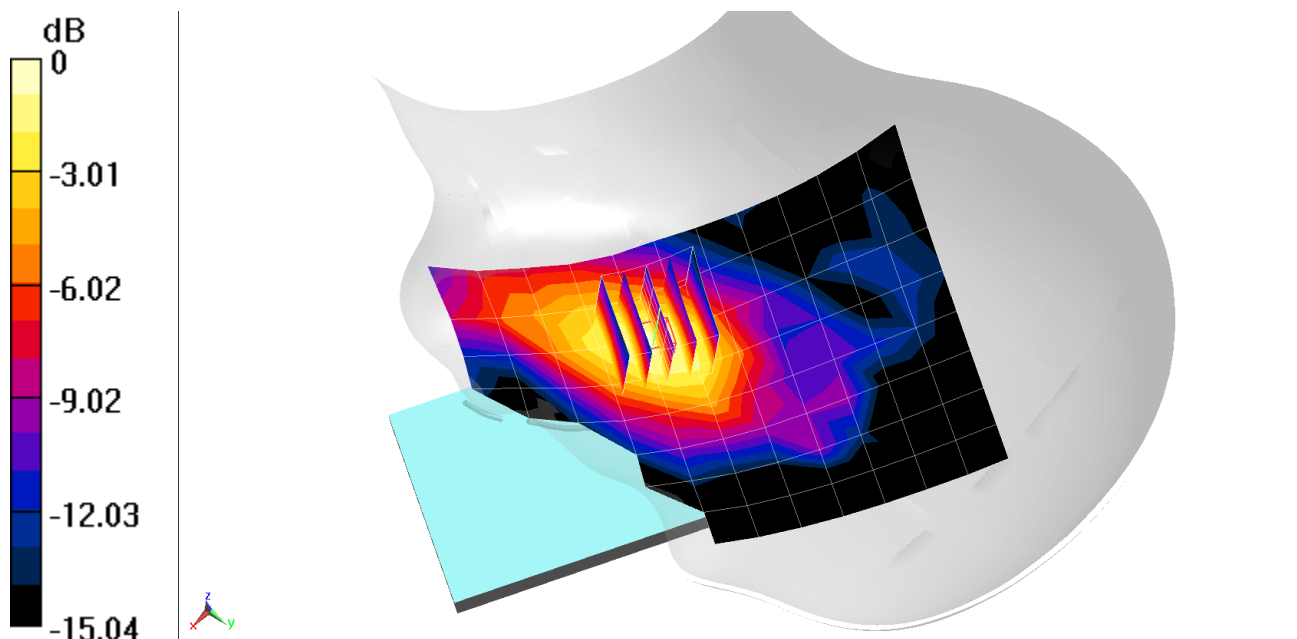

0 dB = 0.0530 W/kg = -12.76 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Head; Medium parameters used:

$f = 2535$ MHz; $\sigma = 1.967$ S/m; $\epsilon_r = 38.212$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09/01/2020; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2535 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 7, Left Head, Cheek, Mid.ch, QPSK
20 MHz Bandwidth, 1 RB, 50 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.082 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.055 W/kg

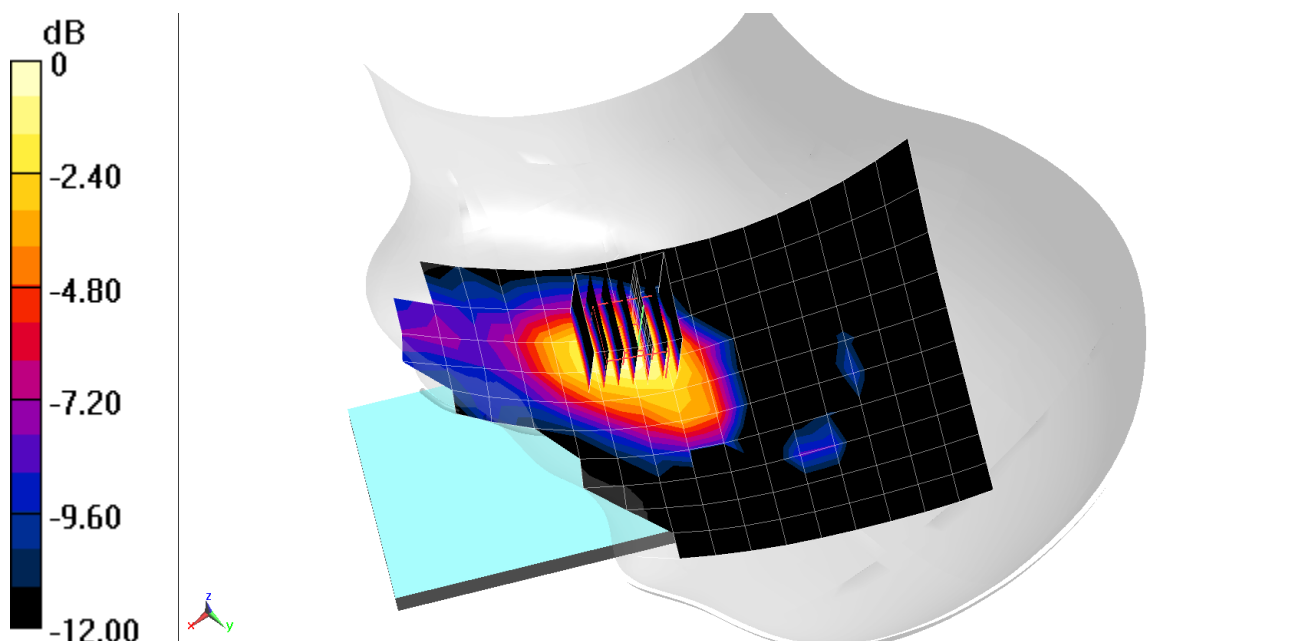

0 dB = 0.0861 W/kg = -10.65 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 48; Frequency: 3690 MHz; Duty Cycle: 1:1.58

Medium: 3600 Head; Medium parameters used:

$f = 3690$ MHz; $\sigma = 3.022$ S/m; $\epsilon_r = 39.103$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 08/23/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7488; ConvF(7.2, 7.2, 7.2) @ 3690 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V4.0 left 20; Type: QD 000 P40 CC; Serial: 1687

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, Right Head, Tilt, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 2.886 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.016 W/kg

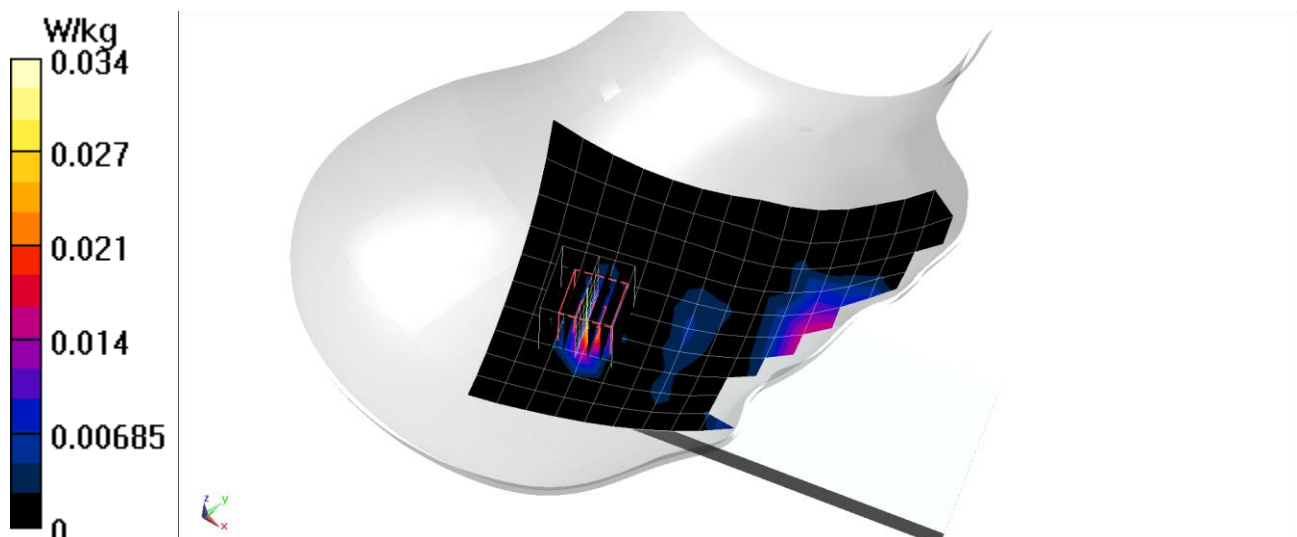

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, _LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Head; Medium parameters used:

$f = 2680$ MHz; $\sigma = 2.135$ S/m; $\epsilon_r = 37.656$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 09/01/2020; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN3589; ConvF(6.6, 6.6, 6.6) @ 2680 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1558; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: LTE Band 41, Left Head, Cheek, High.ch, QPSK
20 MHz Bandwidth, 1 RB, 0 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.819 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.034 W/kg

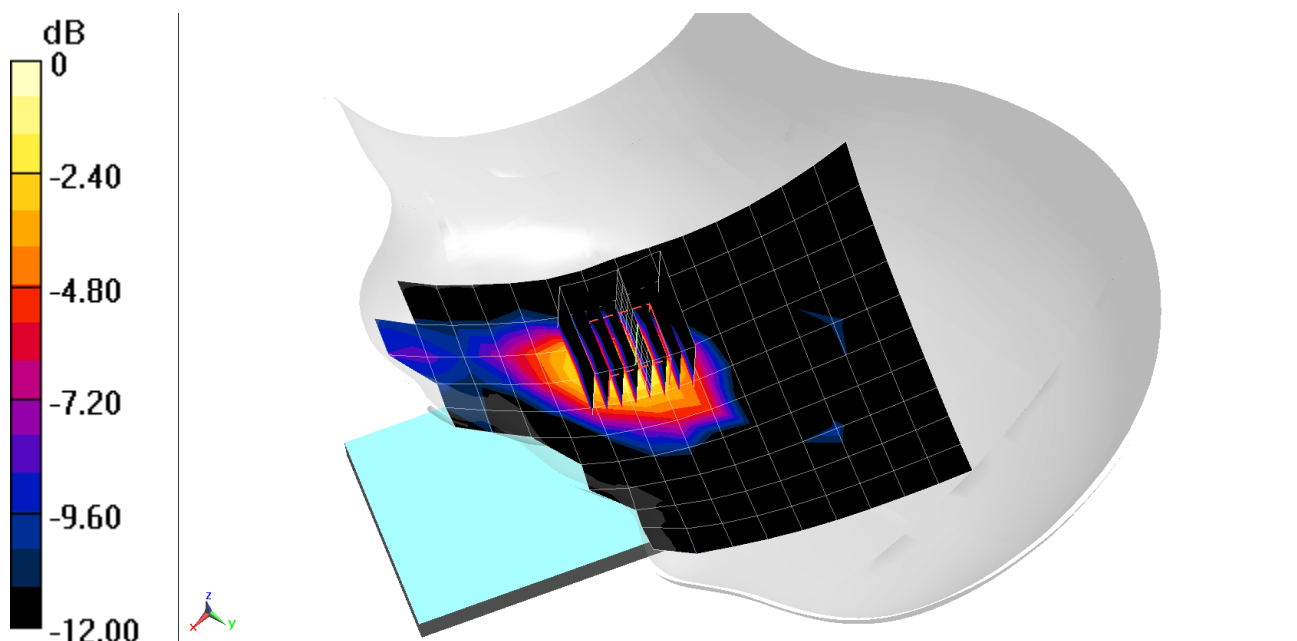

0 dB = 0.0570 W/kg = -12.44 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 43.101$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 09/14/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(8.58, 8.58, 8.58) @ 836.5 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1558; Calibrated: 1/13/2020
Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: NR Band n5, Left Head, Cheek, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 167300, 50 RB, 28 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.356 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.058 W/kg

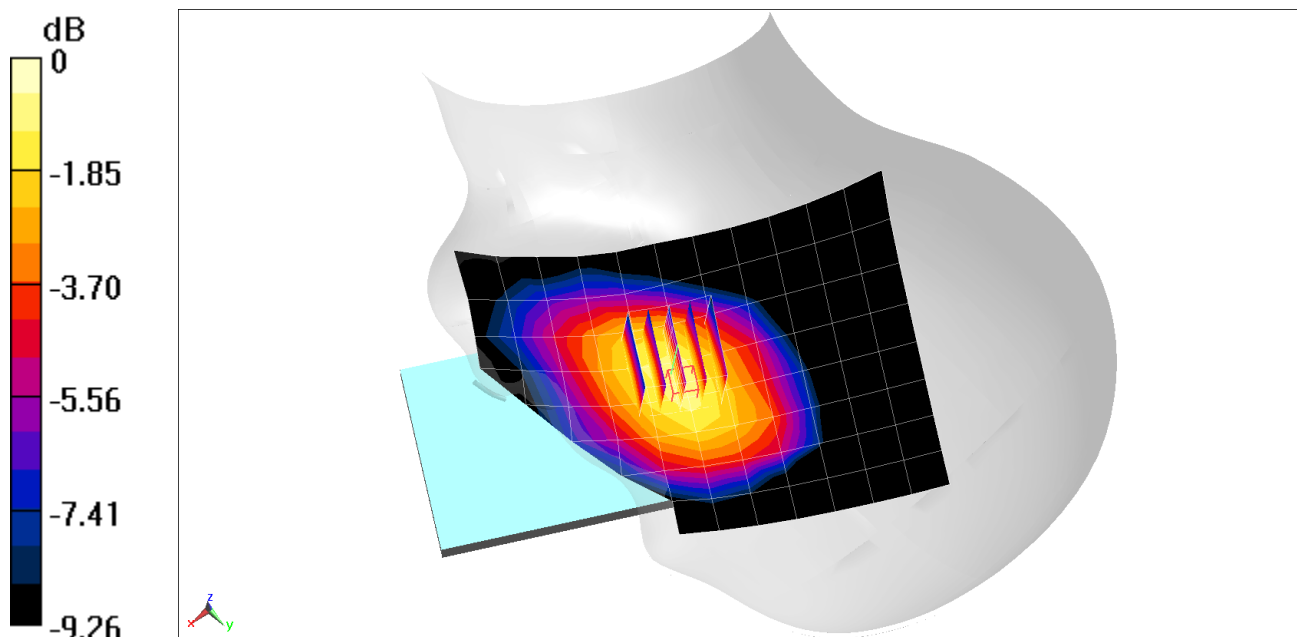

0 dB = 0.0699 W/kg = -11.56 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, NR Band n66; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: 1750 Head; Medium parameters used:
 $f = 1720 \text{ MHz}$; $\sigma = 1.37 \text{ S/m}$; $\epsilon_r = 38.975$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 09/02/2020; Ambient Temp: 24.3°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7406; ConvF(8.32, 8.32, 8.32) @ 1720 MHz; Calibrated: 6/23/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1583; Calibrated: 5/14/2020
Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Left Head, Cheek, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 344000, 1 RB, 53 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.399 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.00995 W/kg

SAR(1 g) = 0.007 W/kg

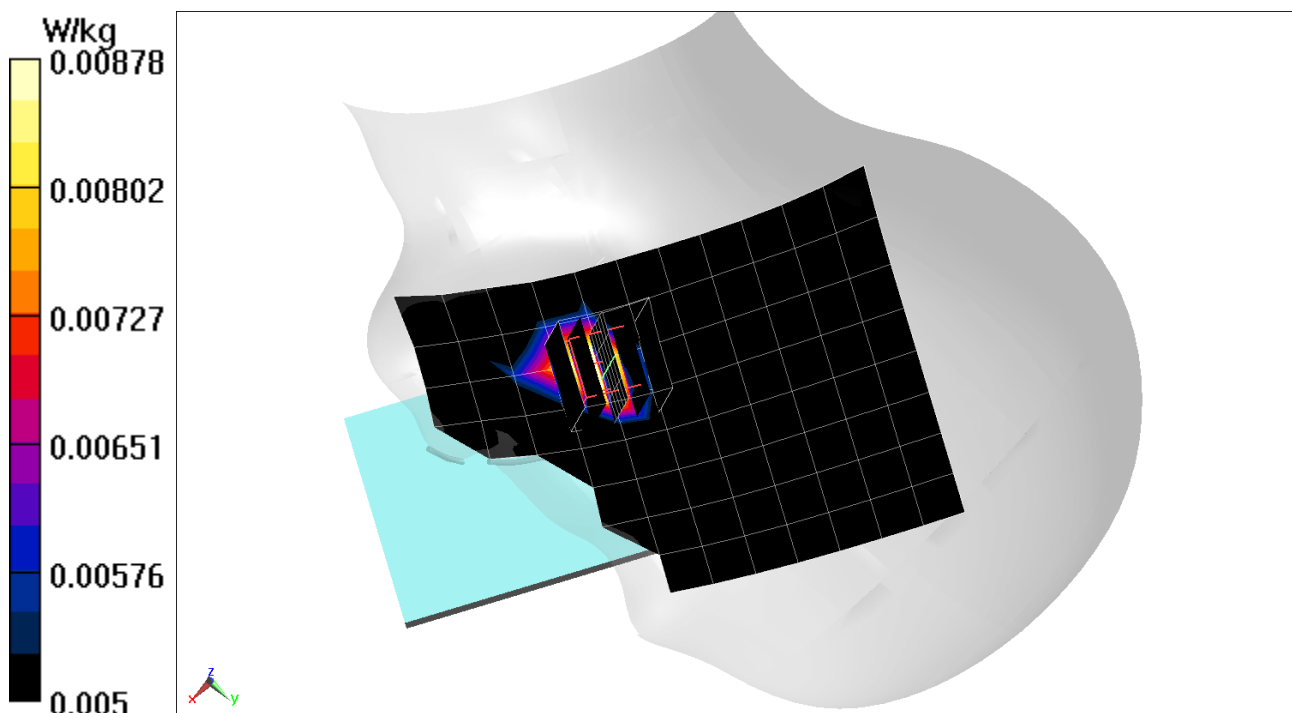

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, NR Band n2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head; Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r = 38.838$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 08/31/2020; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(7.96, 7.96, 7.96) @ 1880 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1583; Calibrated: 5/14/2020

Phantom: Twin-SAM V8.0; Type: QD 000 P41 Ax; Serial: 1966

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n2, Left Head, Cheek, 20 MHz Bandwidth
CP-OFDM QPSK, Ch. 376000, 1 RB, 1 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.834 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0330 W/kg

SAR(1 g) = 0.021 W/kg

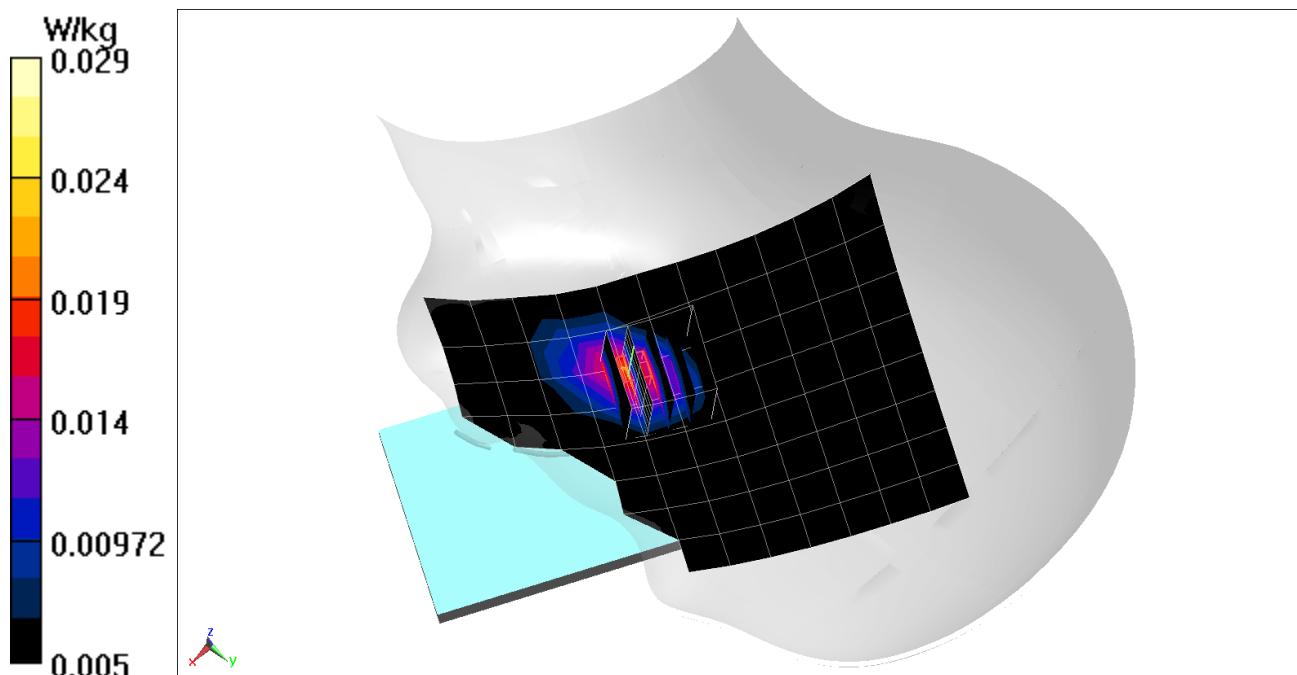

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80979

Communication System: UID 0, _IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: 2450 Head; Medium parameters used (interpolated):
 $f = 2412$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.709$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 09/03/2020; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN3589; ConvF(6.85, 6.85, 6.85) @ 2412 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1558; Calibrated: 1/13/2020
Phantom: Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1647
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Left Head, Cheek, Ch 1, 1 Mbps


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.496 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.266 W/kg

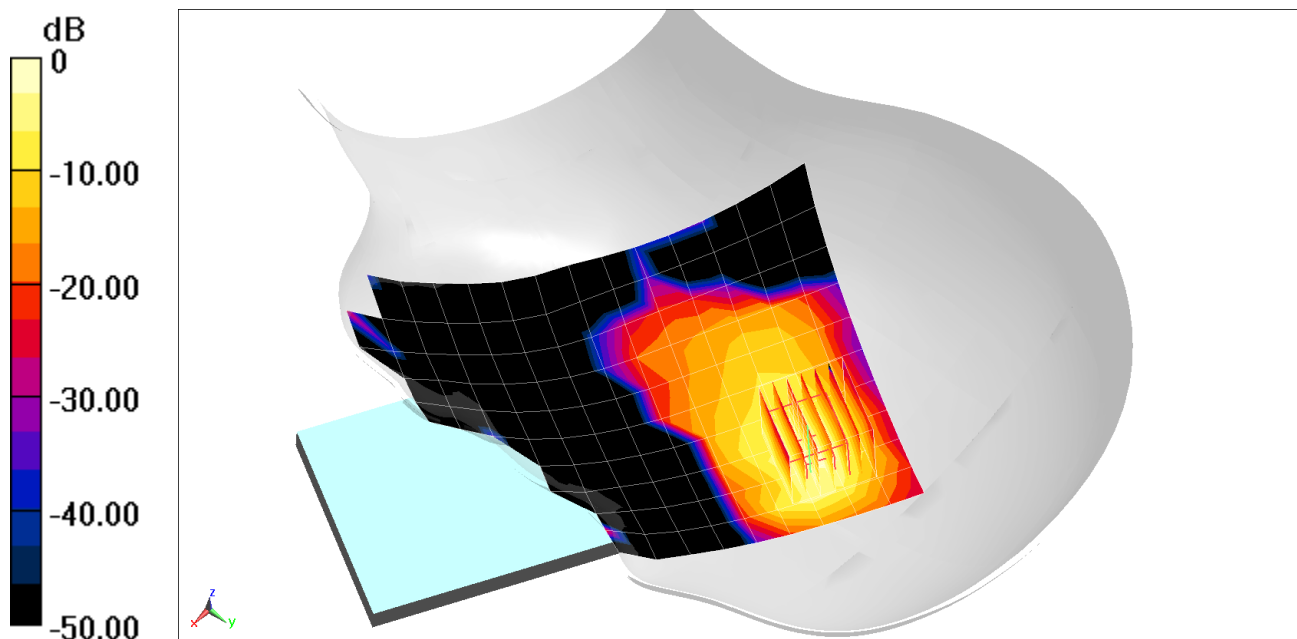

0 dB = 0.460 W/kg = -3.37 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80953

Communication System: UID 0, IEEE 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5775$ MHz; $\sigma = 5.055$ S/m; $\epsilon_r = 34.006$; $\rho = 1000$ kg/m³
Phantom section: Left Section


Test Date: 08/26/2020; Ambient Temp: 24.5°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7357; ConvF(5.05, 5.05, 5.05) @ 5775 MHz; Calibrated: 4/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1407; Calibrated: 4/15/2020
Phantom: Twin-SAM V5.0 Left 20; Type: QD 000 P40 CD; Serial: 1715
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11ac, Antenna 1, U-NII-3, 80 MHz Bandwidth, Left Head, Tilt, Ch 155
29.3 Mbps**

Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4
Reference Value = 3.999 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 2.16 W/kg
SAR(1 g) = 0.424 W/kg

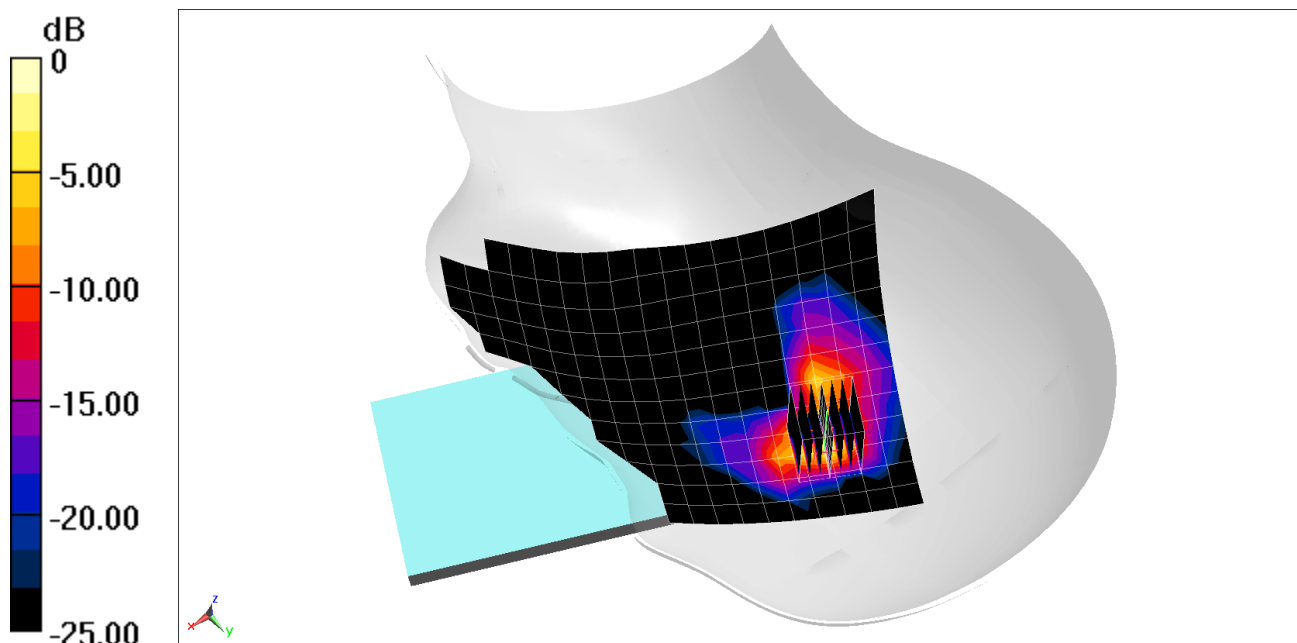

0 dB = 1.22 W/kg = 0.86 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80979

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.300
Medium: 2450 Head; Medium parameters used (interpolated):
 $f = 2441$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.859$; $\rho = 1000$ kg/m³
Phantom section: Left Section

Test Date: 09/16/2020; Ambient Temp: 23.7°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7308; ConvF(7.33, 7.33, 7.33) @ 2441 MHz; Calibrated: 7/31/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1450; Calibrated: 8/11/2020
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Left Head, Cheek, Ch 39, 1 Mbps


Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.80 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.259 W/kg

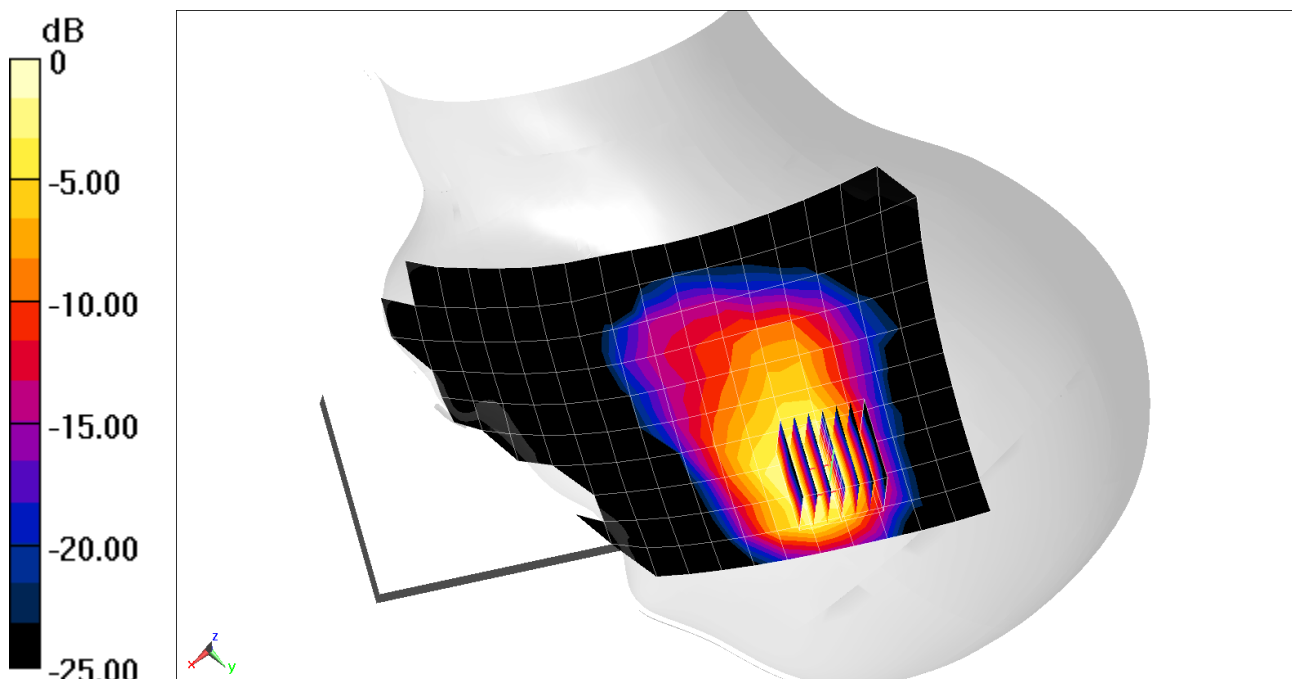

0 dB = 0.447 W/kg = -3.50 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 54.398$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 9/17/2019
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.25 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.203 W/kg

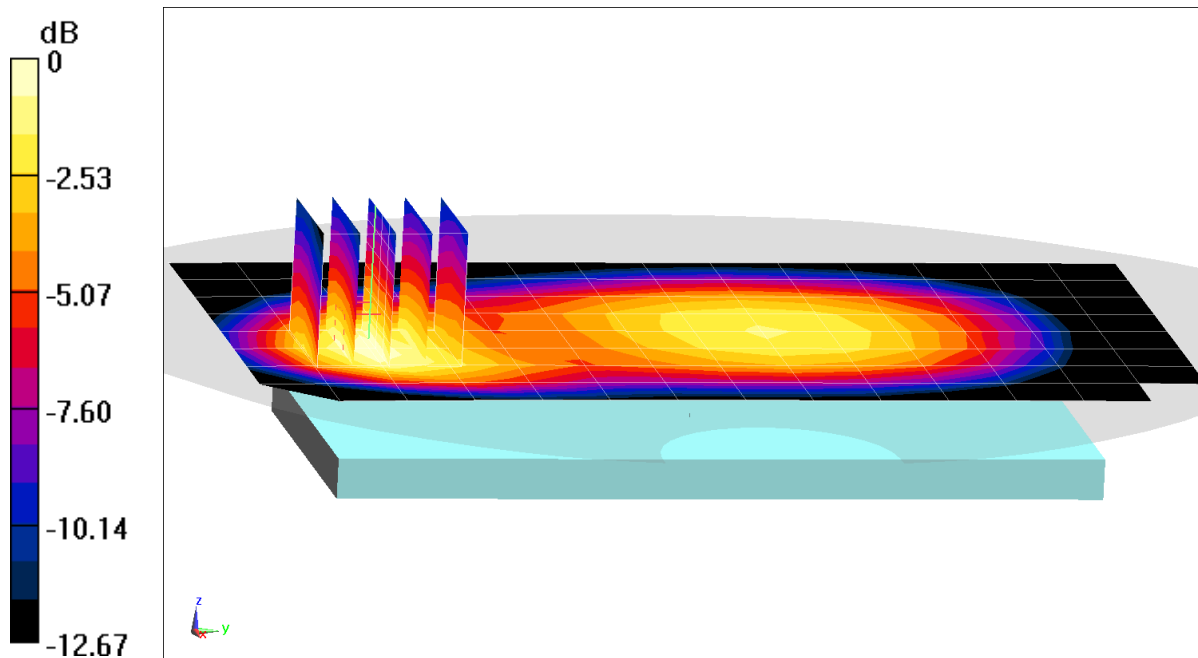

0 dB = 0.275 W/kg = -5.61 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.076

Medium: 835 Body; Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 54.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 850, Body SAR, Back side, Mid.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.45 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.210 W/kg

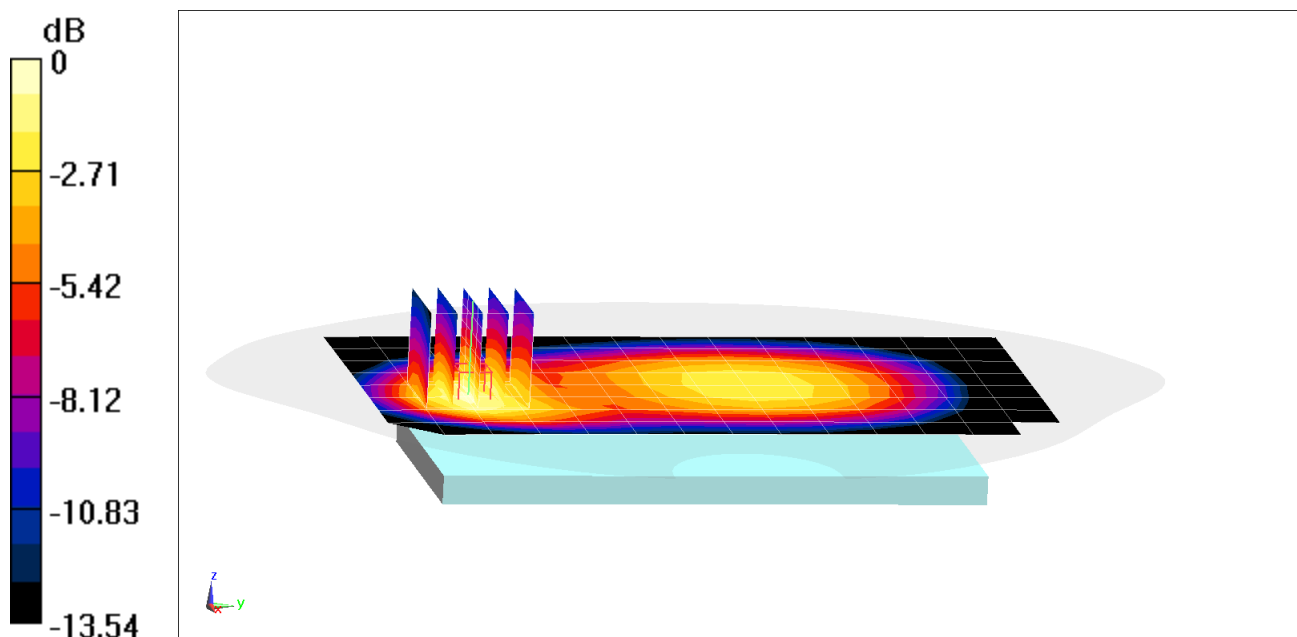

0 dB = 0.299 W/kg = -5.24 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body; Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.546$ S/m; $\epsilon_r = 51.136$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7357; ConvF(7.8, 7.8, 7.8) @ 1880 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GSM 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.83 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.168 W/kg

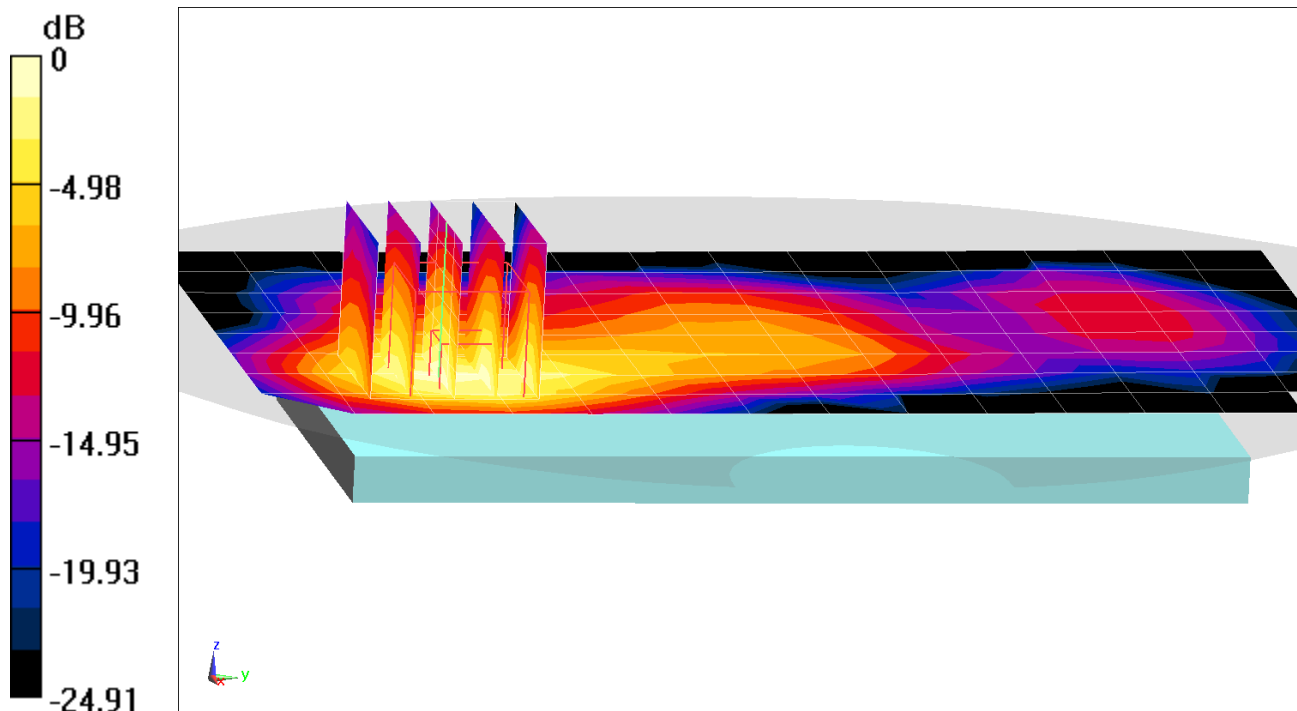

0 dB = 0.241 W/kg = -6.18 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, GSM GPRS; 4 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body; Medium parameters used:

$f = 1880$ MHz; $\sigma = 1.546$ S/m; $\epsilon_r = 51.136$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 24.0°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7357; ConvF(7.8, 7.8, 7.8) @ 1880 MHz; Calibrated: 4/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/15/2020

Phantom: Twin-SAM V5.0 Right 30; Type: QD 000 P40 CD; Serial: 1759

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: GPRS 1900, Body SAR, Left Edge, Mid.ch, 4 Tx Slots


Area Scan (10x14x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.254 W/kg

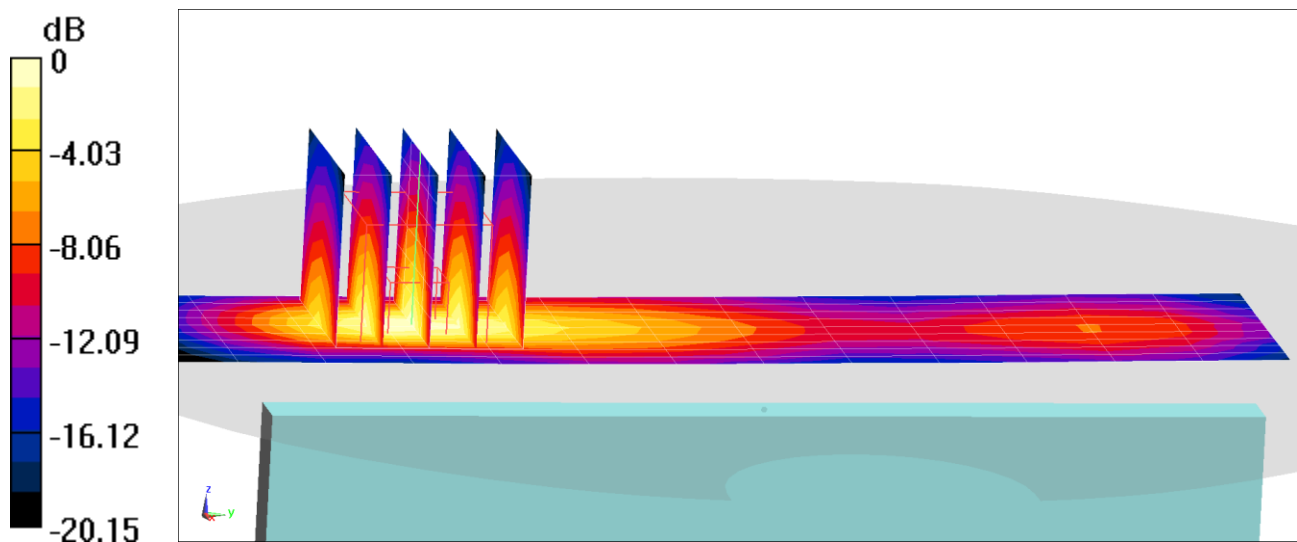

0 dB = 0.397 W/kg = -4.01 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.956 \text{ S/m}$; $\epsilon_r = 54.398$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 836.6 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 9/17/2019
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 850, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.82 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.319 W/kg

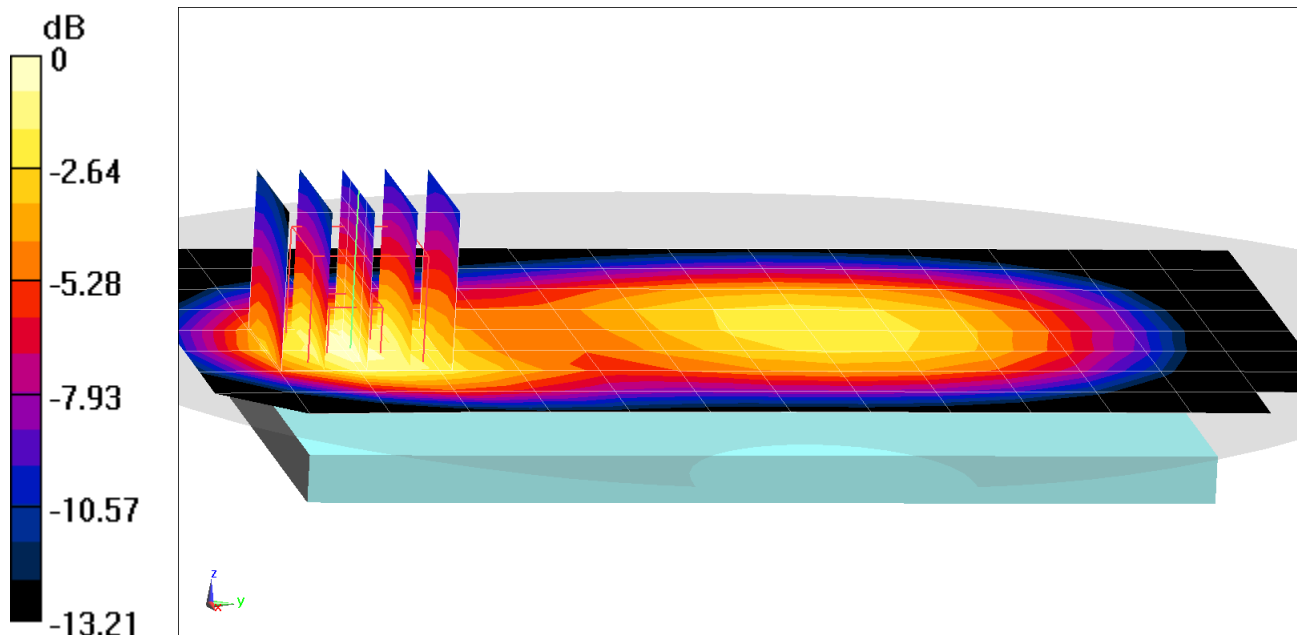

0 dB = 0.448 W/kg = -3.49 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 83197

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Body; Medium parameters used (interpolated):
 $f = 1732.4$ MHz; $\sigma = 1.474$ S/m; $\epsilon_r = 52.347$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1732.4 MHz; Calibrated: 12/11/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/12/2020
Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.551 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.059 W/kg

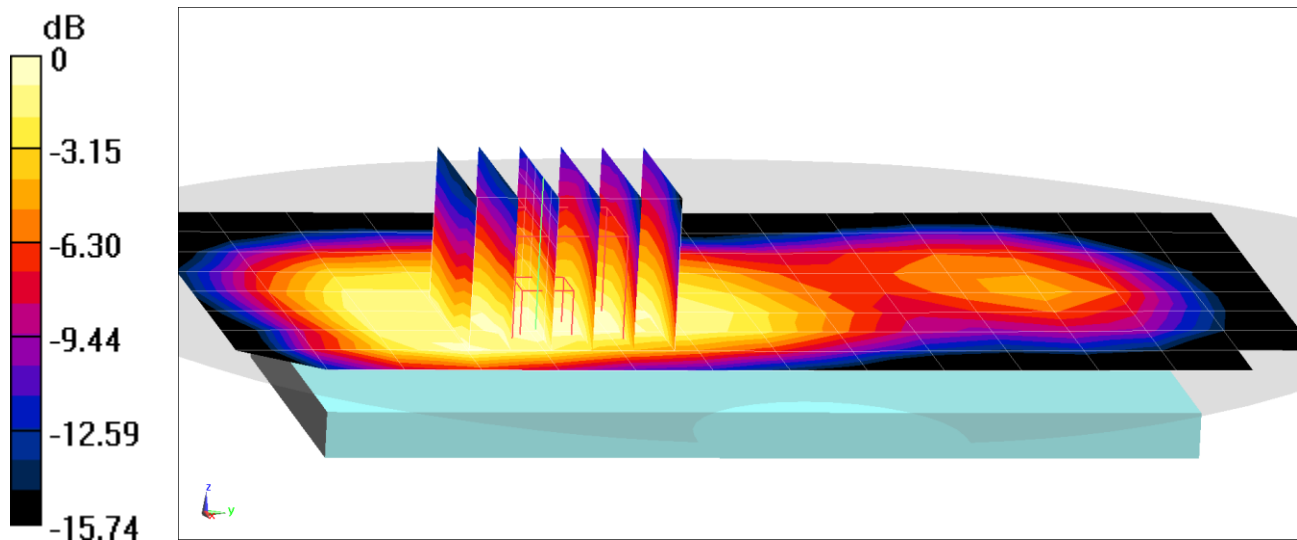

0 dB = 0.0787 W/kg = -11.04 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 83197

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium: 1750 Body; Medium parameters used (interpolated):
 $f = 1732.4$ MHz; $\sigma = 1.474$ S/m; $\epsilon_r = 52.347$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1732.4 MHz; Calibrated: 12/11/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1368; Calibrated: 3/12/2020
Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1750, Body SAR, Left Edge, Mid.ch


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.052 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.105 W/kg

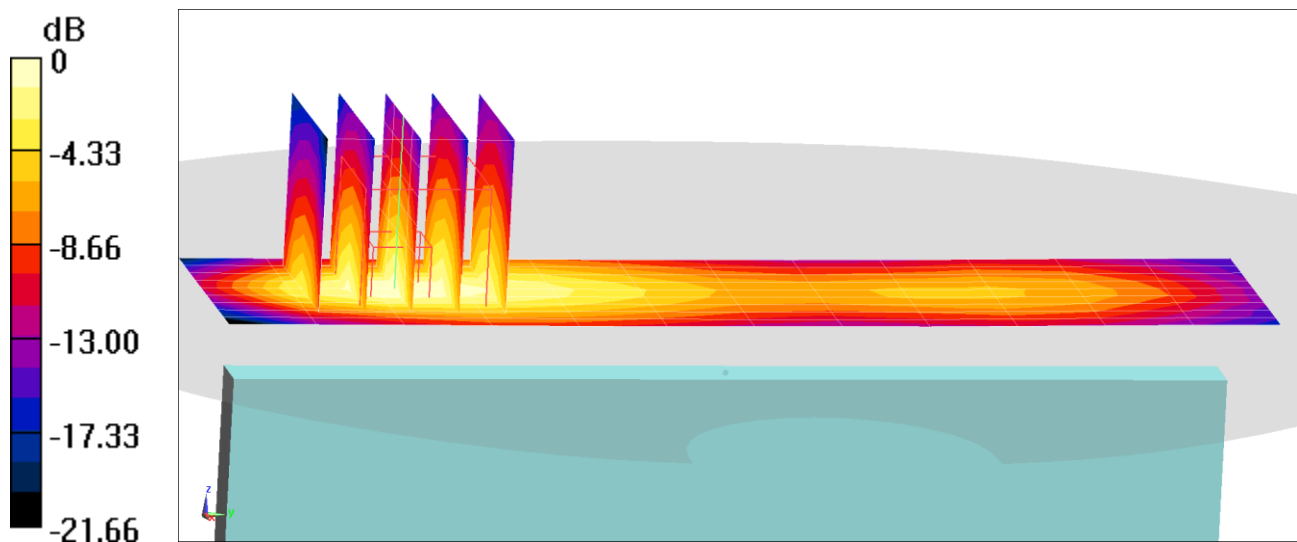

0 dB = 0.157 W/kg = -8.04 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 50.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Back side, Mid.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.844 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.085 W/kg

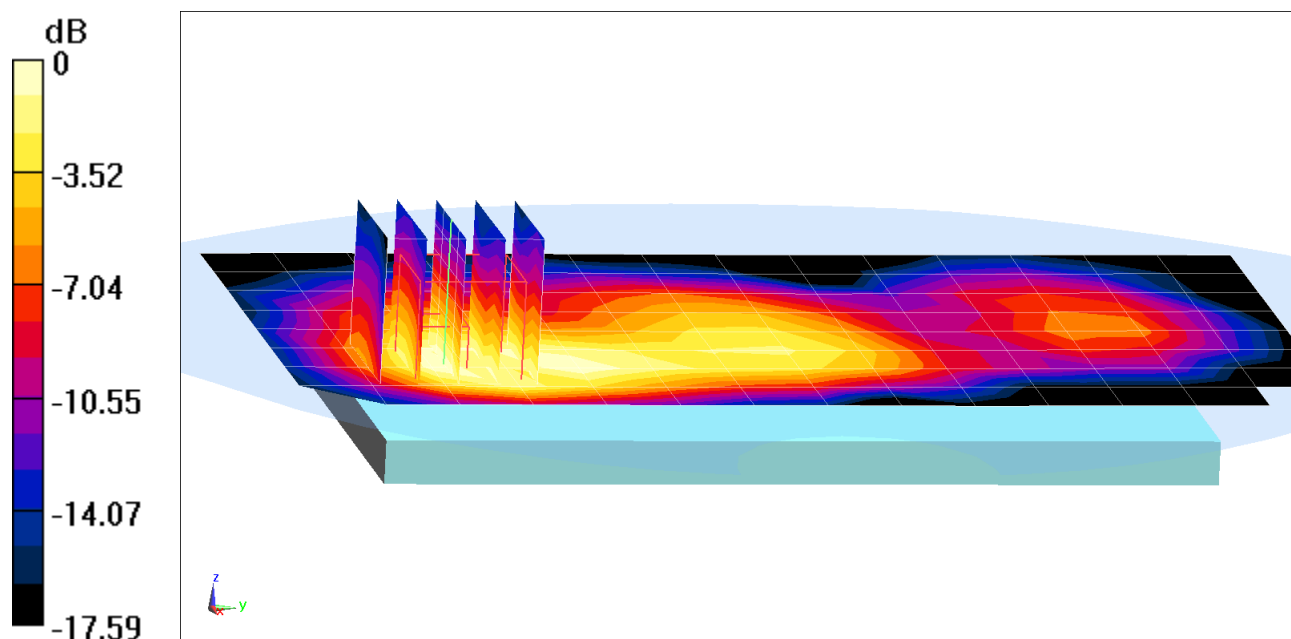

0 dB = 0.129 W/kg = -8.89 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 50.922$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1880 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: UMTS 1900, Body SAR, Left Edge, Mid.ch


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.303 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.115 W/kg

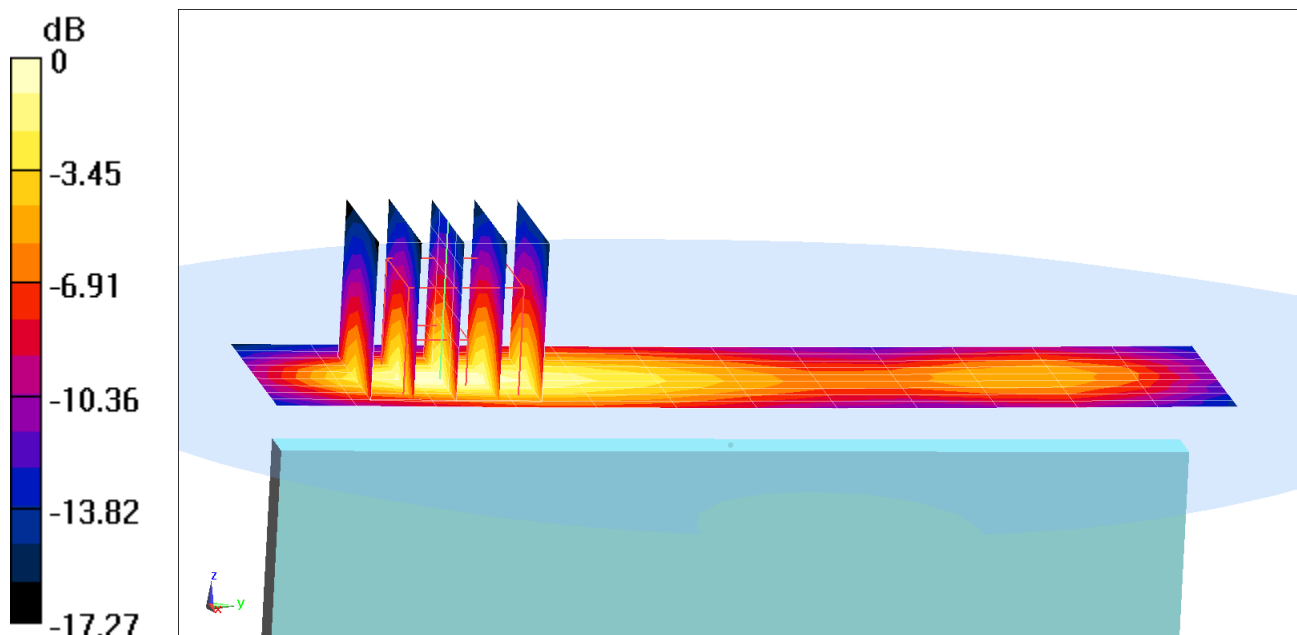

0 dB = 0.179 W/kg = -7.47 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Body; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.325$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/27/2020; Ambient Temp: 22.2°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 707.5 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 9/17/2019
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 12, Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.242 W/kg

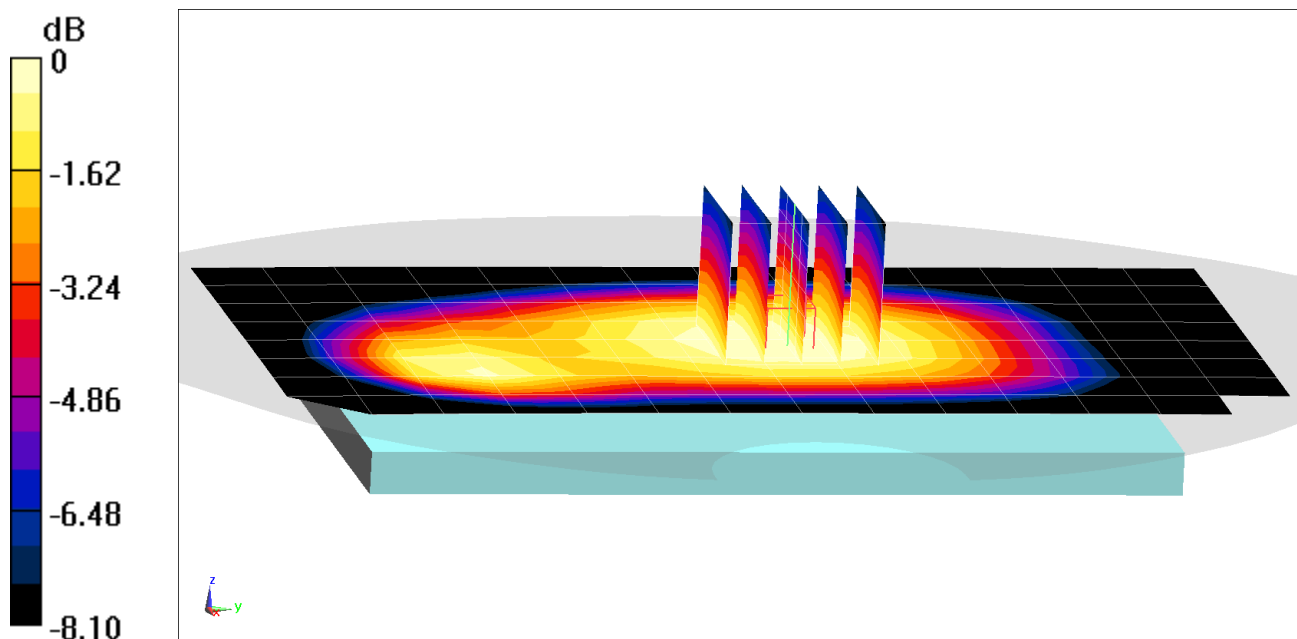

0 dB = 0.292 W/kg = -5.35 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Body; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.957$ S/m; $\epsilon_r = 53.325$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/27/2020; Ambient Temp: 22.2°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 707.5 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 9/17/2019
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 12, Body SAR, Left Edge, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset


Area Scan (13x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.39 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.248 W/kg

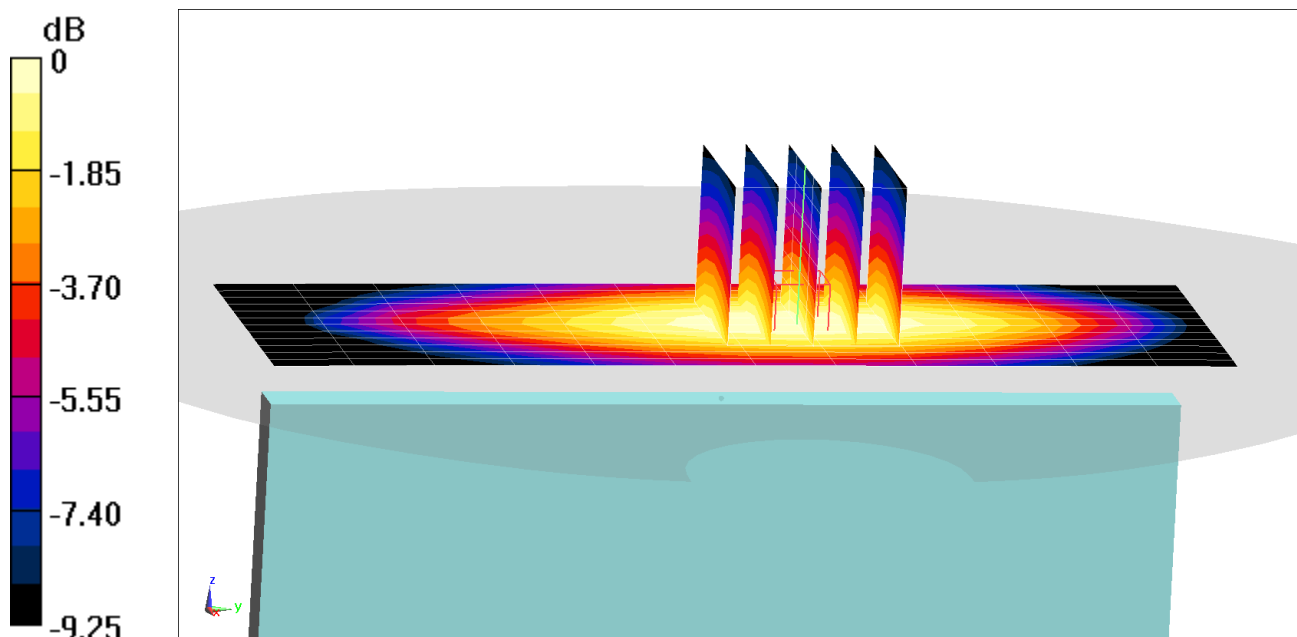

0 dB = 0.322 W/kg = -4.92 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.987 \text{ S/m}$; $\epsilon_r = 53.114$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/27/2020; Ambient Temp: 22.2°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7551; ConvF(10.09, 10.09, 10.09) @ 782 MHz; Calibrated: 9/19/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 9/17/2019

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 13, Body SAR, Back side, Mid.ch
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.248 W/kg

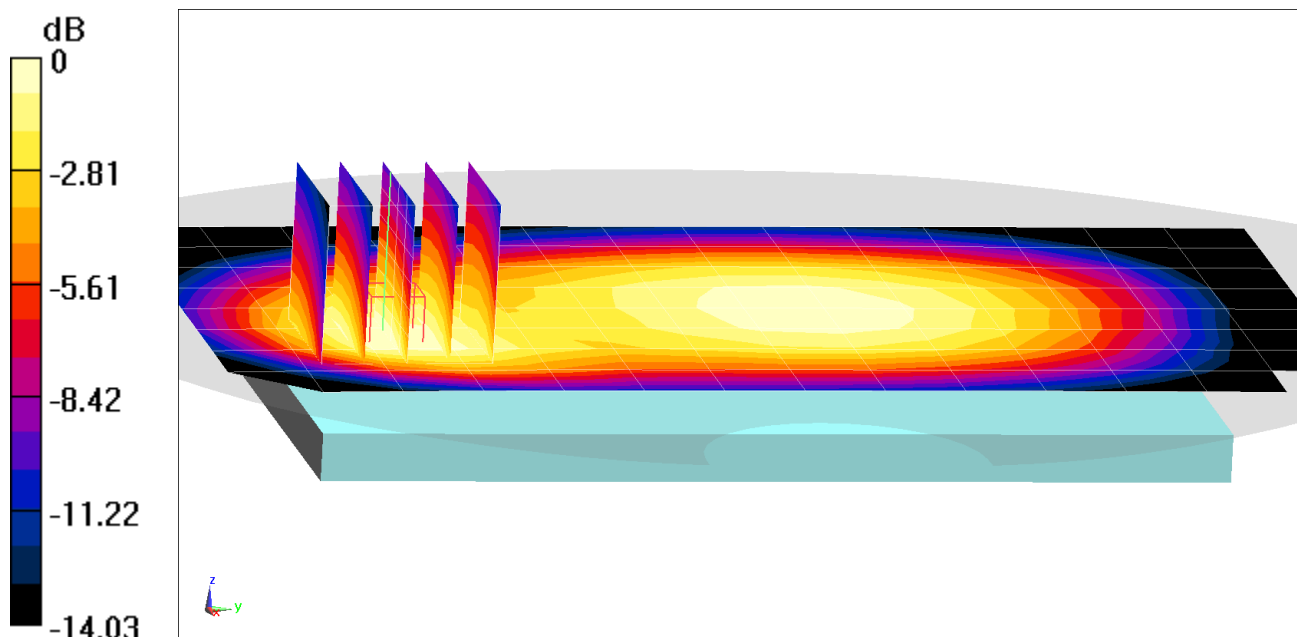

0 dB = 0.330 W/kg = -4.81 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 831.5$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.448$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7551; ConvF(9.92, 9.92, 9.92) @ 831.5 MHz; Calibrated: 9/19/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1333; Calibrated: 9/17/2019
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1792
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.226 W/kg

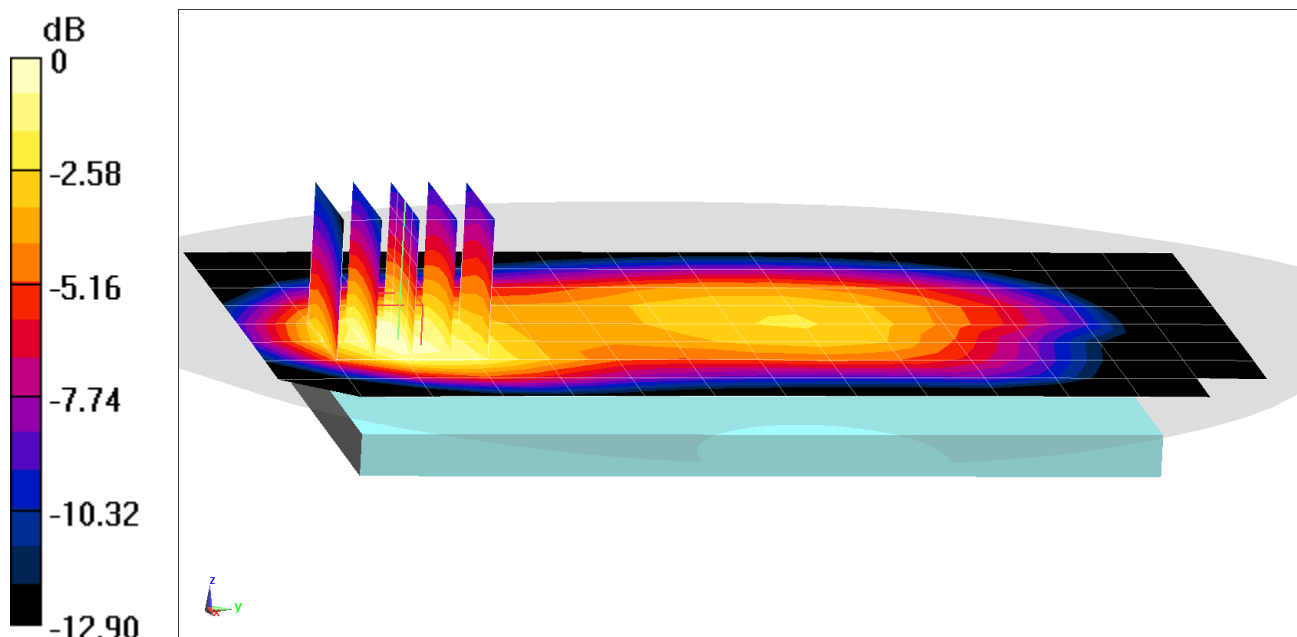

0 dB = 0.305 W/kg = -5.16 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 83197

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1745$ MHz; $\sigma = 1.488$ S/m; $\epsilon_r = 52.298$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1745 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.368 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.056 W/kg

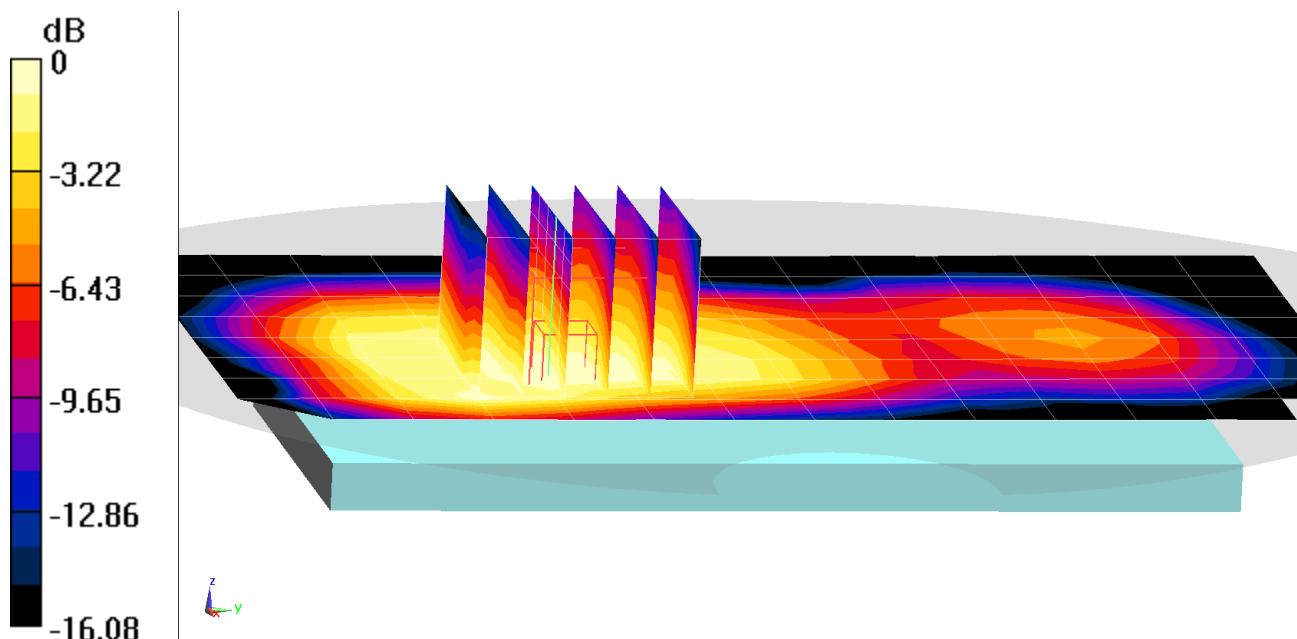

0 dB = 0.0748 W/kg = -11.26 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 83197

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1745 \text{ MHz}$; $\sigma = 1.488 \text{ S/m}$; $\epsilon_r = 52.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 21.9°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1745 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 66 (AWS), Body SAR, Left Edge, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset


Area Scan (11x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.014 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.109 W/kg

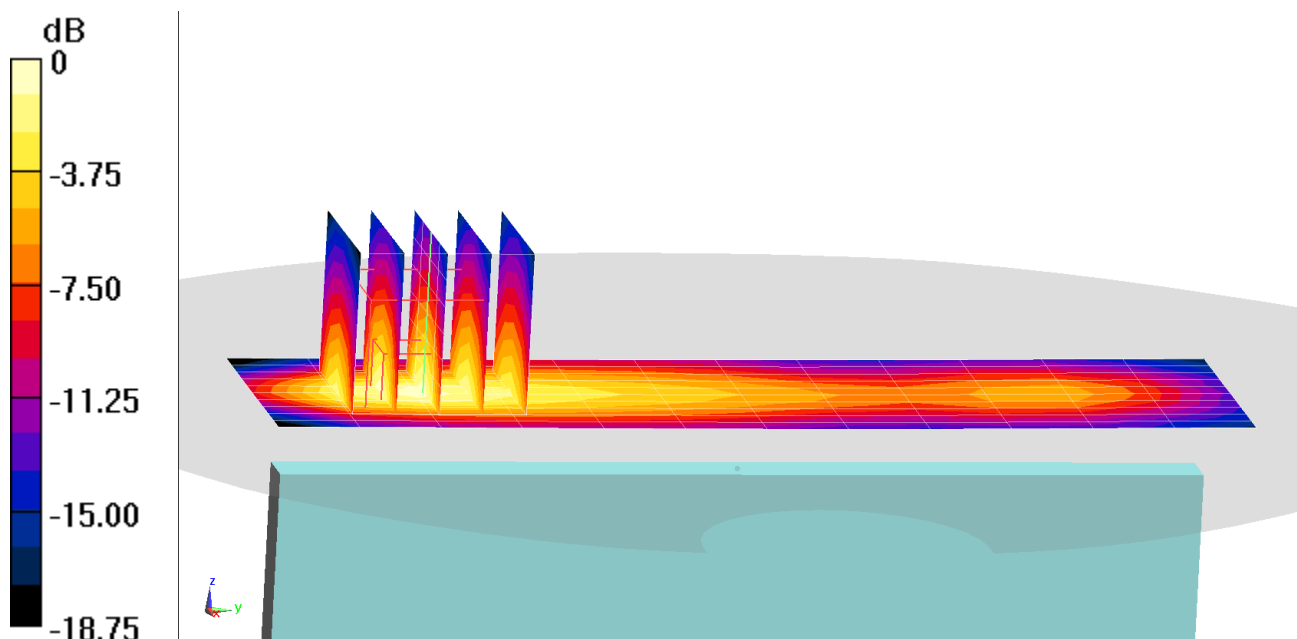

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: 1900 Body; Medium parameters used (interpolated):
 $f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 50.914$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1882.5 MHz; Calibrated: 12/11/2019
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1533; Calibrated: 12/5/2019
Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 25 (PCS), Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.638 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.104 W/kg

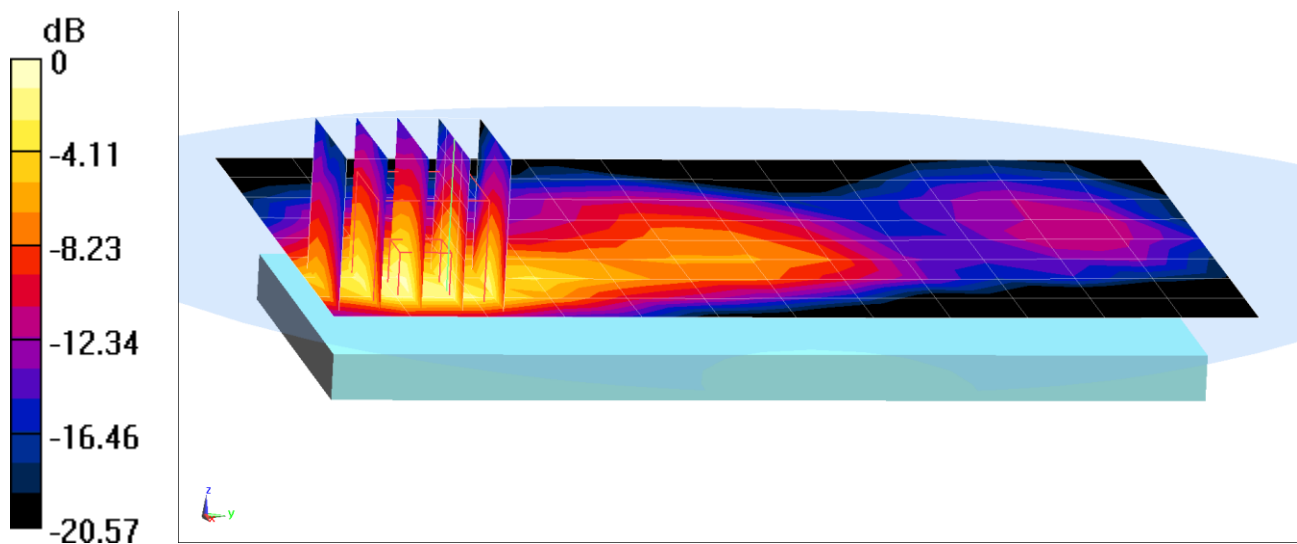

0 dB = 0.158 W/kg = -8.01 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used (interpolated):

$f = 1882.5$ MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 50.914$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.7°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1882.5 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 25 (PCS), Body SAR, Left Edge, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset


Area Scan (11x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.26 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.142 W/kg

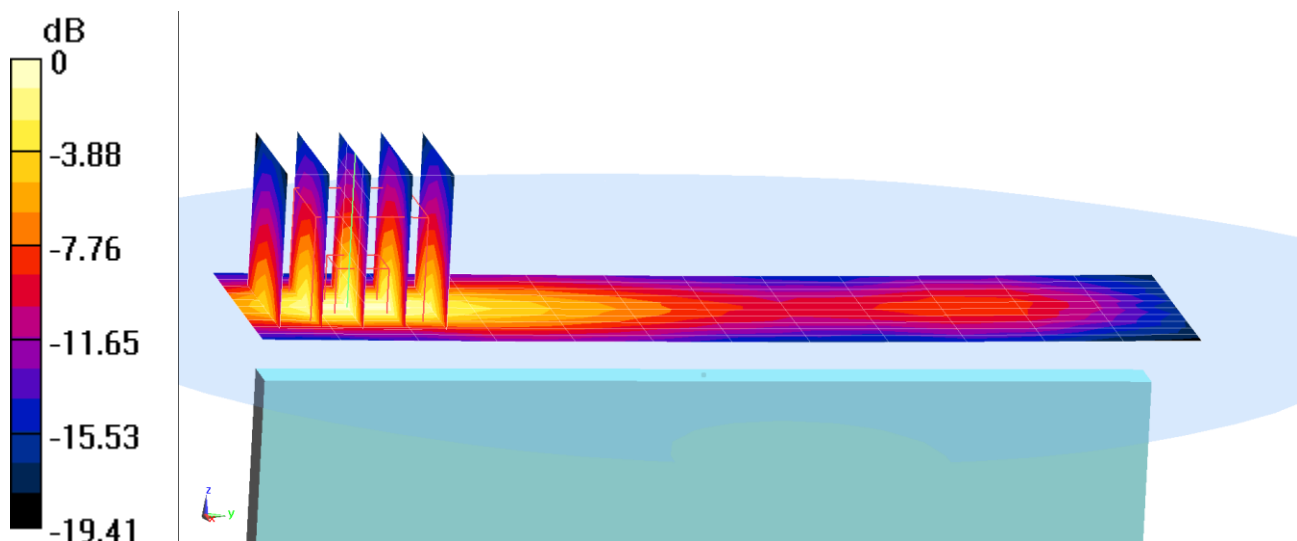

0 dB = 0.223 W/kg = -6.52 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2535 \text{ MHz}$; $\sigma = 2.14 \text{ S/m}$; $\epsilon_r = 51.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2535 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 7, Body SAR, Back side, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.549 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.039 W/kg

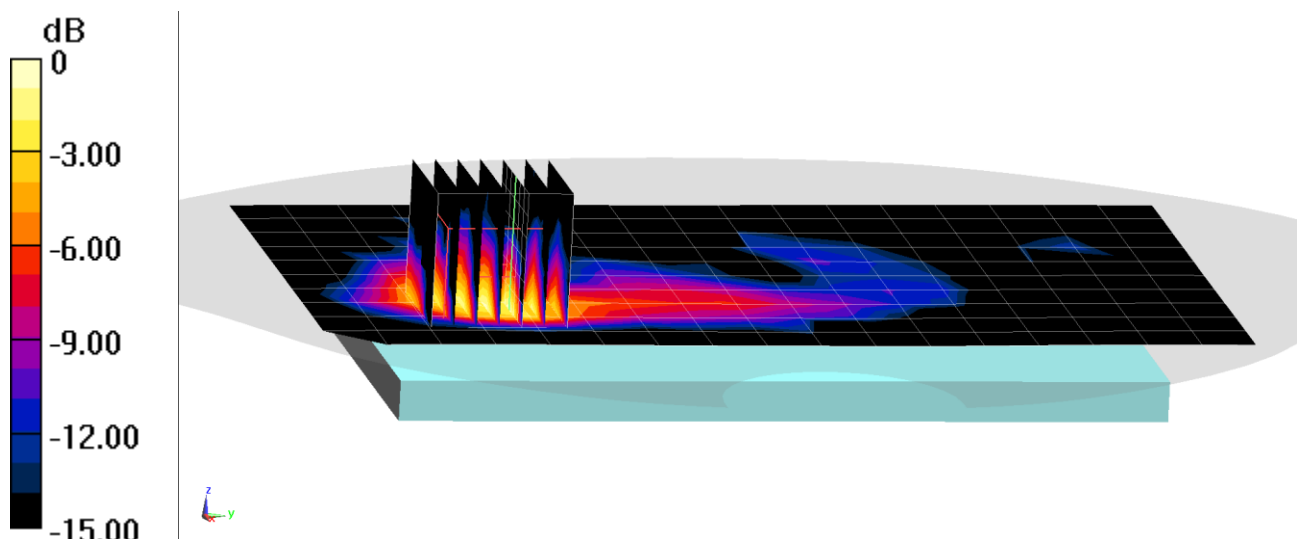

0 dB = 0.0673 W/kg = -11.72 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2450 Body; Medium parameters used:

$f = 2535 \text{ MHz}$; $\sigma = 2.14 \text{ S/m}$; $\epsilon_r = 51.986$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2535 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 7, Body SAR, Left Edge, Mid.ch
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset


Area Scan (11x16x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.436 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.055 W/kg

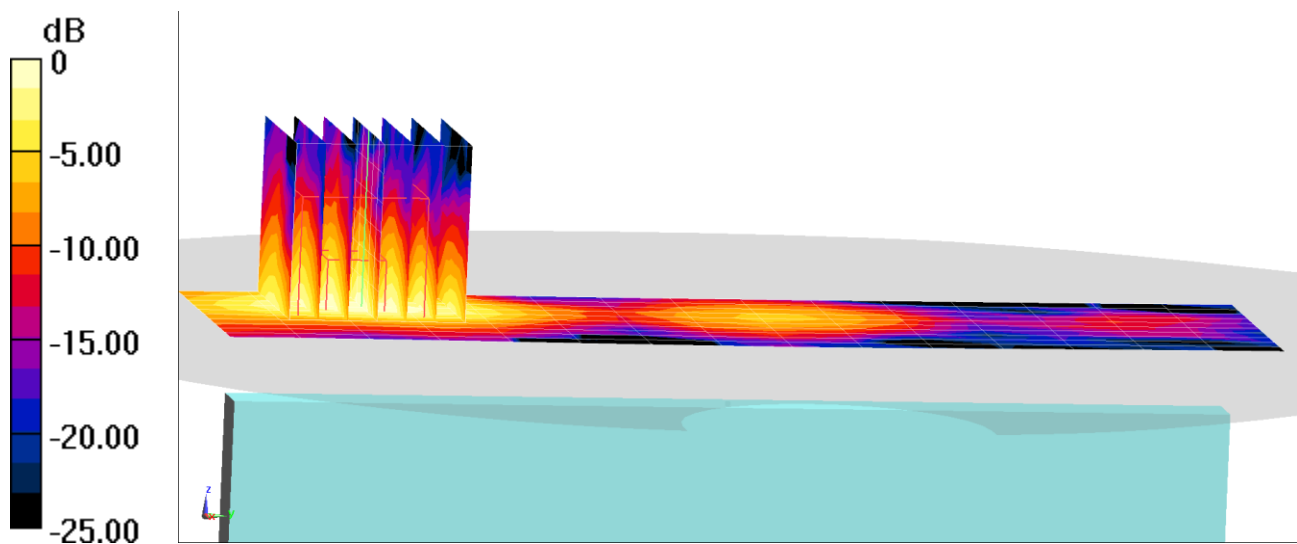

0 dB = 0.0932 W/kg = -10.31 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, LTE Band 48; Frequency: 3690 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used:

$f = 3690$ MHz; $\sigma = 3.602$ S/m; $\epsilon_r = 49.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/14/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3690 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (20); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, Body SAR, Back side, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.626 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.067 W/kg

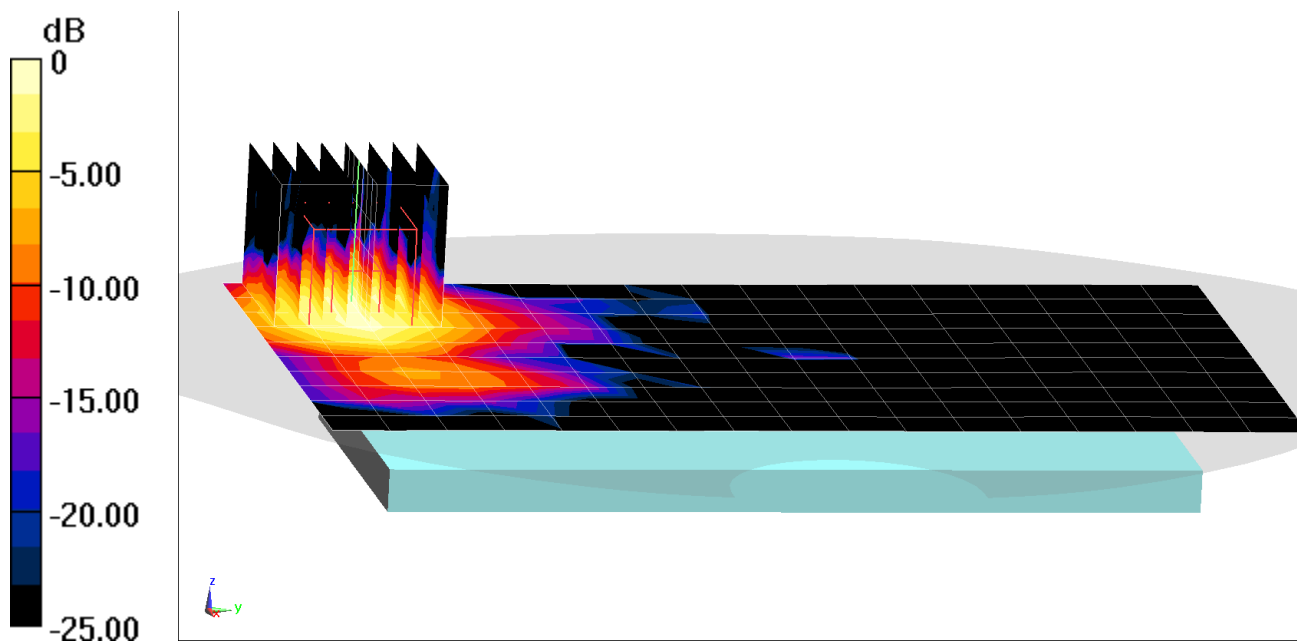

0 dB = 0.126 W/kg = -9.00 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81779

Communication System: UID 0, LTE Band 48; Frequency: 3690 MHz; Duty Cycle: 1:1.58

Medium: 3600 Body; Medium parameters used:

$f = 3690$ MHz; $\sigma = 3.602$ S/m; $\epsilon_r = 49.839$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/14/2020; Ambient Temp: 22.4°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7488; ConvF(6.85, 6.85, 6.85) @ 3690 MHz; Calibrated: 1/21/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1530; Calibrated: 1/13/2020

Phantom: Twin-SAM V5.0 (20); Type: QD 000 P40 CD; Serial: 1646

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 48, Body SAR, Bottom Edge, High.ch
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (11x11x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.631 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.069 W/kg

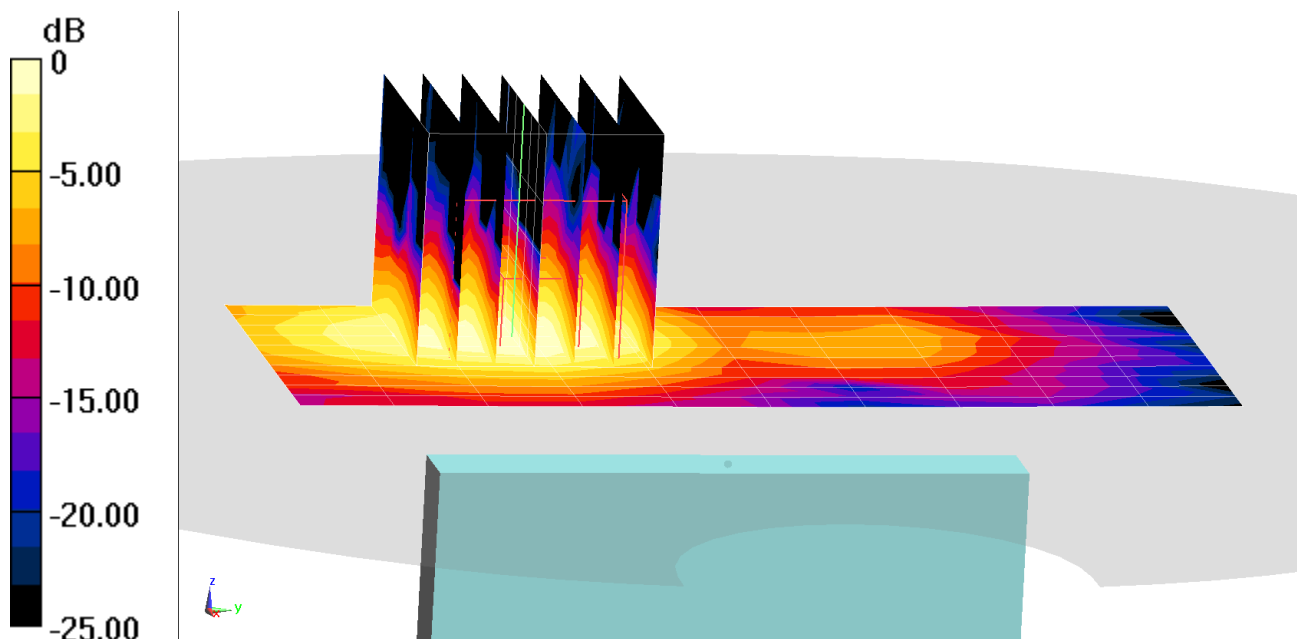

0 dB = 0.129 W/kg = -8.89 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, LTE Band 41 (Class 3); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium: 2450 Body; Medium parameters used:

$f = 2680$ MHz; $\sigma = 2.316$ S/m; $\epsilon_r = 51.566$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/24/2020; Ambient Temp: 22.6°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7409; ConvF(7.12, 7.12, 7.12) @ 2680 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Mode: LTE Band 41, Body SAR, Back side, High.ch
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset


Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.964 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.050 W/kg

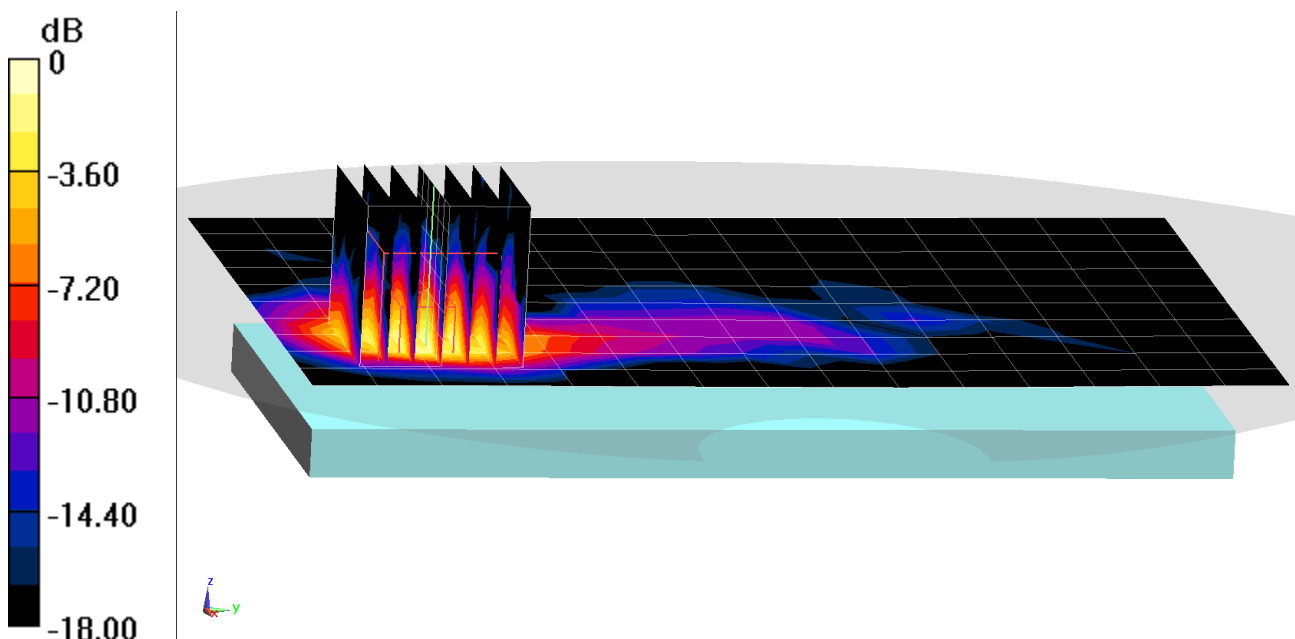

0 dB = 0.0892 W/kg = -10.50 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, NR Band n5; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: 835 Body; Medium parameters used (interpolated):
 $f = 836.5$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 53.294$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/15/2020; Ambient Temp: 23.1°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7488; ConvF(11.04, 11.04, 11.04) @ 836.5 MHz; Calibrated: 1/21/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1530; Calibrated: 1/13/2020
Phantom: Twin-SAM V4.0 Left 30; Type: QD 000 P40 CC; Serial: 1687
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: NR Band n5, Body SAR, Back Side, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 167300, 50 RB, 28 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.82 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.105 W/kg

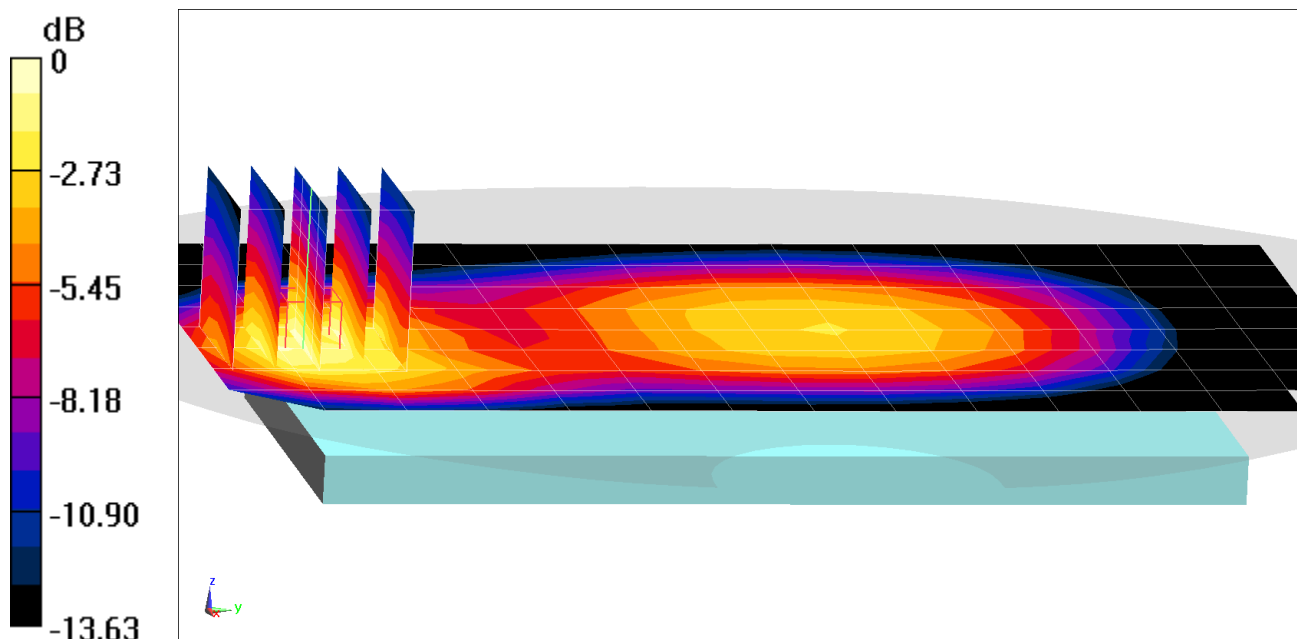

0 dB = 0.149 W/kg = -8.27 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, NR Band n66; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body; Medium parameters used:

$f = 1720$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 53.549$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/03/2020; Ambient Temp: 21.9°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7570; ConvF(8.48, 8.48, 8.48) @ 1720 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1368; Calibrated: 3/12/2020

Phantom: Right Back Twin-SAM V5.0 (30); Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Body SAR, Back Side, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 344000, 1 RB, 53 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.179 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.012 W/kg

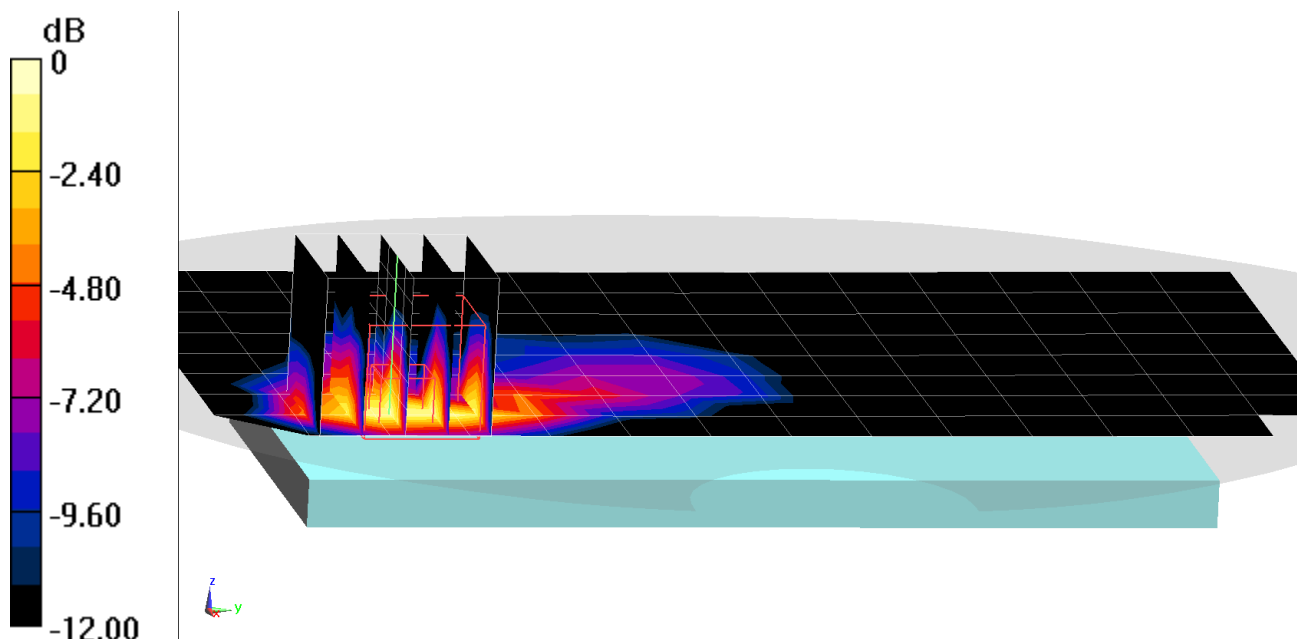

0 dB = 0.0196 W/kg = -17.08 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80797

Communication System: UID 0, NR Band n66; Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: 1750 Body; Medium parameters used:
 $f = 1745$ MHz; $\sigma = 1.508$ S/m; $\epsilon_r = 53.003$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/14/2020; Ambient Temp: 22.1°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7538; ConvF(8.38, 8.38, 8.38) @ 1745 MHz; Calibrated: 5/18/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn728; Calibrated: 5/20/2020
Phantom: Front; Type: QD 000 P40 CD; Serial: 1686
Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n66, Body SAR, Left Edge, 20 MHz Bandwidth
CP-OFDM QPSK, Ch. 349000, 1 RB, 1 RB Offset**


Area Scan (10x13x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.452 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.029 W/kg

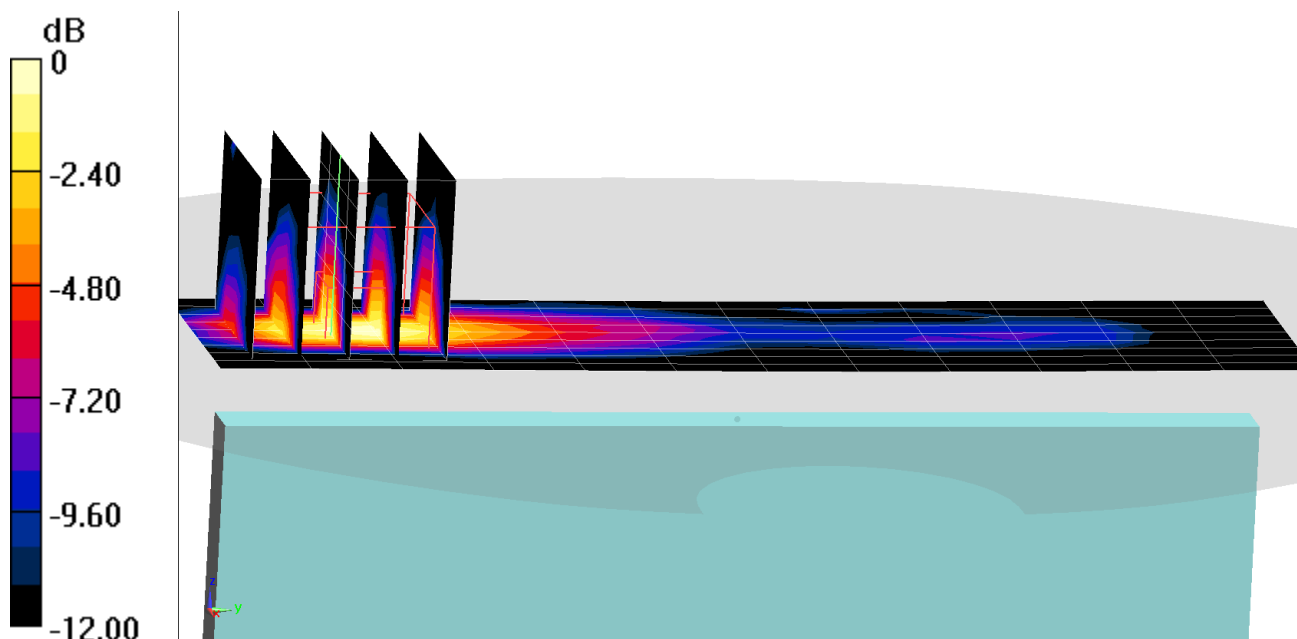

0 dB = 0.0427 W/kg = -13.70 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, NR Band n2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860$ MHz; $\sigma = 1.508$ S/m; $\epsilon_r = 52.688$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/31/2020; Ambient Temp: 20.9°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n2, Body SAR, Back Side, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 372000, 1 RB, 53 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.654 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.030 W/kg

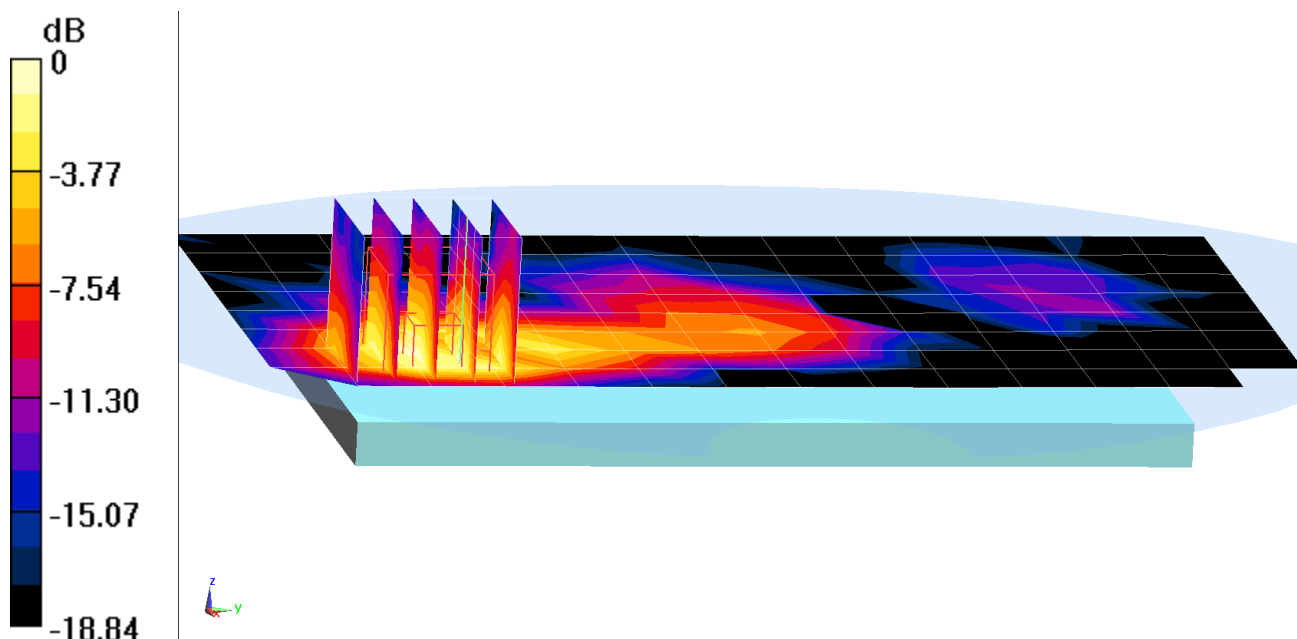

0 dB = 0.0446 W/kg = -13.51 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81738

Communication System: UID 0, NR Band n2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body; Medium parameters used:

$f = 1860$ MHz; $\sigma = 1.508$ S/m; $\epsilon_r = 52.688$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08/31/2020; Ambient Temp: 20.9°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7571; ConvF(7.56, 7.56, 7.56) @ 1860 MHz; Calibrated: 12/11/2019

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1533; Calibrated: 12/5/2019

Phantom: SAM Left; Type: QD000P40CC; Serial: TP: 1375

Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Mode: NR Band n2, Body SAR, Left Edge, 20 MHz Bandwidth
DFT-s-OFDM QPSK, Ch. 372000, 50 RB, 0 RB Offset**


Area Scan (11x15x1): Measurement grid: dx=5mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.726 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.036 W/kg

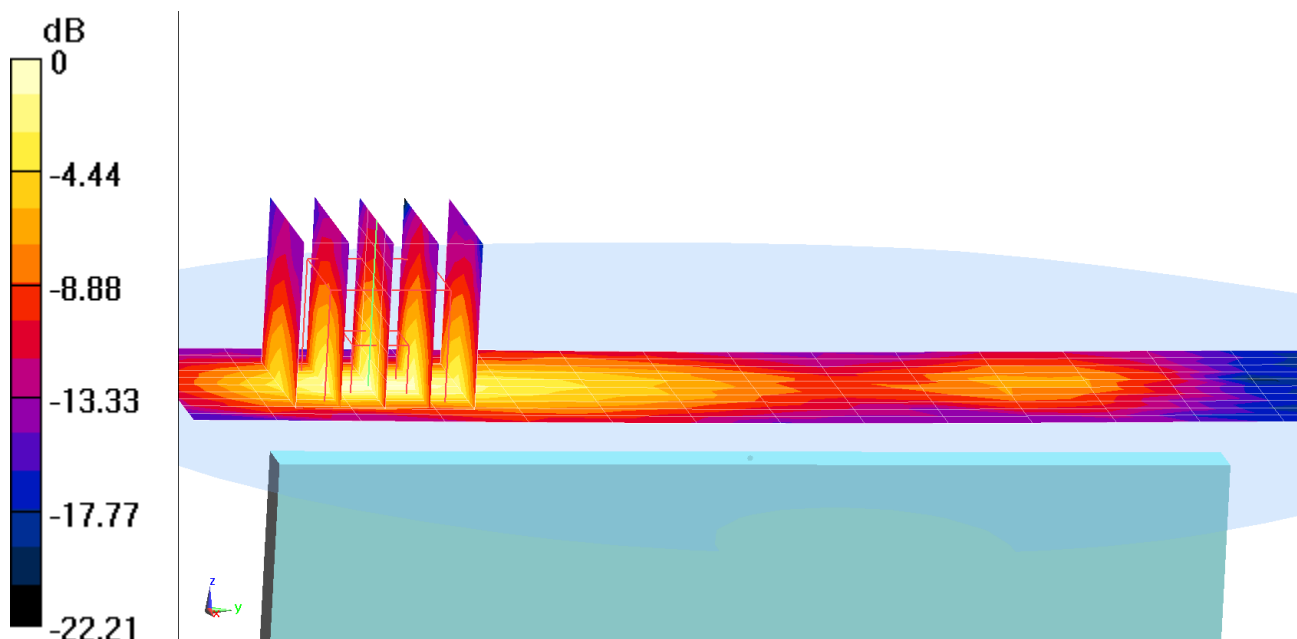

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80953

Communication System: UID 0, 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
 $f = 2412$ MHz; $\sigma = 1.997$ S/m; $\epsilon_r = 52.311$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/03/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2412 MHz; Calibrated: 6/23/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 6/18/2020
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4470 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.057 W/kg

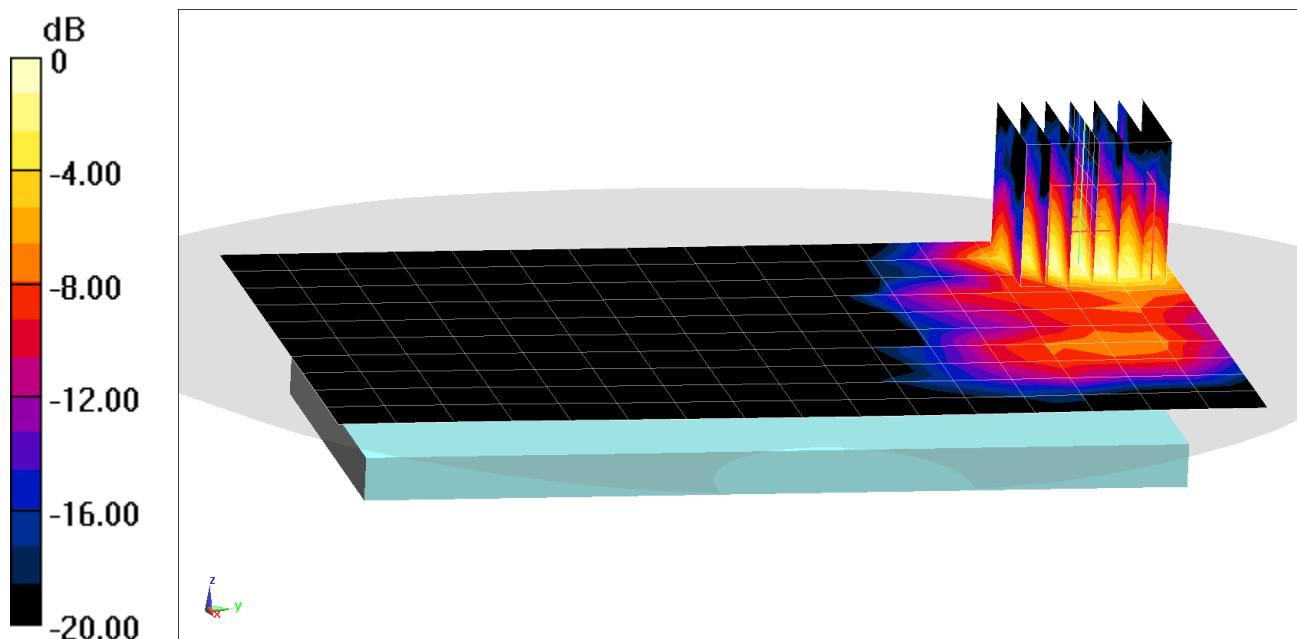

0 dB = 0.0933 W/kg = -10.30 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80953


Communication System: UID 0, 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: 2450 Body; Medium parameters used (interpolated):
 $f = 2412 \text{ MHz}$; $\sigma = 1.997 \text{ S/m}$; $\epsilon_r = 52.311$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/03/2020; Ambient Temp: 22.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2412 MHz; Calibrated: 6/23/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1334; Calibrated: 6/18/2020
Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: IEEE 802.11b, Antenna 1, 22 MHz Bandwidth, Body SAR, Ch 1, 1 Mbps, Right Edge

Area Scan (10x17x1): Measurement grid: dx=5mm, dy=12mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.4679 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.171 W/kg
SAR(1 g) = 0.078 W/kg

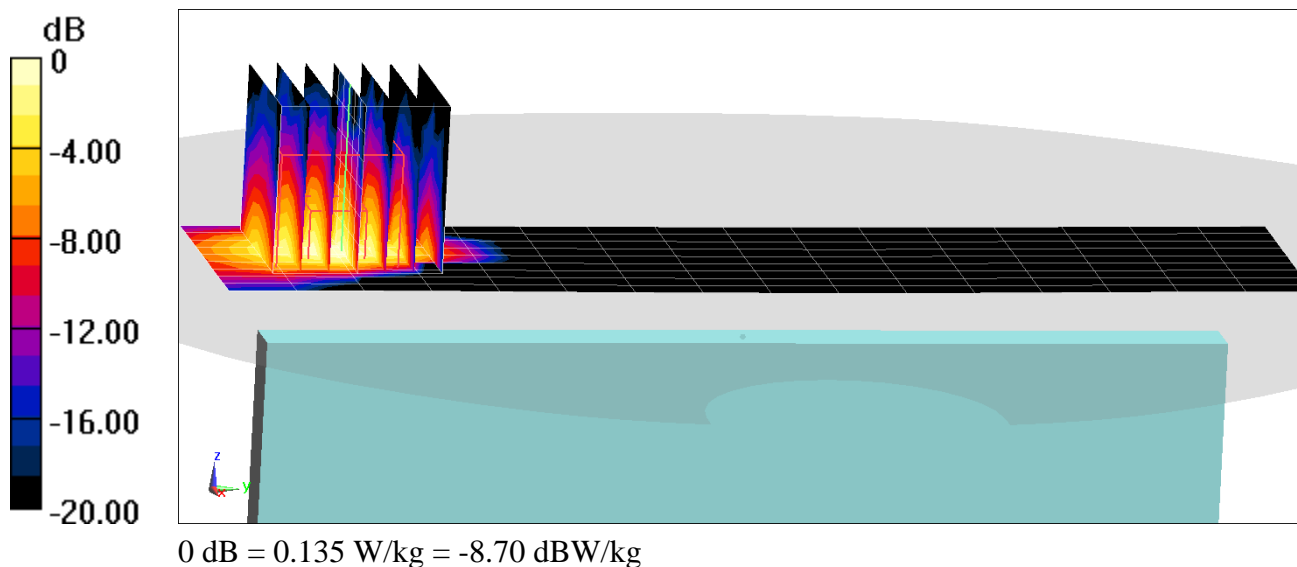

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81134

Communication System: UID 0, IEEE 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1
Medium: 5200-5800 Body; Medium parameters used:
 $f = 5290$ MHz; $\sigma = 5.517$ S/m; $\epsilon_r = 47.419$; $\rho = 1000$ kg/m³
Phantom section: Flat Section; Space: 1.0 cm


Test Date: 08/23/2020; Ambient Temp: 22.1°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7538; ConvF(4.6, 4.6, 4.6) @ 5290 MHz; Calibrated: 5/18/2020
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1322; Calibrated: 7/15/2020
Phantom: Front; Type: QD 000 P40 CD; Serial: 1686
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11ac, Antenna 2, UNII-2A, 80 MHz Bandwidth
Body SAR, Ch 58, 29.3 Mbps, Back Side**

Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4
Reference Value = 3.896 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.276 W/kg
SAR(1 g) = 0.069 W/kg

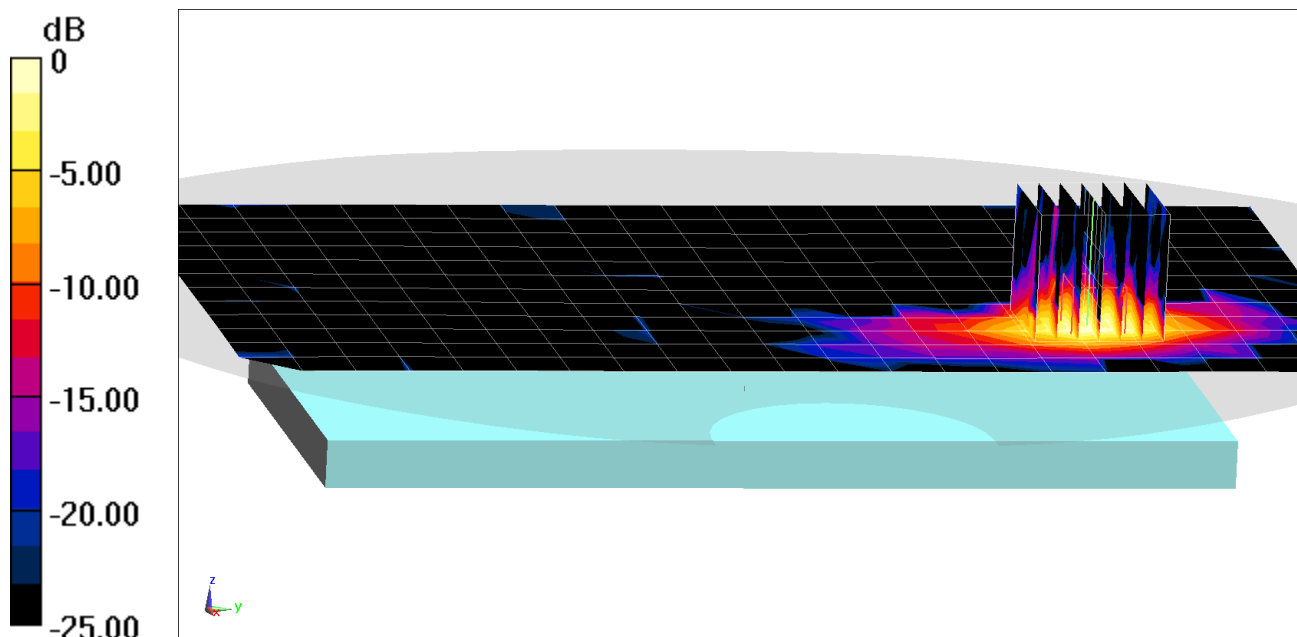

0 dB = 0.175 W/kg = -7.57 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80979

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.300

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 2.031$ S/m; $\epsilon_r = 51.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/13/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2441 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Back Side


Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.826 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.061 W/kg

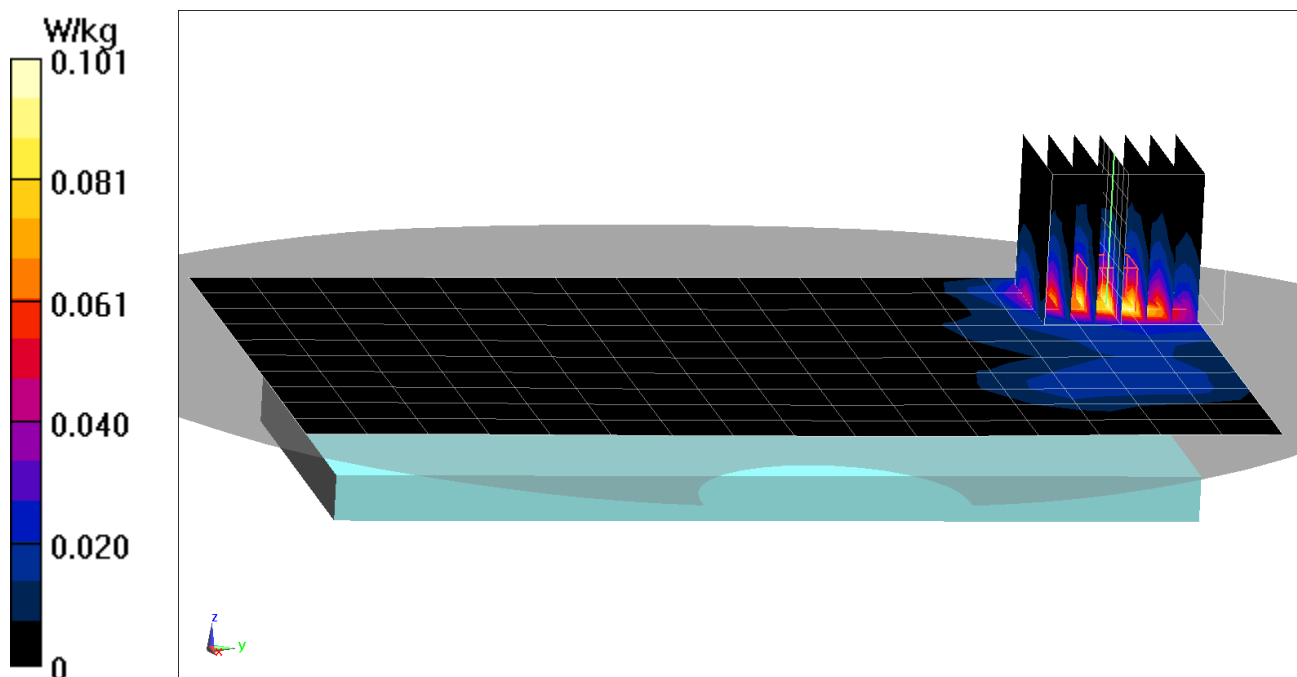

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 80979

Communication System: UID 0, Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1.300

Medium: 2450 Body; Medium parameters used (interpolated):

$f = 2441$ MHz; $\sigma = 2.031$ S/m; $\epsilon_r = 51.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 09/13/2020; Ambient Temp: 23.0°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7409; ConvF(7.24, 7.24, 7.24) @ 2441 MHz; Calibrated: 6/23/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/18/2020

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Mode: Bluetooth, Body SAR, Ch 39, 1 Mbps, Right Edge


Area Scan (10x16x1): Measurement grid: dx=5mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.099 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.088 W/kg

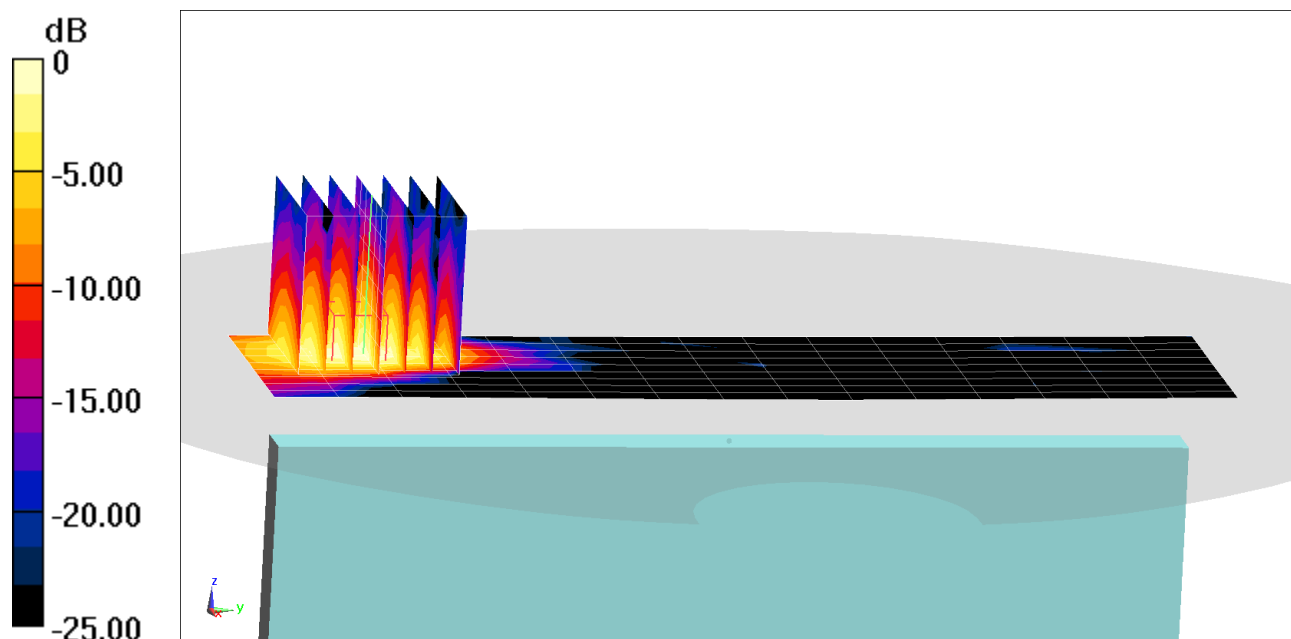

0 dB = 0.153 W/kg = -8.15 dBW/kg

PCTEST

DUT: PY7-57441Y; Type: Portable Handset; Serial: 81134

Communication System: UID 0, IEEE 802.11ac; Frequency: 5290 MHz; Duty Cycle: 1:1

Medium: 5200-5800 Body; Medium parameters used:

$f = 5290$ MHz; $\sigma = 5.517$ S/m; $\epsilon_r = 47.419$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 08/23/2020; Ambient Temp: 22.1°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7538; ConvF(4.6, 4.6, 4.6) @ 5290 MHz; Calibrated: 5/18/2020

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/15/2020

Phantom: Front; Type: QD 000 P40 CD; Serial: 1686

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

**Mode: IEEE 802.11ac, Antenna 2, U-NII-2A, 80 MHz Bandwidth
Phablet SAR, Ch 58, 29.3 Mbps, Back Side**

Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (17x17x8)/Cube 0: Measurement grid: dx=1.9mm, dy=1.9mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 2.353 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 9.26 W/kg

SAR(10 g) = 0.215 W/kg

