

### #01\_GSM850\_GPRS (4 Tx slots)\_Right Cheek\_Ch189


Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_850\_181014 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 41.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.154 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.09 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 0.174 W/kg  
**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.112 W/kg**  
Maximum value of SAR (measured) = 0.156 W/kg

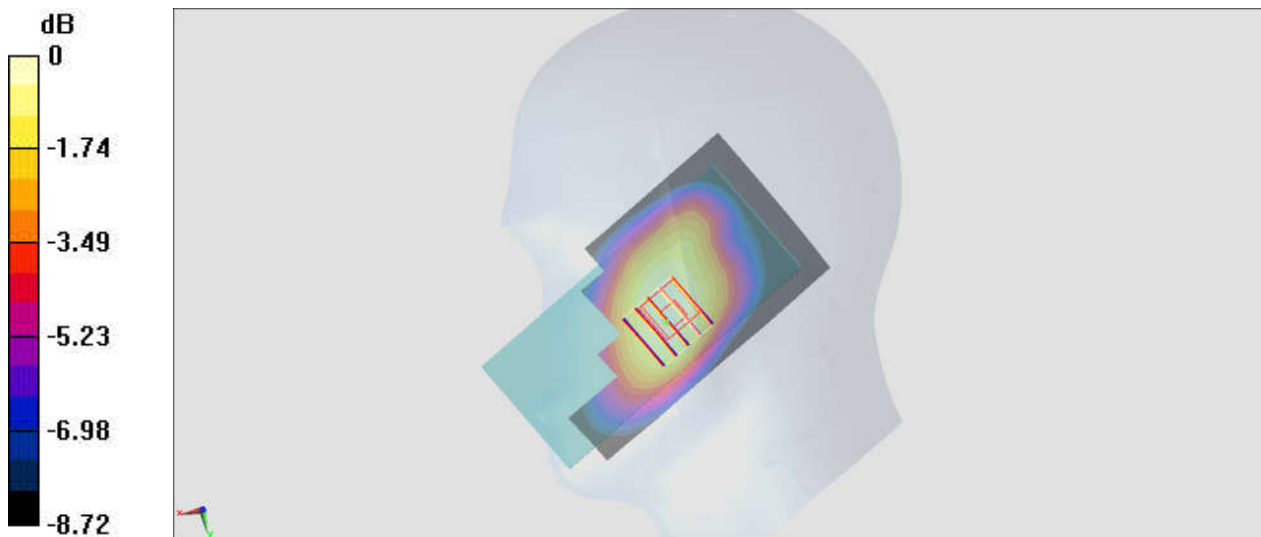

0 dB = 0.156 W/kg = -8.07 dBW/kg

## #02\_GSM1900\_GPRS (4 Tx slots)\_Left Cheek\_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900\_181025 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.456$  S/m;  $\epsilon_r = 40.863$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.71, 8.71, 8.71) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0837 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.547 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0790 W/kg

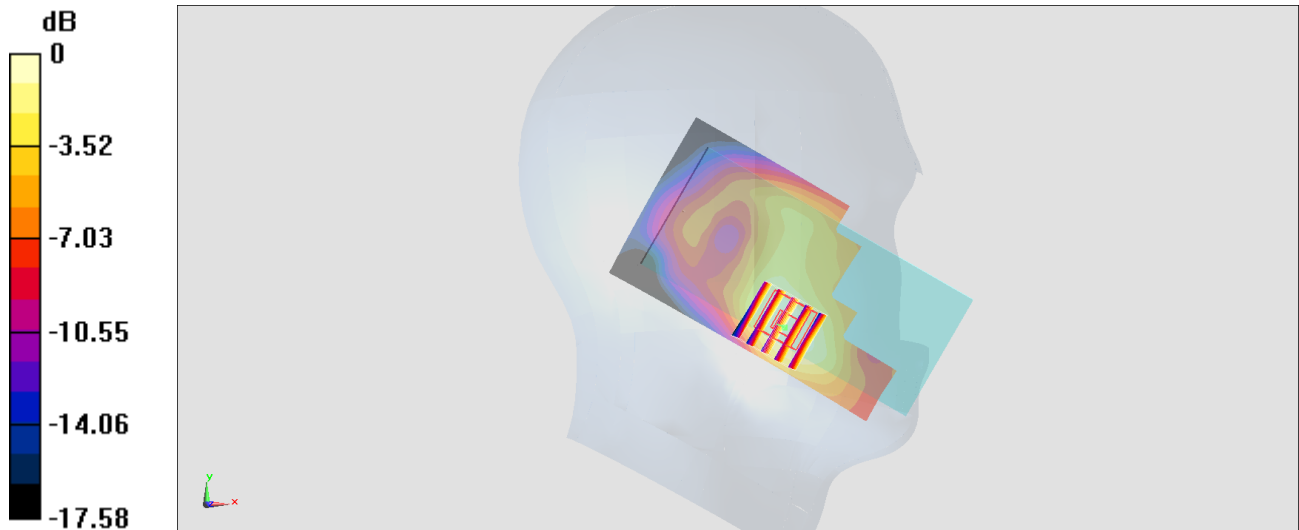

0 dB = 0.0790 W/kg = -11.02 dBW/kg

### #03\_WCDMA II\_RMC 12.2Kbps\_Left Cheek\_Ch9538

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_181025 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.454$  S/m;  $\epsilon_r = 40.872$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.71, 8.71, 8.71) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0864 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.637 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0822 W/kg

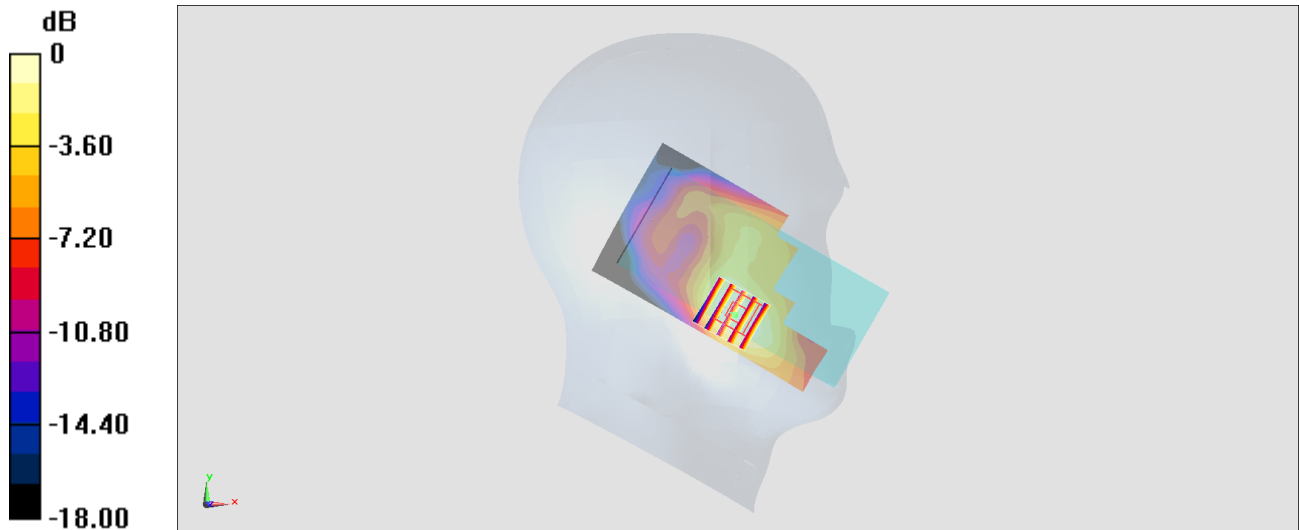

0 dB = 0.0822 W/kg = -10.85 dBW/kg

**#04\_WCDMA V\_RMC 12.2Kbps\_Right Cheek\_Ch4132**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL\_850\_181014 Medium parameters used :  $f = 826.4$  MHz;  $\sigma = 0.87$  S/m;  $\epsilon_r = 41.828$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.33 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.143 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

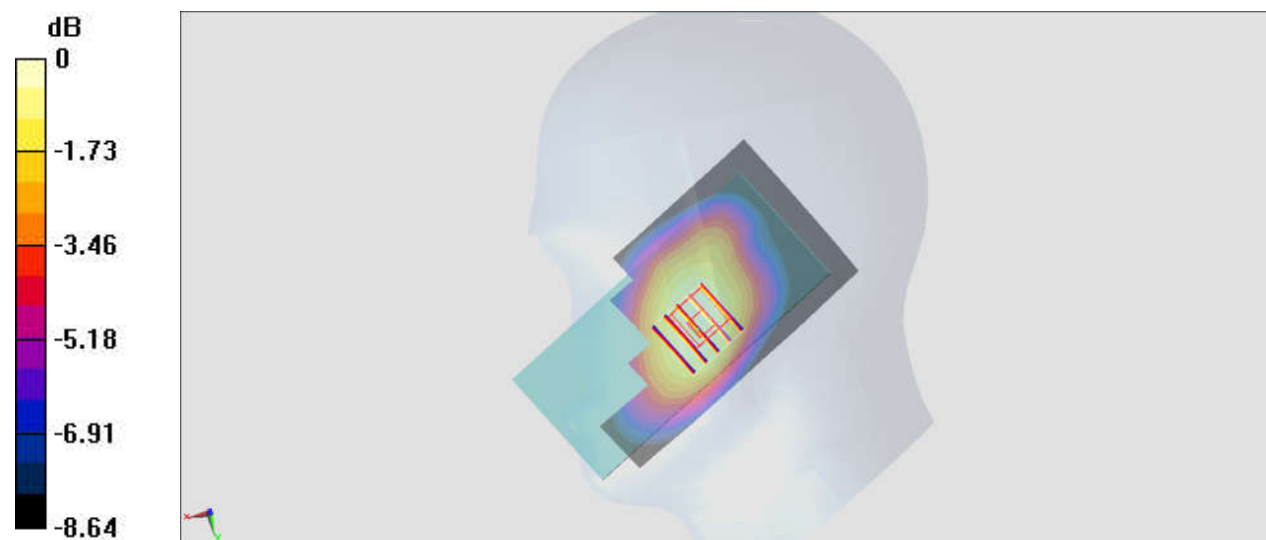

0 dB = 0.200 W/kg = -6.99 dBW/kg

**#05\_LTE Band 2\_20M\_QPSK\_1\_99\_Right Cheek\_Ch19100**

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_181025 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.446$  S/m;  $\epsilon_r = 40.903$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(8.71, 8.71, 8.71) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0832 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.487 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0807 W/kg

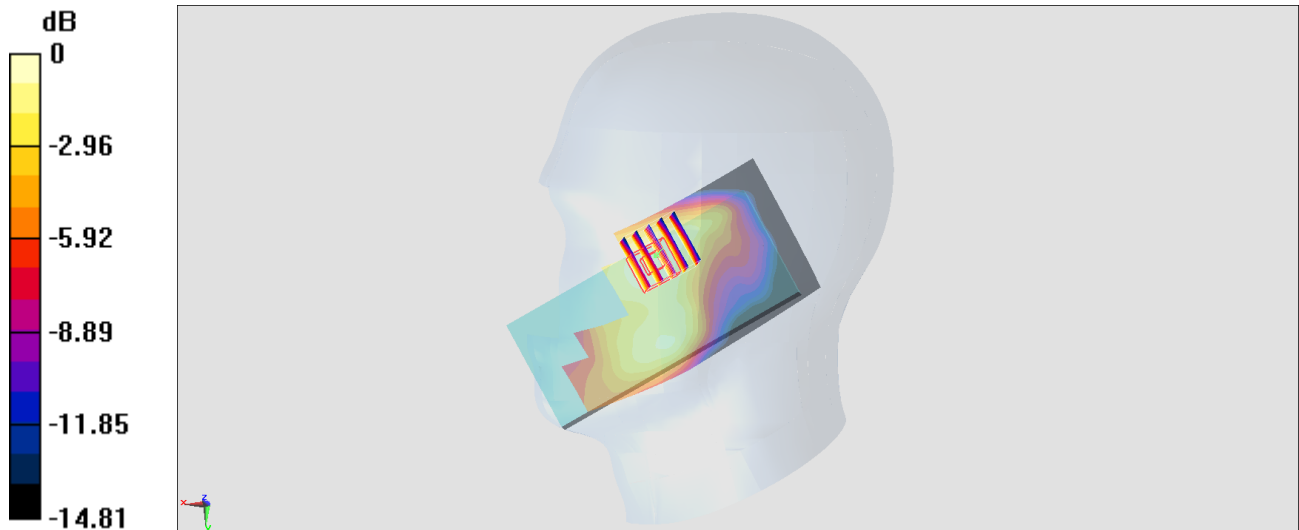

0 dB = 0.0807 W/kg = -10.93 dBW/kg

### #06\_LTE Band 5\_10M\_QPSK\_1\_0\_Right Cheek\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_181014 Medium parameters used :  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 41.697$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.8 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.171 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $14.18 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $0.197 \text{ W/kg}$   
**SAR(1 g) =  $0.158 \text{ W/kg}$ ; SAR(10 g) =  $0.122 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.174 \text{ W/kg}$

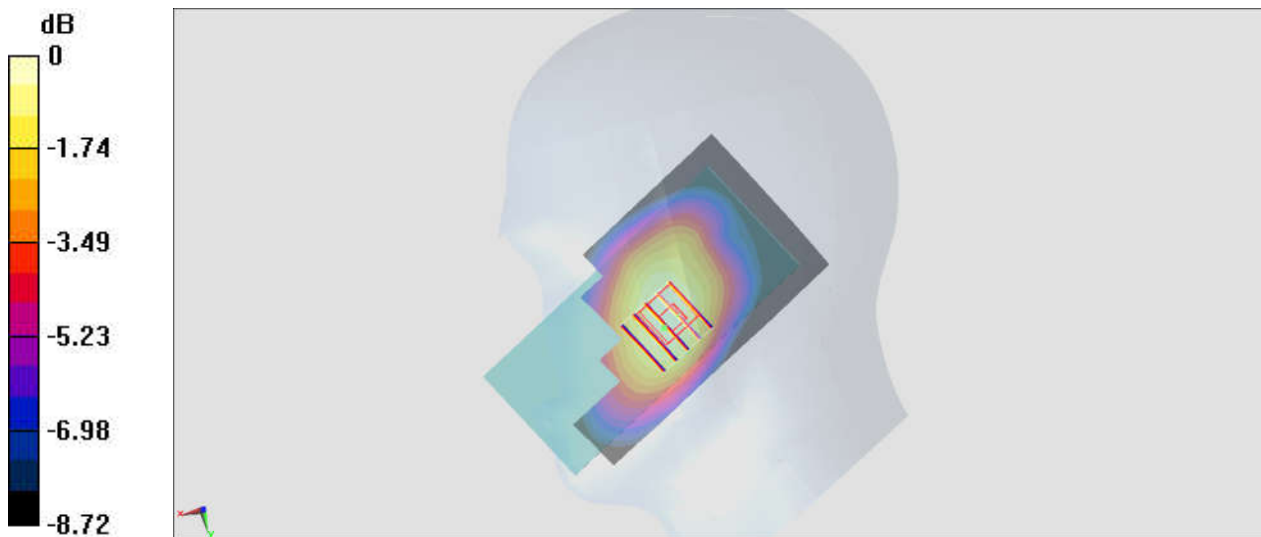

0 dB =  $0.174 \text{ W/kg} = -7.59 \text{ dBW/kg}$

### #07\_LTE Band 7\_20M\_QPSK\_1\_99\_Left Cheek\_Ch21350


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium: HSL\_2600\_181012 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.943$  S/m;  $\epsilon_r = 39.616$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.490 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 13.43 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.702 W/kg  
**SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.207 W/kg**  
 Maximum value of SAR (measured) = 0.470 W/kg

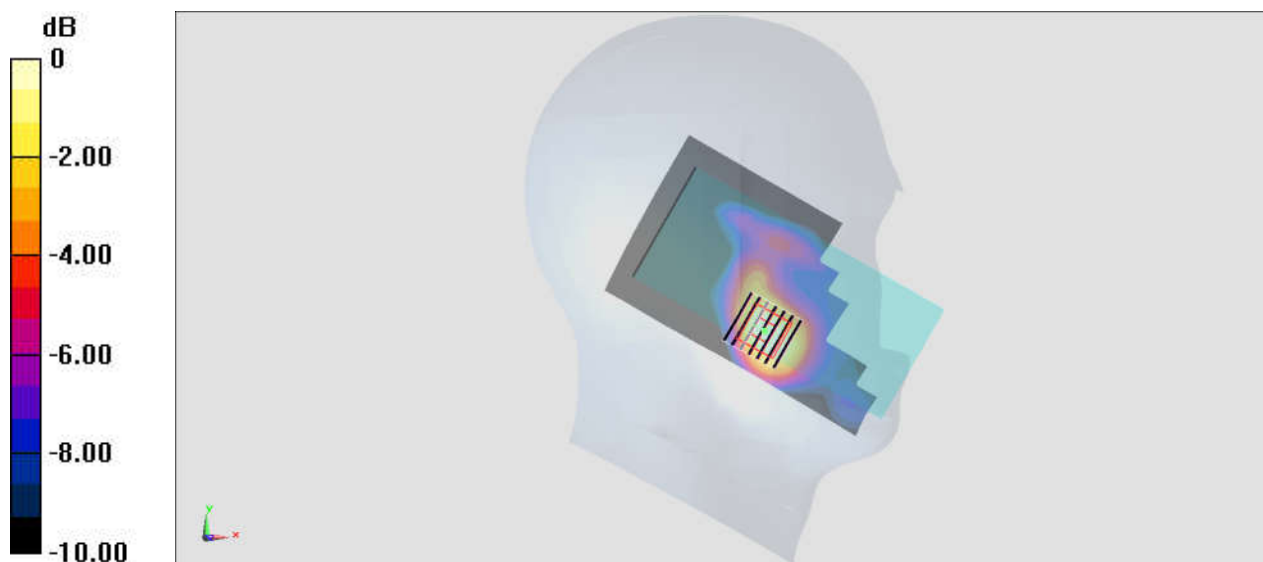

0 dB = 0.470 W/kg = -3.28 dBW/kg

### #08\_LTE Band 41\_20M\_QPSK\_1\_0\_Left Cheek\_Ch40600


Communication System: LTE; Frequency: 2591 MHz; Duty Cycle: 1:1.59  
 Medium: HSL\_2600\_181012 Medium parameters used :  $f = 2591$  MHz;  $\sigma = 1.966$  S/m;  $\epsilon_r = 39.442$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.304 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.704 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 0.449 W/kg  
**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.124 W/kg**  
 Maximum value of SAR (measured) = 0.297 W/kg

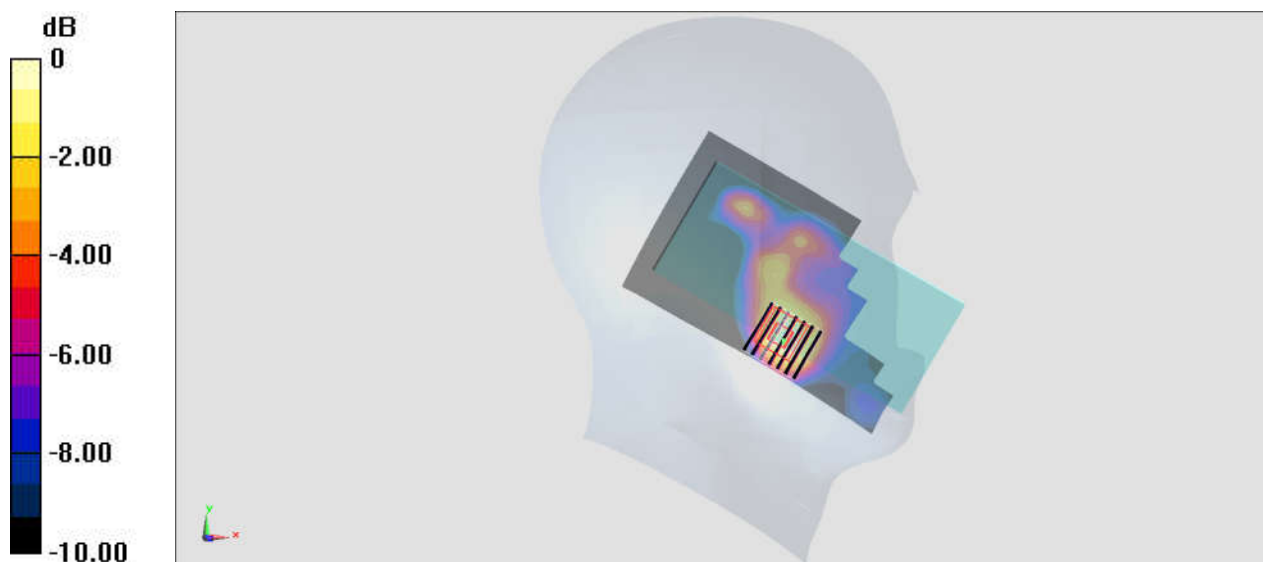

0 dB = 0.297 W/kg = -5.27 dBW/kg



**#09\_WLAN2.4GHz\_802.11b 1Mbps\_Right Tilted\_Ch6**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium: HSL\_2450\_181031 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.771$  S/m;  $\epsilon_r = 39.977$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.69, 4.69, 4.69) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.343 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.01 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.465 W/kg

**SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.331 W/kg

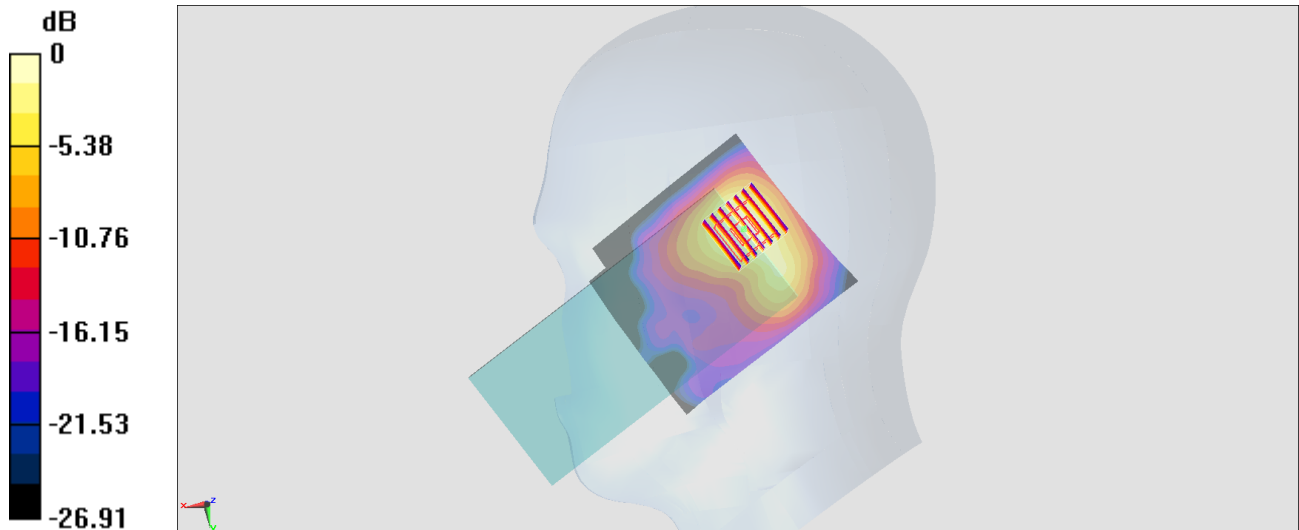

0 dB = 0.331 W/kg = -4.80 dBW/kg

**#10\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch64**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.03

Medium: HSL\_5G\_181102 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.894$  S/m;  $\epsilon_r = 36.535$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.56, 5.56, 5.56) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.78 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.36 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.20 W/kg

**SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.228 W/kg**

Maximum value of SAR (measured) = 1.85 W/kg

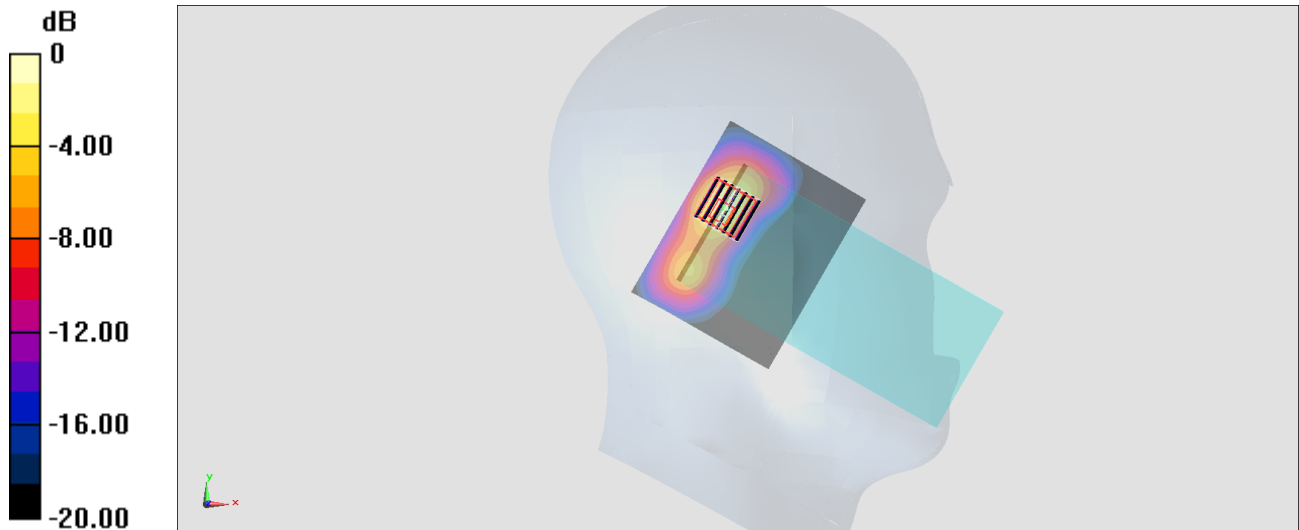

0 dB = 1.85 W/kg = 2.67 dBW/kg

**#11\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch132**

Communication System: 802.11a ; Frequency: 5660 MHz;Duty Cycle: 1:1.03

Medium: HSL\_5G\_181102 Medium parameters used:  $f = 5660$  MHz;  $\sigma = 5.247$  S/m;  $\epsilon_r = 36.056$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.97, 4.97, 4.97) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.63 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 22.62 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.99 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.320 W/kg**

Maximum value of SAR (measured) = 2.69 W/kg

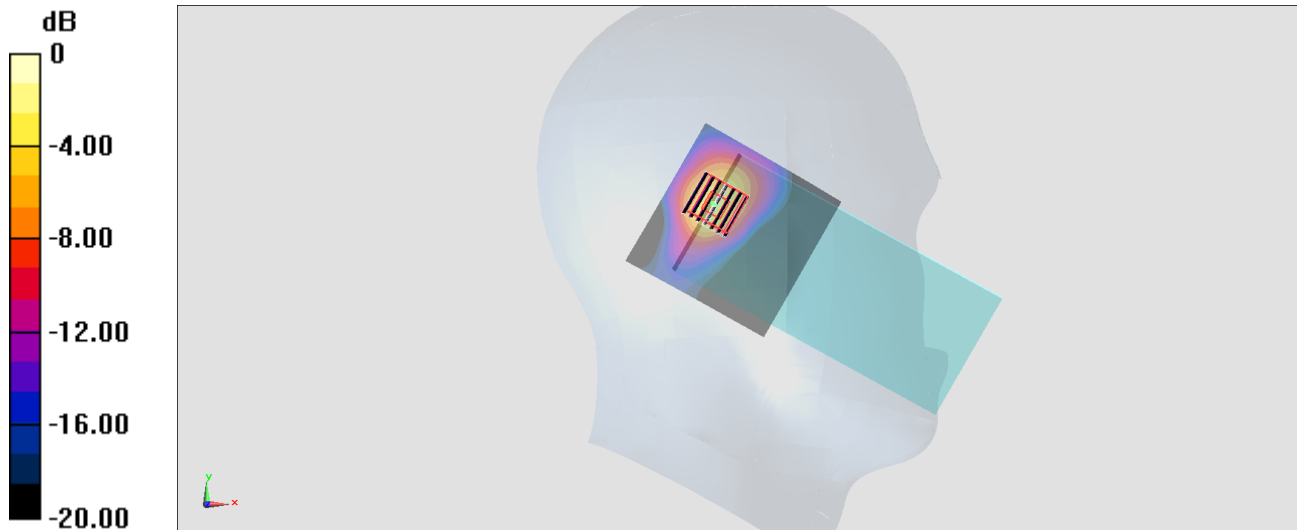

0 dB = 2.69 W/kg = 4.30 dBW/kg

**#12\_WLAN5GHz\_802.11a 6Mbps\_Left Tilted\_Ch149**

Communication System: 802.11a ; Frequency: 5745 MHz;Duty Cycle: 1:1.03

Medium: HSL\_5G\_181102 Medium parameters used :  $f = 5745$  MHz;  $\sigma = 5.336$  S/m;  $\epsilon_r = 35.949$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.04, 5.04, 5.04) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.88 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.83 W/kg

**SAR(1 g) = 0.852 W/kg; SAR(10 g) = 0.261 W/kg**

Maximum value of SAR (measured) = 2.10 W/kg

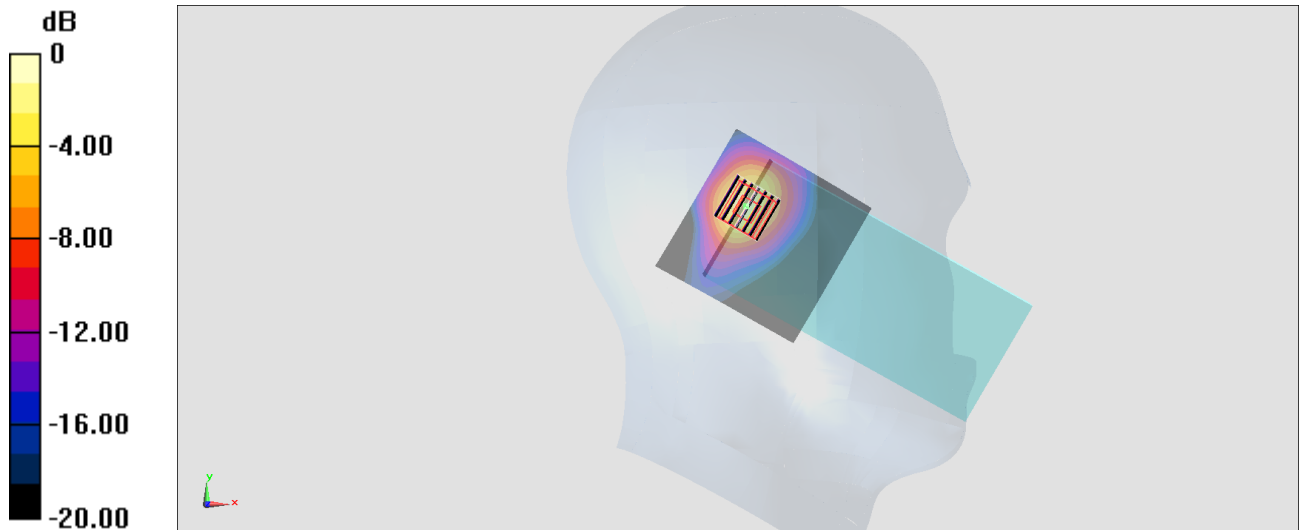

0 dB = 2.10 W/kg = 3.22 dBW/kg

## #13\_Bluetooth\_1Mbps\_Left Cheek\_Ch0

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.301

Medium: HSL\_2450\_180916 Medium parameters used :  $f = 2402$  MHz;  $\sigma = 1.775$  S/m;  $\epsilon_r = 38.566$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.72, 7.72, 7.72) ; Calibrated: 2018/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: SAM\_Right; Type: QD000P40CD; Serial: 1884
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.154 W/kg



**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.809 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.208 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.155 W/kg

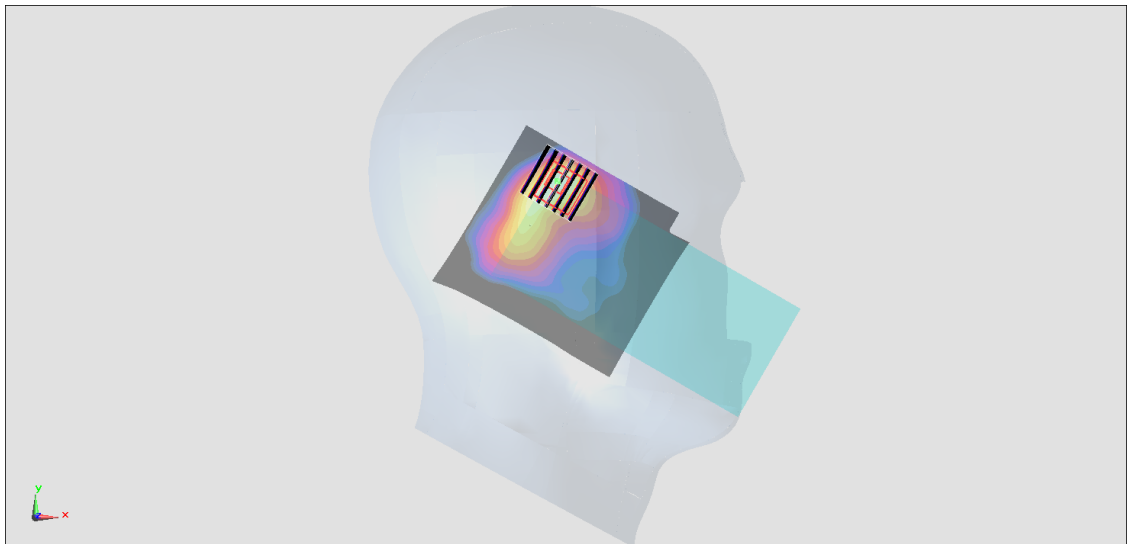

0 dB = 0.155 W/kg = -8.10 dBW/kg

### #14\_GSM850\_GPRS (4 Tx slots)\_Right Side\_10mm\_Ch189


Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.959$  S/m;  $\epsilon_r = 55.008$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x11x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.314 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.29 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.383 W/kg  
**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.190 W/kg**  
Maximum value of SAR (measured) = 0.313 W/kg

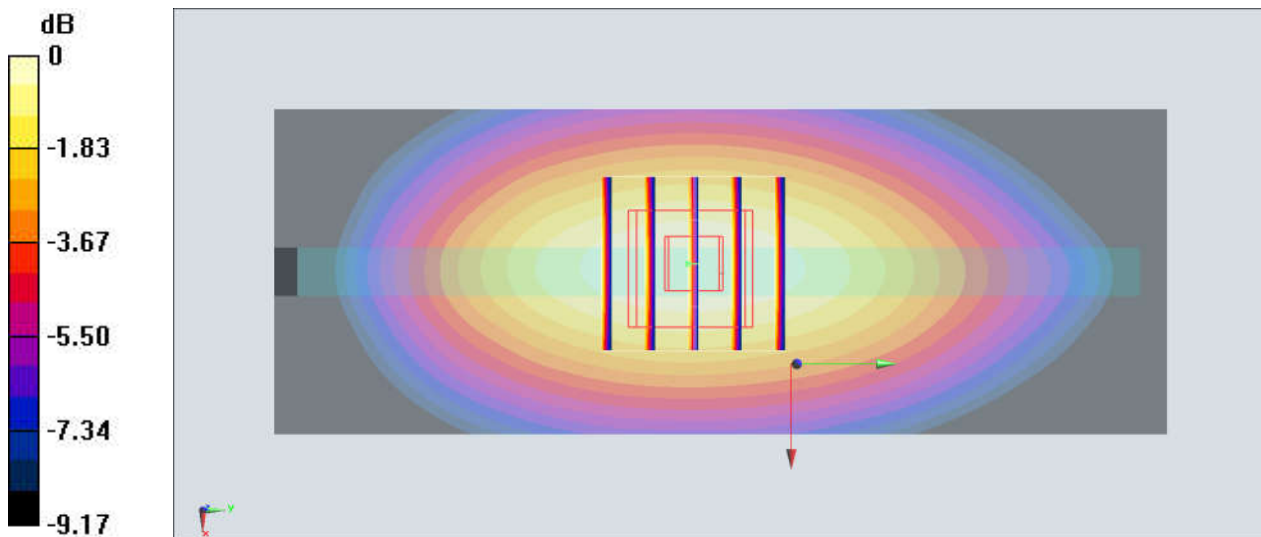

0 dB = 0.313 W/kg = -5.04 dBW/kg

### #15\_GSM1900\_GPRS (4 Tx slots)\_Bottom Side\_10mm\_Ch810

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 54.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.38 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.44 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.521 W/kg**

Maximum value of SAR (measured) = 1.36 W/kg

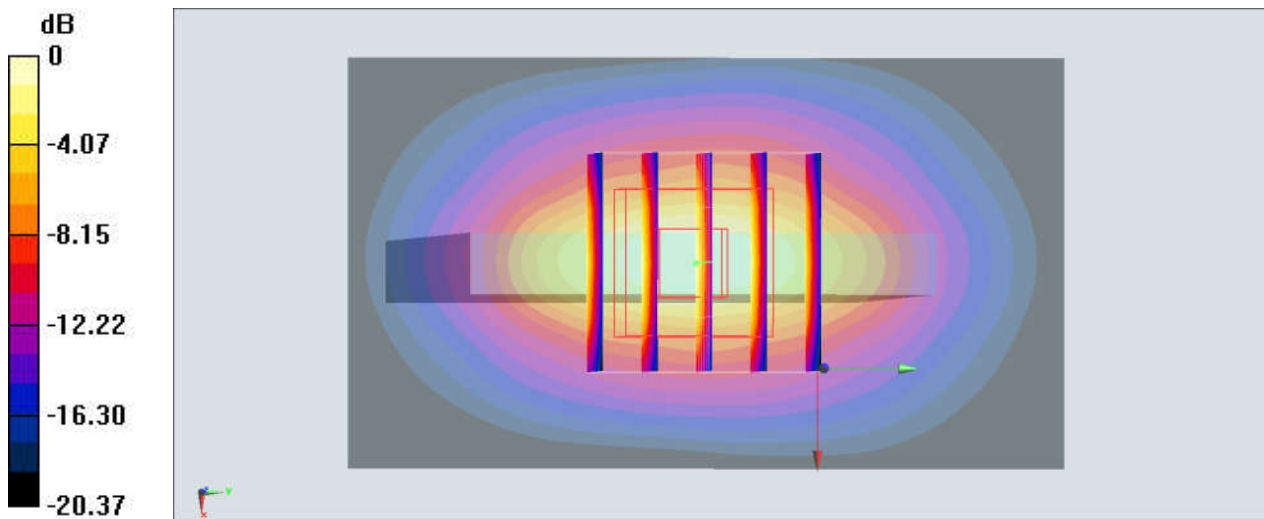

0 dB = 1.36 W/kg = 1.34 dBW/kg

### #16\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_10mm\_Ch9538


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1908 \text{ MHz}$ ;  $\sigma = 1.509 \text{ S/m}$ ;  $\epsilon_r = 54.499$ ;  
 $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $1.30 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $28.52 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
Peak SAR (extrapolated) =  $1.74 \text{ W/kg}$   
**SAR(1 g) =  $0.974 \text{ W/kg}$ ; SAR(10 g) =  $0.478 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.24 \text{ W/kg}$

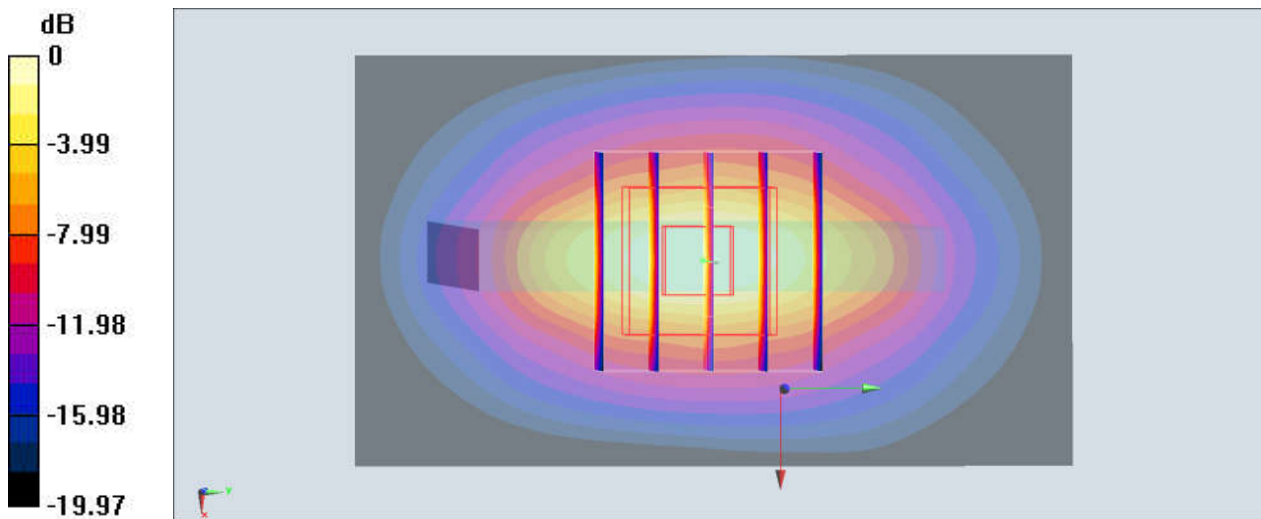

0 dB =  $1.24 \text{ W/kg}$  =  $0.93 \text{ dBW/kg}$



### #17\_WCDMA V\_RMC 12.2Kbps\_Back\_10mm\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 826.4$  MHz;  $\sigma = 0.948$  S/m;  $\epsilon_r = 55.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.310 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.36 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.354 W/kg  
**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.225 W/kg**  
Maximum value of SAR (measured) = 0.316 W/kg

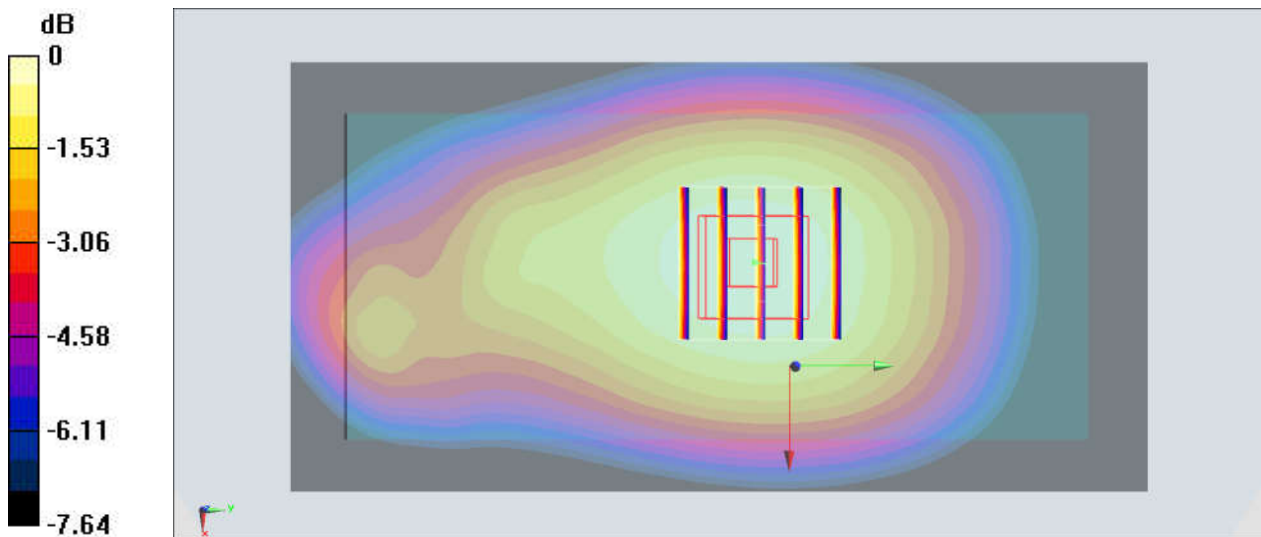

0 dB = 0.316 W/kg = -5.00 dBW/kg

### #18\_LTE Band 2\_20M\_QPSK\_1\_99\_Bottom Side\_10mm\_Ch19100


Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 54.512$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.55 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.474 W/kg**  
Maximum value of SAR (measured) = 1.20 W/kg

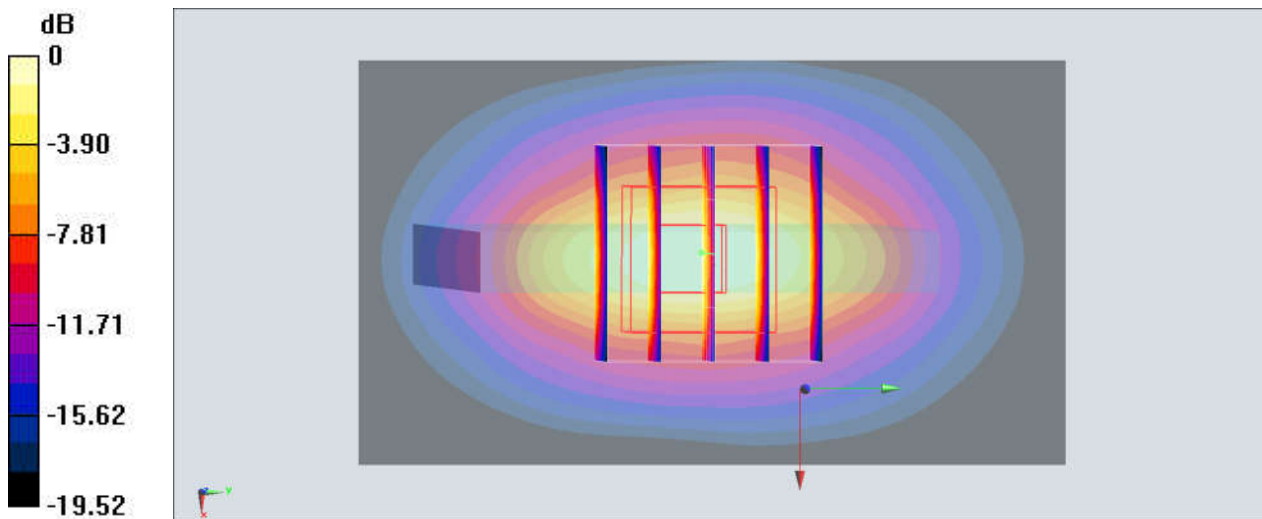

### #19\_LTE Band 5\_10M\_QPSK\_1\_0\_Back\_10mm\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 55.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.317 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.58 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.358 W/kg  
**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.228 W/kg**  
Maximum value of SAR (measured) = 0.318 W/kg

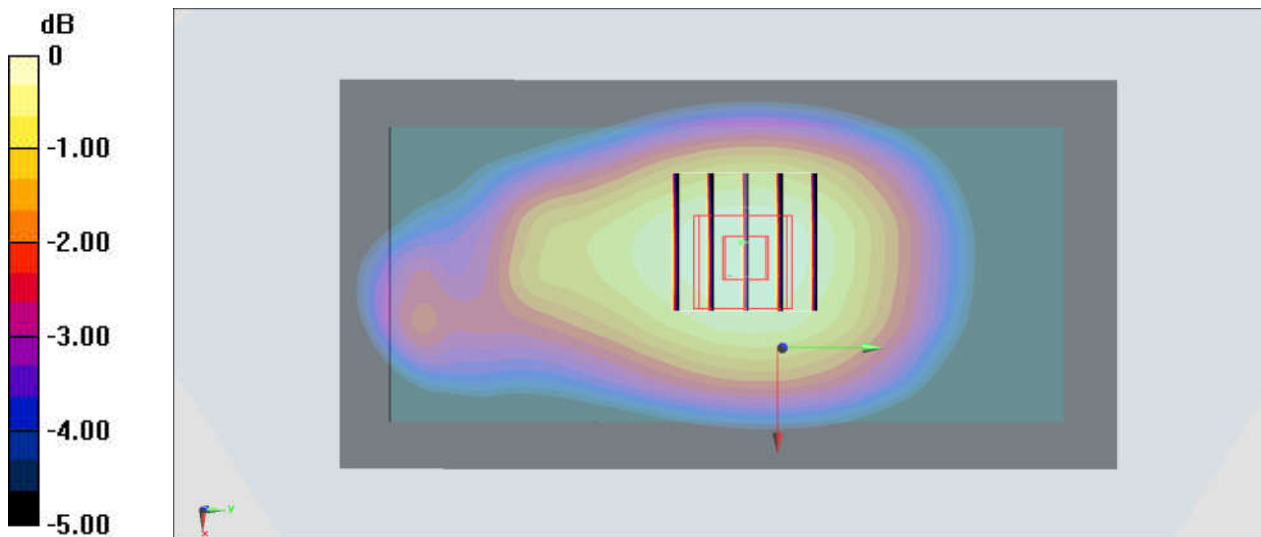

0 dB = 0.318 W/kg = -4.98 dBW/kg

### #20\_LTE Band 7\_20M\_QPSK\_1\_99\_Left Side\_10mm\_Ch21350


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium: MSL\_2600\_181013 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.106$  S/m;  $\epsilon_r = 52.017$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (51x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.958 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.14 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 1.48 W/kg  
**SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.317 W/kg**  
Maximum value of SAR (measured) = 0.861 W/kg

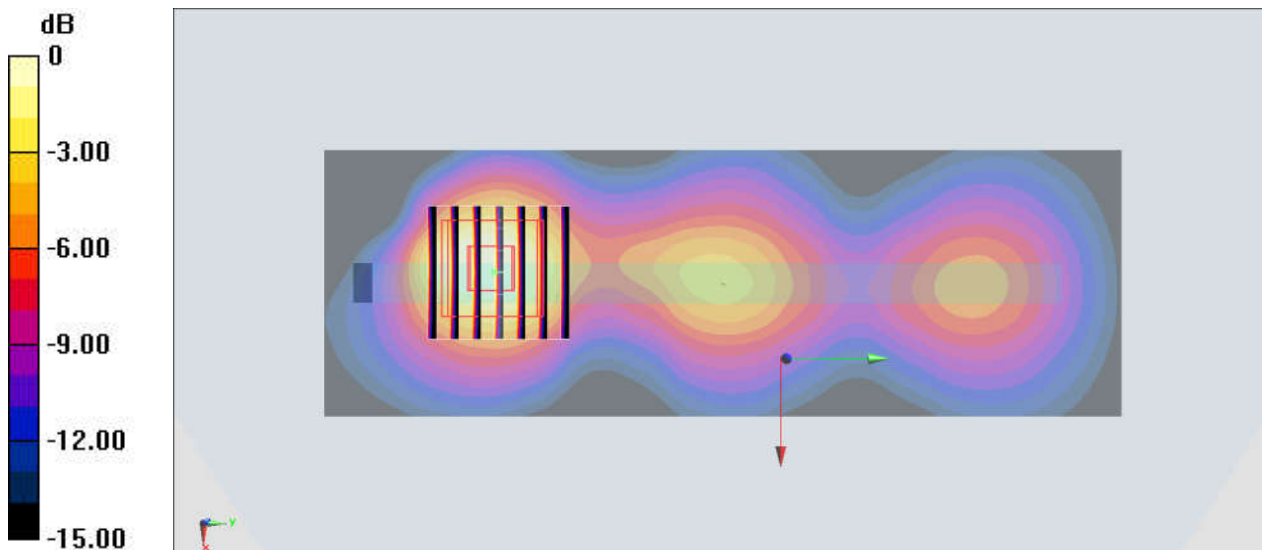

0 dB = 0.861 W/kg = -0.65 dBW/kg

### #21\_LTE Band 41\_20M\_QPSK\_1\_0\_Back\_10mm\_Ch40600


Communication System: LTE; Frequency: 2591 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600\_181013 Medium parameters used:  $f = 2591$  MHz;  $\sigma = 2.129$  S/m;  $\epsilon_r = 51.969$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.706 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.80 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 1.31 W/kg  
**SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.257 W/kg**  
Maximum value of SAR (measured) = 0.744 W/kg

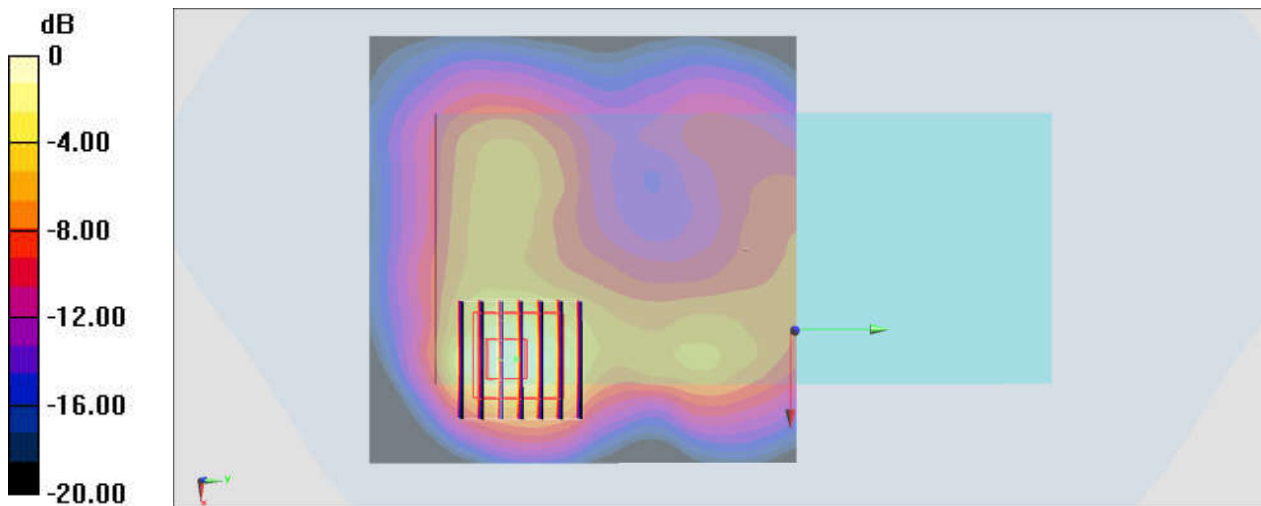

0 dB = 0.744 W/kg = -1.28 dBW/kg

**#22\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch6**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium: MSL\_2450\_181101 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.991$  S/m;  $\epsilon_r = 53.615$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.4, 4.4, 4.4) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.162 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.115 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.160 W/kg

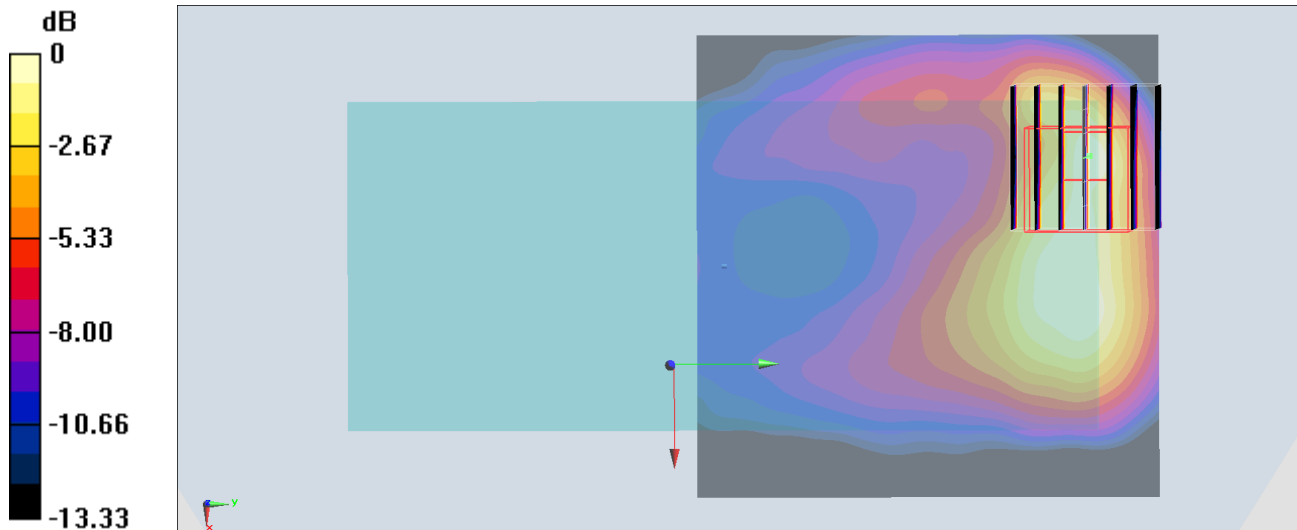

0 dB = 0.160 W/kg = -7.96 dBW/kg

## #23\_Bluetooth\_1Mbps\_Back\_10mm\_Ch0

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.301

Medium: MSL\_2450\_180916 Medium parameters used :  $f = 2402$  MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 53.529$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.63, 7.63, 7.63) ; Calibrated: 2018/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1446
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0866 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.099 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.106 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0824 W/kg

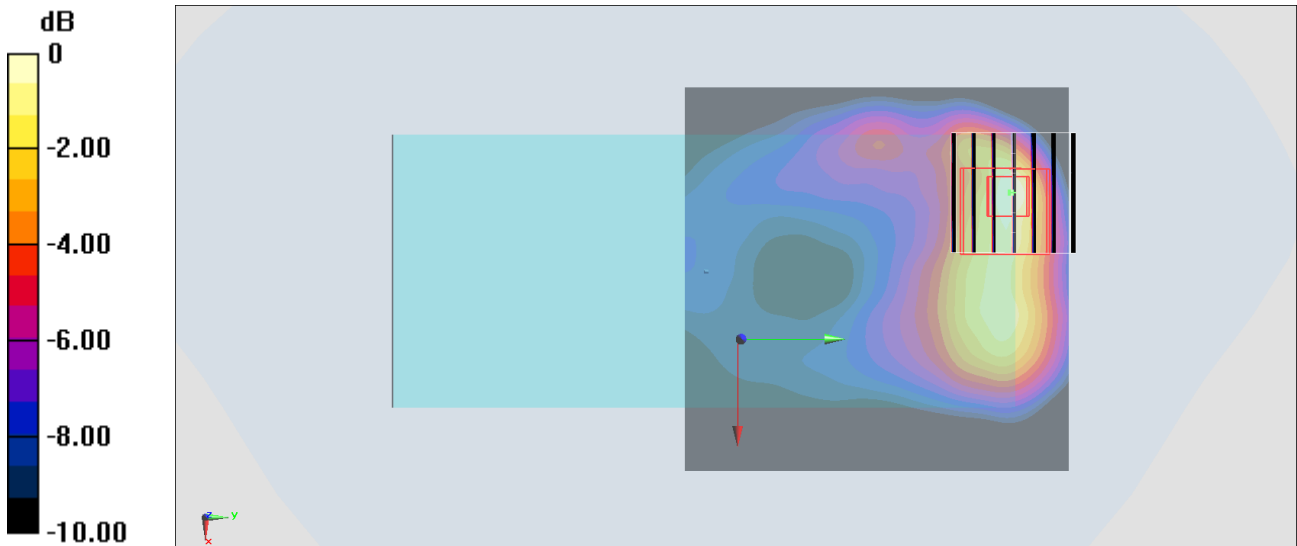

0 dB = 0.0824 W/kg = -10.84 dBW/kg

### #24\_GSM850\_GPRS (4 Tx slots)\_Back\_15mm\_Ch189


Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:2.08  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 836.4$  MHz;  $\sigma = 0.959$  S/m;  $\epsilon_r = 55.008$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.256 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.53 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 0.285 W/kg  
**SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.179 W/kg**  
Maximum value of SAR (measured) = 0.253 W/kg

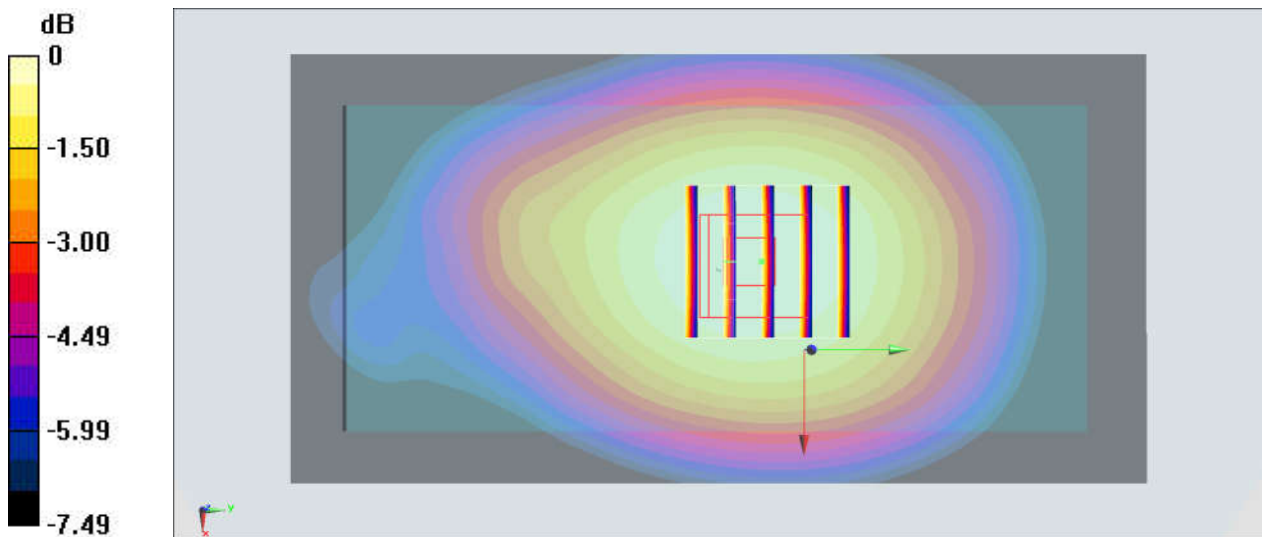



### #25\_GSM1900\_GPRS (4 Tx slots)\_Back\_15mm\_Ch810


Communication System: PCS ; Frequency: 1909.8 MHz;Duty Cycle: 1:2.08  
Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 54.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.483 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.32 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.652 W/kg  
**SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.225 W/kg**  
Maximum value of SAR (measured) = 0.497 W/kg

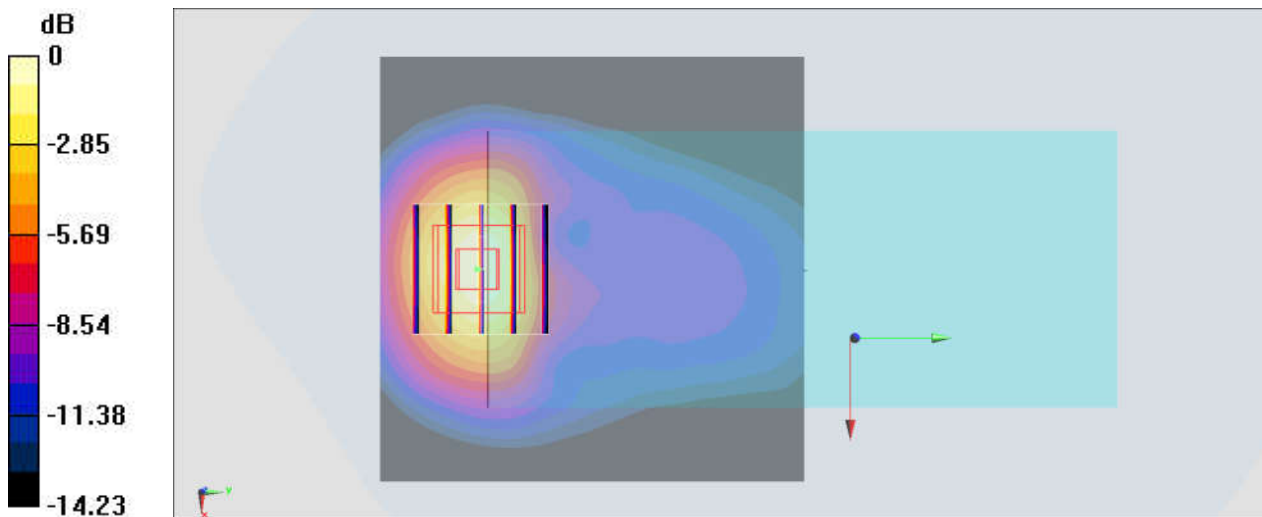

0 dB = 0.497 W/kg = -3.04 dBW/kg

### #26\_WCDMA II\_RMC 12.2Kbps\_Back\_15mm\_Ch9538


Communication System: WCDMA ; Frequency: 1907.6 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 54.499$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.567 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.49 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.779 W/kg  
**SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.268 W/kg**  
Maximum value of SAR (measured) = 0.587 W/kg

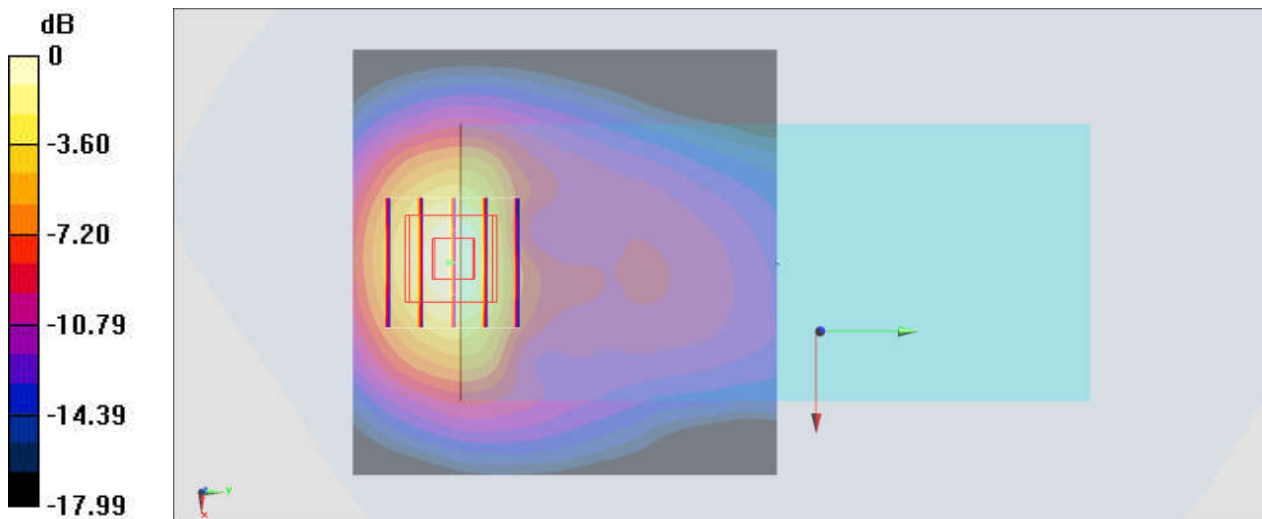

0 dB = 0.587 W/kg = -2.31 dBW/kg

### #27\_WCDMA V\_RMC 12.2Kbps\_Back\_15mm\_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 826.4$  MHz;  $\sigma = 0.948$  S/m;  $\epsilon_r = 55.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.293 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.18 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.331 W/kg  
**SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.209 W/kg**  
Maximum value of SAR (measured) = 0.295 W/kg

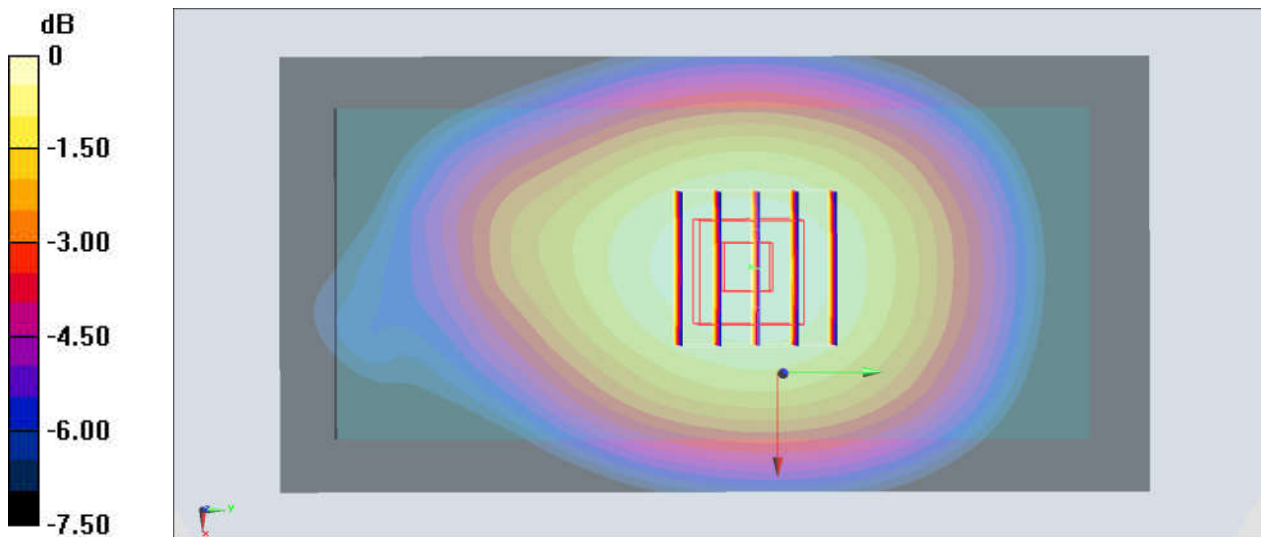

0 dB = 0.295 W/kg = -5.30 dBW/kg

### #28\_LTE Band 2\_20M\_QPSK\_1\_99\_Back\_15mm\_Ch19100


Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_181025 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.504$  S/m;  $\epsilon_r = 54.512$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.542 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.05 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.750 W/kg  
**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.258 W/kg**  
Maximum value of SAR (measured) = 0.570 W/kg

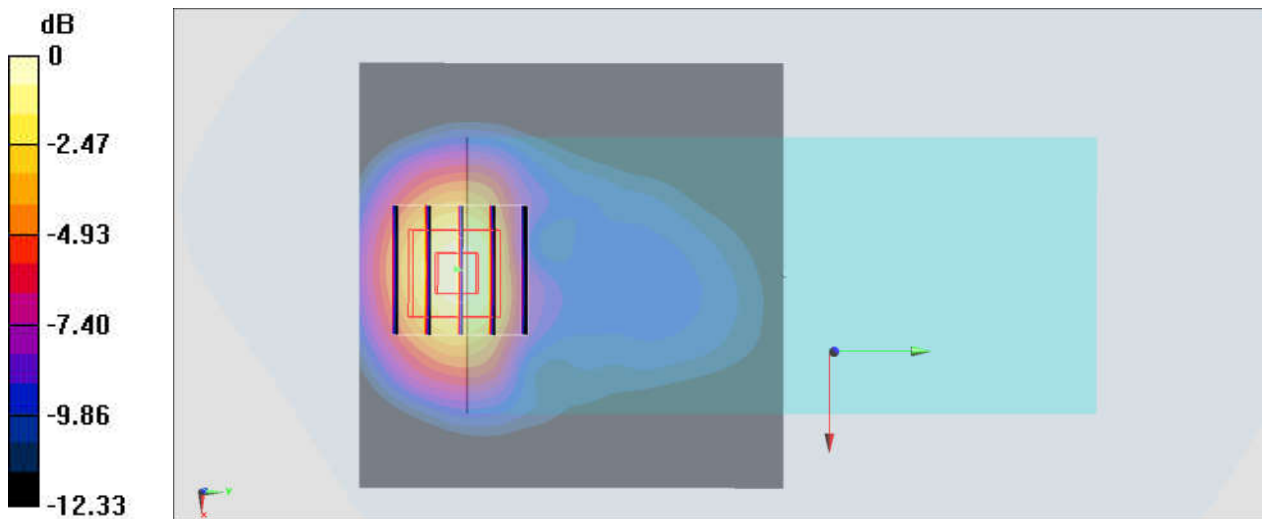

0 dB = 0.570 W/kg = -2.44 dBW/kg

### #29\_LTE Band 5\_10M\_QPSK\_1\_0\_Back\_15mm\_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: MSL\_850\_181014 Medium parameters used :  $f = 836.5$  MHz;  $\sigma = 0.96$  S/m;  $\epsilon_r = 55.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.8 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.288 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.02 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.325 W/kg  
**SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.204 W/kg**  
Maximum value of SAR (measured) = 0.288 W/kg

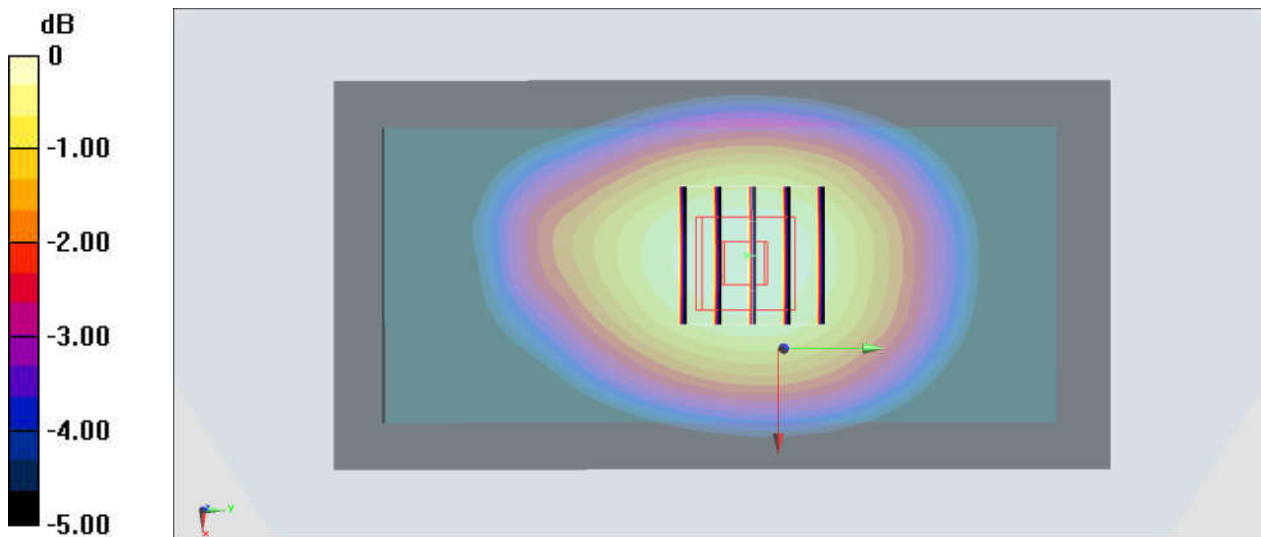

### #30\_LTE Band 7\_20M\_QPSK\_1\_99\_Back\_15mm\_Ch21350


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium: MSL\_2600\_181013 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.106$  S/m;  $\epsilon_r = 52.017$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.351 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 7.303 V/m; Power Drift = 0.07 dB  
Peak SAR (extrapolated) = 0.576 W/kg  
**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.129 W/kg**  
Maximum value of SAR (measured) = 0.346 W/kg

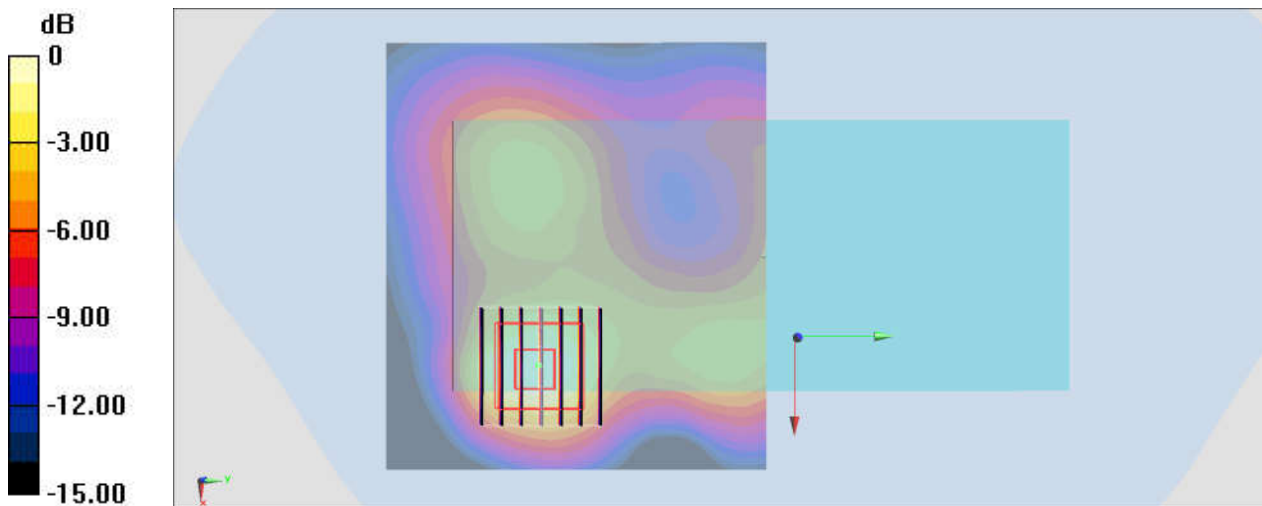

0 dB = 0.346 W/kg = -4.61 dBW/kg

### #31\_LTE Band 41\_20M\_QPSK\_1\_0\_Back\_15mm\_Ch40600


Communication System: LTE; Frequency: 2591 MHz; Duty Cycle: 1:1.59  
Medium: MSL\_2600\_181013 Medium parameters used:  $f = 2591$  MHz;  $\sigma = 2.129$  S/m;  $\epsilon_r = 51.969$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.300 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 7.228 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.484 W/kg  
**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.106 W/kg**  
Maximum value of SAR (measured) = 0.290 W/kg

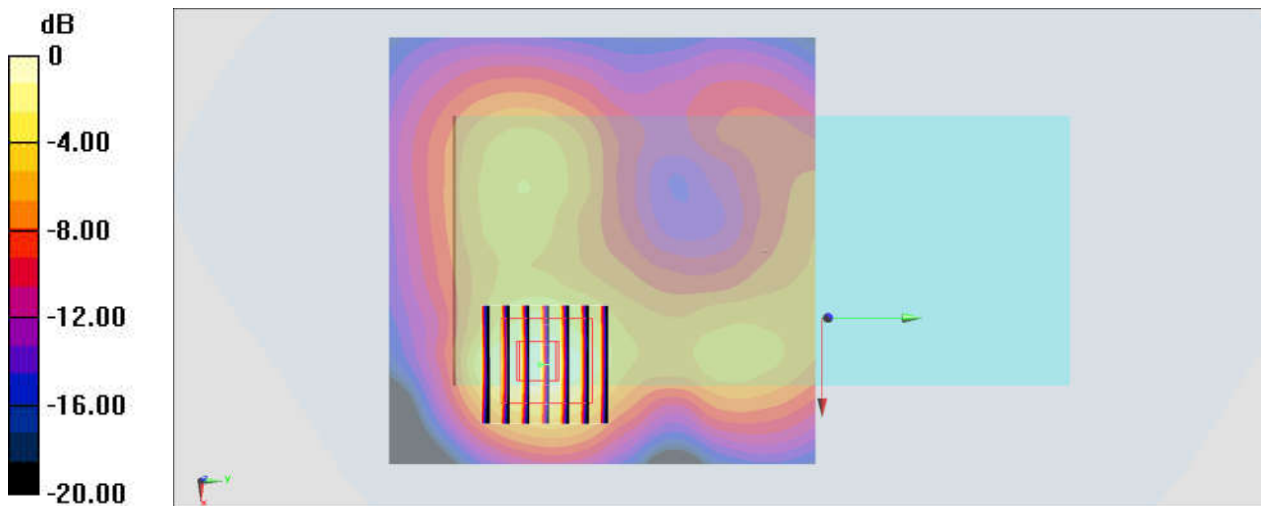

0 dB = 0.290 W/kg = -5.38 dBW/kg

**#32\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_15mm\_Ch6**

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.011

Medium: MSL\_2450\_181101 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.991$  S/m;  $\epsilon_r = 53.615$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.4, 4.4, 4.4) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0719 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.964 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.116 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0750 W/kg

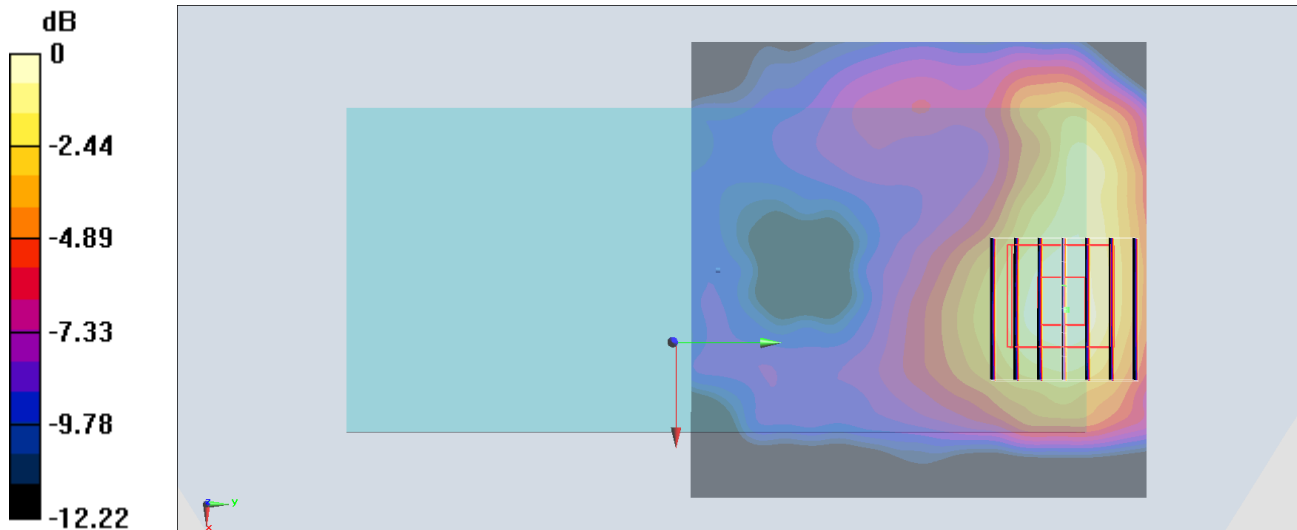

0 dB = 0.0750 W/kg = -11.25 dBW/kg



### #33\_WLAN5GHz\_802.11a\_6Mbps\_Back\_15mm\_Ch64

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 5.356$  S/m;  $\epsilon_r = 49.077$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.92, 4.92, 4.92) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0934 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.258 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.184 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0954 W/kg

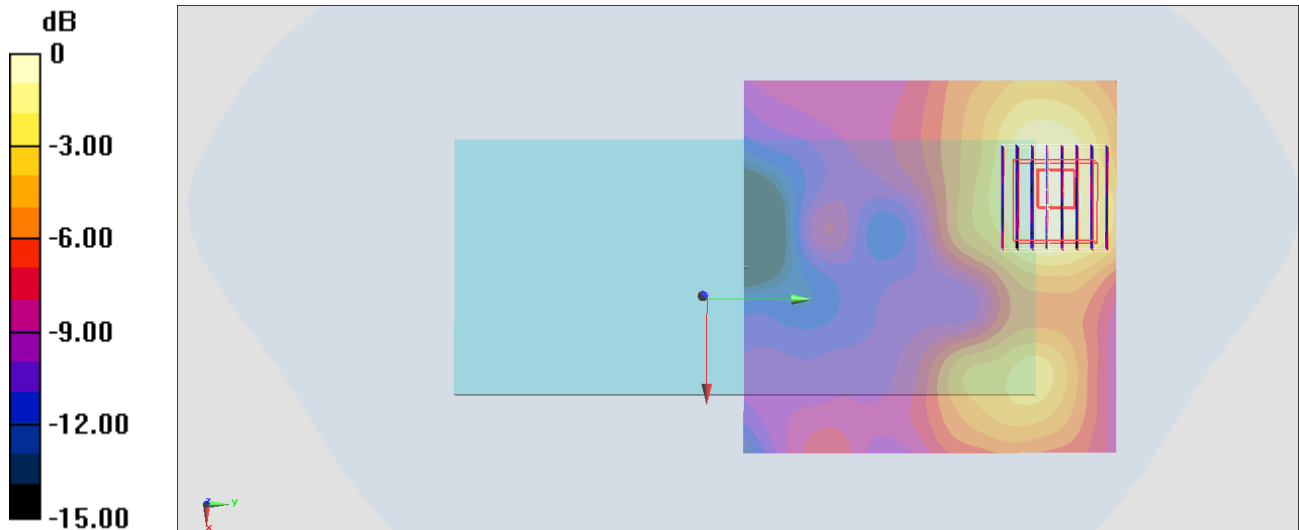

0 dB = 0.0954 W/kg = -10.20 dBW/kg

**#34\_WLAN5GHz\_802.11a\_6Mbps\_Front\_15mm\_Ch124**

Communication System: 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5620$  MHz;  $\sigma = 5.782$  S/m;  $\epsilon_r = 48.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.28, 4.28, 4.28) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0916 W/kg


**Zoom Scan (10x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.629 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.422 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.100 W/kg

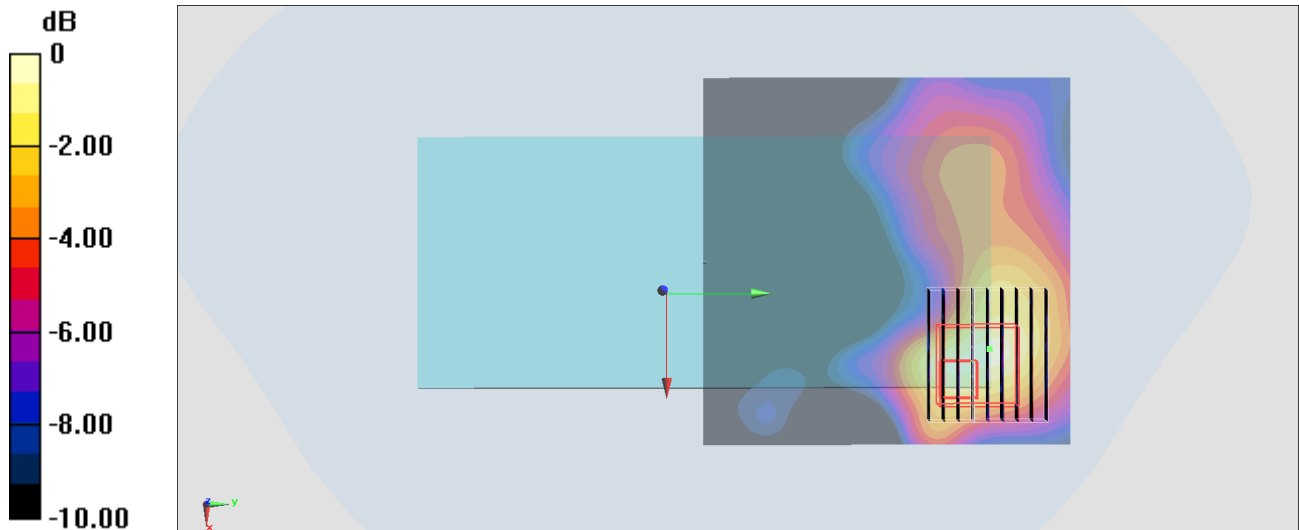

0 dB = 0.100 W/kg = -10.00 dBW/kg

## #35\_WLAN5GHz\_802.11a\_6Mbps\_Back\_15mm\_Ch157

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.006$  S/m;  $\epsilon_r = 48.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.46, 4.46, 4.46) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0796 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.090 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

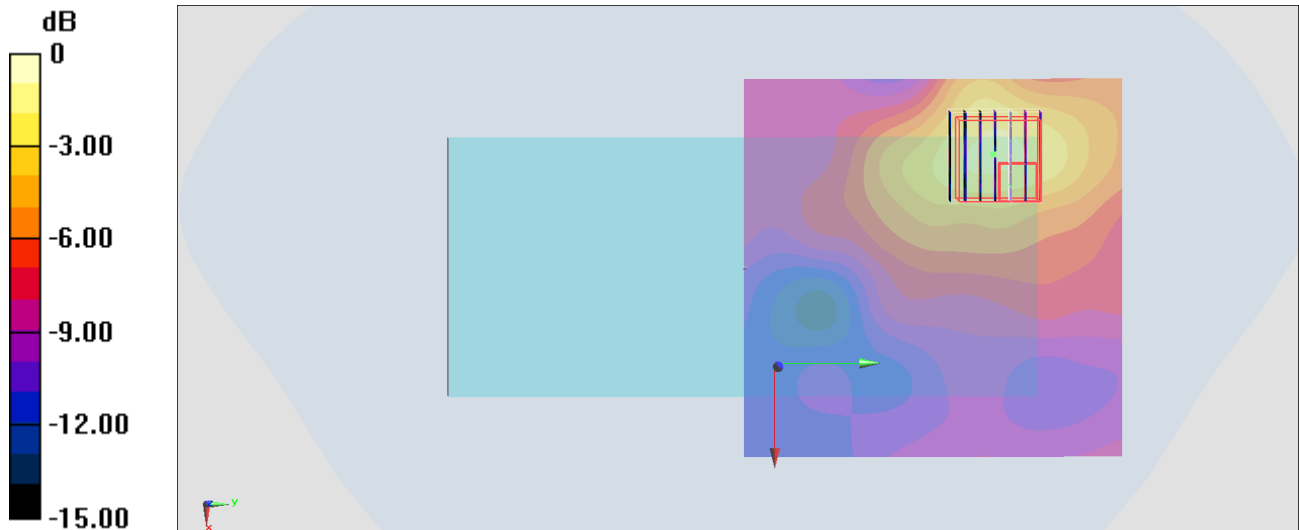

0 dB = 0.116 W/kg = -9.36 dBW/kg

## #36\_Bluetooth\_1Mbps\_Back\_15mm\_Ch0

Communication System: Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.301

Medium: MSL\_2450\_180916 Medium parameters used :  $f = 2402$  MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 53.529$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3925; ConvF(7.63, 7.63, 7.63) ; Calibrated: 2018/5/31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn854; Calibrated: 2018/6/14
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1446
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0342 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.314 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0340 W/kg

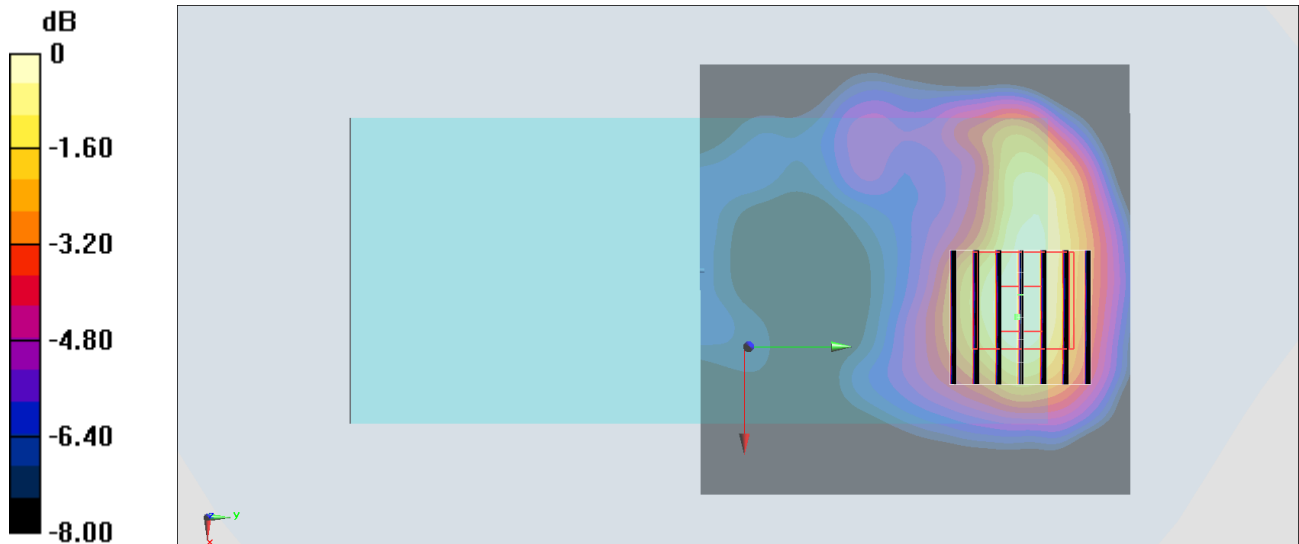

0 dB = 0.0340 W/kg = -14.69 dBW/kg

### #37\_GSM1900\_GPRS (4 Tx slots)\_Front\_0mm\_Ch810


Communication System: PCS ; Frequency: 1909.8 MHz;Duty Cycle: 1:2.08  
Medium: MSL\_1900\_181115 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.578$  S/m;  $\epsilon_r = 51.829$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 7.91 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 62.67 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 12.4 W/kg  
**SAR(1 g) = 5.77 W/kg; SAR(10 g) = 2.43 W/kg**  
Maximum value of SAR (measured) = 7.95 W/kg

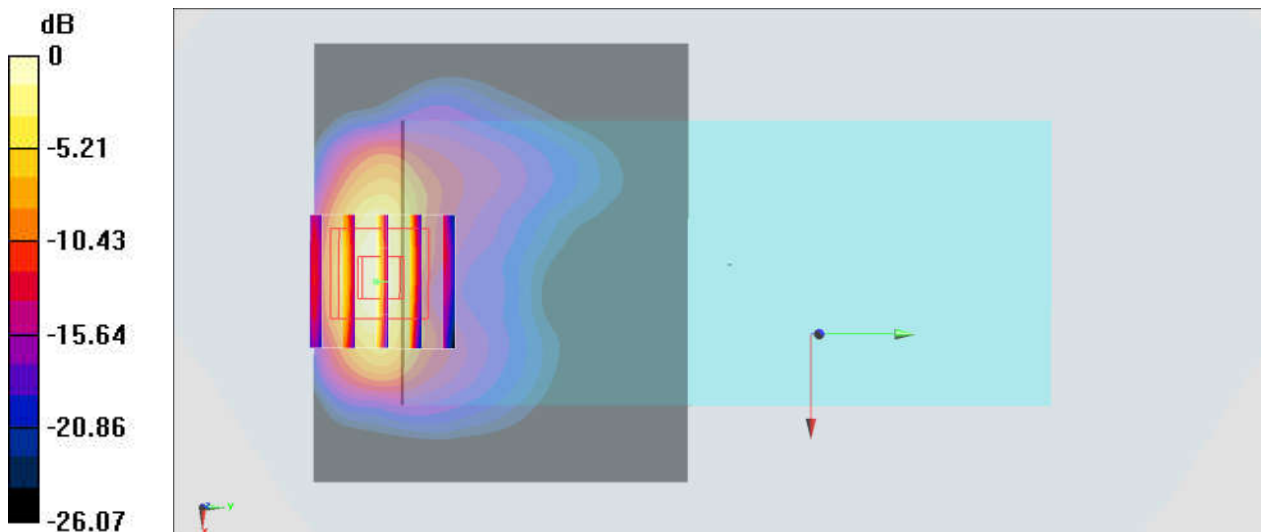

0 dB = 7.95 W/kg = 9.00 dBW/kg

### #38\_WCDMA II\_RMC 12.2Kbps\_Back\_0mm\_Ch9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: MSL\_1900\_181115 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.543$  S/m;  $\epsilon_r = 51.954$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 6.66 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 58.47 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 11.5 W/kg  
**SAR(1 g) = 5.48 W/kg; SAR(10 g) = 2.37 W/kg**  
Maximum value of SAR (measured) = 7.35 W/kg

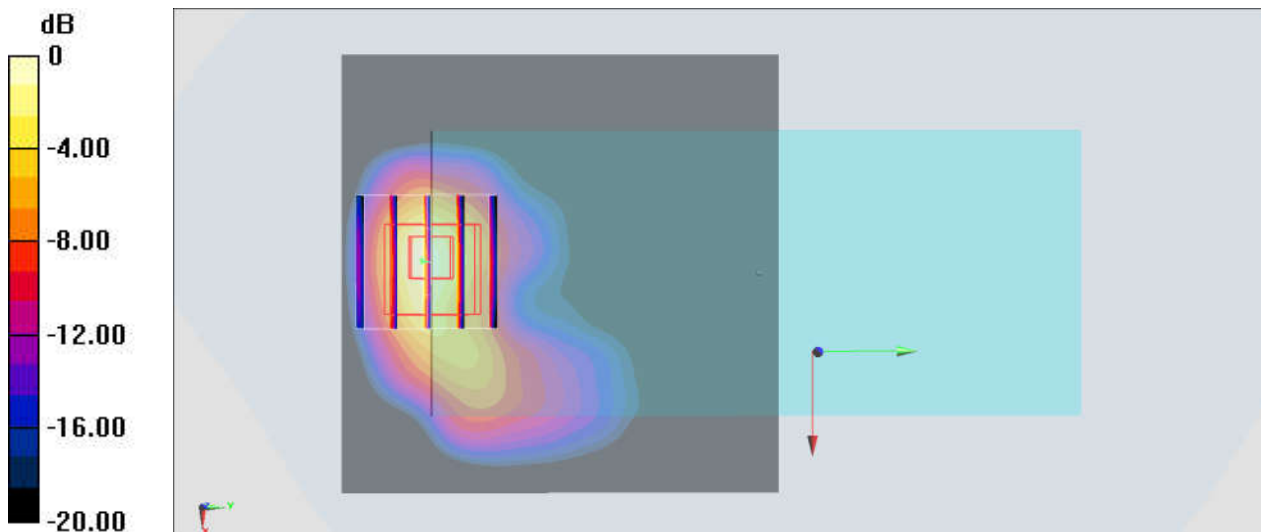

0 dB = 7.35 W/kg = 8.66 dBW/kg

### #39\_LTE Band 2\_20M\_QPSK\_1\_99\_Back\_0mm\_Ch19100


Communication System: LTE ; Frequency: 1900 MHz;Duty Cycle: 1:1  
Medium: MSL\_1900\_181115 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.565$  S/m;  $\epsilon_r = 51.87$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 6.87 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 27.92 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 11.6 W/kg  
**SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.44 W/kg**  
Maximum value of SAR (measured) = 7.40 W/kg

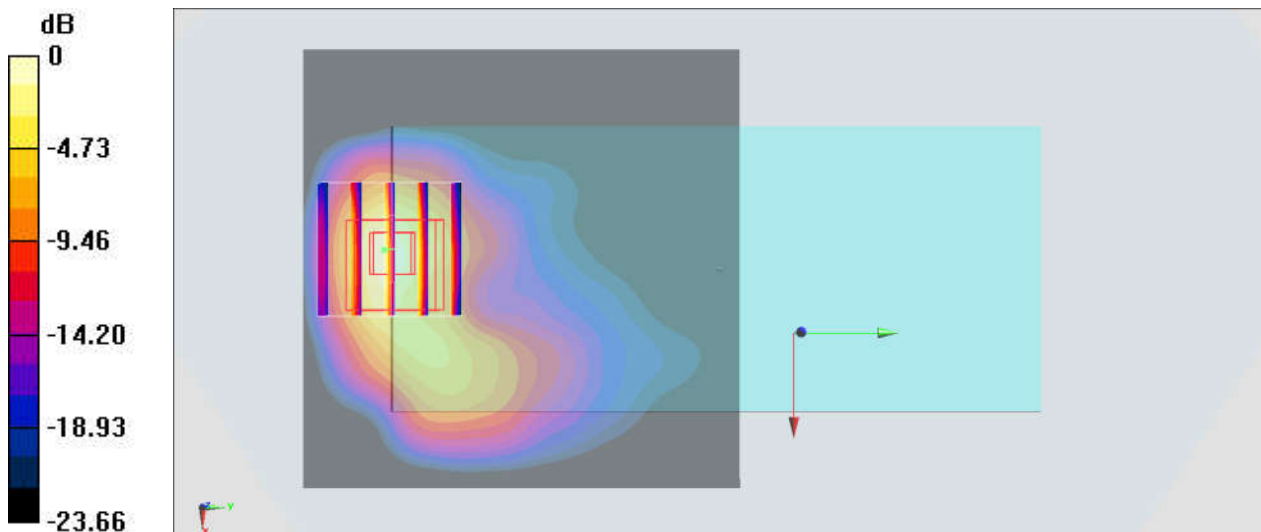

0 dB = 7.40 W/kg = 8.69 dBW/kg

**#40\_WLAN5GHz\_802.11a\_6Mbps\_Top Side\_0mm\_Ch64**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 5.356$  S/m;  $\epsilon_r = 49.077$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.92, 4.92, 4.92) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (61x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 33.70 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 11.6 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 0.455 W/kg**

Maximum value of SAR (measured) = 5.43 W/kg

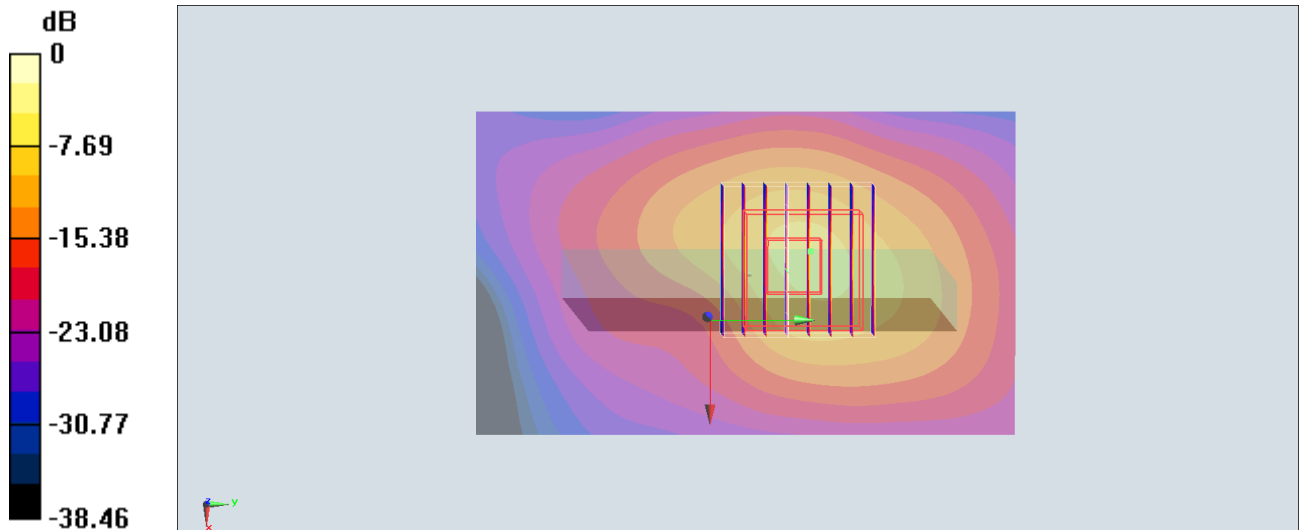

0 dB = 5.43 W/kg = 7.35 dBW/kg



**#41\_WLAN5GHz\_802.11a\_6Mbps\_Front\_0mm\_Ch124**

Communication System: 802.11a; Frequency: 5620 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5620$  MHz;  $\sigma = 5.782$  S/m;  $\epsilon_r = 48.541$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.28, 4.28, 4.28) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.01 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.76 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 11.0 W/kg

**SAR(1 g) = 1.61 W/kg; SAR(10 g) = 0.448 W/kg**

Maximum value of SAR (measured) = 4.82 W/kg

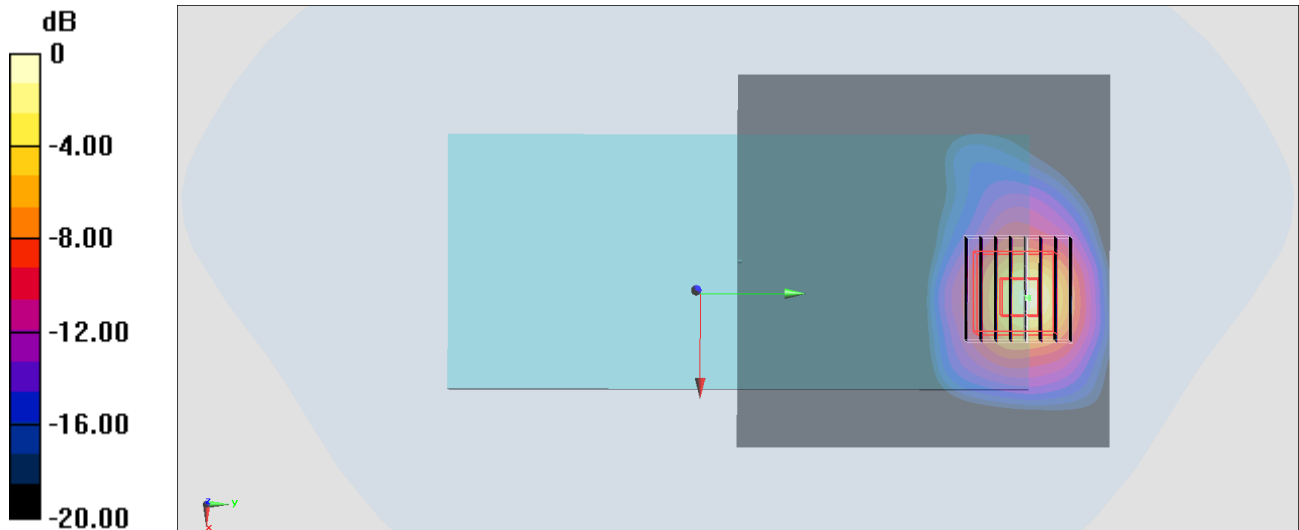

0 dB = 4.82 W/kg = 6.83 dBW/kg

**#42\_WLAN5GHz\_802.11a\_6Mbps\_Front\_0mm\_Ch157**

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.03

Medium: MSL\_5G\_181103 Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.006$  S/m;  $\epsilon_r = 48.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.46, 4.46, 4.46) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.96 W/kg


**Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.16 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 10.1 W/kg

**SAR(1 g) = 1.44 W/kg; SAR(10 g) = 0.428 W/kg**

Maximum value of SAR (measured) = 4.07 W/kg

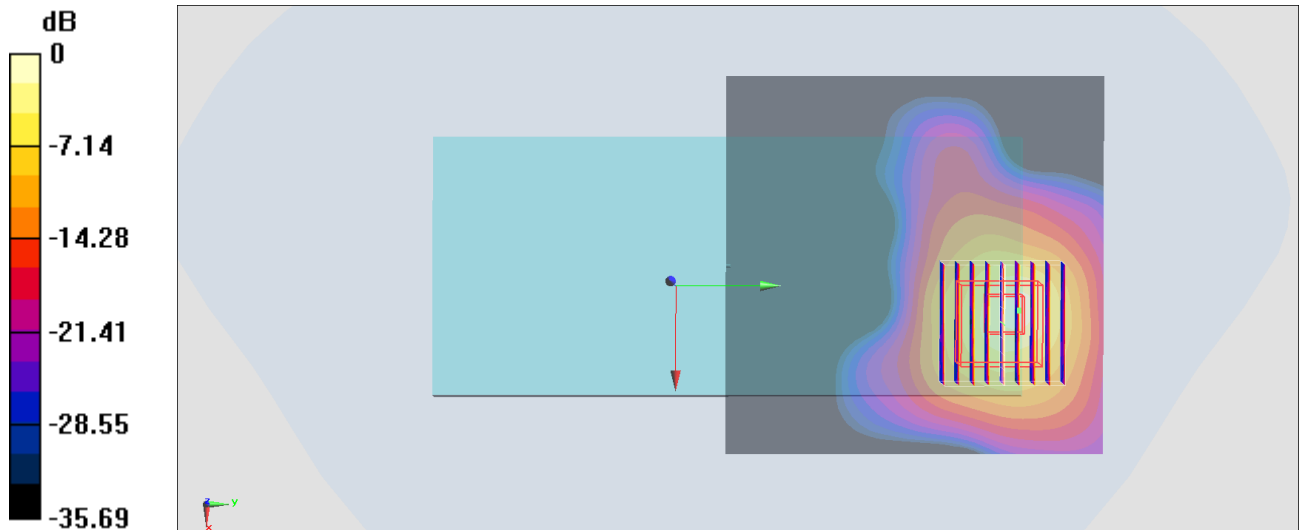

0 dB = 4.07 W/kg = 6.10 dBW/kg