

PART 24 MEASUREMENT REPORT

Applicant Name:

Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0075
Japan

Date of Testing:

6/8/2022 - 7/29/2022

Test Report Issue Date:

7/29/2022

Test Site/Location:

Element lab, Columbia, MD, USA

Test Report Serial No.:

1M2207200079-02.PY7

FCC ID:	PY7-58692W
Applicant Name:	Sony Corporation

Application Type:

Certification

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

24

Test Procedure(s):

ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
Executive Vice President



FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 1 of 86

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	23
7.4	Band Edge Emissions at Antenna Terminal.....	39
7.5	Peak-Average Ratio	61
7.6	Radiated Power (EIRP)	70
7.7	Radiated Spurious Emissions Measurements.....	73
7.8	Frequency Stability / Temperature Variation	82
8.0	CONCLUSION.....	86

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 2 of 86

PART 24 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	1850.2 - 1909.8	0.311	24.93	240KGXW
EDGE	N/A	8-PSK	1850.2 - 1909.8	0.223	23.49	238KG7W
WCDMA	N/A	Spread Spectrum	1852.4 - 1907.6	0.055	17.41	4M17F9W
LTE Band 25/2	20 MHz	QPSK	1860 - 1905	0.063	17.97	18M0G7D
		16QAM	1860 - 1905	0.053	17.23	18M0W7D
		64QAM	1860 - 1905	0.040	16.00	18M0W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.064	18.09	13M5G7D
		16QAM	1857.5 - 1907.5	0.053	17.24	13M5W7D
		64QAM	1857.5 - 1907.5	0.040	16.05	13M5W7D
	10 MHz	QPSK	1855 - 1910	0.065	18.15	9M01G7D
		16QAM	1855 - 1910	0.052	17.14	9M01W7D
		64QAM	1855 - 1910	0.041	16.09	9M05W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.064	18.05	4M53G7D
		16QAM	1852.5 - 1912.5	0.056	17.44	4M55W7D
		64QAM	1852.5 - 1912.5	0.040	16.01	4M52W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.064	18.03	2M72G7D
		16QAM	1851.5 - 1913.5	0.053	17.24	2M72W7D
		64QAM	1851.5 - 1913.5	0.041	16.17	2M72W7D
1.4 MHz	QPSK	1850.7 - 1914.3	0.064	18.09	1M10G7D	
	16QAM	1850.7 - 1914.3	0.052	17.14	1M11W7D	
	64QAM	1850.7 - 1914.3	0.041	16.12	1M11W7D	

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 3 of 86

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 4 of 86

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Corporation Portable Handset FCC ID: PY7-58692W**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 94880, 95101, 00001, 84429, 99864

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: Belkin F7U050 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version 0.45 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 5 of 86

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 6 of 86

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 7 of 86

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial #
-	AP1-002	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1-002
-	AP2-001	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	3/11/2022	Annual	3/11/2023	AP2-002
-	ETS-001	EMC Cable and Switch System	12/9/2021	Annual	12/9/2022	ETS-001
-	LTx1	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx2
-	LTx4	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx4
ETS-Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	125518
Keysight Technologies	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer	1/6/2022	Annual	1/6/2023	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	1/7/2022	Annual	1/7/2023	MY57141001
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/28/2022	Annual	3/28/2023	101716
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	7/25/2022	100348
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and spectrum analyzer	4/14/2022	Annual	4/14/2023	103187

Table 5-1. Test Equipment

Note

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 8 of 86

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 9 of 86

7.0 TEST RESULTS

7.1 Summary

Company Name: Sony Corporation
 FCC ID: PY7-58692W
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-to-Average Ratio	24.232(d)	≤ 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	≥ 43 + 10 log (P[Watts]) dB of attenuation below transmitter power	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 10 of 86

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

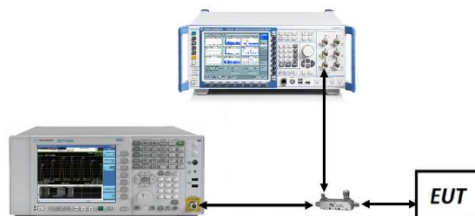



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 11 of 86

LTE Band 25/2

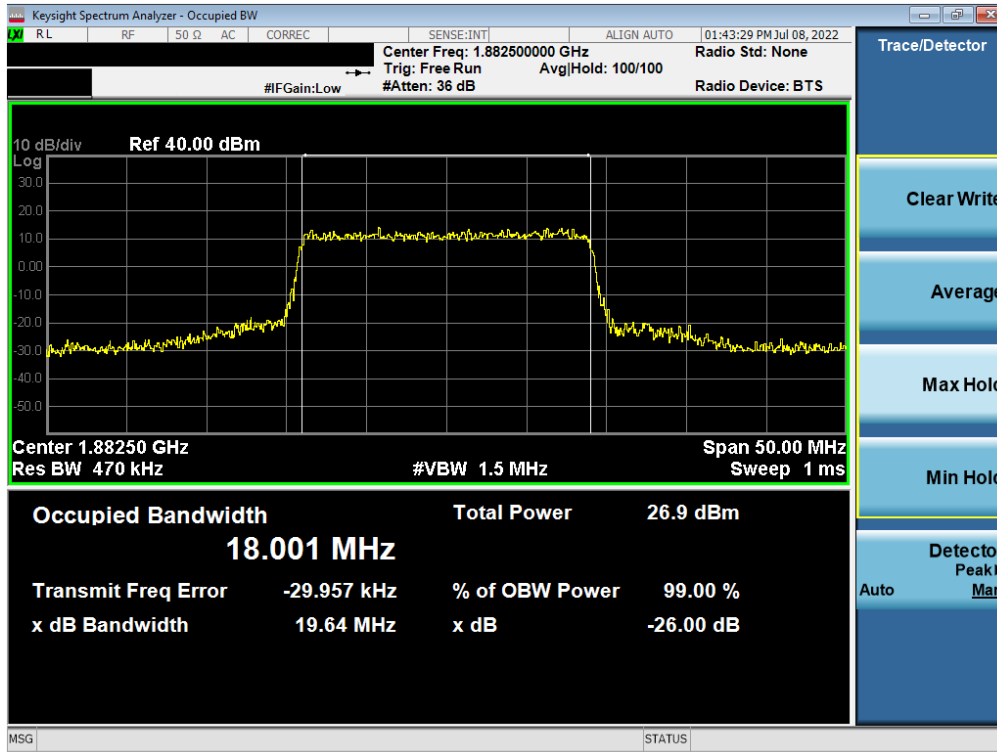


Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB)

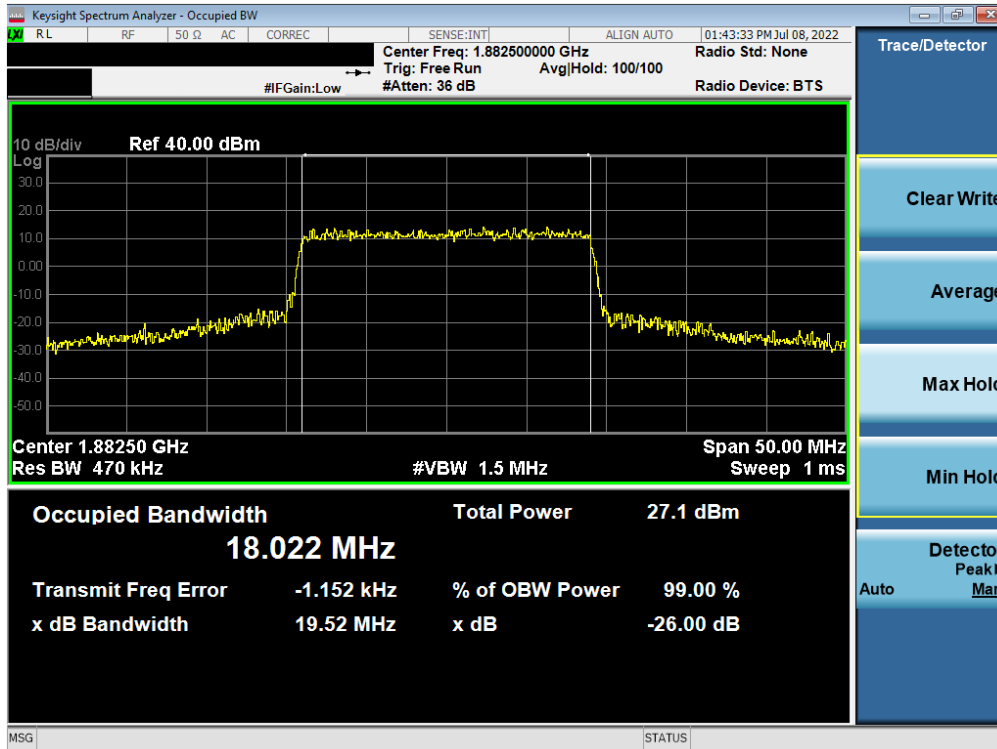


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 12 of 86

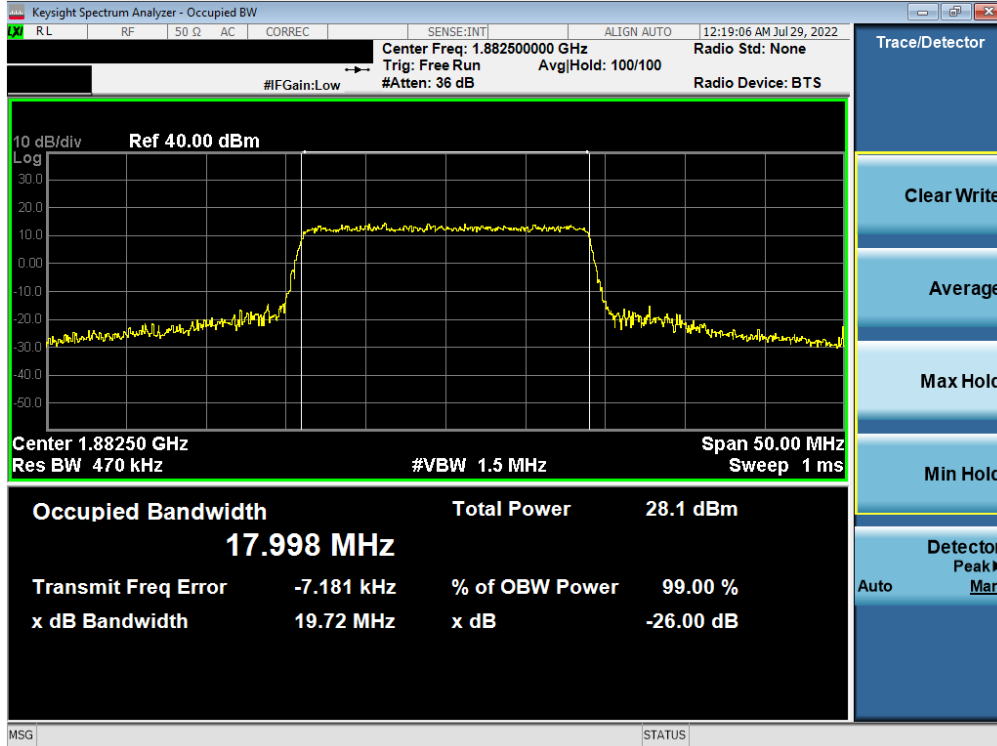


Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB)

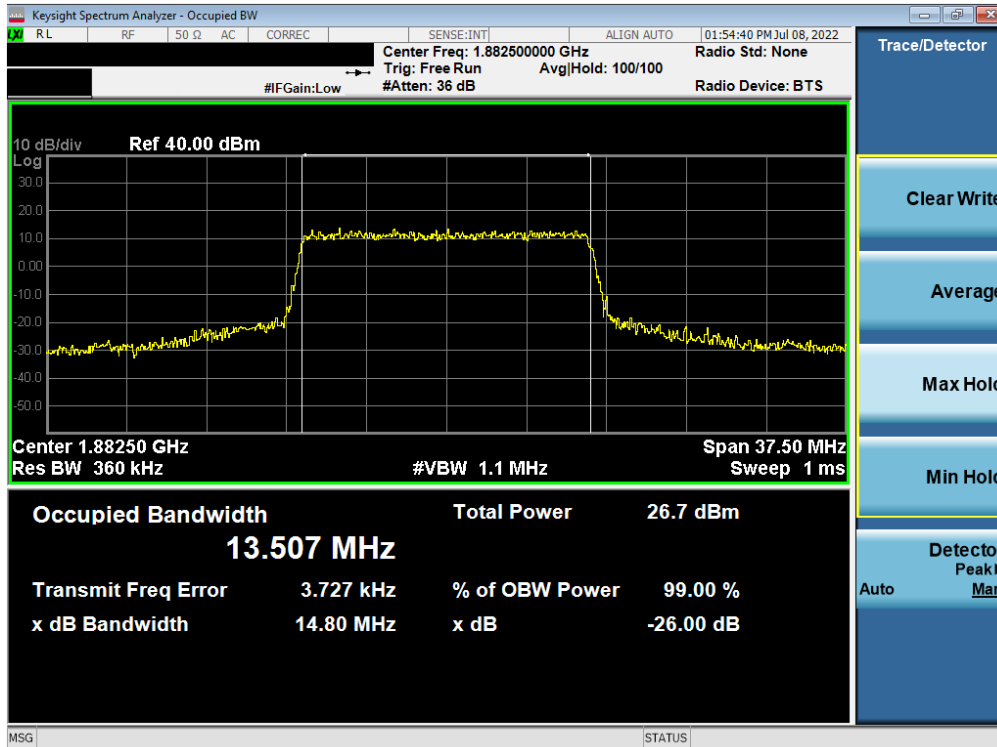


Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 13 of 86

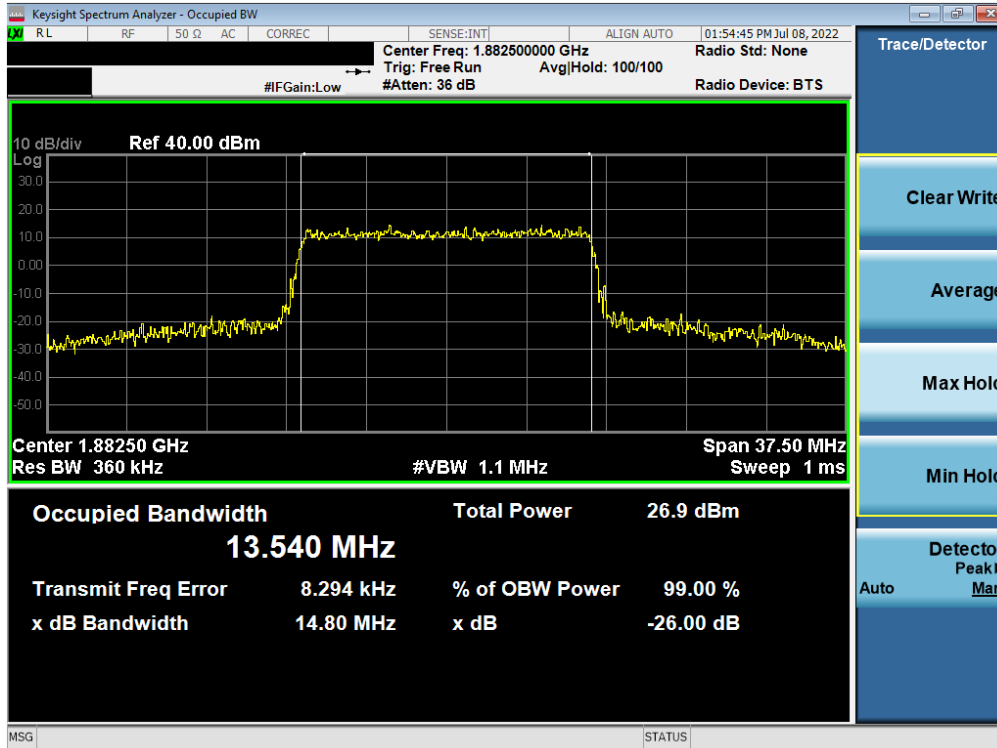


Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB)

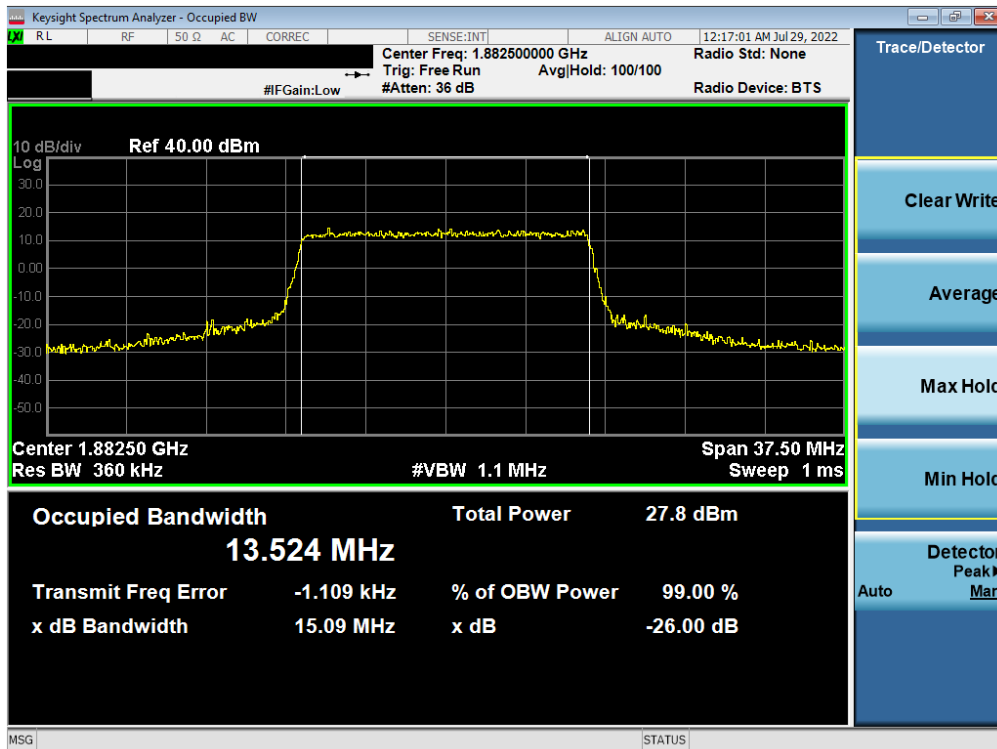


Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 14 of 86

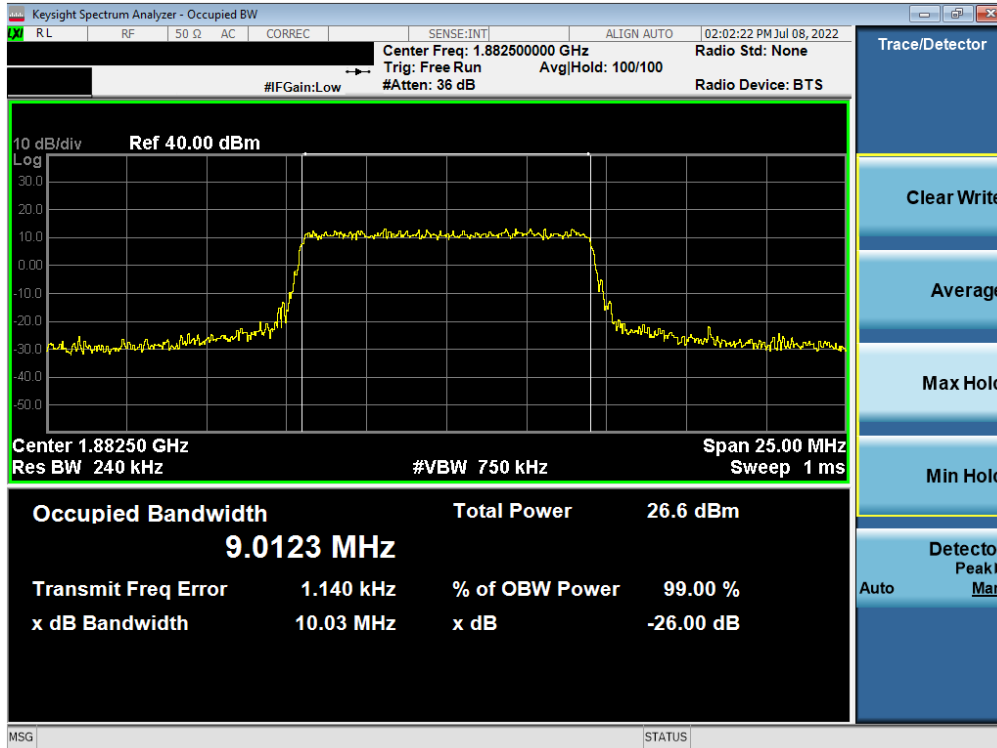


Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB)

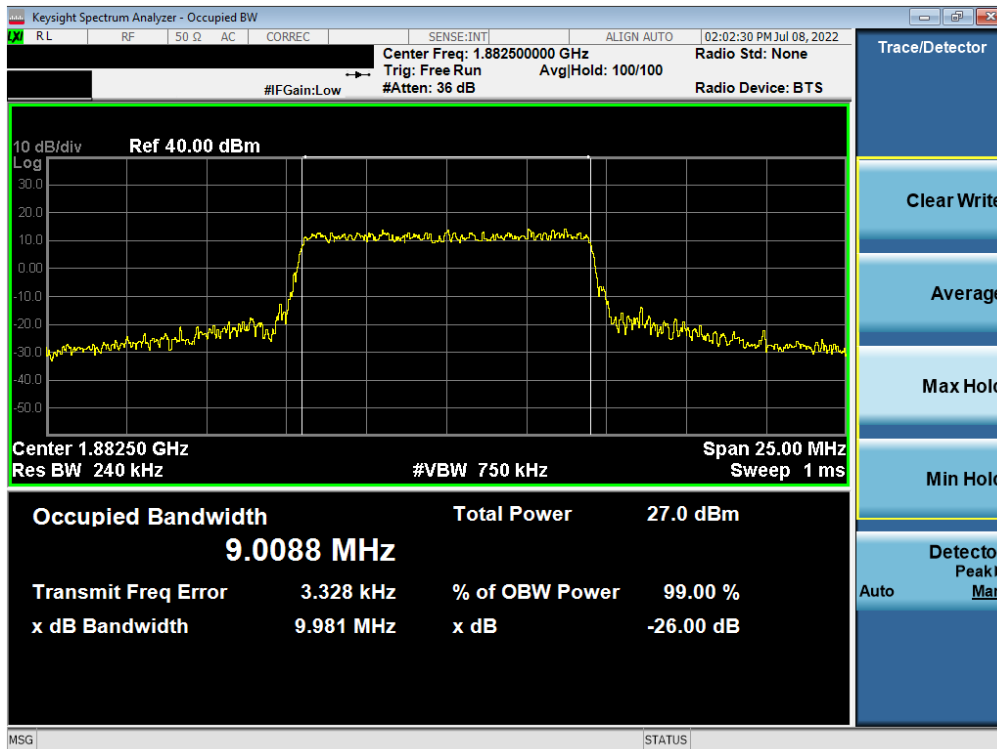


Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 15 of 86

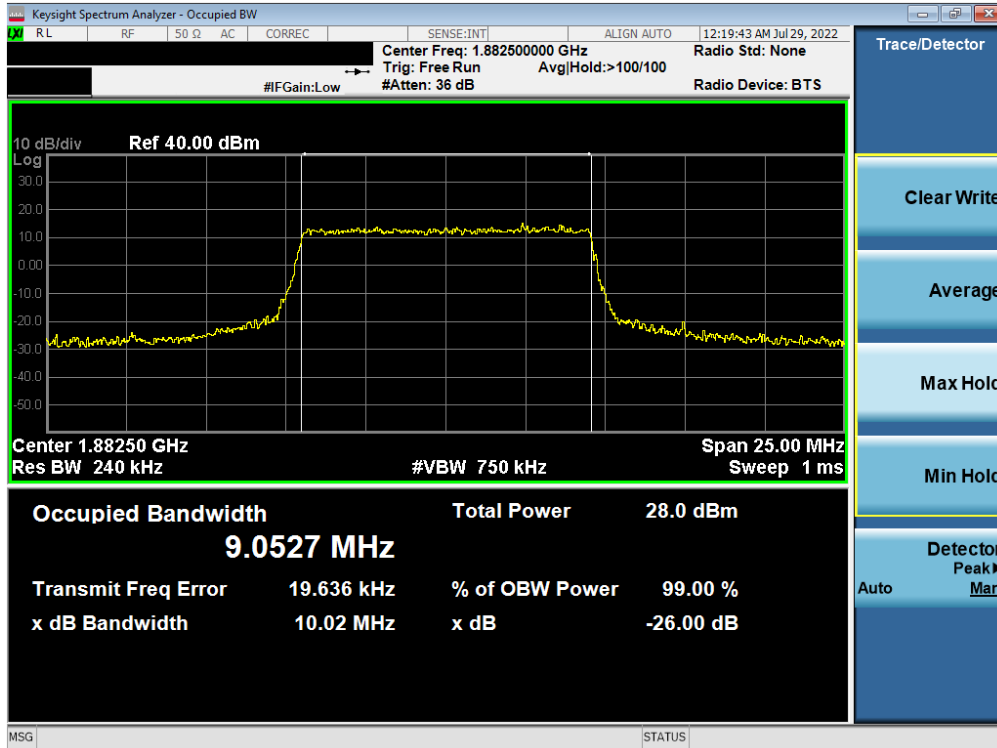


Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB)

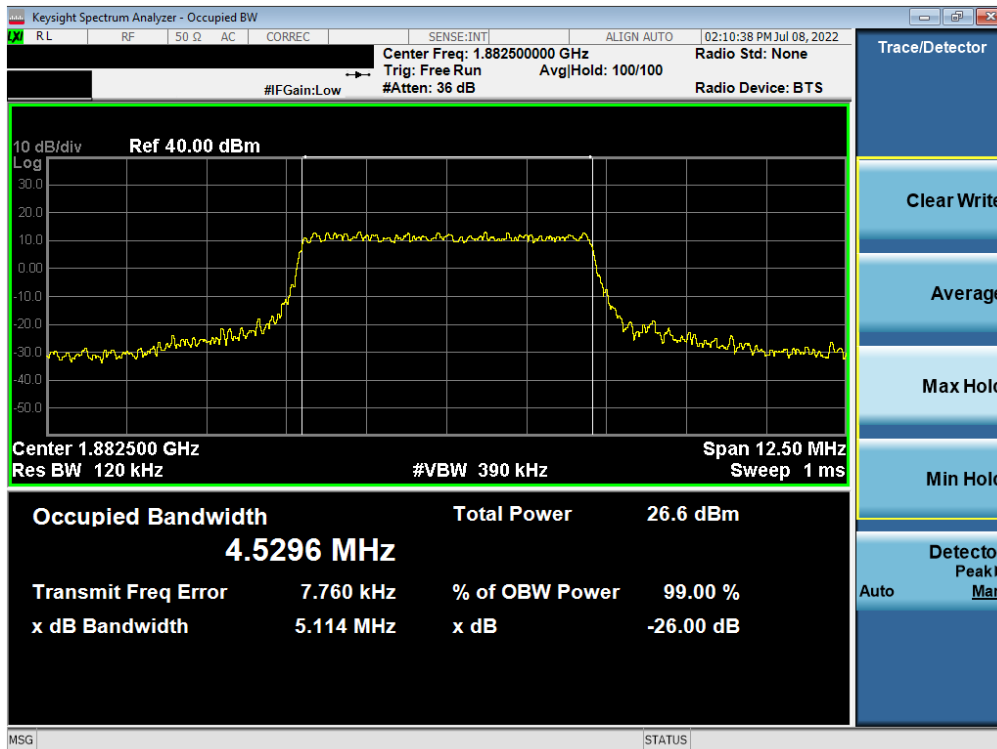

Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 16 of 86

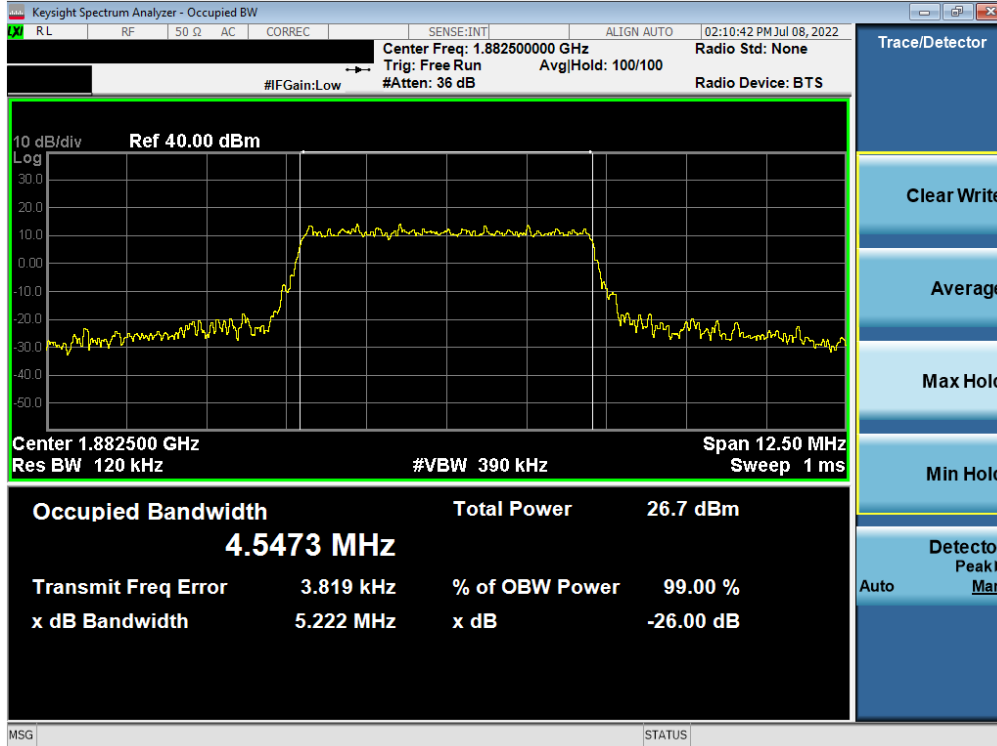


Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB)




Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 17 of 86

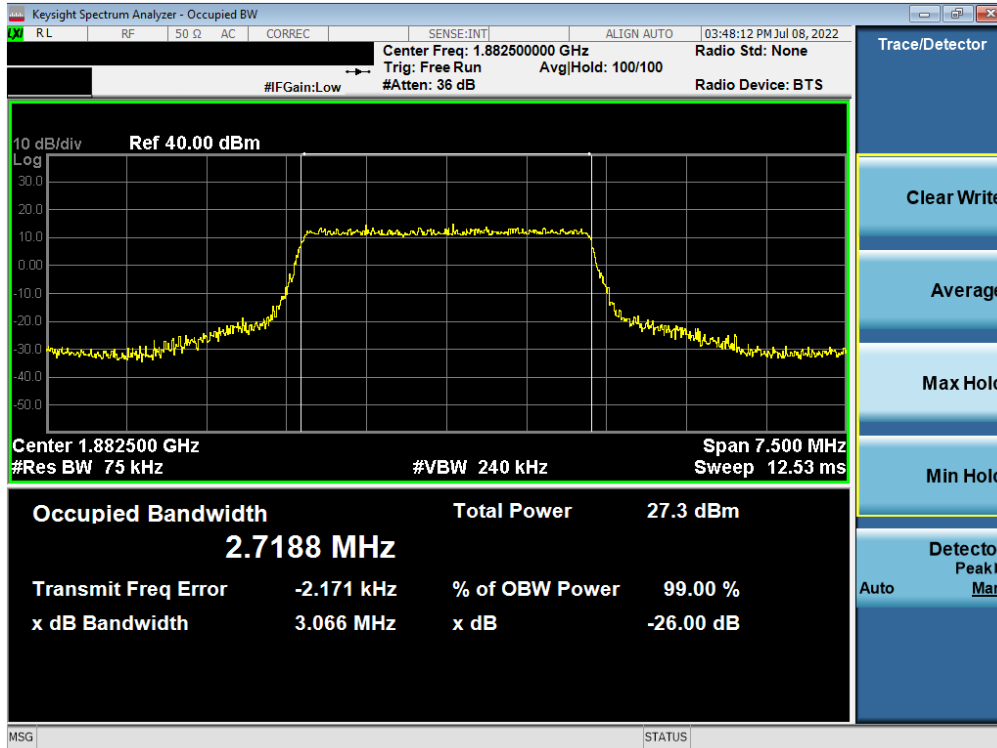


Plot 7-13. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB)

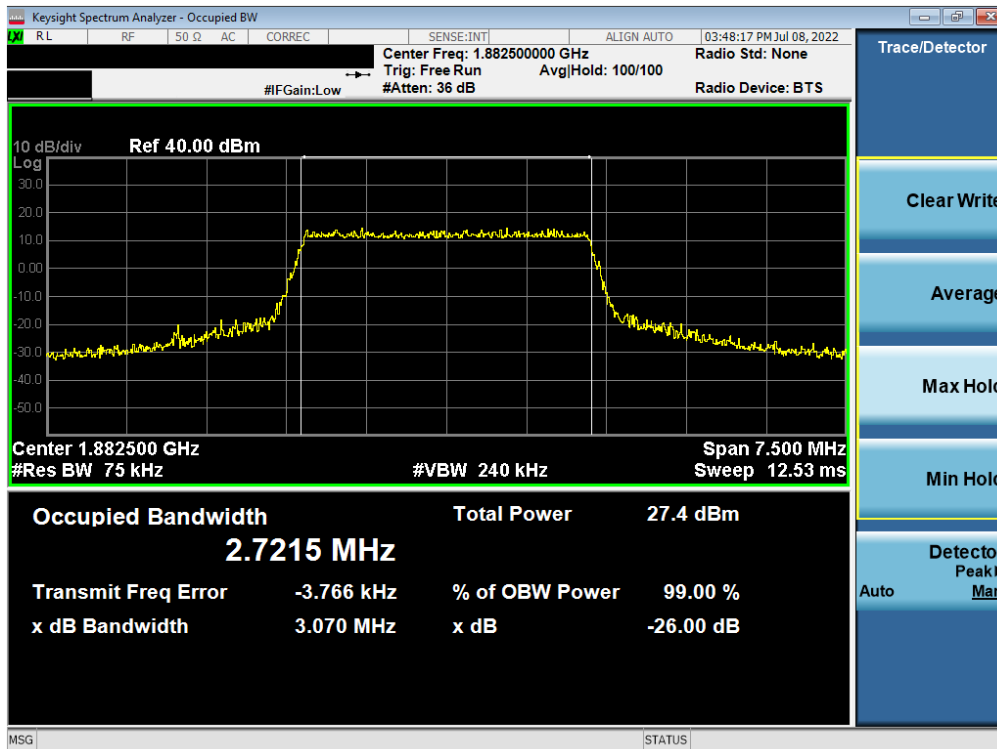


Plot 7-14. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 18 of 86

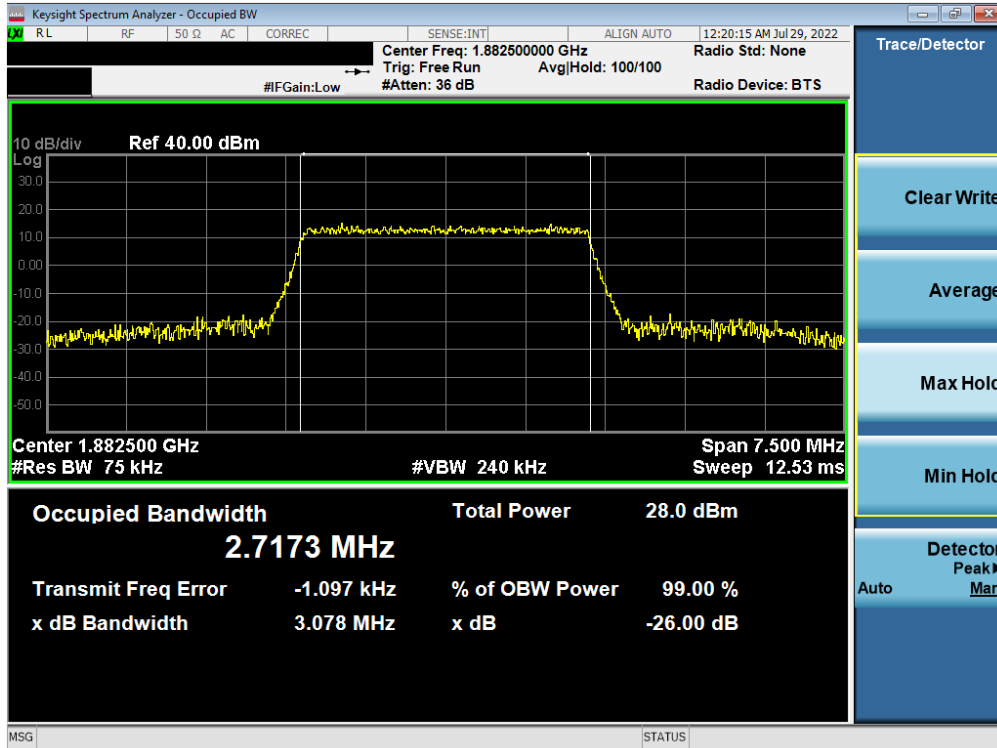


Plot 7-15. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB)

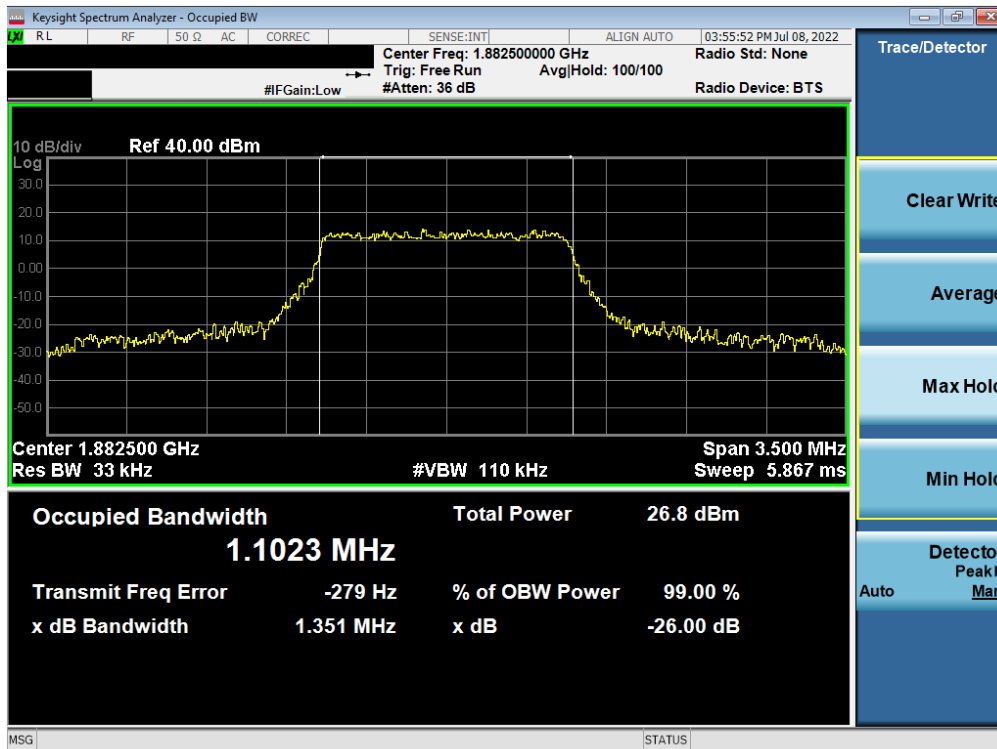


Plot 7-16. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 19 of 86

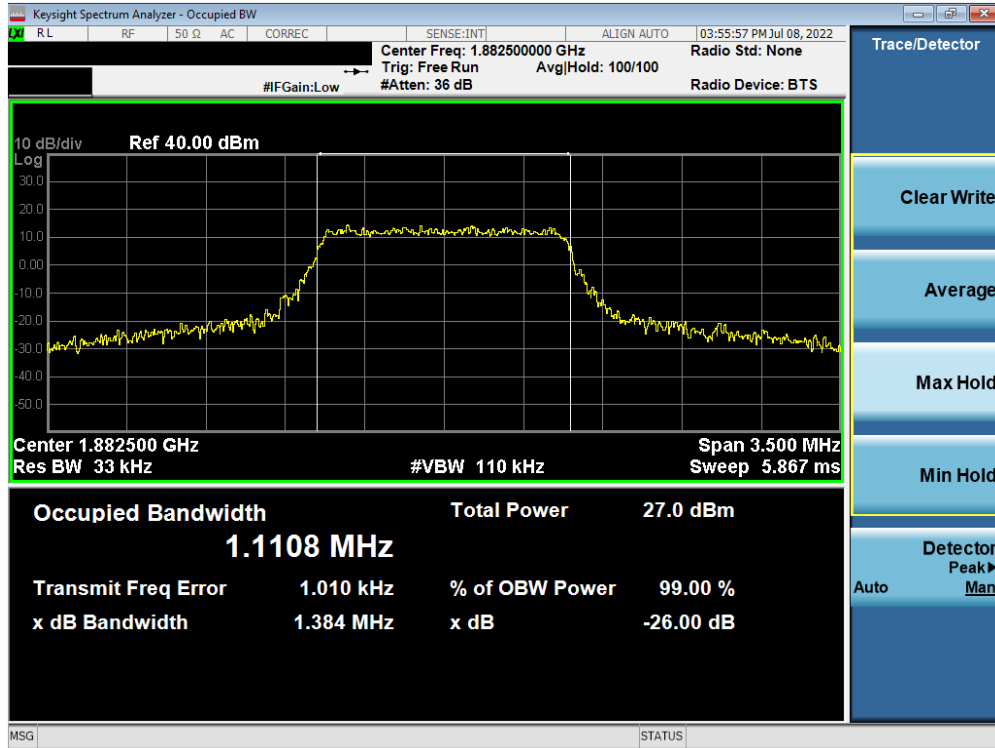


Plot 7-17. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB)

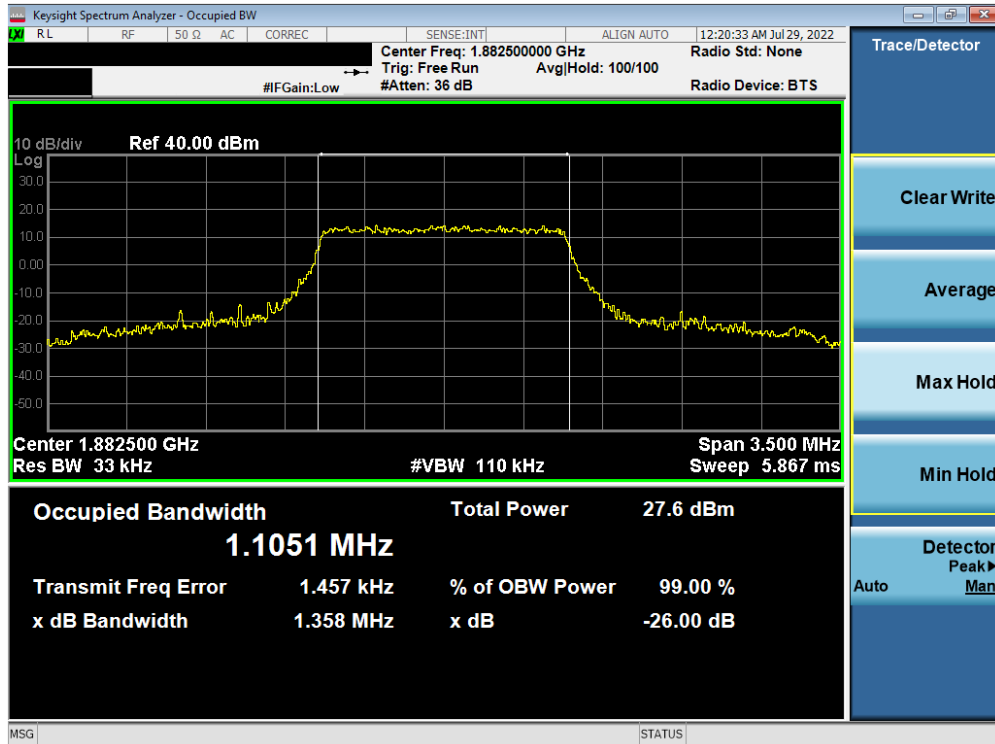


Plot 7-18. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 20 of 86

GSM/GPRS PCS

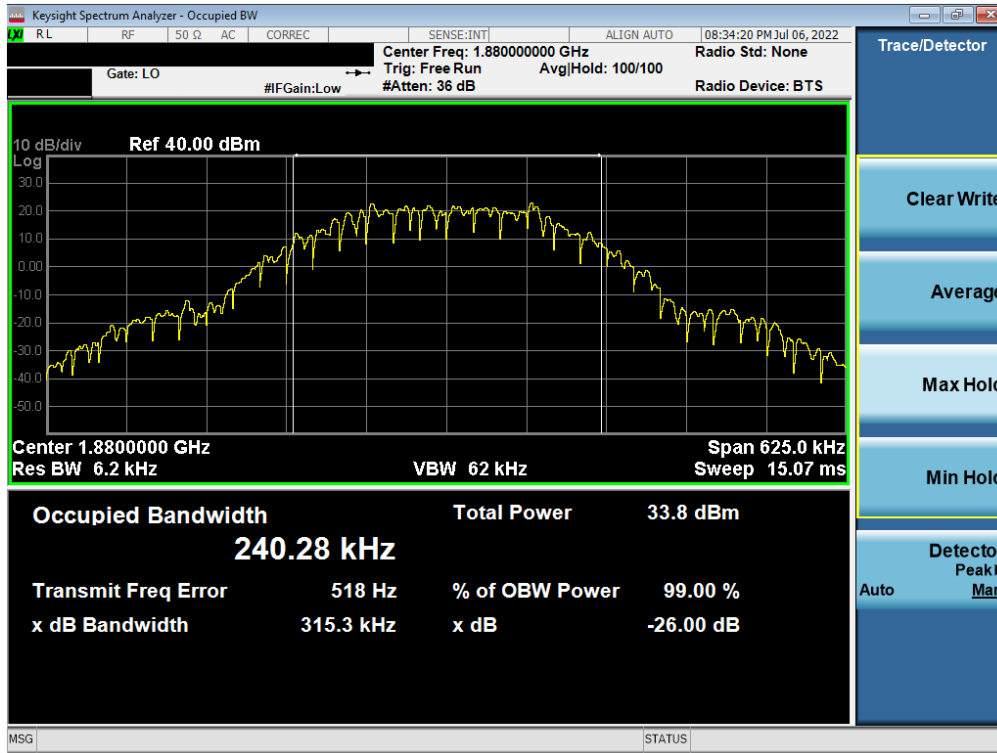


Plot 7-19. Occupied Bandwidth Plot (GPRS, Ch. 661)

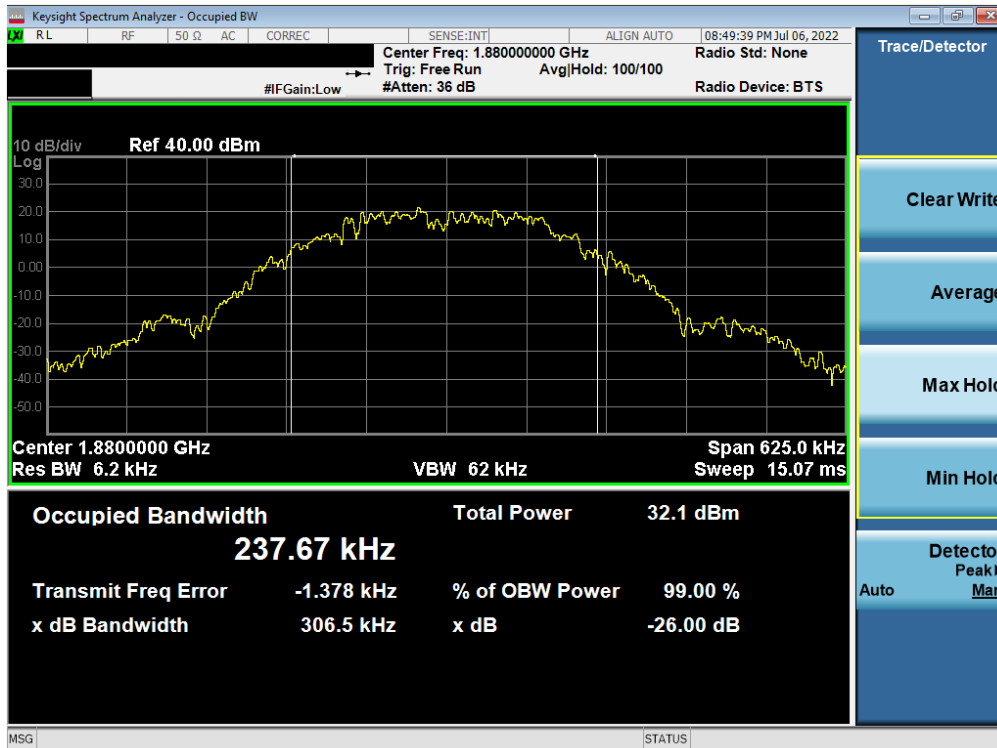

Plot 7-20. Occupied Bandwidth Plot (EDGE, Ch. 661)

FCC ID: PY7-58692W		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 21 of 86	

WCDMA PCS

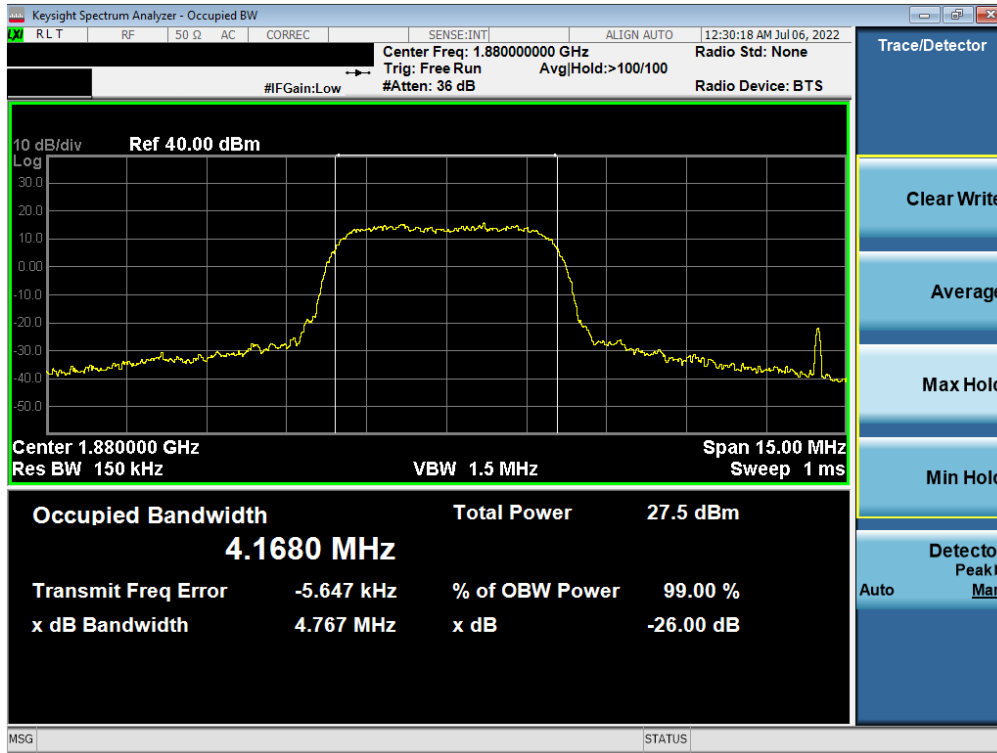

Plot 7-21. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 22 of 86

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

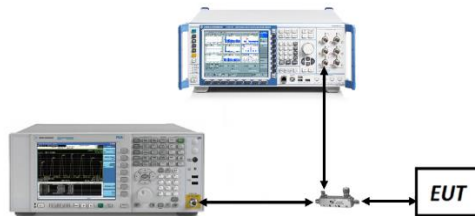



Figure 7-2. Test Instrument & Measurement Setup

Test Note


Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 23 of 86

LTE Band 25/2

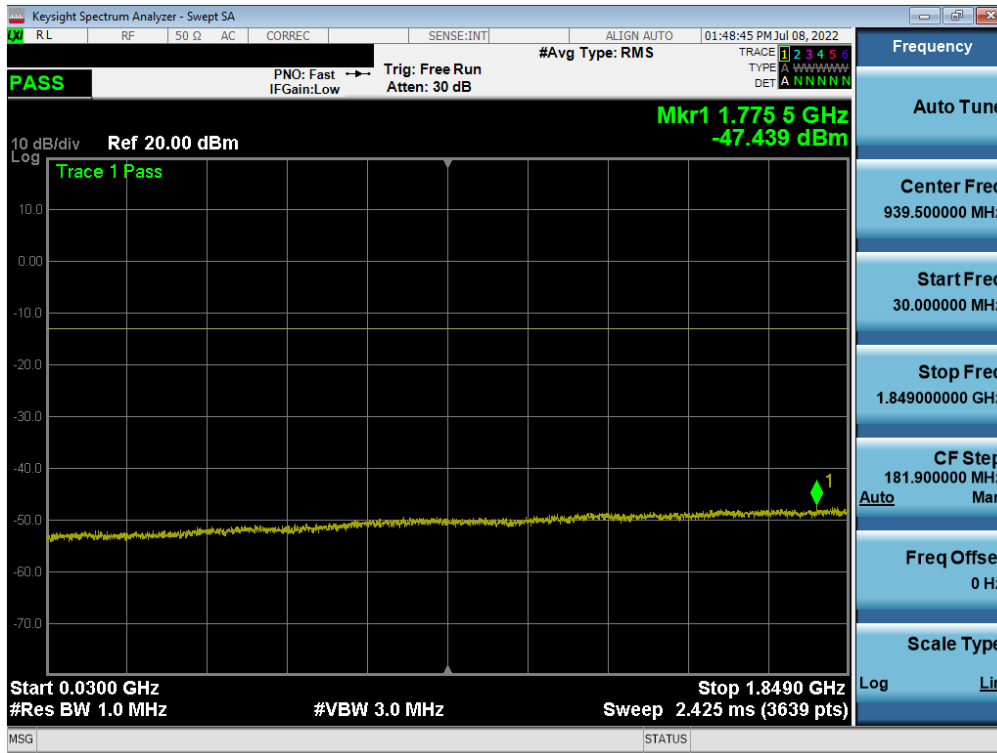


Plot 7-22. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

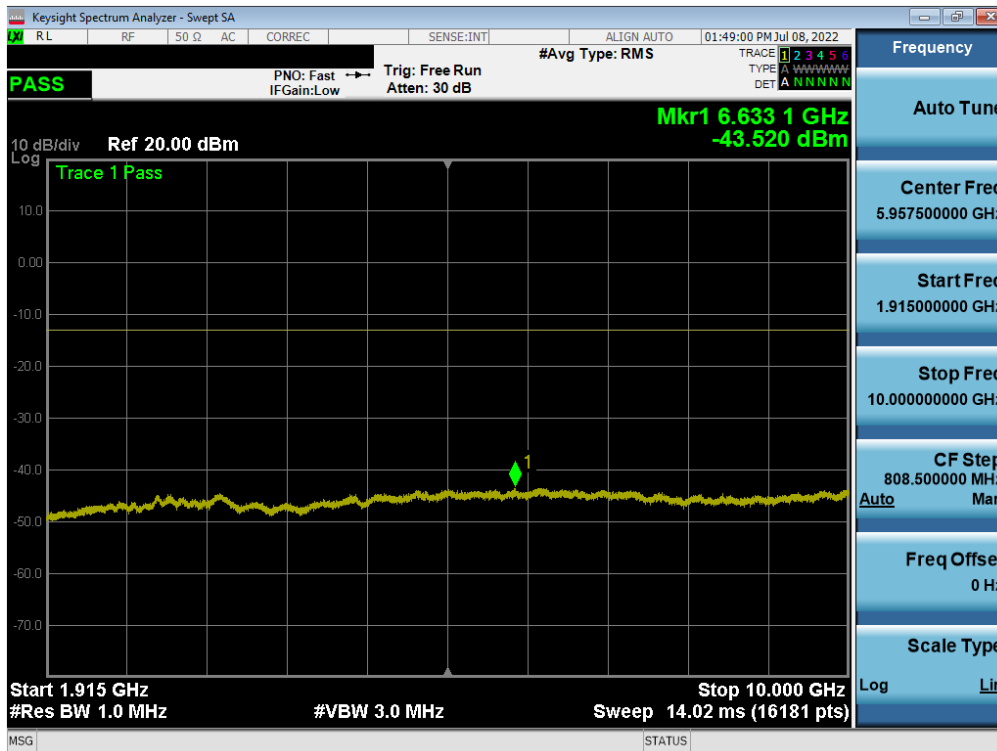


Plot 7-23. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 24 of 86

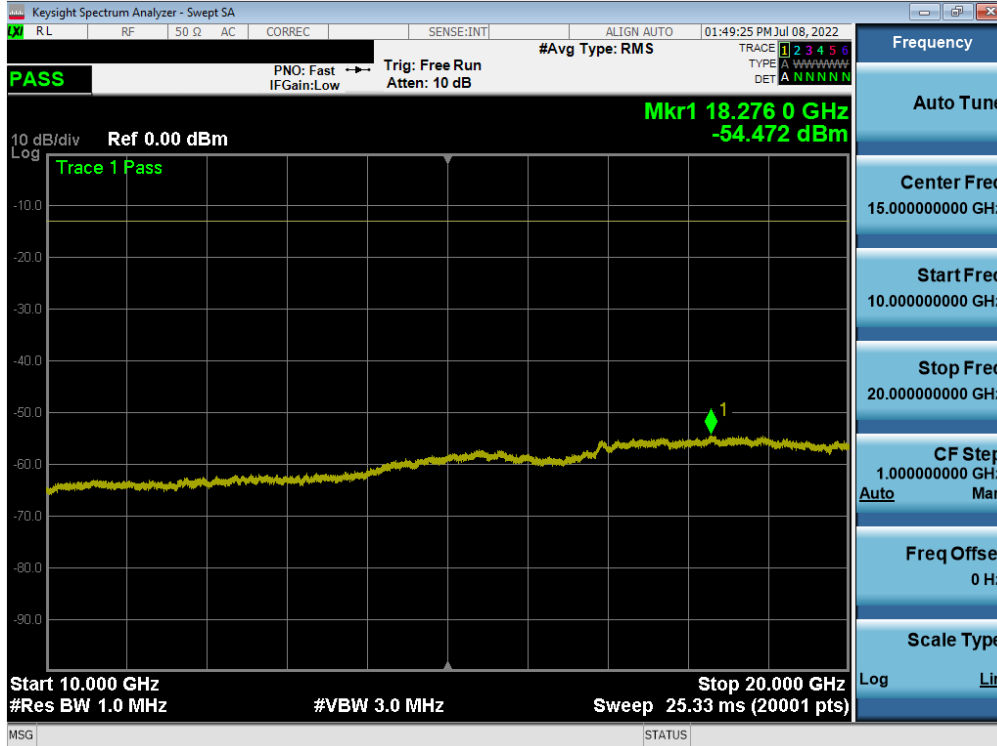


Plot 7-24. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

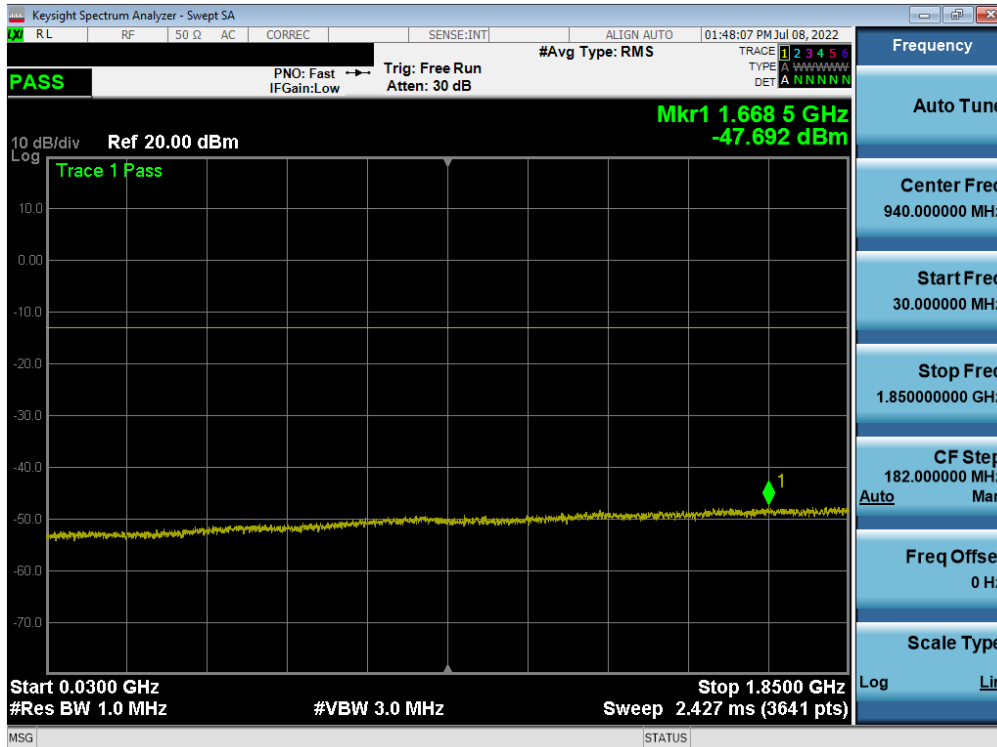


Plot 7-25. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 25 of 86

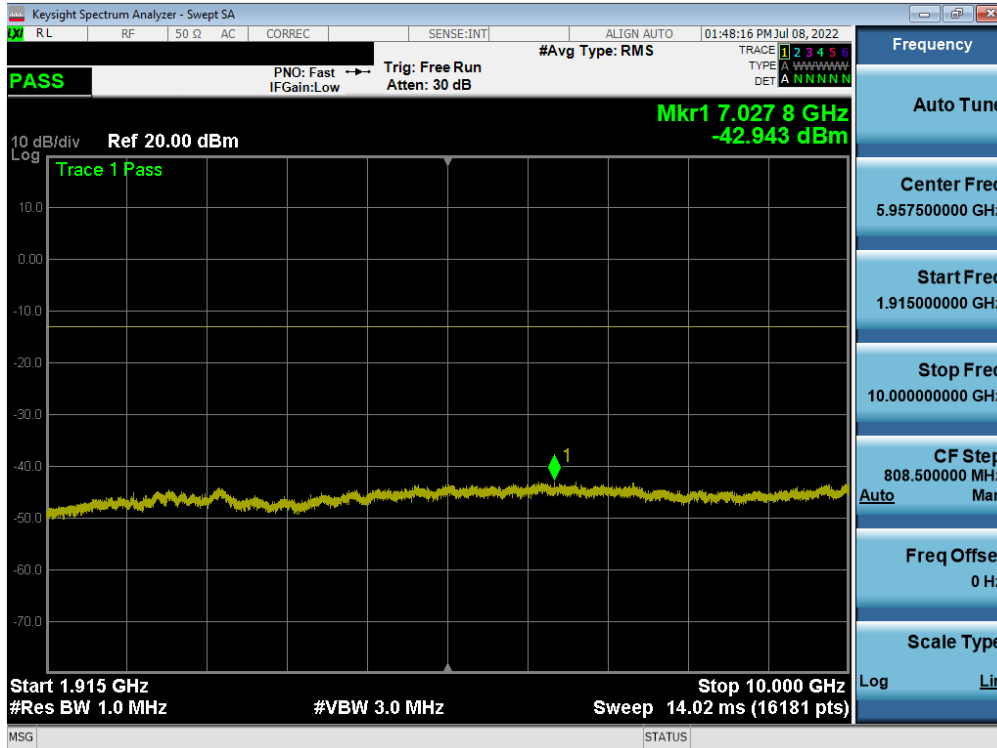


Plot 7-26. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

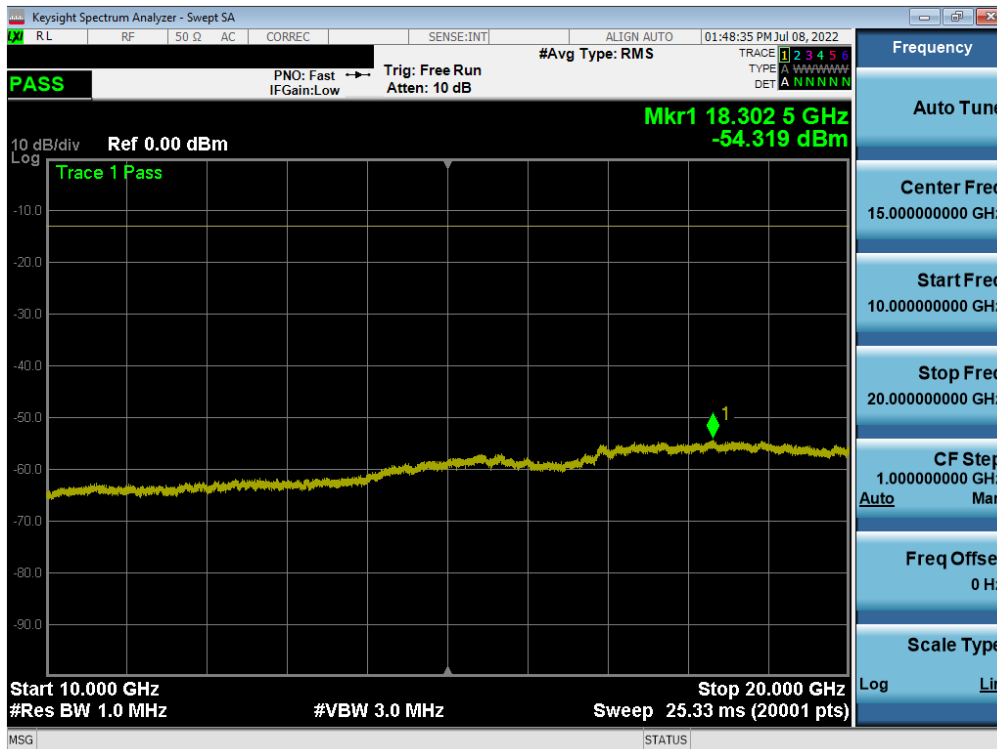


Plot 7-27. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 26 of 86

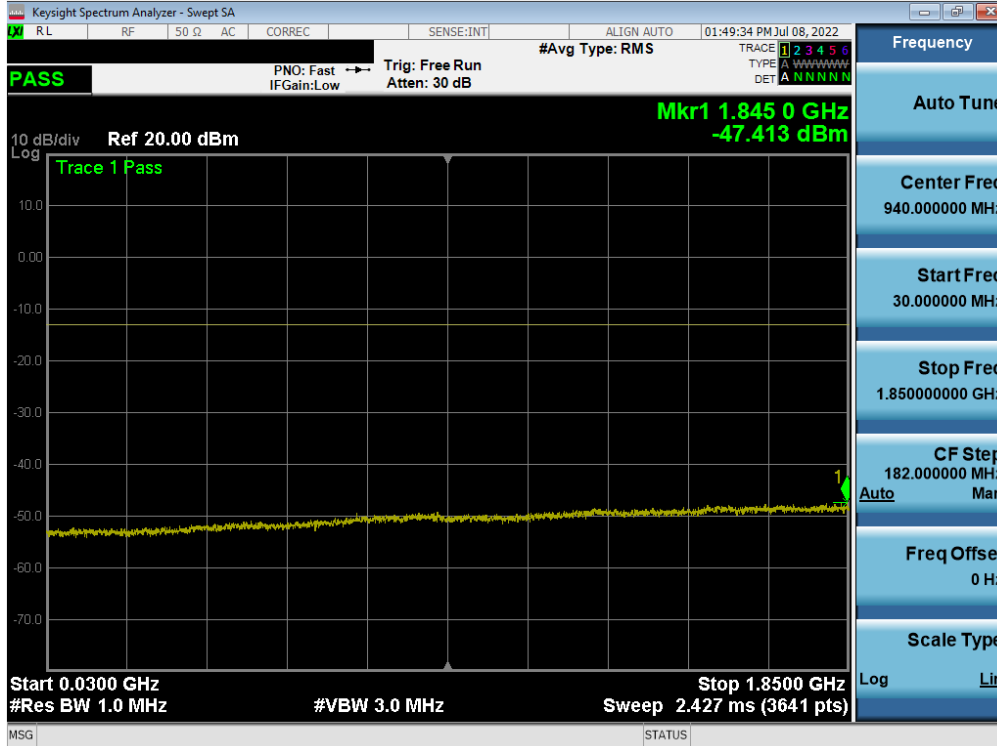

Plot 7-28. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)

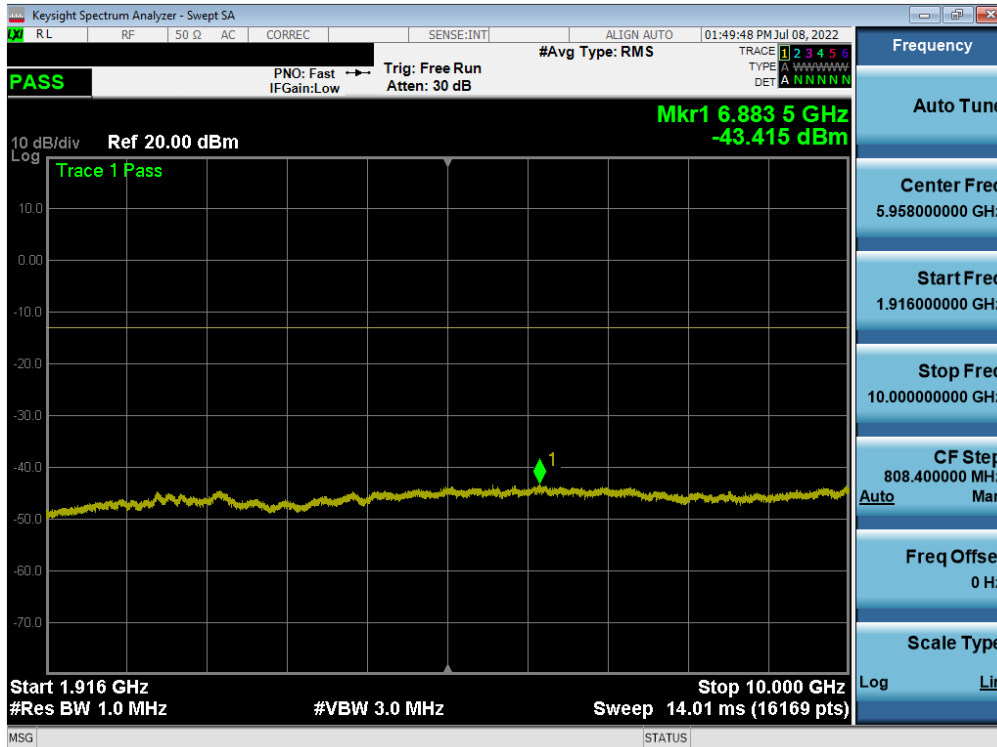

Plot 7-29. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)


FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 27 of 86




Plot 7-30. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 28 of 86

GSM/GPRS PCS

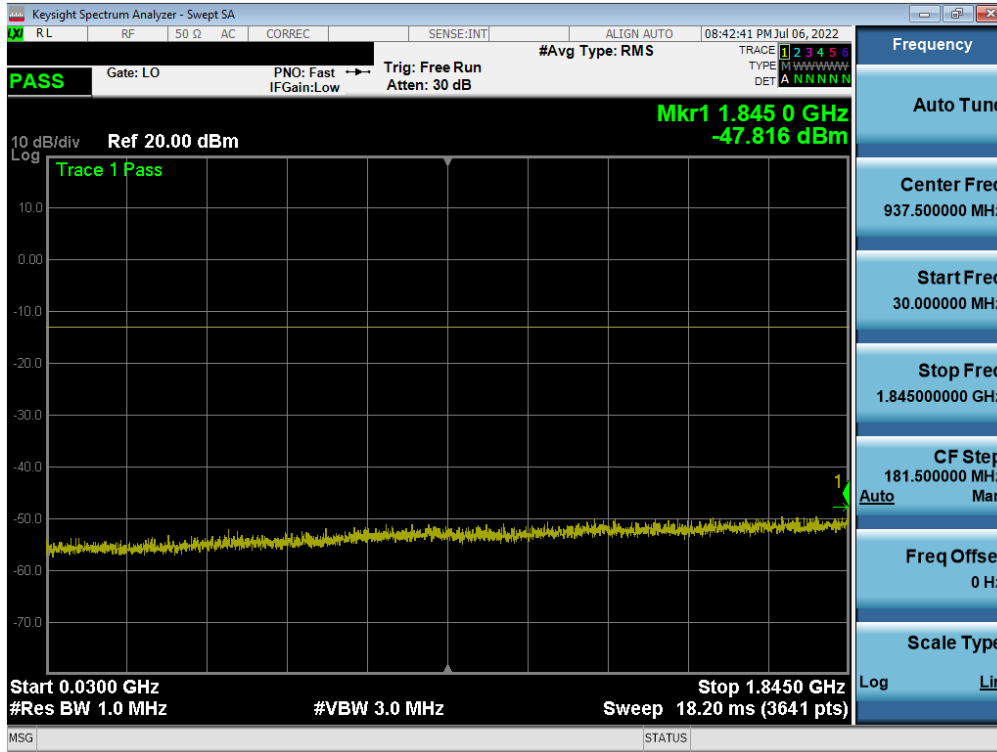


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 512)

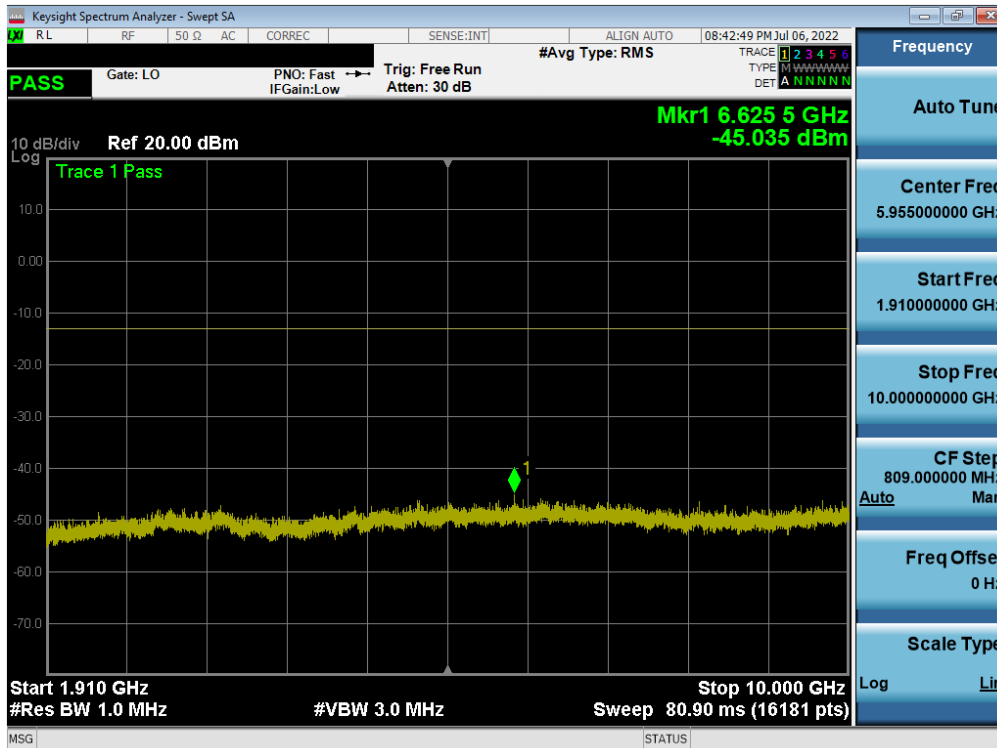


Plot 7-32. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 29 of 86

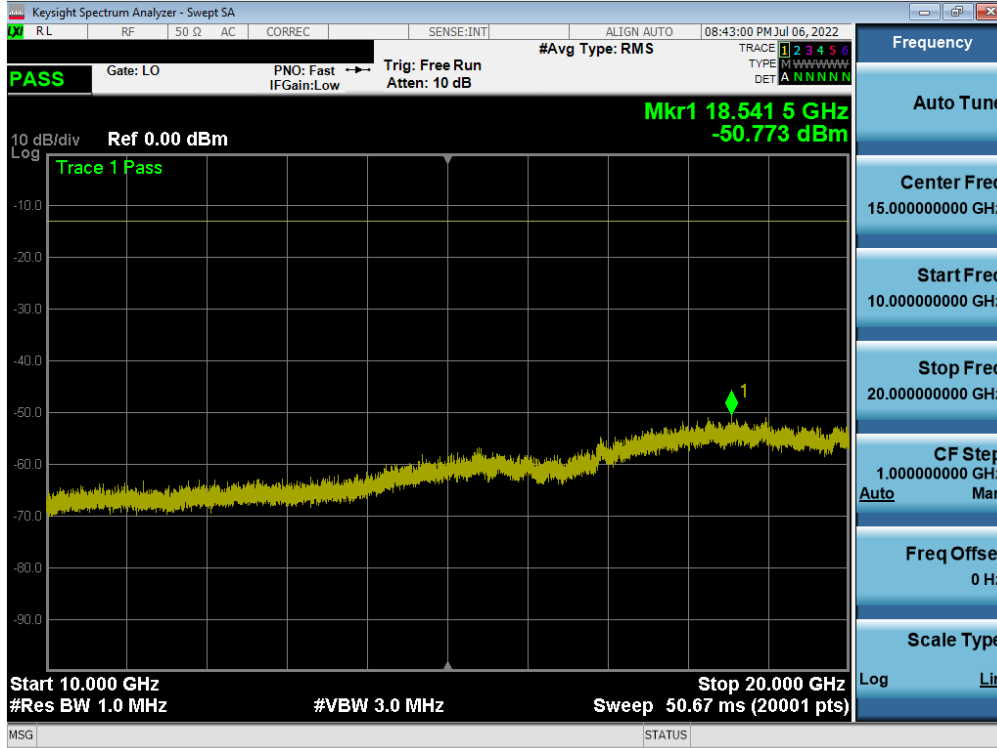


Plot 7-33. Conducted Spurious Plot (GPRS Ch. 512)

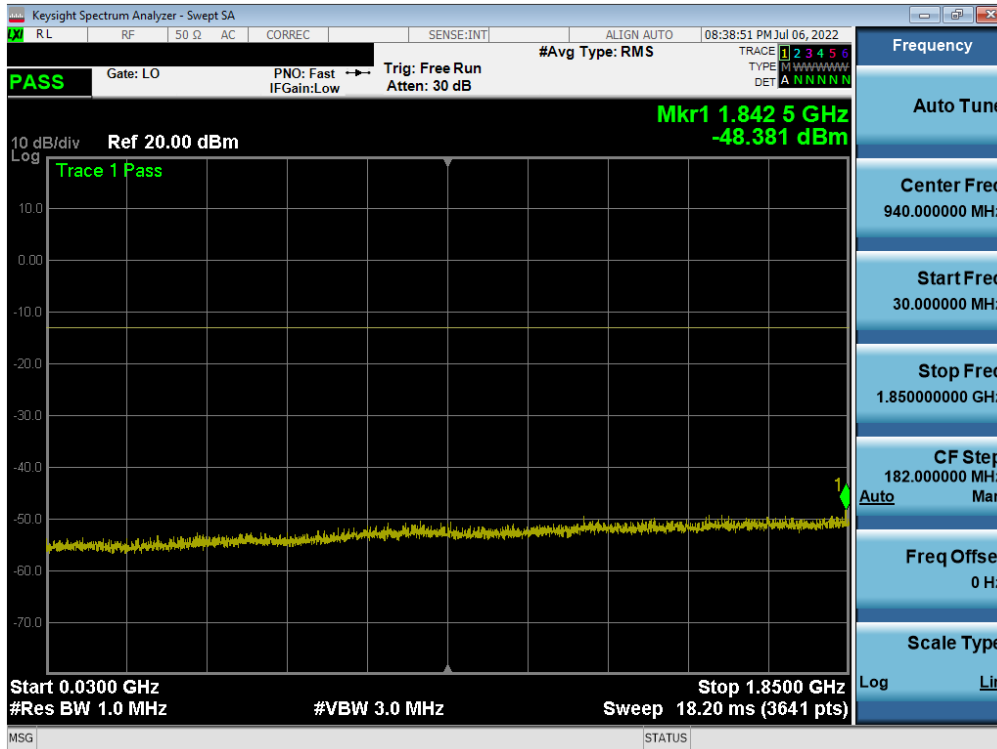


Plot 7-34. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 30 of 86

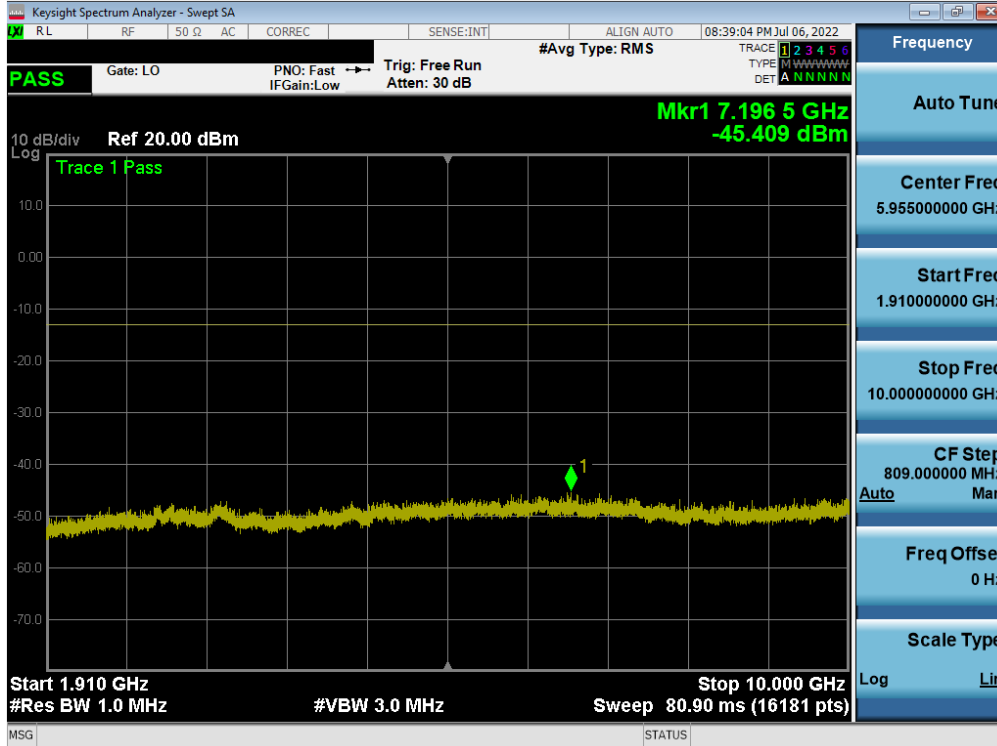


Plot 7-35. Conducted Spurious Plot (GPRS Ch. 661)

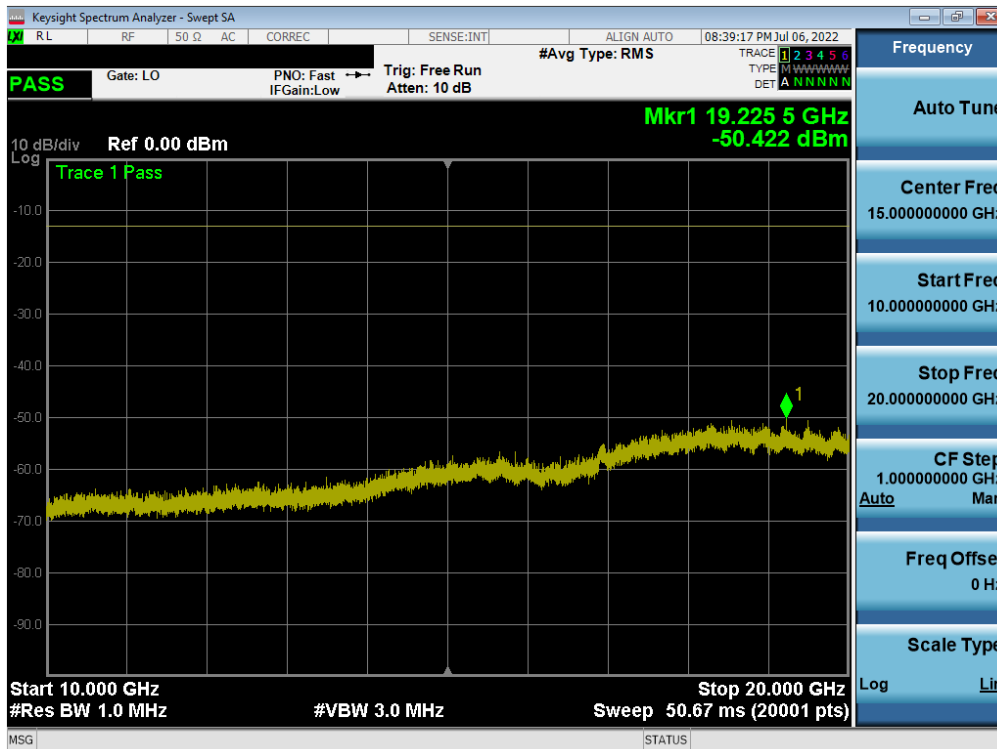


Plot 7-36. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 31 of 86

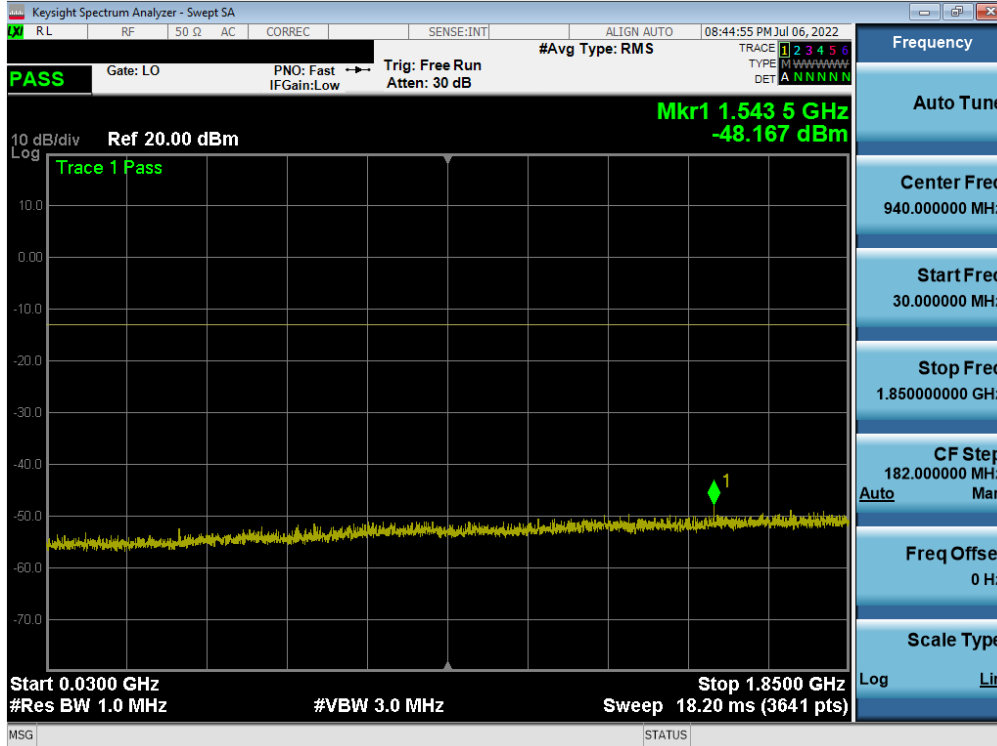


Plot 7-37. Conducted Spurious Plot (GPRS Ch. 810)

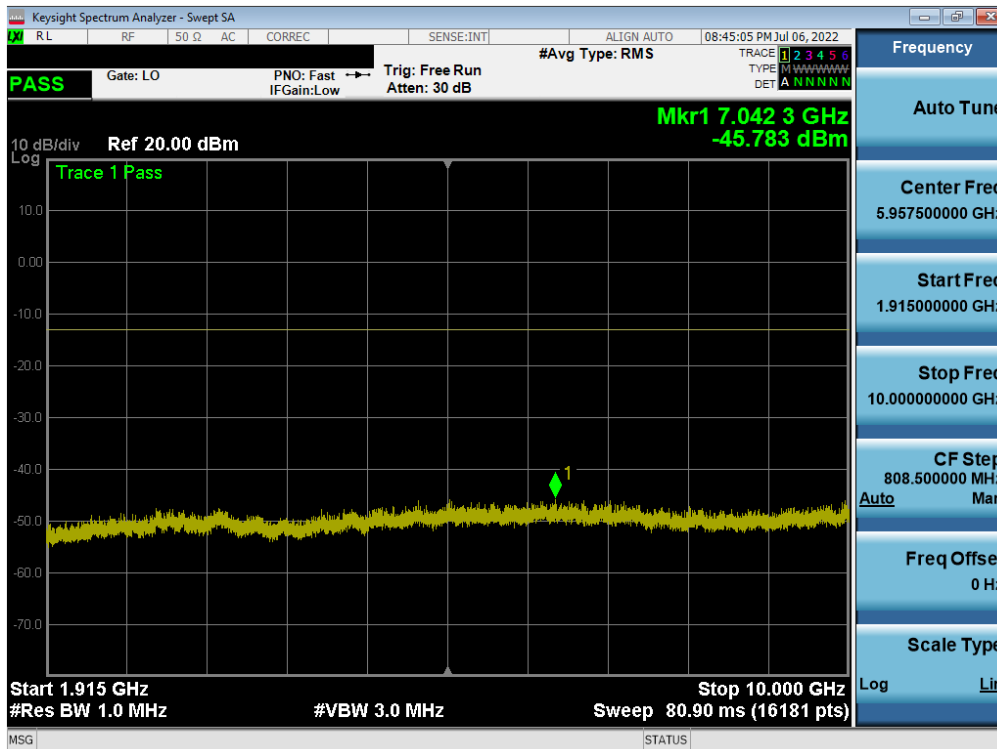

Plot 7-38. Conducted Spurious Plot (GPRS Ch. 810)


FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 32 of 86

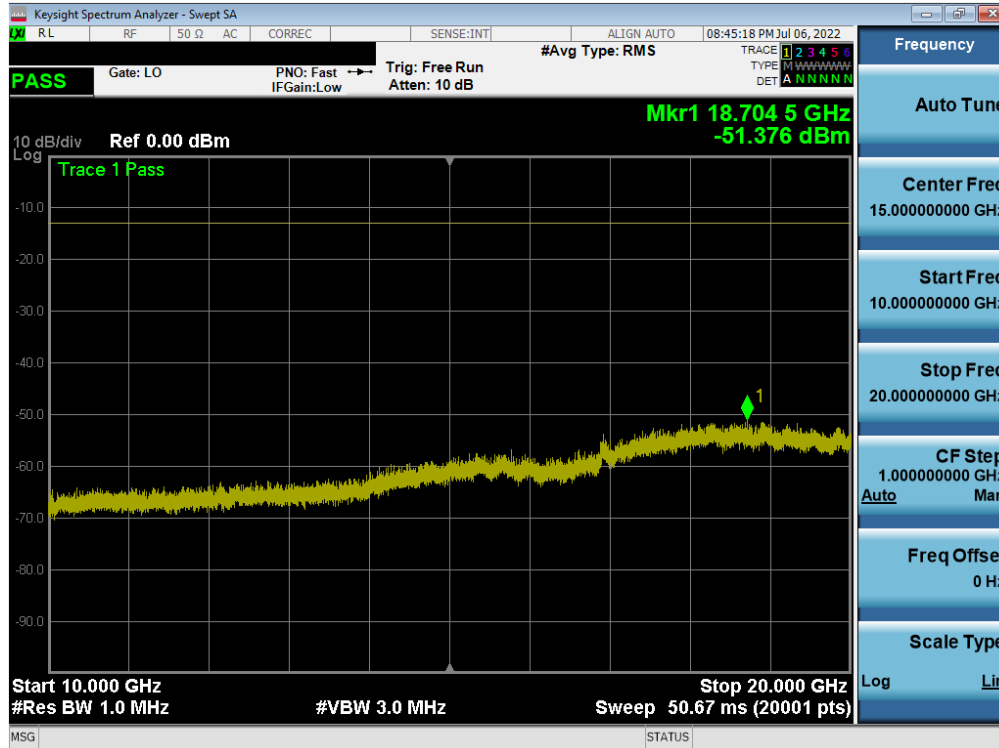


Plot 7-39. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 33 of 86

WCDMA PCS

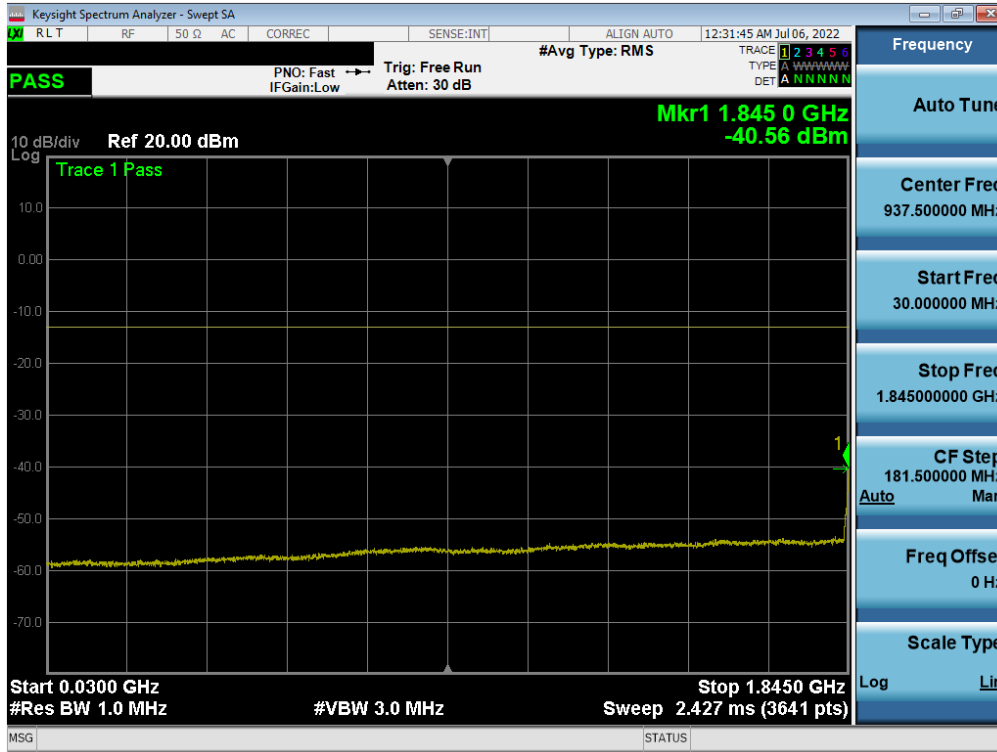


Plot 7-40. Conducted Spurious Plot (WCDMA Ch. 9262)

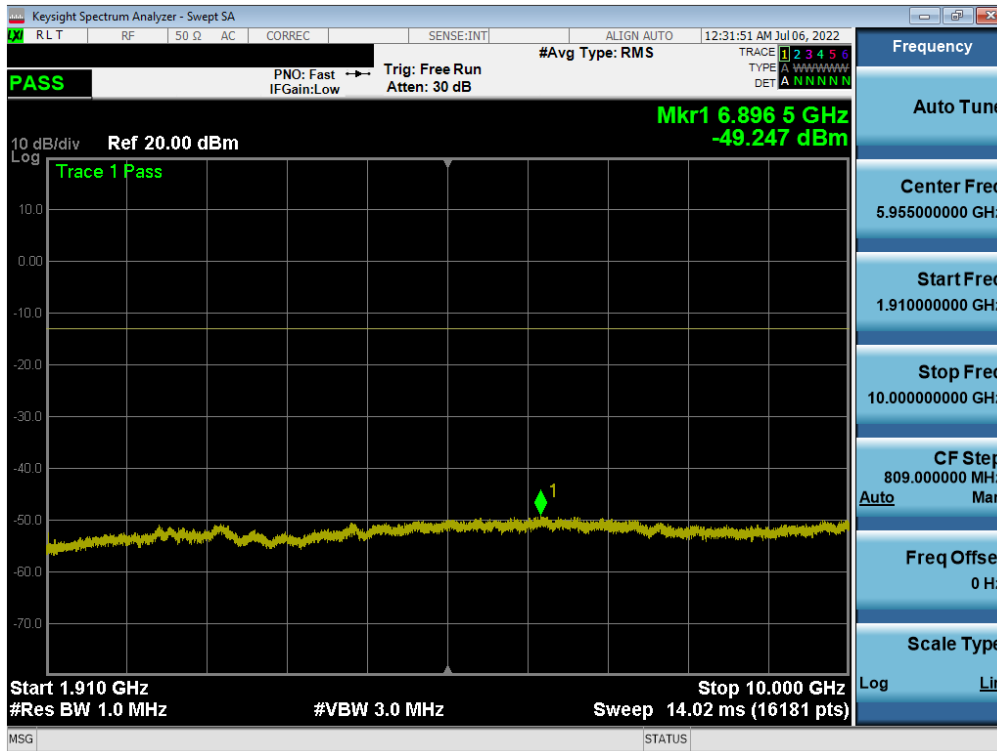


Plot 7-41. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 34 of 86

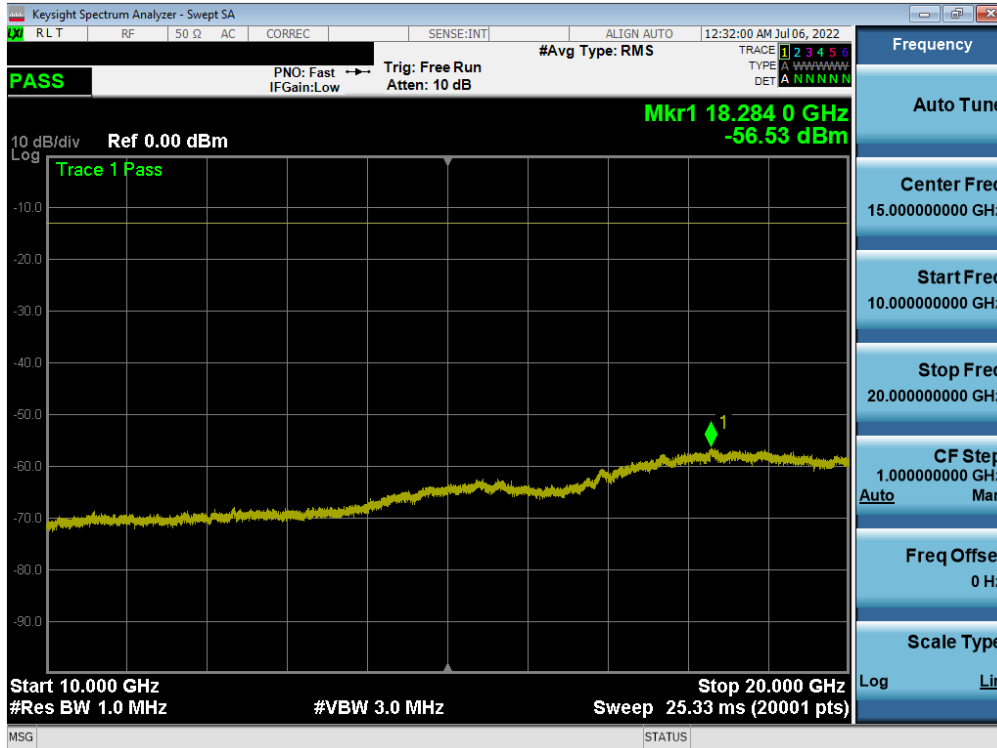


Plot 7-42. Conducted Spurious Plot (WCDMA Ch. 9262)

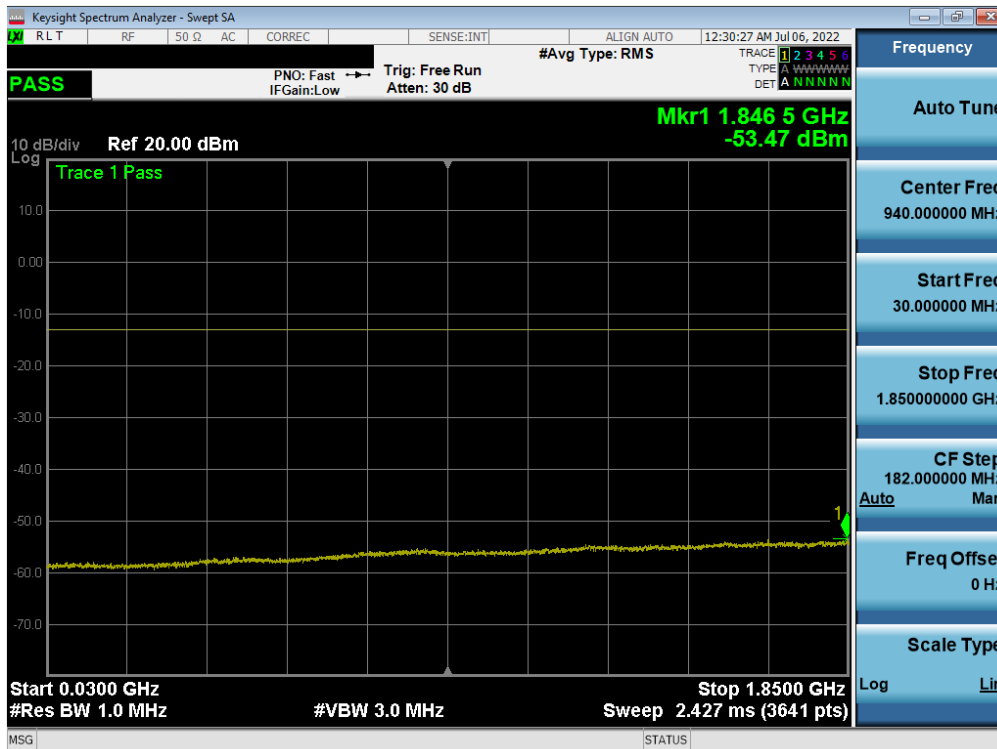


Plot 7-43. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 35 of 86

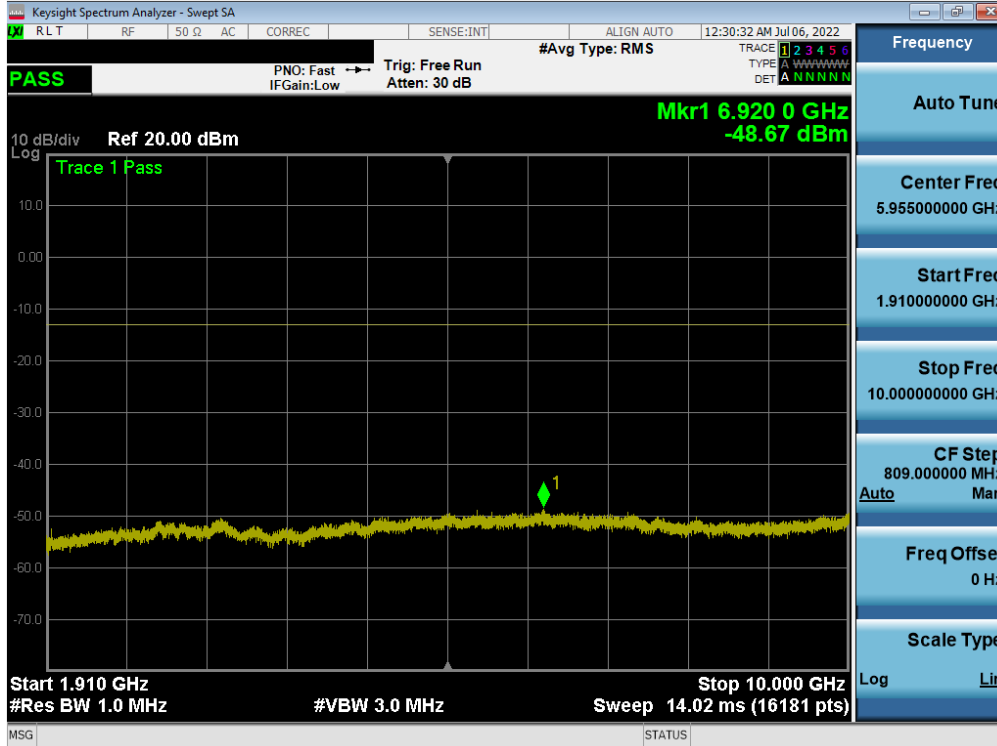


Plot 7-44. Conducted Spurious Plot (WCDMA Ch. 9400)

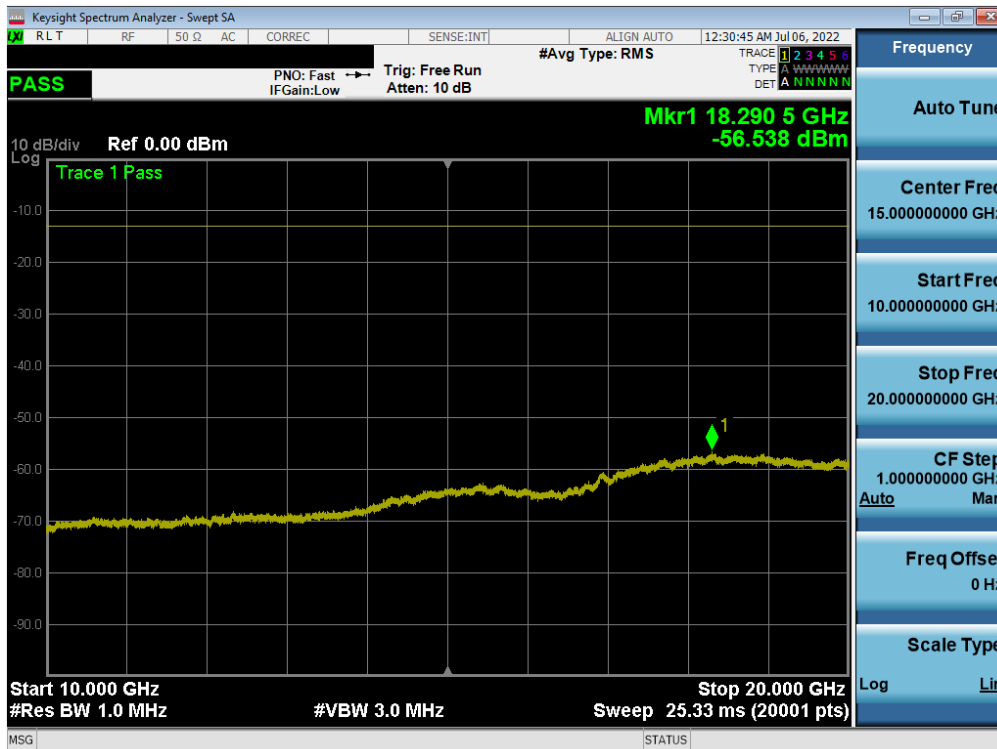


Plot 7-45. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 36 of 86

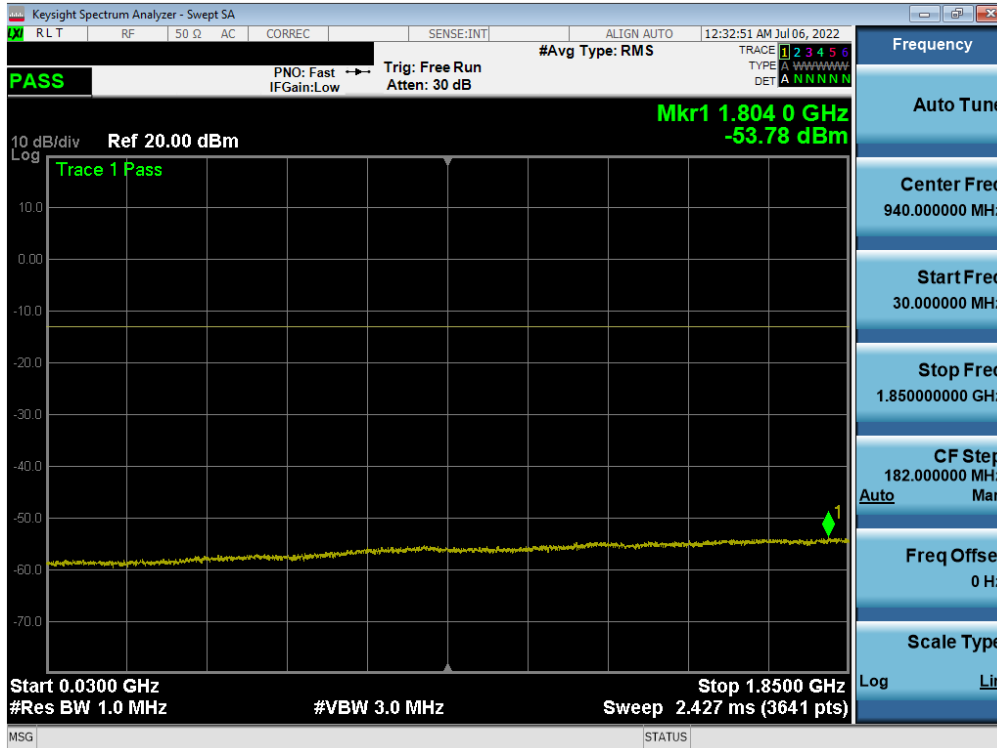


Plot 7-46. Conducted Spurious Plot (WCDMA Ch. 9538)

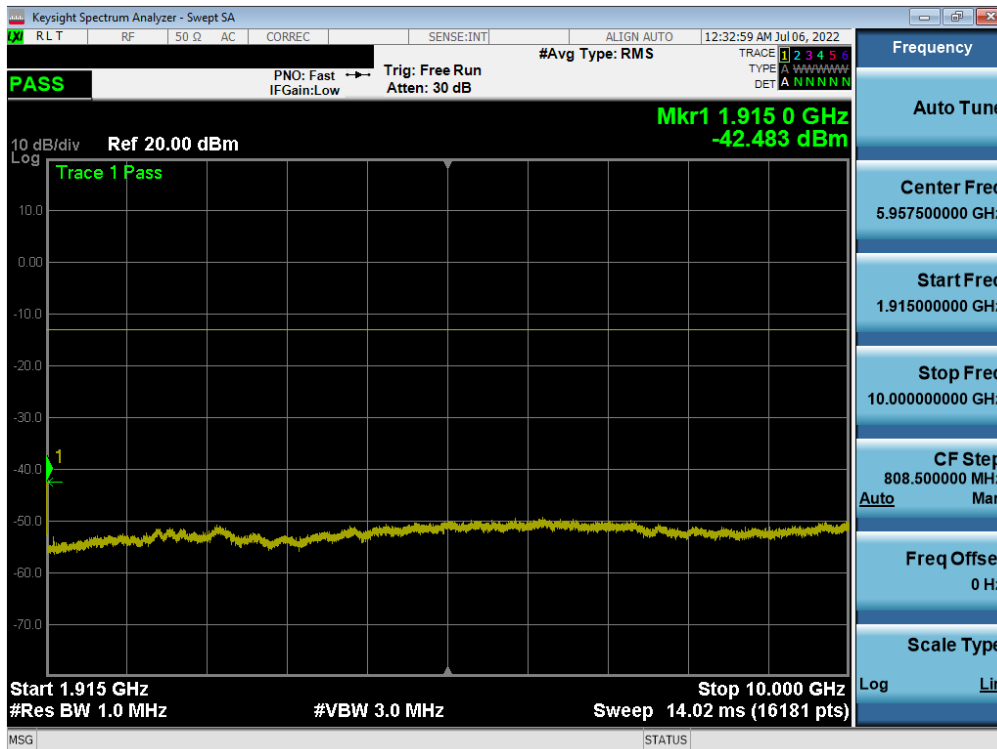

Plot 7-47. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 37 of 86

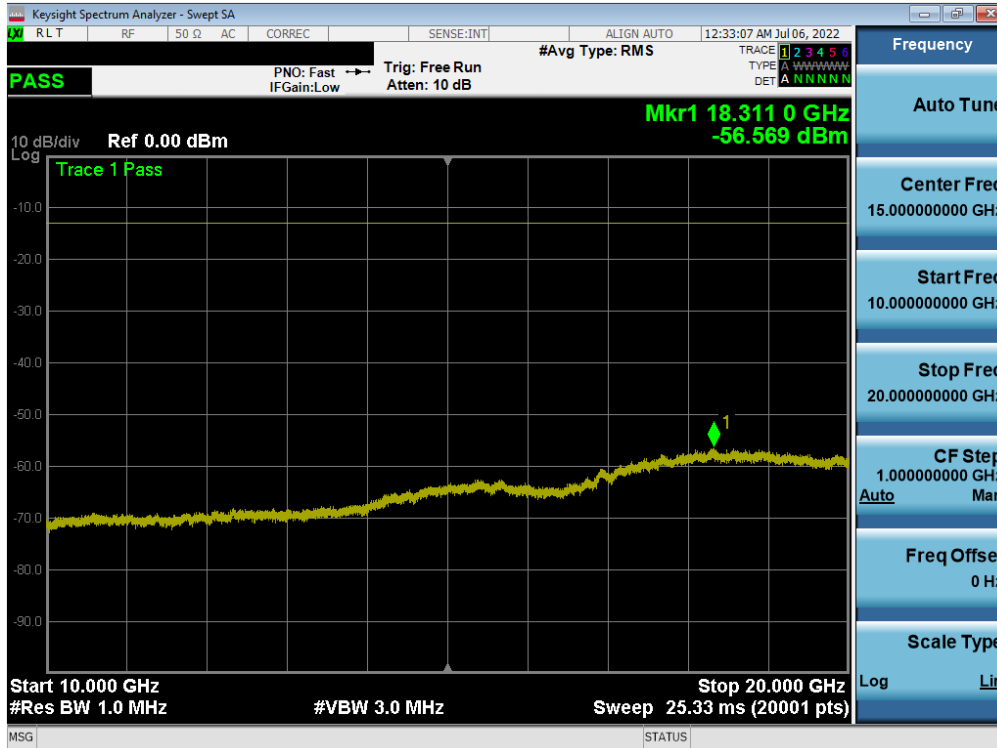

Plot 7-48. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 38 of 86

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

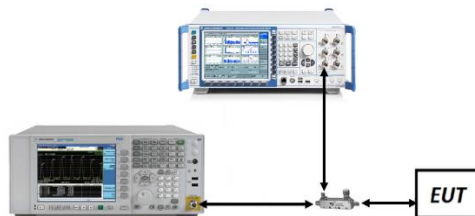



Figure 7-3. Test Instrument & Measurement Setup

Test Note


Per 24.238(b), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 39 of 86

LTE Band 25/2

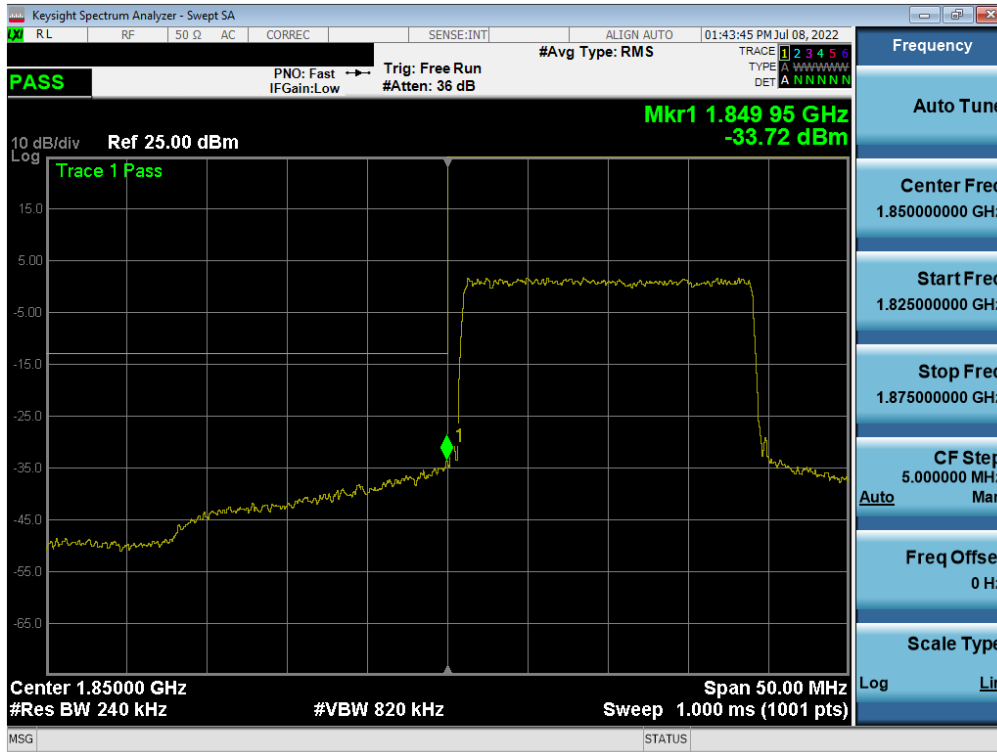

Plot 7-49. Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB)

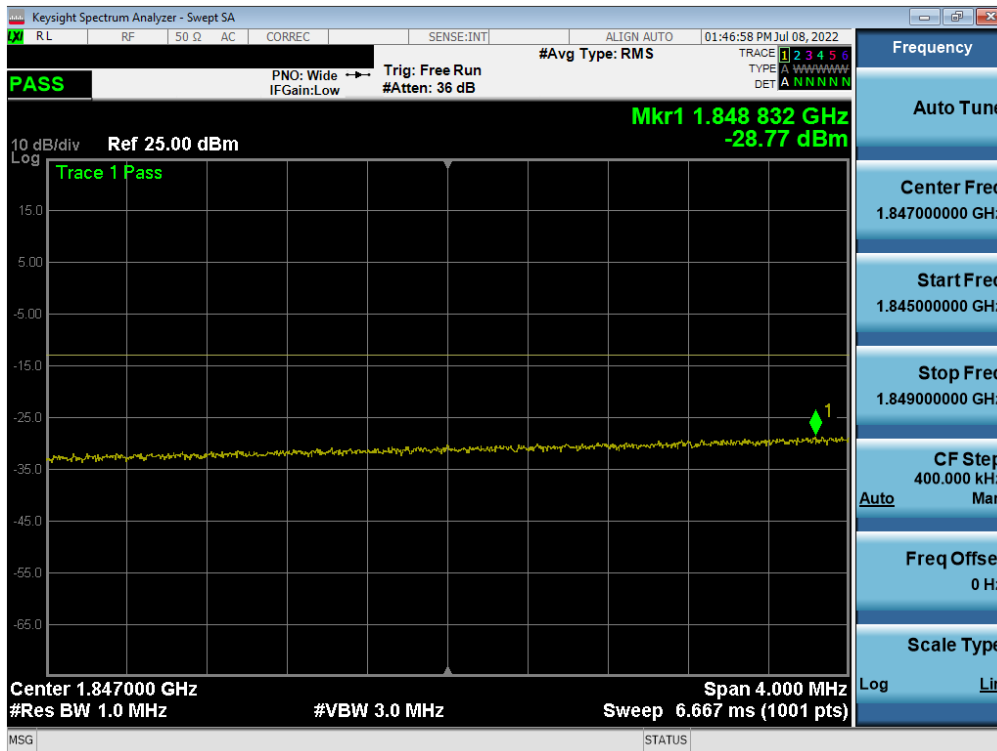

Plot 7-50. Extended Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 40 of 86




Plot 7-51. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB)




Plot 7-52. Extended Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 41 of 86

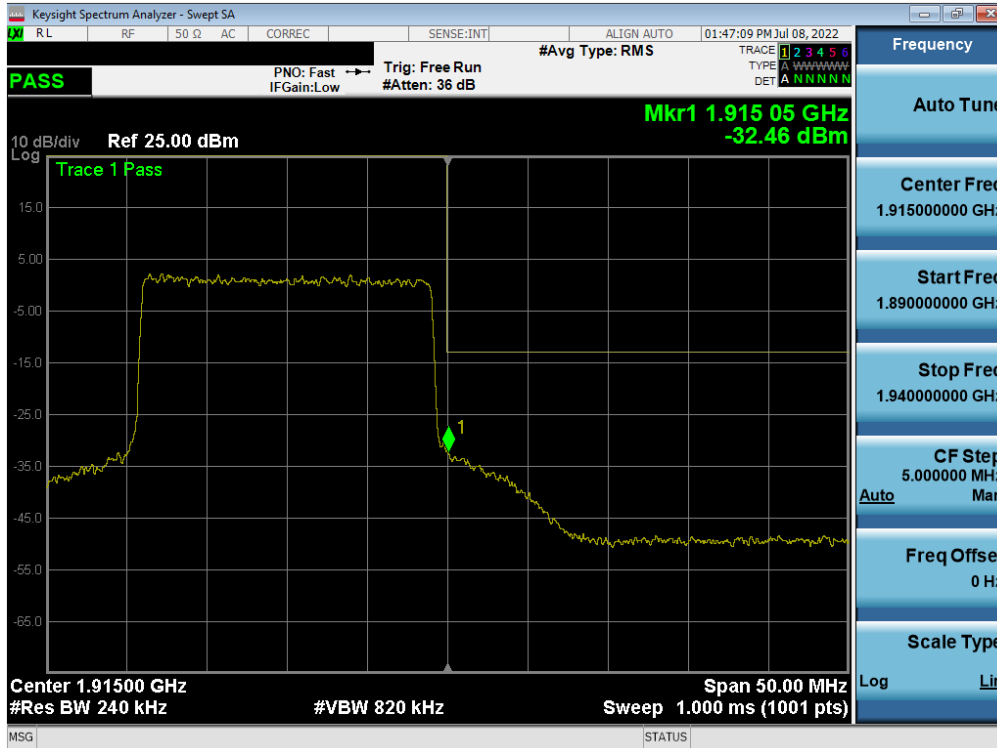


Plot 7-53. Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB)

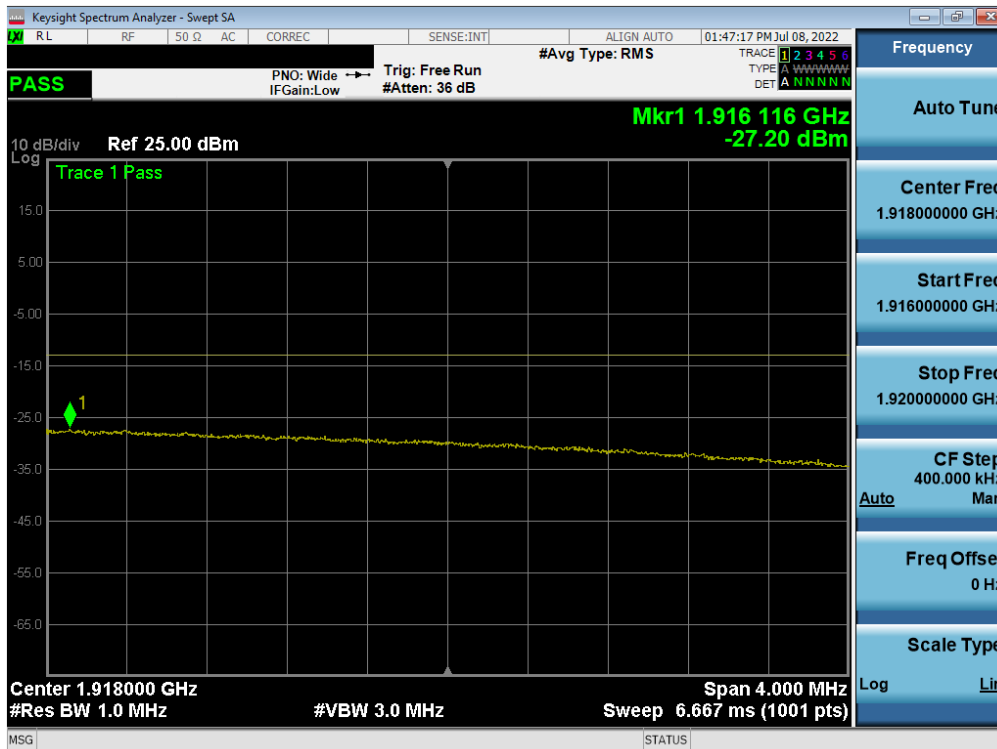


Plot 7-54. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 42 of 86

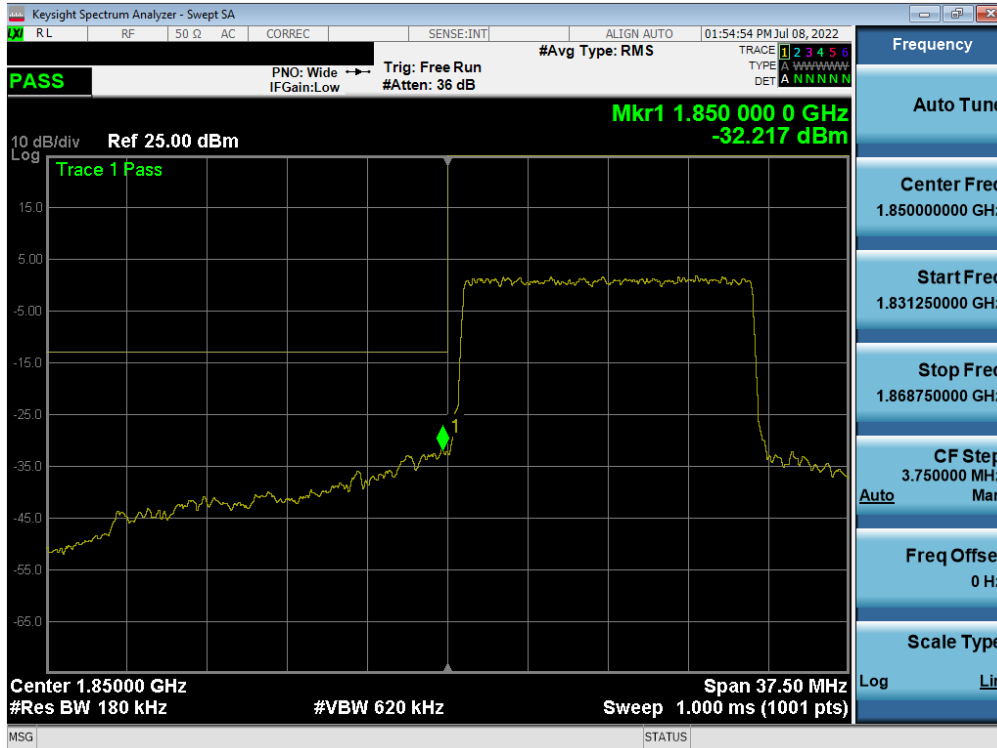

Plot 7-55. Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK – Full RB)

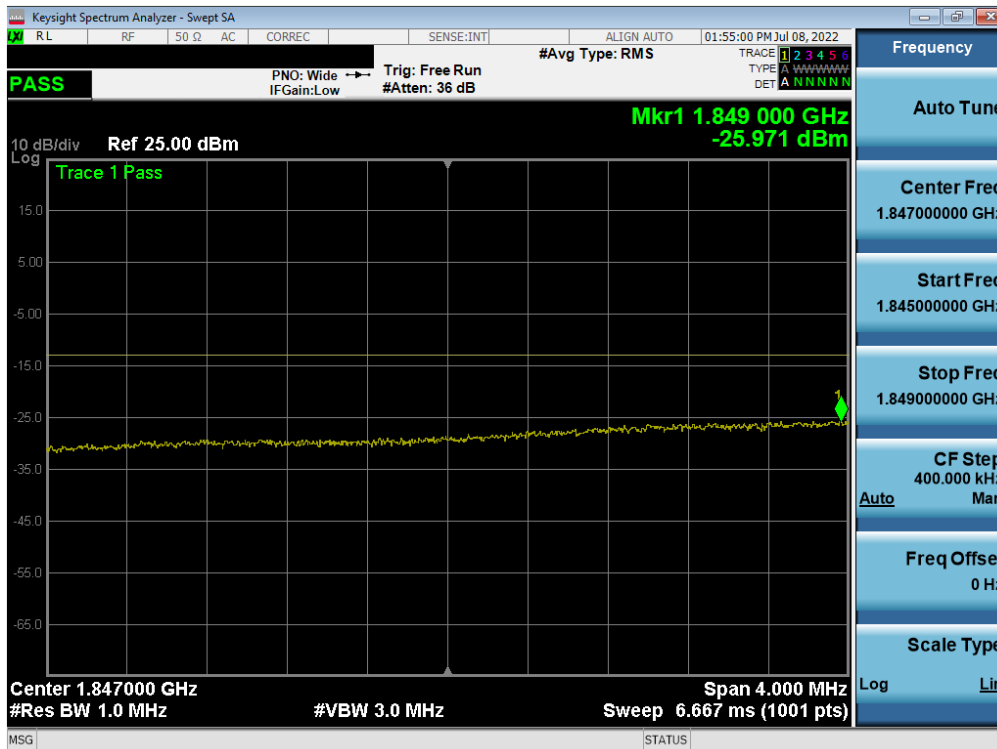

Plot 7-56. Extended Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 43 of 86



Plot 7-57. Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB)




Plot 7-58. Extended Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 44 of 86




Plot 7-59. Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK – Full RB)

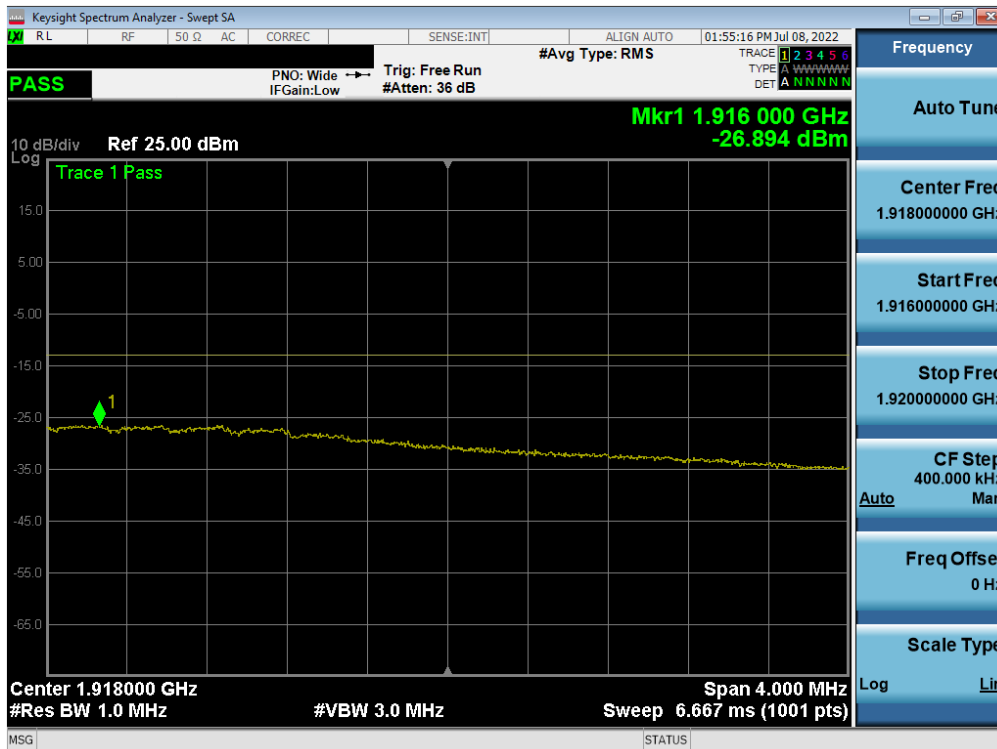


Plot 7-60. Extended Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 45 of 86

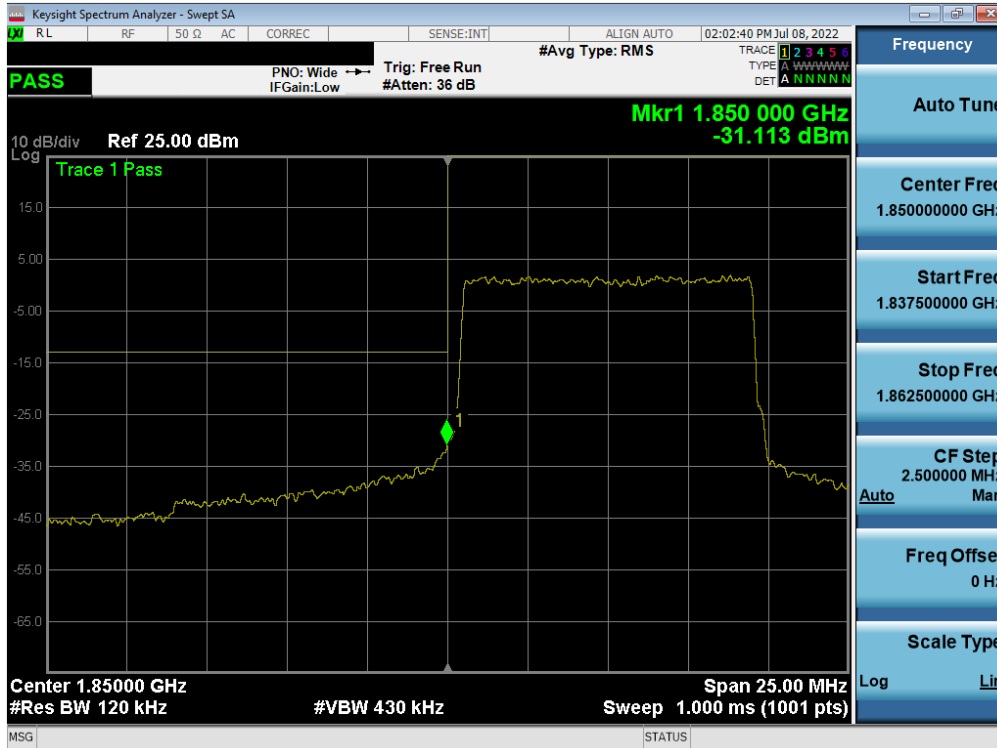

Plot 7-61. Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK – Full RB)

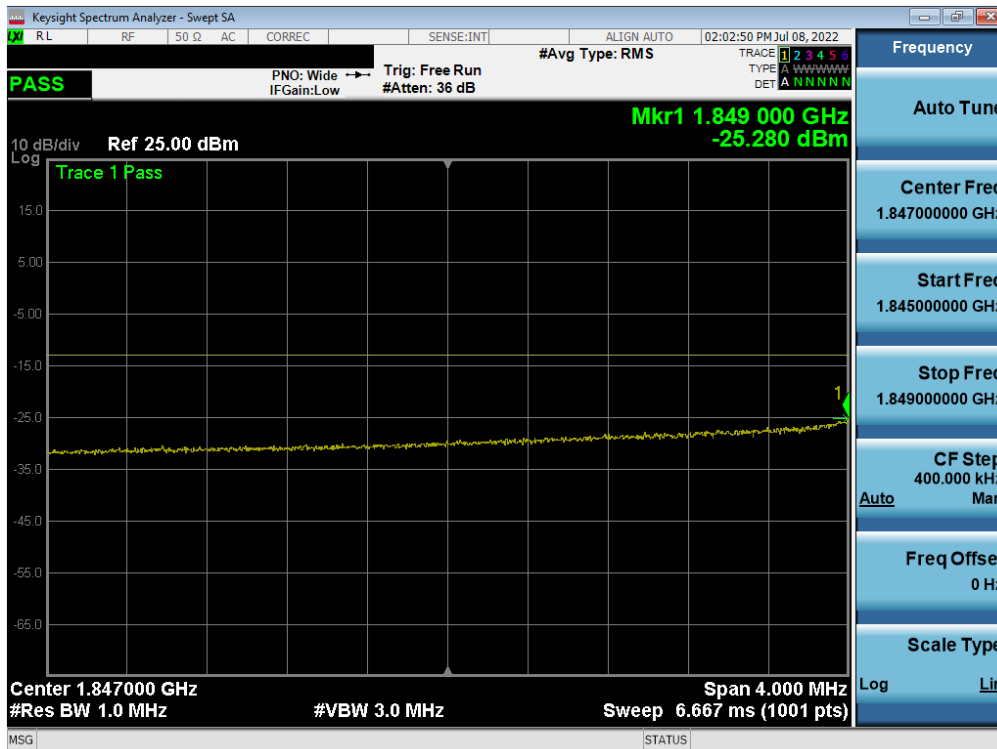


Plot 7-62. Extended Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 46 of 86




Plot 7-63. Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB)

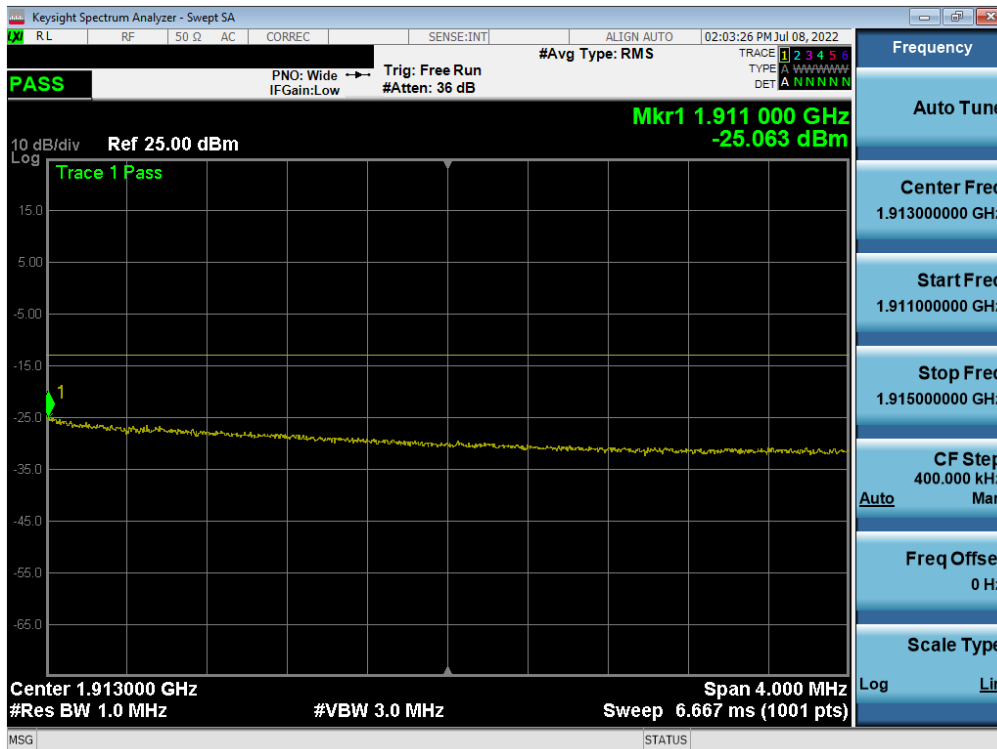


Plot 7-64. Extended Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 47 of 86

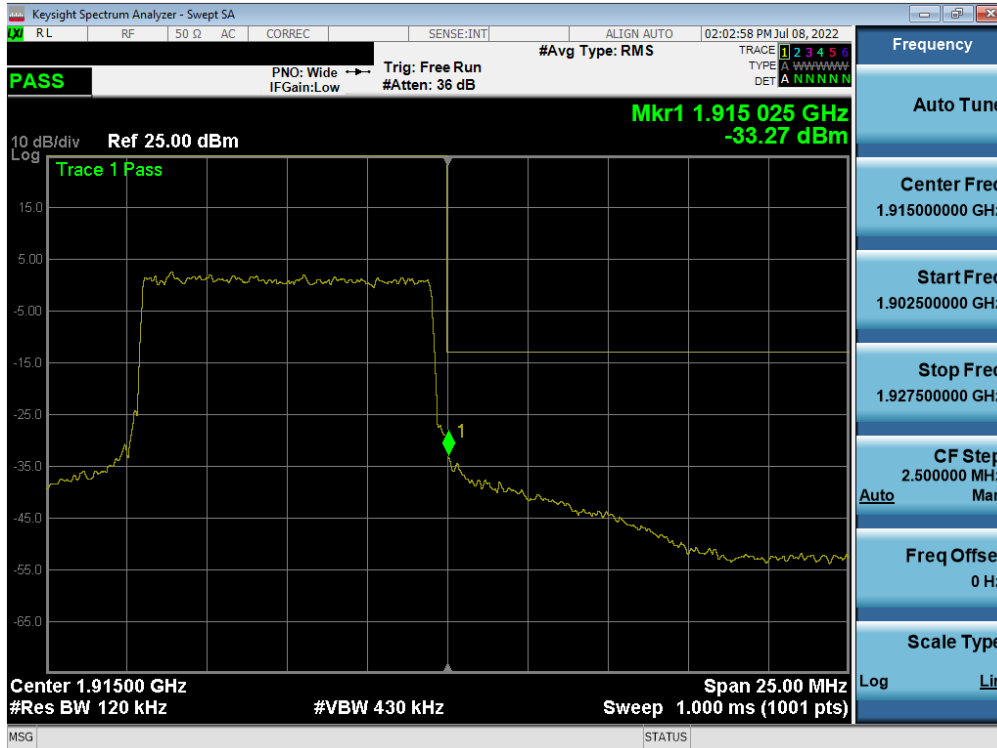


Plot 7-65. Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK – Full RB)

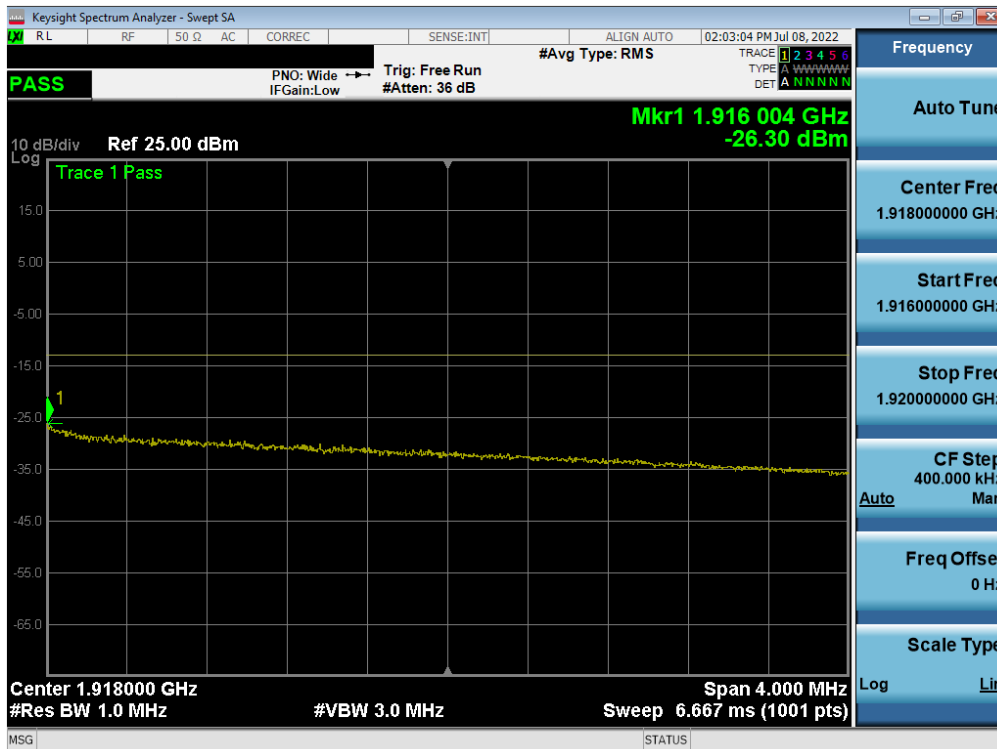


Plot 7-66. Extended Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 48 of 86

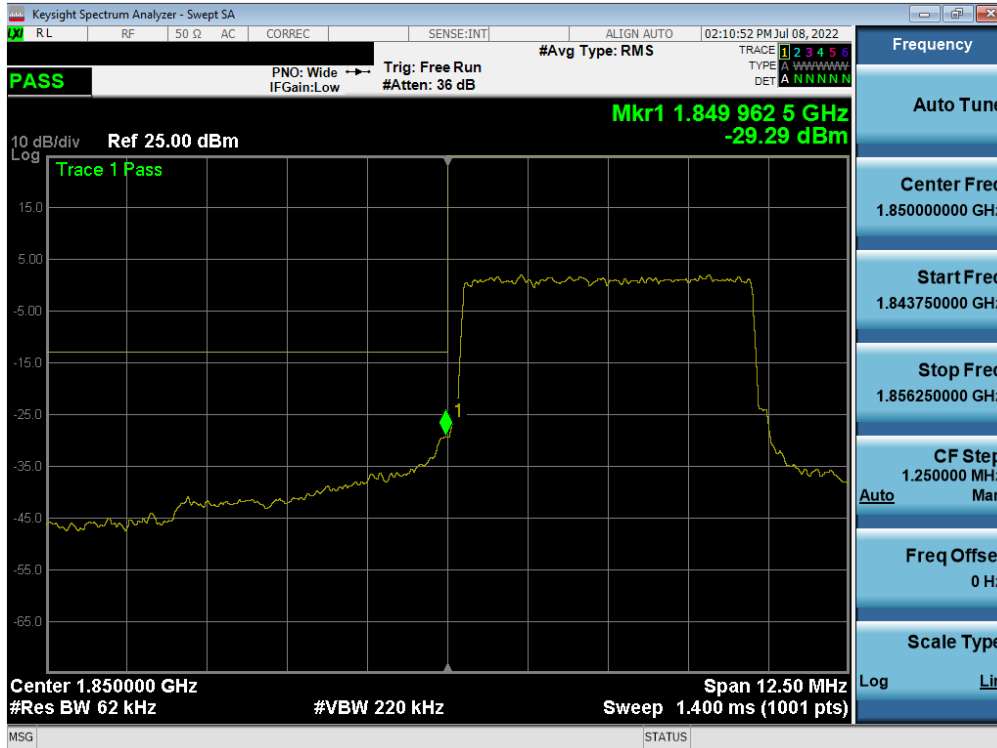

Plot 7-67. Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK – Full RB)

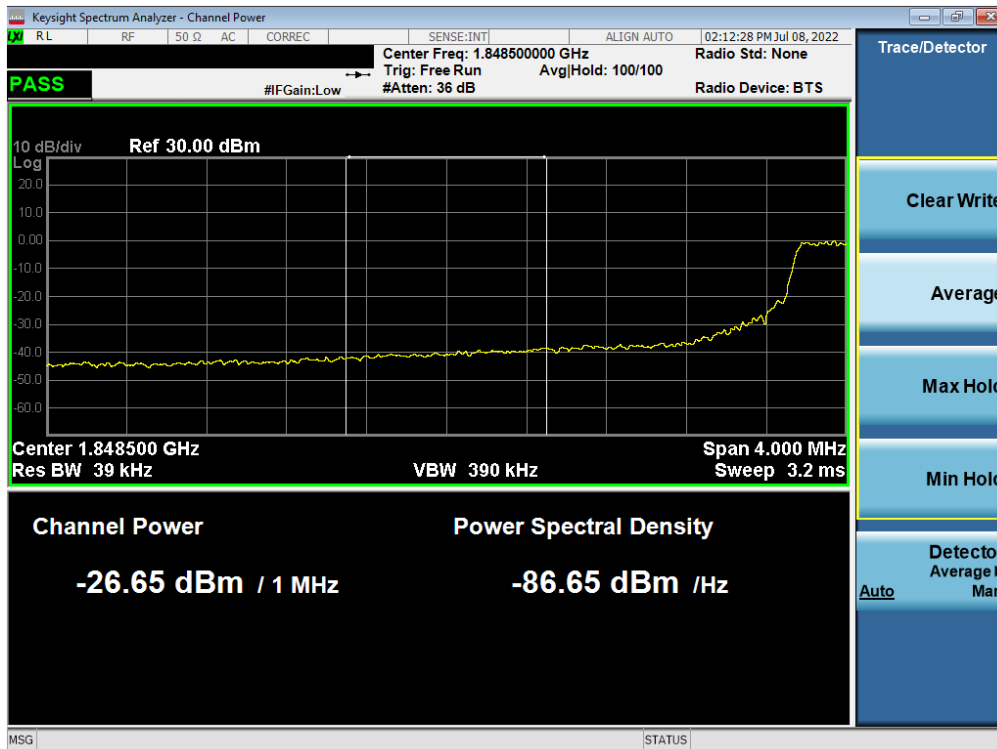


Plot 7-68. Extended Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 49 of 86



Plot 7-69. Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB)

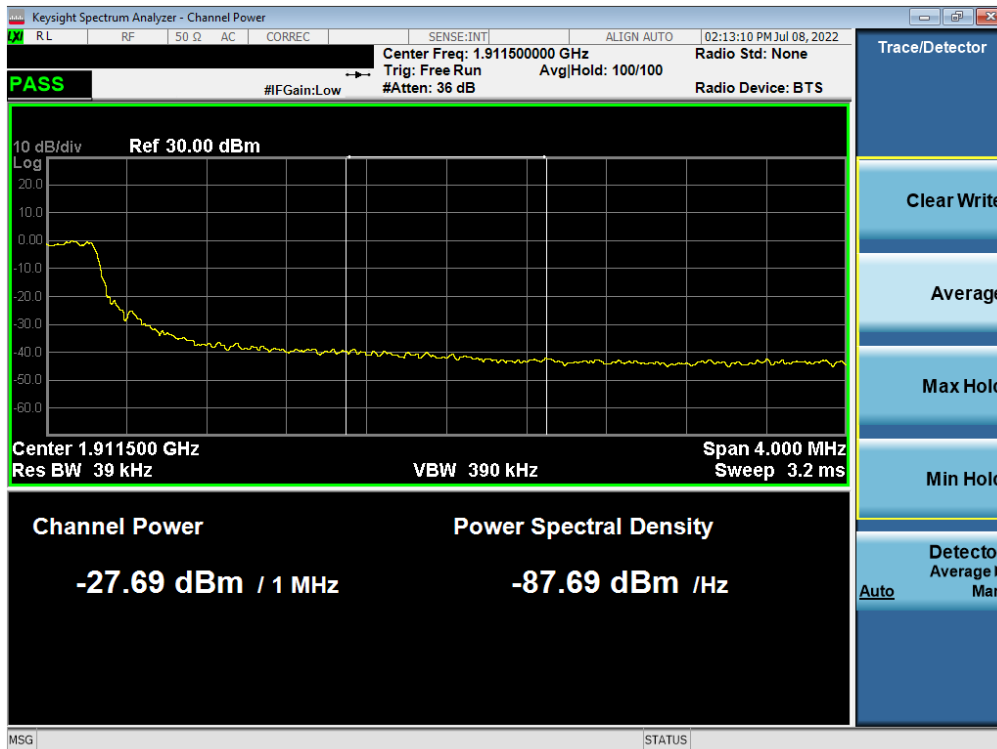


Plot 7-70. Extended Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 50 of 86




Plot 7-71. Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK – Full RB)

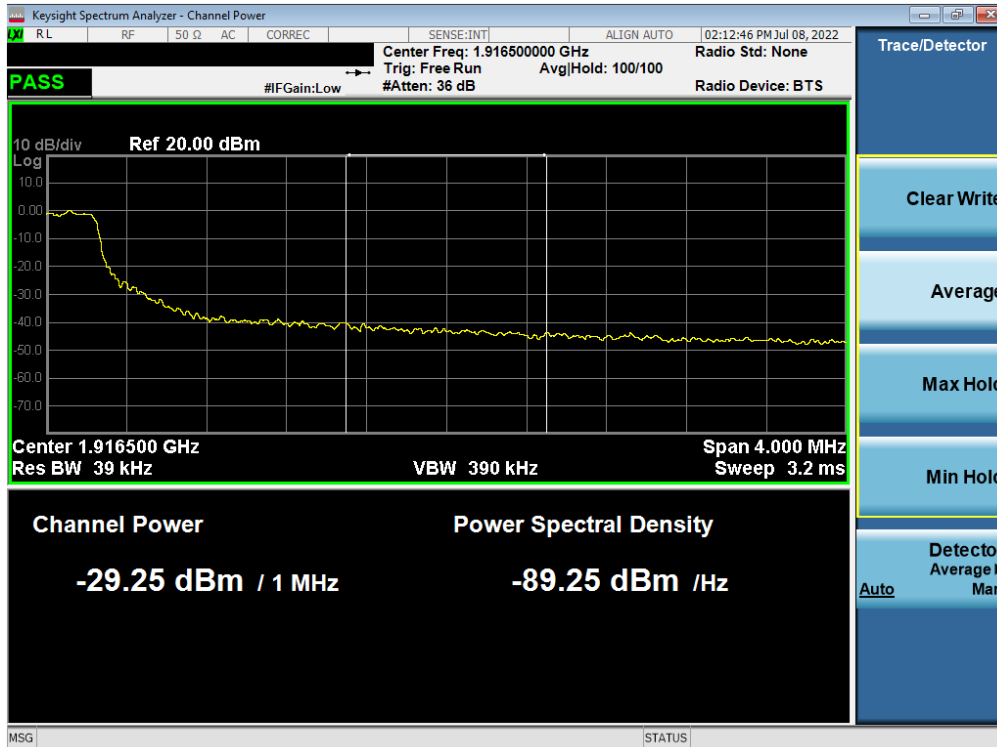


Plot 7-72. Extended Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 51 of 86

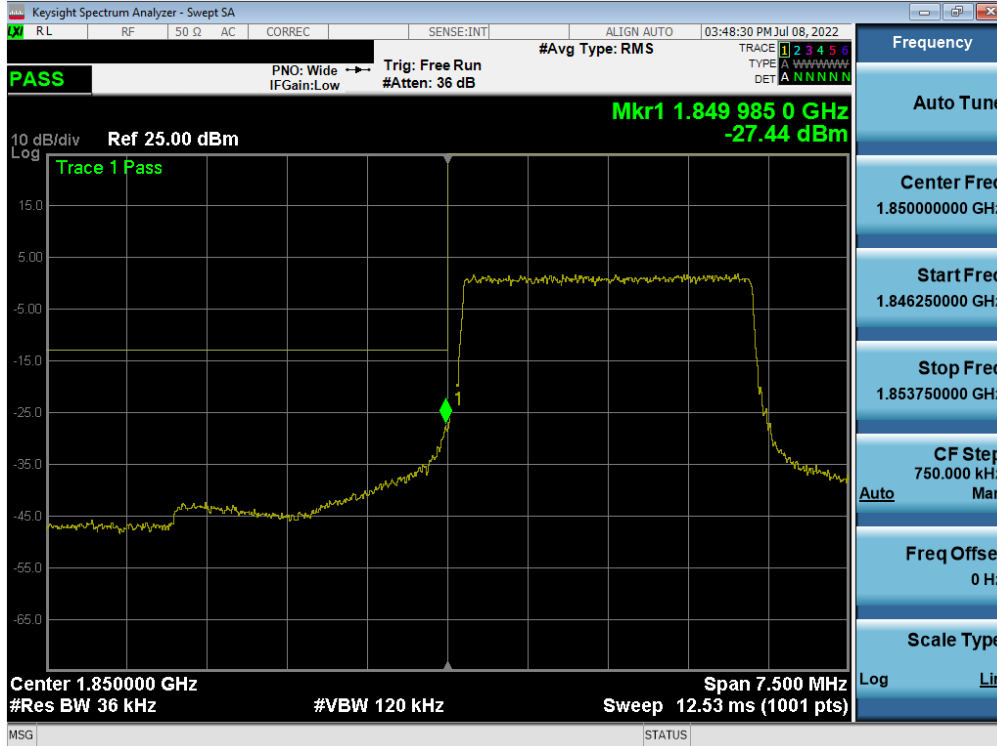

Plot 7-73. Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK – Full RB)

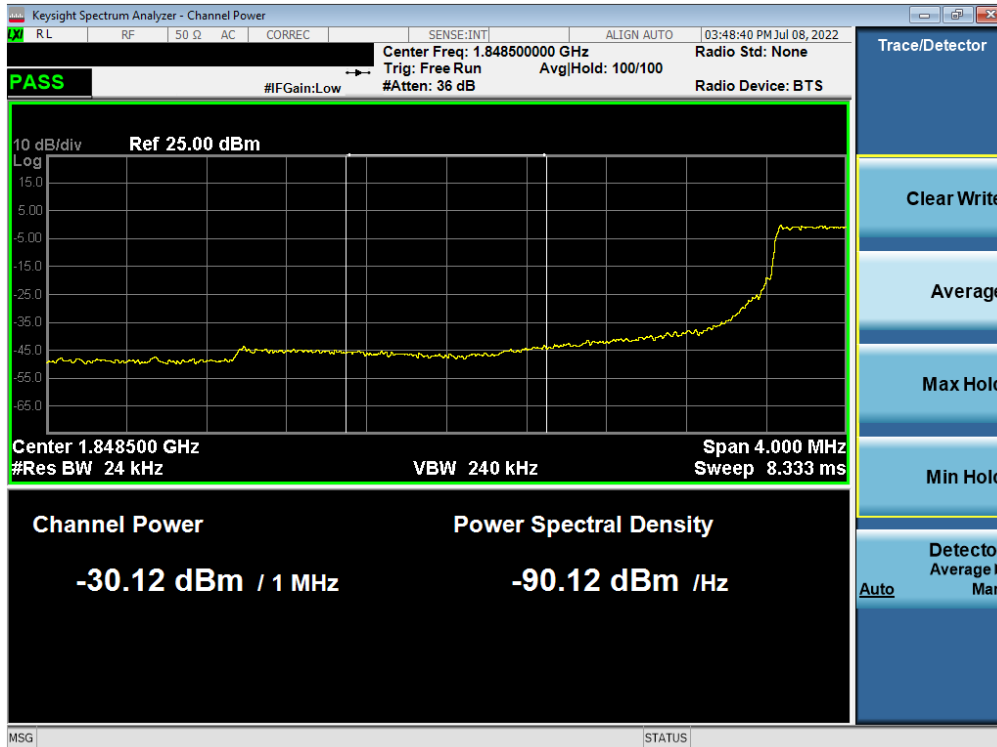


Plot 7-74. Extended Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 52 of 86




Plot 7-75. Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB)

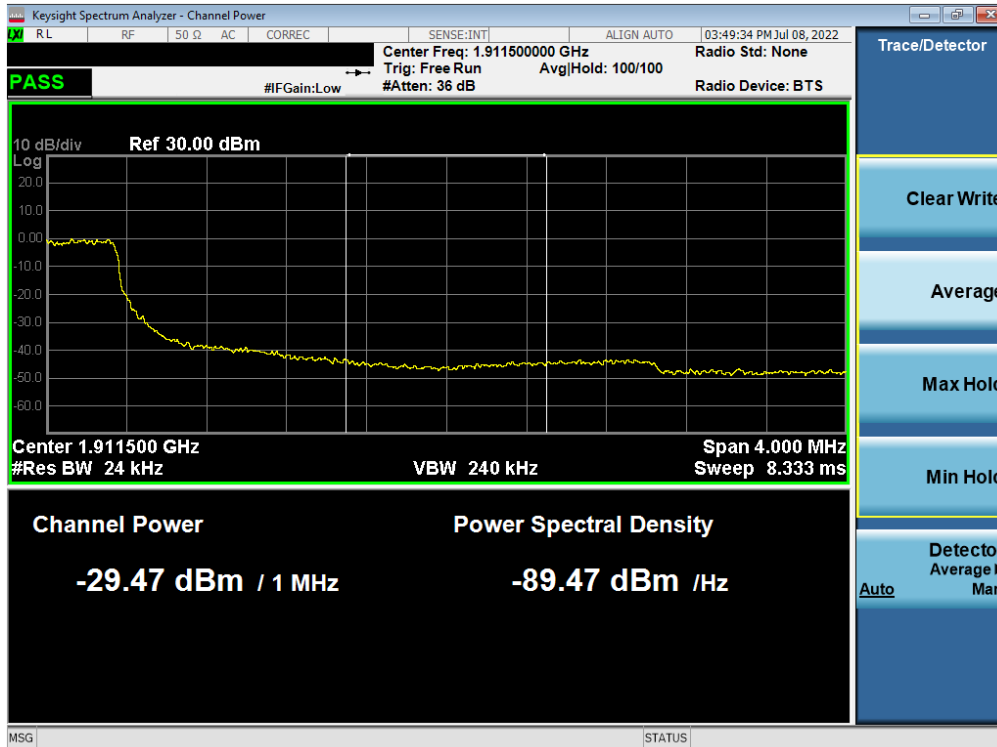


Plot 7-76. Extended Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 53 of 86

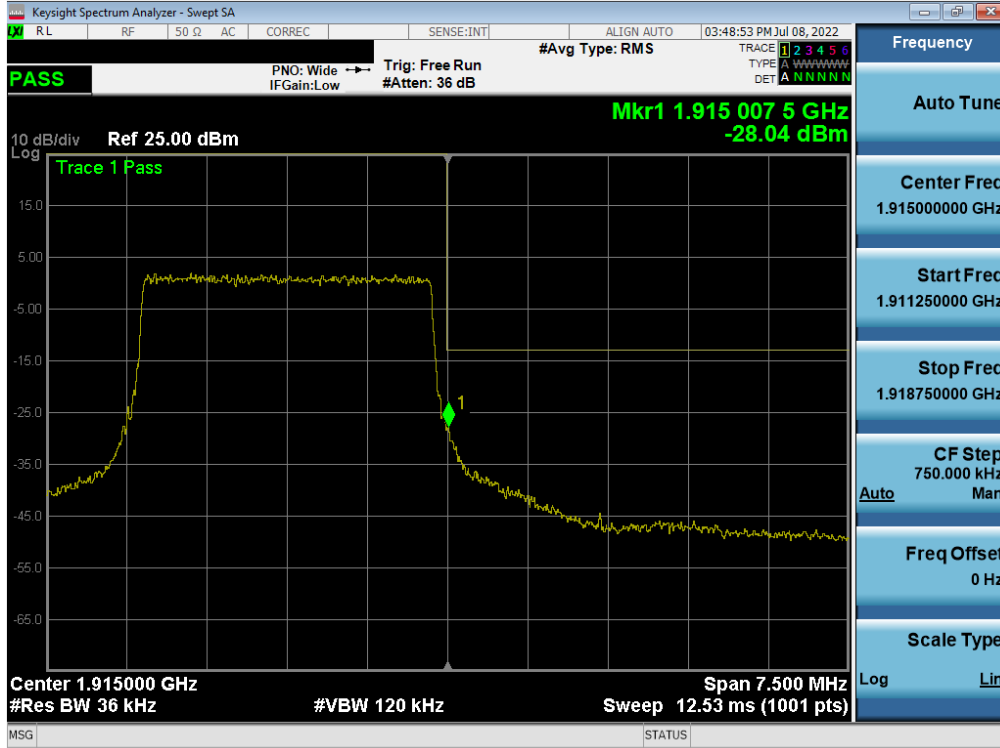

Plot 7-77. Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK – Full RB)

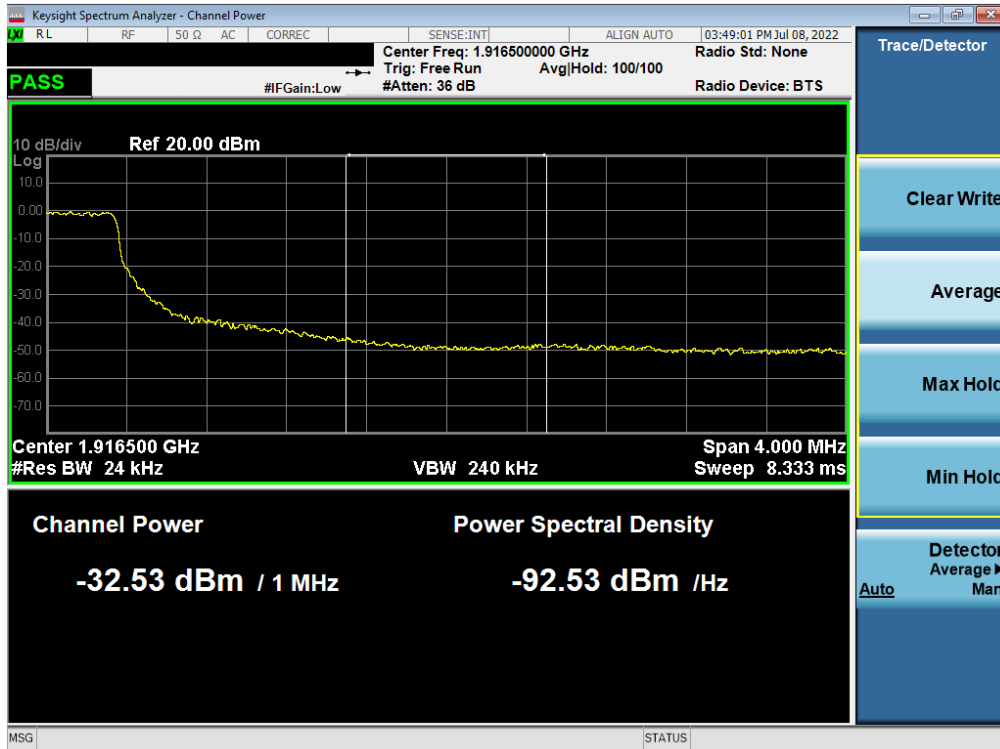


Plot 7-78. Extended Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 54 of 86




Plot 7-79. Lower Band Edge Plot (LTE Band 25/2 – 1.4MHz QPSK – Full RB)

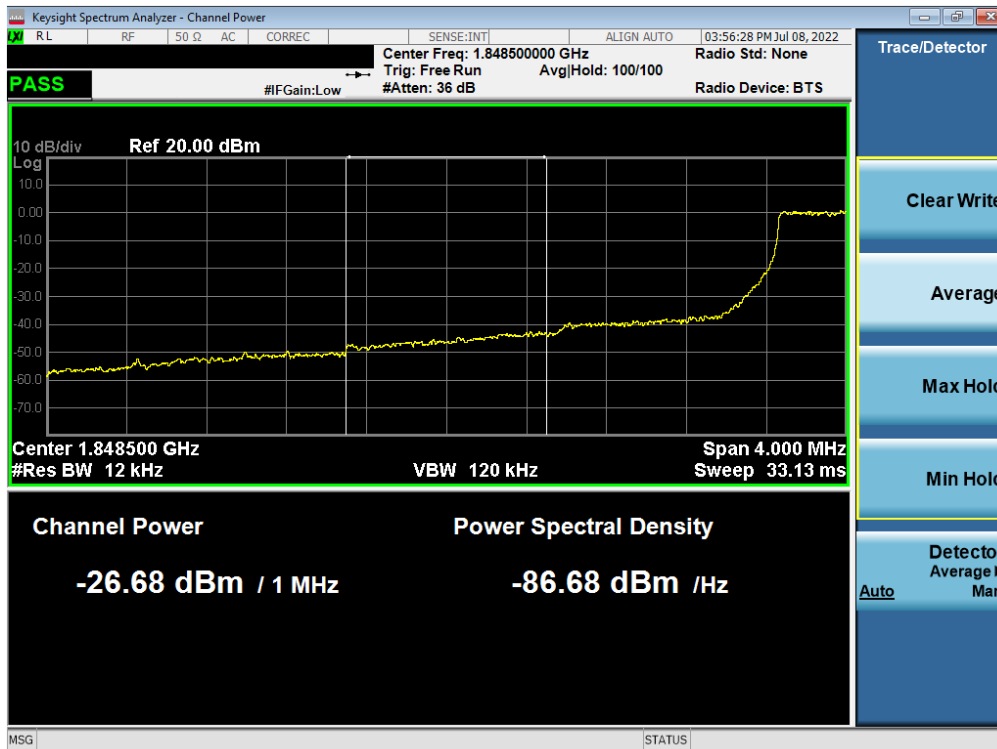


Plot 7-80. Extended Lower Band Edge Plot (LTE Band 25/2 – 1.4MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 55 of 86

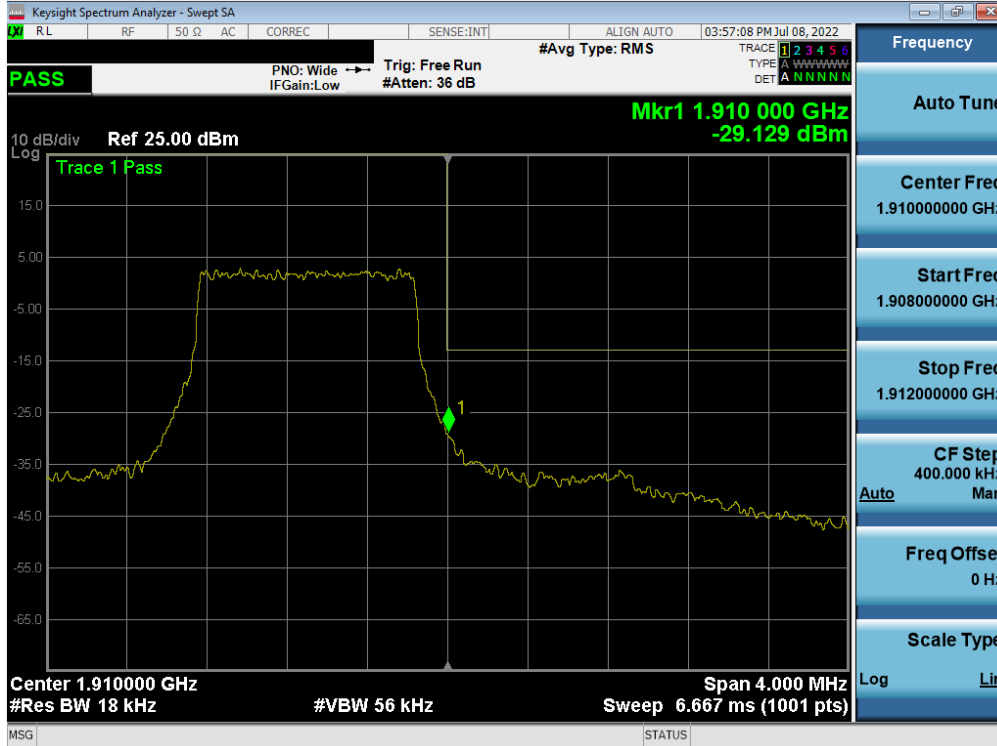

Plot 7-81. Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB)

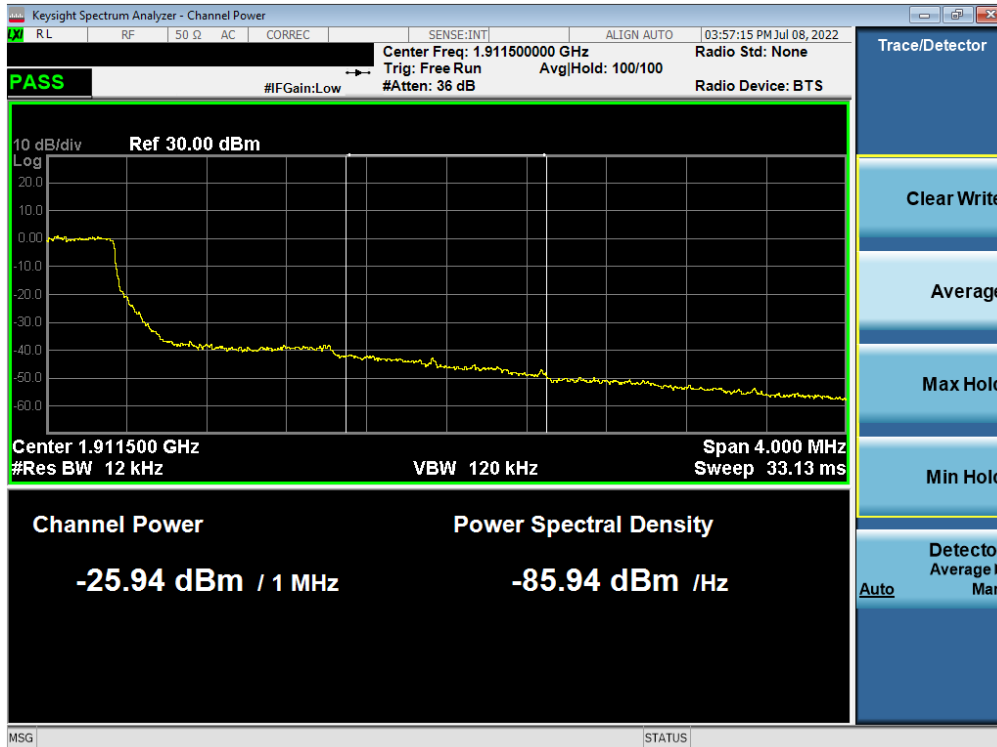


Plot 7-82. Extended Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 56 of 86




Plot 7-83. Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB)

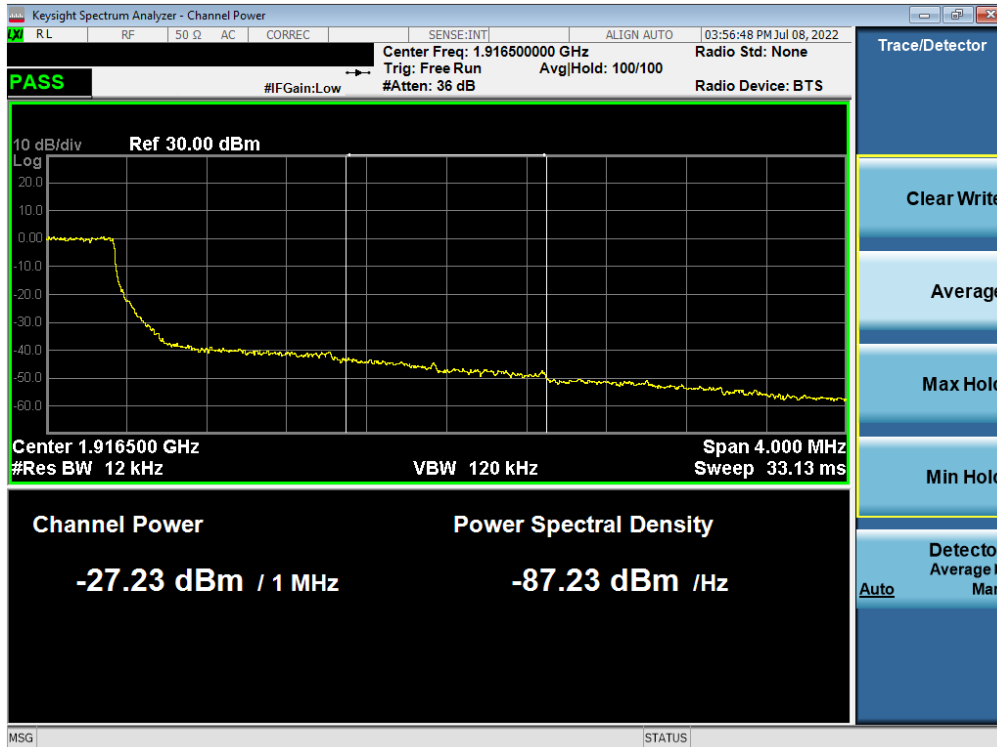


Plot 7-84. Extended Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 57 of 86

GSM/GPRS PCS

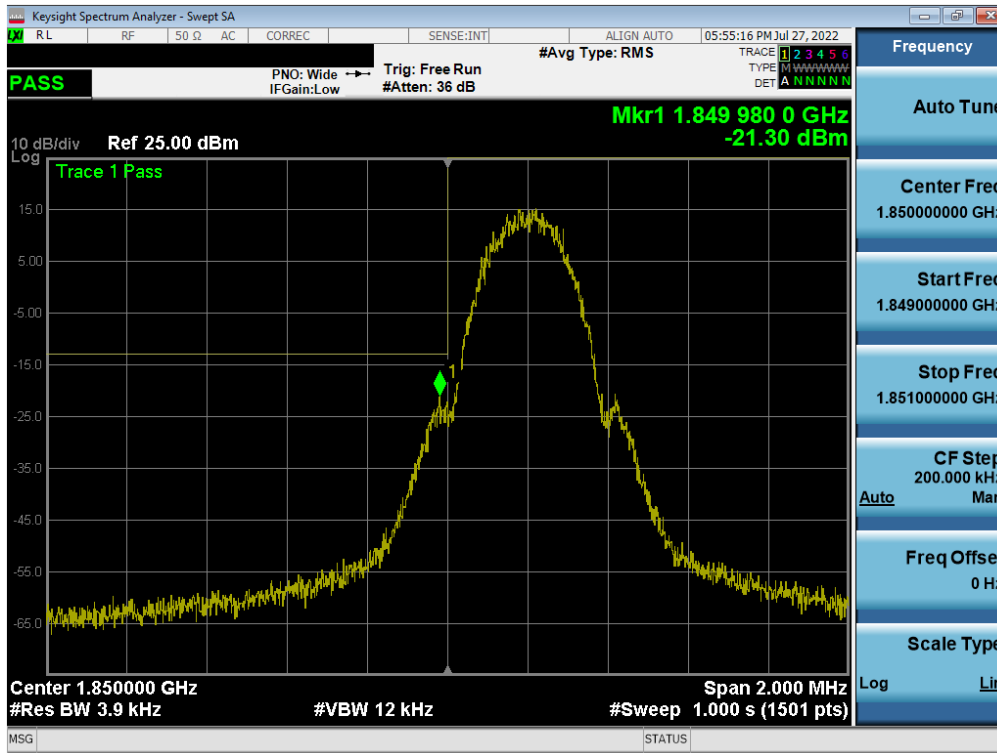


Plot 7-85. Lower Band Edge Plot (GPRS PCS – Ch. 512)

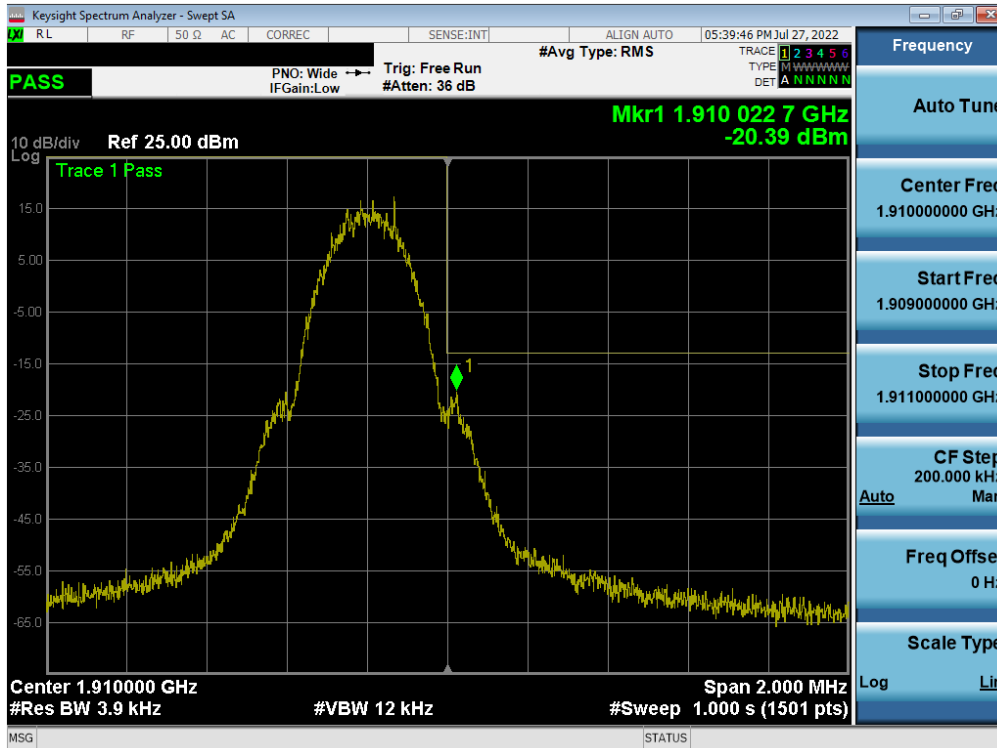


Plot 7-86. Upper Band Edge Plot (GPRS PCS – Ch. 810)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 58 of 86

WCDMA PCS

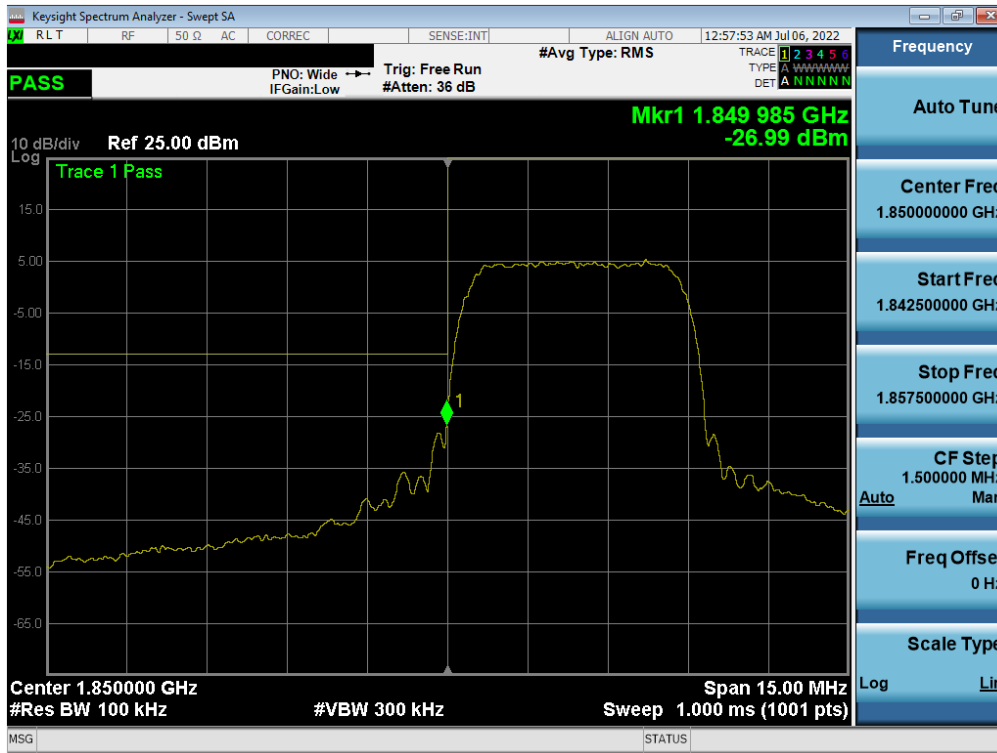

Plot 7-87. Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

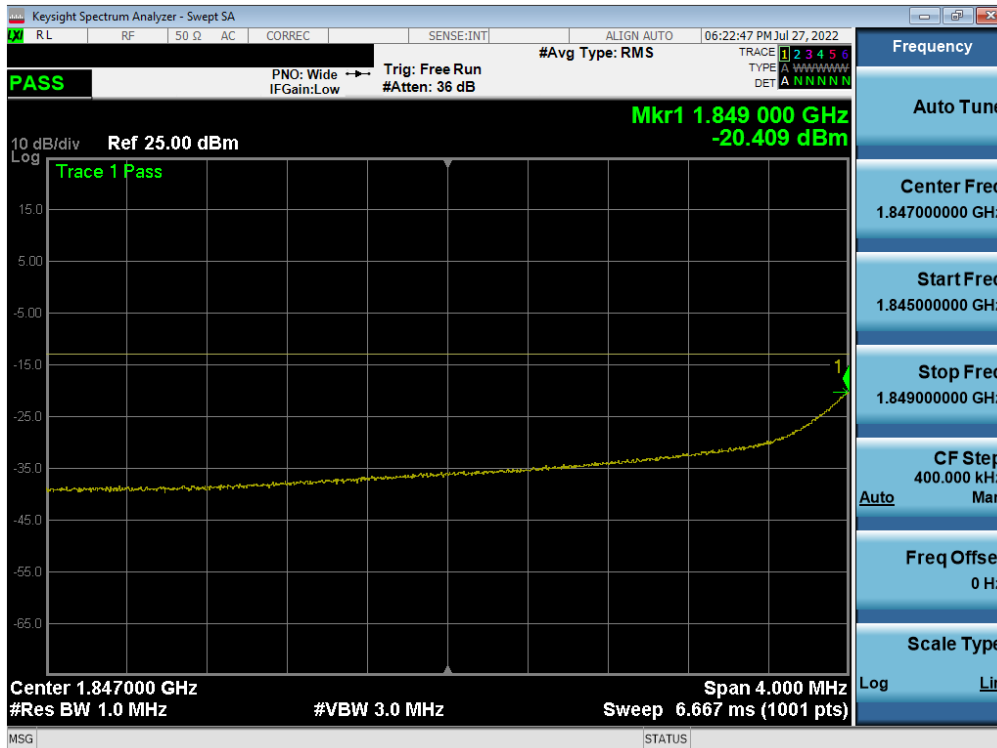


Plot 7-88. Extended Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 59 of 86



Plot 7-89. Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

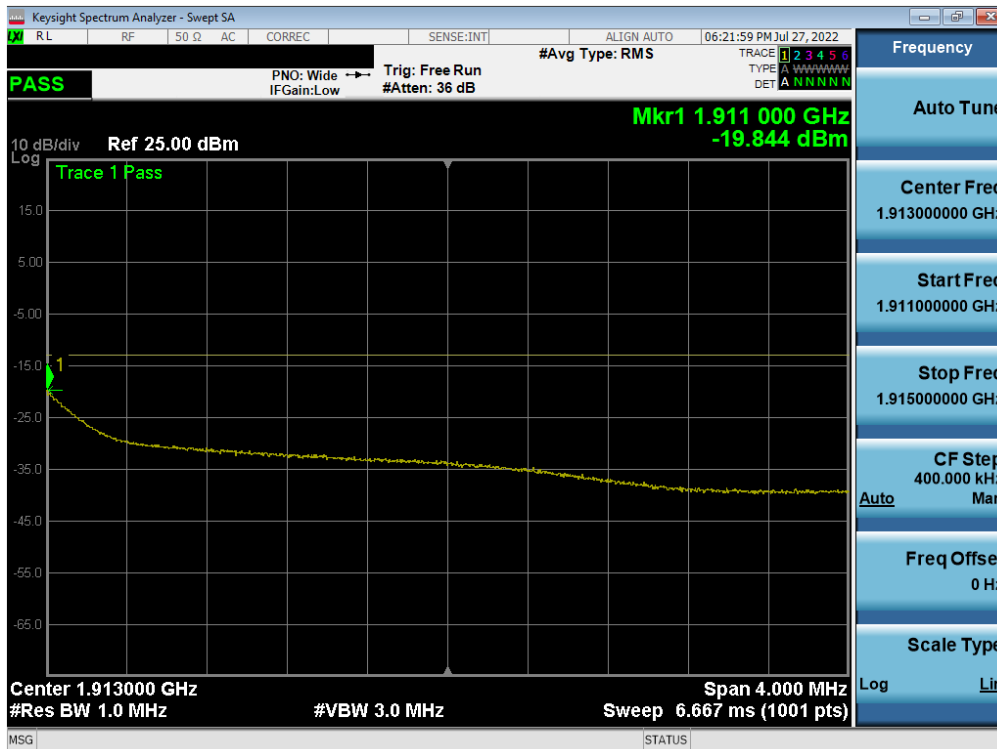

Plot 7-90. Extended Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 60 of 86

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2.3.4

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

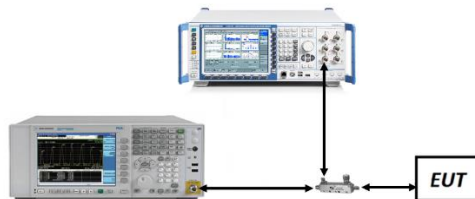



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 61 of 86

LTE Band 25/2

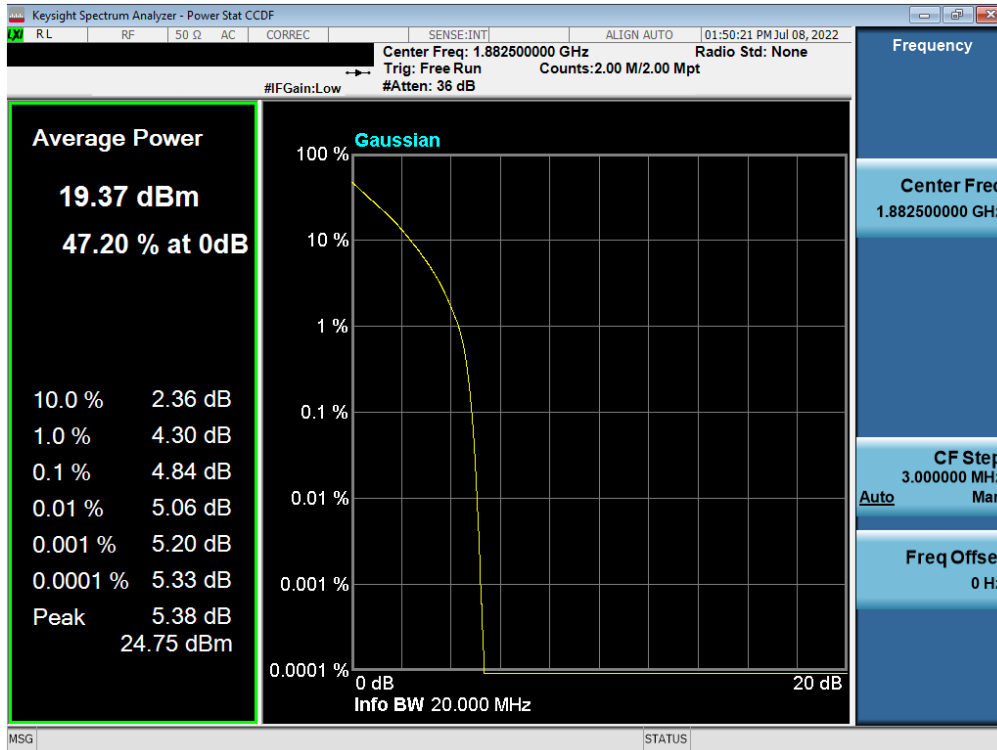


Plot 7-91. PAR Plot (LTE Band 25/2 - 20MHz QPSK - Full RB)

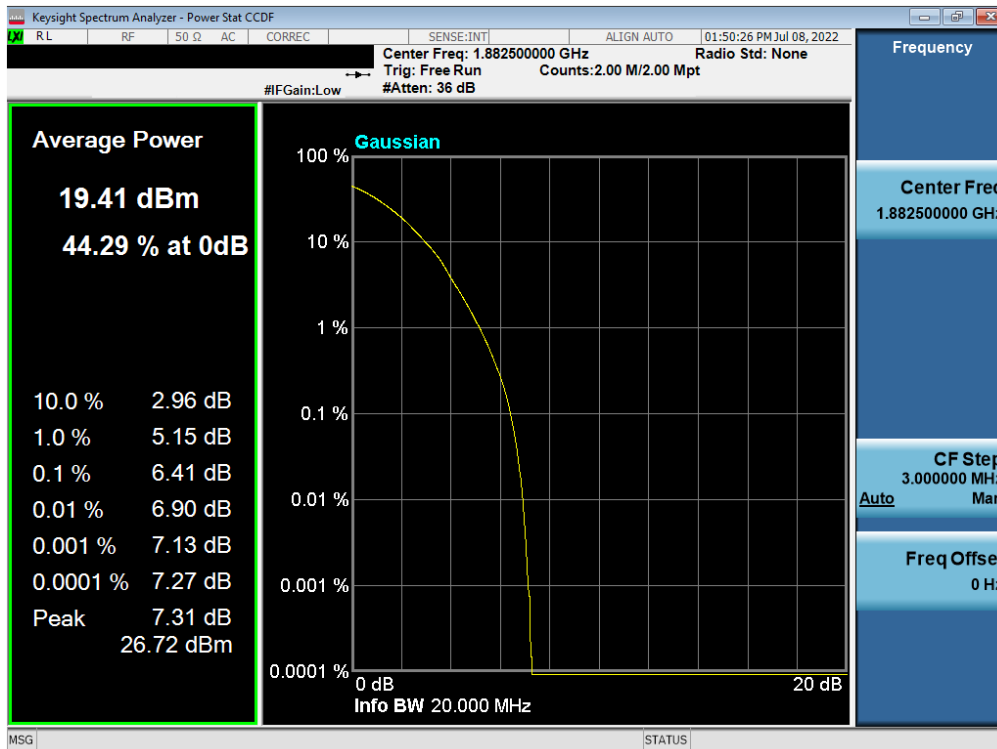


Plot 7-92. PAR Plot (LTE Band 25/2 - 20MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 62 of 86

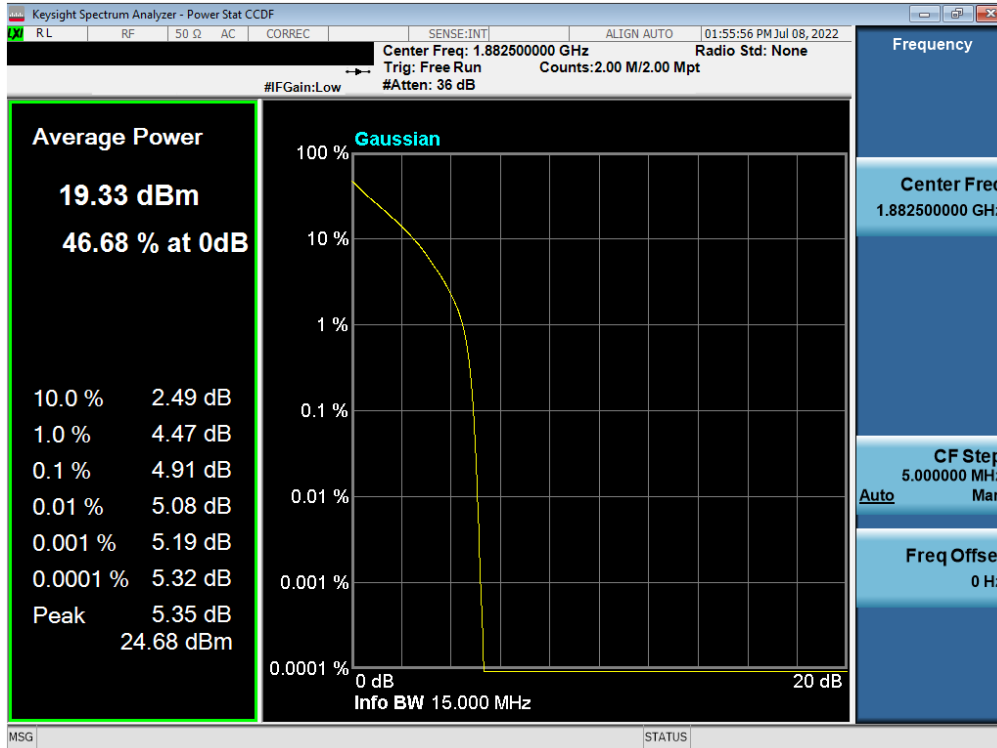


Plot 7-93. PAR Plot (LTE Band 25/2 - 15MHz QPSK - Full RB)

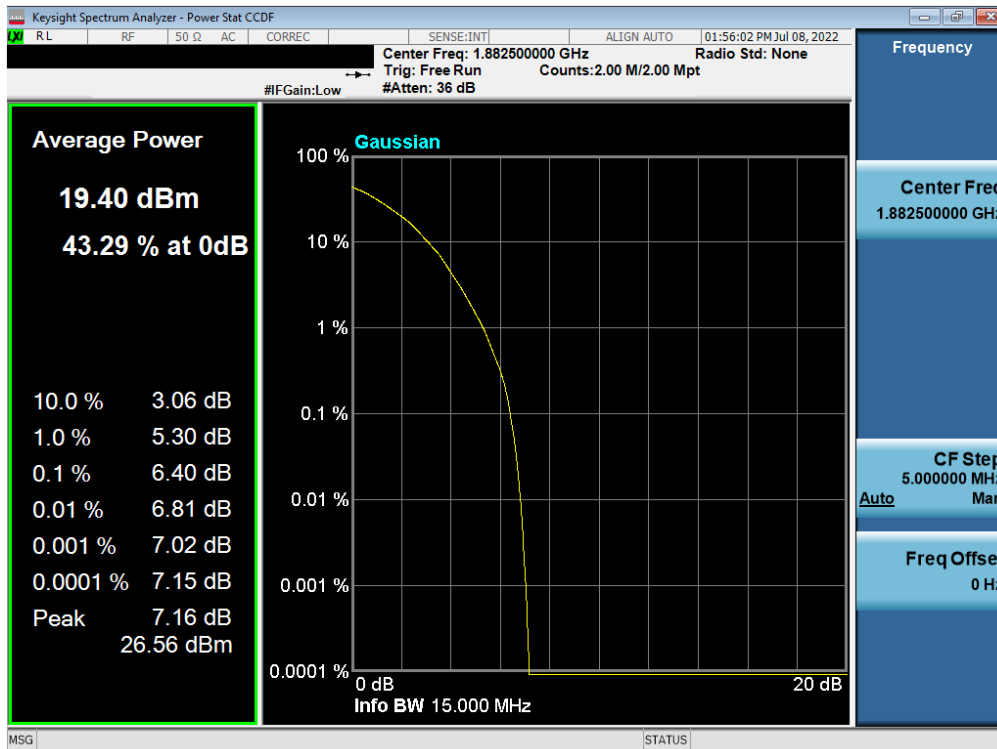


Plot 7-94. PAR Plot (LTE Band 25/2 - 15MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 63 of 86

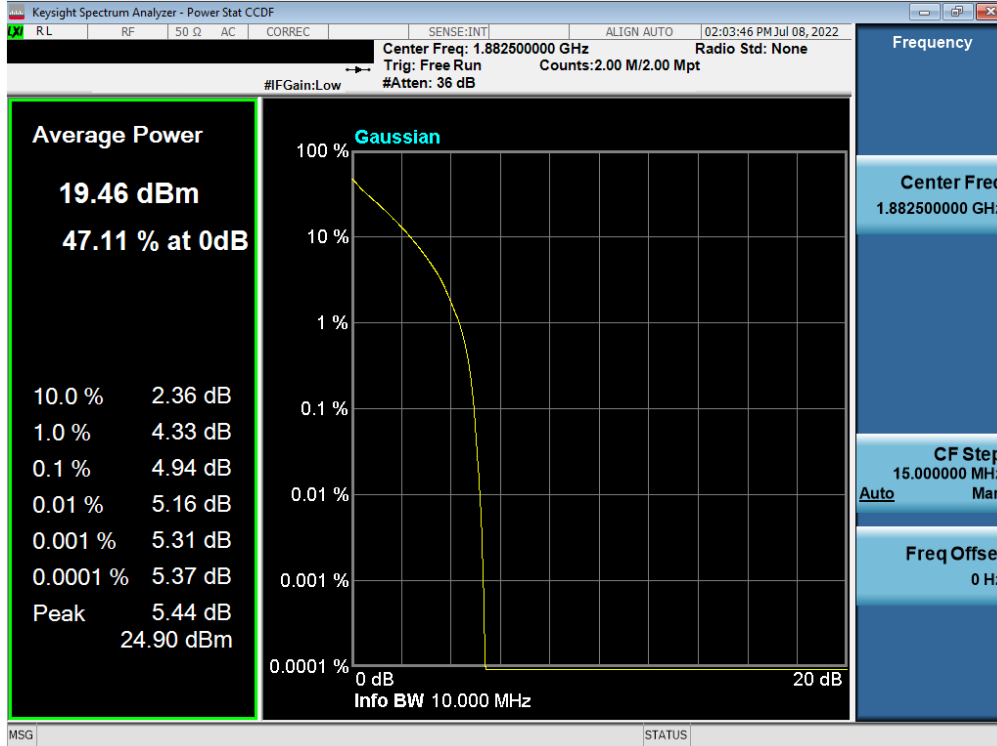


Plot 7-95. PAR Plot (LTE Band 25/2 - 10MHz QPSK - Full RB)

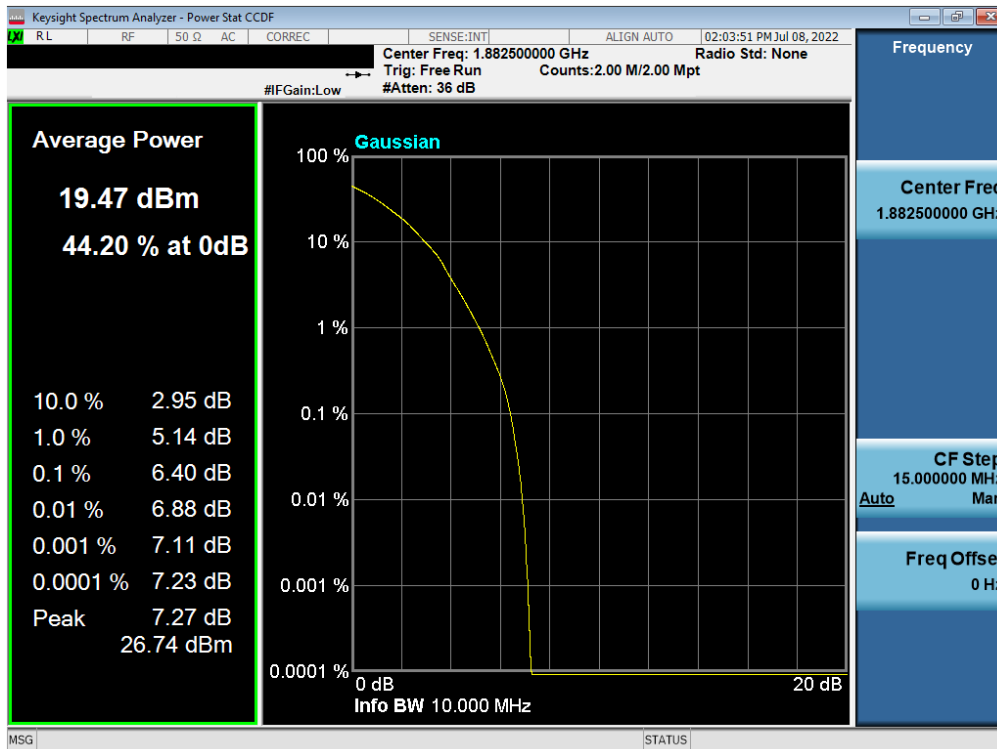


Plot 7-96. PAR Plot (LTE Band 25/2 - 10MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 64 of 86

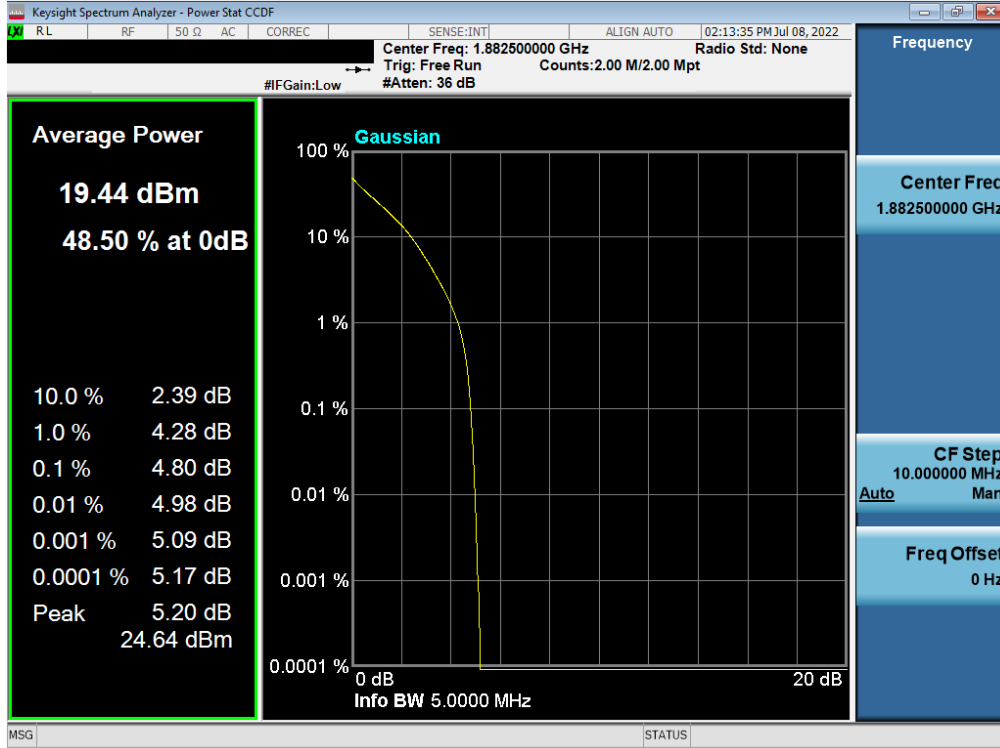


Plot 7-97. PAR Plot (LTE Band 25/2 - 5MHz QPSK - Full RB)

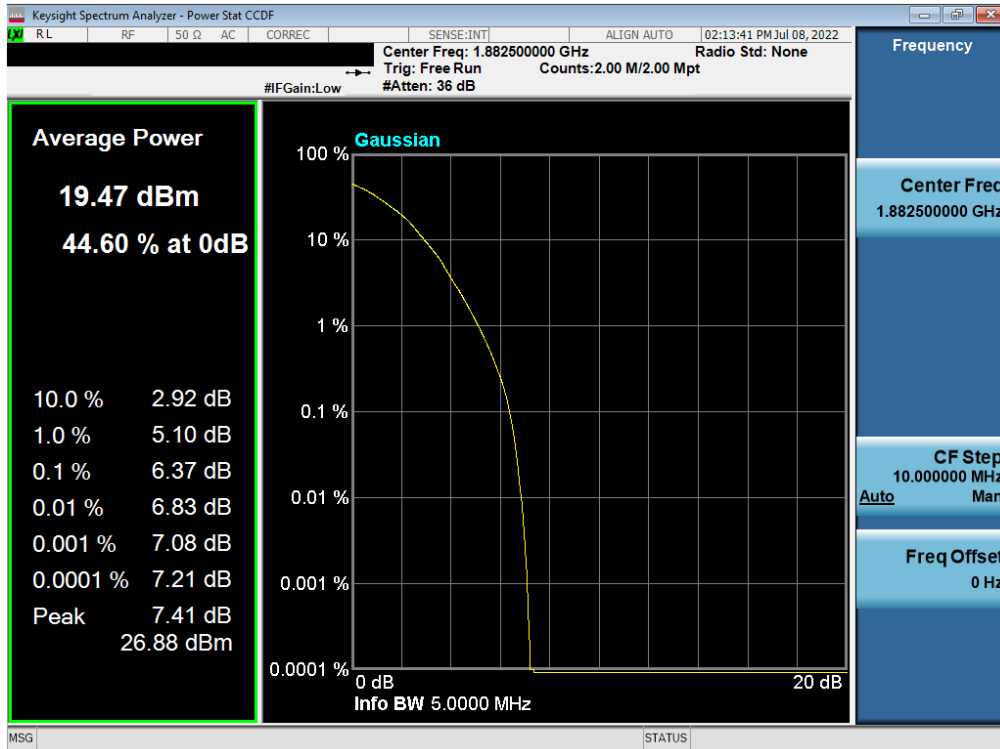


Plot 7-98. PAR Plot (LTE Band 25/2 - 5MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 65 of 86

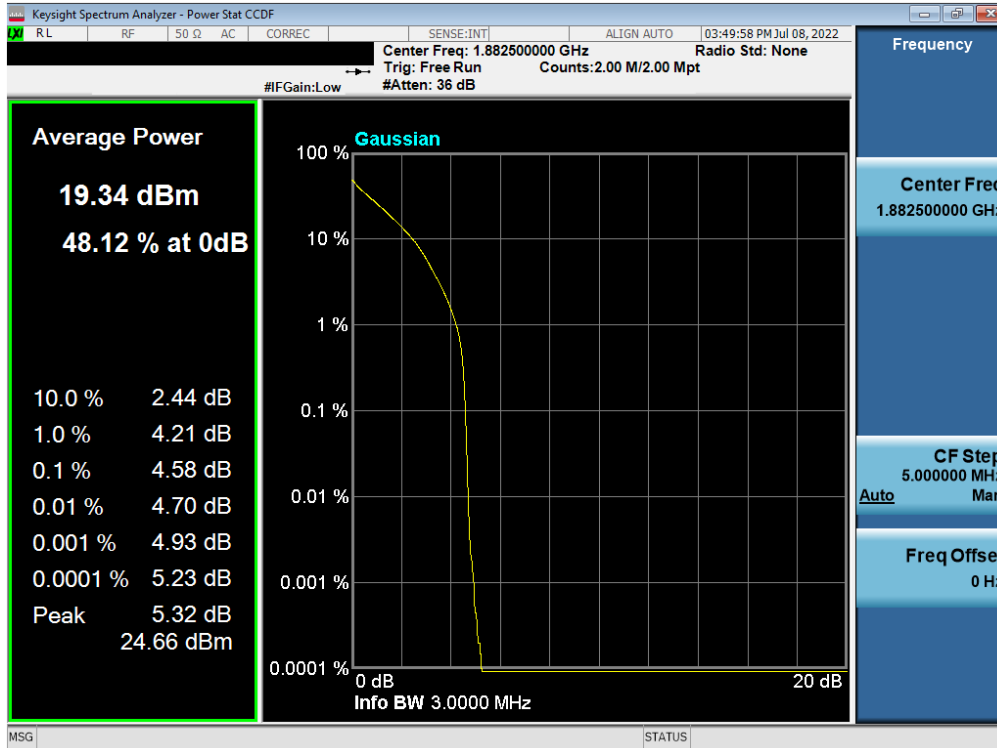


Plot 7-99. PAR Plot (LTE Band 25/2 - 3MHz QPSK - Full RB)

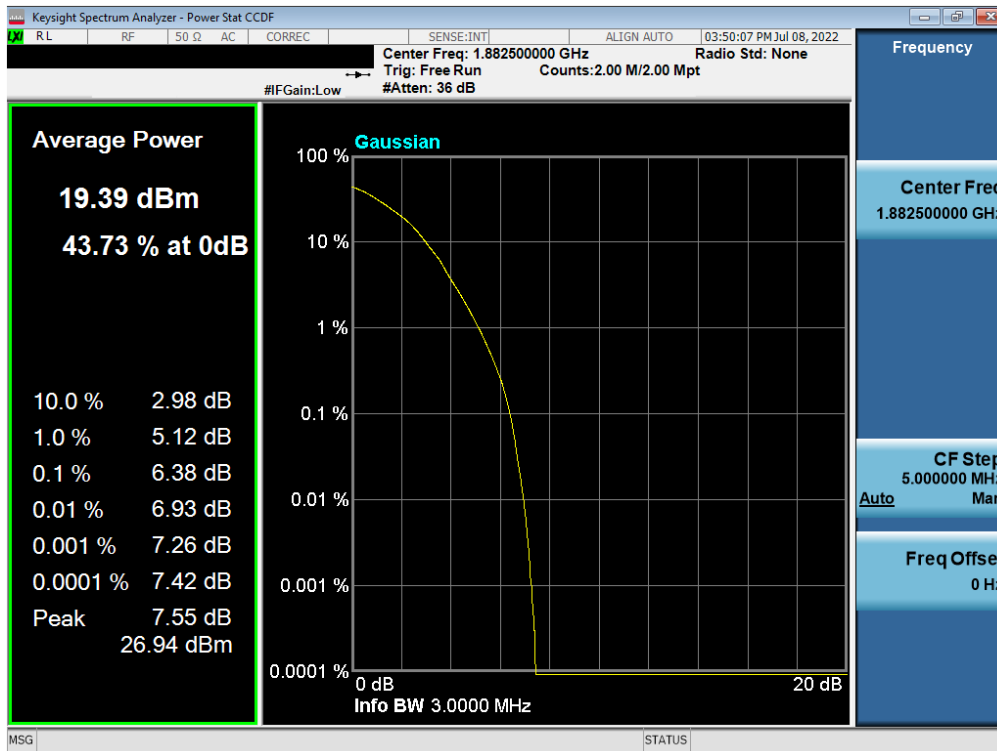


Plot 7-100. PAR Plot (LTE Band 25/2 - 3MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 66 of 86

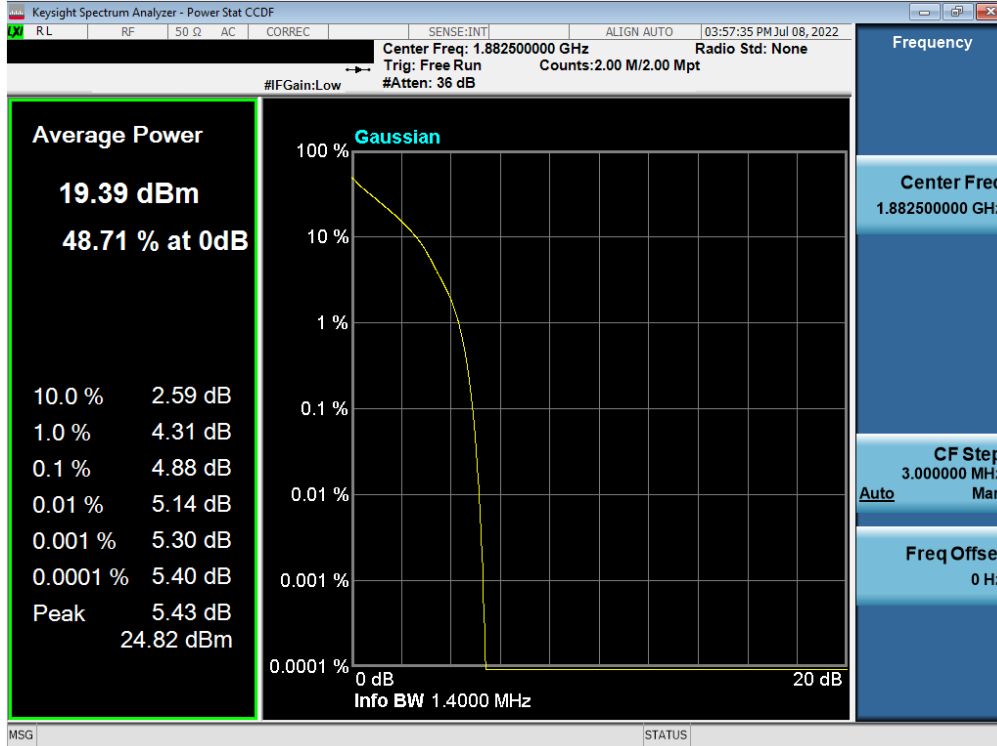


Plot 7-101. PAR Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB)

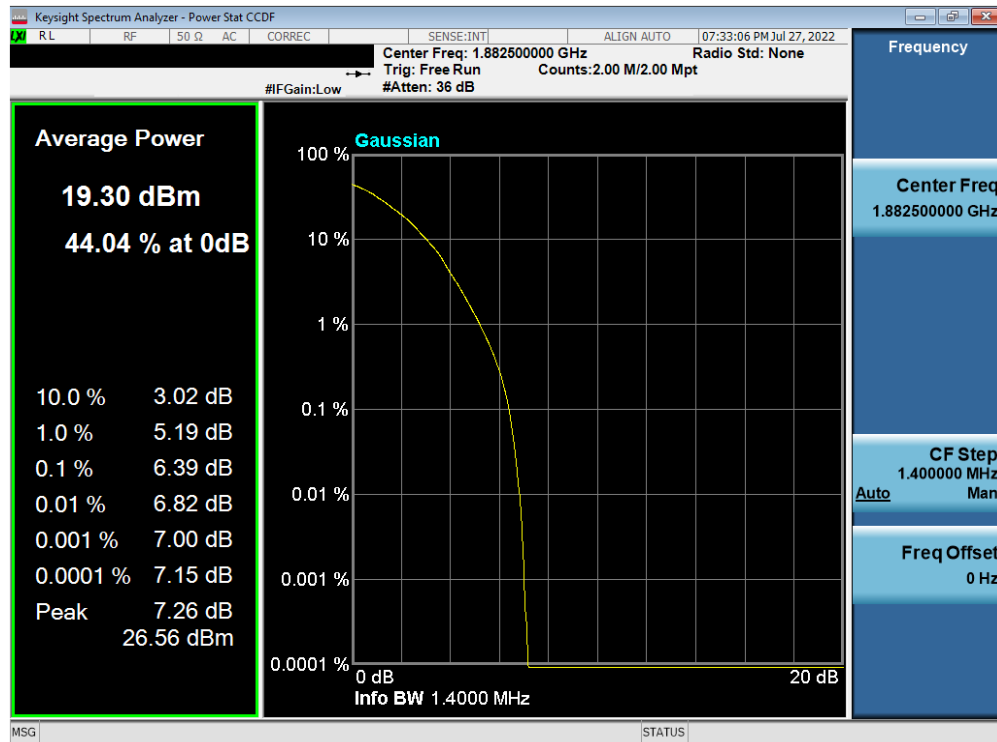


Plot 7-102. PAR Plot (LTE Band 25/2 - 1.4MHz 64-QAM - Full RB)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 67 of 86

GSM/GPRS PCS

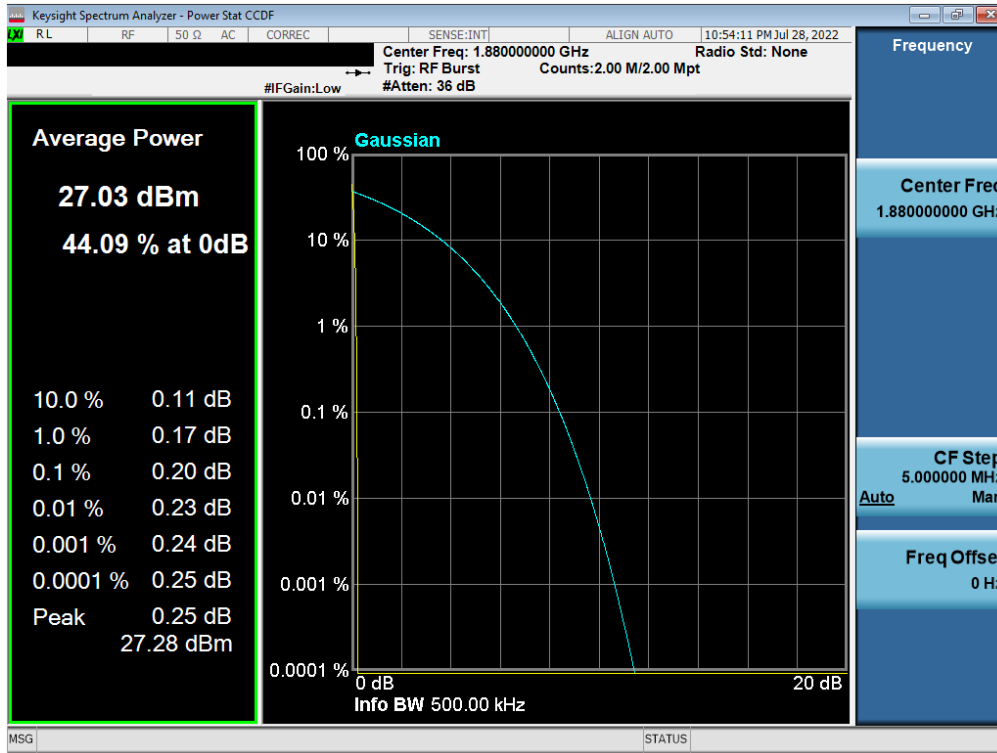


Plot 7-103. PAR Plot (GPRS, Ch. 661)

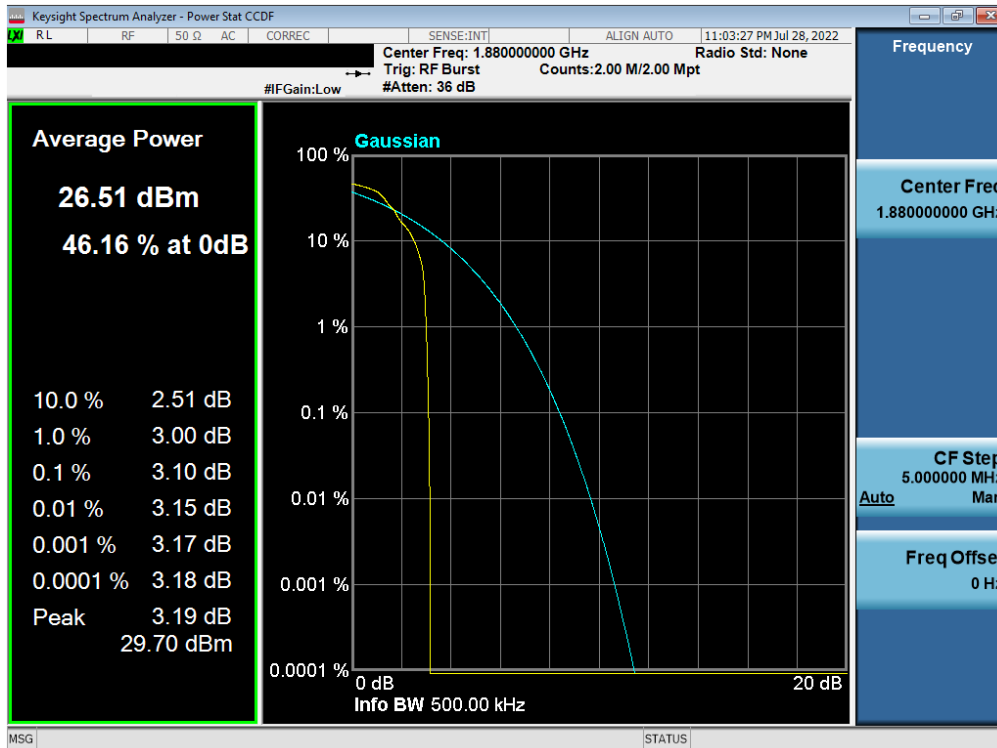

Plot 7-104. PAR Plot (EDGE, Ch. 661)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 68 of 86

WCDMA PCS

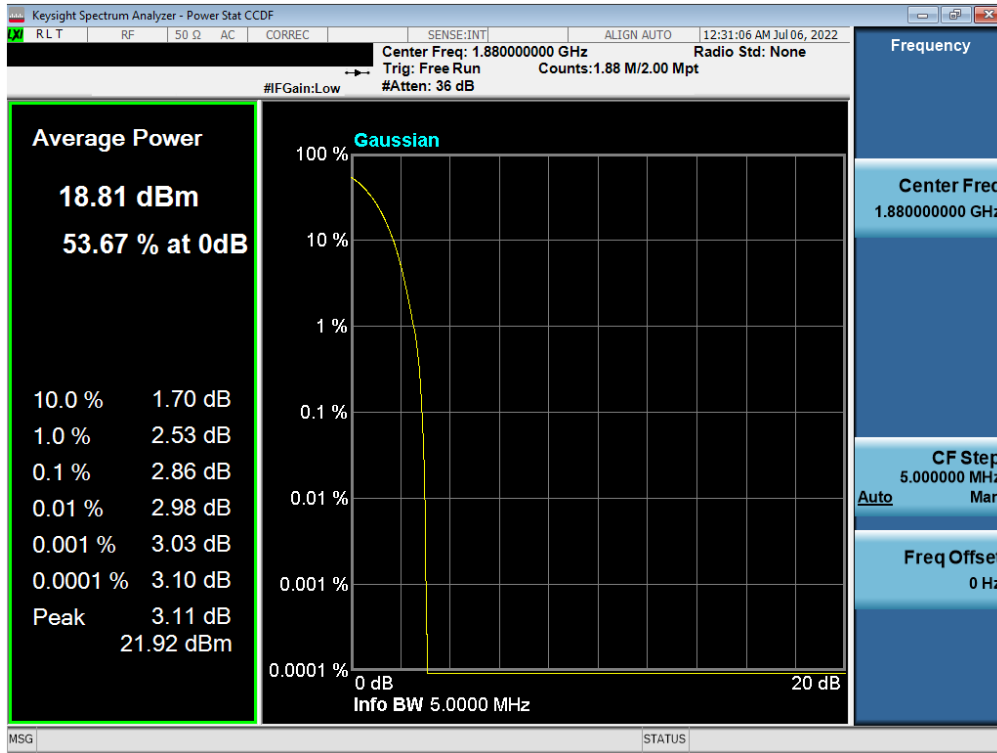

Plot 7-105. PAR Plot (WCDMA, Ch. 9400)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 69 of 86



7.6 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 70 of 86

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

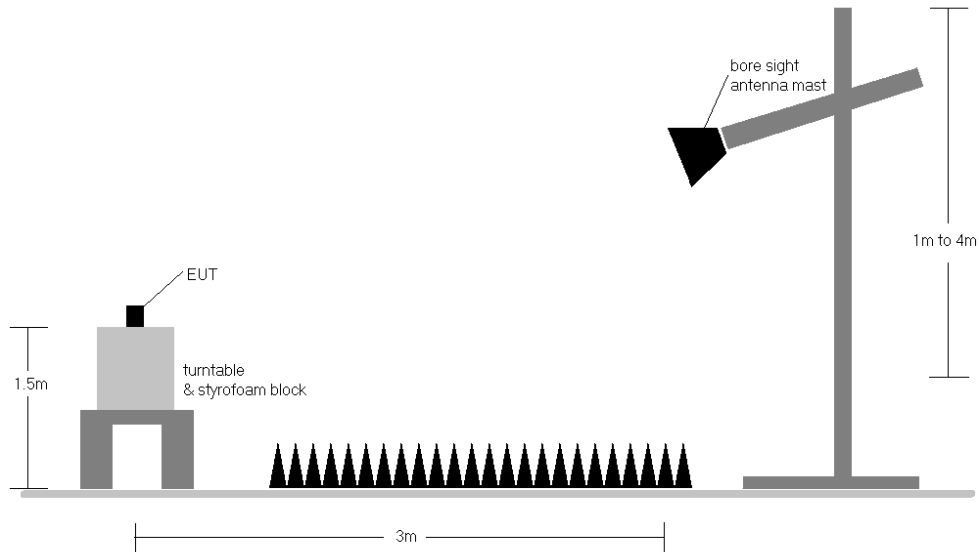


Figure 7-5. Radiated Test Setup >1GHz

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 71 of 86

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1860.0	V	119	334	9.68	1 / 0	7.46	17.14	0.052	33.01	-15.87
	QPSK	1882.5	V	110	336	9.99	1 / 0	7.98	17.97	0.063	33.01	-15.04
	QPSK	1905.0	V	108	345	10.18	1 / 50	6.51	16.69	0.047	33.01	-16.32
	16-QAM	1882.5	V	110	336	9.99	1 / 0	7.24	17.23	0.053	33.01	-15.78
	64-QAM	1882.5	V	110	336	9.99	1 / 0	6.01	16.00	0.040	33.01	-17.01
15 MHz	QPSK	1857.5	V	119	334	9.66	1 / 74	7.47	17.13	0.052	33.01	-15.88
	QPSK	1882.5	V	110	336	9.99	1 / 37	8.11	18.09	0.064	33.01	-14.92
	QPSK	1907.5	V	108	345	10.19	1 / 37	6.50	16.69	0.047	33.01	-16.32
	16-QAM	1882.5	V	110	336	9.99	1 / 37	7.25	17.24	0.053	33.01	-15.77
	64-QAM	1882.5	V	110	336	9.99	1 / 37	6.06	16.05	0.040	33.01	-16.96
10 MHz	QPSK	1855.0	V	119	334	9.64	1 / 0	7.51	17.15	0.052	33.01	-15.86
	QPSK	1882.5	V	110	336	9.99	1 / 0	8.16	18.15	0.065	33.01	-14.86
	QPSK	1910.0	V	108	345	10.20	1 / 0	6.59	16.79	0.048	33.01	-16.22
	16-QAM	1882.5	V	110	336	9.99	1 / 49	7.15	17.14	0.052	33.01	-15.87
5 MHz	64-QAM	1882.5	V	110	336	9.99	1 / 49	6.10	16.09	0.041	33.01	-16.92
	QPSK	1852.5	V	119	334	9.63	1 / 0	7.64	17.26	0.053	33.01	-15.75
	QPSK	1882.5	V	110	336	9.99	1 / 0	8.06	18.05	0.064	33.01	-14.96
	QPSK	1912.5	V	108	345	10.21	1 / 0	6.54	16.75	0.047	33.01	-16.26
	16-QAM	1882.5	V	110	336	9.99	1 / 12	7.46	17.44	0.056	33.01	-15.57
3 MHz	64-QAM	1882.5	V	110	336	9.99	1 / 24	6.03	16.01	0.040	33.01	-17.00
	QPSK	1851.5	V	119	334	9.62	1 / 0	7.49	17.10	0.051	33.01	-15.91
	QPSK	1882.5	V	110	336	9.99	1 / 7	8.05	18.03	0.064	33.01	-14.98
	QPSK	1913.5	V	108	345	10.21	1 / 7	6.55	16.76	0.047	33.01	-16.25
1.4 MHz	16-QAM	1882.5	V	110	336	9.99	1 / 7	7.25	17.24	0.053	33.01	-15.77
	64-QAM	1882.5	V	110	336	9.99	1 / 7	6.19	16.17	0.041	33.01	-16.84
	QPSK	1850.7	V	119	334	9.61	1 / 0	7.52	17.14	0.052	33.01	-15.87
	QPSK	1882.5	V	110	336	9.99	1 / 3	8.11	18.09	0.064	33.01	-14.92
	QPSK	1914.3	V	108	345	10.21	1 / 0	6.48	16.69	0.047	33.01	-16.32
20 MHz	16-QAM	1882.5	V	110	336	9.99	1 / 5	7.15	17.14	0.052	33.01	-15.87
	64-QAM	1882.5	V	110	336	9.99	1 / 5	6.13	16.12	0.041	33.01	-16.89
	Opposite Pol.	1882.5	H	150	185	9.83	1 / 0	7.03	16.86	0.049	33.01	-16.15
	WCP	1882.5	H	139	145	9.83	1 / 0	7.34	17.17	0.052	33.01	-15.84

Table 7-2. EIRP Data (LTE Band 25/2)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	205	149	15.52	9.41	24.93	0.311	33.01	-8.08
1880.00	GPRS1900	H	195	145	14.05	9.79	23.84	0.242	33.01	-9.17
1909.80	GPRS1900	H	220	140	12.06	10.25	22.31	0.170	33.01	-10.70
1850.20	GPRS1900	V	156	204	12.58	9.41	21.99	0.158	33.01	-11.02
1850.20	EDGE1900	H	205	149	14.08	9.41	23.49	0.223	33.01	-9.52
1850.20	GPRS1900 (WCP)	H	235	137	12.49	9.41	21.90	0.155	33.01	-11.11

Table 7-3. EIRP Data (GPRS PCS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	149	147	7.03	9.44	16.47	0.044	33.01	-16.54
1880.00	WCDMA1900	H	158	133	7.48	9.79	17.27	0.053	33.01	-15.74
1907.60	WCDMA1900	H	149	142	7.20	10.21	17.41	0.055	33.01	-15.60
1907.60	WCDMA1900	V	182	79	5.82	10.19	16.01	0.040	33.01	-17.00
1907.60	WCDMA1900 (WCP)	H	142	135	5.79	10.21	16.00	0.040	33.01	-17.01

Table 7-4. EIRP Data (WCDMA PCS)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 72 of 86



7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 73 of 86

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

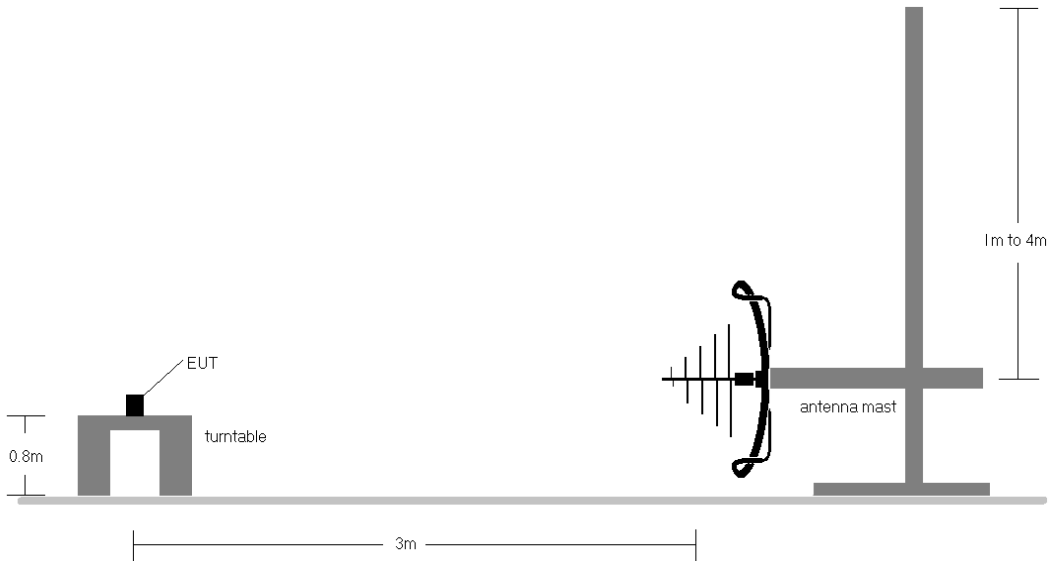


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

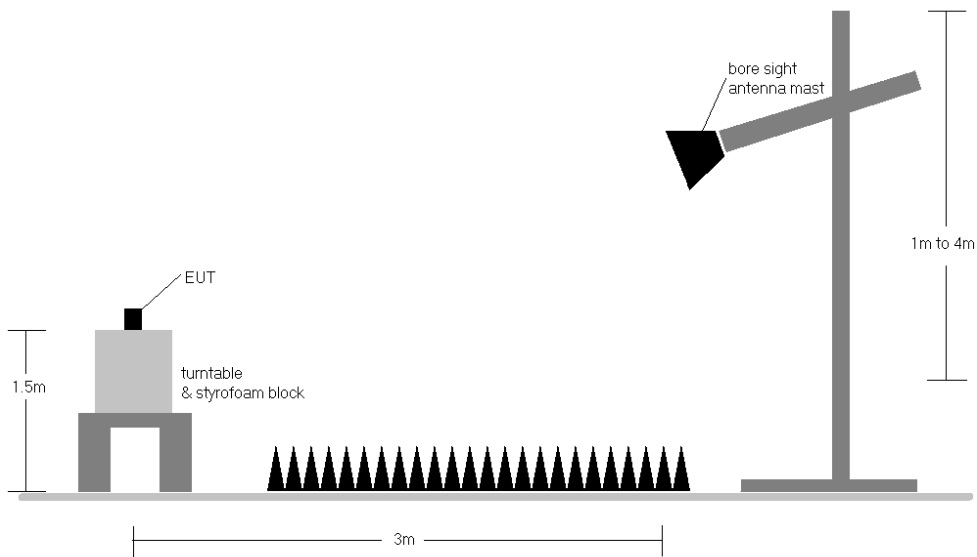


Figure 7-7. Test Instrument & Measurement Setup >1 GHz


FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 74 of 86

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 75 of 86

LTE Band 25/2

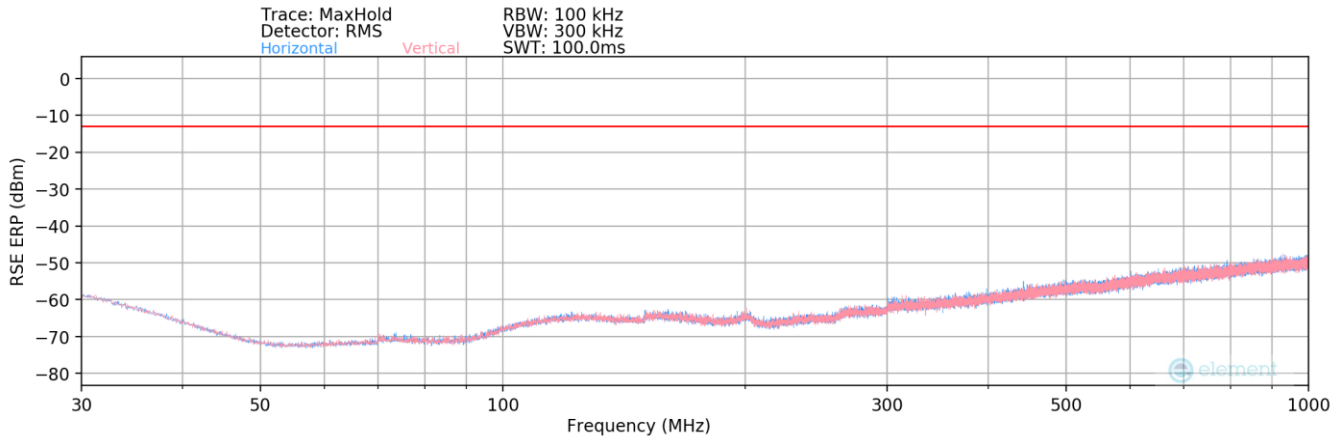

Plot 7-106. Radiated Spurious Plot Below 1GHz (LTE Band 25/2)

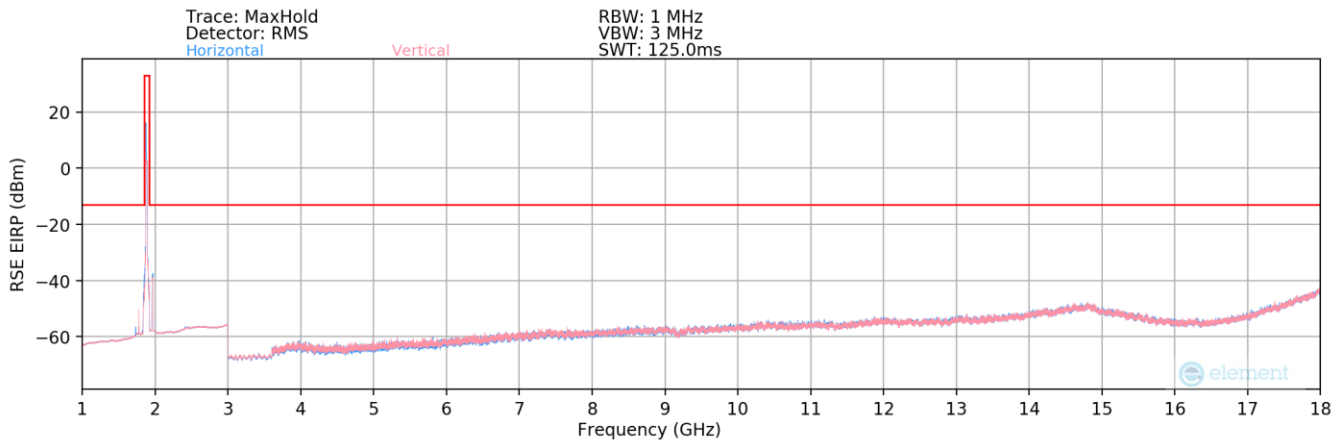

Plot 7-107. Radiated Spurious Plot (LTE Band 25/2)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1/50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
483.00	V	-	-	-90.25	25.73	42.48	-54.92	-13.00	-41.92

Table 7-5. Radiated Spurious Data Below 1GHz (LTE Band 25/2 – Mid Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 76 of 86



Bandwidth (MHz):	20
Frequency (MHz):	1860
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.00	V	-	-	-79.01	3.36	31.35	-63.90	-13.00	-50.90
5580.00	V	-	-	-78.84	5.17	33.33	-61.93	-13.00	-48.93
7440.00	V	-	-	-79.81	7.24	34.43	-60.83	-13.00	-47.83

Table 7-6. Radiated Spurious Data (LTE Band 25/2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.00	V	-	-	-78.87	2.98	31.11	-64.15	-13.00	-51.15
5647.50	V	-	-	-79.15	5.53	33.38	-61.88	-13.00	-48.88
7530.00	V	-	-	-80.20	7.36	34.16	-61.10	-13.00	-48.10

Table 7-7. Radiated Spurious Data (LTE Band 25/2 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1905
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	V	-	-	-78.49	2.96	31.47	-63.79	-13.00	-50.79
5715.00	V	-	-	-79.45	5.30	32.85	-62.40	-13.00	-49.40
7620.00	V	-	-	-79.46	7.80	35.34	-59.91	-13.00	-46.91

Table 7-8. Radiated Spurious Data (LTE Band 25/2 – High Channel)


FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 77 of 86



GSM/GPRS PCS

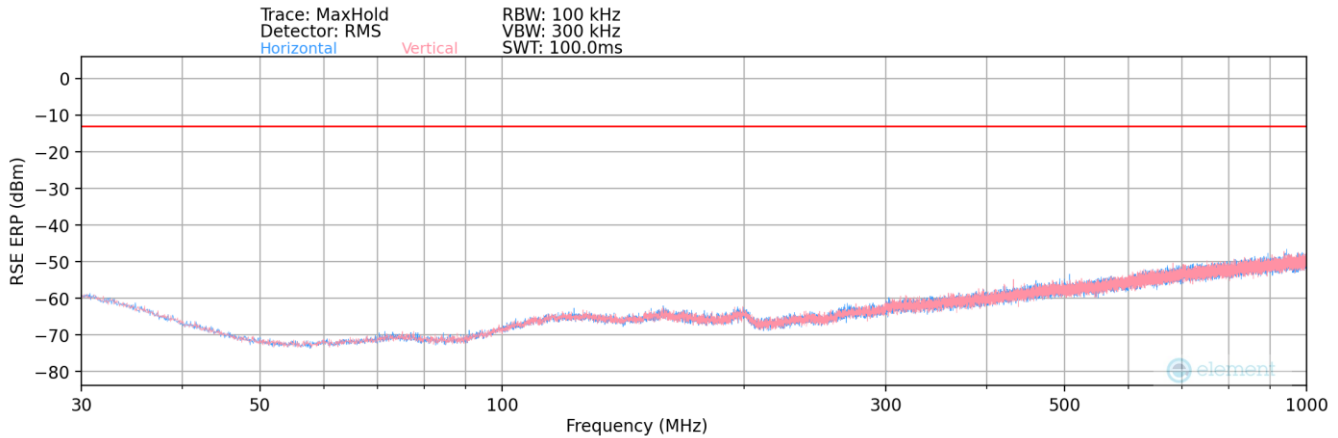

Plot 7-108. Radiated Spurious Plot Below 1GHz (GPRS PCS)

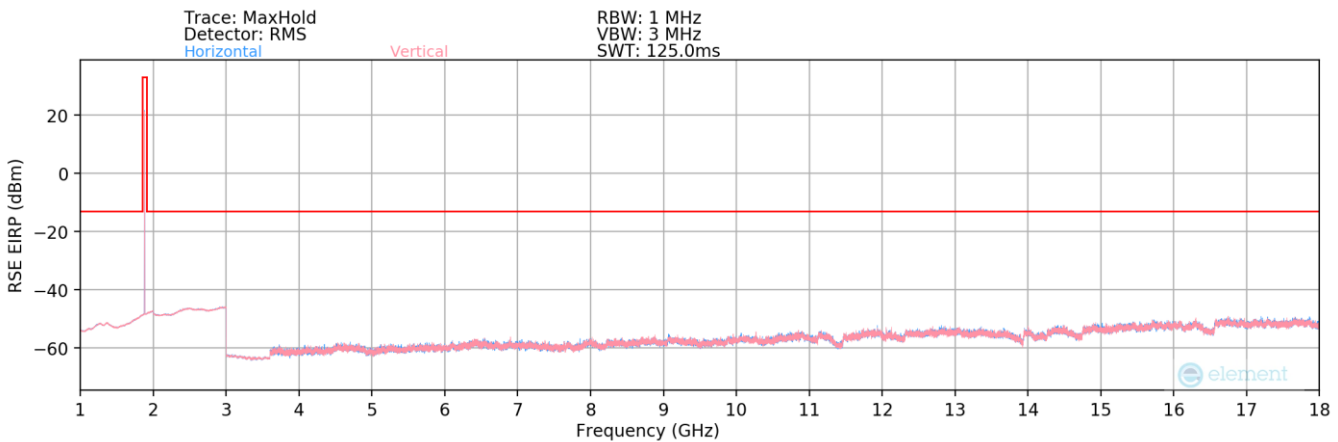

Plot 7-109. Radiated Spurious Plot (GPRS PCS)

Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
509.25	H	-	-	-96.44	25.76	36.32	-61.09	-13.00	-48.09

Table 7-9. Radiated Spurious Data Below 1GHz (GPRS PCS – Low Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 78 of 86



Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.40	H	123	347	-74.08	3.47	36.39	-58.87	-13.00	-45.87
5550.60	H	138	230	-76.53	5.13	35.60	-59.66	-13.00	-46.66
7400.80	H	-	-	-77.81	7.51	36.70	-58.56	-13.00	-45.56
9251.00	H	-	-	-78.13	8.83	37.70	-57.56	-13.00	-44.56
11101.20	H	-	-	-78.97	12.04	40.07	-55.19	-13.00	-42.19

Table 7-10. Radiated Spurious Data (GPRS PCS – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	661
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.00	H	-	-	-76.05	3.03	33.98	-61.28	-13.00	-48.28
5640.00	H	-	-	-76.91	5.48	35.57	-59.69	-13.00	-46.69
7520.00	H	-	-	-78.69	7.34	35.65	-59.61	-13.00	-46.61

Table 7-11. Radiated Spurious Data (GPRS PCS – Mid Channel)


Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.60	H	160	166	-75.75	2.94	34.19	-61.07	-13.00	-48.07
5729.40	H	-	-	-77.05	5.40	35.35	-59.91	-13.00	-46.91
7639.20	H	-	-	-78.28	7.59	36.31	-58.95	-13.00	-45.95
9549.00	H	-	-	-79.88	9.96	37.08	-58.18	-13.00	-45.18


Table 7-12. Radiated Spurious Data (GPRS PCS – High Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 79 of 86

WCDMA PCS

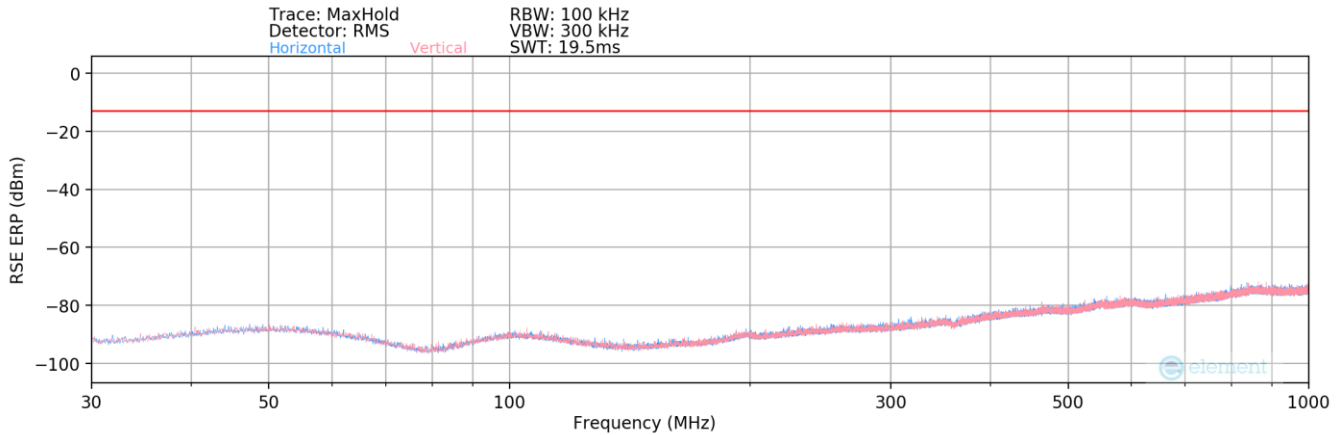

Plot 7-110. Radiated Spurious Plot Below 1GHz (WCDMA PCS)

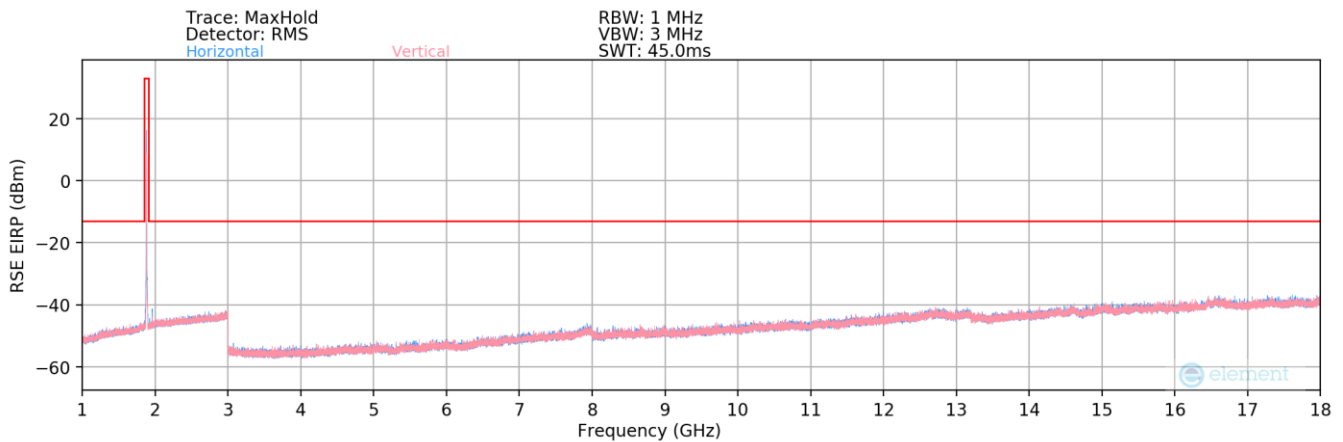

Plot 7-111. Radiated Spurious Plot (WCDMA PCS)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
666.87	H	-	-	-99.52	28.50	35.98	-61.43	-13.00	-48.43

Table 7-13. Radiated Spurious Data Below 1GHz (WCDMA PCS – Mid Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 80 of 86



Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.80	H	-	-	-79.13	3.45	31.32	-63.94	-13.00	-50.94
5557.20	H	-	-	-78.90	5.17	33.27	-61.99	-13.00	-48.99
7409.60	H	-	-	-80.08	7.44	34.36	-60.90	-13.00	-47.90

Table 7-14. Radiated Spurious Data (WCDMA PCS – Low Channel)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.00	H	-	-	-79.12	3.03	30.91	-64.35	-13.00	-51.35
5640.00	H	-	-	-79.12	5.48	33.36	-61.90	-13.00	-48.90
7520.00	H	-	-	-79.85	7.34	34.49	-60.77	-13.00	-47.77

Table 7-15. Radiated Spurious Data (WCDMA PCS – Mid Channel)

Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.20	H	-	-	-78.51	2.95	31.44	-63.82	-13.00	-50.82
5722.80	H	-	-	-79.43	5.36	32.93	-62.33	-13.00	-49.33
7630.40	H	-	-	-80.22	7.65	34.43	-60.83	-13.00	-47.83

Table 7-16. Radiated Spurious Data (WCDMA PCS – High Channel)

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 81 of 86



7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 82 of 86

LTE Band 25/2

		Operating Frequency (Hz):		1,882,500,000	
		Ref. Voltage (VDC):		4.28	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.28	- 30	1,882,588,401	3,328	0.0001768
		- 20	1,882,589,454	4,381	0.0002327
		- 10	1,882,588,217	3,144	0.0001670
		0	1,882,587,084	2,011	0.0001068
		+ 10	1,882,589,659	4,586	0.0002436
		+ 20 (Ref)	1,882,585,073	0	0.0000000
		+ 30	1,882,587,741	2,668	0.0001417
		+ 40	1,882,582,193	-2,880	-0.0001530
Battery Endpoint	3.69	+ 20	1,882,585,945	872	0.0000463

Table 7-17. LTE Band 25/2 Frequency Stability Data

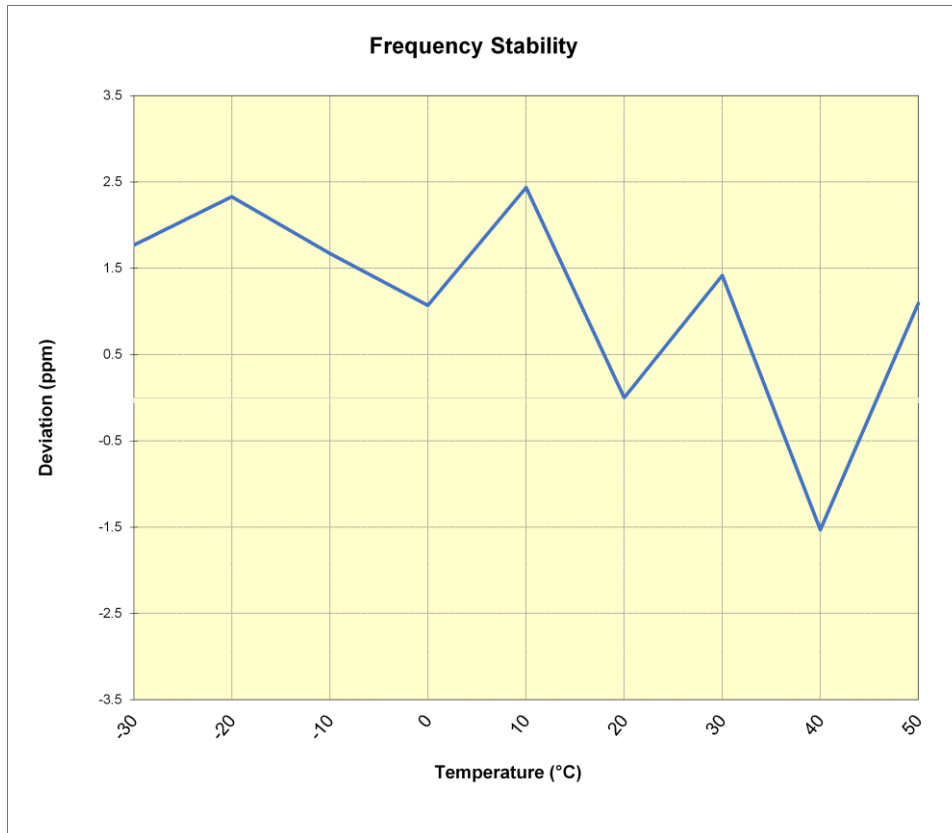


Plot 7-112. LTE Band 25/2 Frequency Stability Chart

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 83 of 86

GSM/GPRS PCS

		Operating Frequency (Hz):	1,880,000,000			
		Ref. Voltage (VDC):	4.28			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)	
100 %	4.28	- 30	1,880,006,050	3,739	0.0001989	
		- 20	1,880,003,915	1,604	0.0000853	
		- 10	1,880,005,175	2,864	0.0001523	
		0	1,880,006,512	4,201	0.0002235	
		+ 10	1,880,005,376	3,065	0.0001630	
		+ 20 (Ref)	1,880,002,311	0	0.0000000	
		+ 30	1,879,999,550	-2,761	-0.0001469	
		+ 40	1,879,998,606	-3,705	-0.0001971	
		+ 50	1,879,998,215	-4,096	-0.0002179	
Battery Endpoint	3.69	+ 20	1,880,001,544	-767	-0.0000408	

Table 7-18. GSM/GPRS PCS Frequency Stability Data

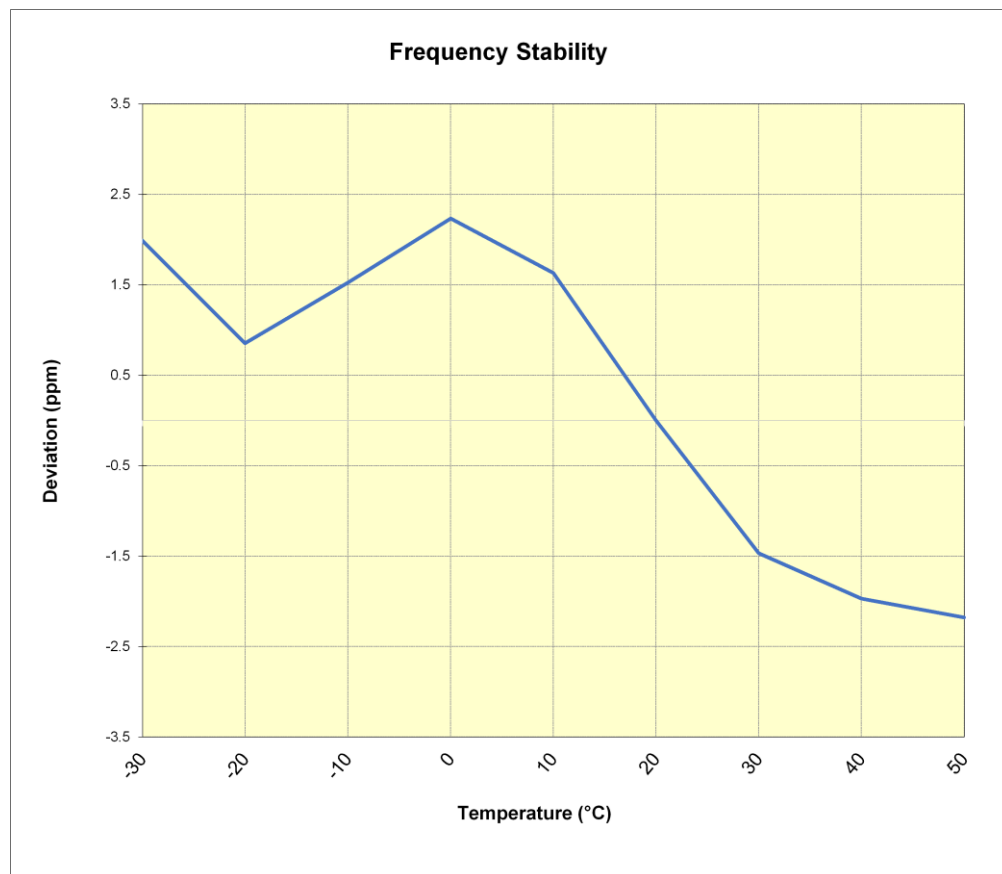


Plot 7-113. GSM/GPRS PCS Frequency Stability Chart

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 84 of 86

WCDMA PCS

		Operating Frequency (Hz):		1,880,000,000	
		Ref. Voltage (VDC):		4.28	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.28	- 30	1,879,996,390	-570	-0.0000303
		- 20	1,880,001,246	4,286	0.0002280
		- 10	1,879,997,967	1,007	0.0000536
		0	1,879,996,486	-474	-0.0000252
		+ 10	1,880,000,612	3,652	0.0001943
		+ 20 (Ref)	1,879,996,960	0	0.0000000
		+ 30	1,879,993,680	-3,280	-0.0001745
		+ 40	1,879,998,158	1,198	0.0000637
		+ 50	1,880,001,456	4,496	0.0002391
Battery Endpoint	3.69	+ 20	1,880,000,751	3,791	0.0002016

Table 7-19. WCDMA PCS Frequency Stability Data

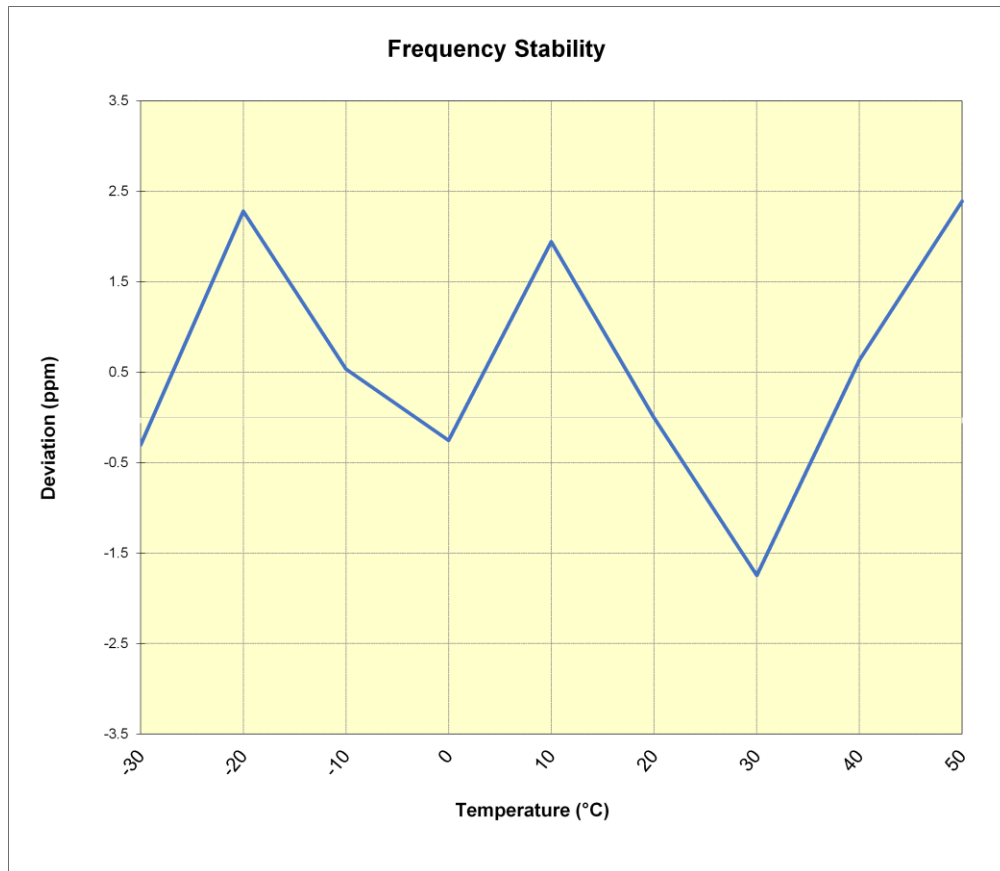

Plot 7-114. WCDMA PCS Frequency Stability Chart

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 85 of 86

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Sony Corporation Portable Handset FCC ID: PY7-58692W** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: PY7-58692W	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2207200079-02.PY7	Test Dates: 6/8/2022 - 7/29/2022	EUT Type: Portable Handset	Page 86 of 86