



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

<http://www.element.com>

MEASUREMENT REPORT FCC PART 15.407 UNII

Applicant Name:

Sony Corporation
1-7-1 Konan
Minato-ku
Tokyo, 108-0075, Japan

Date of Testing:

6/3/2022-7/29/2022

Test Report Issue Date:

7/29/2022

Test Site/Location:

Element lab. Columbia, MD, USA

Test Report Serial No.:

1M2207200079-10.PY7

FCC ID: PY7-58692W

APPLICANT: Sony Corporation

Application Type:

Certification

EUT Type:

Portable Handset

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDM

FCC Equipment Class:

Unlicensed National Information Infrastructure TX (NII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



| | | | |
|--|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 1 of 209 |

T A B L E O F C O N T E N T S

| | | |
|-------|--|-----|
| 1.0 | INTRODUCTION..... | 4 |
| 1.1 | Scope..... | 4 |
| 1.2 | Element Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION..... | 5 |
| 2.1 | Equipment Description..... | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Antenna Description..... | 7 |
| 2.4 | Test Configuration..... | 7 |
| 2.5 | Software and Firmware..... | 7 |
| 2.6 | EMI Suppression Device(s)/Modifications..... | 7 |
| 3.0 | DESCRIPTION OF TESTS..... | 8 |
| 3.1 | Evaluation Procedure..... | 8 |
| 3.2 | AC Line Conducted Emissions..... | 8 |
| 3.3 | Radiated Emissions..... | 9 |
| 3.4 | Environmental Conditions..... | 9 |
| 4.0 | ANTENNA REQUIREMENTS..... | 10 |
| 5.0 | MEASUREMENT UNCERTAINTY..... | 11 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 12 |
| 7.0 | TEST RESULTS..... | 13 |
| 7.1 | Summary..... | 13 |
| 7.2 | 26dB Bandwidth Measurement – 802.11a/n/ac/ax..... | 14 |
| 7.3 | 6dB Bandwidth Measurement – 802.11a..... | 73 |
| 7.4 | UNII Output Power Measurement – 802.11a/n/ac/ax..... | 91 |
| 7.5 | Maximum Power Spectral Density – 802.11a/n/ac/ax..... | 99 |
| 7.6 | Radiated Spurious Emission Measurements – Above 1GHz..... | 173 |
| 7.6.1 | MIMO Radiated Spurious Emission Measurements..... | 176 |
| 7.6.2 | MIMO Radiated Band Edge Measurements (20MHz BW)..... | 186 |
| 7.6.3 | MIMO Radiated Band Edge Measurements (40MHz BW)..... | 189 |
| 7.6.4 | MIMO Radiated Band Edge Measurements (80MHz BW)..... | 191 |
| 7.6.5 | MIMO Radiated Band Edge Measurements (160MHz BW)..... | 193 |
| 7.7 | Radiated Spurious Emissions Measurements – Below 1GHz..... | 195 |
| 7.8 | Line-Conducted Test Data..... | 199 |
| 8.0 | CONCLUSION..... | 209 |

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 2 of 209 |

MEASUREMENT REPORT

| UNII Band | Channel Bandwidth (MHz) | Tx Frequency (MHz) | ANT1 | | ANT2 | | MIMO | |
|-----------|-------------------------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
| | | | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 1 | 20 | 5180 - 5240 | 14.093 | 11.49 | 13.836 | 11.41 | 27.797 | 14.44 |
| 2A | | 5260 - 5320 | 13.305 | 11.24 | 13.996 | 11.46 | 26.915 | 14.30 |
| 2C | | 5500 - 5700 | 13.932 | 11.44 | 14.093 | 11.49 | 27.990 | 14.47 |
| 2C | | 5500 - 5720 | 13.932 | 11.44 | 14.093 | 11.49 | 27.990 | 14.47 |
| 3 | | 5745 - 5825 | 13.677 | 11.36 | 14.093 | 11.49 | 27.479 | 14.39 |
| 1 | 40 | 5190 - 5230 | 14.093 | 11.49 | 12.912 | 11.11 | 26.977 | 14.31 |
| 2A | | 5270 - 5310 | 13.868 | 11.42 | 13.213 | 11.21 | 26.546 | 14.24 |
| 2C | | 5510 - 5670 | 13.932 | 11.44 | 13.092 | 11.17 | 26.977 | 14.31 |
| 2C | | 5510 - 5710 | 13.932 | 11.44 | 13.092 | 11.17 | 26.977 | 14.31 |
| 3 | | 5755 - 5795 | 13.677 | 11.36 | 12.134 | 10.84 | 25.351 | 14.04 |
| 1 | 80 | 5210 | 12.735 | 11.05 | 13.740 | 11.38 | 26.242 | 14.19 |
| 2A | | 5290 | 12.050 | 10.81 | 13.183 | 11.20 | 25.003 | 13.98 |
| 2C | | 5530 - 5610 | 13.804 | 11.40 | 13.677 | 11.36 | 26.792 | 14.28 |
| 2C | | 5530 - 5690 | 13.804 | 11.40 | 13.677 | 11.36 | 26.792 | 14.28 |
| 3 | | 5775 | 11.482 | 10.60 | 13.243 | 11.22 | 24.491 | 13.89 |
| 1 | 160 | 5250 | 13.032 | 11.15 | 14.060 | 11.48 | 27.102 | 14.33 |
| 2B | | 5570 | 13.397 | 11.27 | 12.359 | 10.92 | 25.704 | 14.10 |

EUT Overview

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 3 of 209 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 4 of 209 |

2.0 PRODUCT INFORMATION

Equipment Description

The Equipment Under Test (EUT) is the **Sony Corporation Portable Handset FCC ID: PY7-58692W**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: OAMBH, 008DD

Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 36 | 5180 | 52 | 5260 | 100 | 5500 | 149 | 5745 |
| : | : | : | : | : | : | : | : |
| 40 | 5200 | 56 | 5280 | 120 | 5600 | 157 | 5785 |
| : | : | : | : | : | : | : | : |
| 48 | 5240 | 64 | 5320 | 140 | 5700 | 165 | 5825 |

Table 2-1. 802.11a (20MHz) Frequency / Channel Operations

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 38 | 5190 | 54 | 5270 | 102 | 5510 | 151 | 5755 |
| : | : | : | : | : | : | : | : |
| 46 | 5230 | 62 | 5310 | 118 | 5590 | 159 | 5795 |
| | | | | : | : | | |
| | | | | 142 | 5710 | | |

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 42 | 5210 | 58 | 5290 | 106 | 5530 | 155 | 5775 |
| | | | | : | : | | |
| | | | | 138 | 5690 | | |

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

| Band 1/2A | | Band 2C | |
|-----------|-----------------|---------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 50 | 5250 | 114 | 5570 |

Table 2-4. 802.11ac / 802.11ax (160MHz BW) Frequency / Channel Operations

| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
|---|------------------------------------|-------------------------------|-----------------------------------|
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 5 of 209 |

Notes:

- 5GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidth. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles | | | | | |
|--------------------------------|------------|----------------|-------------|--------|--------------------|
| 802.11 Mode/Band | | MIMO (1+2) | | | |
| | | Duty Cycle [%] | Pulse Width | Period | Radiated DCCF [dB] |
| 5GHz | a | 98.9 | 2.09 | 2.113 | N/A |
| | n (HT20) | 99.4 | 5.409 | 5.439 | N/A |
| | ac (HT20) | 99.4 | 5.416 | 5.447 | N/A |
| | ax (HT20) | 99.5 | 5.432 | 5.462 | N/A |
| | n (HT40) | 99.0 | 5.386 | 5.439 | N/A |
| | ac (HT40) | 99.0 | 5.386 | 5.439 | N/A |
| | ax (HT40) | 98.9 | 5.401 | 5.462 | N/A |
| | ac (HT80) | 99.0 | 5.379 | 5.432 | N/A |
| | ax (HT80) | 98.9 | 5.401 | 5.462 | N/A |
| | ac (HT160) | 99.4 | 5.416 | 5.447 | N/A |
| ax (HT160) | 99.3 | 5.424 | 5.462 | N/A | |

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

| WiFi Configurations | | SISO | | SDM | | CDD/SDM | |
|---------------------|------|------|------|------|------|---------|------|
| | | ANT1 | ANT2 | ANT1 | ANT2 | ANT1 | ANT2 |
| 5GHz | 11a | x | x | x | x | ✓ | ✓ |
| | 11n | x | x | x | x | ✓ | ✓ |
| | 11ac | x | x | x | x | ✓ | ✓ |
| | 11ax | x | x | x | x | ✓ | ✓ |

Table 2-6. Frequency / Channel Operations

✓ = Support ; x = NOT Support
SISO = Single Input Single Output
SDM = Spatial Diversity Multiplexing – MIMO function
CDD = Cyclic Delay Diversity - 2Tx Function

- This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. The following table shows the worst-case configuration determined during testing. The data for this configuration is contained in the UNII test report.

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 6 of 209 |

Configuration 1: ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

| Description | 2.4 GHz Emission | 5 GHz Emission |
|---------------------------|------------------|----------------|
| Antenna | 1, 2 | 1, 2 |
| Channel | 6 | 100 |
| Operating Frequency (MHz) | 2437 | 5500 |
| Data Rate (Mbps) | 6 | MCS0 |
| Mode | 802.11g | 802.11ax |

Table 2-7. Config-1 (MIMO 2.4GHz & 5GHz)

2.3 Antenna Description

Following antenna was used for the testing.

| Frequency [GHz] | Antenna 1 Gain (dBi) | Antenna 2 Gain (dBi) | Directional Antenna Gain (dBi) |
|-----------------|----------------------|----------------------|--------------------------------|
| 5.20 | -0.7 | -9.6 | -1.1 |
| 5.30 | -0.7 | -9.6 | -1.1 |
| 5.50 | -3.8 | -7.7 | -2.5 |
| 5.80 | -5.5 | -6.1 | -2.8 |

Table 2-8. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) F7U050 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.5 Software and Firmware

The test was conducted with software/firmware version 3.103 installed on the EUT.

EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 7 of 209 |

3.0 DESCRIPTION OF TESTS

Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section **Error! Reference source not found.** The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

| | | | |
|---|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 8 of 209 |

Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | |
|--|---|--------------------------------------|--|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 9 of 209 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 10 of 209 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Line Conducted Disturbance | 3.09 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 11 of 209 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-----------------|----------|--------------------------------------|------------|--------------|------------|---------------|
| - | WL25-1 | Conducted Cable Set (25GHz) | 12/19/2021 | Annual | 12/19/2022 | WL25-1 |
| - | WL25-2 | Conducted Cable Set (25GHz) | 12/19/2022 | Annual | 12/19/2022 | WL25-2 |
| - | WL40-1 | Conducted Cable Set (40GHz) | 12/19/2022 | Annual | 12/19/2022 | WL40-1 |
| - | ETS-001 | EMC Cable and Switch System | 12/9/2021 | Annual | 12/9/2022 | ETS-001 |
| - | ETS-002 | EMC Cable and Switch System | 3/10/2022 | Annual | 3/10/2023 | ETS-002 |
| - | AP1-002 | EMC Cable and Switch System | 3/9/2022 | Annual | 3/9/2023 | AP1-002 |
| - | AP2-001 | EMC Cable and Switch System | 1/4/2022 | Annual | 1/4/2023 | AP2-001 |
| - | AP2-002 | EMC Cable and Switch System | 3/11/2022 | Annual | 3/11/2023 | AP2-002 |
| Agilent | N9038A | MXE EMI Receiver | 1/21/2022 | Annual | 1/21/2023 | MY51210133 |
| Agilent | N9020A | MXA Signal Analyzer | 3/4/2022 | Annual | 3/4/2023 | US46470561 |
| Agilent | N9030A | PXA Signal Analyzer (44GHz) | 7/21/2021 | Annual | 7/21/2022 | MY49430494 |
| Anritsu | ML2495A | Power Meter | 3/17/2022 | Annual | 3/17/2023 | 1328004 |
| Anritsu | ML2495A | Power Meter | 3/17/2022 | Annual | 3/17/2023 | 941001 |
| Com-Power | AL-130 | 9kHz-30MHz Loop Antenna | 4/13/2022 | Biennial | 4/13/2024 | 121034 |
| Emco | 3115 | Horn Antenna (1 - 18GHz) | 7/20/2021 | Biennial | 7/20/2022 | 9203-2178 |
| ETS-Lindgren | 3116 | Horn Antenna (18 - 40GHz) | 4/20/2021 | Biennial | 4/20/2023 | 9704-5182 |
| ETS-Lindgren | 3816/2NM | Line Impedance Stabilization Network | 7/9/2020 | Biennial | 7/9/2022 | 114451 |
| Pasternack | NMLC-2 | Line Conducted Emissions Cable (NM) | 12/19/2021 | Annual | 12/19/2022 | NMLC-2 |
| Rohde & Schwarz | FSV40-N | Spectrum Analyzer | 1/14/2021 | Annual | 8/3/2022 | 83244 |
| Rohde & Schwarz | SMW200A | Vector Signal Generator | | N/A | | 83365 |
| Rohde & Schwarz | ESU26 | EMI Test Receiver (26.5GHz) | 8/3/2021 | Annual | 8/3/2022 | 100342 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 7/25/2021 | Annual | 7/25/2022 | 100348 |
| Sunol | DRH-118 | Horn Antenna (1-18GHz) | 2/14/2022 | Biennial | 2/14/2024 | A050307 |
| Sunol | JB5 | Bi-Log Antenna (30M - 5GHz) | 7/27/2020 | Biennial | 7/27/2022 | A051107 |

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this was not used to make direct calibrated measurements.

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 12 of 209 |

7.0 TEST RESULTS

Summary

Company Name: Sony Corporation
 FCC ID: PY7-58692W
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|------------------------------------|----------------|---|--|----------------|-------------|---------------------|
| N/A | RSS-Gen [6.6] | 26dB Bandwidth | N/A | CONDUCTED | PASS | Section 7.2 |
| 15.407(e) | RSS-Gen [6.6] | 6dB Bandwidth | >500kHz(5725-5850MHz) | | PASS | Section 7.3 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Conducted Output Power | Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.4 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Power Spectral Density | Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.5 |
| 15.407(h) | RSS-247 [6.3] | Dynamic Frequency Selection | See DFS Test Report | | PASS | See DFS Test Report |
| 15.407(b.1), (2), (3), (4) | RSS-247 [6.2] | Undesirable Emissions | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2]) | RADIATED | PASS | Section 7.6 |
| 15.205, 15.407(b.1), (4), (5), (6) | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | | PASS | Section 7.6, 7.7 |
| 15.407 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 (RSS-Gen [8.8]) limits | LINE CONDUCTED | PASS | Section 7.8 |

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 1.3.1.

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 13 of 209 |

26dB Bandwidth Measurement – 802.11a/n/ac/ax

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

| | | | |
|---|---|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 14 of 209 |




MIMO Antenna-1 26 dB Bandwidth Measurements


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 26dB Bandwidth [MHz] |
|-----------|-----------------|-------------|------------------|------------------|-------------------------------|
| Band 1 | 5180 | 36 | a | 6 | 18.54 |
| | 5200 | 40 | a | 6 | 18.75 |
| | 5240 | 48 | a | 6 | 18.71 |
| | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 19.77 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 20.15 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 19.80 |
| | 5180 | 36 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.65 |
| | 5200 | 40 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.57 |
| | 5240 | 48 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.89 |
| | 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | 39.52 |
| | 5230 | 46 | n (40MHz) | 13.5/15 (MCS0) | 39.56 |
| | 5190 | 38 | ax (40MHz) | 13.5/15 (MCS0) | 39.90 |
| | 5230 | 46 | ax (40MHz) | 13.5/15 (MCS0) | 40.11 |
| Band 1/2A | 5210 | 42 | ac (80MHz) | 29.3/32.5 (MCS0) | 80.92 |
| | 5210 | 42 | ax (80MHz) | 29.3/32.5 (MCS0) | 81.50 |
| Band 2A | 5250 | 50 | ac (160MHz) | 58.5/65 (MCS0) | 163.60 |
| | 5250 | 50 | ax (160MHz) | 58.5/65 (MCS0) | 164.50 |
| | 5260 | 52 | a | 6 | 18.71 |
| | 5280 | 56 | a | 6 | 18.80 |
| | 5320 | 64 | a | 6 | 18.69 |
| | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | 19.83 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | 20.10 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 19.95 |
| | 5260 | 52 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.49 |
| | 5280 | 56 | ax (20MHz) | 6.5/7.2 (MCS0) | 21.08 |
| | 5320 | 64 | ax (20MHz) | 6.5/7.2 (MCS0) | 21.04 |
| | 5270 | 54 | n (40MHz) | 13.5/15 (MCS0) | 39.18 |
| | 5310 | 62 | n (40MHz) | 13.5/15 (MCS0) | 39.70 |
| | 5270 | 54 | ax (40MHz) | 13.5/15 (MCS0) | 40.33 |
| | 5310 | 62 | ax (40MHz) | 13.5/15 (MCS0) | 40.30 |
| | 5290 | 58 | ac (80MHz) | 29.3/32.5 (MCS0) | 81.83 |
| | 5290 | 58 | ax (80MHz) | 29.3/32.5 (MCS0) | 81.32 |
| | Band 2C | 5500 | 100 | a | 6 |
| 5600 | | 120 | a | 6 | 18.61 |
| 5720 | | 144 | a | 6 | 18.85 |
| 5500 | | 100 | n (20MHz) | 6.5/7.2 (MCS0) | 19.76 |
| 5600 | | 120 | n (20MHz) | 6.5/7.2 (MCS0) | 19.78 |
| 5720 | | 144 | n (20MHz) | 6.5/7.2 (MCS0) | 19.87 |
| 5500 | | 100 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.90 |
| 5600 | | 120 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.66 |
| 5720 | | 144 | ax (20MHz) | 6.5/7.2 (MCS0) | 20.78 |
| 5510 | | 102 | n (40MHz) | 13.5/15 (MCS0) | 39.51 |
| 5590 | | 118 | n (40MHz) | 13.5/15 (MCS0) | 39.23 |
| 5710 | | 142 | n (40MHz) | 13.5/15 (MCS0) | 39.20 |
| 5510 | | 102 | ax (40MHz) | 13.5/15 (MCS0) | 39.89 |
| 5590 | | 118 | ax (40MHz) | 13.5/15 (MCS0) | 39.89 |
| 5710 | | 142 | ax (40MHz) | 13.5/15 (MCS0) | 39.82 |
| 5530 | | 106 | ac (80MHz) | 29.3/32.5 (MCS0) | 81.08 |
| 5610 | | 122 | ac (80MHz) | 29.3/32.5 (MCS0) | 81.24 |
| 5690 | | 138 | ac (80MHz) | 29.3/32.5 (MCS0) | 80.88 |
| 5530 | | 106 | ax (80MHz) | 29.3/32.5 (MCS0) | 81.35 |
| 5610 | | 122 | ax (80MHz) | 29.3/32.5 (MCS0) | 81.06 |
| 5690 | 138 | ax (80MHz) | 29.3/32.5 (MCS0) | 81.31 | |
| 5570 | 114 | ac (160MHz) | 58.5/65 (MCS0) | 164.80 | |
| 5570 | 114 | ax (160MHz) | 58.5/65 (MCS0) | 162.70 | |

Table 7-2. Conducted Bandwidth Measurements MIMO ANT1

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 15 of 209 |

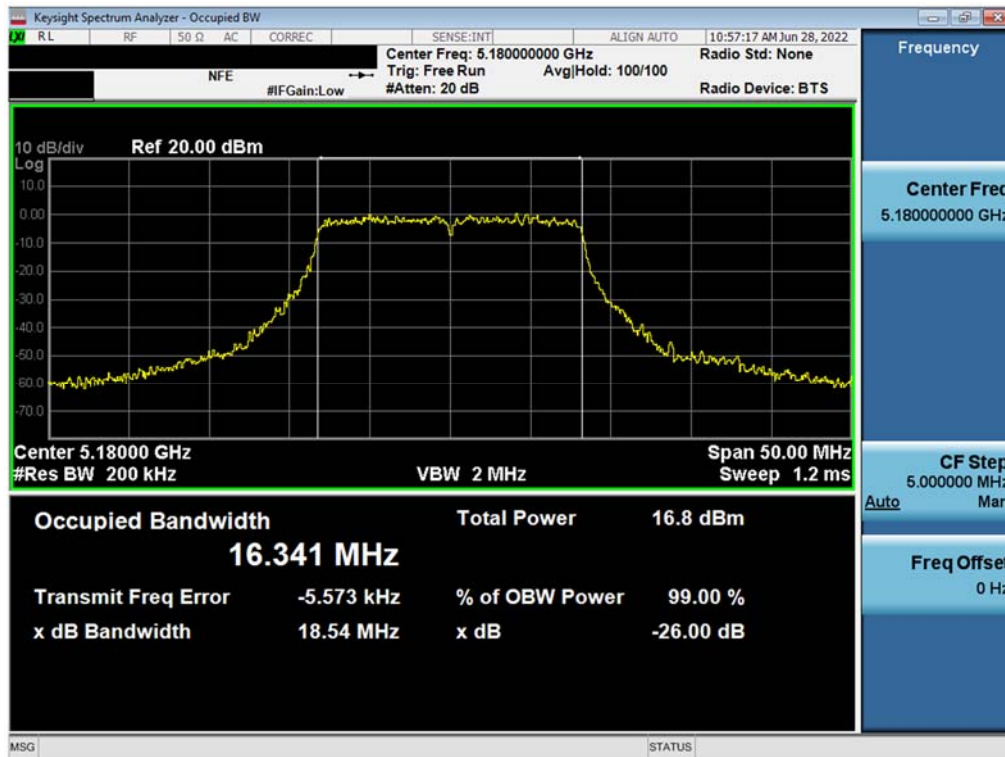

Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 36)

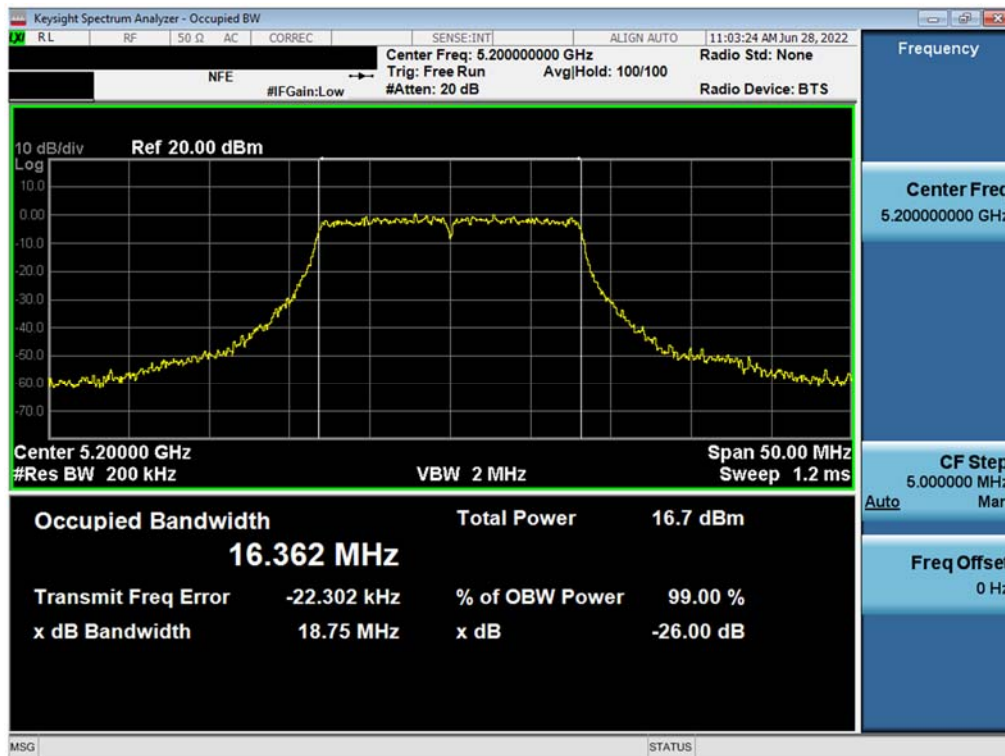


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 40)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 16 of 209 |




Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 1) – Ch. 48)

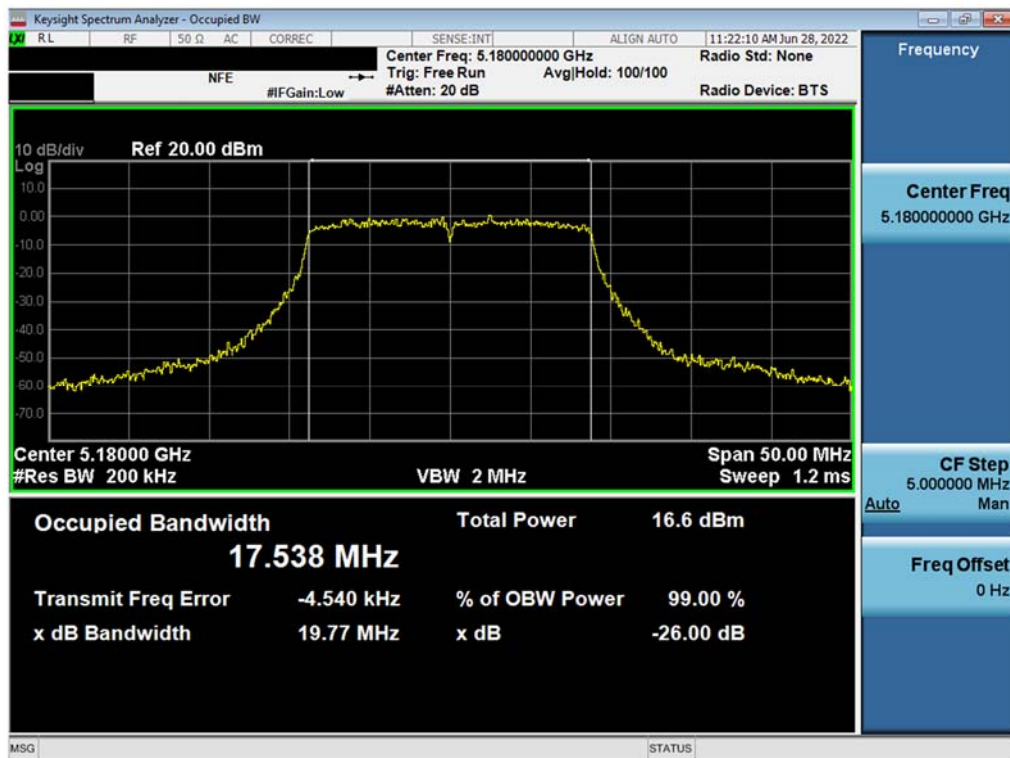


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 1) – Ch. 36)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 17 of 209 |

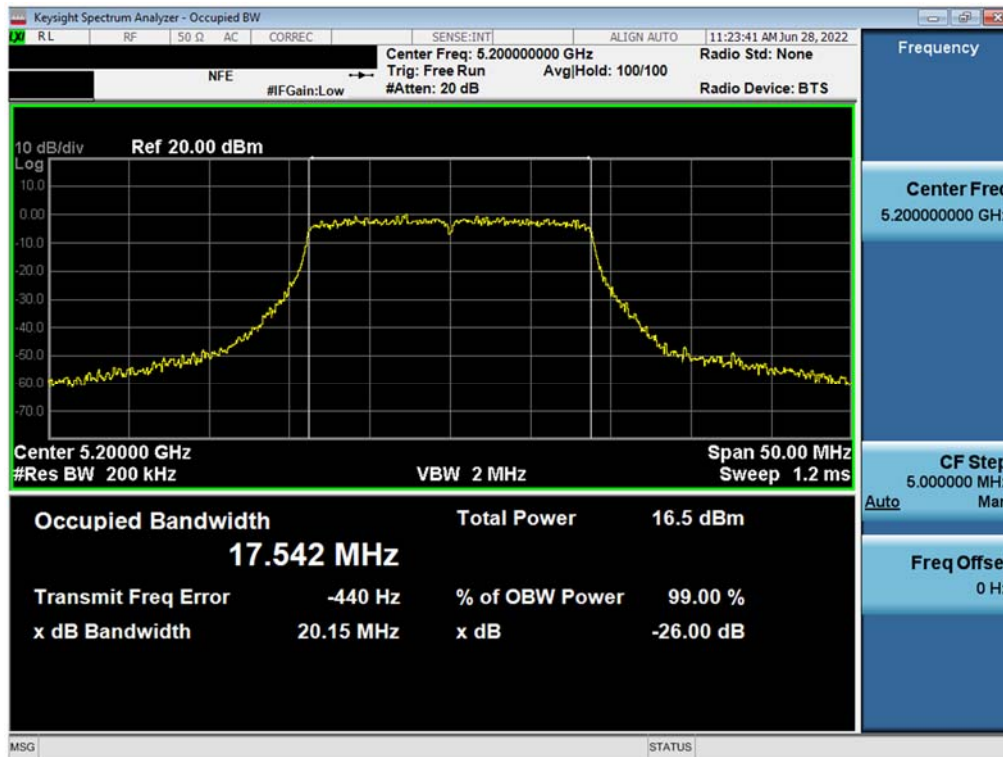


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 1) – Ch. 40)

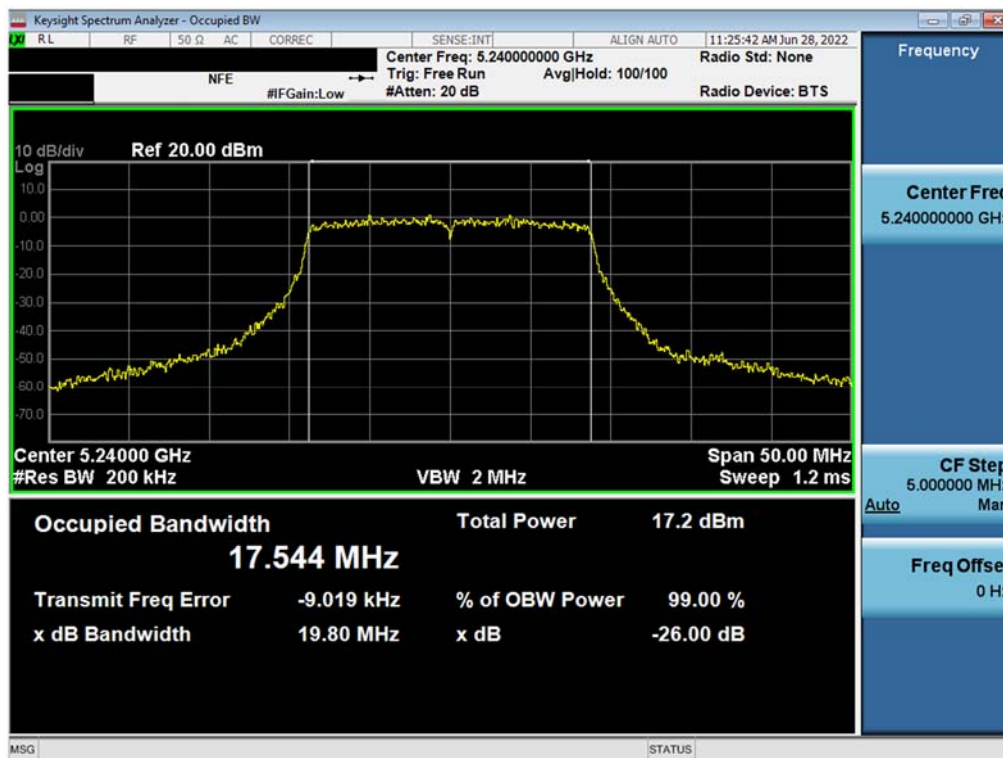


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 1) – Ch. 48)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 18 of 209 |

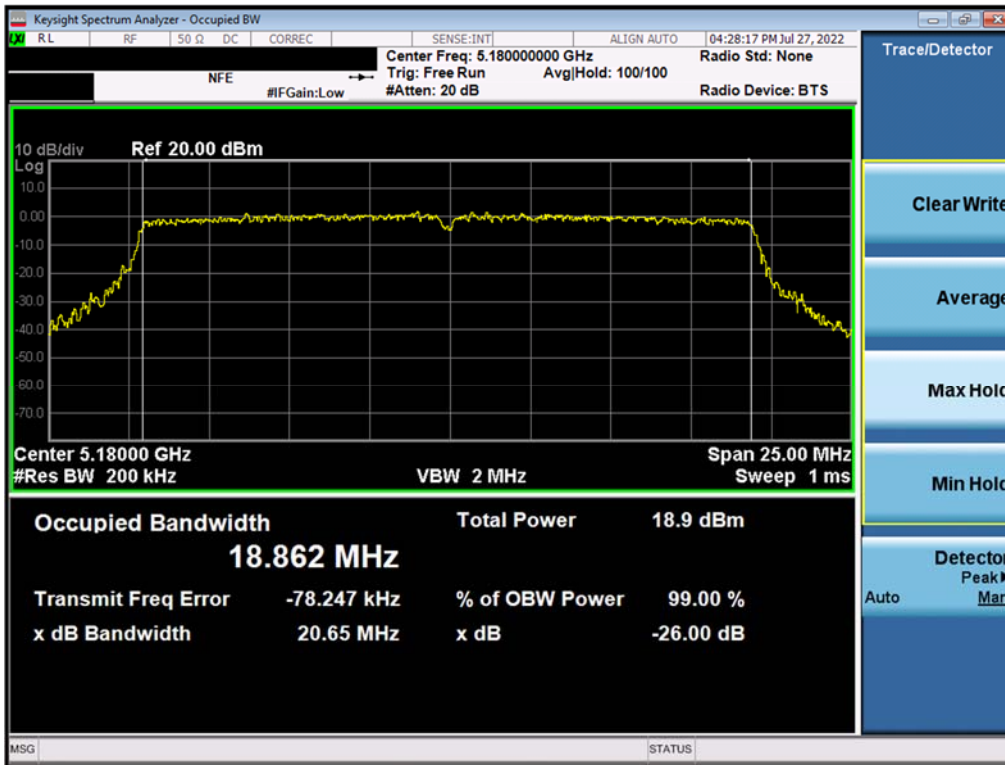


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 1) – Ch. 36)

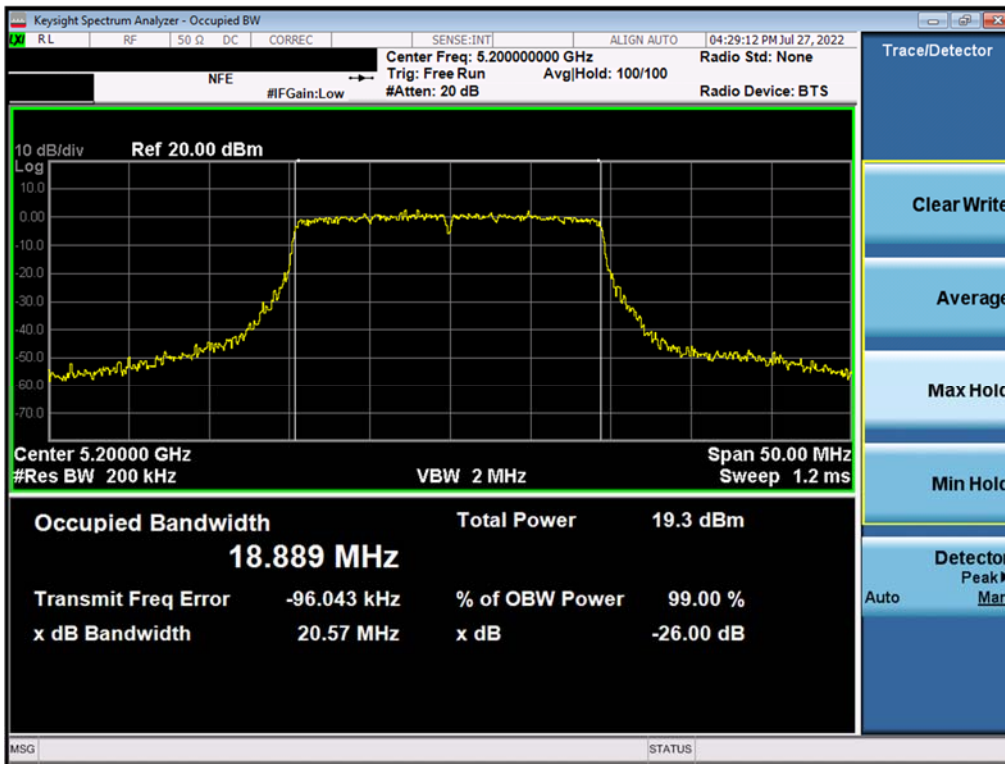


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 1) – Ch. 40)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 19 of 209 |

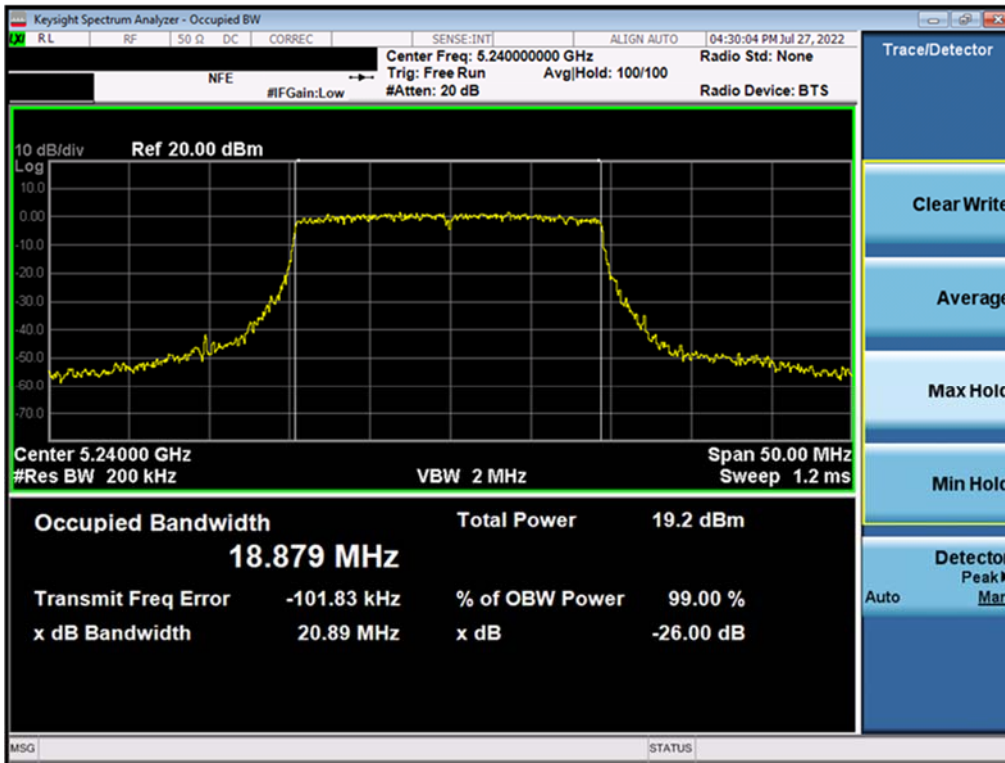


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 1) – Ch. 48)

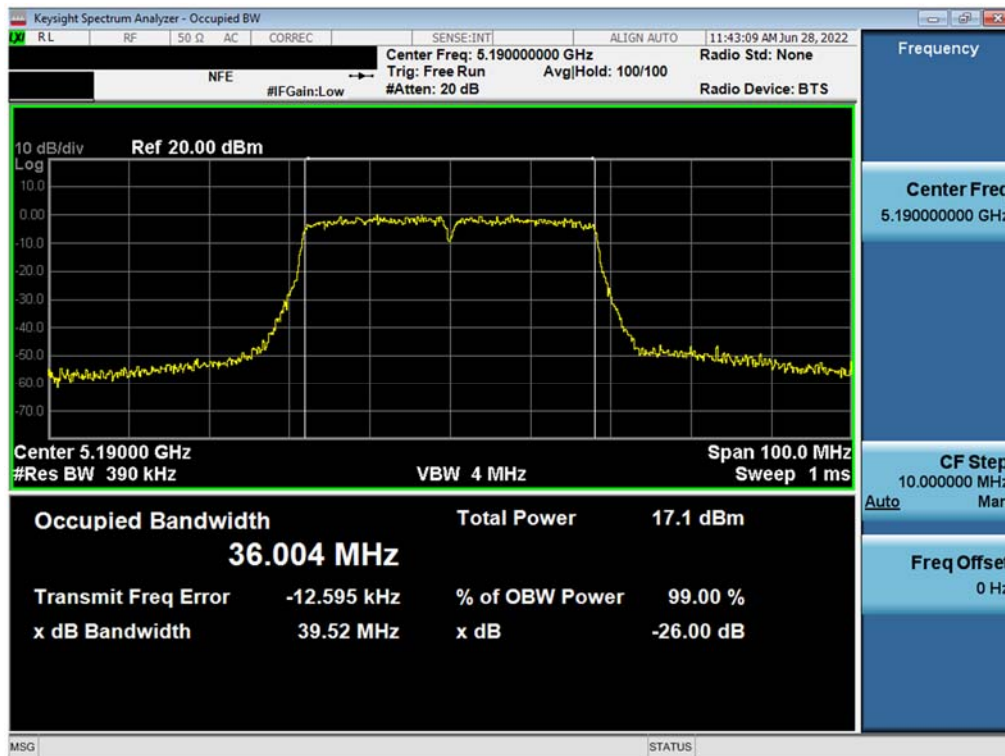


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 1) – Ch. 38)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 20 of 209 |

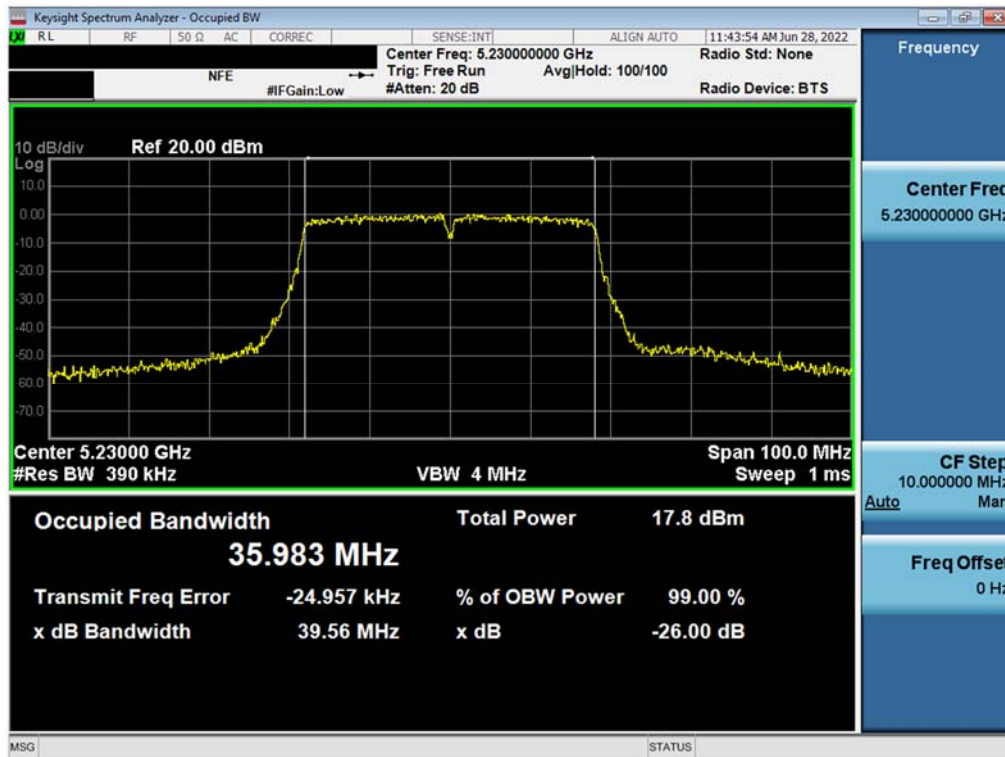


Plot 7-11. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 1) – Ch. 46)

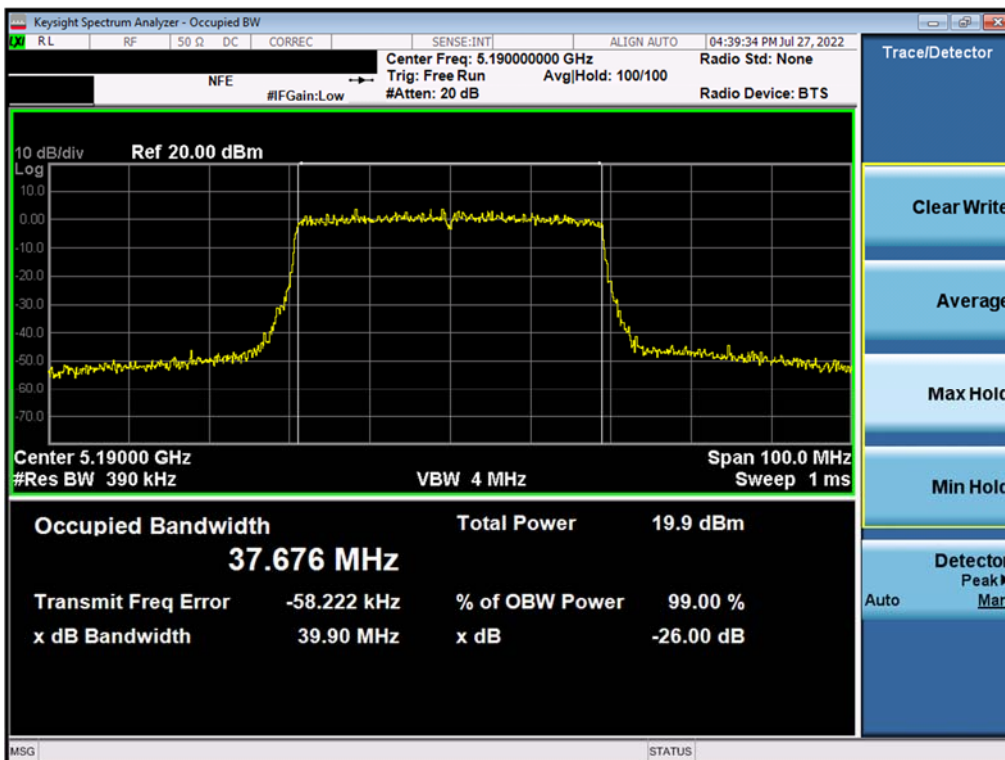


Plot 7-12. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 1) – Ch. 38)

| MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
|------------------------------------|---|-----------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | Page 21 of 209 |
| EUT Type: Portable Handset | | | |

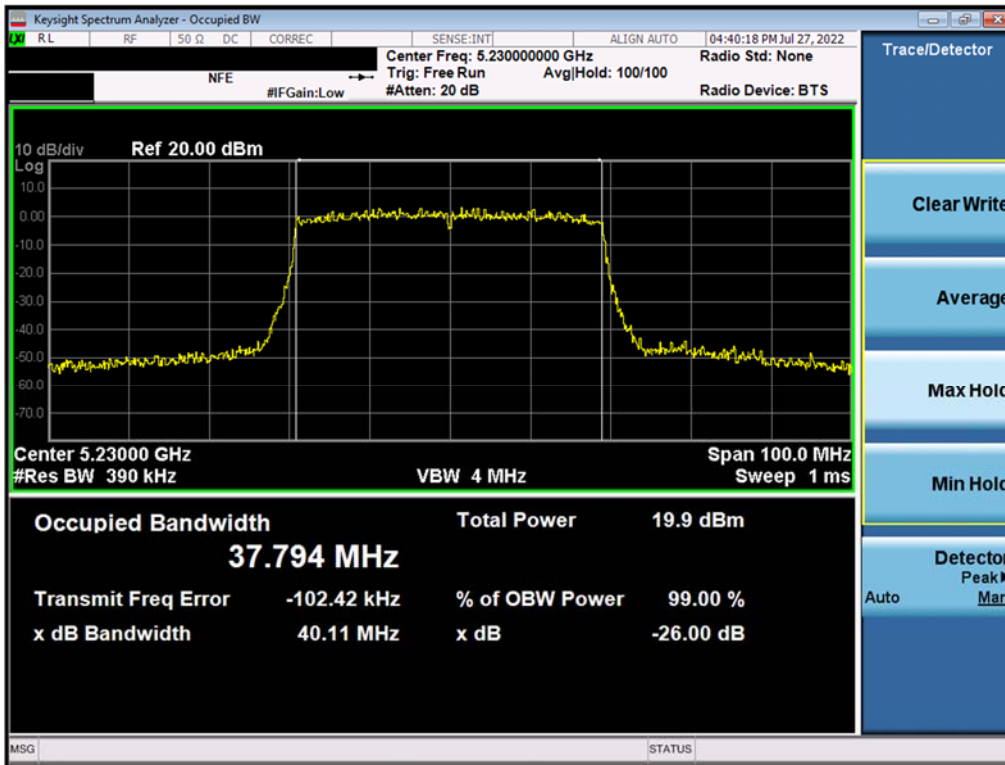

Plot 7-13. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 1) – Ch. 46)

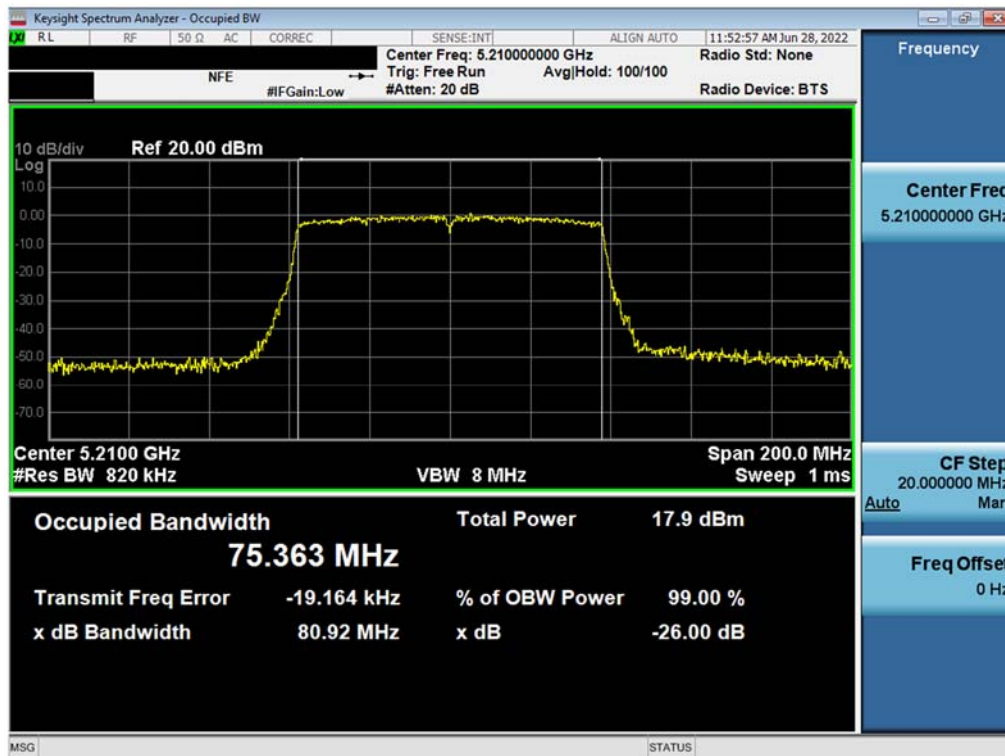


Plot 7-14. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 80MHz BW (UNII Band 1) – Ch. 42)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 22 of 209 |




Plot 7-15. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 80MHz BW (UNII Band 1) – Ch. 42)

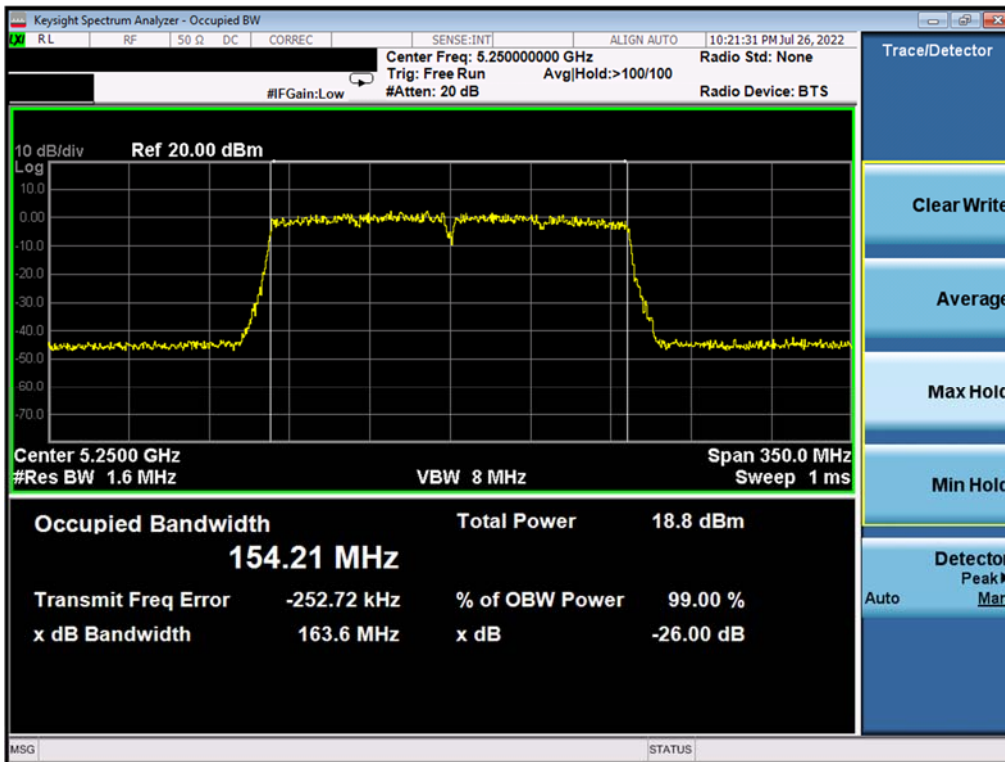


Plot 7-16. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 160MHz BW (UNII Band 1/2A) – Ch. 50)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 23 of 209 |

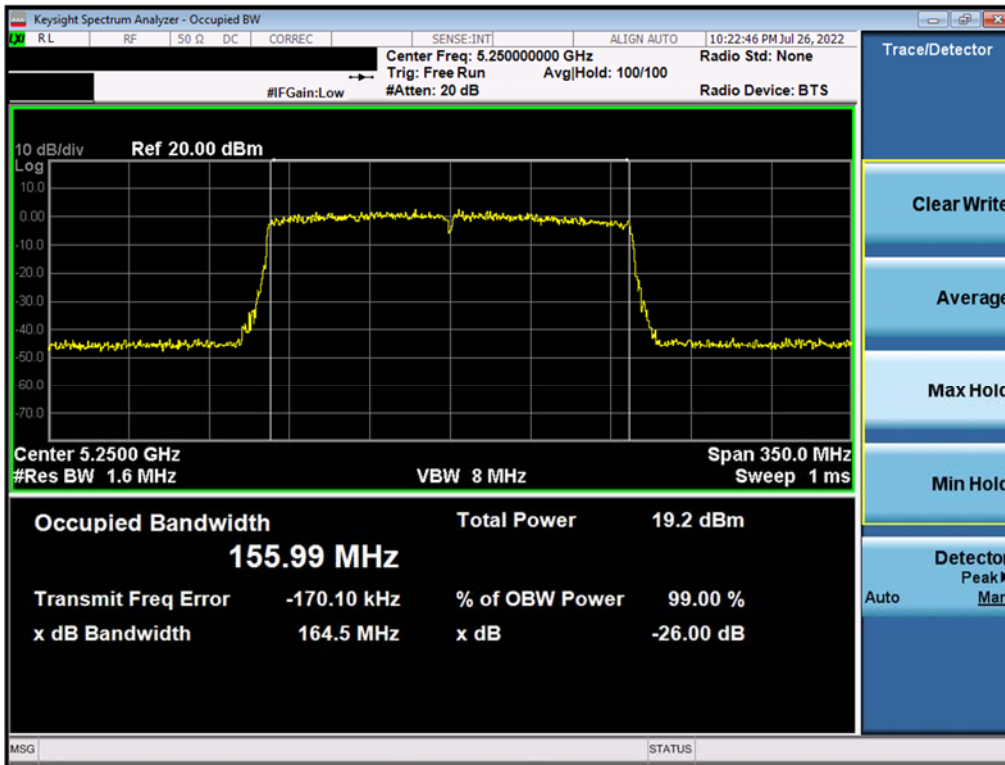


Plot 7-17. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 160MHz BW (UNII Band 1/2A) – Ch. 50)

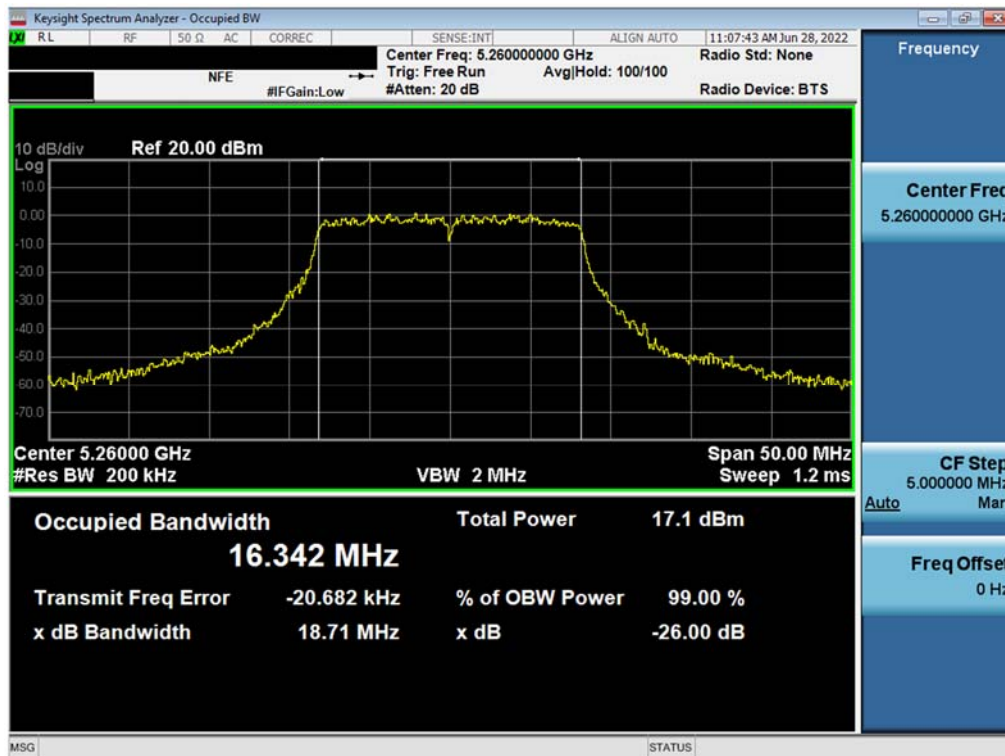


Plot 7-18. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 52)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 24 of 209 |

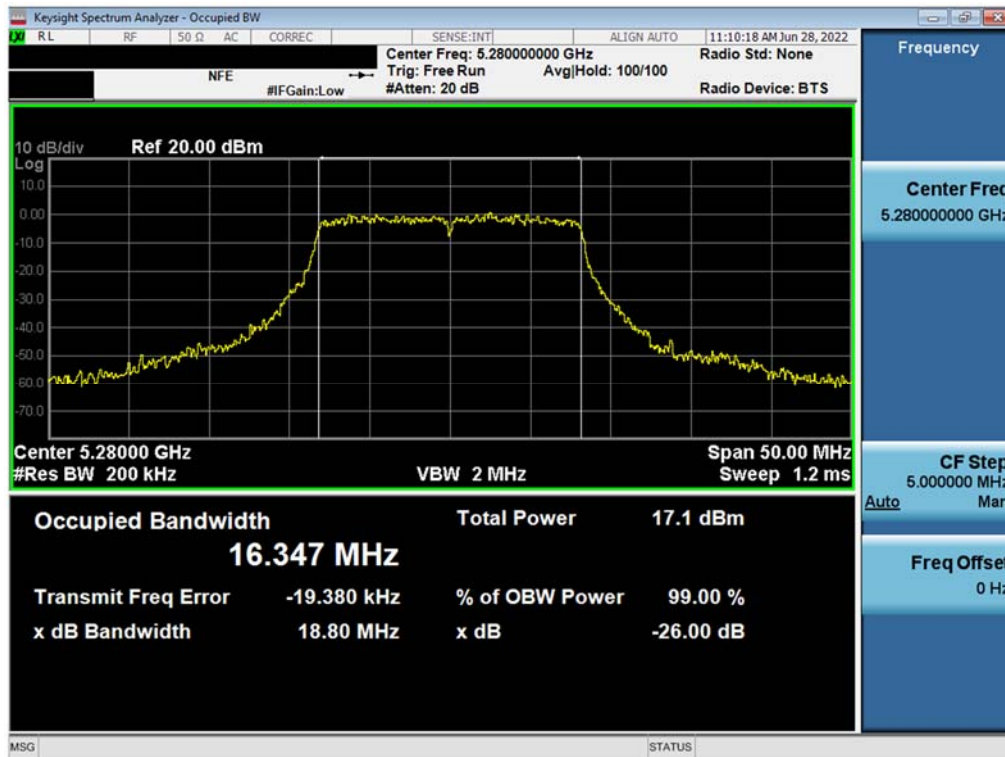


Plot 7-19. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 56)

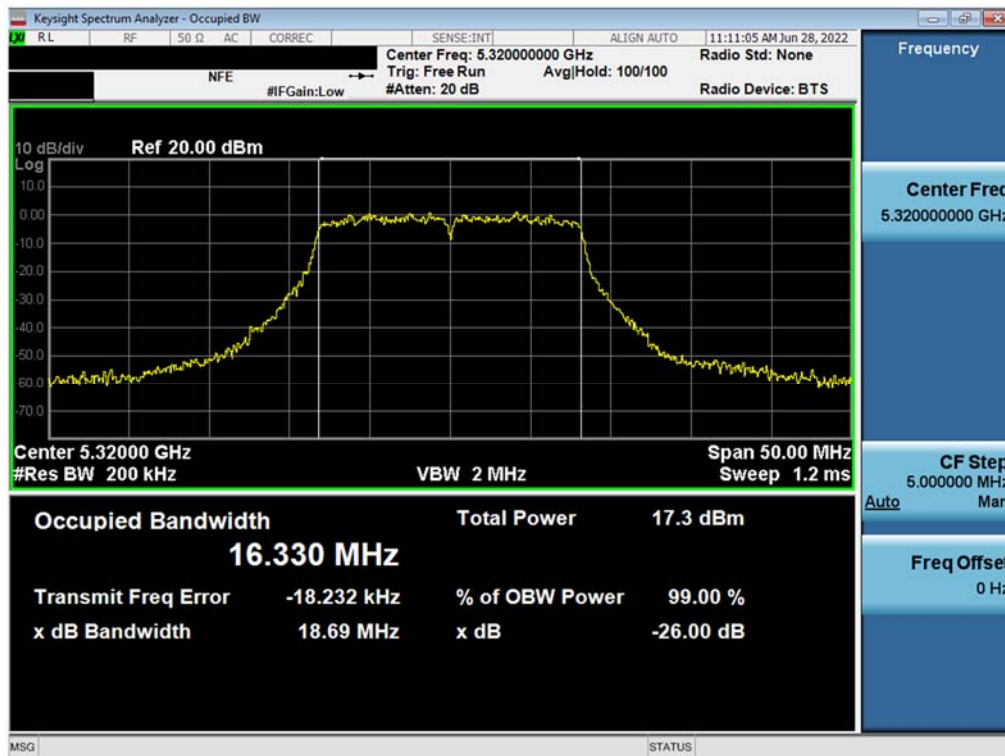


Plot 7-20. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2A) – Ch. 64)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 25 of 209 |

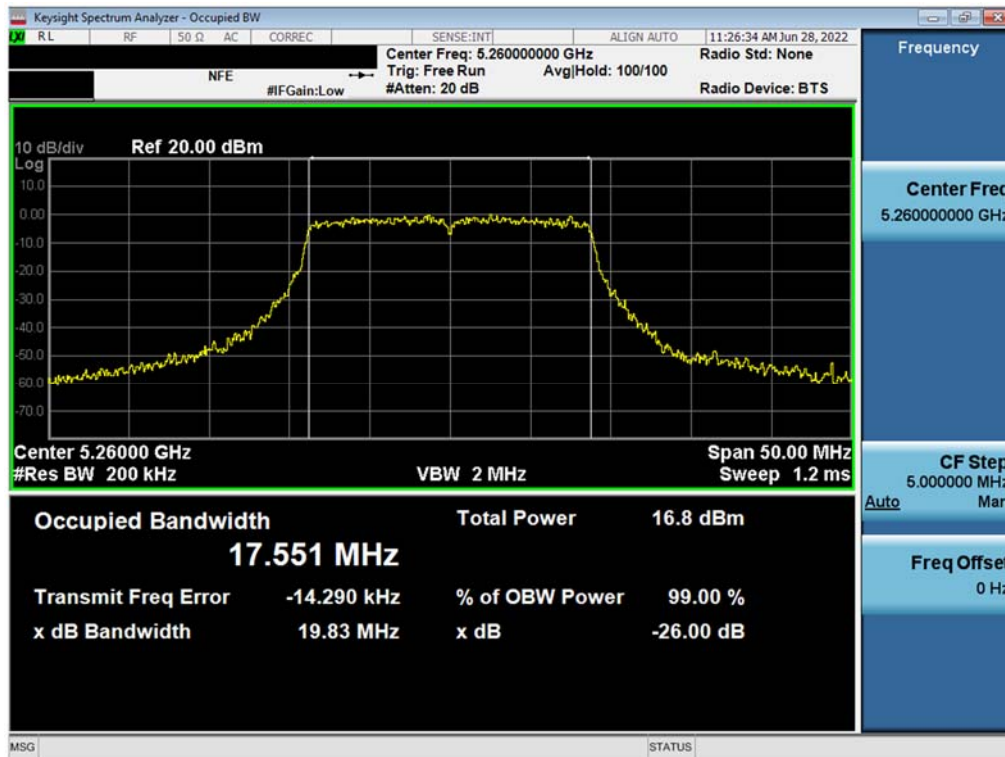


Plot 7-21. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2A) – Ch. 52)

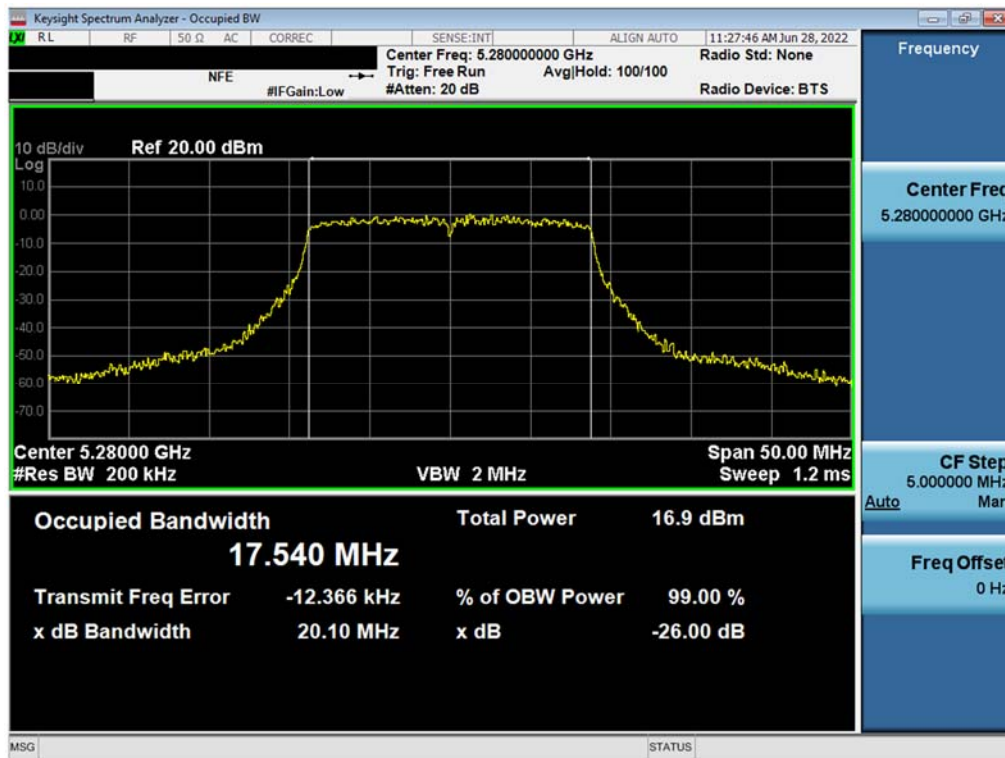


Plot 7-22. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2A) – Ch. 56)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 26 of 209 |

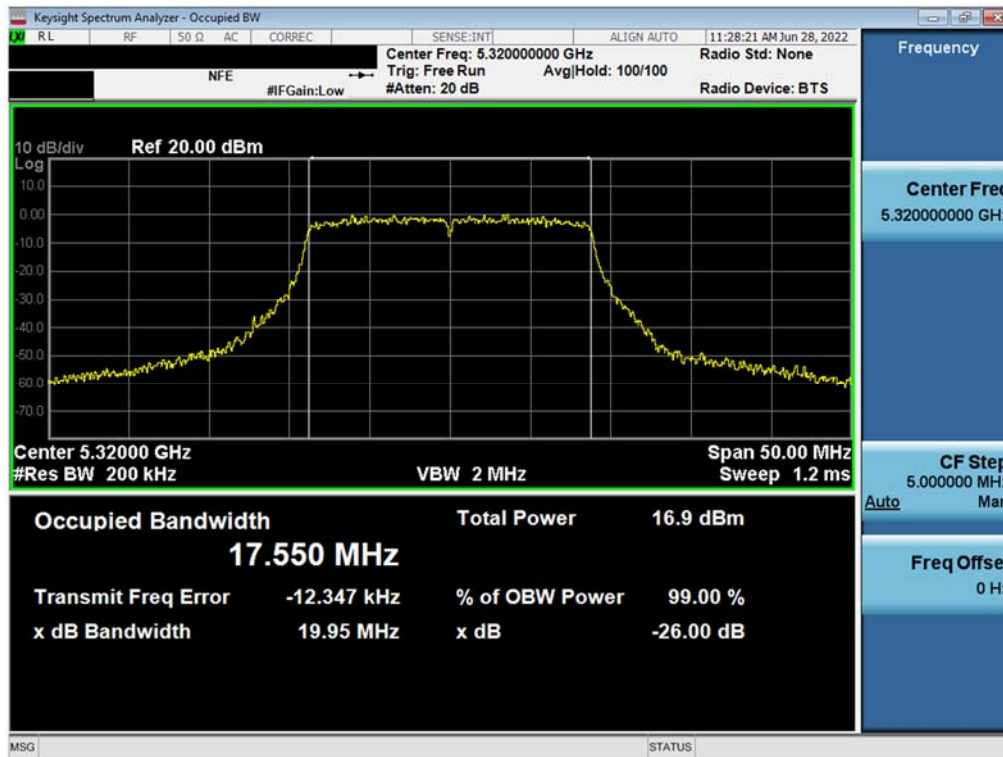


Plot 7-23. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2A) – Ch. 64)

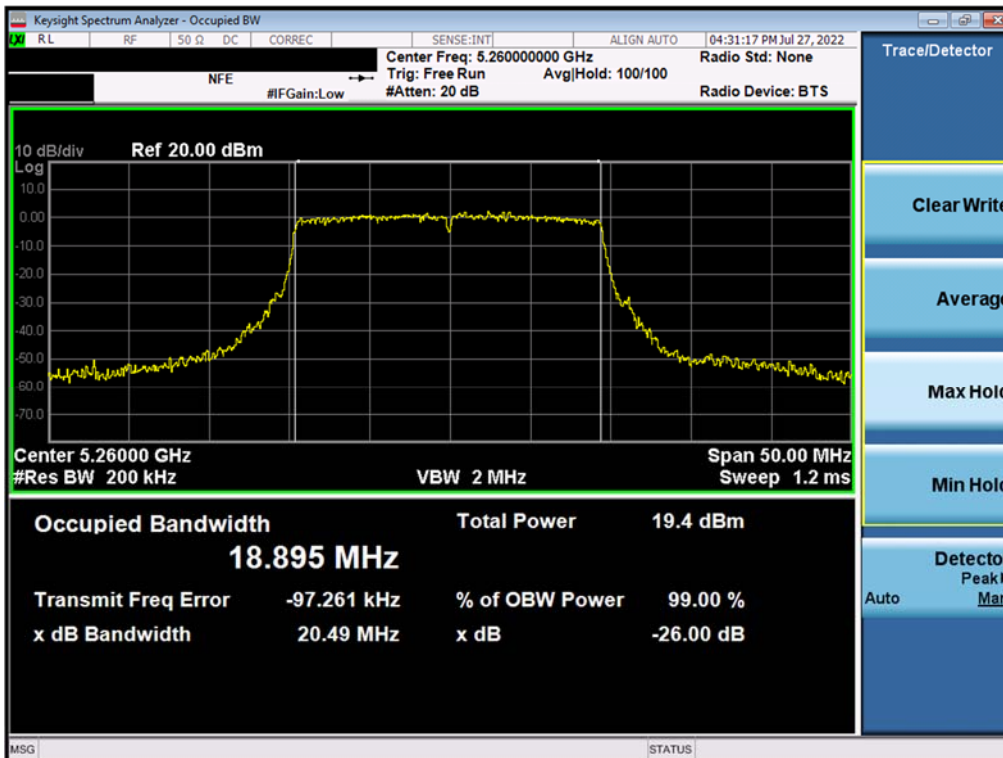


Plot 7-24. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2A) – Ch. 52)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 27 of 209 |

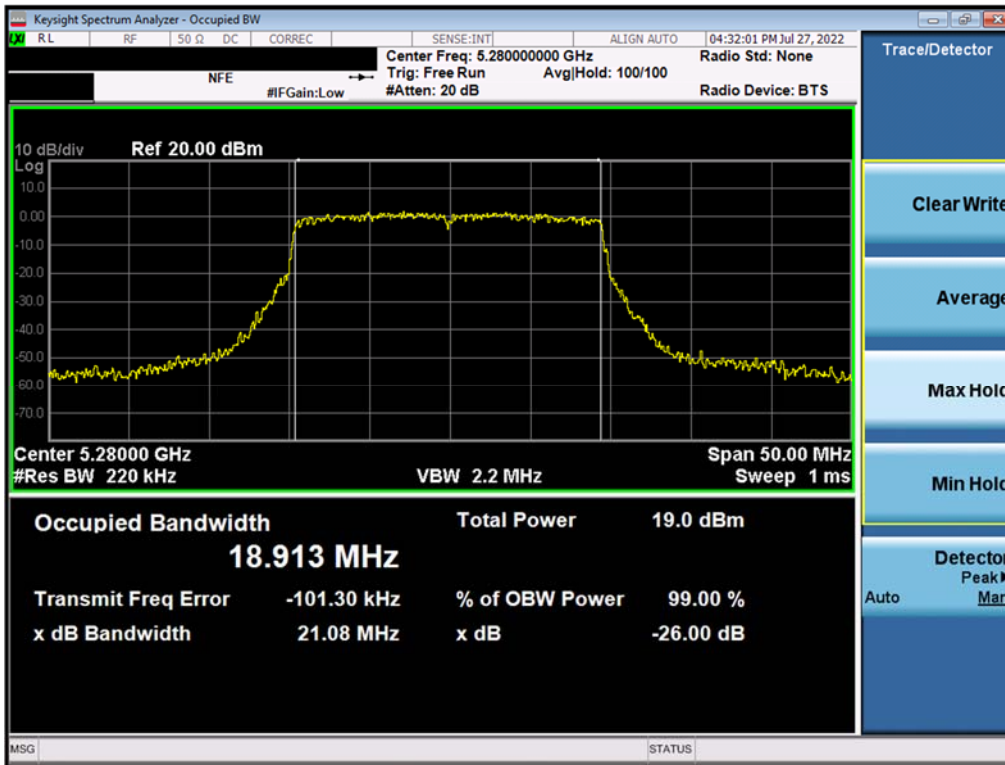


Plot 7-25. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2A) – Ch. 56)

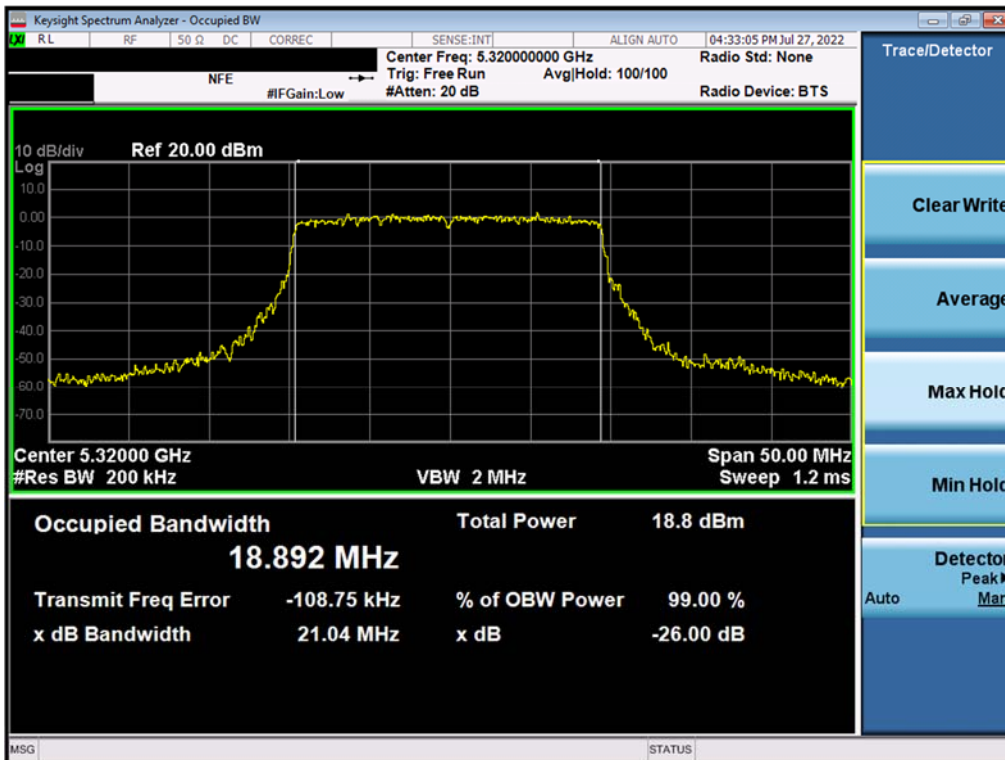


Plot 7-26. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2A) – Ch. 64)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 28 of 209 |

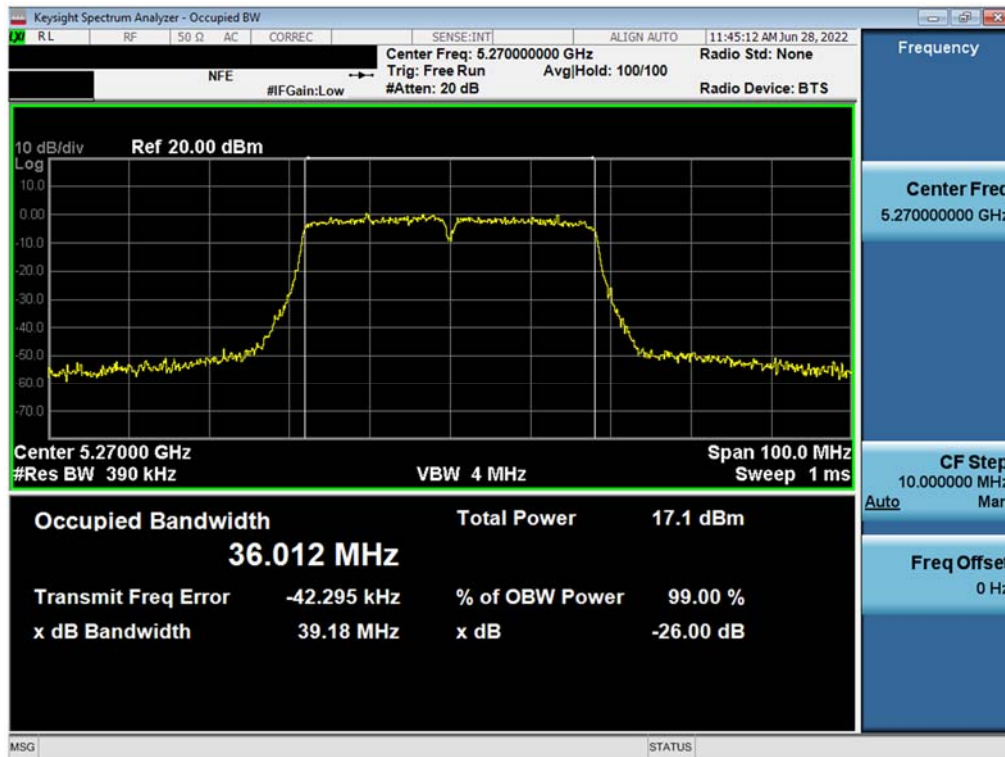


Plot 7-27. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 2A) – Ch. 54)

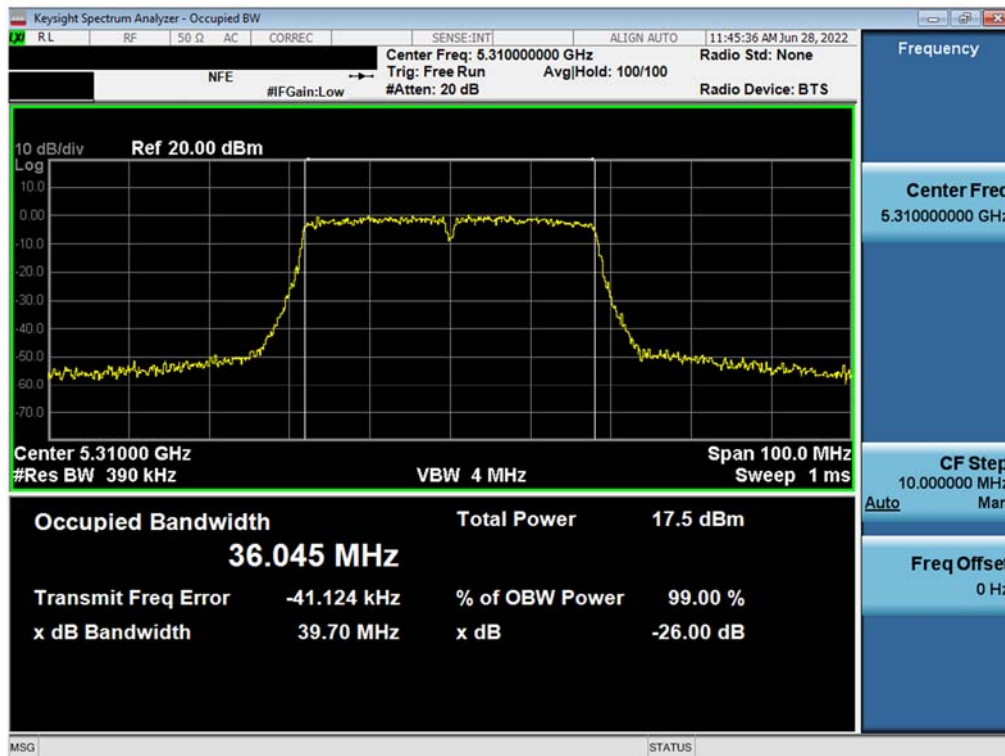


Plot 7-28. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 2A) – Ch. 62)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 29 of 209 |

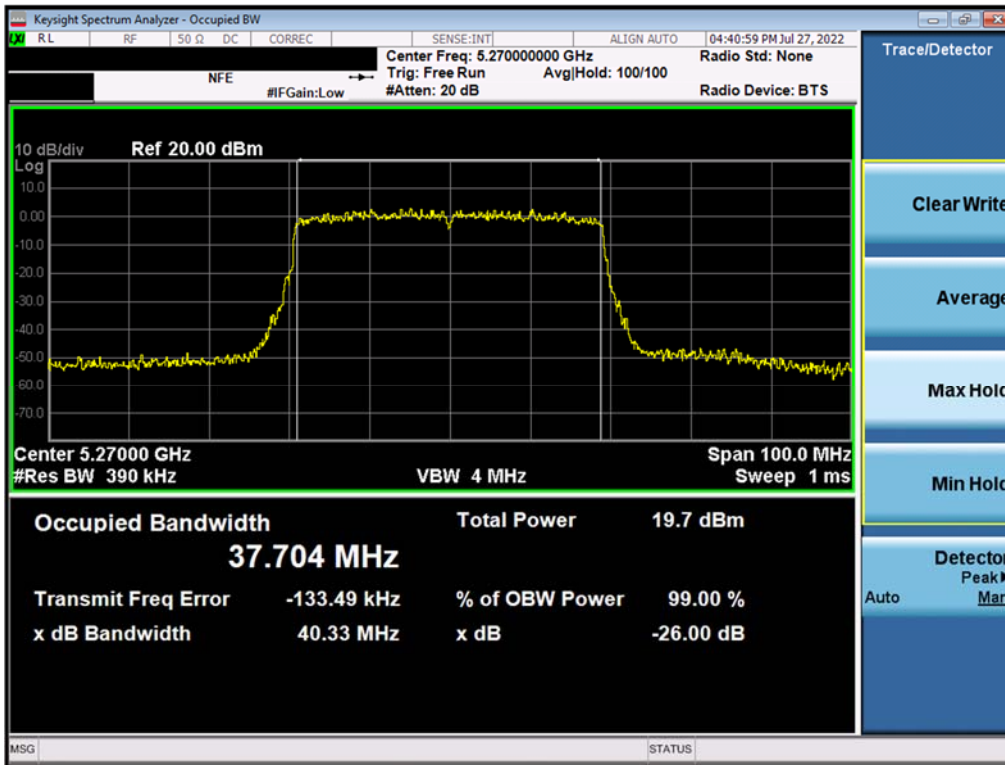

Plot 7-29. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 2A) – Ch. 54)

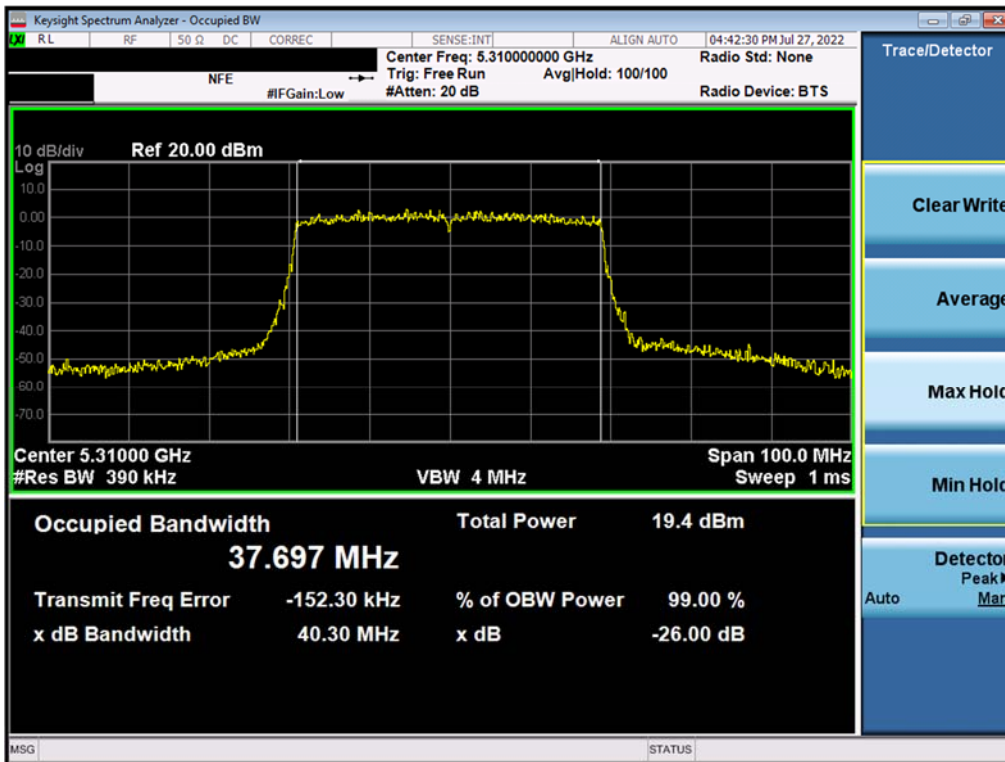


Plot 7-30. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 2A) – Ch. 62)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 30 of 209 |




Plot 7-31. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 80MHz BW (UNII Band 2A) – Ch. 58)

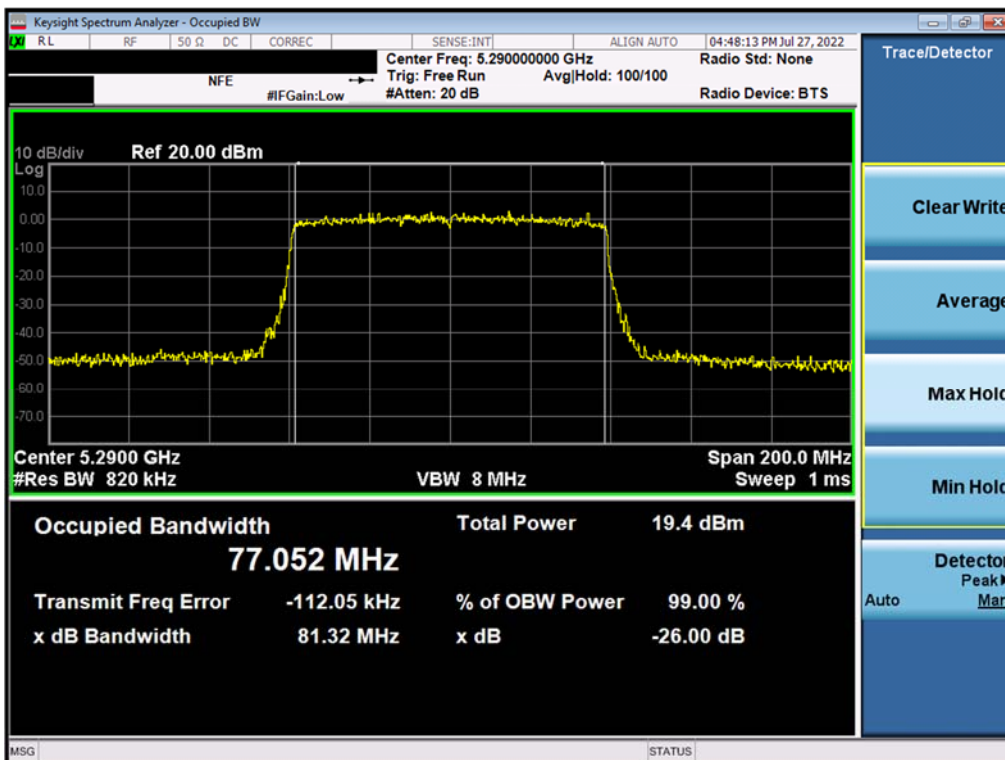

Plot 7-32. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 80MHz BW (UNII Band 2A) – Ch. 58)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 31 of 209 |

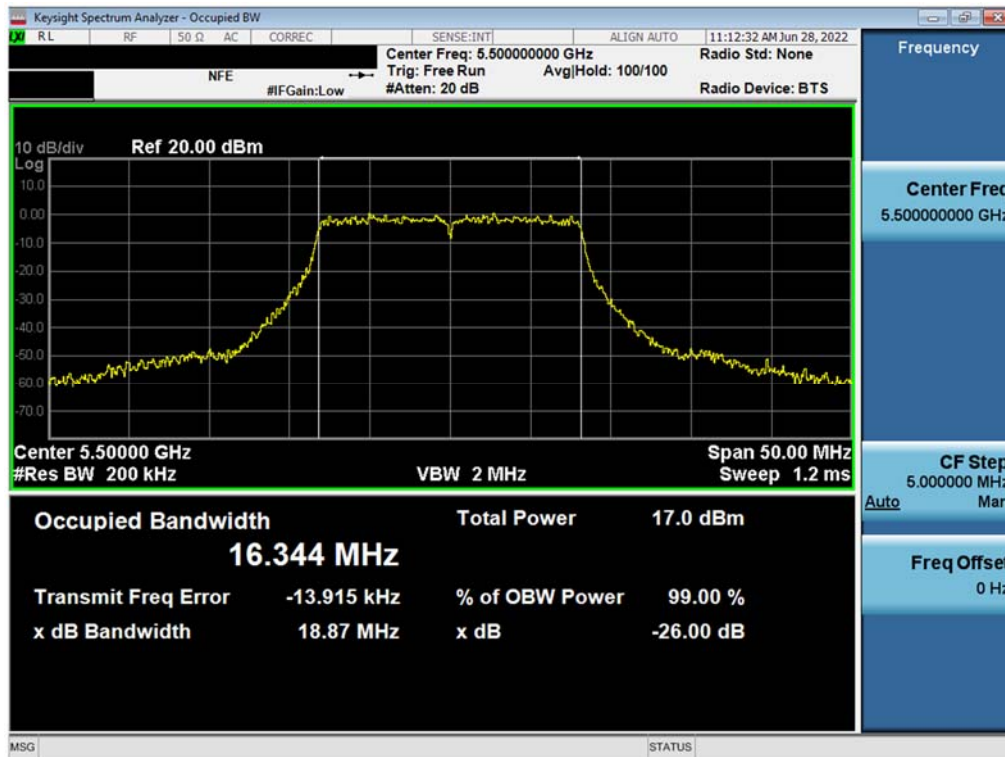


Plot 7-33. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 100)




Plot 7-34. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 120)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 32 of 209 |

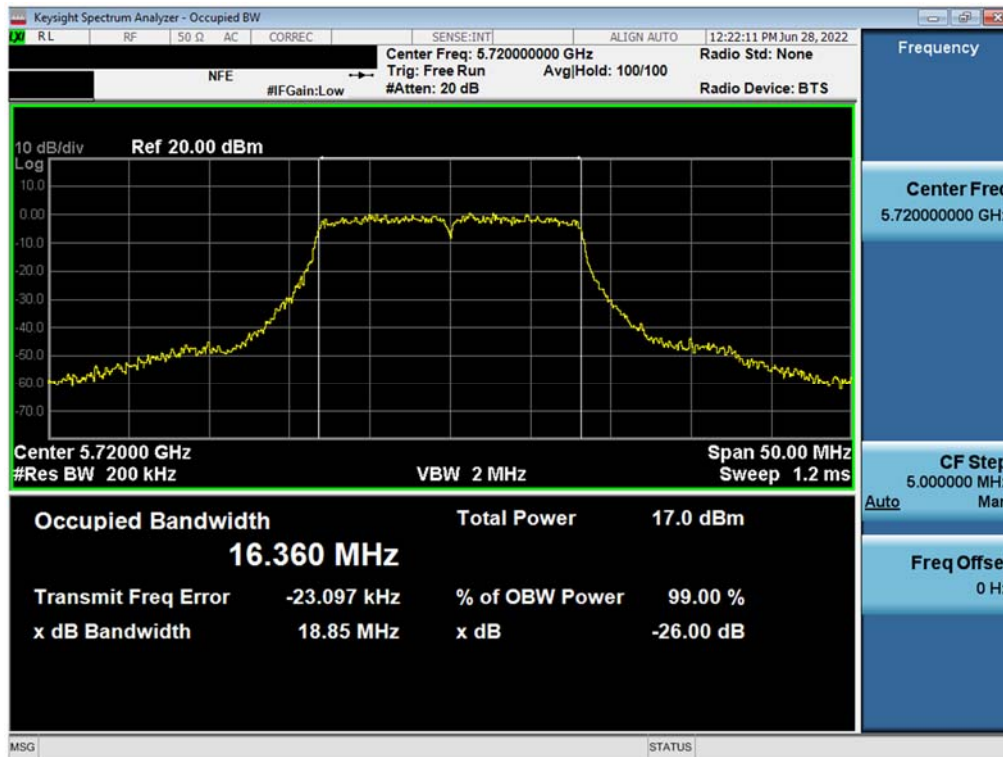

Plot 7-35. 26dB Bandwidth Plot MIMO ANT1 (802.11a (UNII Band 2C) – Ch. 144)

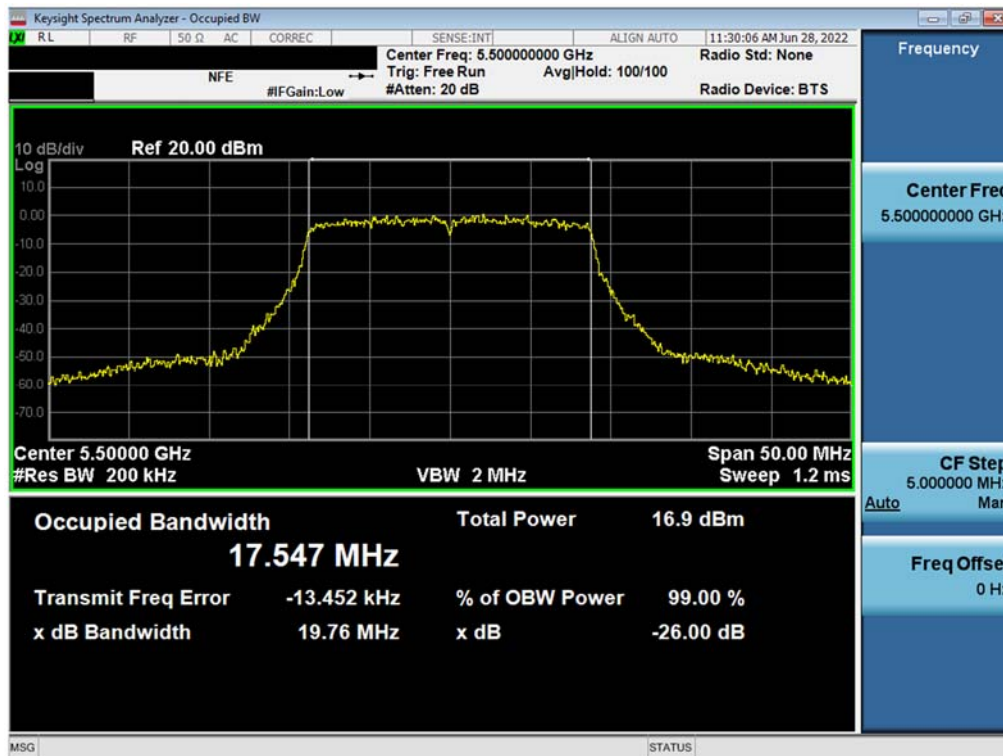


Plot 7-36. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2C) – Ch. 100)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 33 of 209 |




Plot 7-37. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2C) – Ch. 120)

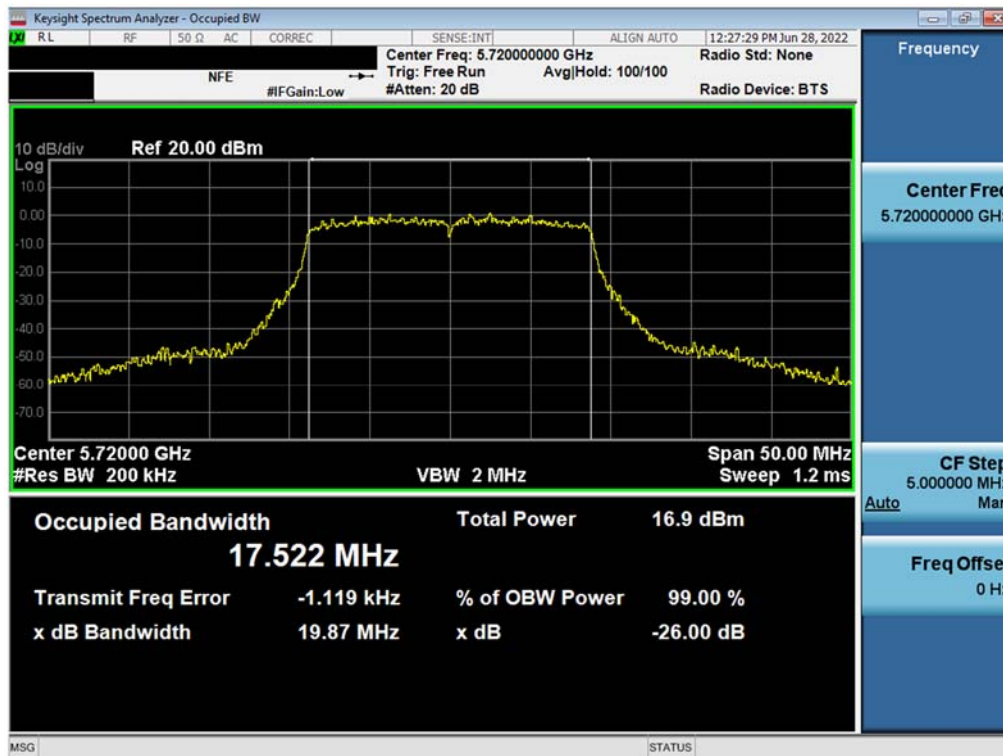


Plot 7-38. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 20MHz BW (UNII Band 2C) – Ch. 144)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 34 of 209 |

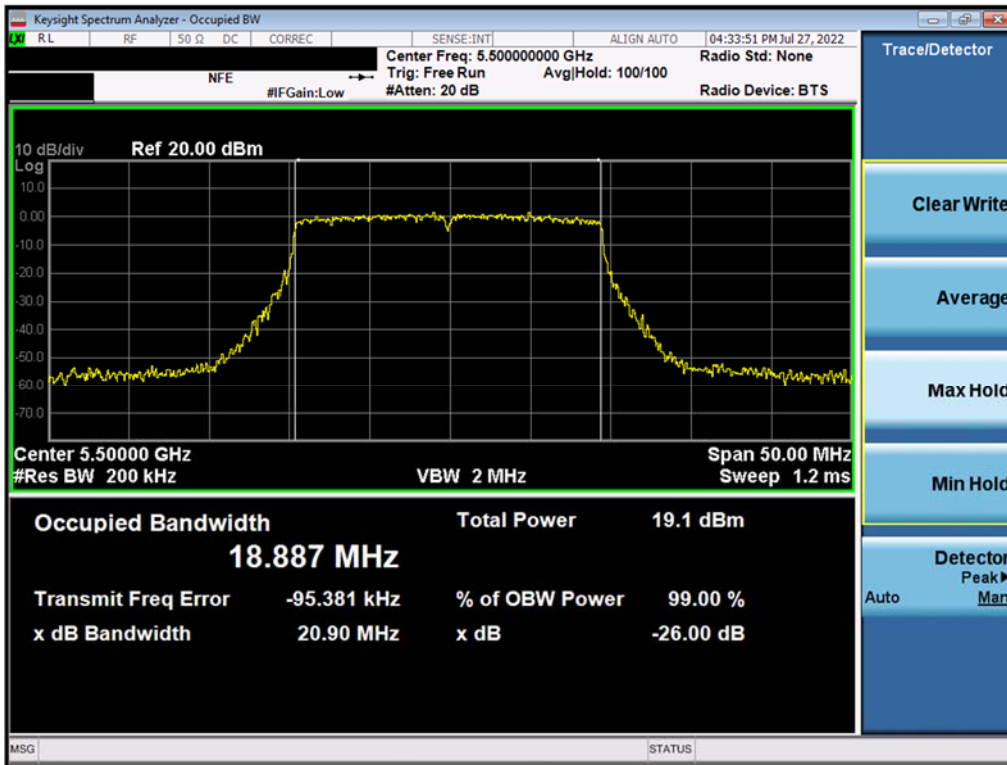


Plot 7-39. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2C) – Ch. 100)

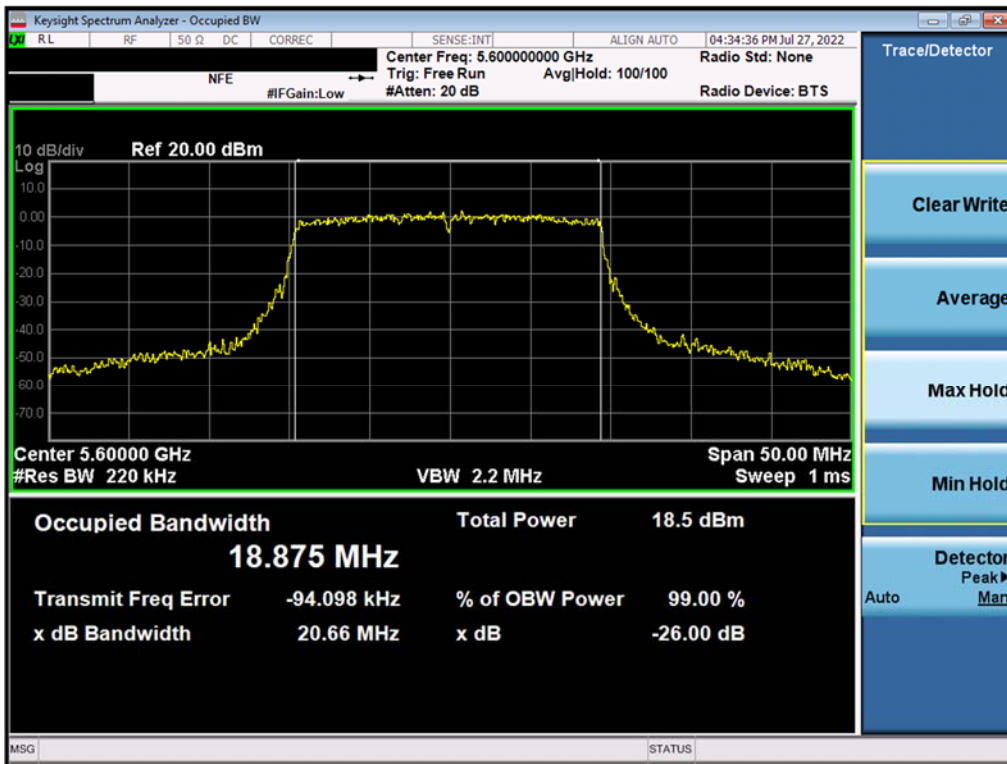


Plot 7-40. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2C) – Ch. 120)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 35 of 209 |

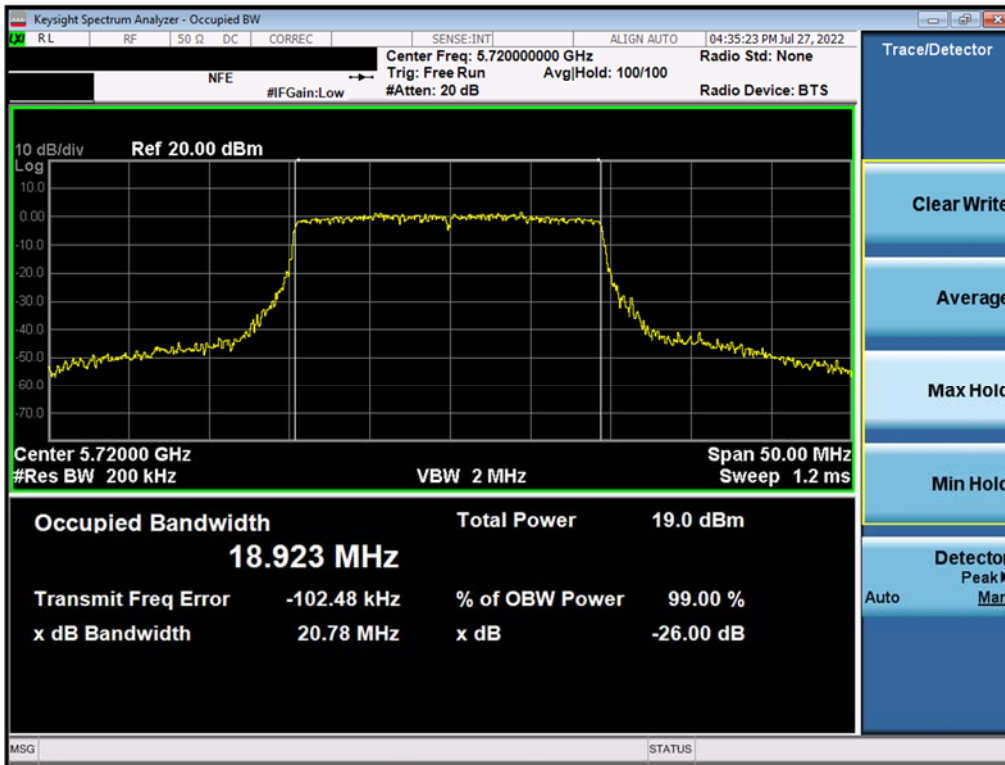


Plot 7-41. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 20MHz BW (UNII Band 2C) – Ch. 144)

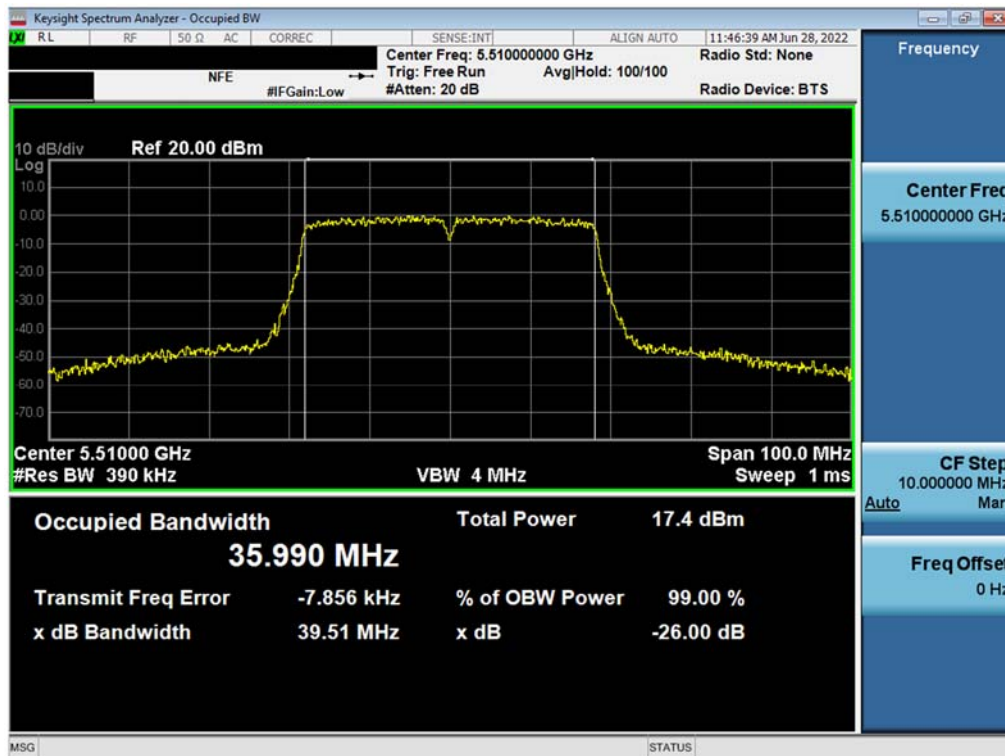


Plot 7-42. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 2C) – Ch. 102)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 36 of 209 |

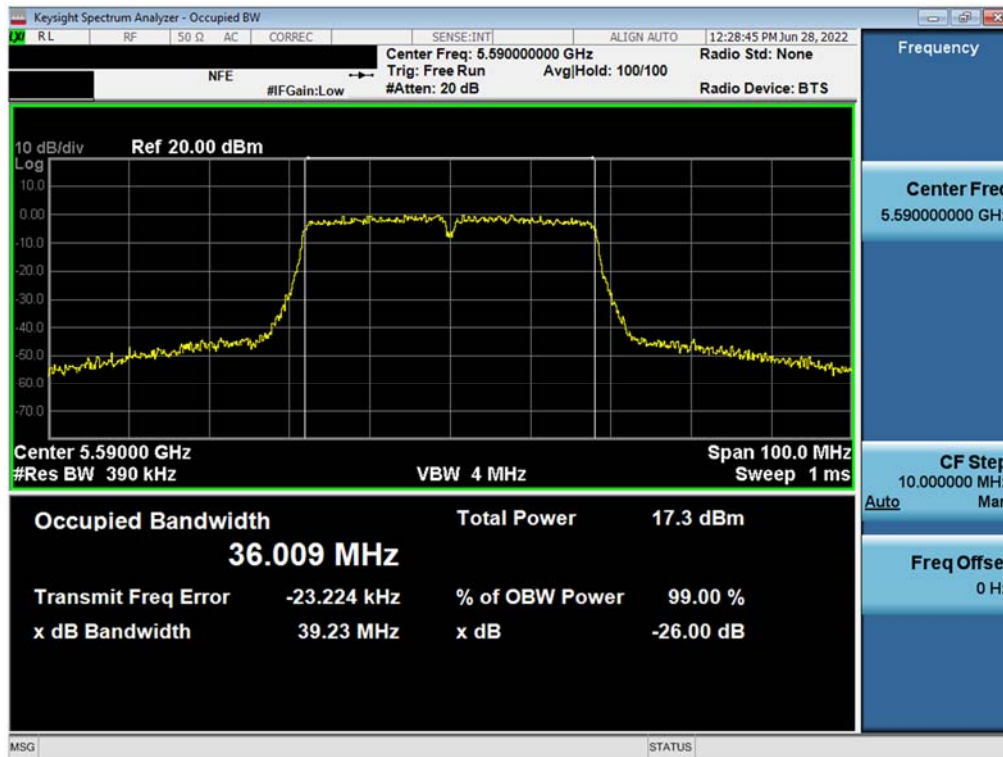


Plot 7-43. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 2C) – Ch. 118)

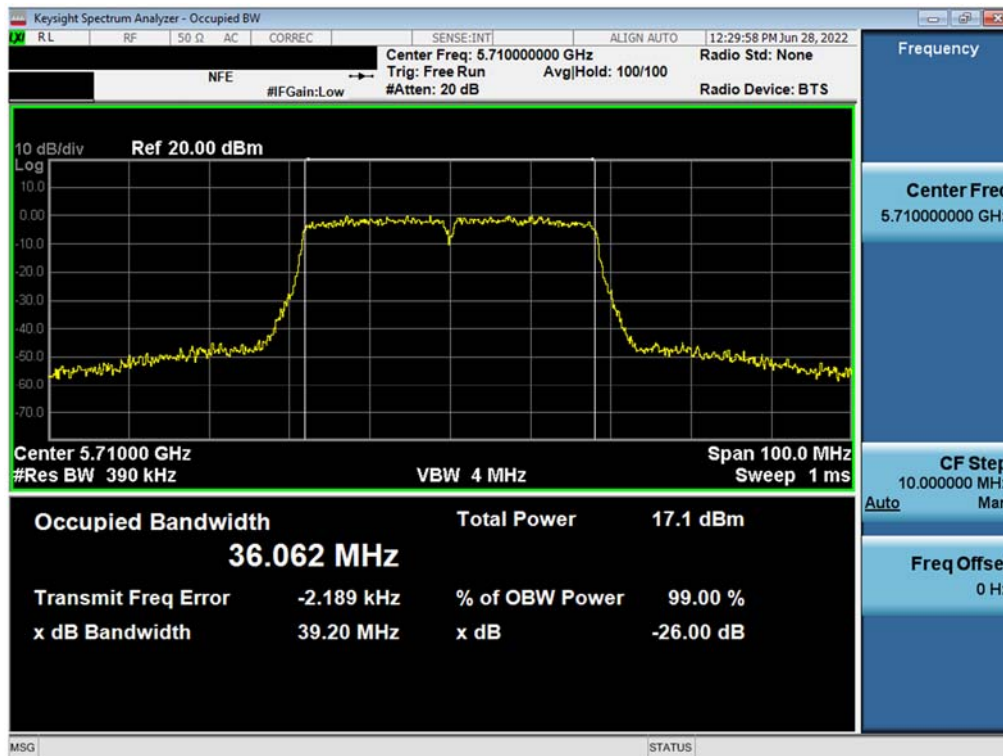


Plot 7-44. 26dB Bandwidth Plot MIMO ANT1 (802.11n – 40MHz BW (UNII Band 2C) – Ch. 142)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 37 of 209 |

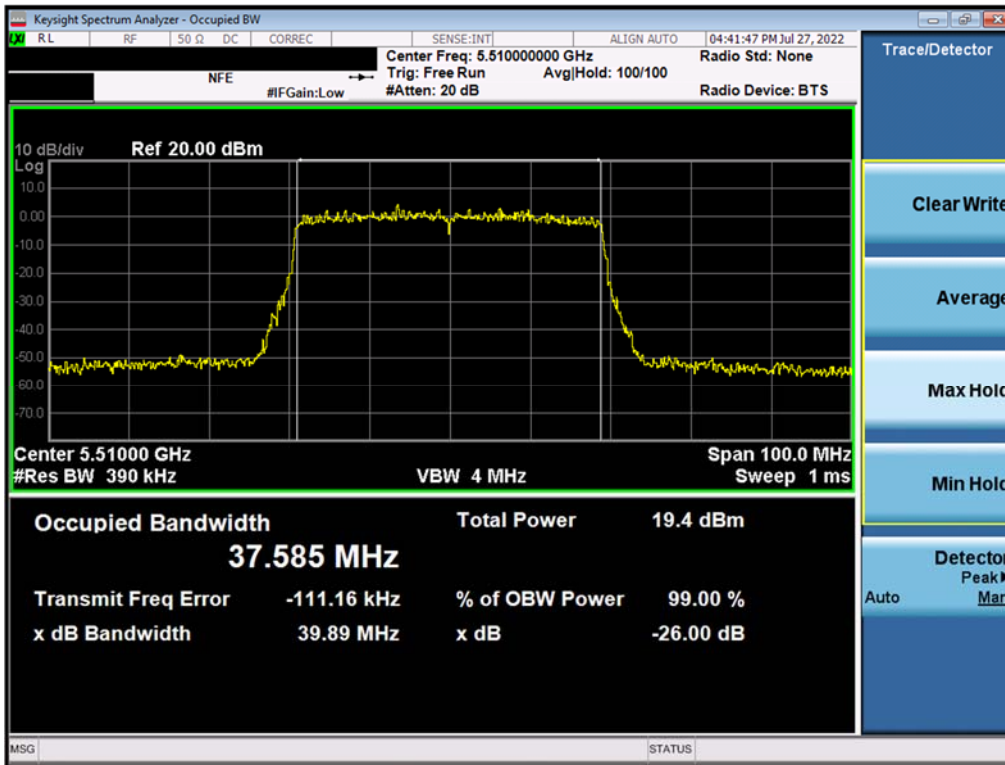


Plot 7-45. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 2C) – Ch. 102)

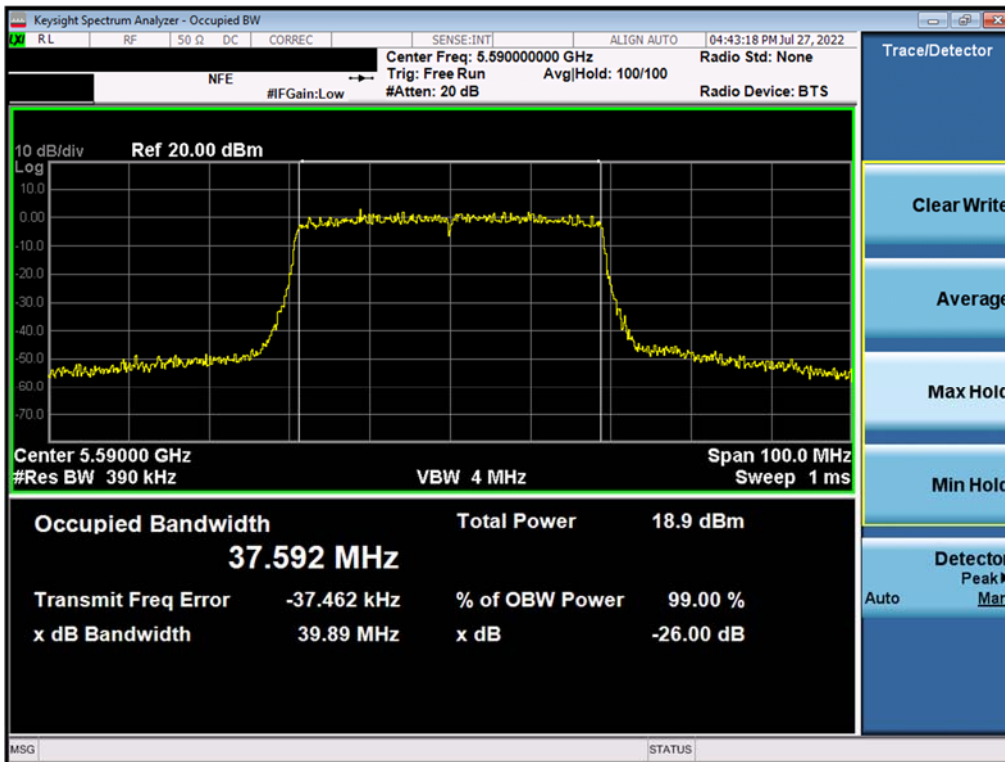


Plot 7-46. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 2C) – Ch. 118)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 38 of 209 |

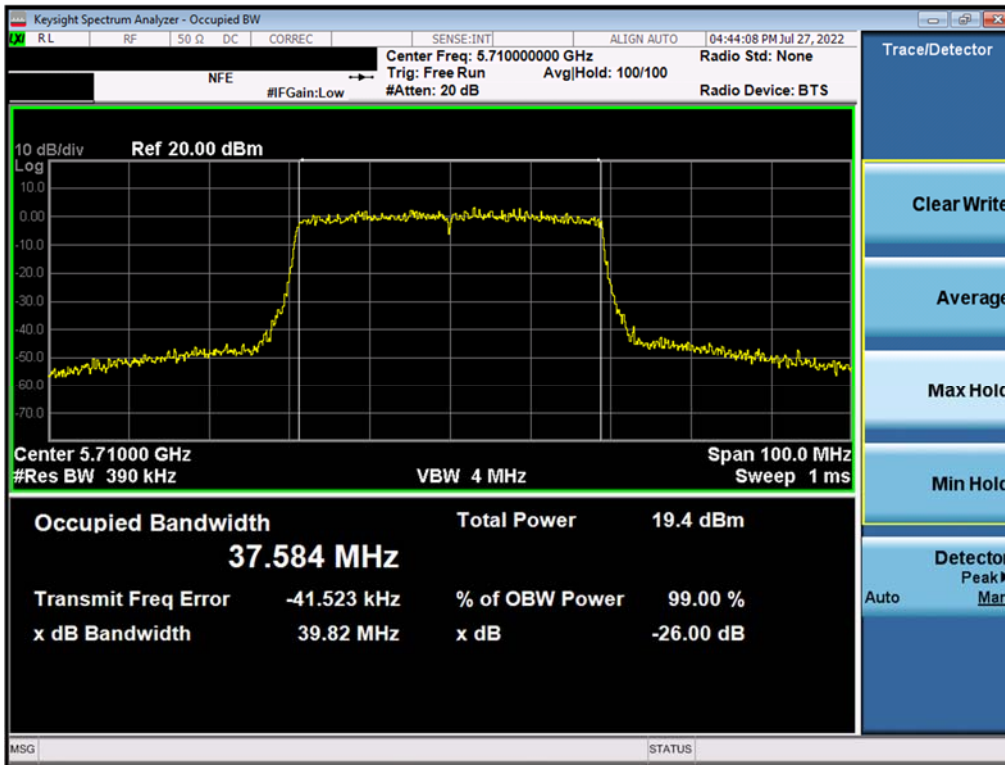


Plot 7-47. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 40MHz BW (UNII Band 2C) – Ch. 142)

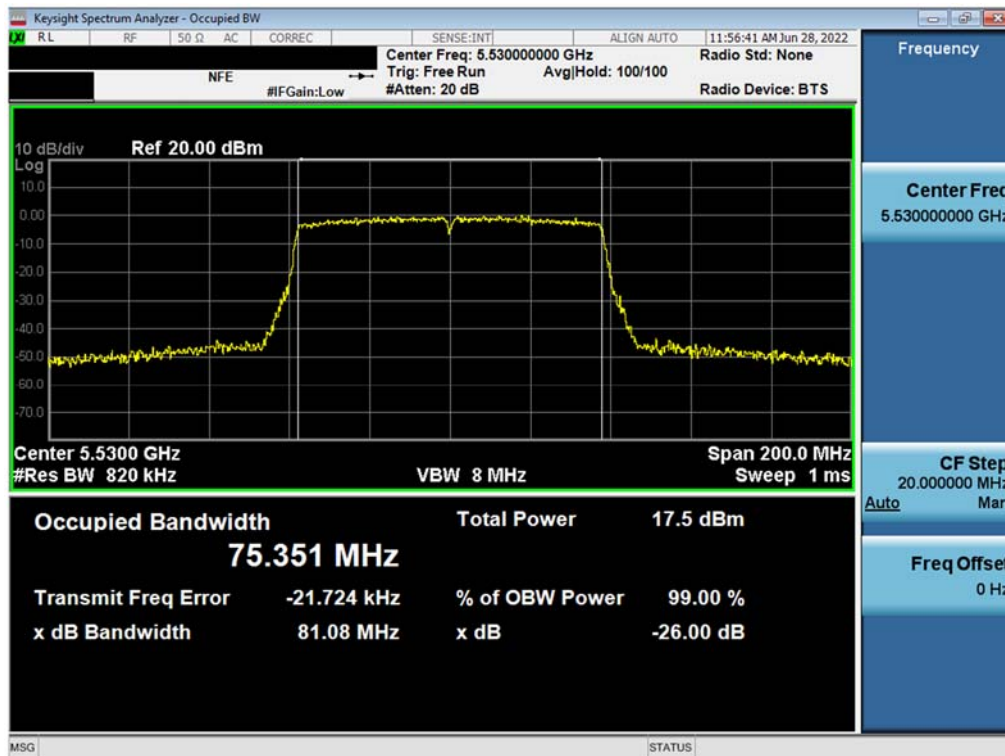

Plot 7-48. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 80MHz BW (UNII Band 2C) – Ch. 106)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 39 of 209 |

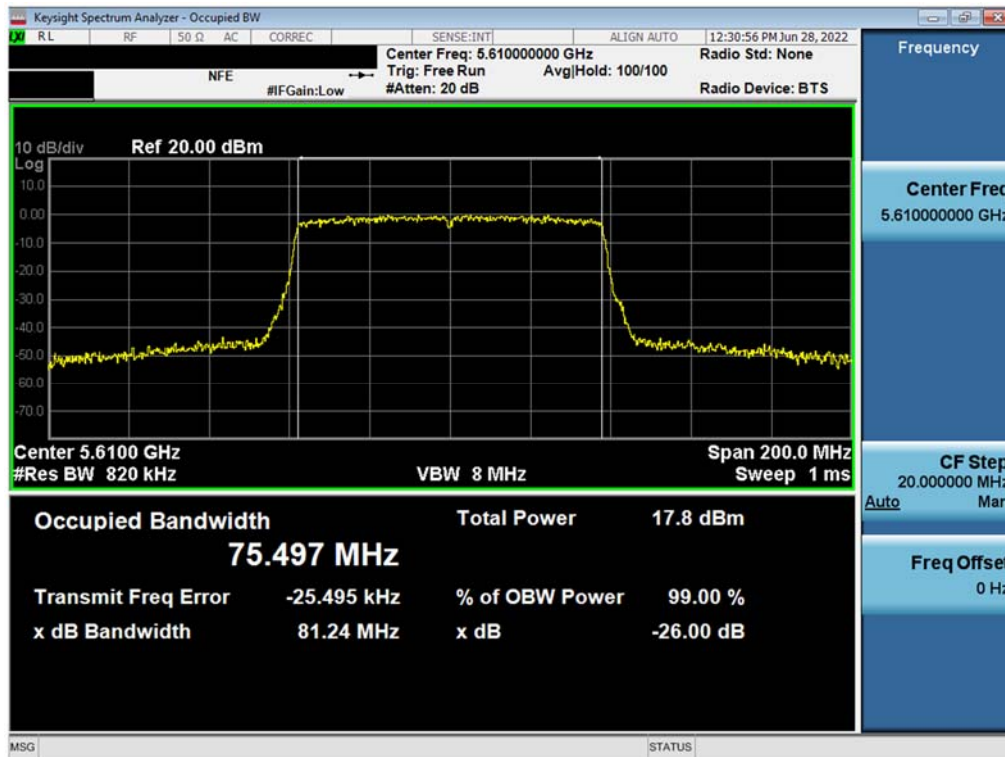


Plot 7-49. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 80MHz BW (UNII Band 2C) – Ch. 122)




Plot 7-50. 26dB Bandwidth Plot MIMO ANT1 (802.11ac – 80MHz BW (UNII Band 2C) – Ch. 138)

| MEASUREMENT REPORT (CERTIFICATION) | | | Approved by: Technical Manager |
|------------------------------------|-----------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 40 of 209 |

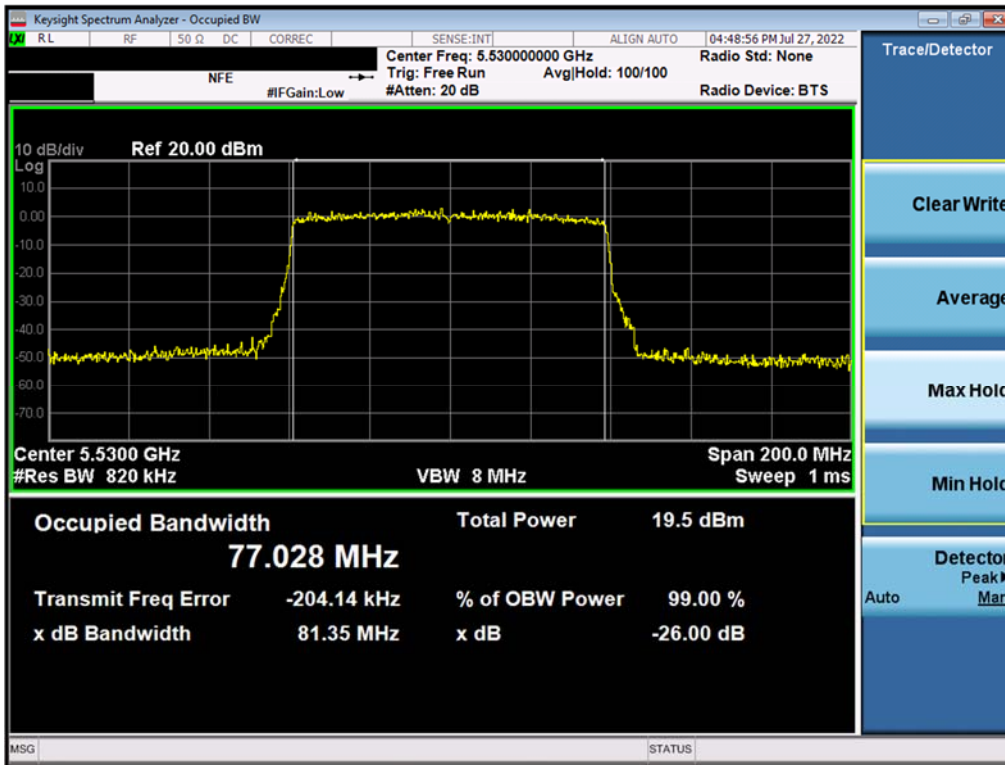

Plot 7-51. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 80MHz BW (UNII Band 2C) – Ch. 106)

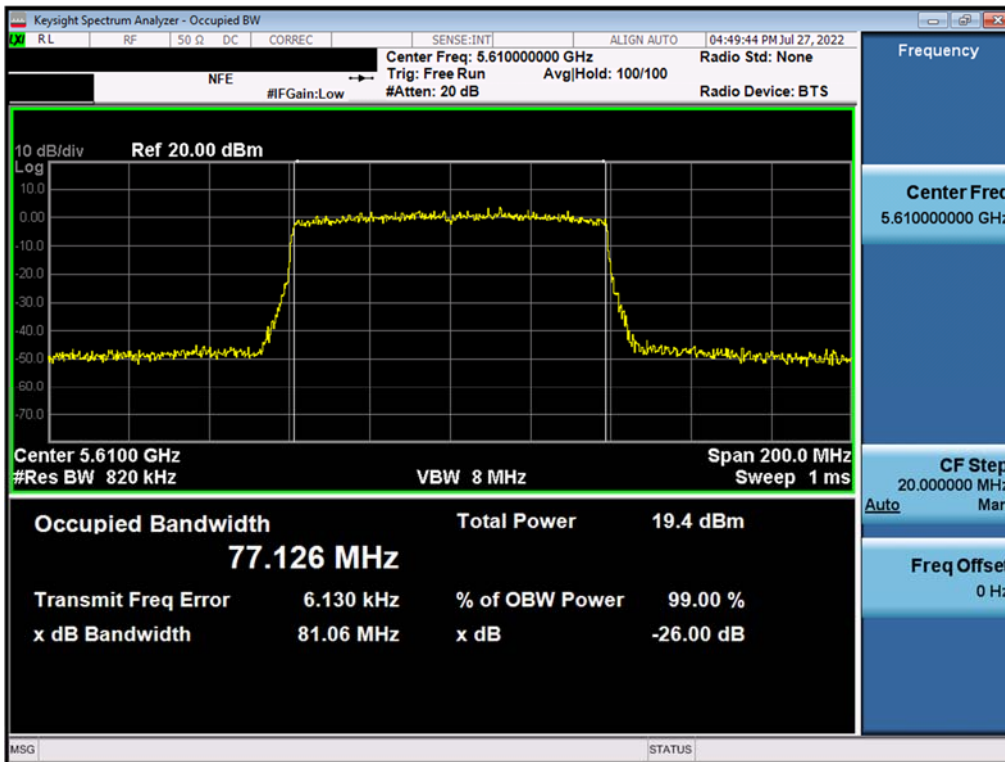

Plot 7-52. 26dB Bandwidth Plot MIMO ANT1 (802.11ax – 80MHz BW (UNII Band 2C) – Ch. 122)

| | | | |
|---|---------------------------------------|-------------------------------|-----------------------------------|
| FCC ID: PY7-58692W | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Technical Manager |
| Test Report S/N: 1M2207200079-10.PY7 | Test Dates: 6/3/2022-7/29/2022 | EUT Type: Portable Handset | Page 41 of 209 |