



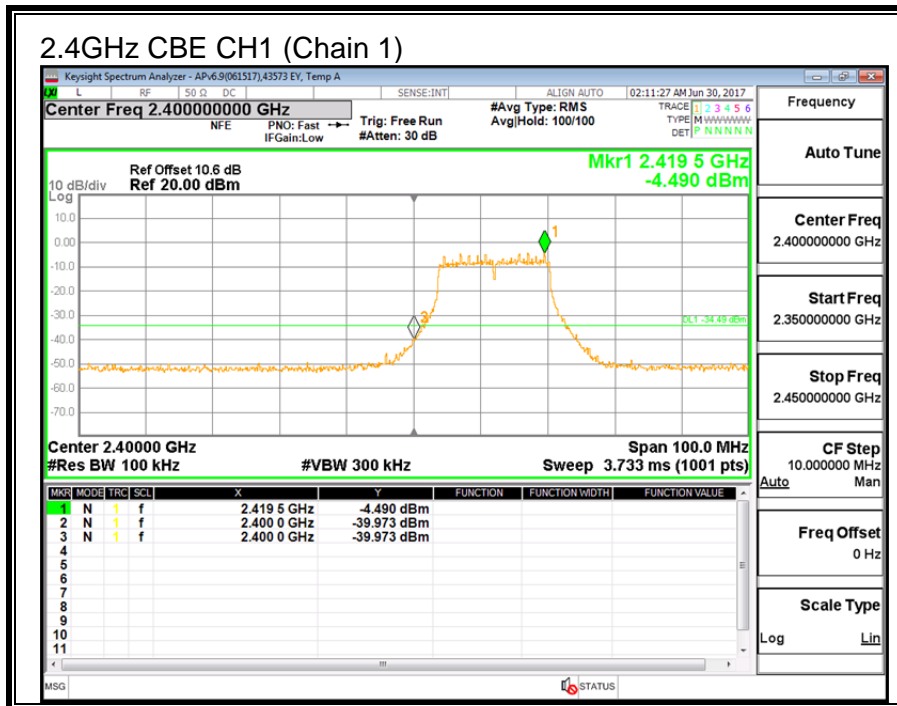
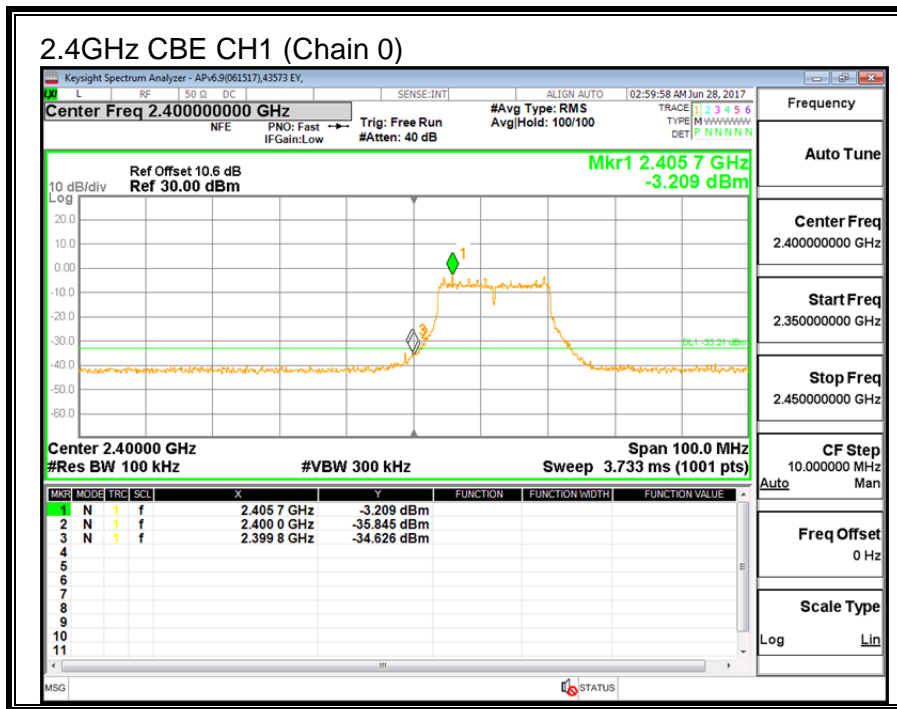
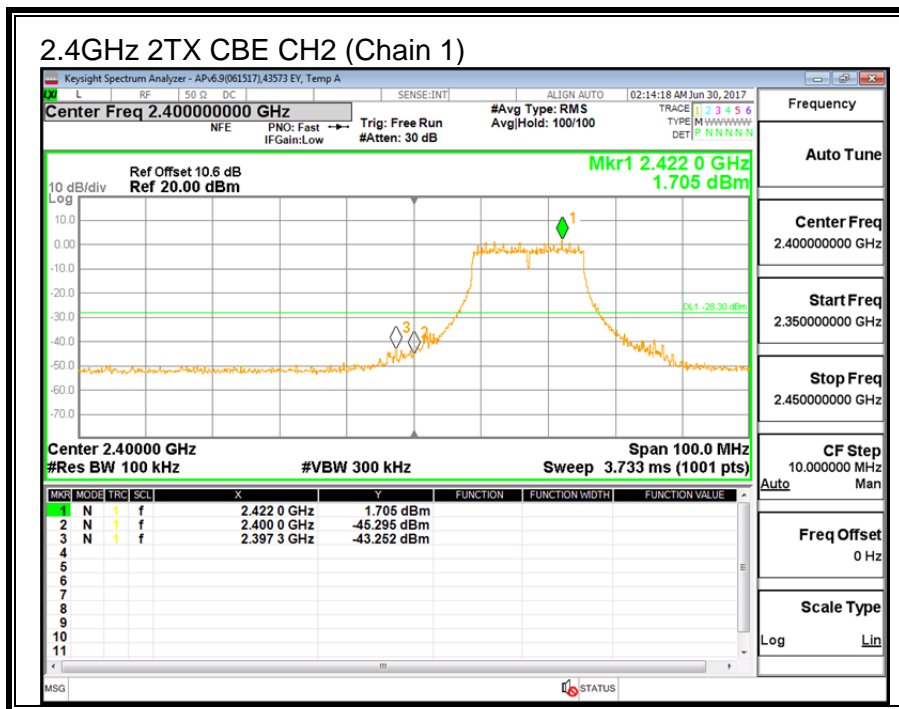
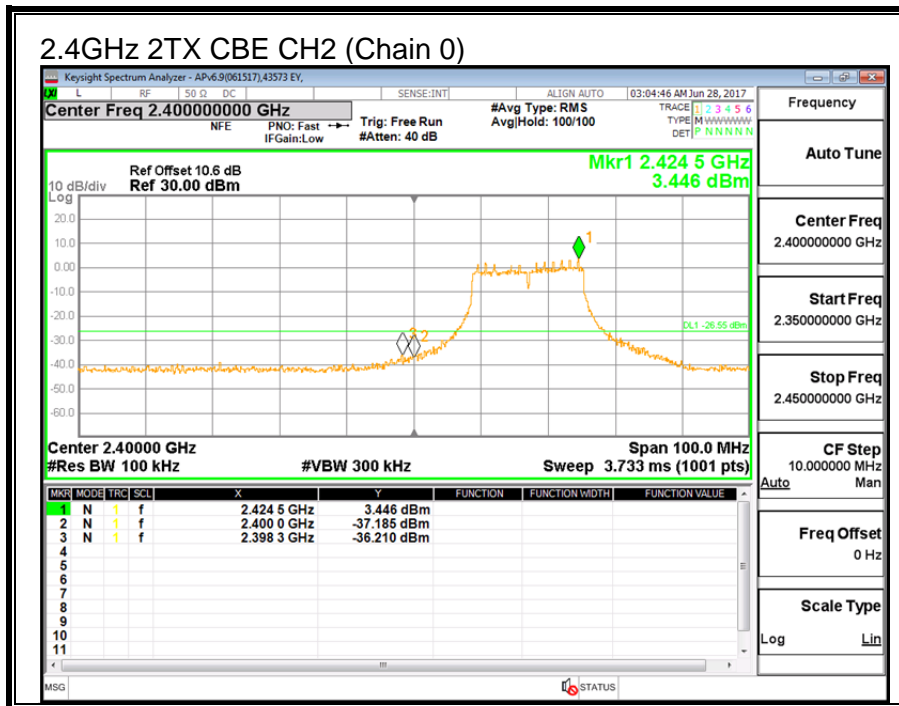




9.3.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS


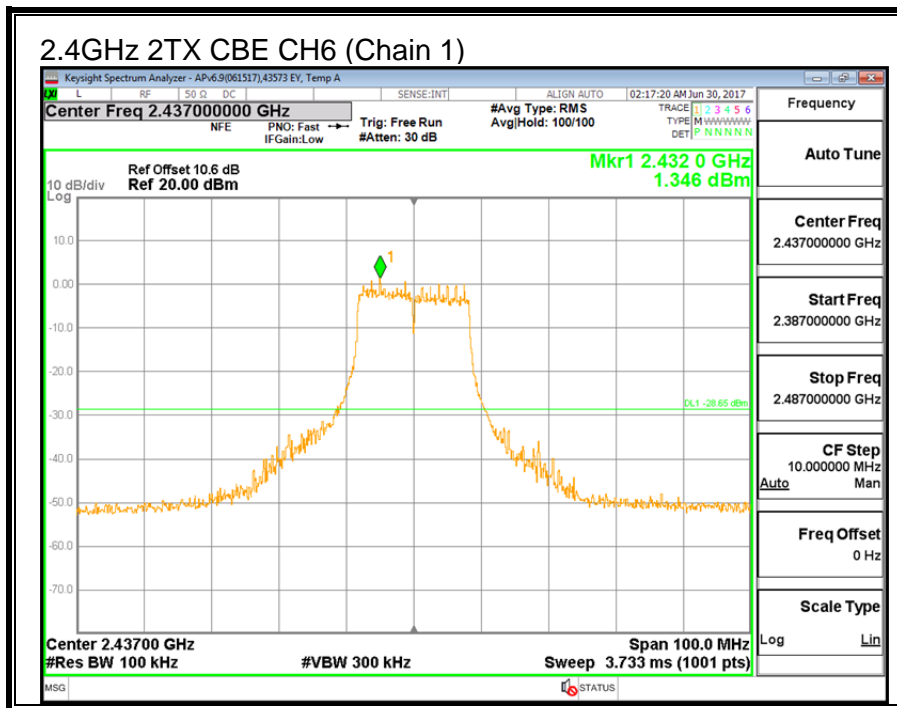



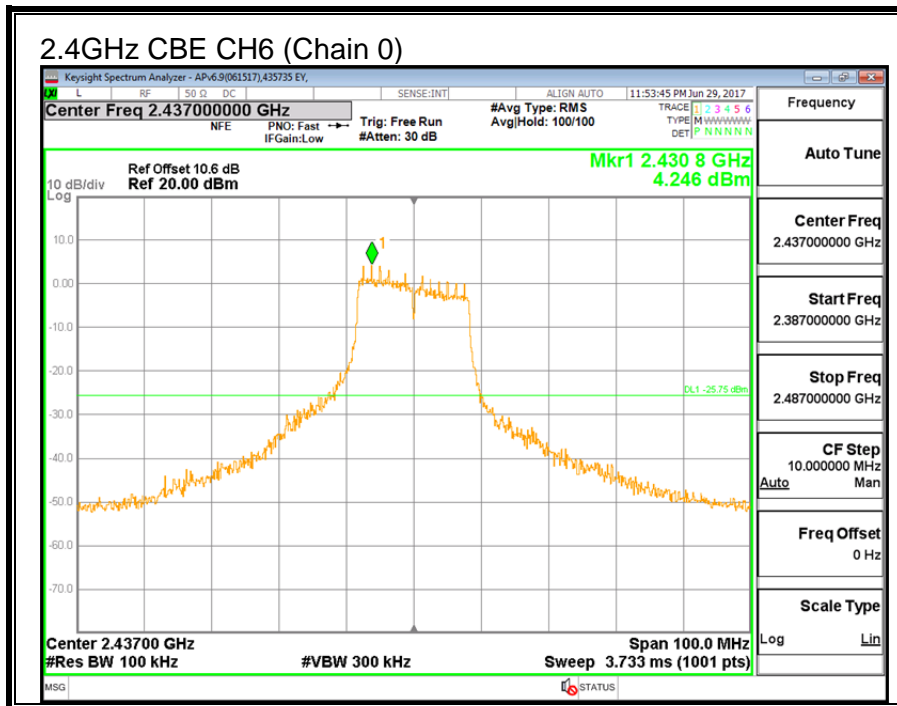



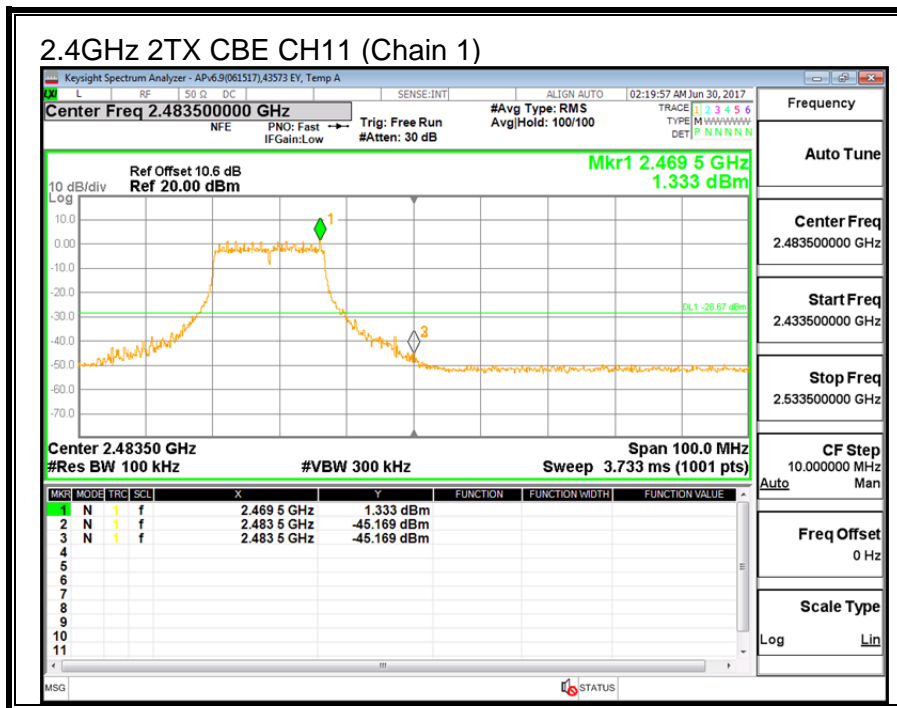



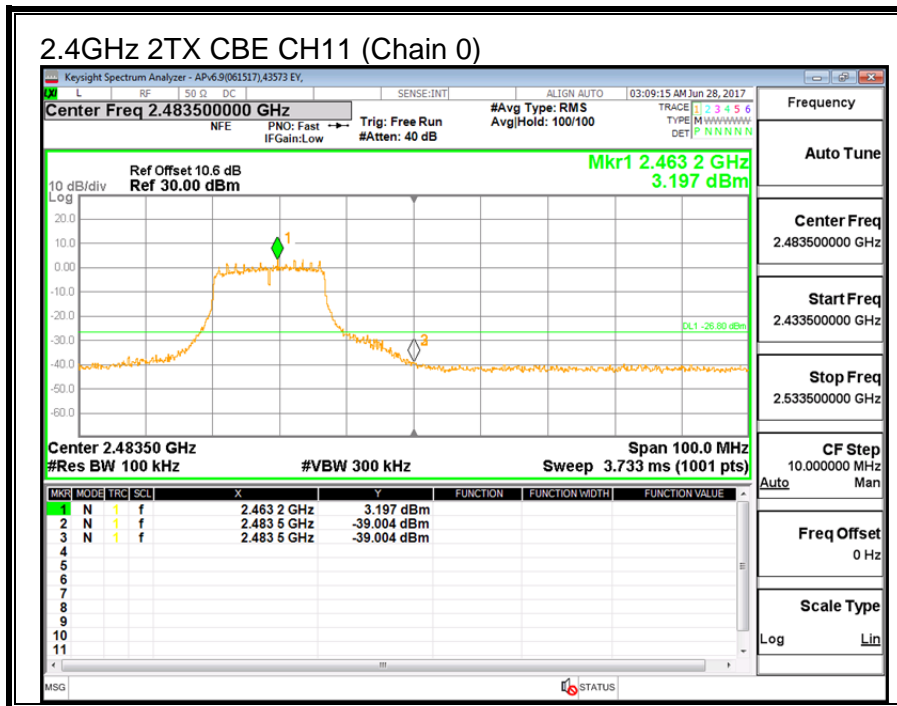


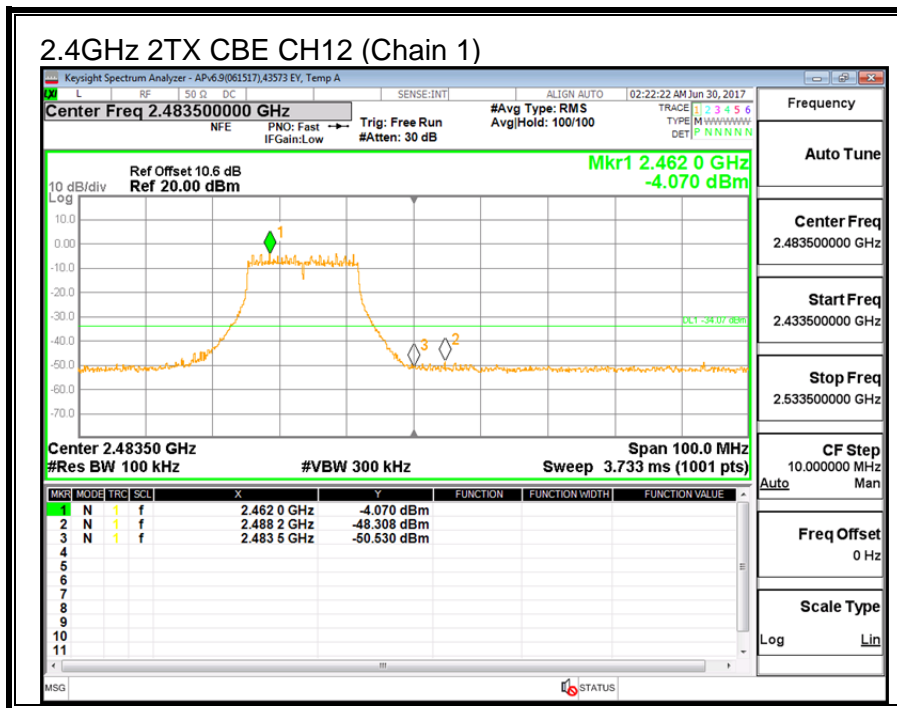
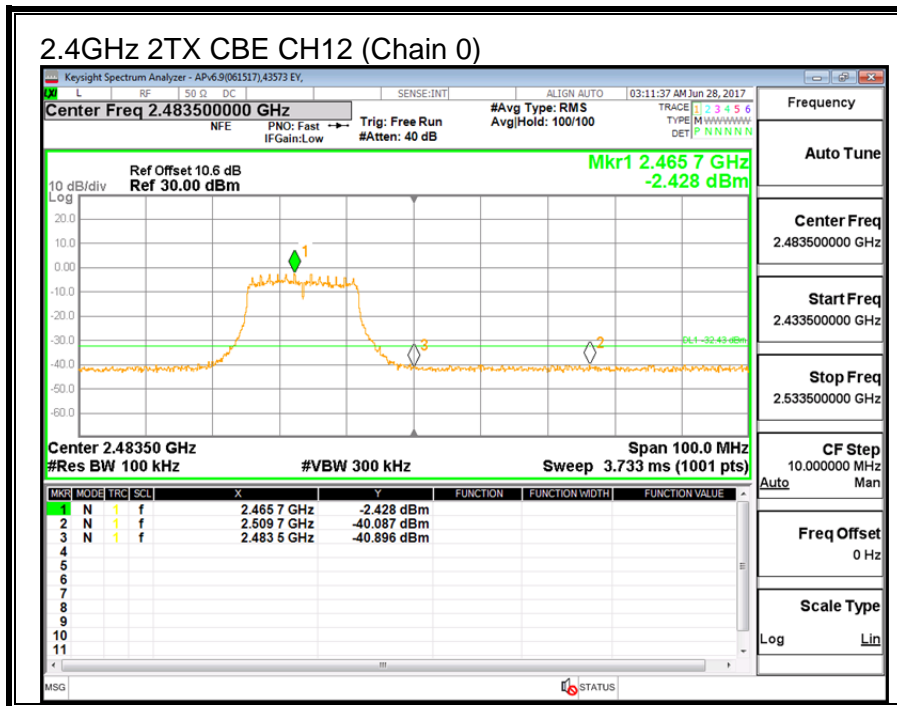


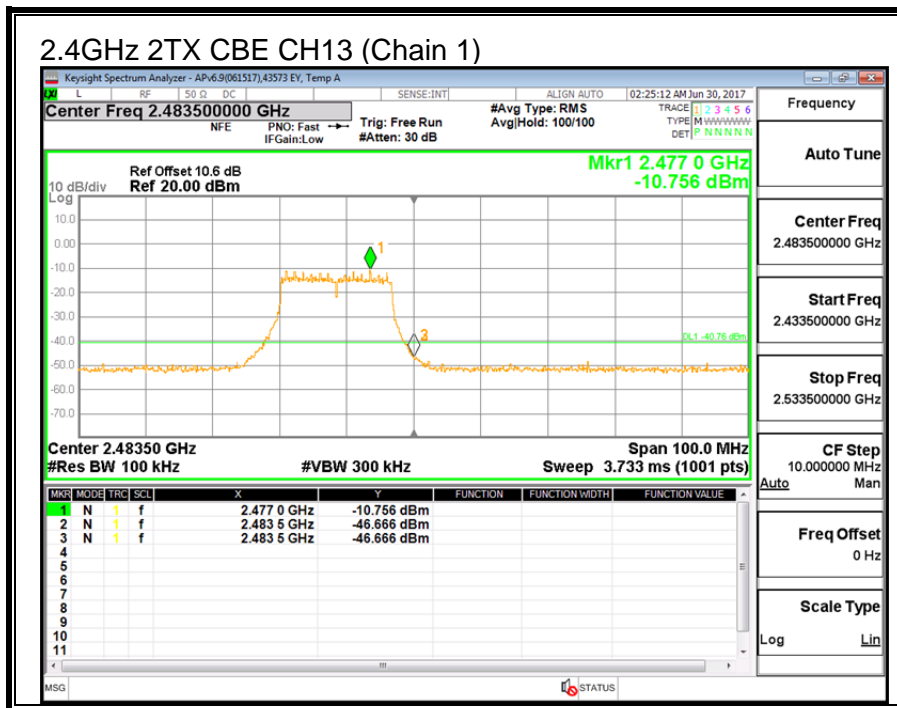
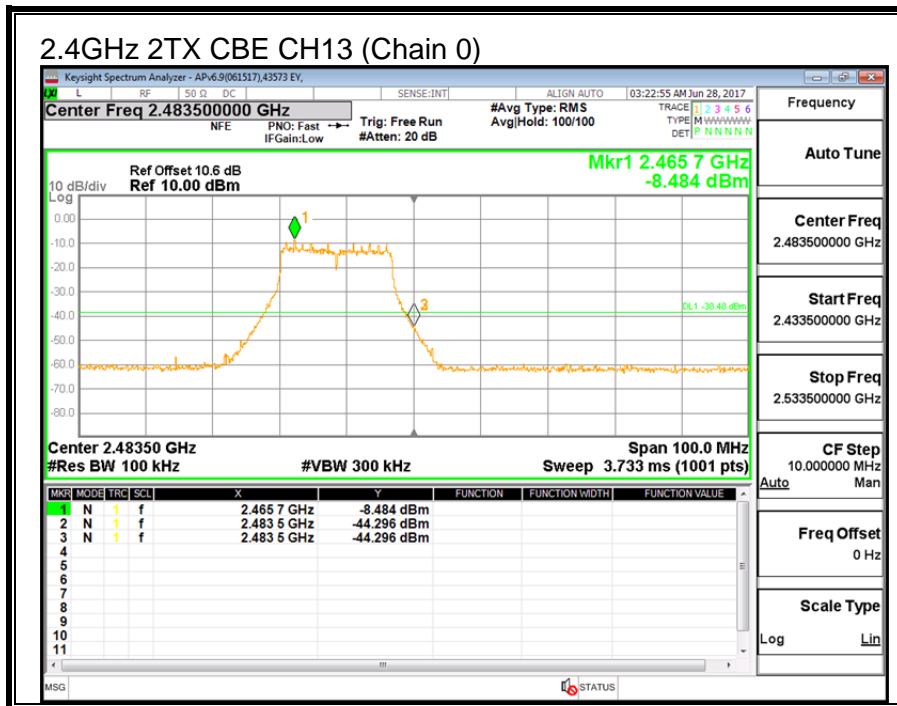


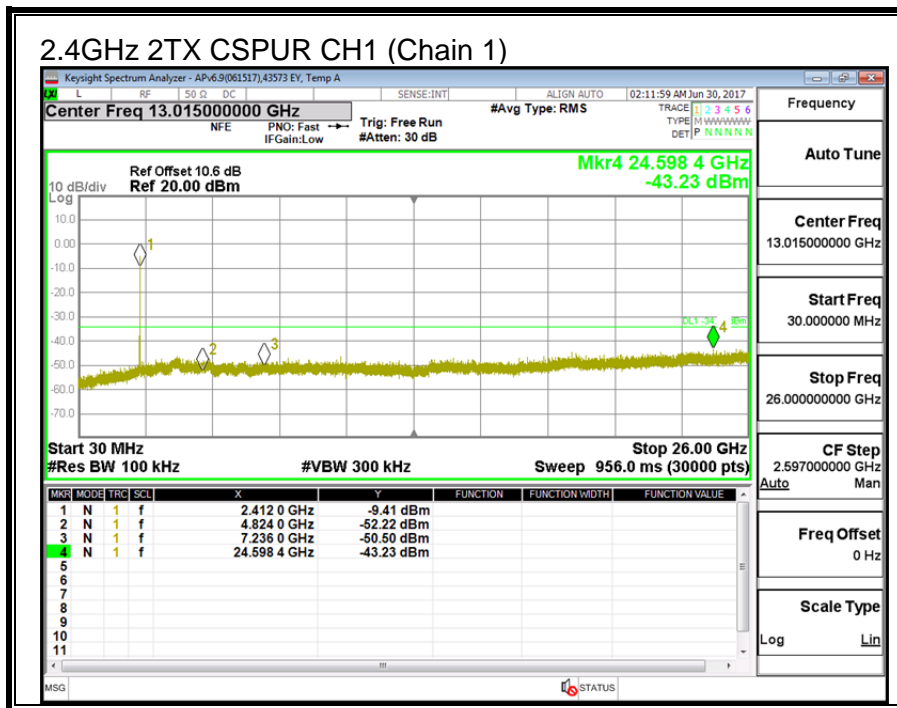
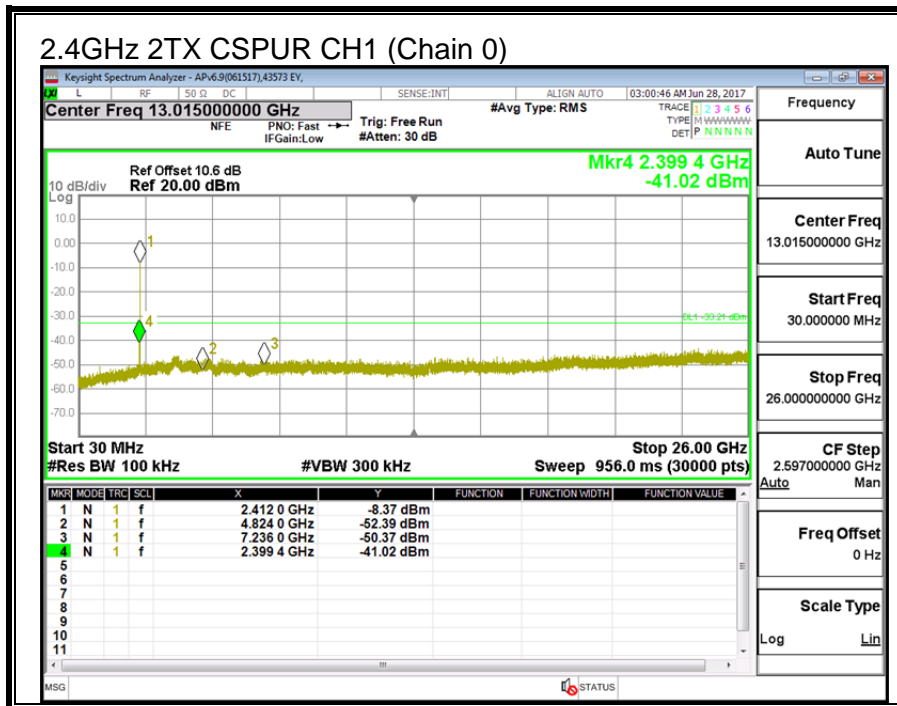


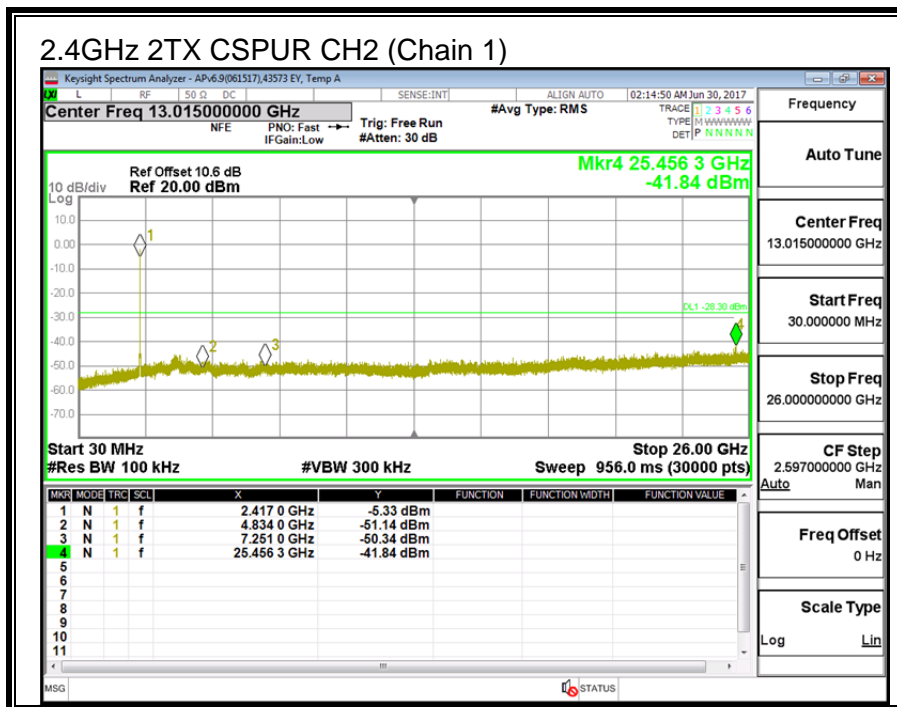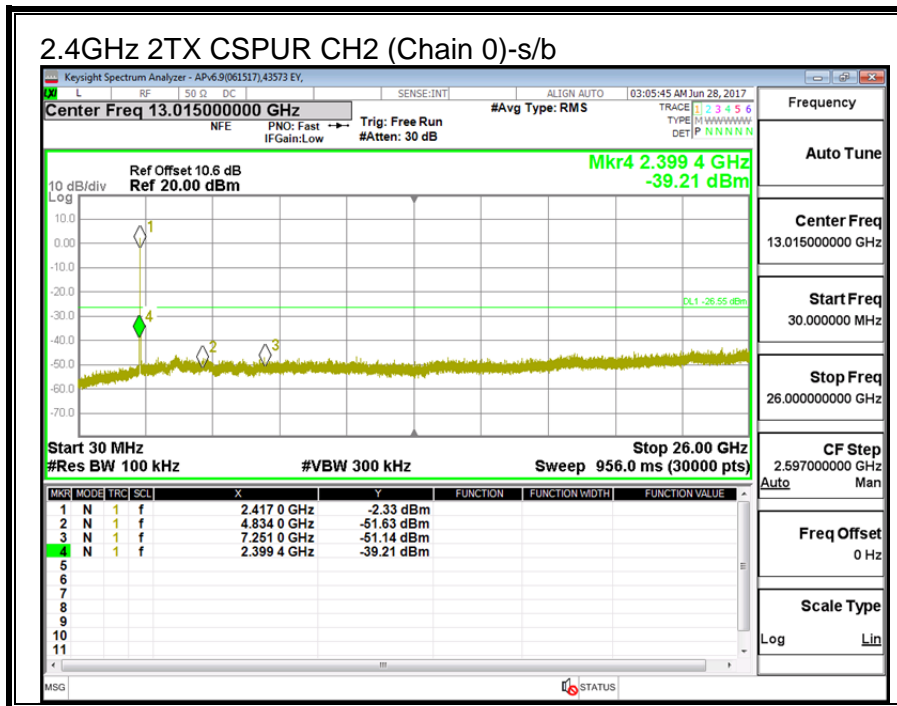

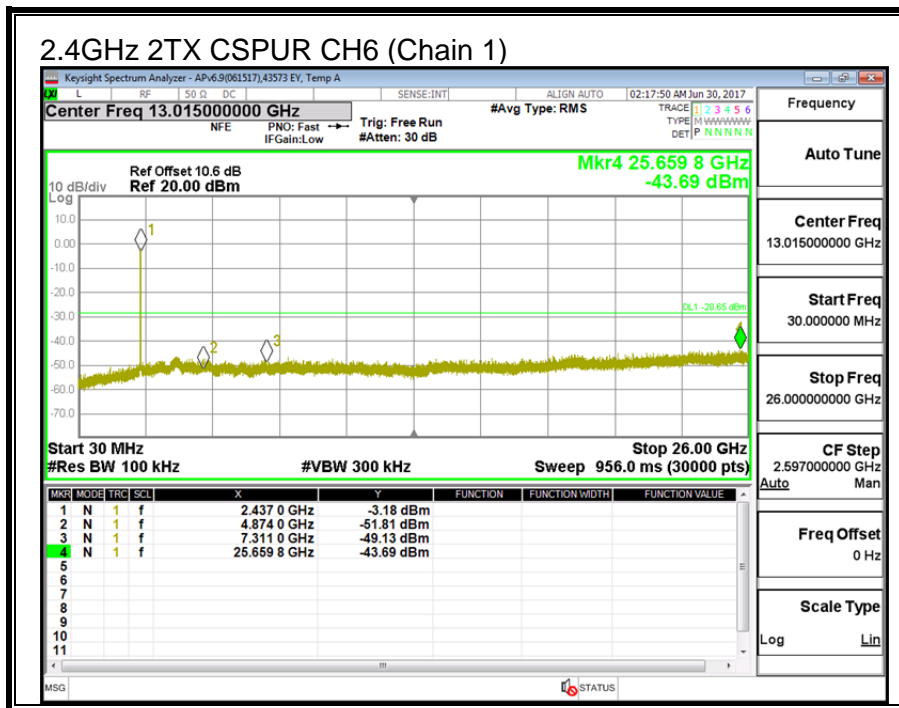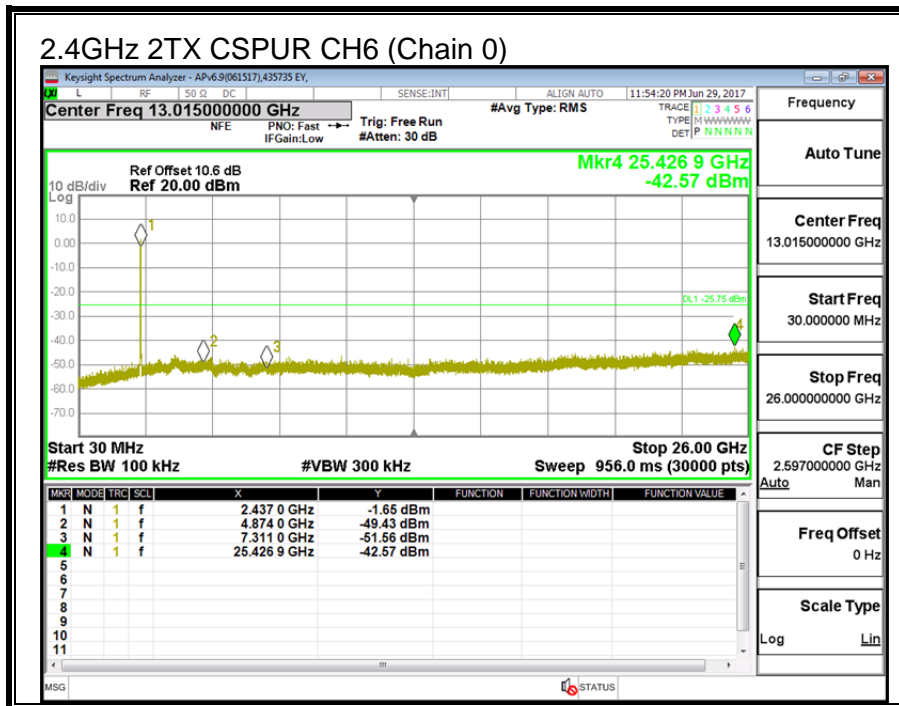

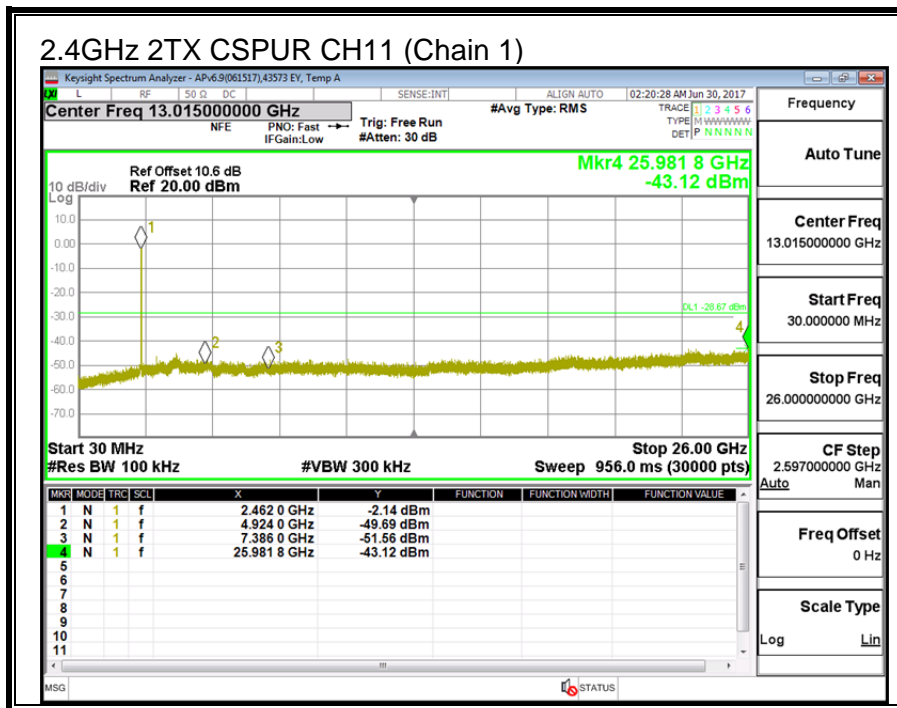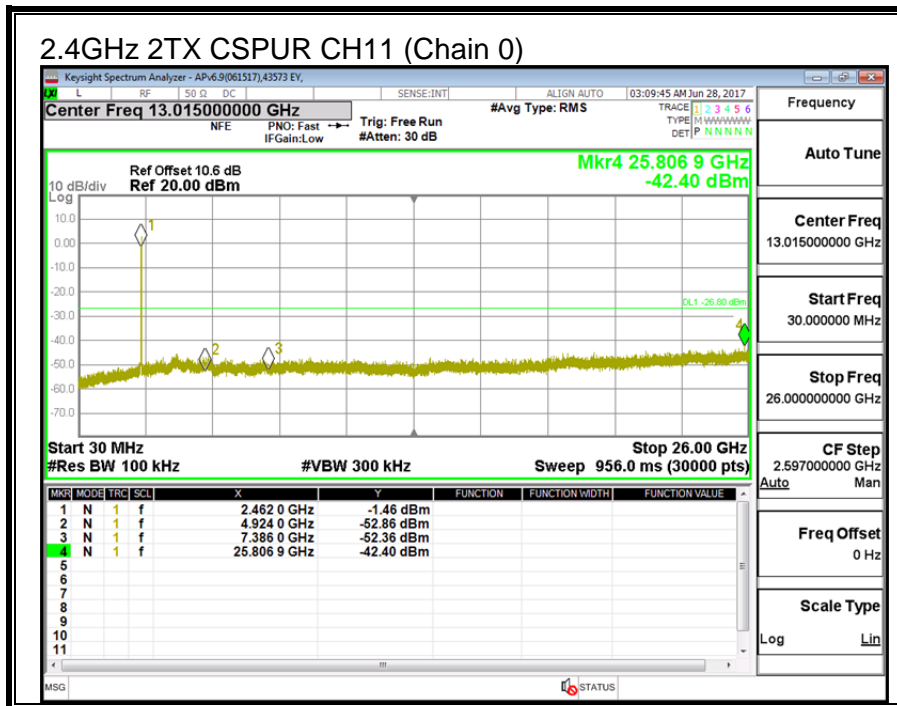

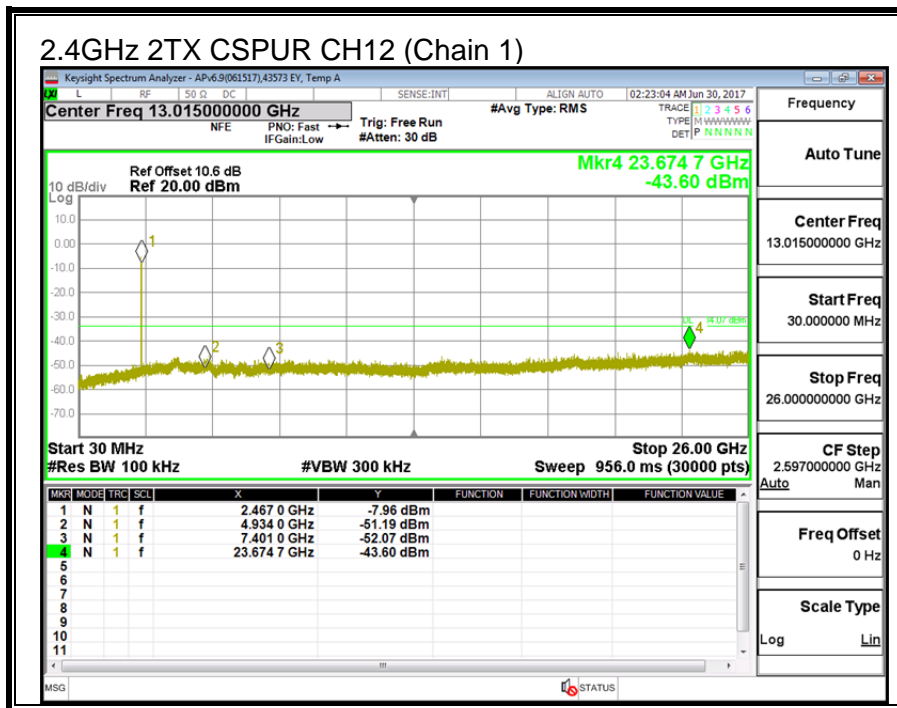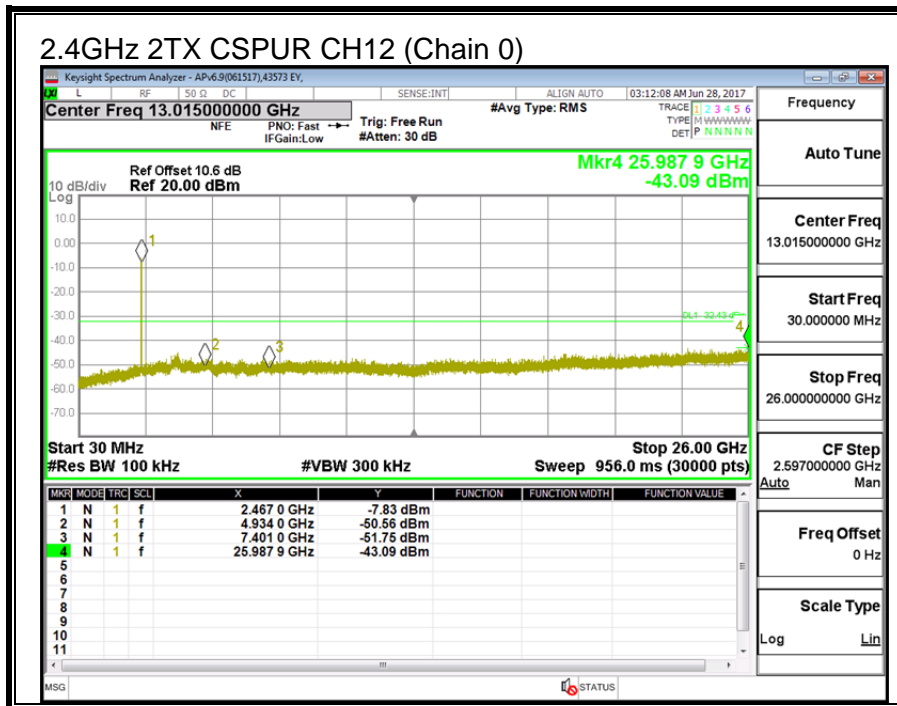

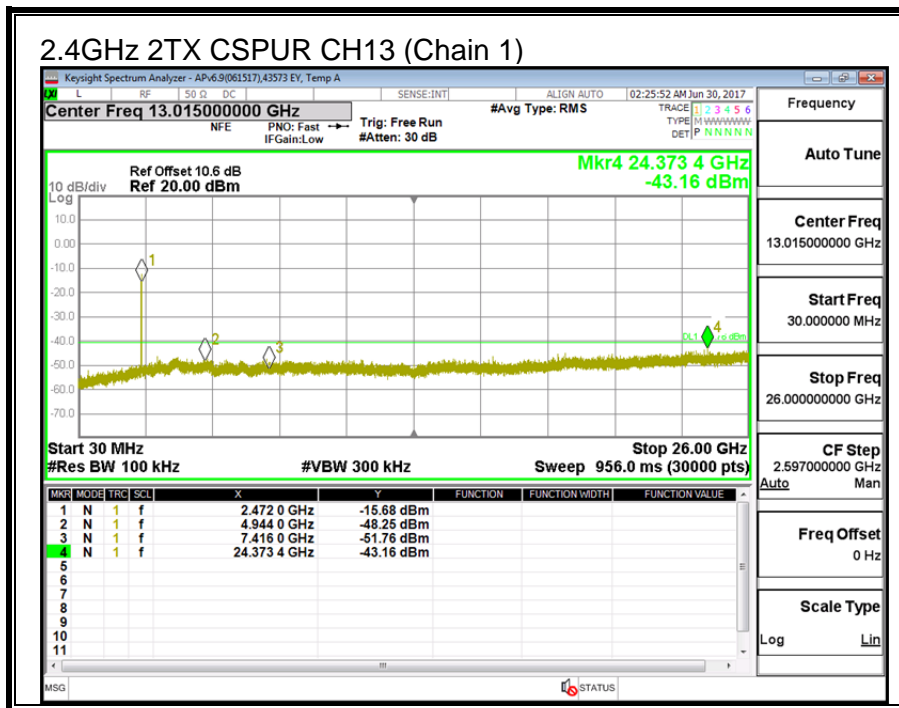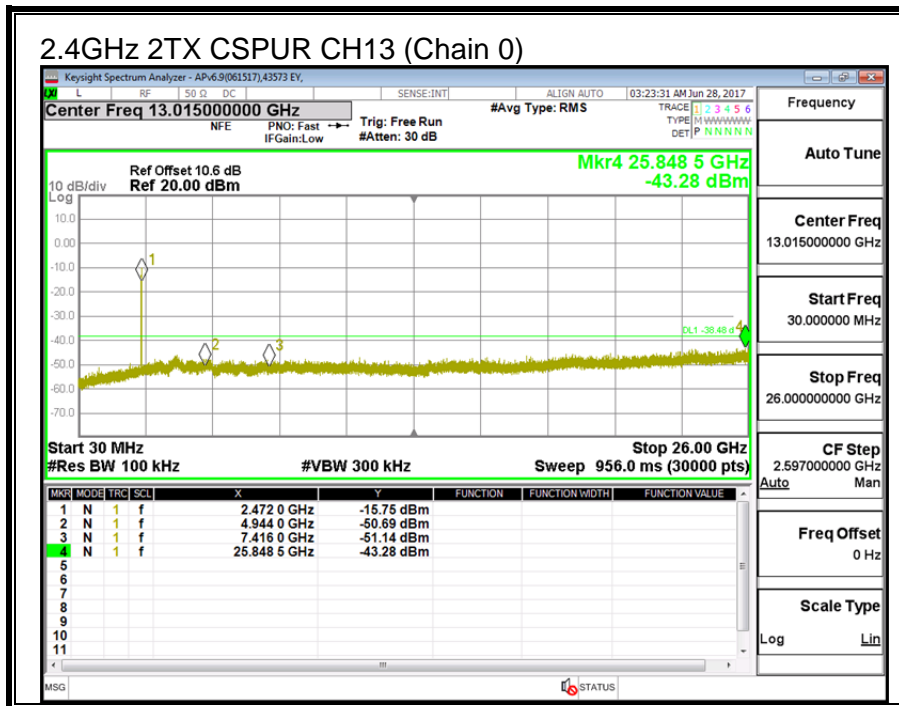

9.4. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND

9.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

Channel	Frequency	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
CH1	2412	17.68	17.68	0.5
CH2	2417	17.80	17.60	0.5
CH6	2437	17.68	17.68	0.5
CH11	2462	16.40	17.64	0.5
CH12	2467	16.32	17.76	0.5
CH13	2472	16.52	17.40	0.5

