

# TEST REPORT

**Applicant:** Sony Corporation  
**EUT Description:** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS  
**Brand:** Sony  
**FCC ID:** PY7-73716J  
**Standards:** FCC 47 CFR Part 2 Subpart J  
FCC 47 CFR Part 15 Subpart C  
**Date of Receipt:** 2023/11/14  
**Date of Test:** 2023/11/14 to 2024/01/17 (FCC ID: PY7-64228M (Lead Model))  
2023/11/14 to 2024/03/22 (FCC ID: PY7-73716J (This Model))  
**Date of Issue:** 2024/03/22

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



Handwritten signature of Huang Kun.

Huang Kun  
Approved By:

Handwritten signature of Chen Chengfu.

Chen Chengfu  
Reviewed By:

## Revision History

<b>Rev.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Revised by</b>
01	2024/03/01	Original	Chen Chengfu
02	2024/03/22	Added spot check item "Radiated Spurious Emissions"	Chen Chengfu

## Summary of Test Results

Clause	FCC Part	Test Items	Result
4.1	§15.203	Antenna Requirement	PASS
4.2	§15.207	AC Power Line Conducted Emission	PASS
4.3	§15.215 (c)	20dB Bandwidth	PASS
4.4	§15.225(e)	Frequency Stability	PASS
4.5	§15.225(a)(b)(c)	In-Band Emissions	PASS*
4.6	§15.225(d) §15.209	Radiated Spurious Emissions	PASS

Test Method: ANSI C63.10-2013.

*Remark:*

*Pass: refers to FCC ID PY7-64228M (lead) data.*

*PASS\*: There is FCC ID PY7-73716J (this model) spot check data.*

## Table of Contents

<b>1</b>	<b>General Description</b> .....	<b>5</b>
<b>1.1</b>	<b>Lab Information</b> .....	<b>5</b>
1.1.1	Testing Location.....	5
1.1.2	Test Facility / Accreditations.....	5
<b>1.2</b>	<b>Client Information</b> .....	<b>5</b>
1.2.1	Applicant.....	5
1.2.2	Manufacturer.....	5
<b>1.3</b>	<b>General Description of EUT</b> .....	<b>6</b>
<b>1.4</b>	<b>REUSE OF TEST DATA</b> .....	<b>7</b>
1.4.1	INTRODUCTION.....	7
1.4.2	DEVICE DIFFERENCES.....	7
1.4.3	Spot Check Verification Data.....	7
<b>2</b>	<b>Test Configuration</b> .....	<b>8</b>
<b>2.1</b>	<b>Worst-case configuration and Mode</b> .....	<b>8</b>
<b>2.2</b>	<b>Support Unit used in test</b> .....	<b>8</b>
<b>2.3</b>	<b>Test Environment</b> .....	<b>8</b>
<b>2.4</b>	<b>Test RF Cable</b> .....	<b>8</b>
<b>2.5</b>	<b>Modifications</b> .....	<b>8</b>
<b>2.6</b>	<b>Test Setup Diagram</b> .....	<b>9</b>
2.6.1	Conducted Configuration.....	9
2.6.2	Radiated Configuration.....	10
<b>3</b>	<b>Equipment and Measurement Uncertainty</b> .....	<b>11</b>
<b>3.1</b>	<b>Test Equipment List</b> .....	<b>11</b>
<b>3.2</b>	<b>Measurement Uncertainty</b> .....	<b>12</b>
<b>4</b>	<b>Test Results</b> .....	<b>13</b>
<b>4.1</b>	<b>Antenna Requirement</b> .....	<b>13</b>
<b>4.2</b>	<b>AC Power Line Conducted Emissions</b> .....	<b>14</b>
<b>4.3</b>	<b>20dB Bandwidth</b> .....	<b>19</b>
<b>4.4</b>	<b>Frequency Stability</b> .....	<b>20</b>
<b>4.5</b>	<b>In-Band Emissions</b> .....	<b>21</b>
<b>4.6</b>	<b>Radiated Spurious Emissions</b> .....	<b>22</b>
<b>5</b>	<b>Test Setup Photos</b> .....	<b>24</b>
	<b>Appendix</b> .....	<b>25</b>

# 1 General Description

## 1.1 Lab Information

### 1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014  
Tel.: +86-755-27212361  
Contact Email: info@towewireless.com

### 1.1.2 Test Facility / Accreditations

#### A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

#### FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

#### ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.  
CAB identifier: CN0152  
Company Number: 31000

## 1.2 Client Information

### 1.2.1 Applicant

Applicant:	Sony Corporation
Address:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

### 1.2.2 Manufacturer

Manufacturer:	Sony Corporation
Address:	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

### 1.3 General Description of EUT

EUT Description:	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC and GNSS			
Trade Mark:	Sony			
Hardware Version:	A			
Software Version:	1.78			
SN.:	HQ63B10532			
Support Type:	<input checked="" type="checkbox"/> Type A	<input checked="" type="checkbox"/> Type B	<input checked="" type="checkbox"/> Type F	<input checked="" type="checkbox"/> Type V
Modulation Type:	ASK			
Frequency Range:	13.553~13.567MHz			
Channel Frequency:	13.56MHz			
Channel Number:	1			
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user manual for more detailed description.				

## 1.4 REUSE OF TEST DATA

### 1.4.1 INTRODUCTION

According to the manufacturer the major change between FCC ID: PY7-64228M (Lead Model), and FCC ID: PY7-73716J (This Model) is changing band configuration by software, The FCC ID: PY7-64228M (Lead Model) conducted test data shall remain representative of FCC ID: PY7-73716J so, FCC ID: PY7-73716J (This Model) leverages conducted test data from FCC ID: PY7-64228M (Lead Model).

### 1.4.2 DEVICE DIFFERENCES

The equipment under test (EUT) in this filing FCC ID: PY7-73716J (This Model) and the reference device certified under FCC ID: PY7-64228M (Lead Model) share a common design. The components used for 2.4GHz and 5GHz Wi-Fi and BT and NFC, including antennas and output power are identical between the EUT and reference device.

### 1.4.3 Spot Check Verification Data

In this filing, the worst-case data and spot checks were tested on the EUT as noted below, against the reference device. All the necessary test cases were performed to verify the variant EUT is still in compliance with the spot checked results to the reference device and was performed using the guidance of ANSI C63.10-2013.

According to FCC KDB 484596 D01 v02r02, Spot checks of the following tests were performed:

Sport check Items	PY7-73716J		PY7-64228M		Delta(dB)	
	Worst case Result		Worst case Result			
In-Band Emissions	Peak:	56.88	Peak:	54.54	Peak:	2.34
Radiated Spurious Emissions	Peak:	32.56	Peak:	33.52	Peak:	0.96

## 2 Test Configuration

### 2.1 Worst-case configuration and Mode

Support Type:	Type A	Type B	Type F	Type V
With ANT mode:	Working in antenna mode			
ANT Port Terminated mode:	Working without antenna mode			
Remark:	The AC conduction emissions and radiation emissions data at only reflect the worst Type			

### 2.2 Support Unit used in test

Description	Manufacturer	Model	Serial Number
NFC A IC CARD	Tiananxin	T1TOP	14443-3A
NFC B IC CARD	Tiananxin	T4TOP	14443-4B
NFC F IC CARD	Tiananxin	T3TOP	X6319-3F
NFC V IC CARD	Tiananxin	T5TOP	15693-5V

### 2.3 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Humidity:	40-75 % RH Ambient
DC Voltage:	DC 3.89V
AC Voltage:	AC 120V/60Hz
Remark: The testing environment is within the scope of the EUT user manual and meets the requirements of the standard testing environment.	

### 2.4 Test RF Cable

**For all conducted test items:** The offset level is set spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor*


### 2.5 Modifications

No modifications were made during testing.




## 2.6 Test Setup Diagram

### 2.6.1 Conducted Configuration

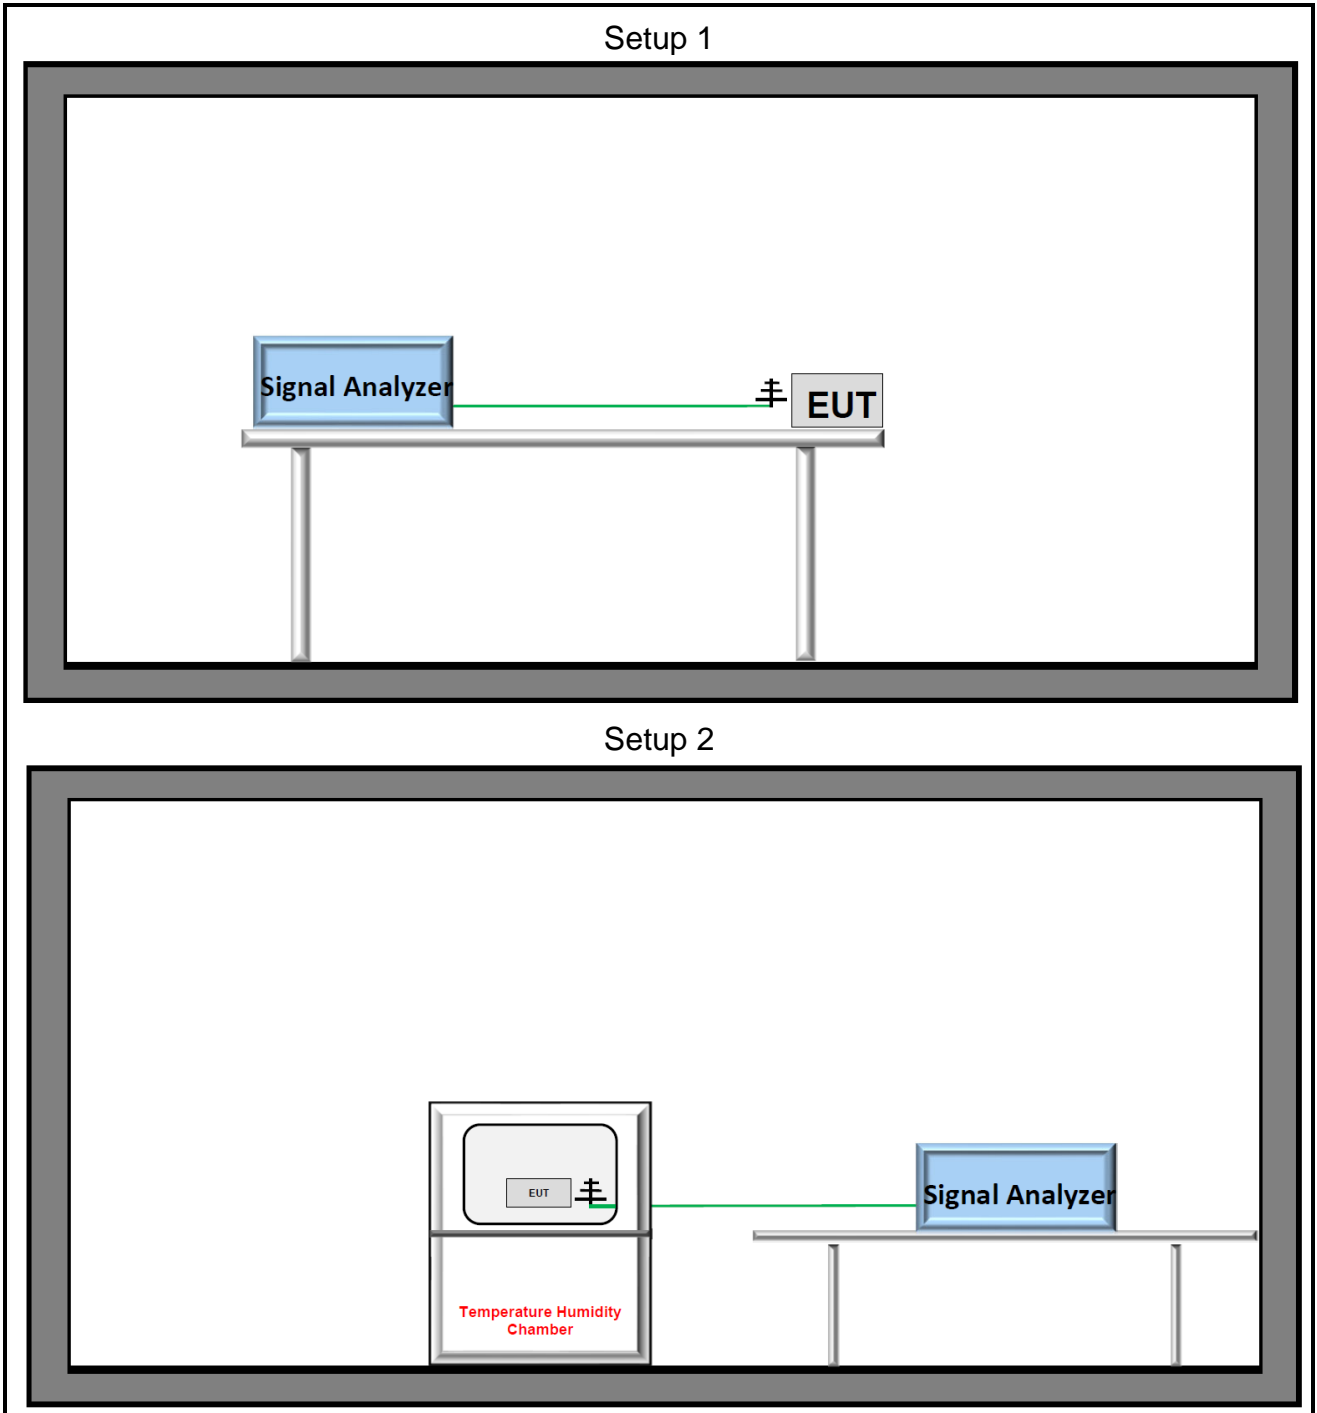

**2.6.2 Radiated Configuration**

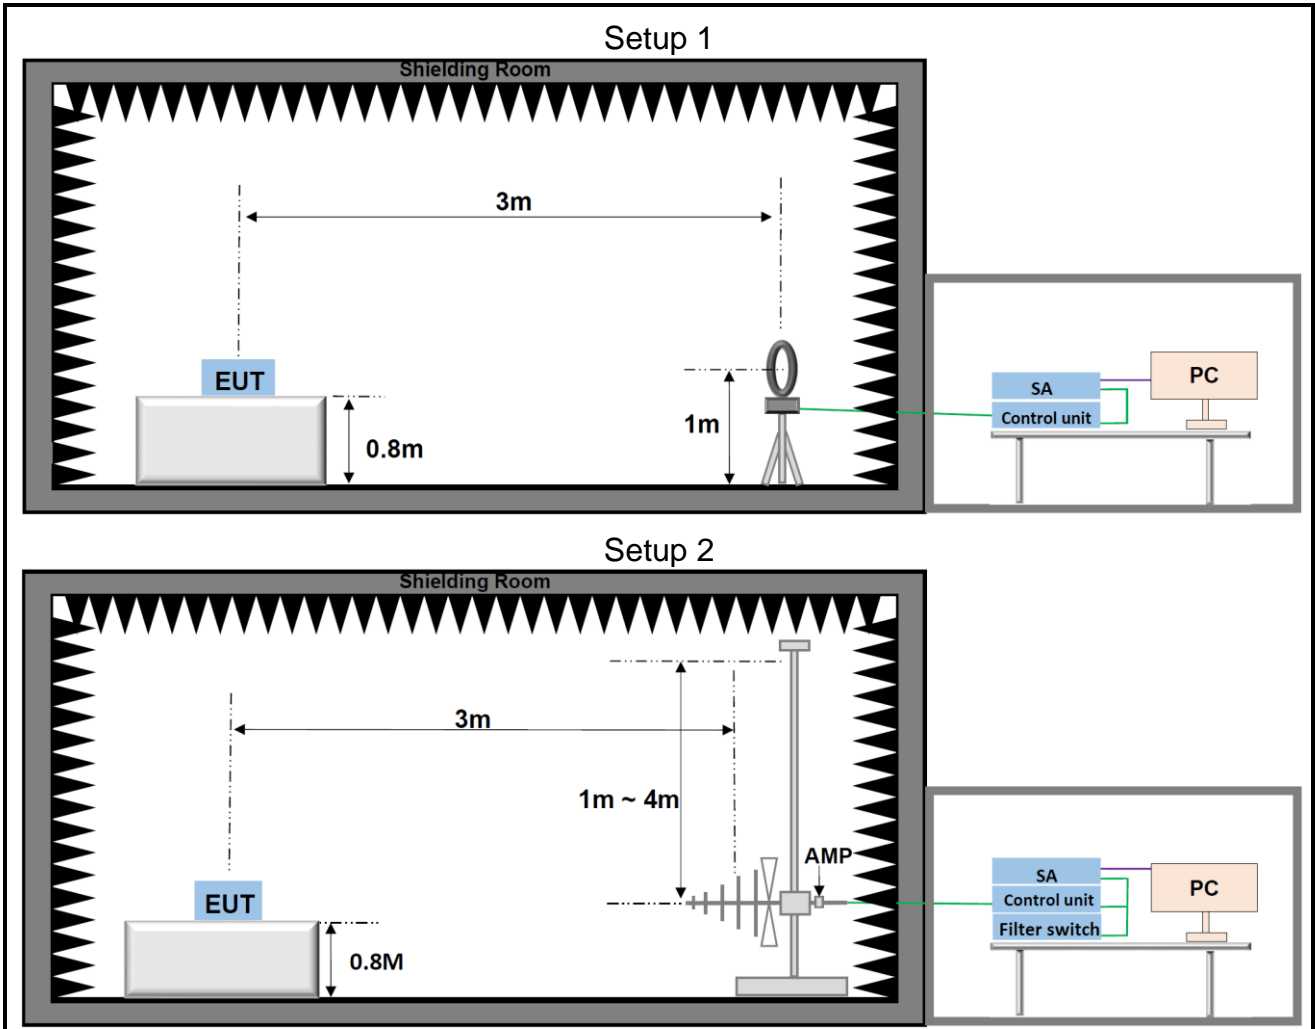

### 3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

#### 3.1 Test Equipment List

Description	Manufacturer	Model	SN	Last Due	Cal Due
Signal Analyzer	Keysight	N9020A	6262044752	2023/04/08	2024/04/07
Mini type temperature chamber	ESPEC	GSU-24V	0060-001324	2023/05/26	2024/05/25

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Loop Antenna	Schwarzbeck	FMZB 1519C	1519C-028	2023/06/29	2025/06/28
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1643	2023/06/25	2025/06/24
Signal Analyzer	Keysight	N9020A	MY49100252	2023/04/08	2024/04/07
EMI Tester Receiver	Rohde & Schwarz	ESR7	102719	2023/08/17	2024/08/16
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	150645	2023/04/08	2024/04/07
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060273	2023/04/08	2025/04/07
Low Noise Amplifier	Tonscend	TAP01018050	AP22G806258	2023/04/08	2025/04/07
Band Reject Filter Group	Townshend	JS0806-F	23A806F0652	N/A	N/A
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A

Conducted Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
EMI Tester Receiver	Rohde & Schwarz	ESR3	103108	2023/07/28	2024/07/27
LISN	Rohde & Schwarz	ENV 216	102836	2023/04/08	2024/04/07
Test software	Rohde & Schwarz	ELEKTRA v4.61	N/A	N/A	N/A

### 3.2 Measurement Uncertainty

Parameter	$U_{lab}$
Frequency Error	679.98Hz
Output Power	0.76dB
Conducted Emissions(150KHz~30MHz)	2.43dB
Radiated Emissions(9kHz~30MHz)	2.40dB
Radiated Emissions(30MHz~1000MHz)	4.66dB

Uncertainty figures are valid to a confidence level of 95%

## 4 Test Results

### 4.1 Antenna Requirement

<b>Standard Applicable:</b>	47 CFR Part 15C Section 15.203
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>The antenna gain and type as provided by the manufacturer are as follows:          The antenna Type is Coil antenna.          Antenna Anti-Replacement Construction: An embedded-in antenna design is used.</p>	

## 4.2 AC Power Line Conducted Emissions

### Limits

Frequency range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


### Test Procedure

C63.10-2013, Section 6.2.

### Test Settings

1. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
3. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
4. Set the test-receiver system to Peak detect function and specified bandwidth (if bandwidth =9kHz) with maximum hold mode. Then measurement is also conducted by average detector and Quasi-Peak detector function respectively.
5. Both sides of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

### Test Setup

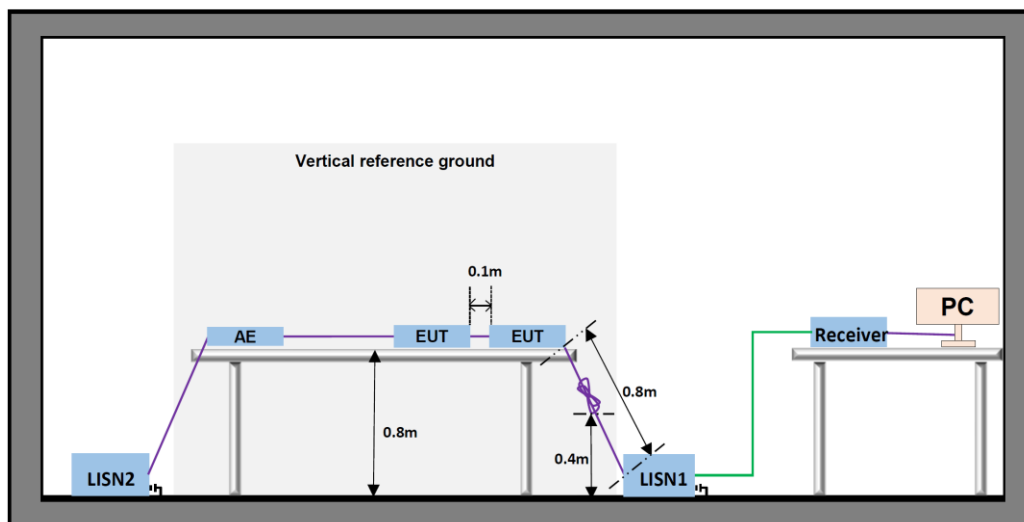


### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

## Test Result

Test mode:	With ANT (Type -V)		
Test Voltage:	AC 120V / 60Hz	Phase:	Line

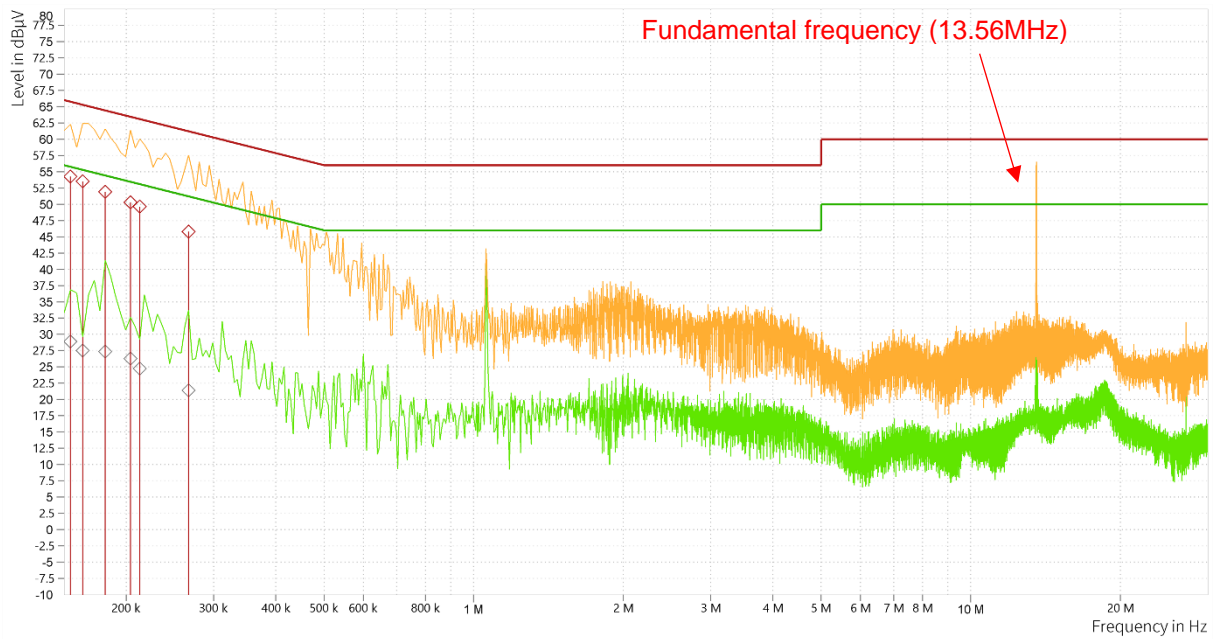


Rg	Frequency [MHz]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	Correction [dB]	Line
1	0.155	28.91	55.75	26.84	18.43	54.26	65.75	11.49	43.78	10.48	L1
1	0.164	27.52	55.28	27.76	17.04	53.53	65.28	11.75	43.05	10.48	L1
1	0.182	27.38	54.42	27.04	16.89	51.90	64.42	12.52	41.41	10.49	L1
1	0.204	26.29	53.45	27.15	15.80	50.31	63.45	13.13	39.82	10.49	L1
1	0.213	24.73	53.09	28.36	14.24	49.65	63.09	13.43	39.16	10.49	L1
1	0.267	21.38	51.21	29.83	10.88	45.78	61.21	15.43	35.27	10.51	L1

**Note:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Level = Raw Level[dBµV] + Correction[dB]
3. Margin = Limit[dBµV] - Level[dBµV]

Test mode:	With ANT (Type -V)		
Test Voltage:	AC 120V / 60Hz	Phase:	Neutral

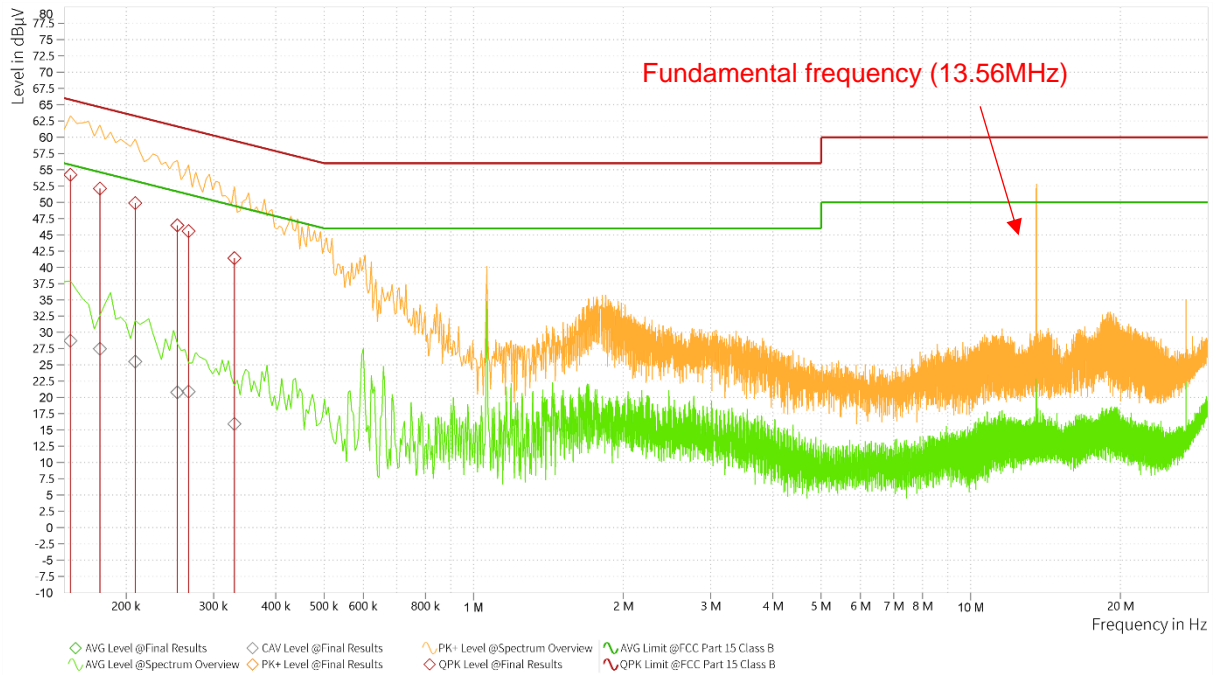


Rg	Frequency [MHz]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	Correction [dB]	Line
1	0.155	28.71	55.75	27.04	18.29	54.22	65.75	11.53	43.80	10.43	N
1	0.177	27.48	54.63	27.14	17.06	52.11	64.63	12.51	41.69	10.42	N
1	0.209	25.51	53.26	27.76	15.11	49.88	63.26	13.39	39.48	10.40	N
1	0.254	20.79	51.64	30.85	10.39	46.46	61.64	15.18	36.06	10.40	N
1	0.267	20.88	51.21	30.33	10.47	45.56	61.21	15.65	35.15	10.41	N
1	0.330	15.94	49.45	33.51	5.54	41.40	59.45	18.05	31.00	10.40	N

**Note:**

- The following Quasi-Peak and Average measurements were performed on the EUT:
- Level = Raw Level[dBµV] + Correction[dB]
- Margin = Limit[dBµV] - Level[dBµV]



Test mode:	ANT Port Terminated(Type -A)		
Test Voltage:	AC 120V / 60Hz	Phase:	Line

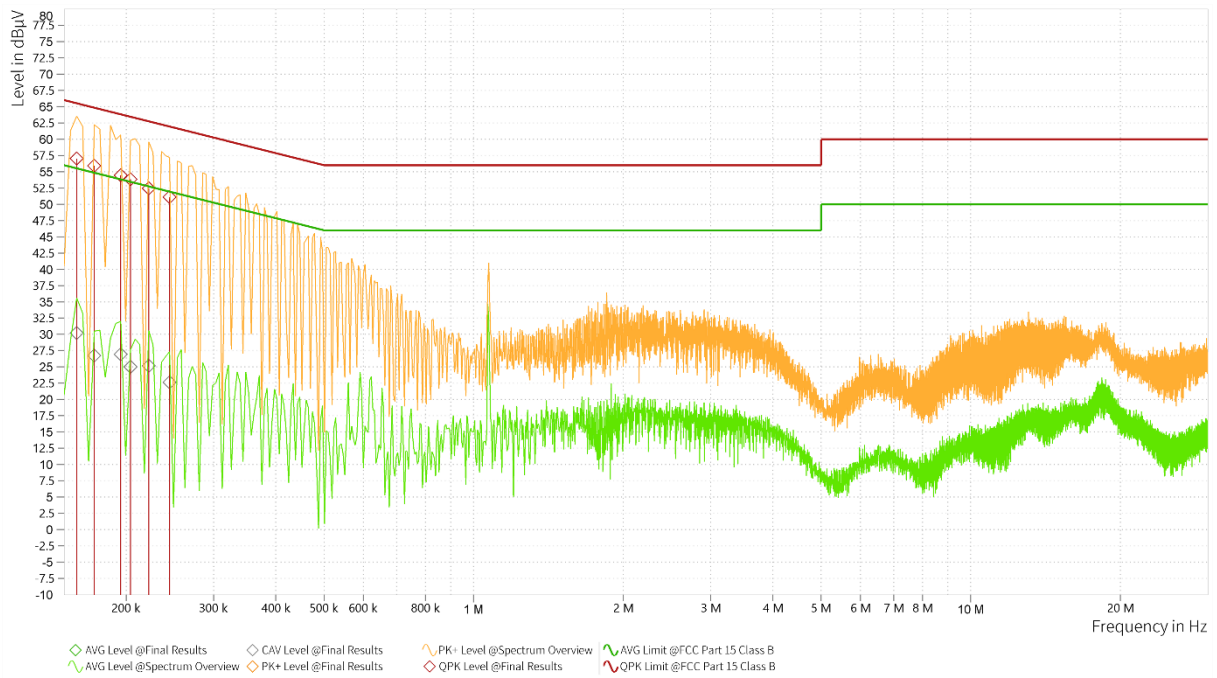


Rg	Frequency [MHz]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	Correction [dB]	Line
1	0.159	30.22	55.52	25.30	19.74	57.03	65.52	8.49	46.55	10.48	L1
1	0.173	26.76	54.84	28.08	16.27	55.90	64.84	8.94	45.40	10.49	L1
1	0.195	26.95	53.82	26.87	16.46	54.45	63.82	9.37	43.96	10.49	L1
1	0.204	25.00	53.45	28.45	14.50	53.84	63.45	9.60	43.35	10.49	L1
1	0.222	25.18	52.74	27.57	14.68	52.46	62.74	10.29	41.96	10.50	L1
1	0.245	22.62	51.94	29.32	12.12	51.12	61.94	10.82	40.62	10.50	L1

**Note:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Level = Raw Level[dBµV] + Correction[dB]
3. Margin = Limit[dBµV] - Level[dBµV]

Test mode:	ANT Port Terminated (Type -A)		
Test Voltage:	AC 120V / 60Hz	Phase:	Neutral

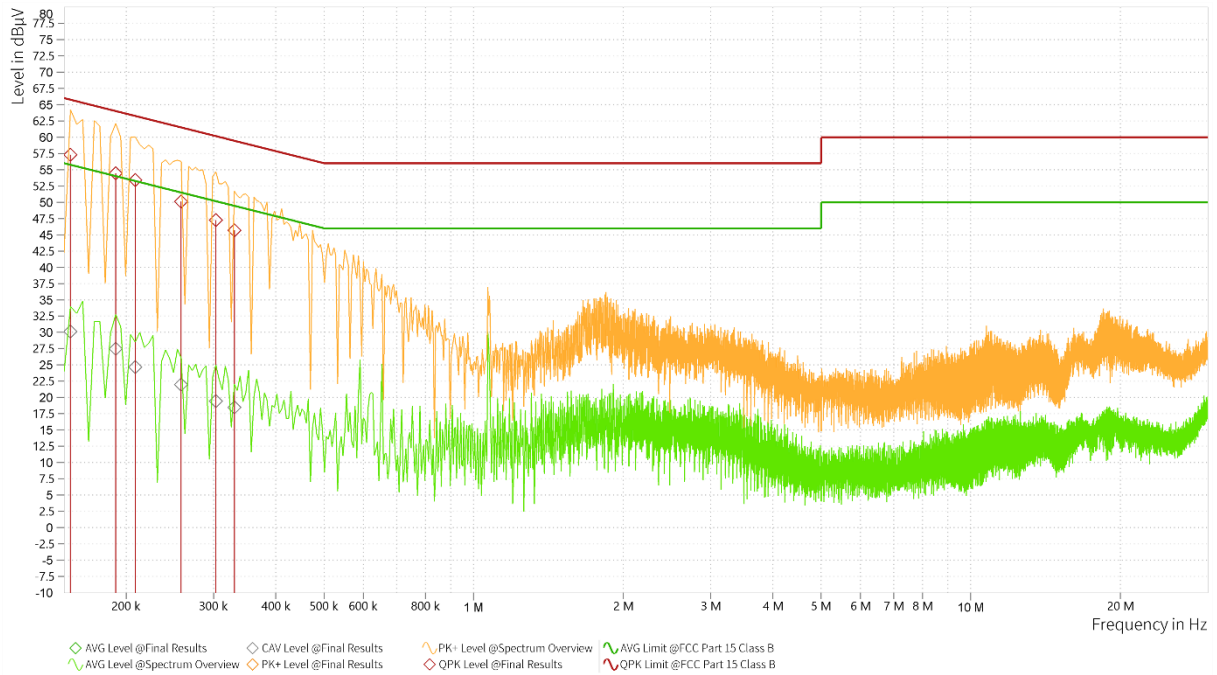

Rg	Frequency [MHz]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	CAV Raw Lvl [dBµV]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	QPK Raw Lvl [dBµV]	Correction [dB]	Line
1	0.155	30.15	55.75	25.61	19.72	57.30	65.75	8.46	46.87	10.43	N
1	0.191	27.49	54.01	26.52	17.09	54.46	64.01	9.55	44.06	10.41	N
1	0.209	24.66	53.26	28.61	14.26	53.40	63.26	9.86	43.00	10.40	N
1	0.258	21.99	51.50	29.50	11.60	50.11	61.50	11.38	39.71	10.40	N
1	0.303	19.45	50.16	30.71	9.02	47.26	60.16	12.90	36.83	10.42	N
1	0.330	18.48	49.45	30.97	8.08	45.69	59.45	13.76	35.29	10.40	N

**Note:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Level = Raw Level[dBµV] + Correction[dB]
3. Margin = Limit[dBµV] - Level[dBµV]

## 4.3 20dB Bandwidth

### Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### Test Procedure

ANSI C63.10:2013 and 6.9.3

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The transmitter output is connected to a spectrum analyzer:  
RBW = 1~5% of the 20dB bandwidth.  
VBW = 3 times the RBW.  
Span = Approximately 2 to 5times the 20dB bandwidth.  
Sweep = Auto.  
Detector = Peak.  
Trace = Max hold.
3. Measure and record the results in the test report.

### Test Notes

Because the measured signal is CW-like, adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

### Test Setup

Refer to section 2.6.1- Setup 1 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.4 Frequency Stability

### Limits

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+ 50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### Test Procedure

ANSI C63.10:2013 Section 6.8

### Test Settings

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. The transmitter output is connected to a spectrum analyzer:  
RBW = 1kHz.  
VBW = 3 times the RBW.  
The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c * 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
3. Measure and record the results in the test report.

### Test Setup

Refer to section 2.6.1- Setup 2 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.5 In-Band Emissions

### Limits

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### Test Procedure

ANSI C63.10:2013 Section 6.4.7

### Test Settings

1. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 SAC camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And find the worst-case axis positioning record in the report.
3. For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for Quasi-peak detection measurements in the 30~1000MHz range, 9kHz for Peak and/or Quasi-peak detection measurements in the 150kHz~30MHz range and 200Hz for Peak and/or Quasi-peak detection measurements in the 9~150kHz range, Peak detection is used unless otherwise noted as Quasi-peak or average(9~90kHz and 110~490kHz).
4. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40dB/decade) as specified in &15.31(f)(2). Extrapolation Factor  $20\log_{10}(30/3)^2=40\text{dB}$ .
5. Measure and record the results in the test report.

### Test Setup

Refer to section 2.6.2- Setup 1 for details.

### Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

### Test Result

The detailed test data see: **Appendix**.

## 4.6 Radiated Spurious Emissions

### Limits

The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

Frequency	Field strength (μV/m)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

### Test Procedure

ANSI C63.10:2013 Section 6.5.4.

### Test Settings

- For radiated emissions measurements performed at frequencies less than or equal to 1GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
- Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
- For each suspected emission, the EUT was ranged its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) find the maximum reading. Preamplifier and a high pass filter are used for the test in order get better signal level comply with the guidelines.
- The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- Set to the maximum power setting and enable the EUT transmit continuously.
- spectrum analyzer setting:  
Measurements Below 30MHz: RBW = 9 kHz; VBW ≥ 30 kHz; Detector = Peak  
Measurements 30 ~ 1000MHz: RBW = 120 kHz; VBW ≥ 300 kHz; Detector = Peak
- The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:  
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):  
AF = Antenna Factor(dB/m)  
Factor = Cable Factor(dB) - Preamplifier gain(dB)  
Margin = Limit(dBμV/m) – Level(dBμV/m)
- Repeat above procedures until all frequencies measured was complete.
- Measure and record the results in the test report.

### Test Notes

1. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported for frequency range below 1GHz.
2. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

### **Test Setup**

Refer to section 2.6.2 for details.

### **Measuring Instruments**

The measuring equipment is listed in the section 3.1 of this test report.

### **Test Result**

The detailed test data see: **Appendix**.

## 5 Test Setup Photos

The detailed test data see: **Test Setup Photos**



# Appendix


## 20dB Bandwidth Test Result

TestMode	Frequency[MHz]	20dB EBW[kHz]	Limit[MHz]	Verdict
Type-A	13.56	2.842	---	---
Type-B	13.56	2.843	---	---
Type-F	13.56	2.844	---	---
Type-V	13.56	2.842	---	---


## Test Graphs



Type-A

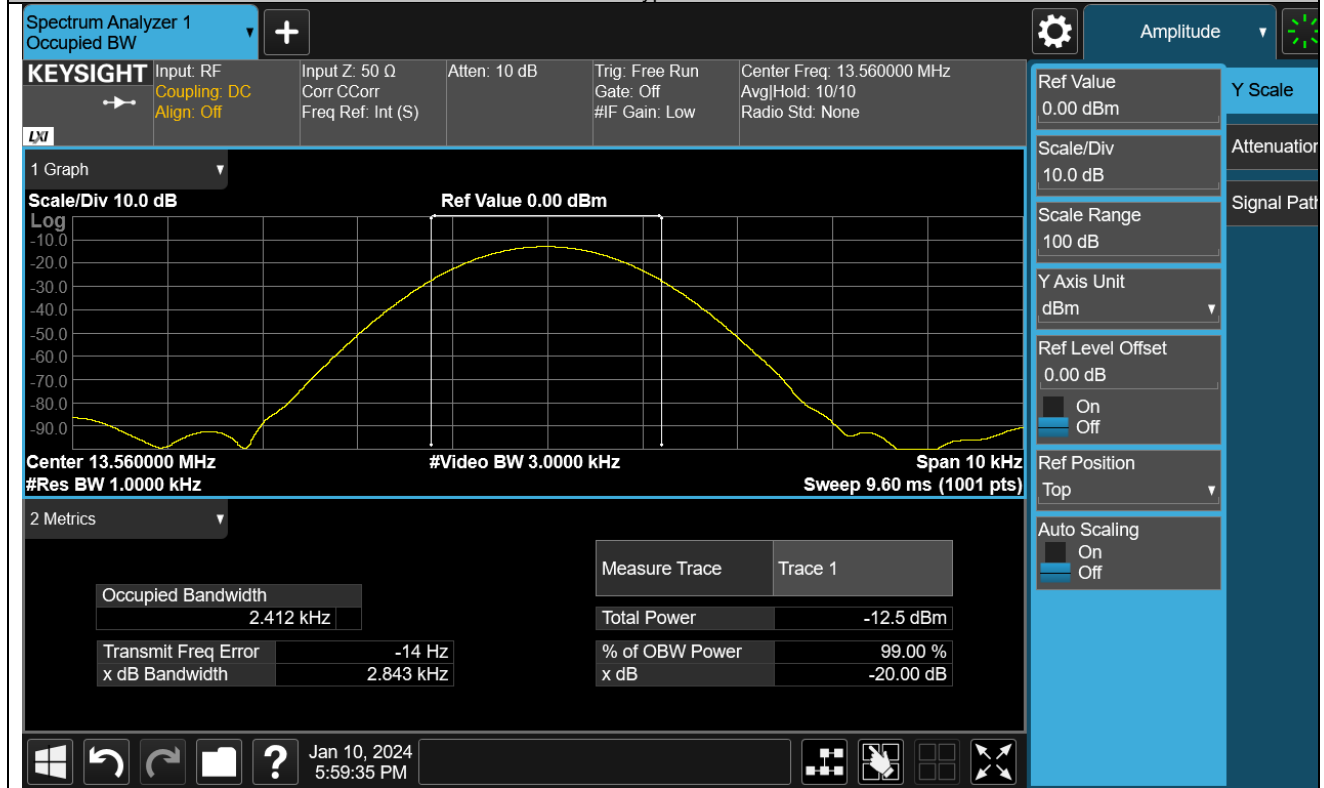

Type-B

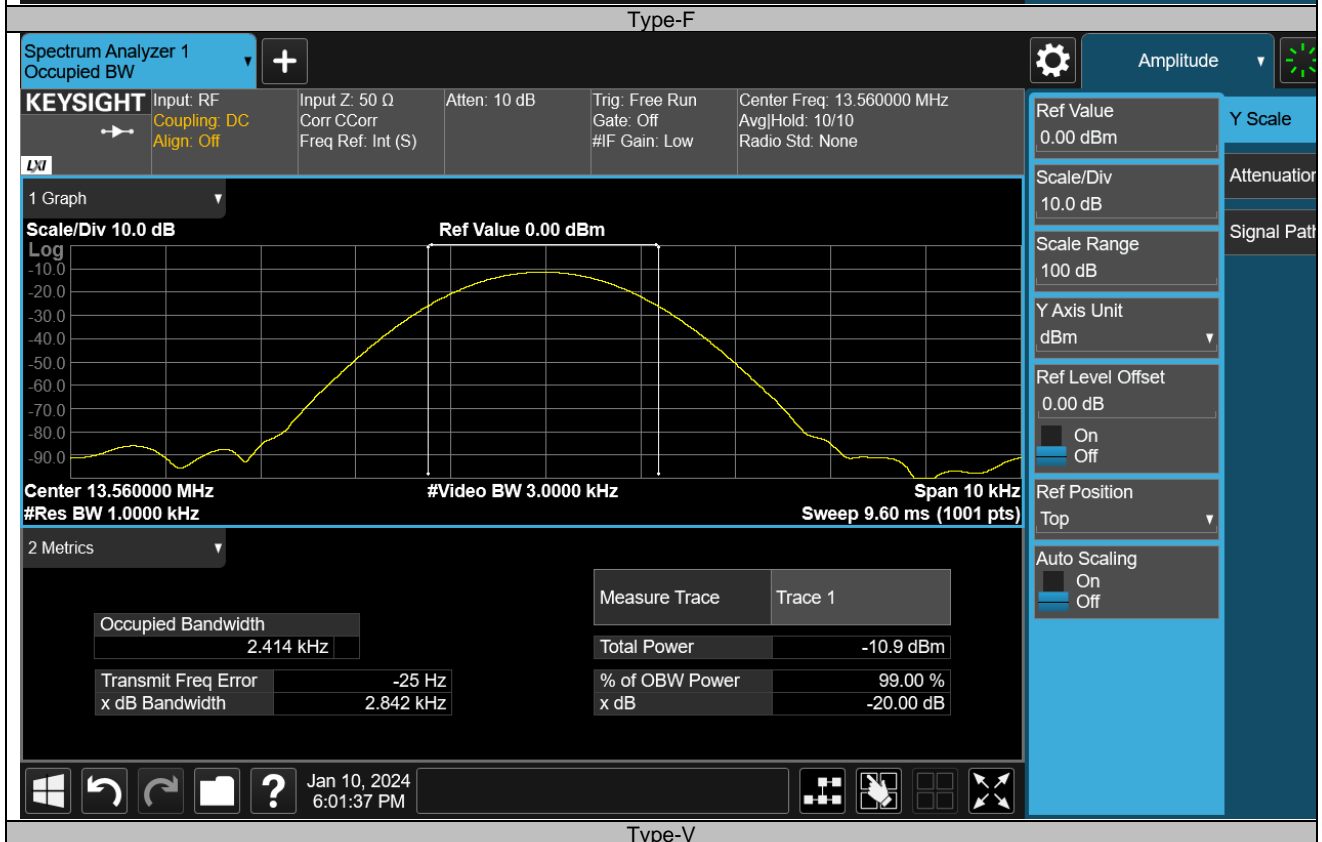

## Frequency Stability Test Result

Voltage											
Type	VDC	(°C)	Startup (MHz)	Deviation (ppm)	2mins (MHz)	Deviation (ppm)	5mins (MHz)	Deviation (ppm)	10mins (MHz)	Deviation (ppm)	Limit (ppm)
V	4.48	20	13.55996	-2.95	13.55996	-2.95	13.55997	-2.21	13.55996	-2.95	±100
	3.40	20	13.55996	-2.95	13.55995	-3.69	13.55996	-2.95	13.55996	-2.95	±100

Temperature											
Type	VDC	(°C)	Startup (MHz)	Deviation (ppm)	2mins (MHz)	Deviation (ppm)	5mins (MHz)	Deviation (ppm)	10mins (MHz)	Deviation (ppm)	Limit (ppm)
V	3.89	50	13.55993	-5.16	13.55994	-4.42	13.55994	-4.42	13.55994	-4.42	±100
	3.89	40	13.55993	-5.16	13.55993	-5.16	13.55993	-5.16	13.55994	-4.42	±100
	3.89	30	13.55993	-5.16	13.55993	-5.16	13.55993	-5.16	13.55994	-4.42	±100
	3.89	20	13.55996	-2.95	13.55995	-3.69	13.55996	-2.95	13.55996	-2.95	±100
	3.89	10	13.55993	-5.16	13.55993	-5.16	13.55993	-5.16	13.55994	-4.42	±100
	3.89	0	13.55993	-5.16	13.55993	-5.16	13.55993	-5.16	13.55994	-4.42	±100
	3.89	-10	13.55993	-5.16	13.55993	-5.16	13.55993	-5.16	13.55994	-4.42	±100
	3.89	-20	13.56008	5.90	13.56008	5.90	13.56008	5.90	13.56008	5.90	±100


## In-Band Emissions

### FCC ID: PY7-64228M (Lead Model)

### Test Result

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V Polarity: Z		
Test Standard: FCC PART 15 C			


### Test Graph

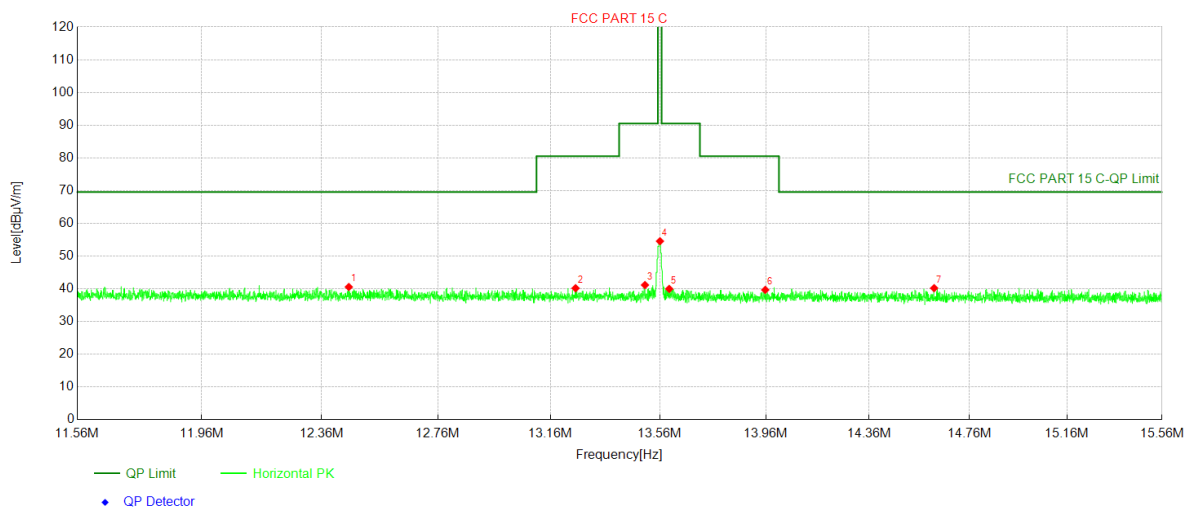

NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	12.4528	19.40	21.15	40.55	69.54	28.99	100	211	PK	Horizontal	PASS
2	13.2508	19.07	21.10	40.17	80.51	40.34	100	69	PK	Horizontal	PASS
3	13.5052	20.06	21.09	41.15	90.47	49.32	100	35	PK	Horizontal	PASS
4	13.5608	33.46	21.08	54.54	124.00	69.46	100	191	PK	Horizontal	PASS
5	13.5952	18.88	21.08	39.96	90.47	50.51	100	360	PK	Horizontal	PASS
6	13.9576	18.62	21.04	39.66	80.51	40.85	100	349	PK	Horizontal	PASS
7	14.6184	19.20	20.99	40.19	69.54	29.35	100	220	PK	Horizontal	PASS

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V Polarity: Z		
Test Standard: FCC PART 15 C			

### Test Graph

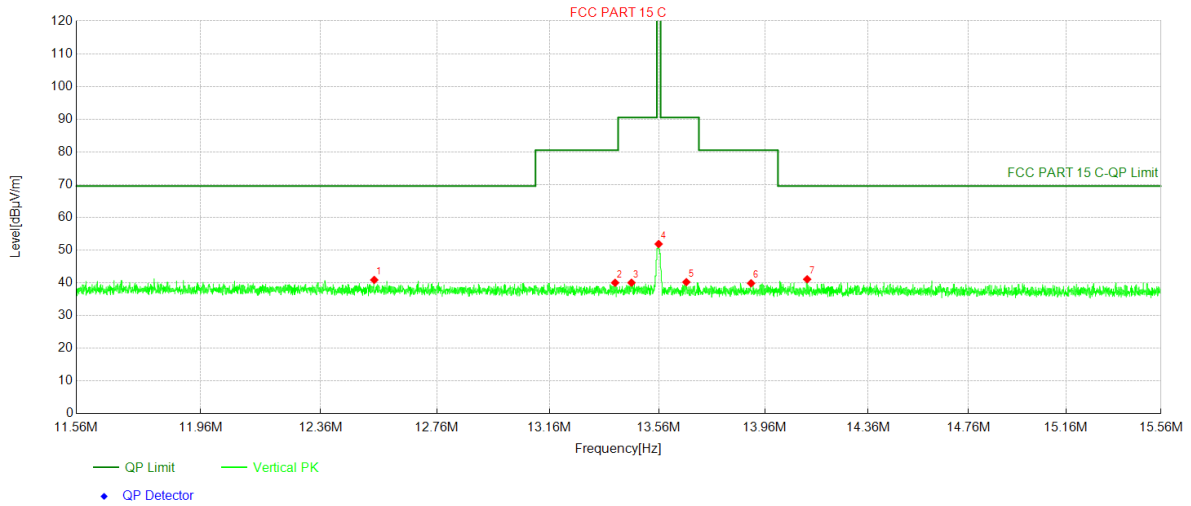


NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	12.5432	19.72	21.15	40.87	69.54	28.67	100	339	PK	Vertical	PASS
2	13.3988	18.91	21.09	40.00	80.51	40.51	100	220	PK	Vertical	PASS
3	13.4592	18.94	21.08	40.02	90.47	50.45	100	320	PK	Vertical	PASS
4	13.5596	30.77	21.08	51.85	124.00	72.15	100	96	PK	Vertical	PASS
5	13.6628	19.14	21.07	40.21	90.47	50.26	100	265	PK	Vertical	PASS
6	13.9072	18.80	21.05	39.85	80.51	40.66	100	1	PK	Vertical	PASS
7	14.1228	20.04	21.03	41.07	69.54	28.47	100	106	PK	Vertical	PASS

## FCC ID: PY7-73716J (This Model)

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10532	Engineer:	欧树炎
Remark:	4B Polarity: Z		
Test Standard: FCC PART 15 C			

### Test Graph

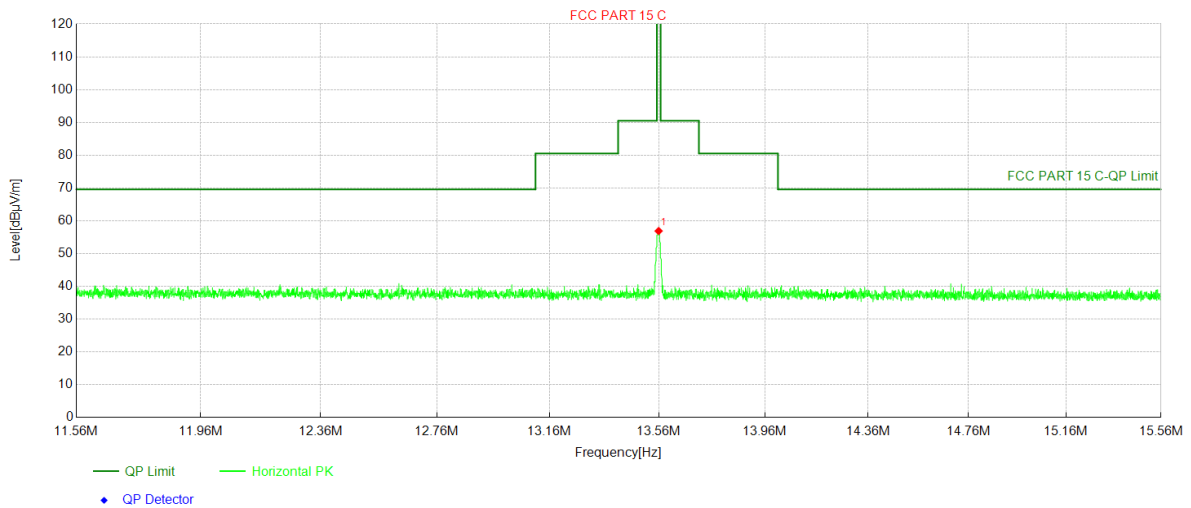


### Data List

NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	13.5596	35.80	21.08	56.88	124.00	67.12	197	30	PK	Horizontal	PASS

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10532	Engineer:	欧树炎
Remark:	4B Polarity: Z		
Test Standard: FCC PART 15 C			

### Test Graph

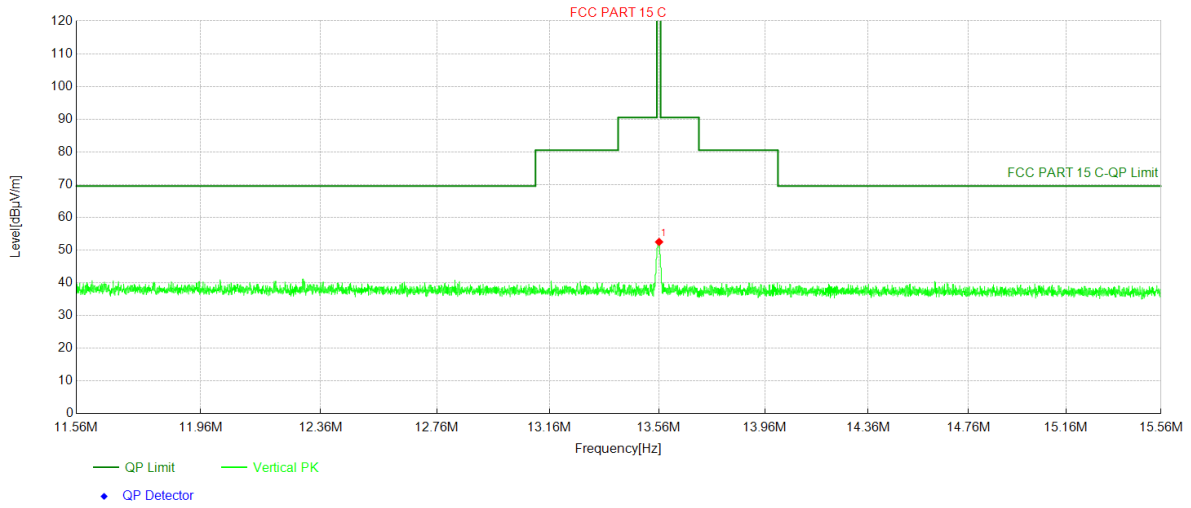

### Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	13.5612	31.40	21.08	52.48	124.00	71.52	149	286	PK	Vertical	PASS




## Radiated Spurious Emissions FCC ID: PY7-64228M (Lead Model)

### Test Result

9kHz ~ 30MHz

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V, Polarity: Z		
Test Standard: FCC PART 15 C			


### Test Graph

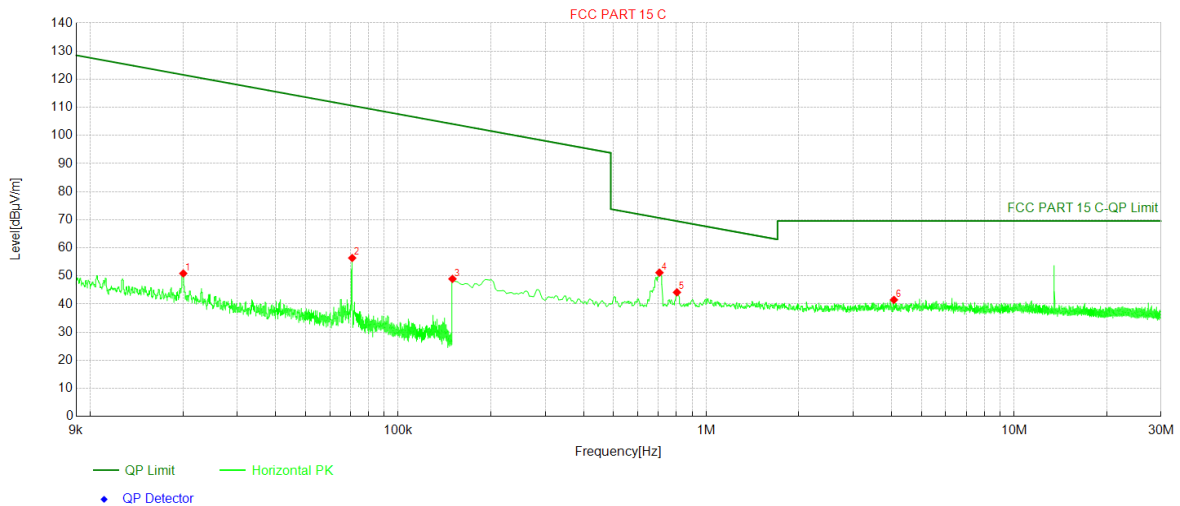

NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	0.02004	30.23	20.67	50.90	121.57	70.67	100	53	PK	Horizontal	PASS
2	0.070871	35.77	20.64	56.41	110.59	54.18	100	261	PK	Horizontal	PASS
3	0.15	28.07	20.90	48.97	104.08	55.11	100	175	PK	Horizontal	PASS
4	0.70521	30.22	20.96	51.18	70.65	19.47	100	358	PK	Horizontal	PASS
5	0.803715	23.20	20.97	44.17	69.51	25.34	100	135	PK	Horizontal	PASS
6	4.07229	20.38	21.12	41.50	69.54	28.04	100	116	PK	Horizontal	PASS

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V, Polarity: Z		
Test Standard: FCC PART 15 C			

### Test Graph

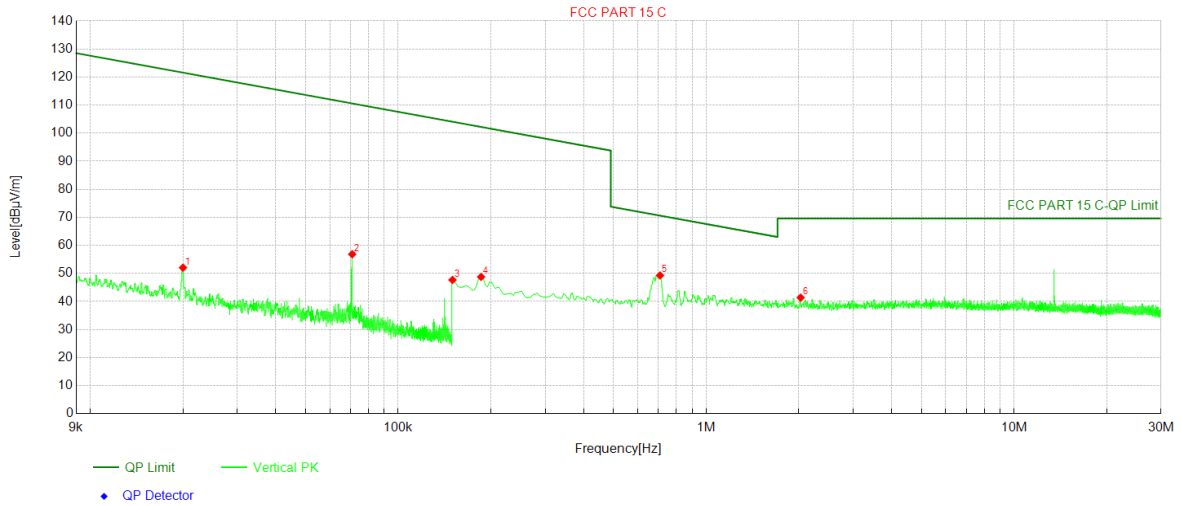


NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	0.019998	31.38	20.67	52.05	121.58	69.53	100	23	PK	Vertical	PASS
2	0.070871	36.21	20.64	56.85	110.59	53.74	100	186	PK	Vertical	PASS
3	0.15	26.79	20.90	47.69	104.08	56.39	100	54	PK	Vertical	PASS
4	0.18582	27.86	20.90	48.76	102.22	53.46	100	295	PK	Vertical	PASS
5	0.708195	28.32	20.96	49.28	70.61	21.33	100	19	PK	Vertical	PASS
6	2.027565	20.31	21.07	41.38	69.54	28.16	100	353	PK	Vertical	PASS

## 30MHz ~ 1000MHz

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V, Polarity: Z		
Test Standard: FCC PART 15 C			


### Test Graph

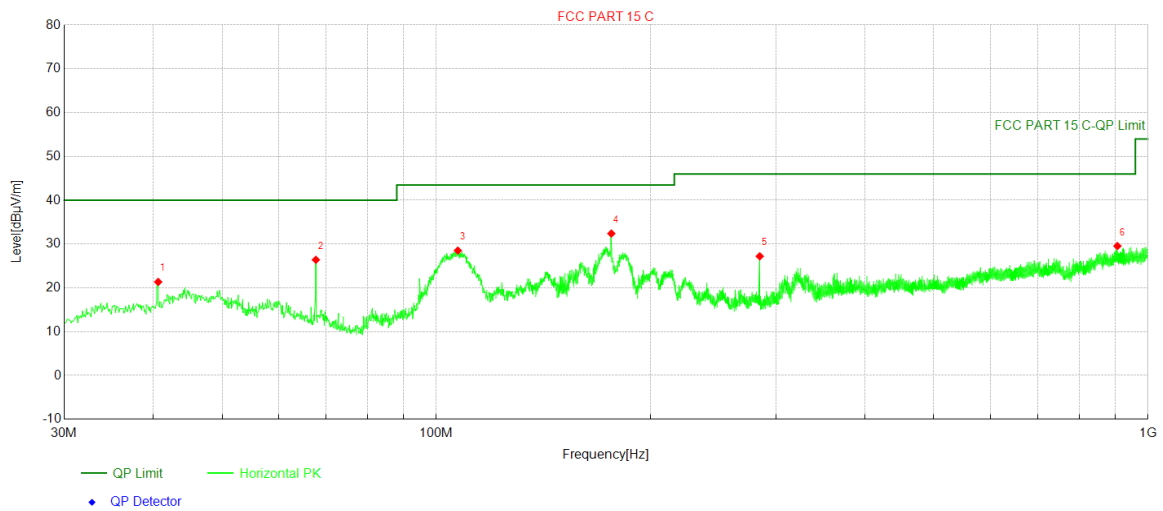

NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	40.67	45.20	-23.84	21.36	40.00	18.64	212	43	PK	Horizontal	PASS
2	67.733	51.89	-25.48	26.41	40.00	13.59	246	48	PK	Horizontal	PASS
3	107.212	52.10	-23.59	28.51	43.50	14.99	221	3	PK	Horizontal	PASS
4	176.179	57.44	-25.03	32.41	43.50	11.09	276	123	PK	Horizontal	PASS
5	284.722	48.34	-21.12	27.22	46.00	18.78	101	204	PK	Horizontal	PASS
6	905.716	38.16	-8.60	29.56	46.00	16.44	139	261	PK	Horizontal	PASS

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10377	Engineer:	欧树炎
Remark:	NFC Type V, Polarity: Z		
Test Standard: FCC PART 15 C			

### Test Graph

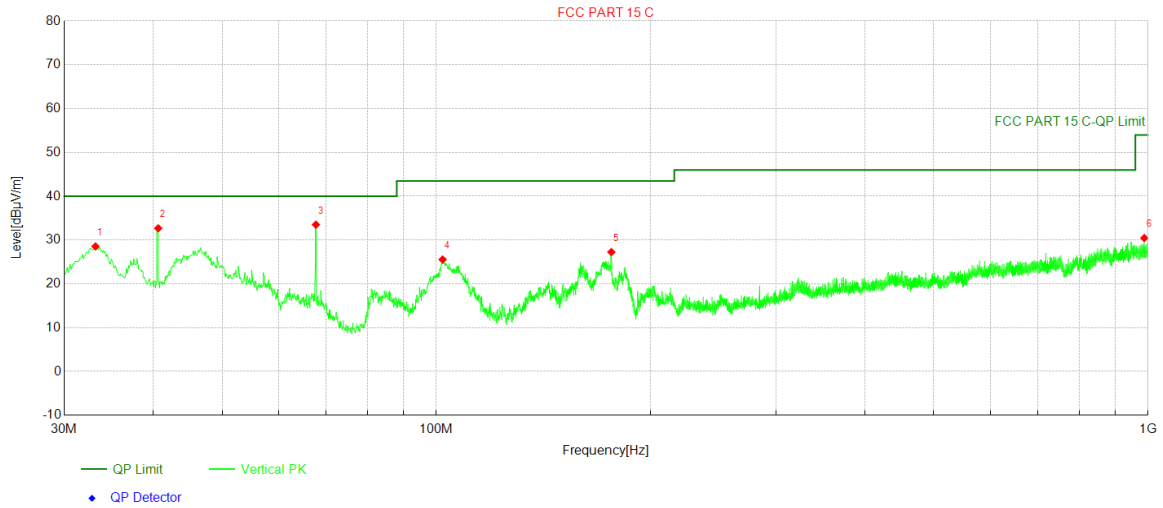

NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	33.201	53.92	-25.37	28.55	40.00	11.45	144	227	PK	Vertical	PASS
2	40.67	56.14	-23.44	32.70	40.00	7.30	131	157	PK	Vertical	PASS
3	67.733	58.64	-25.12	33.52	40.00	6.48	173	301	PK	Vertical	PASS
4	102.071	49.04	-23.48	25.56	43.50	17.94	207	113	PK	Vertical	PASS
5	176.179	52.59	-25.33	27.26	43.50	16.24	151	212	PK	Vertical	PASS
6	987.972	38.53	-8.05	30.48	54.00	23.52	126	340	PK	Vertical	PASS

## FCC ID: PY7-73716J (This Model)

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10532	Engineer:	欧树炎
Remark:	5V Polarity: Z		
Test Standard: FCC PART 15 B CLASS B			


### Test Graph



NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	40.67	48.34	-23.84	24.50	40.00	15.50	216	258	PK	Horizontal	PASS
2	67.733	53.05	-25.48	27.57	40.00	12.43	258	195	PK	Horizontal	PASS
3	104.399	52.83	-24.43	28.40	43.50	15.10	189	283	PK	Horizontal	PASS
4	176.276	58.41	-25.00	33.41	43.50	10.09	203	249	PK	Horizontal	PASS
5	284.722	50.95	-21.12	29.83	46.00	16.17	128	194	PK	Horizontal	PASS
6	964.207	37.20	-8.11	29.09	54.00	24.91	166	0	PK	Horizontal	PASS

Project Information			
Mode:	NFC	Voltage:	120V 60HZ
SN:	HQ63B10532	Engineer:	欧树炎
Remark:	5V Polarity: Z		
Test Standard: FCC PART 15 B CLASS B			

### Test Graph

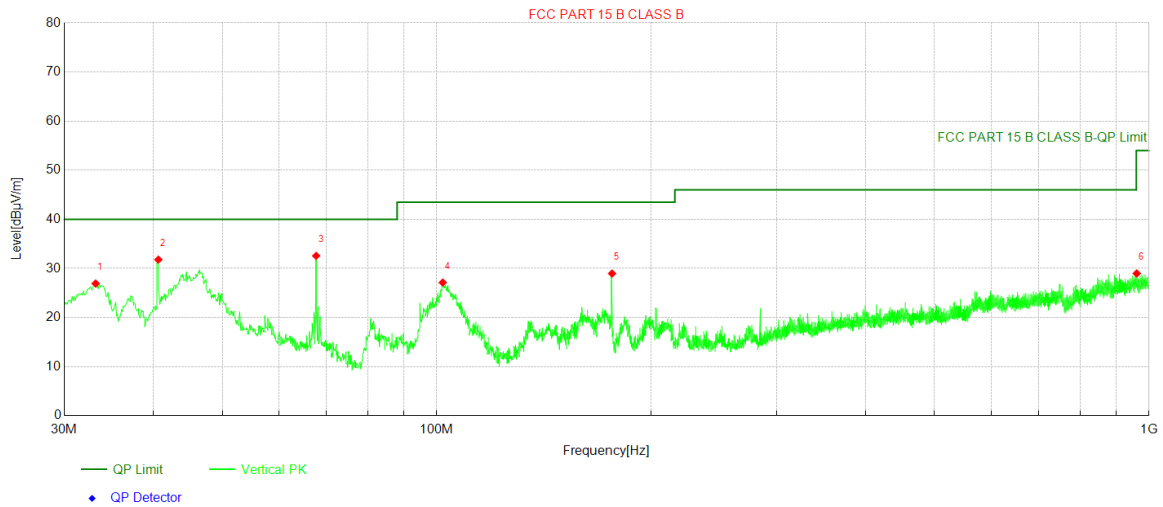

NO.	Freq. [MHz]	Reading [dBuV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Trace	Polarity	Verdict
1	33.201	52.29	-25.37	26.92	40.00	13.08	150	219	PK	Vertical	PASS
2	40.67	55.23	-23.44	31.79	40.00	8.21	174	164	PK	Vertical	PASS
3	67.733	57.68	-25.12	32.56	40.00	7.44	213	13	PK	Vertical	PASS
4	101.974	50.54	-23.42	27.12	43.50	16.38	119	268	PK	Vertical	PASS
5	176.276	54.32	-25.36	28.96	43.50	14.54	200	210	PK	Vertical	PASS
6	961.103	36.98	-8.01	28.97	54.00	25.03	147	360	PK	Vertical	PASS

~The End~