




LTE B41 5MHz 16QAM Low Channel FRB

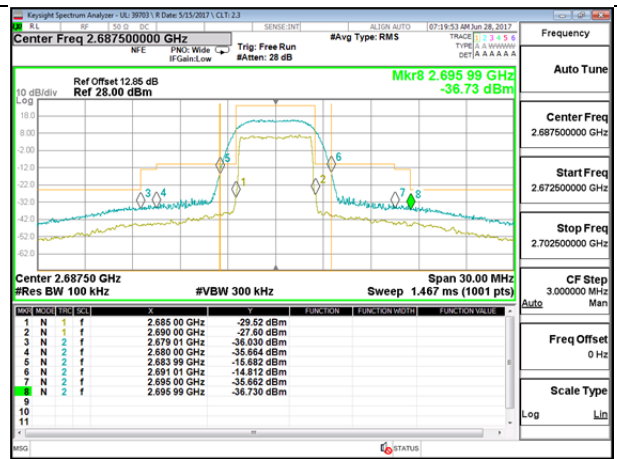


LTE B41 5MHz 16QAM High Channel FRB

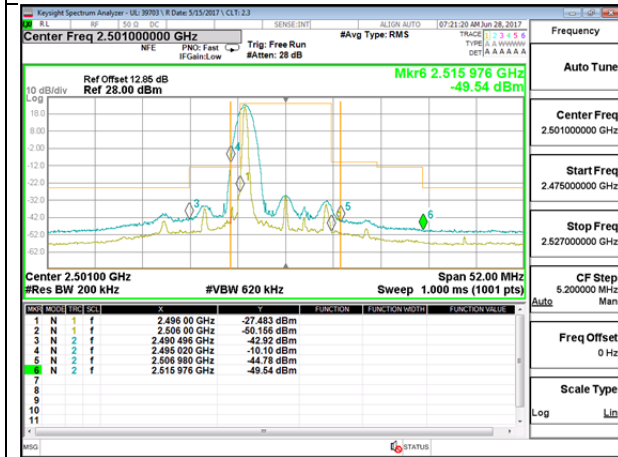


LTE B41 10MHz QPSK Low Channel 1RB

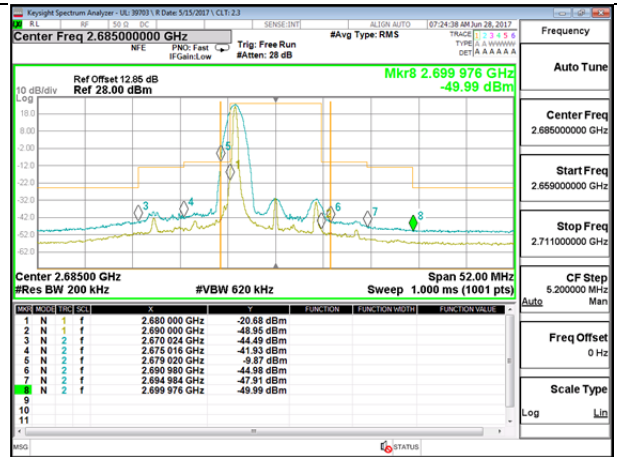


LTE B41 10MHz QPSK High Channel 1RB

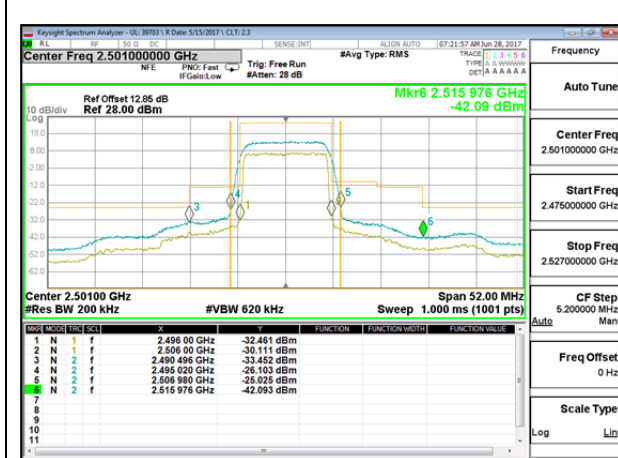


LTE B41 10MHz QPSK Low Channel FRB

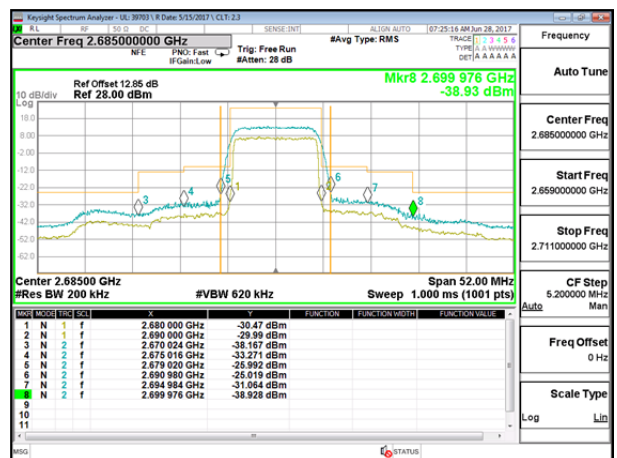


LTE B41 10MHz QPSK High Channel FRB

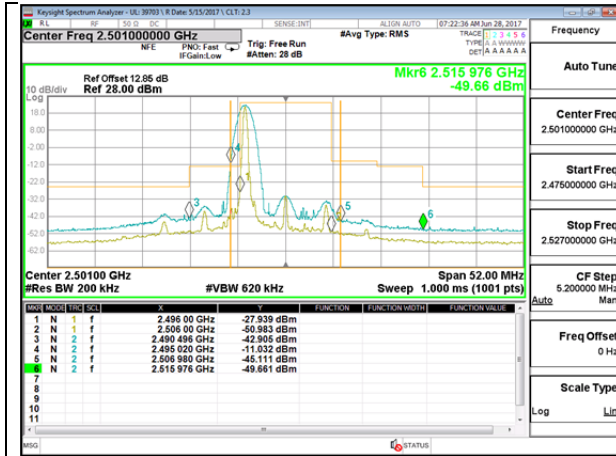


LTE B41 10MHz 16QAM Low Channel 1RB

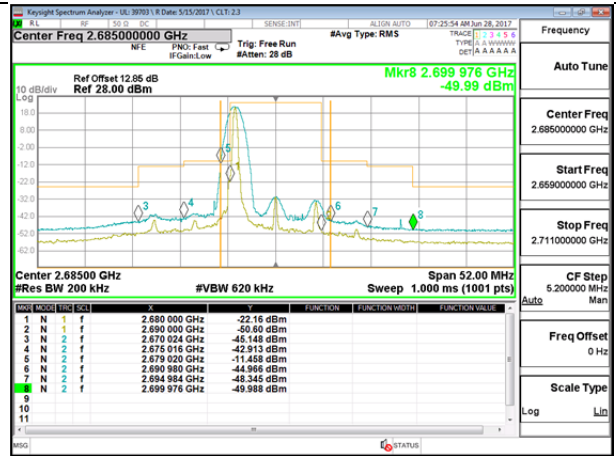


LTE B41 10MHz 16QAM High Channel 1RB

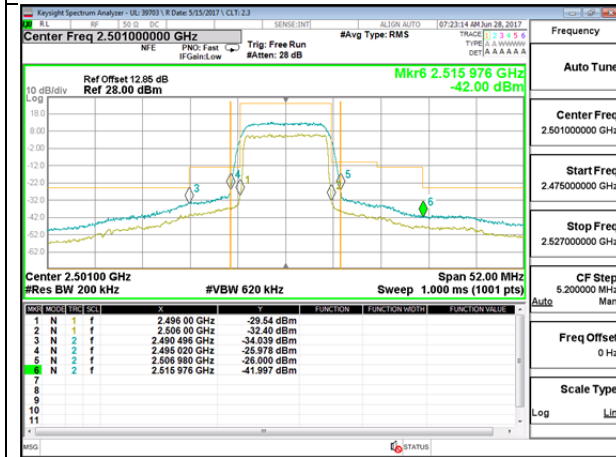


LTE B41 10MHz 16QAM Low Channel FRB

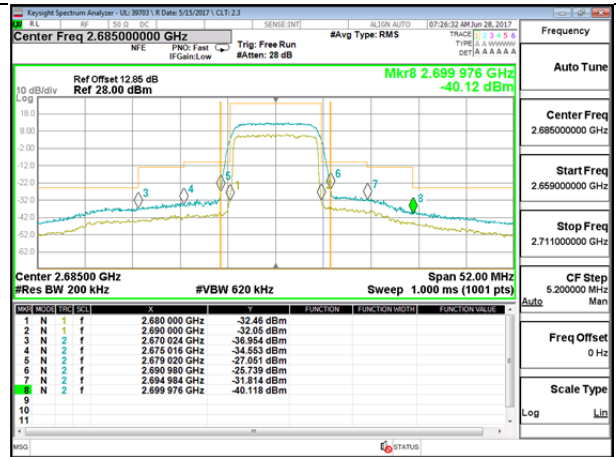


LTE B41 10MHz 16QAM High Channel FRB

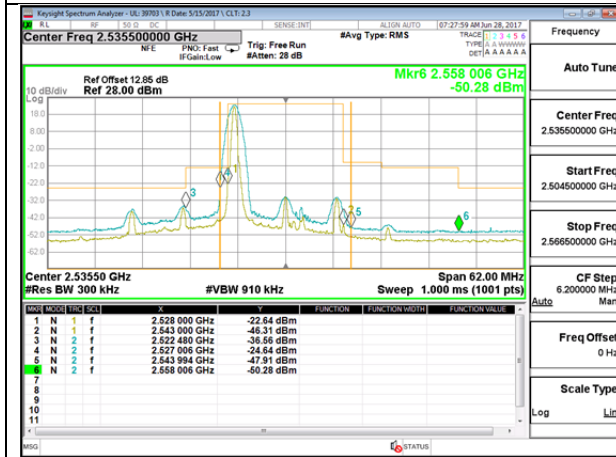


LTE B41 15MHz QPSK Low Channel 1RB

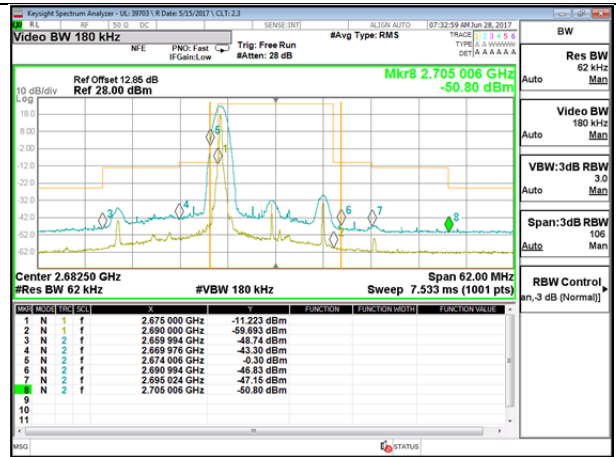


LTE B41 15MHz QPSK High Channel 1RB

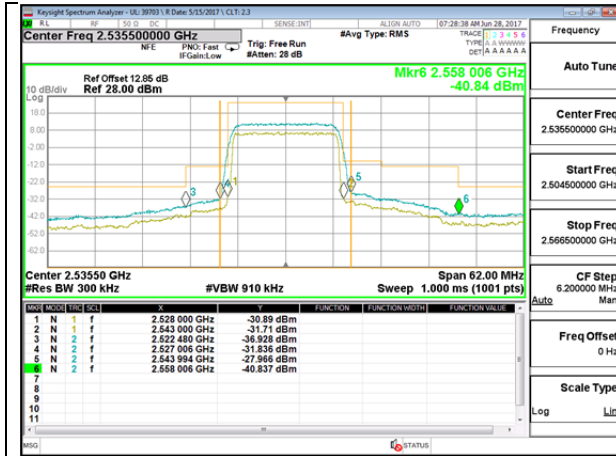


LTE B41 15MHz QPSK Low Channel FRB

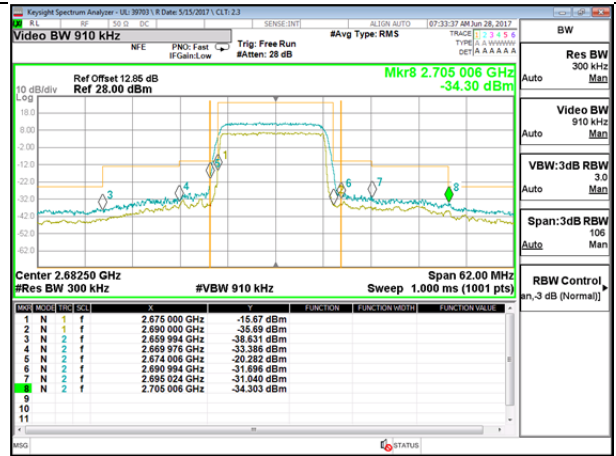


LTE B41 15MHz QPSK High Channel FRB

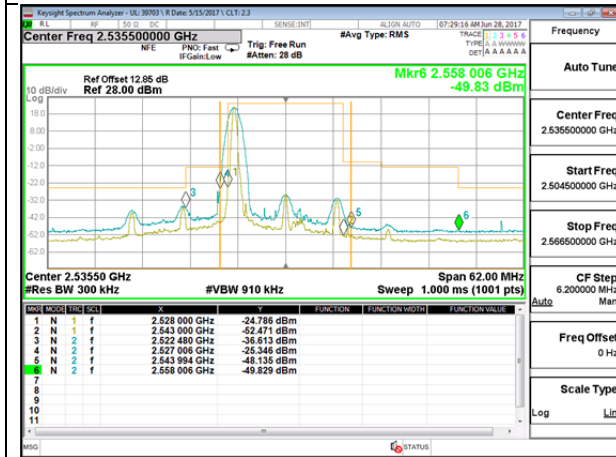


LTE B41 15MHz 16QAM Low Channel 1RB

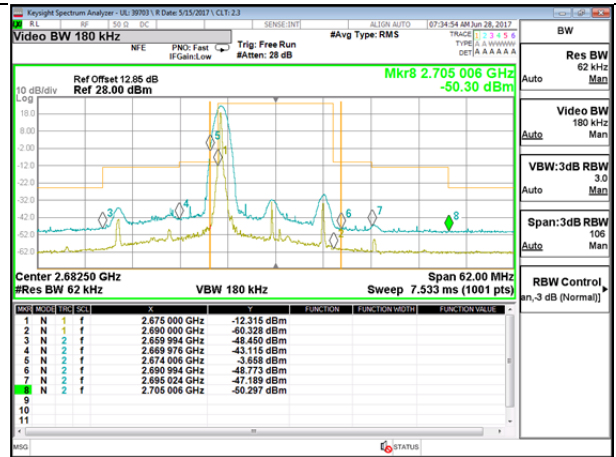


LTE B41 15MHz 16QAM High Channel 1RB

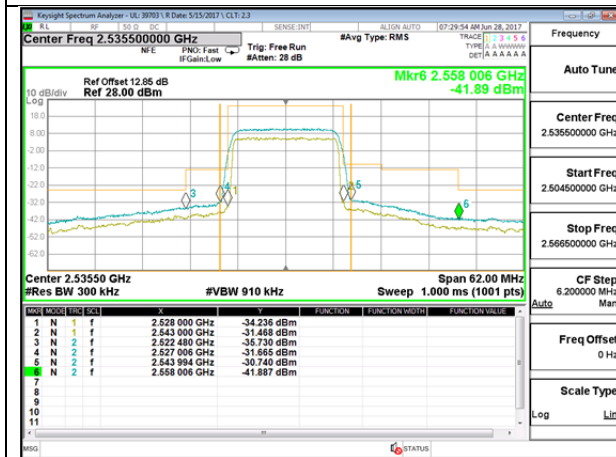


LTE B41 15MHz 16QAM Low Channel FRB

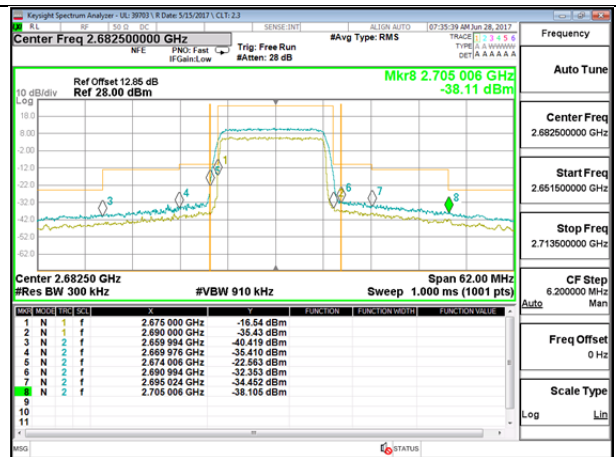


LTE B41 15MHz 16QAM High Channel FRB

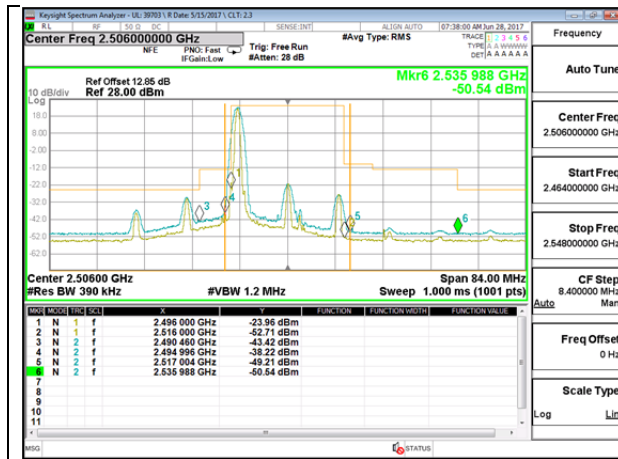


LTE B41 20MHz QPSK Low Channel 1RB

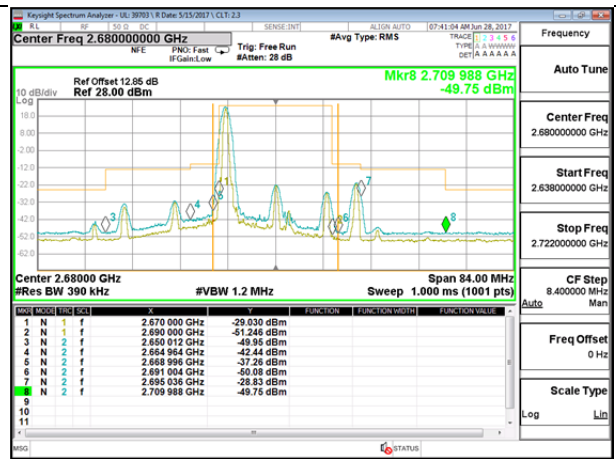


LTE B41 20MHz QPSK High Channel 1RB

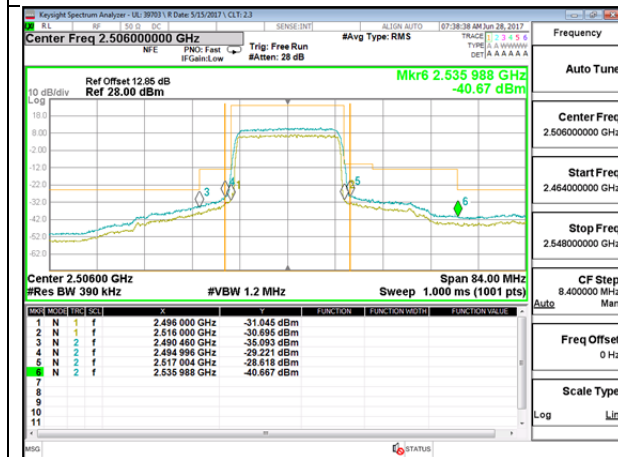


LTE B41 20MHz QPSK Low Channel FRB

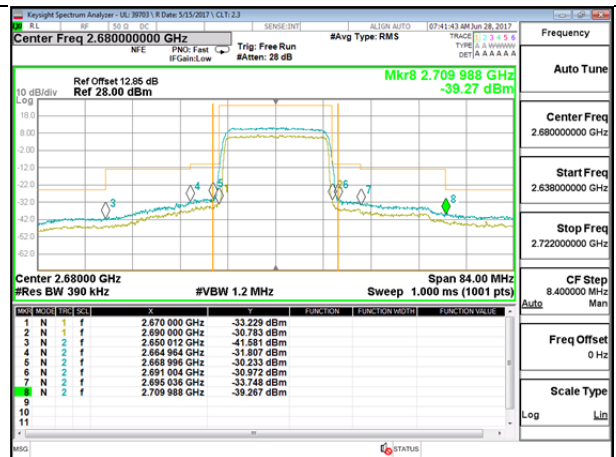


LTE B41 20MHz QPSK High Channel FRB

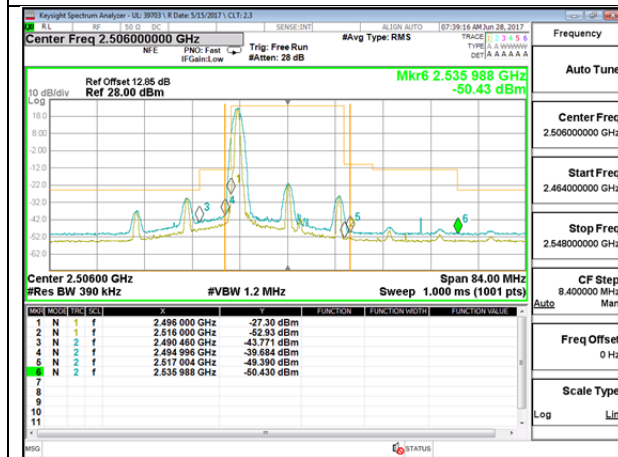


LTE B41 20MHz 16QAM Low Channel 1RB

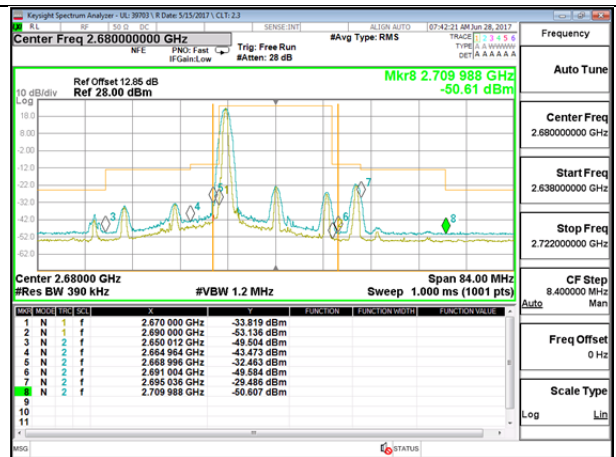

LTE B41 20MHz 16QAM High Channel 1RB

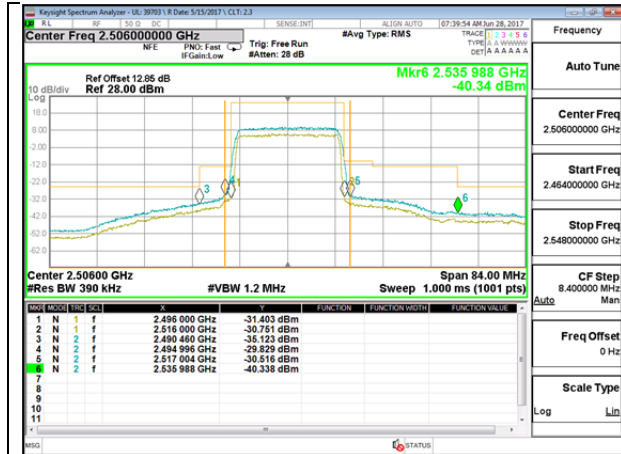

LTE B41 20MHz 16QAM Low Channel FRB

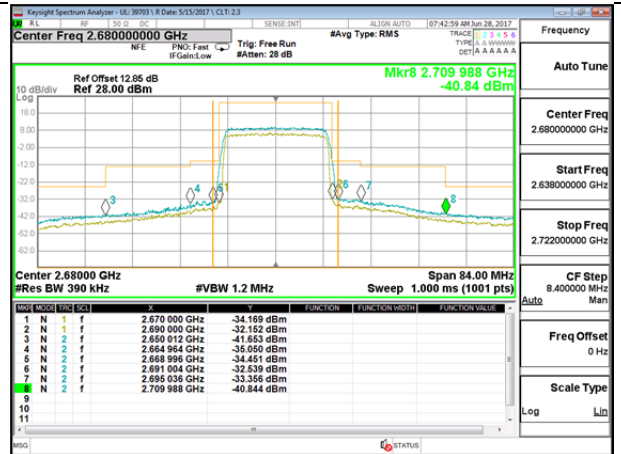

LTE B41 20MHz 16QAM High Channel FRB

15. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53 and §90.691

FCC LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in a maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

15.1. OUT OF BAND EMISSIONS RESULT AND PLOTS


GSM

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM 850	GPRS	824.2	-25.74	-13	-12.74
		836.6	-25.53	-13	-12.53
		848.8	-25.00	-13	-12.00
	EGPRS	824.2	-26.09	-13	-13.09
		836.6	-25.08	-13	-12.08
		848.8	-25.17	-13	-12.17
GSM 1900	GPRS	1850.2	-25.78	-13	-12.78
		1880	-26.07	-13	-13.07
		1909.8	-25.93	-13	-12.93
	EGPRS	1850.2	-25.45	-13	-12.45
		1880	-25.76	-13	-12.76
		1909.8	-24.92	-13	-11.92

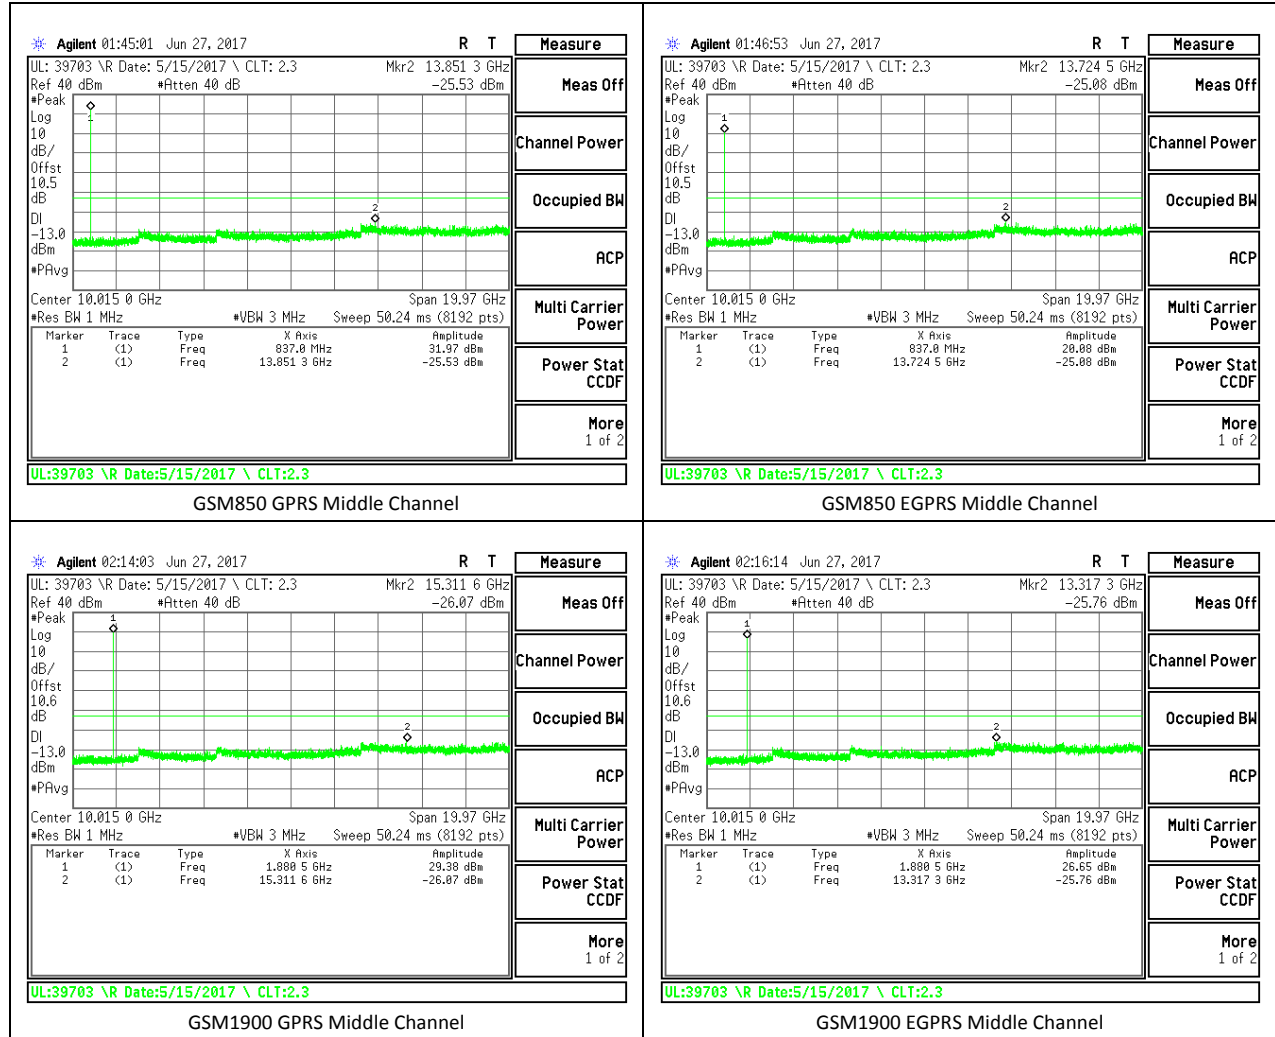


WCDMA


	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 2	REL99	1852.4	-25.61	-13	-12.61
		1880	-26.39	-13	-13.39
		1907.6	-25.58	-13	-12.58
	HSDPA	1852.4	-24.87	-13	-11.87
		1880	-25.2	-13	-12.20
		1907.6	-25.86	-13	-12.86
Band 4	REL99	1712.4	-25.26	-13	-12.26
		1732.6	-25.65	-13	-12.65
		1752.6	-26.56	-13	-13.56
	HSDPA	1712.4	-25.52	-13	-12.52
		1732.6	-25.31	-13	-12.31
		1752.6	-26.36	-13	-13.36
Band 5	REL99	826.4	-25.64	-13	-12.64
		836.6	-25.85	-13	-12.85
		846.6	-25.25	-13	-12.25
	HSDPA	826.4	-24.81	-13	-11.81
		836.6	-25.58	-13	-12.58
		846.6	-25.52	-13	-12.52

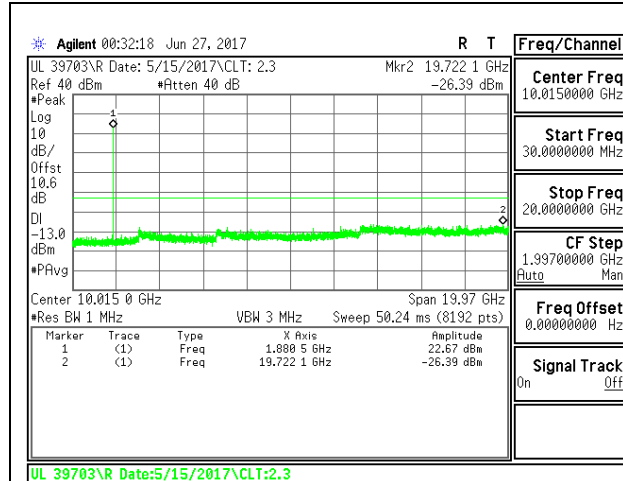


B2 REL99 Middle Channel

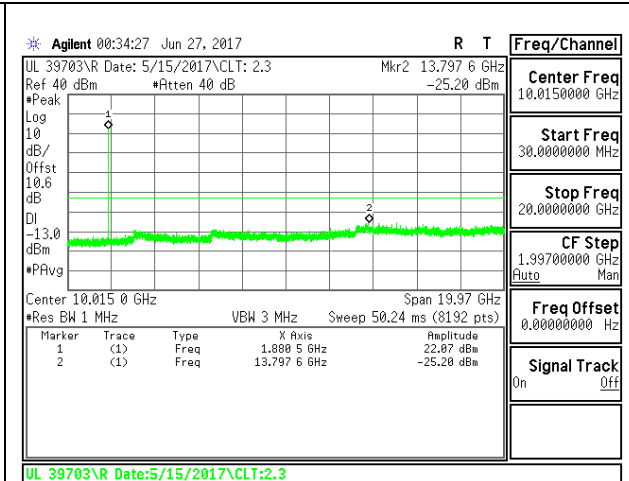


B2 HSDPA Middle Channel

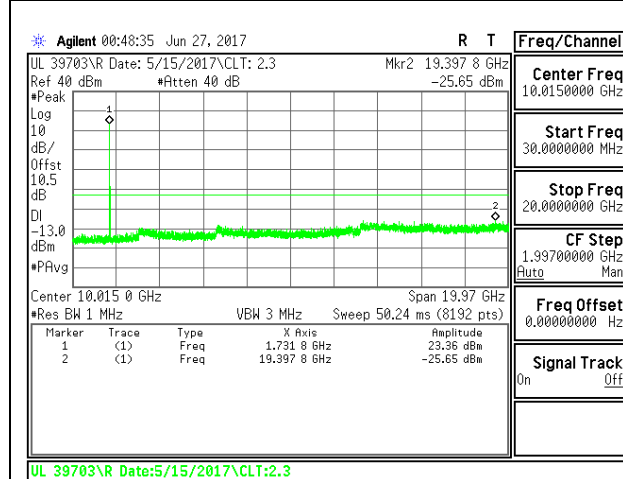


B4 REL99 Middle Channel

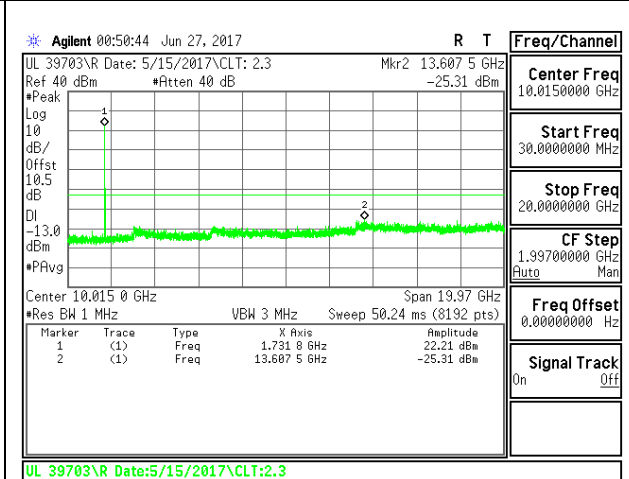

B4 HSDPA Middle Channel

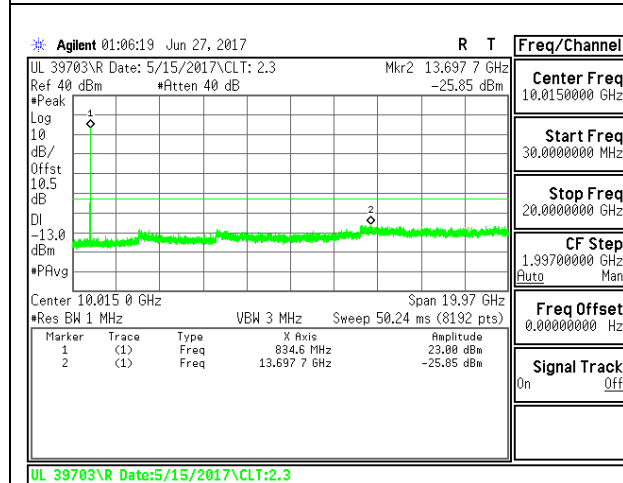


B5 REL99 Middle Channel

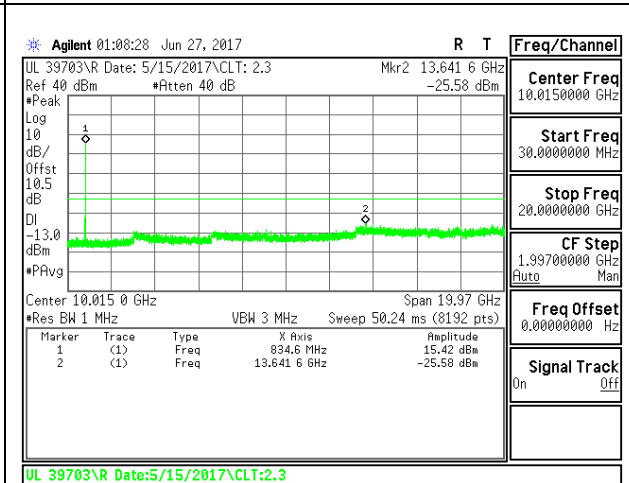


B5 HSDPA Middle Channel

LTE Band 5


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE26	1.4	16QAM	824.7	-33.16	-13	-20.16
			836.5	-33.92	-13	-20.92
			848.3	-33.04	-13	-20.04
		QPSK	824.7	-32.76	-13	-19.76
			836.5	-33.47	-13	-20.47
			848.3	-33.41	-13	-20.41
	3	16QAM	825.5	-32.71	-13	-19.71
			836.5	-32.90	-13	-19.90
			847.5	-32.33	-13	-19.33
		QPSK	825.5	-33.38	-13	-20.38
			836.5	-33.72	-13	-20.72
			847.5	-33.84	-13	-20.84
	5	16QAM	826.5	-33.51	-13	-20.51
			836.5	-34.04	-13	-21.04
			846.5	-33.28	-13	-20.28
		QPSK	826.5	-33.68	-13	-20.68
			836.5	-33.42	-13	-20.42
			846.5	-33.50	-13	-20.50
	10	16QAM	829	-33.68	-13	-20.68
			836.5	-33.24	-13	-20.24
			844	-33.62	-13	-20.62
		QPSK	829	-33.08	-13	-20.08
			836.5	-33.54	-13	-20.54
			844	-33.59	-13	-20.59

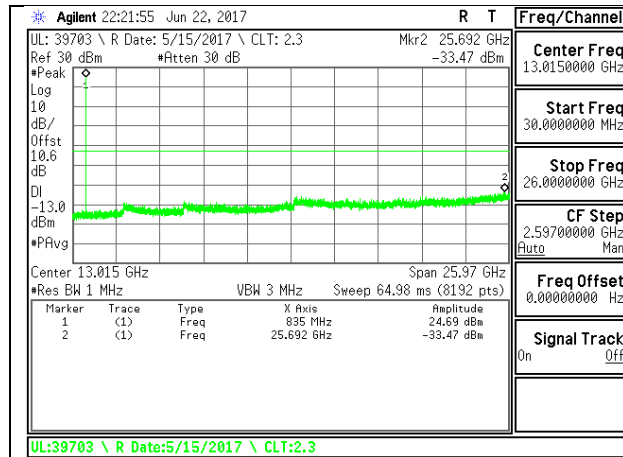


LTE B5 1.4MHz QPSK Middle Channel

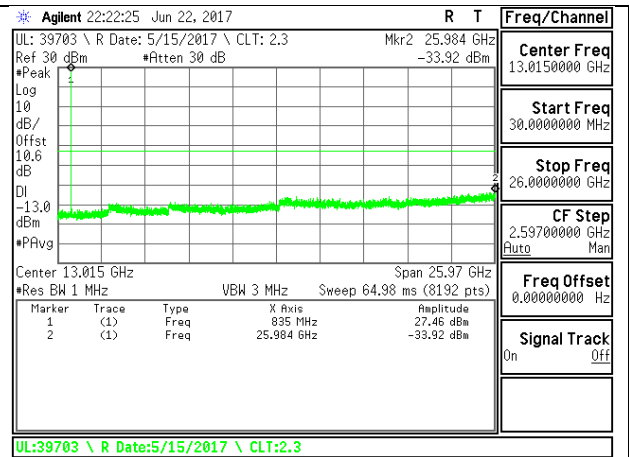


LTE B5 1.4MHz 16QAM Middle Channel

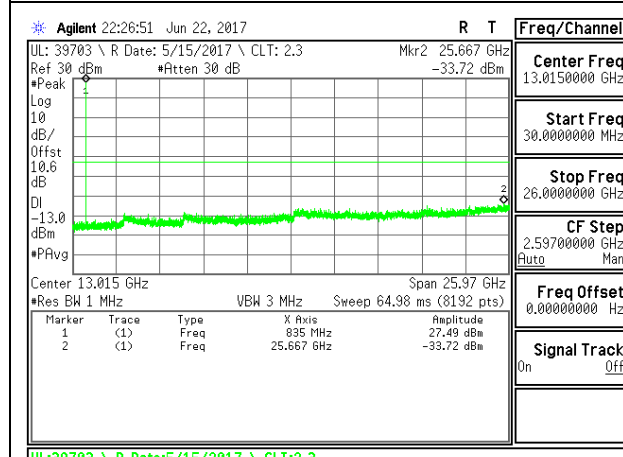


LTE B5 3MHz QPSK Middle Channel

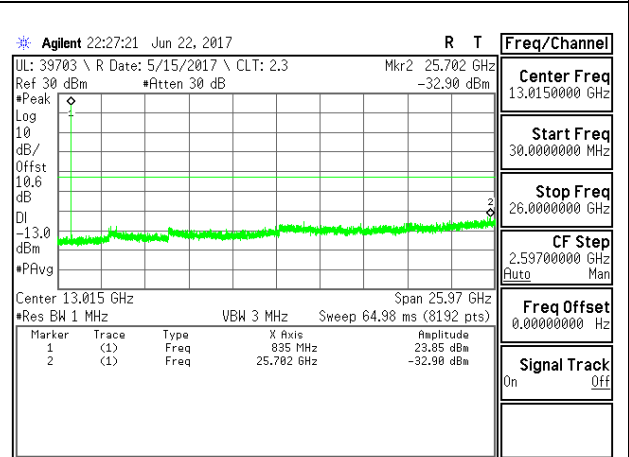


LTE B5 3MHz 16QAM Middle Channel

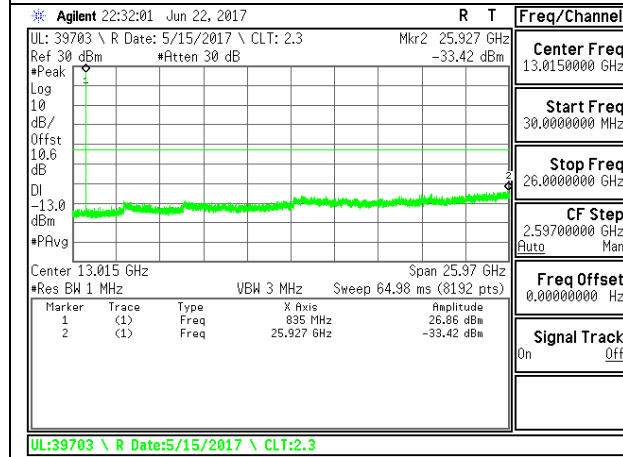

LTE B5 5MHz QPSK Middle Channel

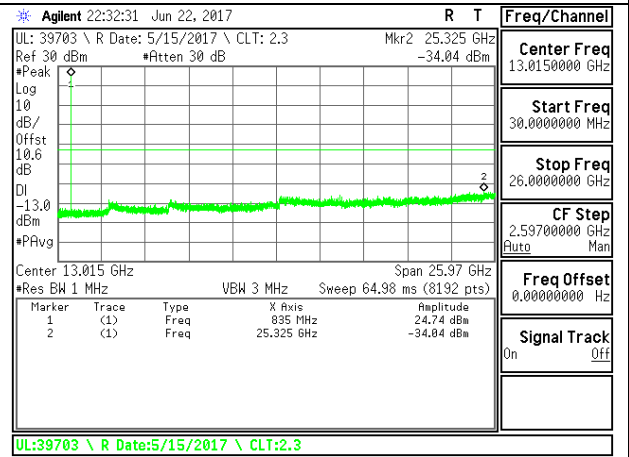


LTE B5 5MHz 16QAM Middle Channel

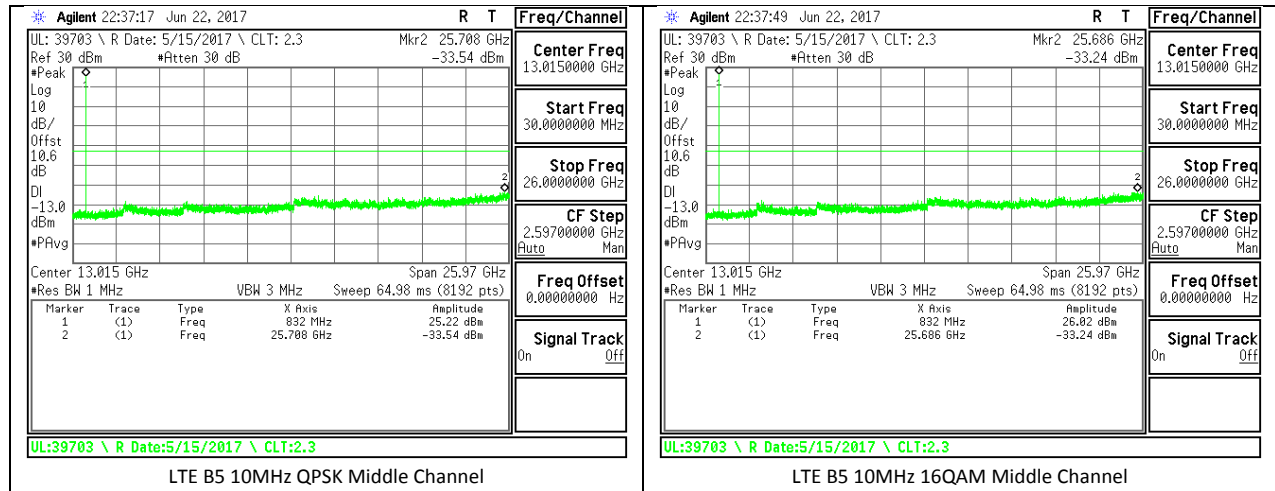


LTE Band 7


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE7	5	16QAM	2502.5	-33.67	-13	-20.67
			2535	-33.65	-13	-20.65
			2567.5	-34.03	-13	-21.03
		QPSK	2502.5	-32.71	-13	-19.71
			2535	-33.19	-13	-20.19
			2567.5	-33.11	-13	-20.11
	10	16QAM	2505	-33.62	-13	-20.62
			2535	-32.46	-13	-19.46
			2565	-33.28	-13	-20.28
		QPSK	2505	-33.14	-13	-20.14
			2535	-32.64	-13	-19.64
			2565	-33.75	-13	-20.75
	15	16QAM	2507.5	-33.49	-13	-20.49
			2535	-33.14	-13	-20.14
			2562.5	-32.21	-13	-19.21
		QPSK	2507.5	-33.42	-13	-20.42
			2535	-33.31	-13	-20.31
			2562.5	-33.11	-13	-20.11
	20	16QAM	2510	-33.28	-13	-20.28
			2535	-33.25	-13	-20.25
			2560	-33.75	-13	-20.75
		QPSK	2510	-33.35	-13	-20.35
			2535	-32.53	-13	-19.53
			2560	-33.40	-13	-20.40

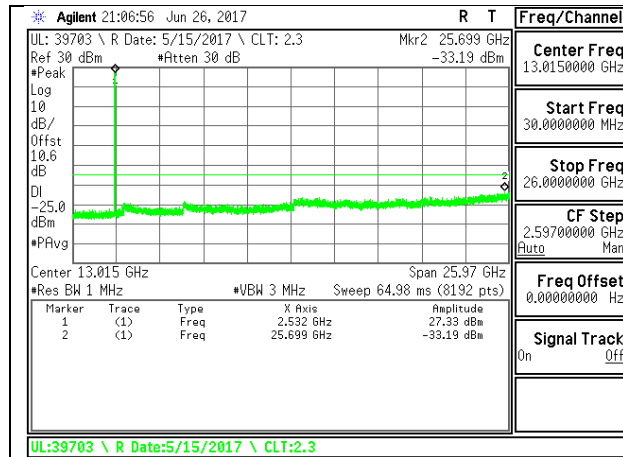


LTE B7 5MHz QPSK Middle Channel

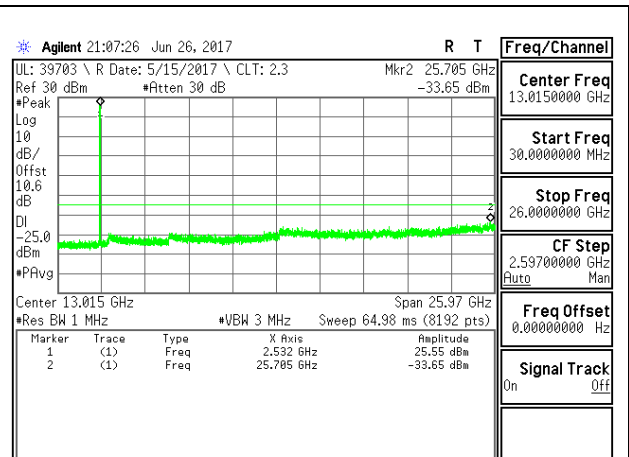


LTE B7 5MHz 16QAM Middle Channel

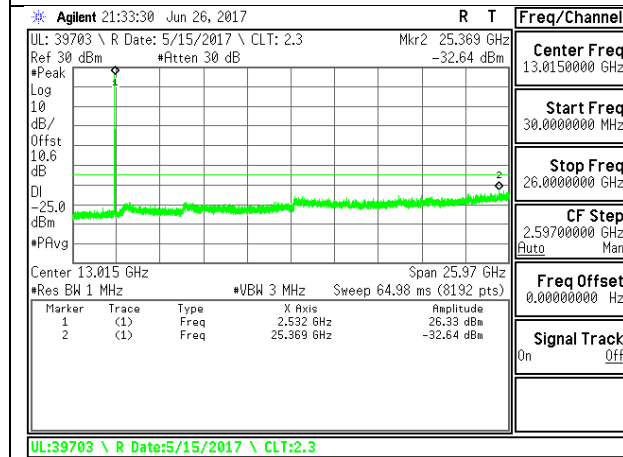


LTE B7 10MHz QPSK Middle Channel

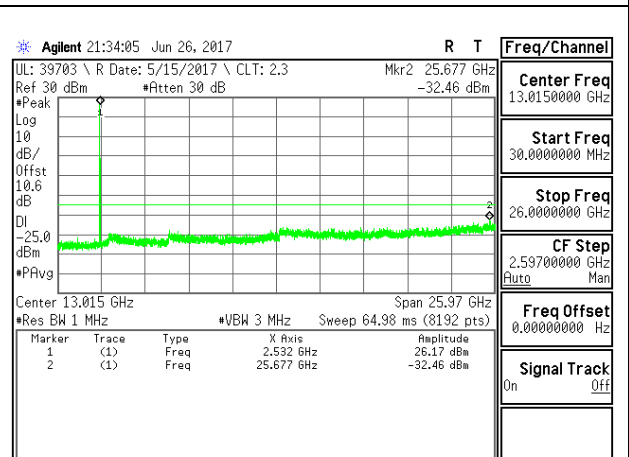


LTE B7 10MHz 16QAM Middle Channel

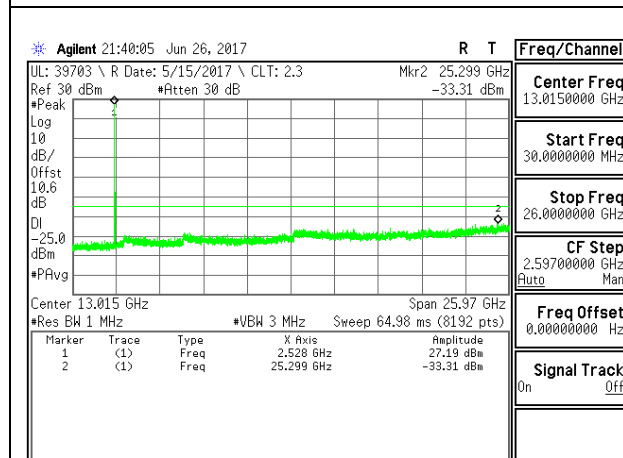

LTE B7 15MHz QPSK Middle Channel

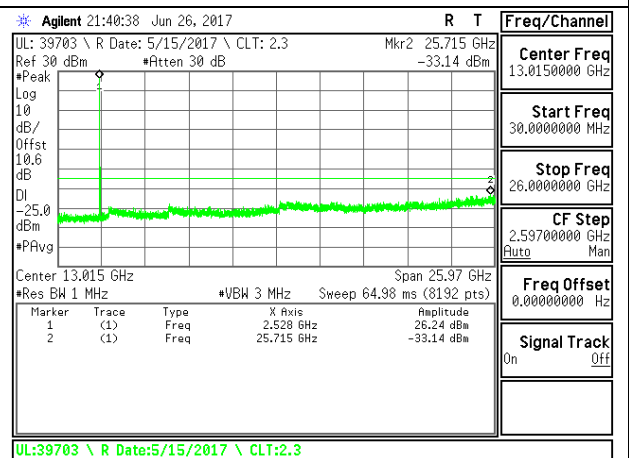


LTE B7 15MHz 16QAM Middle Channel

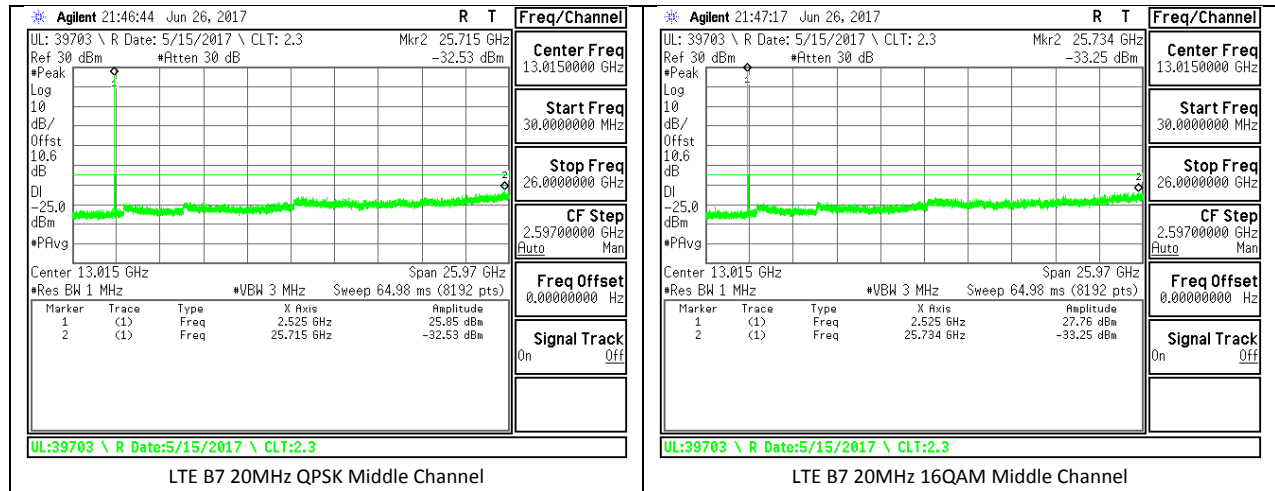


LTE Band 12


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE12	1.4	16QAM	699.7	-34.15	-13	-21.15
			707.5	-33.75	-13	-20.75
			715.3	-33.66	-13	-20.66
		QPSK	699.7	-33.01	-13	-20.01
			707.5	-33.96	-13	-20.96
			715.3	-33.94	-13	-20.94
	3	16QAM	700.5	-33.81	-13	-20.81
			707.5	-33.70	-13	-20.70
			714.5	-33.99	-13	-20.99
		QPSK	700.5	-33.84	-13	-20.84
			707.5	-33.58	-13	-20.58
			714.5	-33.42	-13	-20.42
	5	16QAM	701.5	-33.83	-13	-20.83
			707.5	-33.85	-13	-20.85
			713.5	-33.64	-13	-20.64
		QPSK	701.5	-34.09	-13	-21.09
			707.5	-33.58	-13	-20.58
			713.5	-33.74	-13	-20.74
	10	16QAM	704	-33.31	-13	-20.31
			707.5	-33.32	-13	-20.32
			711	-33.91	-13	-20.91
		QPSK	704	-32.67	-13	-19.67
			707.5	-34.16	-13	-21.16
			711	-33.73	-13	-20.73

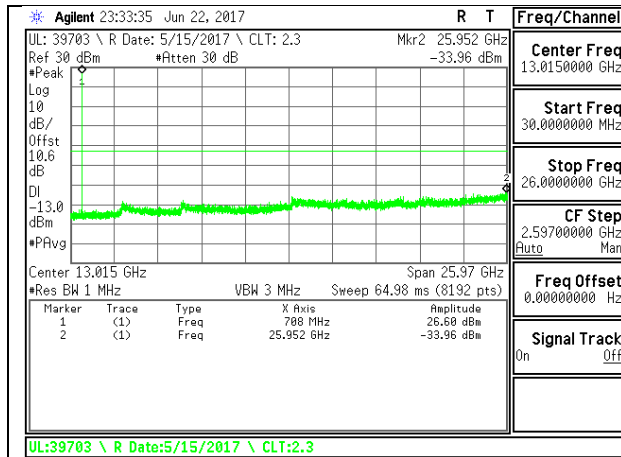


LTE B12 1.4MHz QPSK Middle Channel

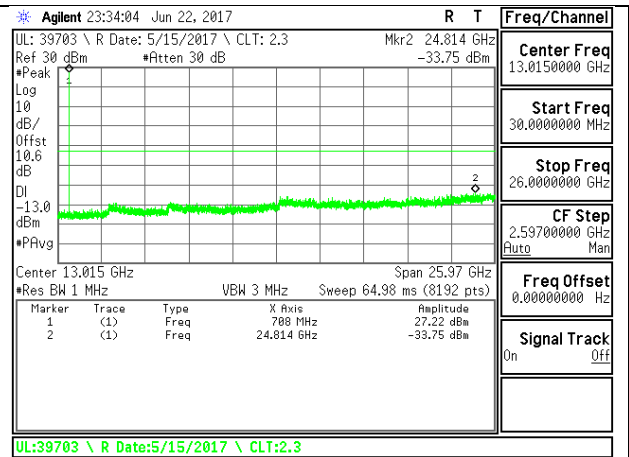


LTE B12 1.4MHz 16QAM Middle Channel

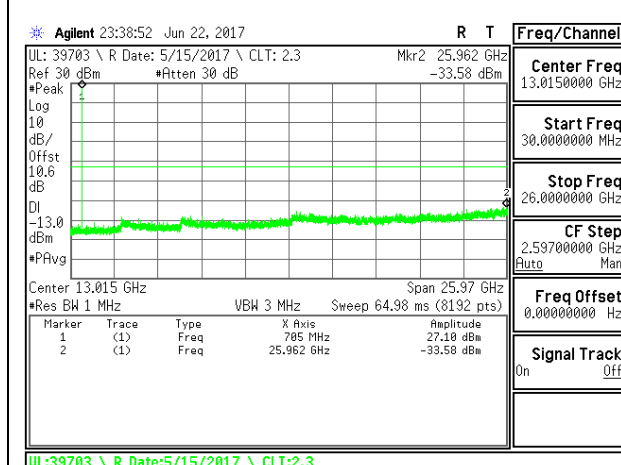


LTE B12 3MHz QPSK Middle Channel

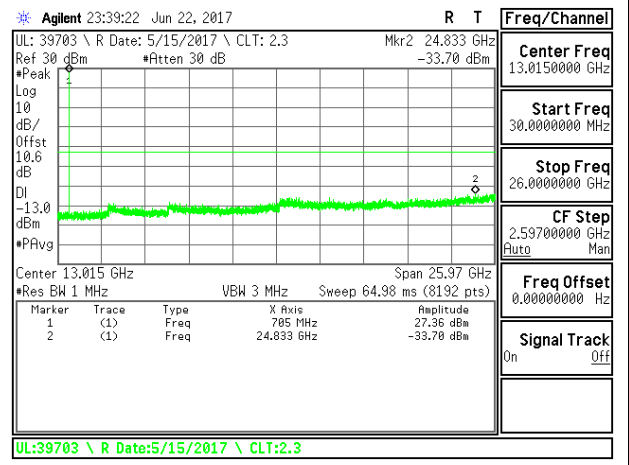


LTE B12 3MHz 16QAM Middle Channel

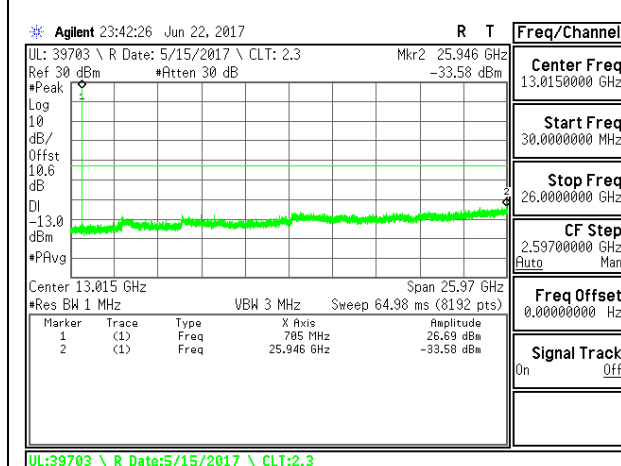

LTE B12 5MHz QPSK Middle Channel

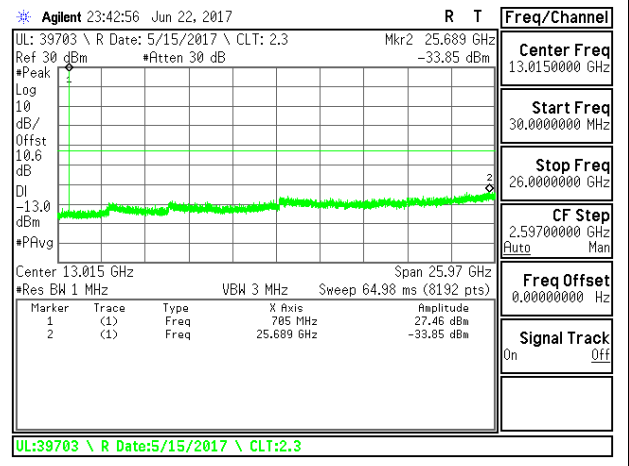


LTE B12 5MHz 16QAM Middle Channel

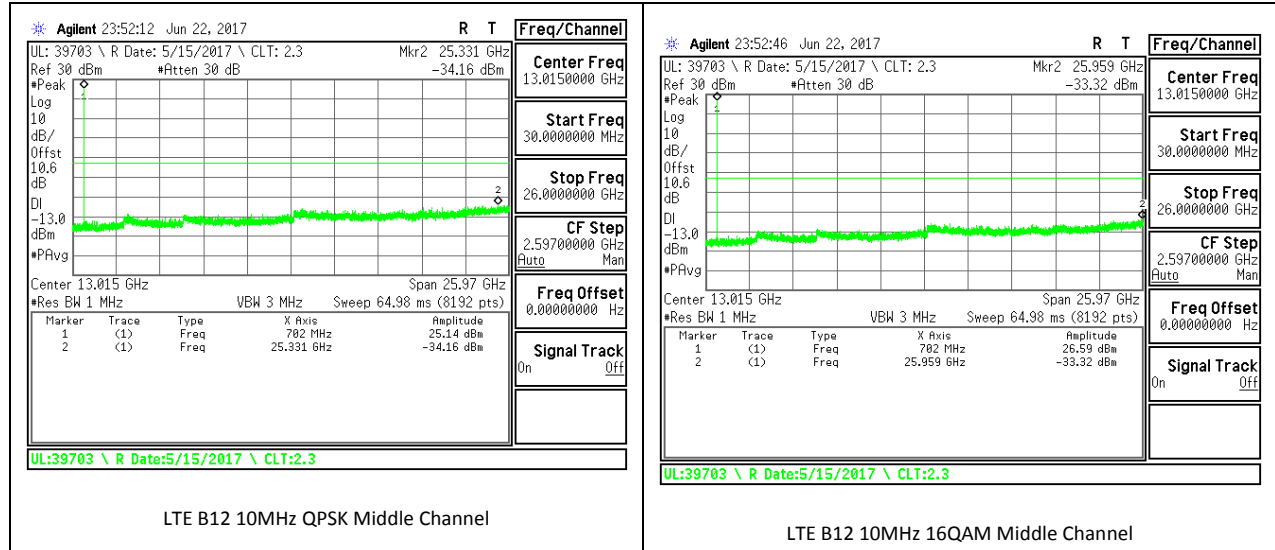


LTE Band 13


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE13	5	16QAM	779.5	-32.85	-13	-19.85
			782	-33.40	-13	-20.40
			784.5	-33.60	-13	-20.60
		QPSK	779.5	-33.35	-13	-20.35
			782	-34.11	-13	-21.11
			784.5	-33.49	-13	-20.49
	10	16QAM	-	-	-	-
			782	-32.98	-13	-19.98
			-	-	-	-
		QPSK	-	-	-	-
			782	-32.82	-13	-19.82
			-	-	-	-

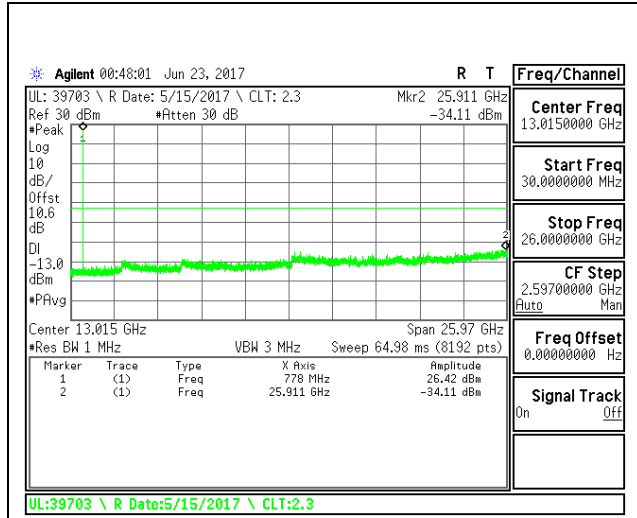


LTE B13 5MHz QPSK Middle Channel

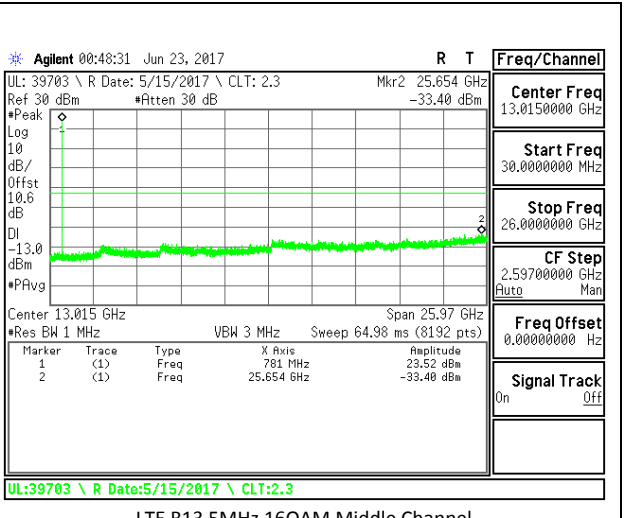

LTE B13 5MHz 16QAM Middle Channel

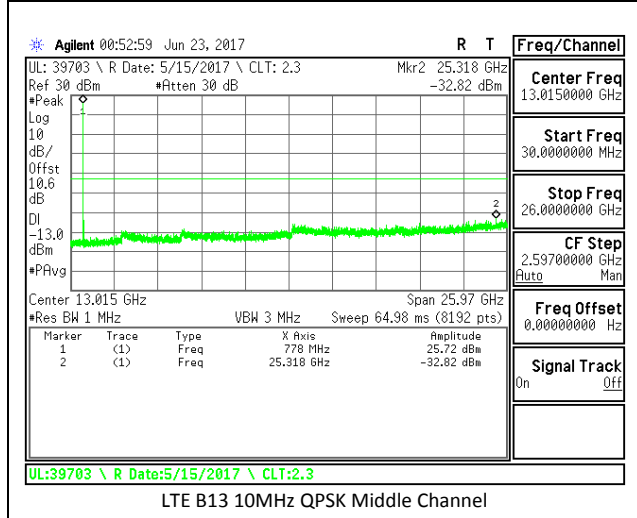

LTE B13 10MHz QPSK Middle Channel






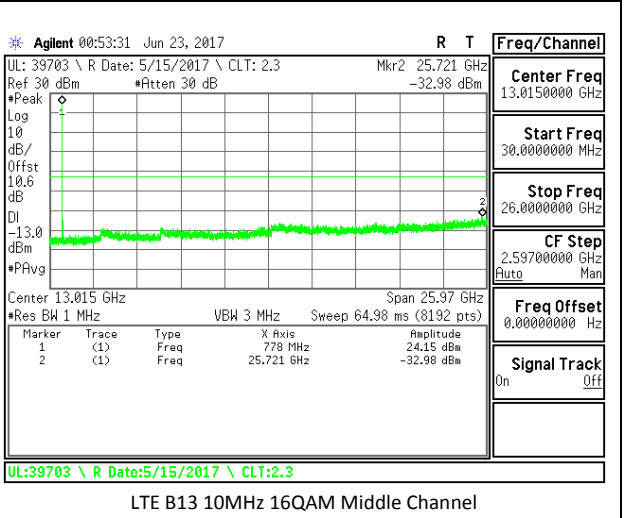



LTE B13 10MHz 16QAM Middle Channel

LTE Band 25

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE25	1.4	16QAM	1850.7	-33.35	-13	-20.35
			1882.5	-32.30	-13	-19.3
			1914.3	-33.52	-13	-20.52
		QPSK	1850.7	-33.41	-13	-20.41
			1882.5	-33.55	-13	-20.55
			1914.3	-32.87	-13	-19.87
	3	16QAM	1851.5	-34.17	-13	-21.17
			1882.5	-33.96	-13	-20.96
			1913.5	-32.76	-13	-19.76
		QPSK	1851.5	-33.05	-13	-20.05
			1882.5	-33.56	-13	-20.56
			1913.5	-34.01	-13	-21.01
	5	16QAM	1852.5	-33.56	-13	-20.56
			1882.5	-33.31	-13	-20.31
			1912.5	-33.72	-13	-20.72
		QPSK	1852.5	-33.52	-13	-20.52
			1882.5	-33.51	-13	-20.51
			1912.5	-33.53	-13	-20.53
	10	16QAM	1855	-33.28	-13	-20.28
			1882.5	-33.29	-13	-20.29
			1910	-34.05	-13	-21.05
		QPSK	1855	-33.05	-13	-20.05
			1882.5	-33.60	-13	-20.60
			1910	-33.13	-13	-20.13


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE25	15	16QAM	1857.5	-33.01	-13	-20.01
			1882.5	-32.95	-13	-19.95
			1907.5	-34.16	-13	-21.16
		QPSK	1857.5	-33.59	-13	-20.59
			1882.5	-34.00	-13	-21.00
			1907.5	-33.86	-13	-20.86
	20	16QAM	1860	-32.25	-13	-19.25
			1882.5	-33.12	-13	-20.12
			1905	-33.57	-13	-20.57
		QPSK	1860	-33.50	-13	-20.50
			1882.5	-32.57	-13	-19.57
			1905	-32.81	-13	-19.81

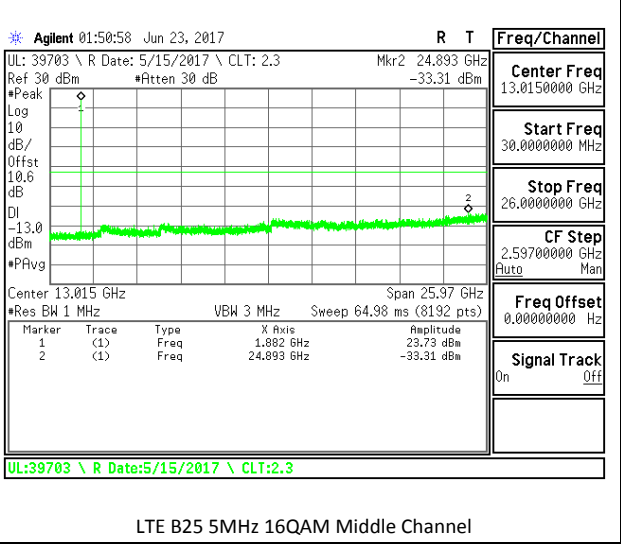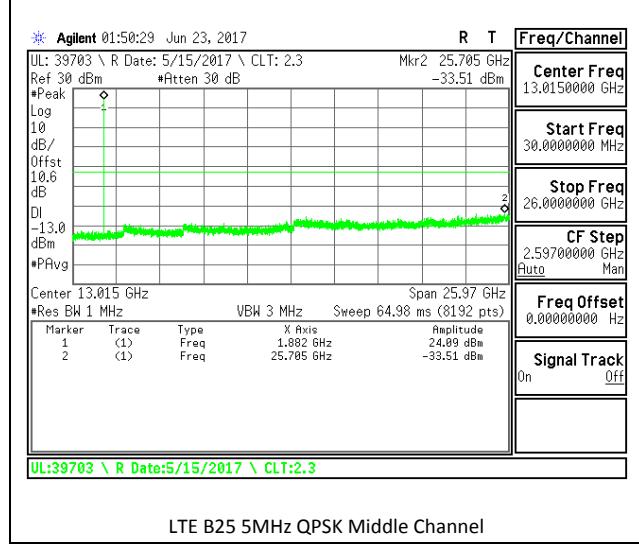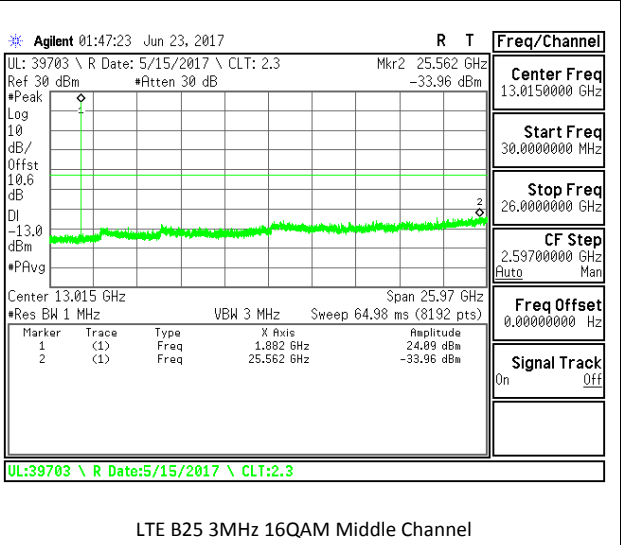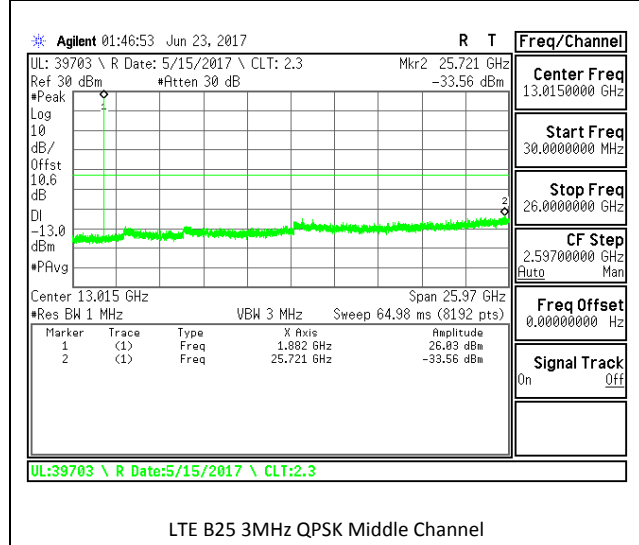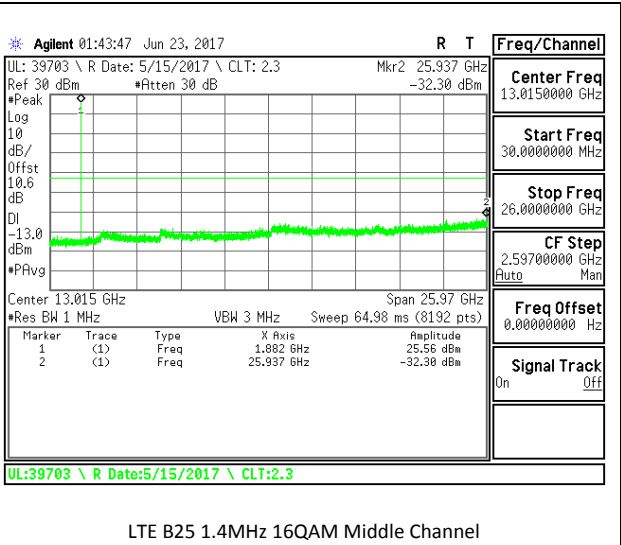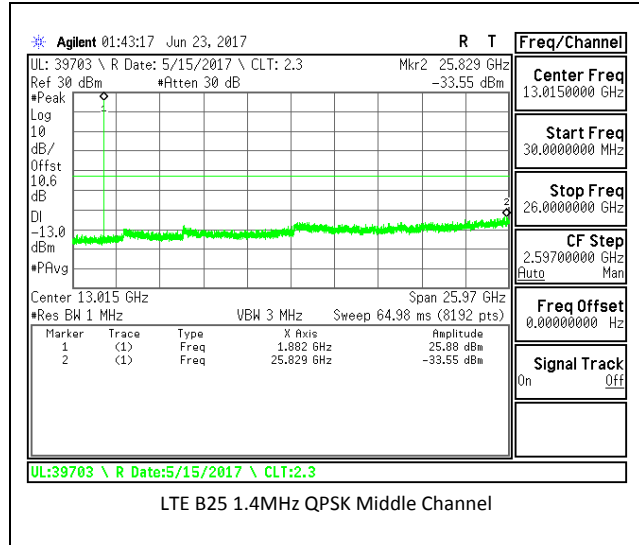


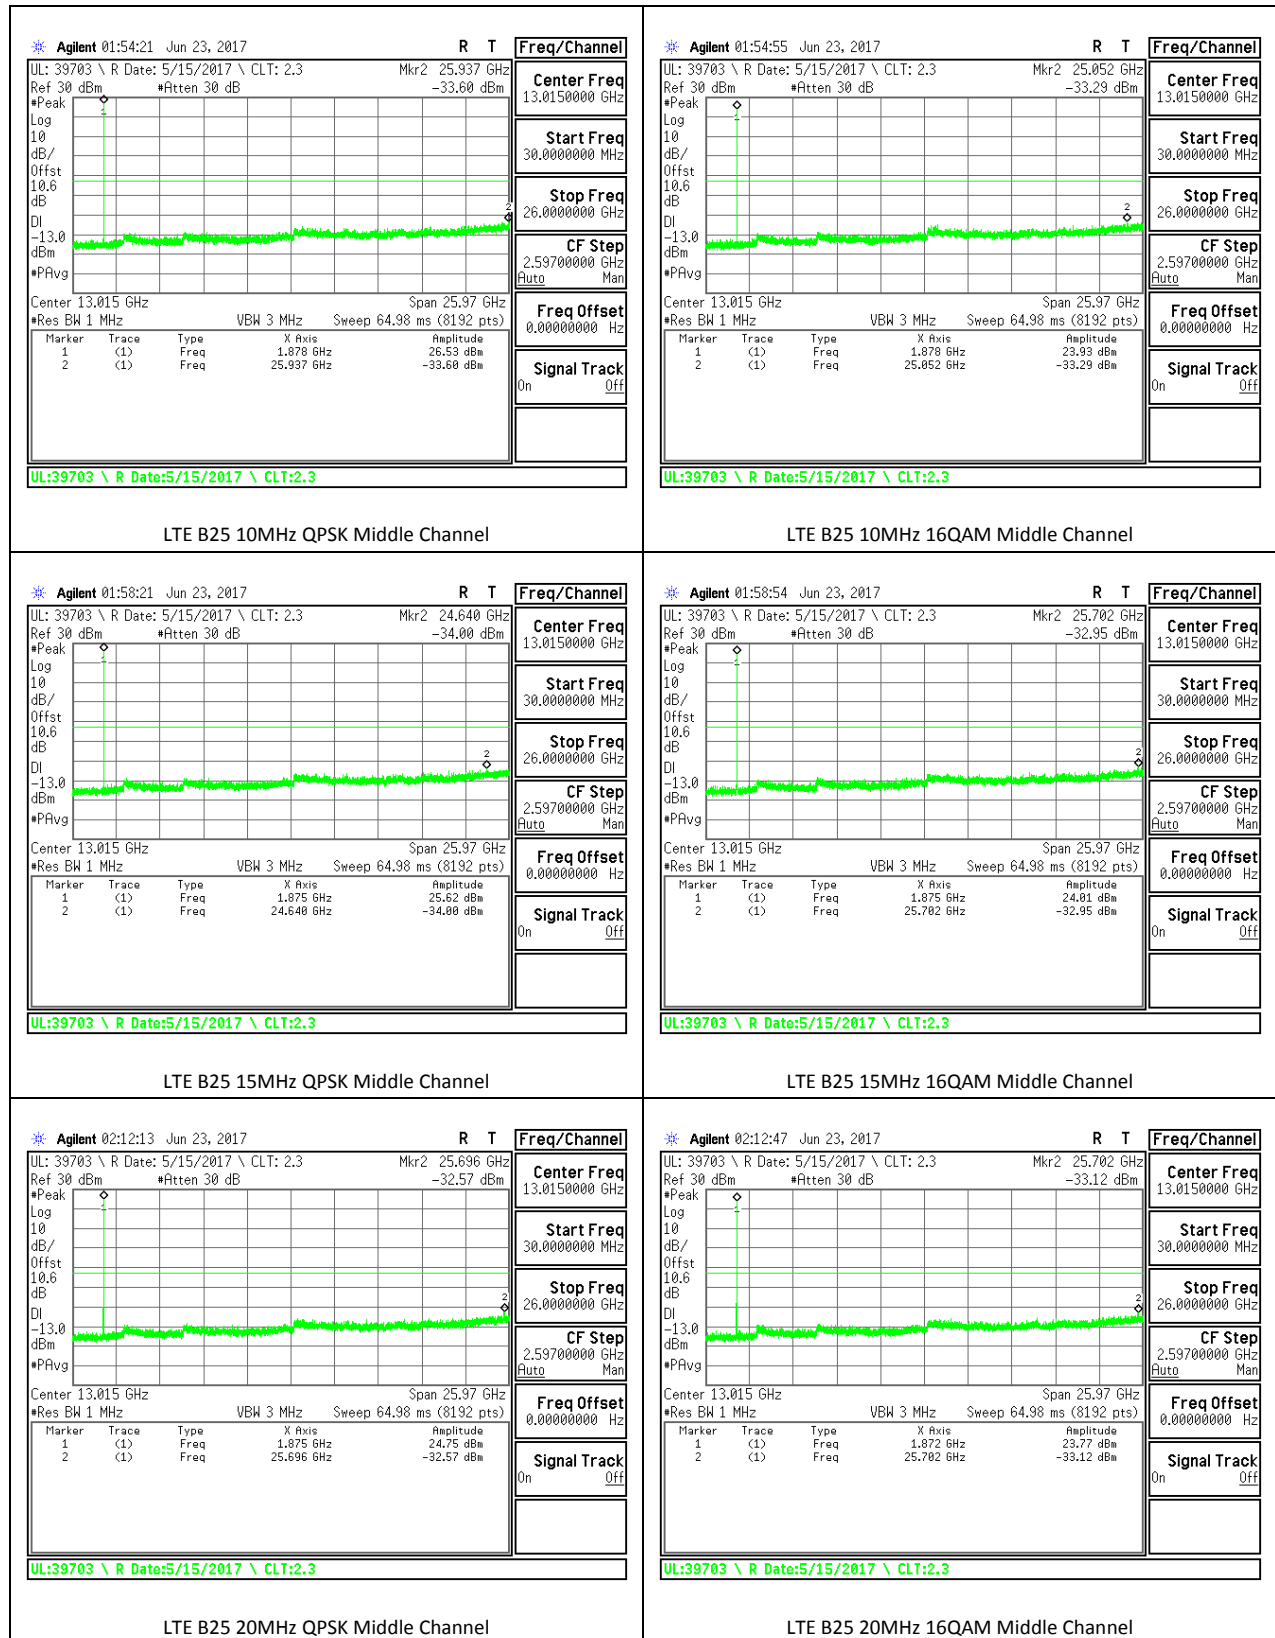

LTE Band 41

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE41	5	16QAM	2498.5	-37.28	-25	-12.28
			2593	-37.36	-25	-12.36
			2687.5	-36.67	-25	-11.67
		QPSK	2498.5	-36.85	-25	-11.85
			2593	-37.49	-25	-12.49
			2687.5	-36.63	-25	-11.63
	10	16QAM	2501	-36.59	-25	-11.59
			2593	-36.69	-25	-11.69
			2685	-37.51	-25	-12.51
		QPSK	2501	-37.26	-25	-12.26
			2593	-35.72	-25	-10.72
			2685	-37.18	-25	-12.18
	15	16QAM	2503.5	-37.27	-25	-12.27
			2593	-37.14	-25	-12.14
			2682.5	-37.46	-25	-12.46
		QPSK	2503.5	-37.63	-25	-12.63
			2593	-36.60	-25	-11.6
			2682.5	-37.31	-25	-12.31
	20	16QAM	2506	-36.14	-25	-11.14
			2593	-37.51	-25	-12.51
			2680	-36.62	-25	-11.62
		QPSK	2506	-37.27	-25	-12.27
			2593	-36.61	-25	-11.61
			2680	-37.22	-25	-12.22

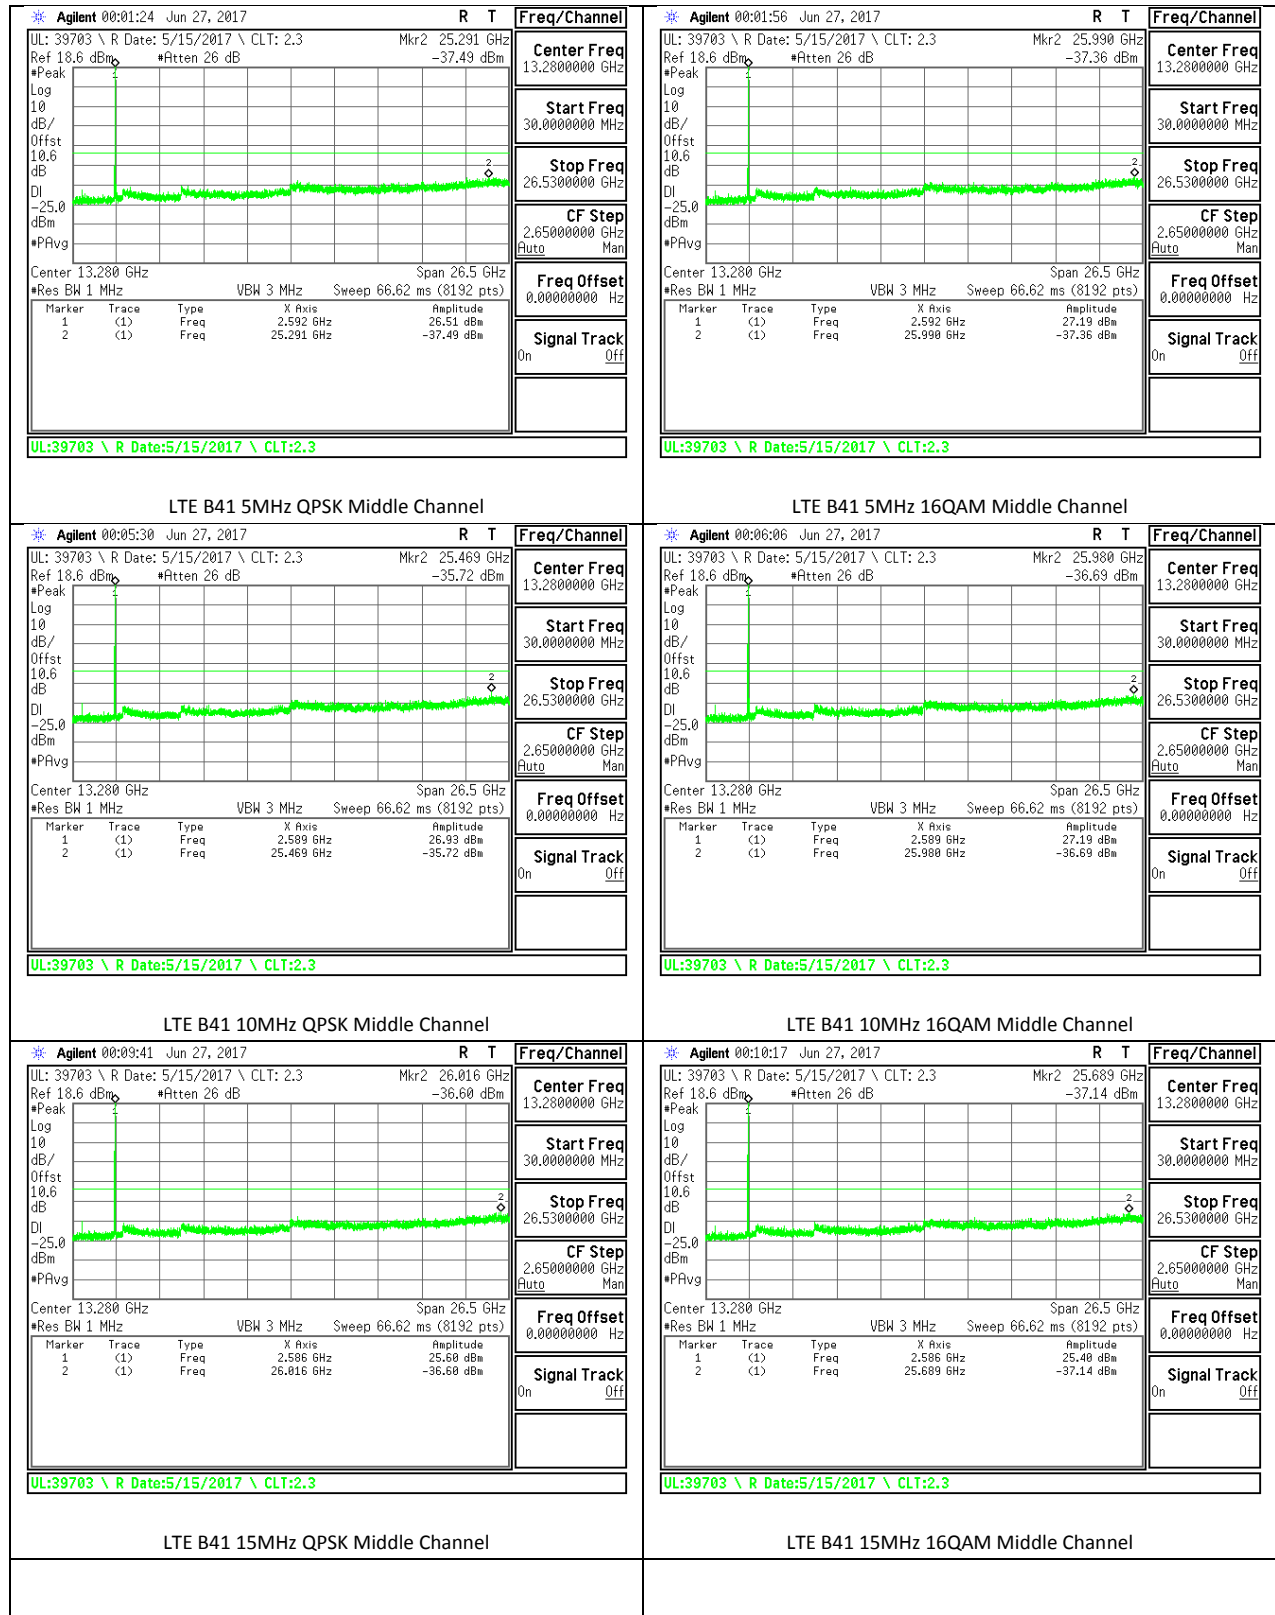


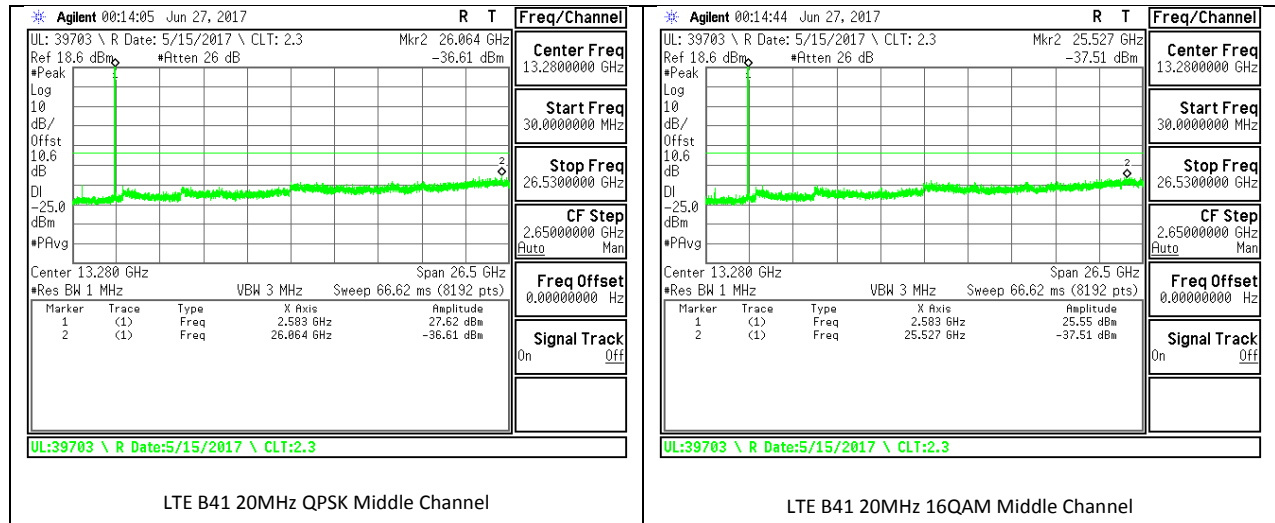


LTE Band 66

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE66	1.4	16QAM	1710.7	-25.54	-13	-12.54
			1745	-24.35	-13	-11.35
			1779.3	-24.95	-13	-11.95
		QPSK	1710.7	-24.67	-13	-11.67
			1745	-25.36	-13	-12.36
			1779.3	-26.20	-13	-13.20
	3	16QAM	1711.5	-24.83	-13	-11.83
			1745	-24.77	-13	-11.77
			1778.5	-25.05	-13	-12.05
		QPSK	1711.5	-24.18	-13	-11.18
			1745	-25.31	-13	-12.31
			1778.5	-24.49	-13	-11.49
	5	16QAM	1712.5	-24.30	-13	-11.30
			1745	-25.45	-13	-12.45
			1777.5	-24.46	-13	-11.46
		QPSK	1712.5	-25.53	-13	-12.53
			1745	-25.54	-13	-12.54
			1777.5	-24.68	-13	-11.68
	10	16QAM	1715	-25.76	-13	-12.76
			1745	-25.28	-13	-12.28
			1775	-24.69	-13	-11.69
		QPSK	1715	-25.68	-13	-12.68
			1745	-24.32	-13	-11.32
			1775	-26.10	-13	-13.10


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE66	15	16QAM	1717.5	-25.30	-13	-12.30
			1745	-25.42	-13	-12.42
			1772.5	-25.79	-13	-12.79
		QPSK	1717.5	-24.75	-13	-11.75
			1745	-24.94	-13	-11.94
			1772.5	-24.47	-13	-11.47
	20	16QAM	1720	-23.81	-13	-10.81
			1745	-25.60	-13	-12.60
			1770	-25.69	-13	-12.69
		QPSK	1720	-25.37	-13	-12.37
			1745	-25.56	-13	-12.56
			1770	-25.98	-13	-12.98

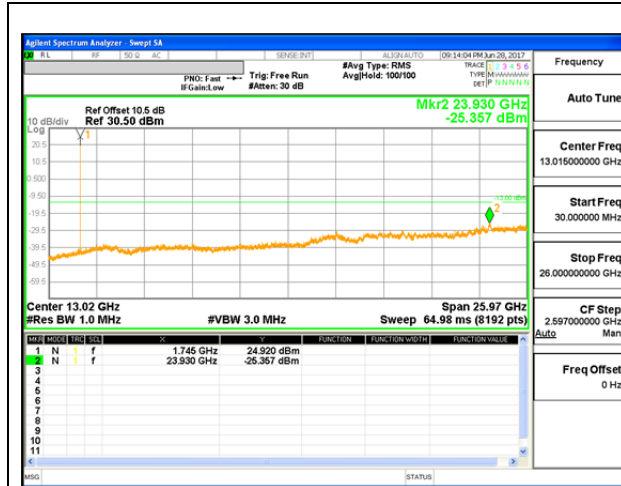


LTE B66 1.4MHz QPSK Middle Channel

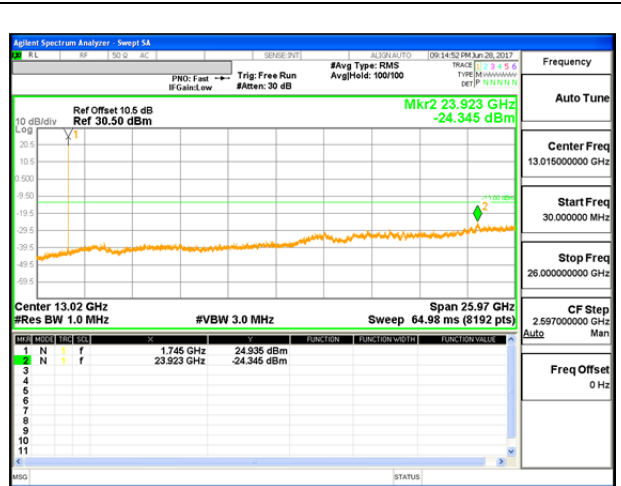


LTE B66 1.4MHz 16QAM Middle Channel

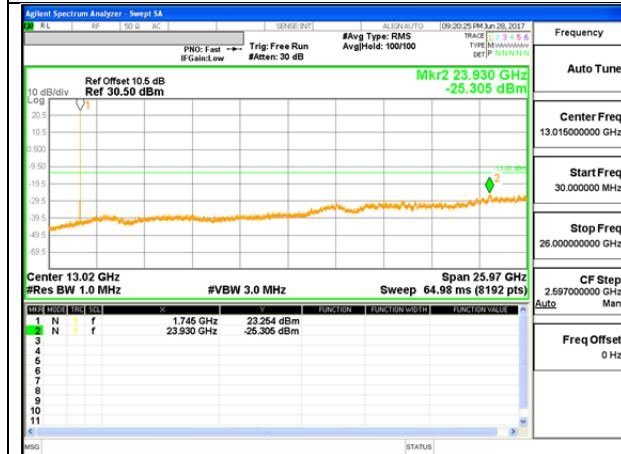


LTE B66 3MHz QPSK Middle Channel

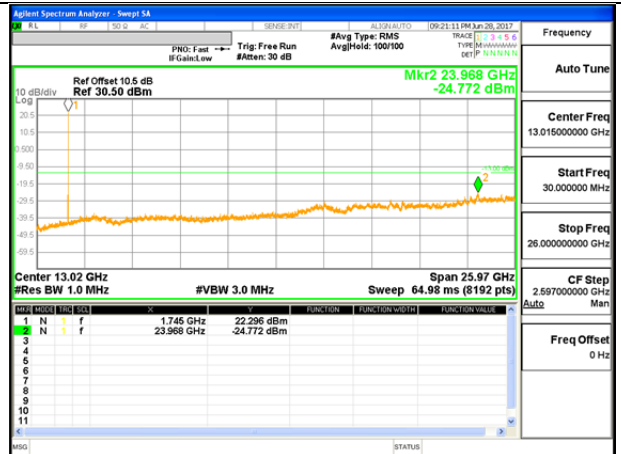


LTE B66 3MHz 16QAM Middle Channel

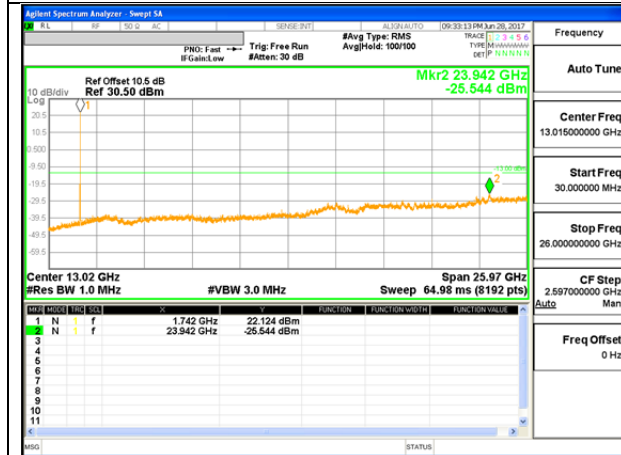


LTE B66 5MHz QPSK Middle Channel

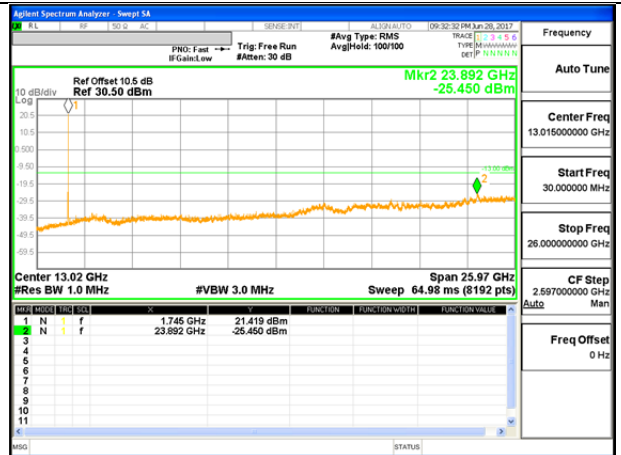


LTE B66 5MHz 16QAM Middle Channel

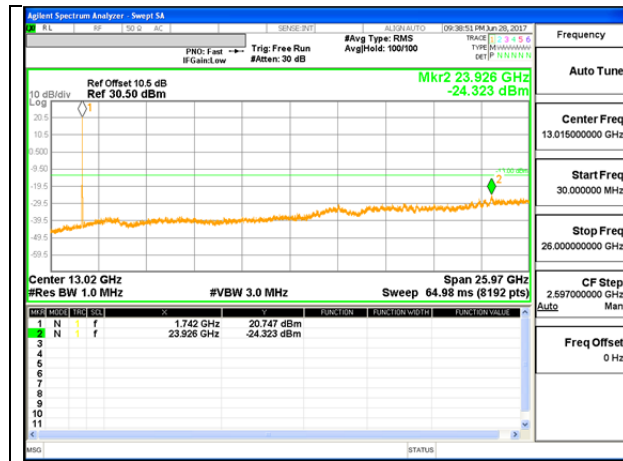


LTE B66 10MHz QPSK Middle Channel

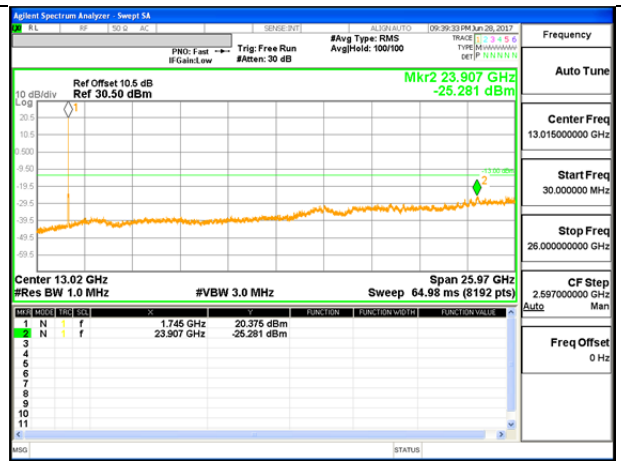


LTE B66 10MHz 16QAM Middle Channel

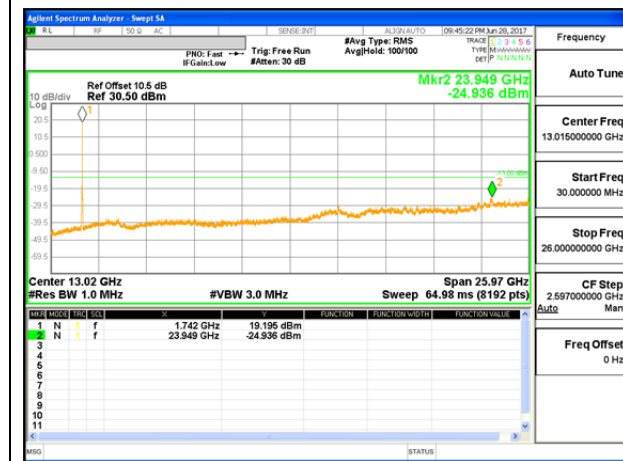


LTE B66 15MHz QPSK Middle Channel

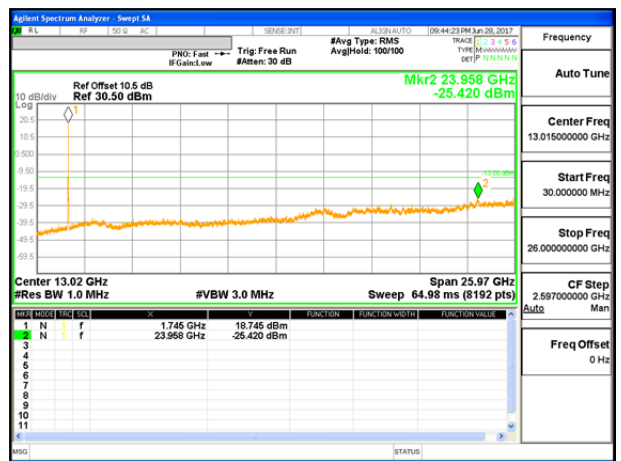

LTE B66 15MHz 16QAM Middle Channel

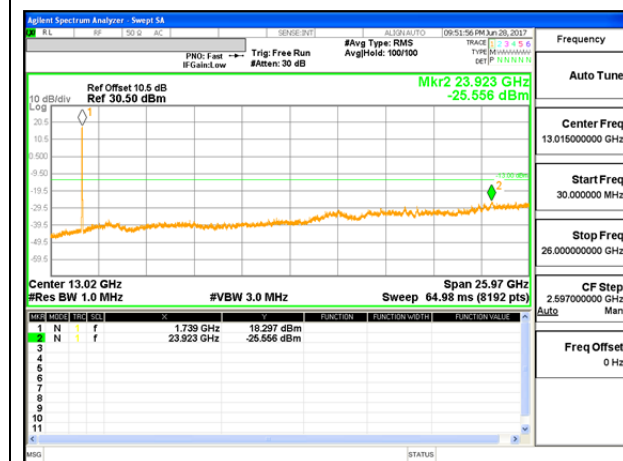

LTE B66 20MHz QPSK Middle Channel

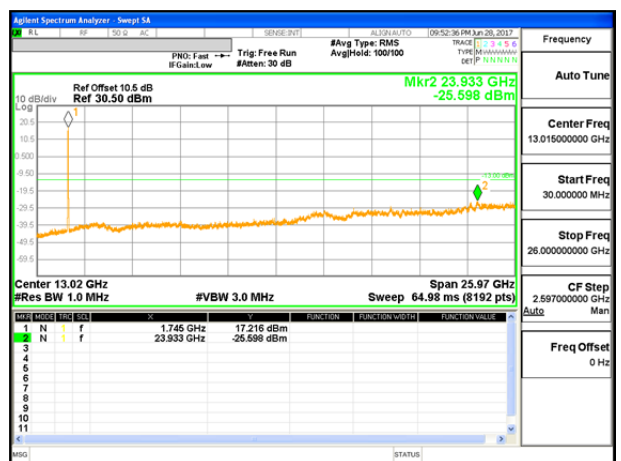

LTE B66 20MHz 16QAM Middle Channel

16. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

FCC LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

Results

Tested By	Oren Stoelting
Date	6/20/17

16.1. FREQUENCY STABILITY RESULTS

LTE Band 5

Reference Frequency: LTE Band 5 Mid Channel		836.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2091.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.499992	-0.002	2.5
3.80	40	836.499991	-0.001	2.5
3.80	30	836.499992	-0.001	2.5
3.80	20	836.499991	0	2.5
3.80	10	836.499992	-0.002	2.5
3.80	0	836.499992	-0.002	2.5
3.80	-10	836.499991	0.000	2.5
3.80	-20	836.499992	-0.001	2.5
3.80	-30	836.499991	-0.001	2.5

Reference Frequency: LTE Band 5 Mid Channel		836.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		2091.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.499991	0	2.5
4.37	20	836.499992	-0.001	2.5
3.23	20	836.499994	-0.004	2.5

LTE Band 7

Reference Frequency: LTE Band 7 Mid Channel		2535	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6337.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	2535.000013	0.000	2.5
3.80	40	2534.999990	0.010	2.5
3.80	30	2535.000039	-0.010	2.5
3.80	20	2535.000014	0	2.5
3.80	10	2534.999988	0.010	2.5
3.80	0	2535.000011	0.001	2.5
3.80	-10	2535.000016	-0.001	2.5
3.80	-20	2534.999995	0.008	2.5
3.80	-30	2535.000010	0.002	2.5

Reference Frequency: LTE Band 7 Mid Channel		2535	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6337.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	2535.000014	0	2.5
4.37	20	2535.000015	0.000	2.5
3.23	20	2535.000016	-0.001	2.5

LTE Band 12

Reference Frequency: LTE Band 12 Mid Channel		707.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		1768.750	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	707.499991	0.001	2.5
3.80	40	707.499991	0.001	2.5
3.80	30	707.499992	0.000	2.5
3.80	20	707.499992	0	2.5
3.80	10	707.499990	0.002	2.5
3.80	0	707.499990	0.003	2.5
3.80	-10	707.499991	0.001	2.5
3.80	-20	707.499992	-0.001	2.5
3.80	-30	707.499992	-0.001	2.5

Reference Frequency: LTE Band 12 Mid Channel		707.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		1768.750	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	707.499992	0	2.5
4.37	20	707.499991	0.001	2.5
3.23	20	707.499990	0.002	2.5

LTE Band 13

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	781.999990	-0.001	2.5
3.80	40	781.999990	0.000	2.5
3.80	30	781.999990	-0.001	2.5
3.80	20	781.999989	0	2.5
3.80	10	781.999991	-0.002	2.5
3.80	0	781.999991	-0.002	2.5
3.80	-10	781.999985	0.005	2.5
3.80	-20	781.999990	0.000	2.5
3.80	-30	781.999992	-0.003	2.5

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	781.999989	0	2.5
4.37	20	781.999992	-0.003	2.5
3.23	20	781.999991	-0.002	2.5

LTE Band 25

Reference Frequency: LTE Band 25 Mid Channel		1882.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4706.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1882.499986	0.000	2.5
3.80	40	1882.499988	-0.001	2.5
3.80	30	1882.499989	-0.001	2.5
3.80	20	1882.499987	0	2.5
3.80	10	1882.499988	0.000	2.5
3.80	0	1882.499988	-0.001	2.5
3.80	-10	1882.499989	-0.001	2.5
3.80	-20	1882.499989	-0.001	2.5
3.80	-30	1882.499988	-0.001	2.5

Reference Frequency: LTE Band 25 Mid Channel		1882.5	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4706.250	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1882.499987	0.000	2.5
4.37	20	1882.499989	-0.001	2.5
3.23	20	1882.499987	0.000	2.5

LTE Band 41

Reference Frequency: LTE Band 41 Mid Channel		2593	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6482.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	2593.000014	-0.001	2.5
3.80	40	2593.000012	-0.001	2.5
3.80	30	2592.999987	0.009	2.5
3.80	20	2593.000011	0	2.5
3.80	10	2593.000020	-0.003	2.5
3.80	0	2593.000016	-0.002	2.5
3.80	-10	2592.999984	0.010	2.5
3.80	-20	2593.000012	-0.001	2.5
3.80	-30	2593.000015	-0.002	2.5

Reference Frequency: LTE Band 41 Mid Channel		2593	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		6482.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	2593.000011	0	2.5
4.37	20	2593.000015	-0.001	2.5
3.23	20	2593.000012	-0.001	2.5

17. RADIATED TEST RESULTS

17.1. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, and §27.53.

FCC LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the Channel edge and 5 megahertz from the Channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the Channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the Channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on Channel BRS Channel 1 on the same terms and conditions as adjacent Channel BRS or EBS licensees.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

17.1.1. SPURIOUS RADIATION PLOTS

GSM

<p>UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement</p> <p>Company: SOMC Project #: 11785278 Date: 6/28/2017 Test Engineer: 43575 OS Configuration: EUT + AC + Headset Location: Chamber C Mode: GPRS 850 MHz Harmonics</p>											<p>UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement</p> <p>Company: SOMC Project #: 11785278 Date: 6/26/2017 Test Engineer: 43575 OS Configuration: EUT + AC + Headset Location: Chamber C Mode: EGPRS 850 MHz Harmonics</p>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
<table border="1"><thead><tr><th>f (MHz)</th><th>SG reading (dBm)</th><th>Ant. Pol. (HV)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th colspan="2">Notes</th></tr></thead><tbody><tr><td colspan="11">Low Ch, 824.2</td></tr><tr><td>1648.40</td><td>-21.1</td><td>V</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-56.4</td><td>-13.0</td><td>-43.4</td><td colspan="2"></td></tr><tr><td>2472.60</td><td>-17.7</td><td>V</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-51.7</td><td>-13.0</td><td>-38.7</td><td colspan="2"></td></tr><tr><td>3296.80</td><td>-22.3</td><td>V</td><td>3.0</td><td>34.3</td><td>1.0</td><td>-55.6</td><td>-13.0</td><td>-42.6</td><td colspan="2"></td></tr><tr><td>1648.40</td><td>-25.1</td><td>H</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-60.5</td><td>-13.0</td><td>-47.5</td><td colspan="2"></td></tr><tr><td>2472.60</td><td>-19.0</td><td>H</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-53.0</td><td>-13.0</td><td>-40.0</td><td colspan="2"></td></tr><tr><td>3296.80</td><td>-23.5</td><td>H</td><td>3.0</td><td>34.3</td><td>1.0</td><td>-56.8</td><td>-13.0</td><td>-43.8</td><td colspan="2"></td></tr><tr><td colspan="11">Mid Ch, 836.6</td></tr><tr><td>1673.20</td><td>-21.5</td><td>V</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-56.8</td><td>-13.0</td><td>-43.8</td><td colspan="2"></td></tr><tr><td>2509.80</td><td>-15.3</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-49.3</td><td>-13.0</td><td>-36.3</td><td colspan="2"></td></tr><tr><td>3346.40</td><td>-23.0</td><td>V</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.2</td><td>-13.0</td><td>-43.2</td><td colspan="2"></td></tr><tr><td>1673.20</td><td>-24.7</td><td>H</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-60.1</td><td>-13.0</td><td>-47.1</td><td colspan="2"></td></tr><tr><td>2509.80</td><td>-17.6</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-51.6</td><td>-13.0</td><td>-38.6</td><td colspan="2"></td></tr><tr><td>3346.40</td><td>-23.3</td><td>H</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.6</td><td>-13.0</td><td>-43.6</td><td colspan="2"></td></tr><tr><td colspan="11">High Ch, 848.8</td></tr><tr><td>1697.60</td><td>-22.4</td><td>V</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-57.6</td><td>-13.0</td><td>-44.6</td><td colspan="2"></td></tr><tr><td>2546.40</td><td>-21.9</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-55.8</td><td>-13.0</td><td>-42.8</td><td colspan="2"></td></tr><tr><td>3395.20</td><td>-22.8</td><td>V</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td colspan="2"></td></tr><tr><td>1697.60</td><td>-20.7</td><td>H</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td colspan="2"></td></tr><tr><td>2546.40</td><td>-17.4</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-51.3</td><td>-13.0</td><td>-38.3</td><td colspan="2"></td></tr><tr><td>3395.20</td><td>-23.7</td><td>H</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.9</td><td>-13.0</td><td>-43.9</td><td colspan="2"></td></tr></tbody></table>											f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		Low Ch, 824.2											1648.40	-21.1	V	3.0	36.4	1.0	-56.4	-13.0	-43.4			2472.60	-17.7	V	3.0	35.0	1.0	-51.7	-13.0	-38.7			3296.80	-22.3	V	3.0	34.3	1.0	-55.6	-13.0	-42.6			1648.40	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5			2472.60	-19.0	H	3.0	35.0	1.0	-53.0	-13.0	-40.0			3296.80	-23.5	H	3.0	34.3	1.0	-56.8	-13.0	-43.8			Mid Ch, 836.6											1673.20	-21.5	V	3.0	36.3	1.0	-56.8	-13.0	-43.8			2509.80	-15.3	V	3.0	34.9	1.0	-49.3	-13.0	-36.3			3346.40	-23.0	V	3.0	34.2	1.0	-56.2	-13.0	-43.2			1673.20	-24.7	H	3.0	36.3	1.0	-60.1	-13.0	-47.1			2509.80	-17.6	H	3.0	34.9	1.0	-51.6	-13.0	-38.6			3346.40	-23.3	H	3.0	34.2	1.0	-56.6	-13.0	-43.6			High Ch, 848.8											1697.60	-22.4	V	3.0	36.3	1.0	-57.6	-13.0	-44.6			2546.40	-21.9	V	3.0	34.9	1.0	-55.8	-13.0	-42.8			3395.20	-22.8	V	3.0	34.2	1.0	-56.0	-13.0	-43.0			1697.60	-20.7	H	3.0	36.3	1.0	-56.0	-13.0	-43.0			2546.40	-17.4	H	3.0	34.9	1.0	-51.3	-13.0	-38.3			3395.20	-23.7	H	3.0	34.2	1.0	-56.9	-13.0	-43.9			<table border="1"><thead><tr><th>f (MHz)</th><th>SG reading (dBm)</th><th>Ant. Pol. (HV)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th colspan="2">Notes</th></tr></thead><tbody><tr><td colspan="11">Low Ch, 824.2</td></tr><tr><td>1648.40</td><td>-25.3</td><td>V</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-60.7</td><td>-13.0</td><td>-47.7</td><td colspan="2"></td></tr><tr><td>2472.60</td><td>-19.3</td><td>V</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-53.3</td><td>-13.0</td><td>-40.3</td><td colspan="2"></td></tr><tr><td>3296.80</td><td>-23.2</td><td>V</td><td>3.0</td><td>34.3</td><td>1.0</td><td>-56.5</td><td>-13.0</td><td>-43.5</td><td colspan="2"></td></tr><tr><td>1648.40</td><td>-25.0</td><td>H</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-60.4</td><td>-13.0</td><td>-47.4</td><td colspan="2"></td></tr><tr><td>2472.60</td><td>-23.5</td><td>H</td><td>3.0</td><td>35.0</td><td>1.0</td><td>-57.5</td><td>-13.0</td><td>-44.5</td><td colspan="2"></td></tr><tr><td>3296.80</td><td>-23.4</td><td>H</td><td>3.0</td><td>34.3</td><td>1.0</td><td>-56.7</td><td>-13.0</td><td>-43.7</td><td colspan="2"></td></tr><tr><td colspan="11">Mid Ch, 836.6</td></tr><tr><td>1673.20</td><td>-23.4</td><td>V</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-58.7</td><td>-13.0</td><td>-45.7</td><td colspan="2"></td></tr><tr><td>2509.80</td><td>-24.2</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-58.1</td><td>-13.0</td><td>-45.1</td><td colspan="2"></td></tr><tr><td>3346.40</td><td>-23.1</td><td>V</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.3</td><td>-13.0</td><td>-43.3</td><td colspan="2"></td></tr><tr><td>1673.20</td><td>-26.4</td><td>H</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-61.7</td><td>-13.0</td><td>-48.7</td><td colspan="2"></td></tr><tr><td>2509.80</td><td>-24.0</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-57.9</td><td>-13.0</td><td>-44.9</td><td colspan="2"></td></tr><tr><td>3346.40</td><td>-23.3</td><td>H</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-56.6</td><td>-13.0</td><td>-43.6</td><td colspan="2"></td></tr><tr><td colspan="11">High Ch, 848.8</td></tr><tr><td>1697.60</td><td>-26.2</td><td>V</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-61.5</td><td>-13.0</td><td>-48.5</td><td colspan="2"></td></tr><tr><td>2546.40</td><td>-21.4</td><td>V</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-55.3</td><td>-13.0</td><td>-42.3</td><td colspan="2"></td></tr><tr><td>3395.20</td><td>-22.8</td><td>V</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-55.9</td><td>-13.0</td><td>-42.9</td><td colspan="2"></td></tr><tr><td>1697.60</td><td>-25.9</td><td>H</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-62.2</td><td>-13.0</td><td>-49.2</td><td colspan="2"></td></tr><tr><td>2546.40</td><td>-23.8</td><td>H</td><td>3.0</td><td>34.9</td><td>1.0</td><td>-57.7</td><td>-13.0</td><td>-44.7</td><td colspan="2"></td></tr><tr><td>3395.20</td><td>-22.7</td><td>H</td><td>3.0</td><td>34.2</td><td>1.0</td><td>-55.9</td><td>-13.0</td><td>-42.9</td><td colspan="2"></td></tr></tbody></table>											f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		Low Ch, 824.2											1648.40	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7			2472.60	-19.3	V	3.0	35.0	1.0	-53.3	-13.0	-40.3			3296.80	-23.2	V	3.0	34.3	1.0	-56.5	-13.0	-43.5			1648.40	-25.0	H	3.0	36.4	1.0	-60.4	-13.0	-47.4			2472.60	-23.5	H	3.0	35.0	1.0	-57.5	-13.0	-44.5			3296.80	-23.4	H	3.0	34.3	1.0	-56.7	-13.0	-43.7			Mid Ch, 836.6											1673.20	-23.4	V	3.0	36.3	1.0	-58.7	-13.0	-45.7			2509.80	-24.2	V	3.0	34.9	1.0	-58.1	-13.0	-45.1			3346.40	-23.1	V	3.0	34.2	1.0	-56.3	-13.0	-43.3			1673.20	-26.4	H	3.0	36.3	1.0	-61.7	-13.0	-48.7			2509.80	-24.0	H	3.0	34.9	1.0	-57.9	-13.0	-44.9			3346.40	-23.3	H	3.0	34.2	1.0	-56.6	-13.0	-43.6			High Ch, 848.8											1697.60	-26.2	V	3.0	36.3	1.0	-61.5	-13.0	-48.5			2546.40	-21.4	V	3.0	34.9	1.0	-55.3	-13.0	-42.3			3395.20	-22.8	V	3.0	34.2	1.0	-55.9	-13.0	-42.9			1697.60	-25.9	H	3.0	36.3	1.0	-62.2	-13.0	-49.2			2546.40	-23.8	H	3.0	34.9	1.0	-57.7	-13.0	-44.7			3395.20	-22.7	H	3.0	34.2	1.0	-55.9	-13.0	-42.9		
f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Low Ch, 824.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1648.40	-21.1	V	3.0	36.4	1.0	-56.4	-13.0	-43.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2472.60	-17.7	V	3.0	35.0	1.0	-51.7	-13.0	-38.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3296.80	-22.3	V	3.0	34.3	1.0	-55.6	-13.0	-42.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1648.40	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2472.60	-19.0	H	3.0	35.0	1.0	-53.0	-13.0	-40.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3296.80	-23.5	H	3.0	34.3	1.0	-56.8	-13.0	-43.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Mid Ch, 836.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1673.20	-21.5	V	3.0	36.3	1.0	-56.8	-13.0	-43.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2509.80	-15.3	V	3.0	34.9	1.0	-49.3	-13.0	-36.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3346.40	-23.0	V	3.0	34.2	1.0	-56.2	-13.0	-43.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1673.20	-24.7	H	3.0	36.3	1.0	-60.1	-13.0	-47.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2509.80	-17.6	H	3.0	34.9	1.0	-51.6	-13.0	-38.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3346.40	-23.3	H	3.0	34.2	1.0	-56.6	-13.0	-43.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
High Ch, 848.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1697.60	-22.4	V	3.0	36.3	1.0	-57.6	-13.0	-44.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2546.40	-21.9	V	3.0	34.9	1.0	-55.8	-13.0	-42.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3395.20	-22.8	V	3.0	34.2	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1697.60	-20.7	H	3.0	36.3	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2546.40	-17.4	H	3.0	34.9	1.0	-51.3	-13.0	-38.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3395.20	-23.7	H	3.0	34.2	1.0	-56.9	-13.0	-43.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Low Ch, 824.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1648.40	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2472.60	-19.3	V	3.0	35.0	1.0	-53.3	-13.0	-40.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3296.80	-23.2	V	3.0	34.3	1.0	-56.5	-13.0	-43.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1648.40	-25.0	H	3.0	36.4	1.0	-60.4	-13.0	-47.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2472.60	-23.5	H	3.0	35.0	1.0	-57.5	-13.0	-44.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3296.80	-23.4	H	3.0	34.3	1.0	-56.7	-13.0	-43.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Mid Ch, 836.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1673.20	-23.4	V	3.0	36.3	1.0	-58.7	-13.0	-45.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2509.80	-24.2	V	3.0	34.9	1.0	-58.1	-13.0	-45.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3346.40	-23.1	V	3.0	34.2	1.0	-56.3	-13.0	-43.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1673.20	-26.4	H	3.0	36.3	1.0	-61.7	-13.0	-48.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2509.80	-24.0	H	3.0	34.9	1.0	-57.9	-13.0	-44.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3346.40	-23.3	H	3.0	34.2	1.0	-56.6	-13.0	-43.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
High Ch, 848.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
1697.60	-26.2	V	3.0	36.3	1.0	-61.5	-13.0	-48.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2546.40	-21.4	V	3.0	34.9	1.0	-55.3	-13.0	-42.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3395.20	-22.8	V	3.0	34.2	1.0	-55.9	-13.0	-42.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
1697.60	-25.9	H	3.0	36.3	1.0	-62.2	-13.0	-49.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
2546.40	-23.8	H	3.0	34.9	1.0	-57.7	-13.0	-44.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3395.20	-22.7	H	3.0	34.2	1.0	-55.9	-13.0	-42.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
<p>GSM850 GPRS</p>											<p>GSM850 EGPRS</p>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
<p>UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement</p> <p>Company: SOMC Project #: 11785278 Date: 6/22/2017 Test Engineer: 37290 RZ Configuration: EUT + AC + Headset Location: Chamber C Mode: GPRS 1900 MHz Harmonics</p>											<p>UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement</p> <p>Company: SOMC Project #: 11785278 Date: 6/22/2017 Test Engineer: 37290 RZ Configuration: EUT + AC + Headset Location: Chamber C Mode: EGPRS 1900 MHz Harmonics</p>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
<table border="1"><thead><tr><th>f (MHz)</th><th>SG reading (dBm)</th><th>Ant. Pol. (HV)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th colspan="2">Notes</th></tr></thead><tbody><tr><td colspan="11">Low Ch, 1850.2</td></tr><tr><td>3700.40</td><td>-25.6</td><td>V</td><td>3.0</td><td>33.9</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td colspan="2"></td></tr><tr><td>5550.60</td><td>-25.2</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-57.3</td><td>-13.0</td><td>-44.3</td><td colspan="2"></td></tr><tr><td>7400.80</td><td>-23.5</td><td>V</td><td>3.0</td><td>32.9</td><td>1.0</td><td>-55.4</td><td>-13.0</td><td>-42.4</td><td colspan="2"></td></tr><tr><td>3700.40</td><td>-25.5</td><td>H</td><td>3.0</td><td>33.9</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td colspan="2"></td></tr><tr><td>5550.60</td><td>-22.8</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-54.9</td><td>-13.0</td><td>-41.9</td><td colspan="2"></td></tr><tr><td>7400.80</td><td>-23.9</td><td>H</td><td>3.0</td><td>32.9</td><td>1.0</td><td>-55.8</td><td>-13.0</td><td>-42.8</td><td colspan="2"></td></tr><tr><td colspan="11">Mid Ch, 1880</td></tr><tr><td>3760.00</td><td>-24.9</td><td>V</td><td>3.0</td><td>33.8</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td colspan="2"></td></tr><tr><td>5640.00</td><td>-23.0</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-55.1</td><td>-13.0</td><td>-42.1</td><td colspan="2"></td></tr><tr><td>7520.00</td><td>-23.2</td><td>V</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.1</td><td>-13.0</td><td>-42.1</td><td colspan="2"></td></tr><tr><td>3760.00</td><td>-25.8</td><td>H</td><td>3.0</td><td>33.8</td><td>1.0</td><td>-58.6</td><td>-13.0</td><td>-45.6</td><td colspan="2"></td></tr><tr><td>5640.00</td><td>-22.9</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-55.0</td><td>-13.0</td><td>-42.0</td><td colspan="2"></td></tr><tr><td>7520.00</td><td>-23.2</td><td>H</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.1</td><td>-13.0</td><td>-42.1</td><td colspan="2"></td></tr><tr><td colspan="11">High Ch, 1909.8</td></tr><tr><td>3819.60</td><td>-25.3</td><td>V</td><td>3.0</td><td>33.7</td><td>1.0</td><td>-58.1</td><td>-13.0</td><td>-45.1</td><td colspan="2"></td></tr><tr><td>5729.40</td><td>-24.2</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-56.3</td><td>-13.0</td><td>-43.3</td><td colspan="2"></td></tr><tr><td>7639.20</td><td>-24.0</td><td>V</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.9</td><td>-13.0</td><td>-42.9</td><td colspan="2"></td></tr><tr><td>3819.60</td><td>-26.6</td><td>H</td><td>3.0</td><td>33.7</td><td>1.0</td><td>-59.3</td><td>-13.0</td><td>-46.3</td><td colspan="2"></td></tr><tr><td>5729.40</td><td>-25.2</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-57.3</td><td>-13.0</td><td>-44.3</td><td colspan="2"></td></tr><tr><td>7639.20</td><td>-23.9</td><td>H</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.7</td><td>-13.0</td><td>-42.7</td><td colspan="2"></td></tr></tbody></table>											f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		Low Ch, 1850.2											3700.40	-25.6	V	3.0	33.9	1.0	-58.4	-13.0	-45.4			5550.60	-25.2	V	3.0	33.1	1.0	-57.3	-13.0	-44.3			7400.80	-23.5	V	3.0	32.9	1.0	-55.4	-13.0	-42.4			3700.40	-25.5	H	3.0	33.9	1.0	-58.4	-13.0	-45.4			5550.60	-22.8	H	3.0	33.1	1.0	-54.9	-13.0	-41.9			7400.80	-23.9	H	3.0	32.9	1.0	-55.8	-13.0	-42.8			Mid Ch, 1880											3760.00	-24.9	V	3.0	33.8	1.0	-57.8	-13.0	-44.8			5640.00	-23.0	V	3.0	33.1	1.0	-55.1	-13.0	-42.1			7520.00	-23.2	V	3.0	32.8	1.0	-55.1	-13.0	-42.1			3760.00	-25.8	H	3.0	33.8	1.0	-58.6	-13.0	-45.6			5640.00	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0			7520.00	-23.2	H	3.0	32.8	1.0	-55.1	-13.0	-42.1			High Ch, 1909.8											3819.60	-25.3	V	3.0	33.7	1.0	-58.1	-13.0	-45.1			5729.40	-24.2	V	3.0	33.1	1.0	-56.3	-13.0	-43.3			7639.20	-24.0	V	3.0	32.8	1.0	-55.9	-13.0	-42.9			3819.60	-26.6	H	3.0	33.7	1.0	-59.3	-13.0	-46.3			5729.40	-25.2	H	3.0	33.1	1.0	-57.3	-13.0	-44.3			7639.20	-23.9	H	3.0	32.8	1.0	-55.7	-13.0	-42.7			<table border="1"><thead><tr><th>f (MHz)</th><th>SG reading (dBm)</th><th>Ant. Pol. (HV)</th><th>Distance (m)</th><th>Preamp (dB)</th><th>Filter (dB)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th colspan="2">Notes</th></tr></thead><tbody><tr><td colspan="11">Low Ch, 1850.2</td></tr><tr><td>3700.40</td><td>-25.6</td><td>V</td><td>3.0</td><td>33.9</td><td>1.0</td><td>-58.5</td><td>-13.0</td><td>-45.5</td><td colspan="2"></td></tr><tr><td>5550.60</td><td>-25.2</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-57.4</td><td>-13.0</td><td>-44.4</td><td colspan="2"></td></tr><tr><td>7400.80</td><td>-23.6</td><td>V</td><td>3.0</td><td>32.9</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td colspan="2"></td></tr><tr><td>3700.40</td><td>-25.5</td><td>H</td><td>3.0</td><td>33.9</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td colspan="2"></td></tr><tr><td>5550.60</td><td>-22.9</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-55.0</td><td>-13.0</td><td>-42.0</td><td colspan="2"></td></tr><tr><td>7400.80</td><td>-24.0</td><td>H</td><td>3.0</td><td>32.9</td><td>1.0</td><td>-55.8</td><td>-13.0</td><td>-42.8</td><td colspan="2"></td></tr><tr><td colspan="11">Mid Ch, 1880</td></tr><tr><td>3760.00</td><td>-25.0</td><td>V</td><td>3.0</td><td>33.8</td><td>1.0</td><td>-57.8</td><td>-13.0</td><td>-44.8</td><td colspan="2"></td></tr><tr><td>5640.00</td><td>-23.0</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-55.1</td><td>-13.0</td><td>-42.1</td><td colspan="2"></td></tr><tr><td>7520.00</td><td>-23.3</td><td>V</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.2</td><td>-13.0</td><td>-42.2</td><td colspan="2"></td></tr><tr><td>3760.00</td><td>-25.9</td><td>H</td><td>3.0</td><td>33.8</td><td>1.0</td><td>-58.7</td><td>-13.0</td><td>-45.7</td><td colspan="2"></td></tr><tr><td>5640.00</td><td>-22.9</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-55.0</td><td>-13.0</td><td>-42.0</td><td colspan="2"></td></tr><tr><td>7520.00</td><td>-23.3</td><td>H</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.2</td><td>-13.0</td><td>-42.2</td><td colspan="2"></td></tr><tr><td colspan="11">High Ch, 1909.8</td></tr><tr><td>3819.60</td><td>-25.4</td><td>V</td><td>3.0</td><td>33.7</td><td>1.0</td><td>-58.2</td><td>-13.0</td><td>-45.2</td><td colspan="2"></td></tr><tr><td>5729.40</td><td>-24.3</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-56.3</td><td>-13.0</td><td>-43.3</td><td colspan="2"></td></tr><tr><td>7639.20</td><td>-24.1</td><td>V</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td colspan="2"></td></tr><tr><td>3819.60</td><td>-26.6</td><td>H</td><td>3.0</td><td>33.7</td><td>1.0</td><td>-59.3</td><td>-13.0</td><td>-46.3</td><td colspan="2"></td></tr><tr><td>5729.40</td><td>-25.2</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-57.3</td><td>-13.0</td><td>-44.3</td><td colspan="2"></td></tr><tr><td>7639.20</td><td>-23.9</td><td>H</td><td>3.0</td><td>32.8</td><td>1.0</td><td>-55.7</td><td>-13.0</td><td>-42.7</td><td colspan="2"></td></tr></tbody></table>											f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		Low Ch, 1850.2											3700.40	-25.6	V	3.0	33.9	1.0	-58.5	-13.0	-45.5			5550.60	-25.2	V	3.0	33.1	1.0	-57.4	-13.0	-44.4			7400.80	-23.6	V	3.0	32.9	1.0	-55.5	-13.0	-42.5			3700.40	-25.5	H	3.0	33.9	1.0	-58.4	-13.0	-45.4			5550.60	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0			7400.80	-24.0	H	3.0	32.9	1.0	-55.8	-13.0	-42.8			Mid Ch, 1880											3760.00	-25.0	V	3.0	33.8	1.0	-57.8	-13.0	-44.8			5640.00	-23.0	V	3.0	33.1	1.0	-55.1	-13.0	-42.1			7520.00	-23.3	V	3.0	32.8	1.0	-55.2	-13.0	-42.2			3760.00	-25.9	H	3.0	33.8	1.0	-58.7	-13.0	-45.7			5640.00	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0			7520.00	-23.3	H	3.0	32.8	1.0	-55.2	-13.0	-42.2			High Ch, 1909.8											3819.60	-25.4	V	3.0	33.7	1.0	-58.2	-13.0	-45.2			5729.40	-24.3	V	3.0	33.1	1.0	-56.3	-13.0	-43.3			7639.20	-24.1	V	3.0	32.8	1.0	-56.0	-13.0	-43.0			3819.60	-26.6	H	3.0	33.7	1.0	-59.3	-13.0	-46.3			5729.40	-25.2	H	3.0	33.1	1.0	-57.3	-13.0	-44.3			7639.20	-23.9	H	3.0	32.8	1.0	-55.7	-13.0	-42.7		
f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Low Ch, 1850.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3700.40	-25.6	V	3.0	33.9	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5550.60	-25.2	V	3.0	33.1	1.0	-57.3	-13.0	-44.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7400.80	-23.5	V	3.0	32.9	1.0	-55.4	-13.0	-42.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3700.40	-25.5	H	3.0	33.9	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5550.60	-22.8	H	3.0	33.1	1.0	-54.9	-13.0	-41.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7400.80	-23.9	H	3.0	32.9	1.0	-55.8	-13.0	-42.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Mid Ch, 1880																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3760.00	-24.9	V	3.0	33.8	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5640.00	-23.0	V	3.0	33.1	1.0	-55.1	-13.0	-42.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7520.00	-23.2	V	3.0	32.8	1.0	-55.1	-13.0	-42.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3760.00	-25.8	H	3.0	33.8	1.0	-58.6	-13.0	-45.6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5640.00	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7520.00	-23.2	H	3.0	32.8	1.0	-55.1	-13.0	-42.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
High Ch, 1909.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3819.60	-25.3	V	3.0	33.7	1.0	-58.1	-13.0	-45.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5729.40	-24.2	V	3.0	33.1	1.0	-56.3	-13.0	-43.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7639.20	-24.0	V	3.0	32.8	1.0	-55.9	-13.0	-42.9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3819.60	-26.6	H	3.0	33.7	1.0	-59.3	-13.0	-46.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5729.40	-25.2	H	3.0	33.1	1.0	-57.3	-13.0	-44.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7639.20	-23.9	H	3.0	32.8	1.0	-55.7	-13.0	-42.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
f (MHz)	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Low Ch, 1850.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3700.40	-25.6	V	3.0	33.9	1.0	-58.5	-13.0	-45.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5550.60	-25.2	V	3.0	33.1	1.0	-57.4	-13.0	-44.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7400.80	-23.6	V	3.0	32.9	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3700.40	-25.5	H	3.0	33.9	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5550.60	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7400.80	-24.0	H	3.0	32.9	1.0	-55.8	-13.0	-42.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Mid Ch, 1880																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3760.00	-25.0	V	3.0	33.8	1.0	-57.8	-13.0	-44.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5640.00	-23.0	V	3.0	33.1	1.0	-55.1	-13.0	-42.1																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7520.00	-23.3	V	3.0	32.8	1.0	-55.2	-13.0	-42.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3760.00	-25.9	H	3.0	33.8	1.0	-58.7	-13.0	-45.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5640.00	-22.9	H	3.0	33.1	1.0	-55.0	-13.0	-42.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7520.00	-23.3	H	3.0	32.8	1.0	-55.2	-13.0	-42.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
High Ch, 1909.8																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3819.60	-25.4	V	3.0	33.7	1.0	-58.2	-13.0	-45.2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5729.40	-24.3	V	3.0	33.1	1.0	-56.3	-13.0	-43.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7639.20	-24.1	V	3.0	32.8	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
3819.60	-26.6	H	3.0	33.7	1.0	-59.3	-13.0	-46.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
5729.40	-25.2	H	3.0	33.1	1.0	-57.3	-13.0	-44.3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
7639.20	-23.9	H	3.0	32.8	1.0	-55.7	-13.0	-42.7																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
<p>GSM1900 GPRS</p>											<p>GSM1900 EGPRS</p>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														

WCDMA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 11785278
Date: 6/22/2017
Test Engineer: 37200 RZ
Configuration: EUT + AC + Headset
Location: Chamber C
Mode: Rel99 Band 2 Harmonics

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1852.4									
3704.80	-25.1	V	3.0	33.9	1.0	-58.0	-13.0	-45.0	
5557.20	-25.6	V	3.0	33.1	1.0	-57.7	-13.0	-44.7	
7409.60	-23.9	V	3.0	32.9	1.0	-55.8	-13.0	-42.8	
3704.80	-24.9	H	3.0	33.9	1.0	-57.8	-13.0	-44.8	
5557.20	-24.6	H	3.0	33.1	1.0	-56.7	-13.0	-43.7	
7409.60	-22.9	H	3.0	32.9	1.0	-54.8	-13.0	-41.8	
Mid Ch, 1890									
3760.00	-24.4	V	3.0	33.8	1.0	-57.2	-13.0	-44.2	
5640.00	-22.8	V	3.0	33.1	1.0	-54.9	-13.0	-41.9	
7520.00	-22.4	V	3.0	32.8	1.0	-54.3	-13.0	-41.3	
3760.00	-26.0	H	3.0	33.8	1.0	-58.8	-13.0	-45.8	
5640.00	-23.7	H	3.0	33.1	1.0	-55.8	-13.0	-42.8	
7520.00	-24.8	H	3.0	32.8	1.0	-56.7	-13.0	-43.7	
High Ch, 1907.6									
3815.20	-24.9	V	3.0	33.7	1.0	-57.6	-13.0	-44.6	
5722.80	-25.6	V	3.0	33.1	1.0	-57.7	-13.0	-44.7	
7630.40	-22.6	V	3.0	32.8	1.0	-54.4	-13.0	-41.4	
3815.20	-25.8	H	3.0	33.7	1.0	-58.5	-13.0	-45.5	
5722.80	-23.9	H	3.0	33.1	1.0	-56.0	-13.0	-43.0	
7630.40	-22.8	H	3.0	32.8	1.0	-54.7	-13.0	-41.7	

B2 REL99

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 11785278
Date: 6/22/2017
Test Engineer: 37200 RZ
Configuration: EUT + AC + Headset
Location: Chamber C
Mode: HSDPA Band 2 Harmonics

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1852.4									
3704.80	-25.1	V	3.0	33.9	1.0	-58.0	-13.0	-45.0	
5557.20	-25.5	V	3.0	33.1	1.0	-57.6	-13.0	-44.6	
7409.60	-23.9	V	3.0	32.9	1.0	-55.7	-13.0	-42.7	
3704.80	-24.9	H	3.0	33.9	1.0	-57.8	-13.0	-44.8	
5557.20	-24.4	H	3.0	33.1	1.0	-56.6	-13.0	-43.6	
7409.60	-22.8	H	3.0	32.9	1.0	-54.7	-13.0	-41.7	
Mid Ch, 1890									
3760.00	-24.4	V	3.0	33.8	1.0	-57.2	-13.0	-44.2	
5640.00	-22.7	V	3.0	33.1	1.0	-54.8	-13.0	-41.8	
7520.00	-22.4	V	3.0	32.8	1.0	-54.2	-13.0	-41.2	
3760.00	-26.0	H	3.0	33.8	1.0	-58.9	-13.0	-45.9	
5640.00	-23.6	H	3.0	33.1	1.0	-55.7	-13.0	-42.7	
7520.00	-24.7	H	3.0	32.8	1.0	-56.5	-13.0	-43.5	
High Ch, 1907.6									
3815.20	-24.8	V	3.0	33.7	1.0	-57.6	-13.0	-44.6	
5722.80	-25.5	V	3.0	33.1	1.0	-57.6	-13.0	-44.6	
7630.40	-22.5	V	3.0	32.8	1.0	-54.4	-13.0	-41.4	
3815.20	-25.7	H	3.0	33.7	1.0	-58.5	-13.0	-45.5	
5722.80	-23.8	H	3.0	33.1	1.0	-55.9	-13.0	-42.9	
7630.40	-22.7	H	3.0	32.8	1.0	-54.6	-13.0	-41.6	

B2 HSDPA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 11785278
Date: 6/22/2017
Test Engineer: 37200 RZ
Configuration: EUT + AC + Headset
Location: Chamber C
Mode: Rel99 Band 4 Harmonics

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1712.4									
3424.80	-26.4	V	3.0	34.1	1.0	-58.6	-13.0	-45.6	
5137.20	-23.7	V	3.0	33.2	1.0	-55.9	-13.0	-42.9	
6849.60	-23.4	V	3.0	32.9	1.0	-55.2	-13.0	-42.2	
3424.80	-26.9	H	3.0	34.1	1.0	-60.0	-13.0	-47.0	
5137.20	-23.8	H	3.0	33.2	1.0	-56.0	-13.0	-43.0	
6849.60	-23.9	H	3.0	32.9	1.0	-55.8	-13.0	-42.8	
Mid Ch, 1732.6									
3465.20	-25.3	V	3.0	34.1	1.0	-58.5	-13.0	-45.5	
5197.60	-25.5	V	3.0	33.2	1.0	-57.7	-13.0	-44.7	
6930.40	-22.8	V	3.0	32.9	1.0	-54.7	-13.0	-41.7	
3465.20	-26.5	H	3.0	34.1	1.0	-59.6	-13.0	-46.6	
5197.60	-23.5	H	3.0	33.2	1.0	-55.7	-13.0	-42.7	
6930.40	-24.6	H	3.0	32.9	1.0	-56.4	-13.0	-43.4	
High Ch, 1752.6									
3505.20	-26.2	V	3.0	34.1	1.0	-59.3	-13.0	-46.3	
5257.60	-25.1	V	3.0	33.2	1.0	-57.2	-13.0	-44.2	
7010.40	-24.3	V	3.0	32.9	1.0	-56.2	-13.0	-43.2	
3505.20	-26.2	H	3.0	34.1	1.0	-59.3	-13.0	-46.3	
5257.60	-24.4	H	3.0	33.2	1.0	-56.6	-13.0	-43.6	
7010.40	-24.0	H	3.0	32.9	1.0	-55.8	-13.0	-42.8	

B4 REL99

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 11785278
Date: 6/22/2017
Test Engineer: 37200 RZ
Configuration: EUT + AC + Headset
Location: Chamber C
Mode: HSDPA Band 4 Harmonics

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 1712.4									
3424.80	-26.5	V	3.0	34.1	1.0	-59.6	-13.0	-46.6	
5137.20	-23.8	V	3.0	33.2	1.0	-56.0	-13.0	-43.0	
6849.60	-23.4	V	3.0	32.9	1.0	-55.3	-13.0	-42.3	
3424.80	-27.0	H	3.0	34.1	1.0	-60.1	-13.0	-47.1	
5137.20	-23.9	H	3.0	33.2	1.0	-56.1	-13.0	-43.1	
6849.60	-24.0	H	3.0	32.9	1.0	-55.9	-13.0	-42.9	
Mid Ch, 1732.6									
3465.20	-25.5	V	3.0	34.1	1.0	-58.6	-13.0	-45.6	
5197.60	-25.6	V	3.0	33.2	1.0	-57.8	-13.0	-44.8	
6930.40	-22.9	V	3.0	32.9	1.0	-54.8	-13.0	-41.8	
3465.20	-26.6	H	3.0	34.1	1.0	-59.8	-13.0	-46.8	
5197.60	-23.6	H	3.0	33.2	1.0	-55.8	-13.0	-42.8	
6930.40	-24.7	H	3.0	32.9	1.0	-56.6	-13.0	-43.6	
High Ch, 1752.6									
3505.20	-26.3	V	3.0	34.1	1.0	-59.4	-13.0	-46.4	
5257.60	-25.1	V	3.0	33.2	1.0	-57.2	-13.0	-44.2	
7010.40	-24.4	V	3.0	32.9	1.0	-56.3	-13.0	-43.3	
3505.20	-26.2	H	3.0	34.1	1.0	-59.3	-13.0	-46.3	
5257.60	-24.5	H	3.0	33.2	1.0	-56.6	-13.0	-43.6	
7010.40	-24.0	H	3.0	32.9	1.0	-55.9	-13.0	-42.9	

B4 HSDPA

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/26/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		Rel99 Band 5 Harmonics								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 826.4										
1652.80	-28.1	V	3.0	36.4	1.0	-63.5	-13.0	-50.5		
2479.20	-25.5	V	3.0	35.0	1.0	-59.5	-13.0	-46.5		
3305.60	-23.2	V	3.0	34.3	1.0	-56.5	-13.0	-43.5		
1652.80	-28.6	H	3.0	36.4	1.0	-63.9	-13.0	-50.9		
2479.20	-25.4	H	3.0	35.0	1.0	-59.4	-13.0	-46.4		
3305.60	-23.5	H	3.0	34.3	1.0	-56.8	-13.0	-43.8		
Mid Ch, 836.6										
1673.20	-27.8	V	3.0	36.3	1.0	-63.1	-13.0	-50.1		
2509.80	-24.8	V	3.0	34.9	1.0	-58.7	-13.0	-45.7		
3346.40	-23.3	V	3.0	34.2	1.0	-56.5	-13.0	-43.5		
1673.20	-28.1	H	3.0	36.3	1.0	-63.4	-13.0	-50.4		
2509.80	-24.6	H	3.0	34.9	1.0	-58.5	-13.0	-45.5		
3346.40	-23.6	H	3.0	34.2	1.0	-56.8	-13.0	-43.8		
High Ch, 846.6										
1693.20	-27.4	V	3.0	36.3	1.0	-62.7	-13.0	-49.7		
2539.80	-22.8	V	3.0	34.9	1.0	-55.9	-13.0	-42.9		
3386.40	-23.2	V	3.0	34.2	1.0	-56.4	-13.0	-43.4		
1693.20	-28.6	H	3.0	36.3	1.0	-63.9	-13.0	-50.9		
2539.80	-24.2	H	3.0	34.9	1.0	-58.1	-13.0	-45.1		
3386.40	-23.6	H	3.0	34.2	1.0	-56.8	-13.0	-43.8		

B5 REL99

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/26/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		HSDPA Band 5 Harmonics								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 826.4										
1652.80	-28.2	V	3.0	36.4	1.0	-63.6	-13.0	-50.6		
2479.20	-24.3	V	3.0	35.0	1.0	-58.3	-13.0	-45.3		
3305.60	-23.8	V	3.0	34.3	1.0	-57.0	-13.0	-44.0		
1652.80	-29.1	H	3.0	36.4	1.0	-64.4	-13.0	-51.4		
2479.20	-25.1	H	3.0	35.0	1.0	-59.1	-13.0	-46.1		
3305.60	-23.9	H	3.0	34.3	1.0	-57.1	-13.0	-44.1		
Mid Ch, 836.6										
1673.20	-27.9	V	3.0	36.3	1.0	-63.2	-13.0	-50.2		
2509.80	-25.1	V	3.0	34.9	1.0	-59.0	-13.0	-46.0		
3346.40	-23.4	V	3.0	34.2	1.0	-56.7	-13.0	-43.7		
1673.20	-26.5	H	3.0	36.3	1.0	-63.8	-13.0	-50.8		
2509.80	-24.9	H	3.0	34.9	1.0	-58.8	-13.0	-45.8		
3346.40	-24.0	H	3.0	34.2	1.0	-57.2	-13.0	-44.2		
High Ch, 846.6										
1693.20	-27.7	V	3.0	36.3	1.0	-63.0	-13.0	-50.0		
2539.80	-24.7	V	3.0	34.9	1.0	-58.6	-13.0	-45.6		
3386.40	-22.8	V	3.0	34.2	1.0	-56.0	-13.0	-43.0		
1693.20	-28.6	H	3.0	36.3	1.0	-63.9	-13.0	-50.9		
2539.80	-24.8	H	3.0	34.9	1.0	-58.7	-13.0	-45.7		
3386.40	-22.2	H	3.0	34.2	1.0	-55.4	-13.0	-42.4		

B5 HSDPA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/26/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_QPSK Band 26 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 819									
1638.00	-26.3	V	3.0	36.4	1.0	-63.7	-13.0	-50.7	
2457.00	-24.8	V	3.0	35.0	1.0	-58.9	-13.0	-45.9	
3276.00	-23.3	V	3.0	34.3	1.0	-56.6	-13.0	-43.6	
1638.00	-28.9	H	3.0	36.4	1.0	-64.3	-13.0	-51.3	
2457.00	-25.2	H	3.0	35.0	1.0	-59.2	-13.0	-46.2	
3276.00	-23.6	H	3.0	34.3	1.0	-56.9	-13.0	-43.9	
Mid Ch, 831.5									
1663.00	-26.4	V	3.0	36.3	1.0	-61.8	-13.0	-48.8	
2494.50	-24.1	V	3.0	34.9	1.0	-58.1	-13.0	-45.1	
3326.00	-23.1	V	3.0	34.2	1.0	-56.3	-13.0	-43.3	
1663.00	-28.7	H	3.0	36.3	1.0	-64.1	-13.0	-51.1	
2494.50	-24.5	H	3.0	34.9	1.0	-58.5	-13.0	-45.5	
3326.00	-23.8	H	3.0	34.2	1.0	-57.0	-13.0	-44.0	
High Ch, 844									
1688.00	-27.4	V	3.0	36.3	1.0	-62.7	-13.0	-49.7	
2532.00	-24.6	V	3.0	34.9	1.0	-58.6	-13.0	-45.6	
3376.00	-23.2	V	3.0	34.2	1.0	-56.4	-13.0	-43.4	
1688.00	-26.9	H	3.0	36.3	1.0	-62.2	-13.0	-49.2	
2532.00	-24.1	H	3.0	34.9	1.0	-58.0	-13.0	-45.0	
3376.00	-23.0	H	3.0	34.2	1.0	-56.2	-13.0	-43.2	

LTE B26 10MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/26/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_16QAM Band 26 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 819									
1638.00	-26.2	V	3.0	36.4	1.0	-63.6	-13.0	-50.6	
2457.00	-25.4	V	3.0	35.0	1.0	-59.4	-13.0	-46.4	
3276.00	-22.6	V	3.0	34.3	1.0	-55.8	-13.0	-42.8	
1638.00	-29.2	H	3.0	36.4	1.0	-64.6	-13.0	-51.6	
2457.00	-25.1	H	3.0	35.0	1.0	-59.1	-13.0	-46.1	
3276.00	-23.4	H	3.0	34.3	1.0	-56.7	-13.0	-43.7	
Mid Ch, 831.5									
1663.00	-26.5	V	3.0	36.3	1.0	-61.8	-13.0	-48.8	
2494.50	-24.9	V	3.0	34.9	1.0	-58.8	-13.0	-45.8	
3326.00	-23.3	V	3.0	34.2	1.0	-56.6	-13.0	-43.6	
1663.00	-28.4	H	3.0	36.3	1.0	-63.7	-13.0	-50.7	
2494.50	-23.8	H	3.0	34.9	1.0	-57.7	-13.0	-44.7	
3326.00	-24.0	H	3.0	34.2	1.0	-57.2	-13.0	-44.2	
High Ch, 844									
1688.00	-27.5	V	3.0	36.3	1.0	-62.8	-13.0	-49.8	
2532.00	-25.0	V	3.0	34.9	1.0	-58.9	-13.0	-45.9	
3376.00	-23.1	V	3.0	34.2	1.0	-56.3	-13.0	-43.3	
1688.00	-26.9	H	3.0	36.3	1.0	-62.2	-13.0	-49.2	
2532.00	-25.1	H	3.0	34.9	1.0	-59.1	-13.0	-46.1	
3376.00	-23.4	H	3.0	34.2	1.0	-56.6	-13.0	-43.6	

LTE B26 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/26/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_QPSK Band 26 Harmonics, 15MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 831.5									
1663.00	-28.6	V	3.0	36.3	1.0	-63.9	-13.0	-50.9	
2494.50	-24.5	V	3.0	34.9	1.0	-58.5	-13.0	-45.5	
3326.00	-22.3	V	3.0	34.2	1.0	-55.6	-13.0	-42.6	
1663.00	-29.1	H	3.0	36.3	1.0	-64.5	-13.0	-51.5	
2494.50	-25.3	H	3.0	34.9	1.0	-59.2	-13.0	-46.2	
3326.00	-23.2	H	3.0	34.2	1.0	-56.4	-13.0	-43.4	
Mid Ch, 836.5									
1673.00	-27.6	V	3.0	36.3	1.0	-63.9	-13.0	-49.9	
2509.50	-25.0	V	3.0	34.9	1.0	-59.0	-13.0	-46.0	
3346.00	-22.9	V	3.0	34.2	1.0	-56.2	-13.0	-43.2	
1673.00	-28.3	H	3.0	36.3	1.0	-63.6	-13.0	-50.6	
2509.50	-24.2	H	3.0	34.9	1.0	-58.1	-13.0	-45.1	
3346.00	-23.3	H	3.0	34.2	1.0	-56.6	-13.0	-43.6	
High Ch, 841.5									
1683.00	-26.4	V	3.0	36.3	1.0	-61.8	-13.0	-48.8	
2524.50	-21.6	V	3.0	34.9	1.0	-55.5	-13.0	-42.5	
3366.00	-23.3	V	3.0	34.2	1.0	-56.5	-13.0	-43.5	
1683.00	-28.4	H	3.0	36.3	1.0	-63.7	-13.0	-50.7	
2524.50	-25.0	H	3.0	34.9	1.0	-58.9	-13.0	-45.9	
3366.00	-23.2	H	3.0	34.2	1.0	-56.4	-13.0	-43.4	

LTE B26 15MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/26/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_16QAM Band 26 Harmonics, 15MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 831.5									
1663.00	-27.7	V	3.0	36.3	1.0	-63.0	-13.0	-50.0	
2494.50	-24.8	V	3.0	34.9	1.0	-58.8	-13.0	-45.8	
3326.00	-22.7	V	3.0	34.2	1.0	-55.9	-13.0	-42.9	
1663.00	-29.1	H	3.0	36.3	1.0	-64.4	-13.0	-51.4	
2494.50	-24.7	H	3.0	34.9	1.0	-58.7	-13.0	-45.7	
3326.00	-23.2	H	3.0	34.2	1.0	-56.5	-13.0	-43.5	
Mid Ch, 836.5									
1673.00	-27.6	V	3.0	36.3	1.0	-63.1	-13.0	-50.1	
2509.50	-24.9	V	3.0	34.9	1.0	-58.8	-13.0	-45.8	
3346.00	-22.9	V	3.0	34.2	1.0	-56.1	-13.0	-43.1	
1673.00	-28.6	H	3.0	36.3	1.0	-63.9	-13.0	-50.9	
2509.50	-23.9	H	3.0	34.9	1.0	-57.9	-13.0	-44.9	
3346.00	-23.7	H	3.0	34.2	1.0	-56.9	-13.0	-43.9	
High Ch, 841.5									
1683.00	-26.2	V	3.0	36.3	1.0	-61.5	-13.0	-48.5	
2524.50	-21.3	V	3.0	34.9	1.0	-55.3	-13.0	-42.3	
3366.00	-23.2	V	3.0	34.2	1.0	-56.4	-13.0	-43.4	
1683.00	-28.3	H	3.0	36.3	1.0	-63.7	-13.0	-50.7	
2524.50	-25.3	H	3.0	34.9	1.0	-59.2	-13.0	-46.2	
3366.00	-23.3	H	3.0	34.2	1.0	-56.5	-13.0	-43.5	

LTE B26 15MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/22/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_QPSK Band 7 Harmonics, 20MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2510										
9020.00	-20.7	V	3.0	33.2	1.0	-53.0	-25.0	-28.0		
7530.00	-19.9	V	3.0	32.6	1.0	-50.7	-25.0	-25.7		
10040.00	-17.6	V	3.0	32.7	1.0	-49.3	-25.0	-24.3		
5020.00	-21.0	H	3.0	33.2	1.0	-53.2	-25.0	-28.2		
7530.00	-19.0	H	3.0	32.8	1.0	-50.8	-25.0	-25.8		
10040.00	-19.3	H	3.0	32.7	1.0	-50.0	-25.0	-25.0		
Mid Ch, 2535										
5070.00	-20.7	V	3.0	33.2	1.0	-52.9	-25.0	-27.9		
7695.00	-19.9	V	3.0	32.8	1.0	-48.8	-25.0	-23.8		
10140.00	-16.7	V	3.0	32.7	1.0	-48.4	-25.0	-23.4		
5070.00	-20.9	H	3.0	33.2	1.0	-53.1	-25.0	-28.1		
7695.00	-18.7	H	3.0	32.8	1.0	-50.5	-25.0	-25.5		
10140.00	-19.0	H	3.0	32.7	1.0	-49.7	-25.0	-24.7		
High Ch, 2560										
5120.00	-19.3	V	3.0	33.2	1.0	-51.5	-25.0	-26.5		
7680.00	-18.2	V	3.0	32.8	1.0	-50.1	-25.0	-25.1		
10240.00	-17.1	V	3.0	32.6	1.0	-48.7	-25.0	-23.7		
5120.00	-20.7	H	3.0	33.2	1.0	-52.9	-25.0	-27.9		
7680.00	-19.2	H	3.0	32.8	1.0	-51.1	-25.0	-26.1		
10240.00	-17.3	H	3.0	32.6	1.0	-48.9	-25.0	-23.9		

LTE B7 20MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/22/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_16QAM Band 7 Harmonics, 20MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2510										
9020.00	-18.9	V	3.0	33.2	1.0	-51.2	-25.0	-26.2		
7530.00	-15.9	V	3.0	32.8	1.0	-47.8	-25.0	-22.8		
10040.00	-15.3	V	3.0	32.7	1.0	-47.0	-25.0	-22.0		
5020.00	-18.9	H	3.0	33.2	1.0	-51.1	-25.0	-26.1		
7530.00	-16.4	H	3.0	32.8	1.0	-48.2	-25.0	-23.2		
10040.00	-17.3	H	3.0	32.7	1.0	-49.0	-25.0	-24.0		
Mid Ch, 2535										
5070.00	-19.5	V	3.0	33.2	1.0	-51.7	-25.0	-26.7		
7695.00	-15.9	V	3.0	32.8	1.0	-47.8	-25.0	-22.8		
10140.00	-15.8	V	3.0	32.7	1.0	-47.5	-25.0	-22.5		
5070.00	-19.0	H	3.0	33.2	1.0	-51.2	-25.0	-26.2		
7695.00	-16.8	H	3.0	32.8	1.0	-48.7	-25.0	-23.7		
10140.00	-14.6	H	3.0	32.7	1.0	-46.3	-25.0	-21.3		
High Ch, 2560										
5120.00	-18.3	V	3.0	33.2	1.0	-50.5	-25.0	-25.5		
7680.00	-16.1	V	3.0	32.8	1.0	-47.9	-25.0	-22.9		
10240.00	-15.8	V	3.0	32.6	1.0	-47.4	-25.0	-22.4		
5120.00	-18.0	H	3.0	33.2	1.0	-50.3	-25.0	-25.3		
7680.00	-16.9	H	3.0	32.8	1.0	-48.7	-25.0	-23.7		
10240.00	-15.8	H	3.0	32.6	1.0	-47.4	-25.0	-22.4		

LTE B7 20MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/22/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_QPSK Band 12 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 704										
1408.00	-28.1	V	3.0	36.5	1.0	-63.6	-13.0	-50.6		
2112.00	-19.6	V	3.0	35.6	1.0	-54.2	-13.0	-41.2		
2816.00	-23.2	V	3.0	34.7	1.0	-57.0	-13.0	-44.0		
1408.00	-28.8	H	3.0	36.5	1.0	-64.3	-13.0	-51.3		
2112.00	-20.8	H	3.0	35.6	1.0	-55.4	-13.0	-42.4		
2816.00	-23.1	H	3.0	34.7	1.0	-56.8	-13.0	-43.8		
Mid Ch, 707.5										
1415.00	-28.3	V	3.0	36.5	1.0	-63.8	-13.0	-50.8		
2122.50	-20.2	V	3.0	35.6	1.0	-54.9	-13.0	-41.8		
2830.00	-22.4	V	3.0	34.7	1.0	-56.1	-13.0	-43.1		
1415.00	-28.6	H	3.0	36.5	1.0	-64.1	-13.0	-51.1		
2122.50	-18.9	H	3.0	35.6	1.0	-53.5	-13.0	-40.5		
2830.00	-23.3	H	3.0	34.7	1.0	-57.0	-13.0	-44.0		
High Ch, 711										
1422.00	-27.9	V	3.0	36.5	1.0	-63.5	-13.0	-50.5		
2133.00	-20.2	V	3.0	35.6	1.0	-54.8	-13.0	-41.8		
2844.00	-22.8	V	3.0	34.7	1.0	-56.5	-13.0	-43.5		
1422.00	-28.5	H	3.0	36.5	1.0	-64.1	-13.0	-51.1		
2133.00	-19.9	H	3.0	35.6	1.0	-54.4	-13.0	-41.4		
2844.00	-22.9	H	3.0	34.7	1.0	-56.6	-13.0	-43.6		

LTE B12 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/22/2017								
Test Engineer:		43575 OS								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_16QAM Band 12 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 704										
1408.00	-28.2	V	3.0	36.5	1.0	-63.8	-13.0	-50.8		
2112.00	-20.0	V	3.0	35.6	1.0	-54.6	-13.0	-41.6		
2816.00	-23.1	V	3.0	34.7	1.0	-56.8	-13.0	-43.8		
1408.00	-28.8	H	3.0	36.5	1.0	-64.3	-13.0	-51.3		
2112.00	-20.5	H	3.0	35.6	1.0	-55.2	-13.0	-42.2		
2816.00	-23.8	H	3.0	34.7	1.0	-57.6	-13.0	-44.6		
Mid Ch, 707.5										
1415.00	-28.2	V	3.0	36.5	1.0	-63.7	-13.0	-50.7		
2122.50	-20.1	V	3.0	35.6	1.0	-54.7	-13.0	-41.7		
2830.00	-22.0	V	3.0	34.7	1.0	-55.7	-13.0	-42.7		
1415.00	-28.9	H	3.0	36.5	1.0	-64.4	-13.0	-51.4		
2122.50	-19.6	H	3.0	35.6	1.0	-54.2	-13.0	-41.2		
2830.00	-23.4	H	3.0	34.7	1.0	-57.1	-13.0	-44.1		
High Ch, 711										
1422.00	-28.5	V	3.0	36.5	1.0	-64.0	-13.0	-51.0		
2133.00	-19.3	V	3.0	35.6	1.0	-53.8	-13.0	-40.8		
2844.00	-22.7	V	3.0	34.7	1.0	-56.3	-13.0	-43.3		
1422.00	-27.6	H	3.0	36.5	1.0	-63.2	-13.0	-50.2		
2133.00	-20.1	H	3.0	35.6	1.0	-54.7	-13.0	-41.7		
2844.00	-23.1	H	3.0	34.7	1.0	-56.8	-13.0	-43.8		

LTE B12 10MHz 16QAM

LTE Band 13

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/29/2017								
Test Engineer:		37290								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_OPSK Band 13 Harmonics, 5MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 779.5										
1559.00	-18.3	V	3.0	36.5	1.0	-53.8	-13.0	-40.8		
2338.50	-22.0	V	3.0	35.2	1.0	-56.2	-13.0	-43.2		
3118.00	-23.2	V	3.0	34.5	1.0	-56.7	-13.0	-43.7		
1559.00	-17.3	H	3.0	36.5	1.0	-52.8	-13.0	-39.8		
2338.50	-24.0	H	3.0	35.2	1.0	-58.2	-13.0	-45.2		
3118.00	-24.0	H	3.0	34.5	1.0	-57.5	-13.0	-44.5		
Mid Ch. 782										
1564.00	-14.9	V	3.0	36.5	1.0	-50.4	-13.0	-37.4		
2346.00	-24.8	V	3.0	35.2	1.0	-59.0	-13.0	-46.0		
3128.00	-22.8	V	3.0	34.4	1.0	-56.3	-13.0	-43.3		
1564.00	-13.9	H	3.0	36.5	1.0	-49.4	-13.0	-36.4		
2346.00	-23.4	H	3.0	35.2	1.0	-57.7	-13.0	-44.7		
3128.00	-24.0	H	3.0	34.4	1.0	-57.5	-13.0	-44.5		
High Ch. 784.5										
1569.00	-23.4	V	3.0	36.5	1.0	-58.9	-13.0	-45.9		
2353.50	-22.9	V	3.0	35.2	1.0	-57.1	-13.0	-44.1		
3138.00	-23.0	V	3.0	34.4	1.0	-56.4	-13.0	-43.4		
1569.00	-16.8	H	3.0	36.5	1.0	-52.3	-13.0	-39.3		
2353.50	-23.4	H	3.0	35.2	1.0	-57.6	-13.0	-44.6		
3138.00	-24.3	H	3.0	34.4	1.0	-57.7	-13.0	-44.7		

LTE B13 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/29/2017								
Test Engineer:		37290								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_16QAM Band 13 Harmonics, 5MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 779.5										
1559.00	-18.7	V	3.0	36.5	1.0	-54.2	-13.0	-41.2		
2338.50	-22.4	V	3.0	35.2	1.0	-56.6	-13.0	-43.6		
3118.00	-23.5	V	3.0	34.5	1.0	-57.0	-13.0	-44.0		
1559.00	-17.3	H	3.0	36.5	1.0	-52.8	-13.0	-39.8		
2338.50	-24.1	H	3.0	35.2	1.0	-58.3	-13.0	-45.3		
3118.00	-24.1	H	3.0	34.5	1.0	-57.5	-13.0	-44.5		
Mid Ch. 782										
1564.00	-15.1	V	3.0	36.5	1.0	-50.6	-13.0	-37.6		
2346.00	-25.1	V	3.0	35.2	1.0	-59.4	-13.0	-46.4		
3128.00	-22.9	V	3.0	34.4	1.0	-56.3	-13.0	-43.3		
1564.00	-13.9	H	3.0	36.5	1.0	-49.4	-13.0	-36.4		
2346.00	-23.6	H	3.0	35.2	1.0	-57.8	-13.0	-44.8		
3128.00	-24.2	H	3.0	34.4	1.0	-57.7	-13.0	-44.7		
High Ch. 784.5										
1569.00	-23.5	V	3.0	36.5	1.0	-59.0	-13.0	-46.0		
2353.50	-23.3	V	3.0	35.2	1.0	-57.5	-13.0	-44.5		
3138.00	-23.3	V	3.0	34.4	1.0	-56.7	-13.0	-43.7		
1569.00	-16.9	H	3.0	36.5	1.0	-52.4	-13.0	-39.4		
2353.50	-23.5	H	3.0	35.2	1.0	-57.7	-13.0	-44.7		
3138.00	-24.5	H	3.0	34.4	1.0	-57.9	-13.0	-44.9		

LTE B13 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/29/2017								
Test Engineer:		37290								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_OPSK Band 13 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Mid Ch. 782										
1564.00	-21.1	V	3.0	36.5	1.0	-56.6	-13.0	-43.6		
2346.00	-25.2	V	3.0	35.2	1.0	-59.4	-13.0	-46.4		
3128.00	-21.6	V	3.0	34.4	1.0	-55.0	-13.0	-42.0		
1564.00	-21.5	H	3.0	36.5	1.0	-57.0	-13.0	-44.0		
2346.00	-24.9	H	3.0	35.2	1.0	-59.1	-13.0	-46.1		
3128.00	-23.4	H	3.0	34.4	1.0	-56.9	-13.0	-43.9		

LTE B13 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		11785278								
Date:		6/29/2017								
Test Engineer:		37290								
Configuration:		EUT + AC + Headset								
Location:		Chamber C								
Mode:		LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Mid Ch. 782										
1564.00	-23.6	V	3.0	36.5	1.0	-59.1	-13.0	-46.1		
2346.00	-24.8	V	3.0	35.2	1.0	-59.1	-13.0	-46.1		
3128.00	-21.9	V	3.0	34.4	1.0	-55.3	-13.0	-42.3		
1564.00	-21.0	H	3.0	36.5	1.0	-56.5	-13.0	-43.5		
2346.00	-24.9	H	3.0	35.2	1.0	-59.1	-13.0	-46.1		
3128.00	-24.2	H	3.0	34.4	1.0	-57.7	-13.0	-44.7		

LTE B13 10MHz 16QAM

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_OPSK Band 41 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2506									
5012.00	-19.3	V	3.0	33.2	1.0	-51.5	-25.0	-26.5	
7518.00	-19.2	V	3.0	32.8	1.0	-51.0	-25.0	-26.0	
10024.00	-16.6	V	3.0	32.8	1.0	-48.4	-25.0	-23.4	
5012.00	-19.3	H	3.0	33.2	1.0	-51.5	-25.0	-26.5	
7518.00	-18.9	H	3.0	32.8	1.0	-50.7	-25.0	-25.7	
10024.00	-17.3	H	3.0	32.8	1.0	-49.1	-25.0	-24.1	
Mid Ch, 2593									
5186.00	-20.6	V	3.0	33.2	1.0	-52.8	-25.0	-27.8	
7779.00	-18.1	V	3.0	32.8	1.0	-50.0	-25.0	-25.0	
10372.00	-18.2	V	3.0	32.5	1.0	-49.7	-25.0	-24.7	
5186.00	-20.3	H	3.0	33.2	1.0	-52.5	-25.0	-27.5	
7779.00	-19.0	H	3.0	32.8	1.0	-50.8	-25.0	-25.8	
10372.00	-17.8	H	3.0	32.5	1.0	-49.3	-25.0	-24.3	
High Ch, 2680									
5360.00	-21.6	V	3.0	33.1	1.0	-53.8	-25.0	-28.8	
8040.00	-17.8	V	3.0	32.8	1.0	-49.6	-25.0	-24.6	
10720.00	-15.9	V	3.0	32.3	1.0	-47.2	-25.0	-22.2	
5360.00	-19.6	H	3.0	33.1	1.0	-51.8	-25.0	-26.8	
8040.00	-16.8	H	3.0	32.8	1.0	-48.6	-25.0	-23.6	
10720.00	-16.2	H	3.0	32.3	1.0	-47.5	-25.0	-22.5	

LTE B41 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
 Project #: 11785278
 Date: 6/21/2017
 Test Engineer: 43575 OS
 Configuration: EUT + AC + Headset
 Location: Chamber C
 Mode: LTE_16QAM Band 41 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2506									
5012.00	-19.4	V	3.0	33.2	1.0	-51.6	-25.0	-26.6	
7518.00	-18.8	V	3.0	32.8	1.0	-50.7	-25.0	-25.7	
10024.00	-16.9	V	3.0	32.8	1.0	-48.6	-25.0	-23.6	
5012.00	-19.5	H	3.0	33.2	1.0	-51.8	-25.0	-26.8	
7518.00	-18.9	H	3.0	32.8	1.0	-50.8	-25.0	-25.8	
10024.00	-17.3	H	3.0	32.8	1.0	-49.1	-25.0	-24.1	
Mid Ch, 2593									
5186.00	-19.2	V	3.0	33.2	1.0	-51.4	-25.0	-26.4	
7779.00	-17.6	V	3.0	32.8	1.0	-49.4	-25.0	-24.4	
10372.00	-17.4	V	3.0	32.5	1.0	-49.0	-25.0	-24.0	
5186.00	-20.5	H	3.0	33.2	1.0	-52.7	-25.0	-27.7	
7779.00	-19.1	H	3.0	32.8	1.0	-50.9	-25.0	-25.9	
10372.00	-17.2	H	3.0	32.5	1.0	-48.7	-25.0	-23.7	
High Ch, 2680									
5360.00	-20.9	V	3.0	33.1	1.0	-53.0	-25.0	-28.0	
8040.00	-17.4	V	3.0	32.8	1.0	-49.2	-25.0	-24.2	
10720.00	-16.2	V	3.0	32.3	1.0	-47.5	-25.0	-22.5	
5360.00	-21.0	H	3.0	33.1	1.0	-53.1	-25.0	-28.1	
8040.00	-16.4	H	3.0	32.8	1.0	-48.3	-25.0	-23.3	
10720.00	-15.9	H	3.0	32.3	1.0	-47.2	-25.0	-22.2	

LTE B41 20MHz 16QAM

