



**SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

*For*  
**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC**

**FCC ID: PY7-76486N**

**Report Number: 11785278-S1V1  
Issue Date: 7/24/2017**

*Prepared for*  
**SONY MOBILE COMMUNICATIONS INC.  
4-12-3 HIGASHI-SHINAGAWA  
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
V1	7/24/2017	Initial Issue	--

## Table of Contents

<b>1.</b>	<b>Attestation of Test Results .....</b>	<b>5</b>
<b>2.</b>	<b>Test Specification, Methods and Procedures.....</b>	<b>6</b>
<b>3.</b>	<b>Facilities and Accreditation.....</b>	<b>6</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment .....</b>	<b>7</b>
4.1.	<i>SAR Measurement System.....</i>	<i>7</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>8</i>
4.3.	<i>Test Equipment.....</i>	<i>10</i>
<b>5.</b>	<b>Measurement Uncertainty.....</b>	<b>11</b>
<b>6.</b>	<b>Device Under Test (DUT) Information .....</b>	<b>12</b>
6.1.	<i>DUT Description .....</i>	<i>12</i>
6.2.	<i>Wireless Technologies.....</i>	<i>13</i>
6.3.	<i>Maximum Output Power from Tune-up Procedure.....</i>	<i>14</i>
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>18</i>
6.5.	<i>LTE Carrier Aggregation.....</i>	<i>21</i>
6.6.	<i>LTE (TDD) Considerations.....</i>	<i>22</i>
6.7.	<i>Power Reduction by Capacitive Proximity Sensor.....</i>	<i>23</i>
6.7.1.	<i>Proximity Sensor Triggering Distance .....</i>	<i>23</i>
6.7.2.	<i>Proximity Sensor Coverage .....</i>	<i>25</i>
6.7.3.	<i>Proximity Sensor Tilt Angle Assessment.....</i>	<i>26</i>
6.7.4.	<i>Resulting test positions for SAR measurements .....</i>	<i>26</i>
<b>7.</b>	<b>RF Exposure Conditions (Test Configurations).....</b>	<b>27</b>
<b>8.</b>	<b>Dielectric Property Measurements &amp; System Check .....</b>	<b>29</b>
8.1.	<i>Dielectric Property Measurements .....</i>	<i>29</i>
8.2.	<i>System Check.....</i>	<i>32</i>
<b>9.</b>	<b>Conducted Output Power Measurements.....</b>	<b>34</b>
9.1.	<i>GSM .....</i>	<i>34</i>
9.2.	<i>W-CDMA .....</i>	<i>37</i>
9.3.	<i>LTE.....</i>	<i>43</i>
9.4.	<i>LTE Carrier Aggregation .....</i>	<i>59</i>
9.5.	<i>Wi-Fi 2.4GHz (DTS Band) .....</i>	<i>60</i>
9.6.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>61</i>
9.7.	<i>Bluetooth .....</i>	<i>62</i>
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results.....</b>	<b>63</b>



10.1.	GSM850.....	65
10.2.	GSM1900.....	65
10.3.	W-CDMA Band II.....	66
10.4.	W-CDMA Band IV.....	67
10.5.	W-CDMA Band V.....	67
10.6.	LTE Band 2 (20MHz Bandwidth).....	67
10.7.	LTE Band 4 (20MHz Bandwidth).....	67
10.8.	LTE Band 5 (10MHz Bandwidth).....	68
10.9.	LTE Band 7 (20MHz Bandwidth).....	68
10.10.	LTE Band 12 (10MHz Bandwidth).....	69
10.11.	LTE Band 13 (10MHz Bandwidth).....	69
10.12.	LTE Band 17 (10MHz Bandwidth).....	69
10.13.	LTE Band 25 (20MHz Bandwidth).....	70
10.14.	LTE Band 38 (20MHz Bandwidth).....	71
10.15.	LTE Band 41 (20MHz Bandwidth).....	71
10.16.	LTE Band 66 (20MHz Bandwidth).....	72
10.17.	Wi-Fi (DTS Band).....	73
10.18.	Wi-Fi (U-NII Band).....	74
10.19.	Bluetooth.....	75
10.20.	Standalone SAR Test Exclusion Considerations & Estimated SAR.....	75
<b>11.</b>	<b>SAR Measurement Variability.....</b>	<b>76</b>
<b>12.</b>	<b>Simultaneous Transmission SAR Analysis.....</b>	<b>78</b>
12.1.	Sum of the 1-g SAR for WWAN & Wi-Fi & BT.....	79
12.2.	Sum of the 10-g SAR for WWAN & Wi-Fi 5GHz & BT.....	79
<b>Appendixes</b>	<b>.....</b>	<b>80</b>
	11785278-S1V1 SAR_App A Setup Photos.....	80
	11785278-S1V1 SAR_App B System Check Plots.....	80
	11785278-S1V1 SAR_App C Highest Test Plots.....	80
	11785278-S1V1 SAR_App D Tissue Ingredients.....	80
	11785278-S1V1 SAR_App E Probe Cal. Certificates.....	80
	11785278-S1V1 SAR_App F Dipole Cal. Certificates.....	80

# 1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-76486N			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.292	0.850	0.584	N/A
Body-worn	0.845	0.052	0.051	N/A
Hotspot/Wi-Fi Direct	1.093	0.144	N/A	N/A
Extremity	2.727	N/A	0.276	N/A
Simultaneous TX 1-g	1.511	1.511	1.511	1.311
Simultaneous TX 10-g	3.457	N/A	3.457	3.457
Date Tested	6/21/2017 to 7/6/2017 and 7/12/2017 to 7/14/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By: 	Prepared By: 
David Weaver Program Manager UL Verification Services Inc.	AJ Newcomer Engineer UL Verification Services Inc.

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- [TCB workshop](#) April, 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation)

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

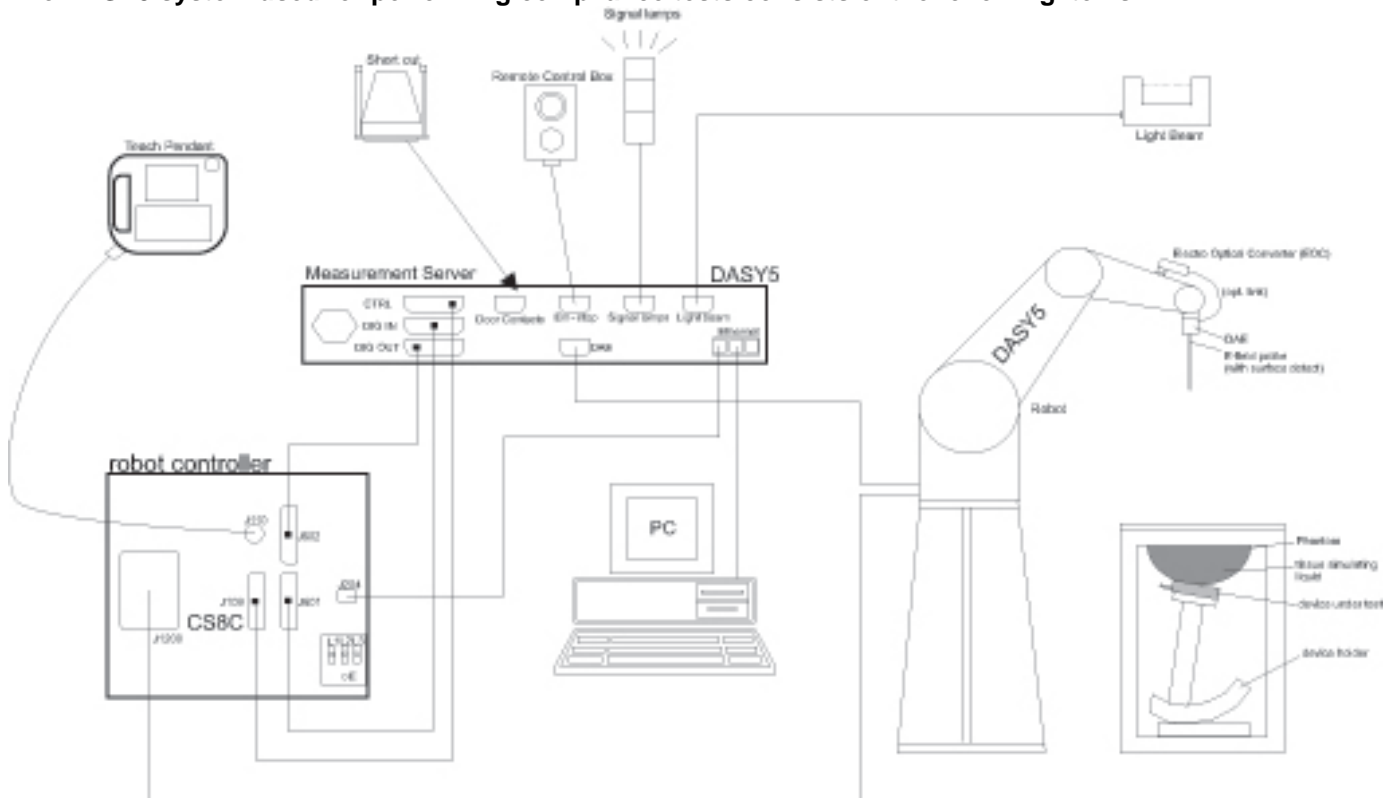

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/10/2018
Dielectric Probe kit	SPEAG	DAK-3.5	2097	8/28/2018
Dielectric Probe kit	SPEAG	DAK-3.5	2052	2/16/2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Control Company	Traceable 4242	122529162	11/11/2017

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3546A00784	9/2/2017
Power Meter	HP	437B	3125U11347	8/30/2017
Power Meter	HP	437B	3125u09516	9/27/2017
Power Sensor	Agilent	8481A	1926A16917	10/7/2017
Power Sensor	Agilent	8481A	2702A7622B	9/14/2017
Amplifier	MITEQ	147117-1E	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
Synthesized Signal Generator	Agilent	N5181A	MY50140610	5/31/2018
Power Meter	HP	437B	3125U11364	8/30/2017
Power Meter	HP	437B	3125U09248	9/14/2017
Power Sensor	Agilent	8481A	3318A95392	9/29/2017
Power Sensor	Agilent	8481A	2349A36506	9/29/2017
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A

**Lab Equipment**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3751	11/17/2017
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3686	8/25/2017
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3871	8/25/2017
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3990	3/15/2018
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1259	1/20/2018
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1433	3/8/2018
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1343	8/15/2017
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1380	7/25/2017
System Validation Dipole	SPEAG	D750V3	1024	5/12/2018
System Validation Dipole	SPEAG	D835V2	4d142	9/22/2017
System Validation Dipole	SPEAG	D1750V2	1053	8/16/2017
System Validation Dipole	SPEAG	D1900V2	5d163	9/19/2017
System Validation Dipole	SPEAG	D2450V2	899	3/10/2018
System Validation Dipole	SPEAG	D2600V2	1036	3/10/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	9/22/2017
Thermometer (SAR Lab 1)	EXTECH	445703	80666	4/13/2018
Thermometer (SAR Lab 2)	Traceable	15557603	160643193	7/25/2017
Thermometer (SAR Lab 3)	Traceable	15557603	160643167	7/25/2017
Thermometer (SAR Lab 4)	Traceable	15557603	170024385	12/23/2017

**Other**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY55196004	7/8/2017
Power Meter	Agilent	N1912A	MY55196007	7/8/2017
Power Sensor	Agilent	N1921A	MY52260009	1/5/2018
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
Base Station Simulator	R & S	CMW500	132909	3/14/2018
Base Station Simulator	R & S	CMW500	137876	8/5/2017
Base Station Simulator	R & S	CMW500	125236	3/6/2018
Base Station Simulator	R & S	CMW500	137873	7/8/2017
Base Station Simulator	R & S	CMW500	135393	5/15/2018
Base Station Simulator	Agilent	E5515C	GB47050526	2/21/2018

**5. Measurement Uncertainty**

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	Overall (Length x Width): 147.9 mm x 73.4 mm Overall Diagonal: 163.1 mm Display Diagonal: 130.85 mm		
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)		
Test sample information	<b>S/N</b>	<b>Technology</b>	<b>Notes</b>
	BH9000YC80	SAR GSM/UMTS	Conducted
	BH9000WC80	CP Sensor GSM/UMTS	Conducted
	BH9000XG80	SAR LTE (HB)	Conducted
	BH9000W080	SAR LTE (LB/MB)	Conducted
	BH90011Z80	CP Sensor LTE	Conducted
	BH9000W580	WLAN/BT 2.4GHz	Conducted
	BH9000XQ80	WLAN 5GHz	Conducted
	BH9000X880	SAR GSM #1	Radiated
	BH9000WG80	SAR GSM #2	Radiated
	BH9000VY80	SAR UMTS #1	Radiated
	BH9000Y580	SAR UMTS #2	Radiated
	BH9000V980	SAR CP Sensor GSM/UMTS #1	Radiated
	BH9000ZR80	SAR CP Sensor GSM/UMTS #2	Radiated
	BH9000ZK80	SAR LTE (HB) #1	Radiated
	BH9000WL80	SAR LTE (HB) #2	Radiated
	BH90013T80	SAR LTE (LB/MB) #1	Radiated
	BH90013Z80	SAR LTE (LB/MB) #2	Radiated
	BH90011G80	SAR CP Sensor LTE #1	Radiated
	BH9000X280	SAR CP Sensor LTE #2	Radiated
BH9000VE80	SAR WLAN/BT 2.4GHz #1	Radiated	
BH9000VU80	SAR WLAN/BT 2.4GHz #2	Radiated	

**DUT Description (continued)**

	S/N	Technology	Notes
Test sample information	BH9000VW80	SAR WLAN 5GHz #1	Radiated
	BH90012380	SAR WLAN 5GHz #2	Radiated
	BH9000VS80	SAR WLAN 5GHz #3	Radiated
Hardware Version	A		
Software Version	0.184		

**6.2. Wireless Technologies**

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class:	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
			<input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	
Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 7 FDD Band 12 FDD Band 13 FDD Band 17 FDD Band 25 FDD Band 29 (Rx Only) TDD Band 38 TDD Band 41 FDD Band 66	QPSK 16QAM <input checked="" type="checkbox"/> Rel. 11 Carrier Aggregation 4CC (1 Uplink and 4 Downlinks). (Carrier Aggregation is only supported for downlink and not for uplink.)		100% (FDD) 63.3% (TDD)
		Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Bluetooth	2.4 GHz	Version 5.0 LE		N/A

### 6.3. Maximum Output Power from Tune-up Procedure

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)		Red. RF Output Power (dBm)	
			Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
GSM850	Voice/GPRS	1	33.7	24.67		
	GPRS	2	32.2	26.18		
	GPRS	3	30.2	25.94		
	GPRS	4	29.2	26.19		
	EGPRS	1	28.0	18.97		
	EGPRS	2	26.5	20.48		
	EGPRS	3	24.5	20.24		
GSM1900	Voice/GPRS	1	30.7	21.67	29.2	20.17
	GPRS	2	29.2	23.18	26.2	20.18
	GPRS	3	27.2	22.94	24.2	19.94
	GPRS	4	26.2	23.19	23.2	20.19
	EGPRS	1	27.0	17.97	27.0	17.97
	EGPRS	2	25.4	19.38	25.4	19.38
	EGPRS	3	23.3	19.04	23.3	19.04
	EGPRS	4	22.1	19.09	22.1	19.09

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)				Red. RF Output Power (dBm)			
			CS		PS		CS		PS	
			Tune-up Limit	Frame Power	Tune-up Limit	Frame Power	Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
DTM GSM850	Voice + GPRS	1	33.7	24.7						
	Voice + GPRS	2	32.2	26.2	32.2	26.2				
	Voice + GPRS	3	30.2	25.9	30.2	25.9				
	Voice + EGPRS	1	33.7	24.7						
	Voice + EGPRS	2	32.2	26.2	26.5	20.5				
	Voice + EGPRS	3	30.2	25.9	24.5	20.2				
DTM GSM1900	Voice + GPRS	1	30.7	21.7			29.2	20.2		
	Voice + GPRS	2	29.2	23.2	29.2	23.2	26.2	20.2	26.2	20.2
	Voice + GPRS	3	27.2	22.9	27.2	22.9	24.2	19.9	24.2	19.9
	Voice + EGPRS	1	30.7	21.7			29.2	20.2		
	Voice + EGPRS	2	29.2	23.2	25.4	19.4	26.2	20.2	25.4	19.4
	Voice + EGPRS	3	27.2	22.9	23.3	19.0	24.2	19.9	23.3	19.0

RF Air interface	Mode		Max. RF Output Power (dBm)	Red. RF Output Power (dBm)
W-CDMA Band II	Release 99		24.0	20.5
	HSDPA	Subtest 1/2	23.5	20.0
		Subtest 3/4	23.0	19.5
	HSUPA	Subtest 1/5	23.2	19.7
		Subtest 2/4	21.5	18.0
		Subtest 3	22.5	19.0
	DC-HSDPA	Subtest 1/2	23.5	20.0
		Subtest 3/4	23.0	19.5
W-CDMA Band IV	Release 99		24.5	21.0
	HSDPA	Subtest 1/2	24.0	20.5
		Subtest 3/4	23.5	20.0
	HSUPA	Subtest 1/5	23.7	20.2
		Subtest 2/4	22.0	18.5
		Subtest 3	23.0	19.5
	DC-HSDPA	Subtest 1/2	24.0	20.5
		Subtest 3/4	23.5	20.0
W-CDMA Band V	Release 99		24.7	
	HSDPA	Subtest 1/2	24.2	
		Subtest 3/4	23.7	
	HSUPA	Subtest 1/5	23.9	
		Subtest 2/4	22.2	
		Subtest 3	23.2	
	DC-HSDPA	Subtest 1/2	24.2	
		Subtest 3/4	23.7	

RF Air interface	Mode	Max. RF Output Power (dBm)	Red. RF Output Power (dBm)
LTE Band 2	QPSK	24.0	20.5
	16QAM	23.0	20.5
	64QAM	22.0	20.5
LTE Band 4	QPSK	24.5	21.0
	16QAM	23.5	21.0
	64QAM	22.5	21.0
LTE Band 5	QPSK	25.0	
	16QAM	24.0	
	64QAM	23.0	
LTE Band 7	QPSK	25.0	21.5
	16QAM	24.0	21.5
	64QAM	23.0	21.5
LTE Band 12	QPSK	25.0	
	16QAM	24.0	
	64QAM	23.0	
LTE Band 13	QPSK	24.0	
	16QAM	23.0	
	64QAM	22.0	
LTE Band 17	QPSK	25.0	
	16QAM	24.0	
	64QAM	23.0	
LTE Band 25	QPSK	24.0	20.5
	16QAM	23.0	20.5
	64QAM	22.0	20.5
LTE Band 38	QPSK	25.0	24.0
	16QAM	24.0	23.0
	64QAM	23.0	22.0
LTE Band 41	QPSK	25.0	24.0
	16QAM	24.0	23.0
	64QAM	23.0	22.0
LTE Band 66	QPSK	24.5	21.0
	16QAM	23.5	21.0
	64QAM	22.5	21.0



RF Air interface	Mode	Channel	Max. RF Output Power (dBm)		
			Chain 0	Chain 1	
WiFi 2.4 GHz	802.11b	1-12	15.00	13.80	
		13	12.70	12.03	
	802.11g	1	8.96	7.85	
		2-11	15.00	13.80	
		12	10.16	9.41	
	802.11n HT20	13	3.66	2.91	
		1	8.96	7.85	
		2-11	15.00	13.80	
		12	9.20	8.37	
	WiFi 5 GHz	802.11n HT20	13	3.70	2.87
802.11a			All	14.50	12.50
802.11n HT20			All	14.50	12.50
802.11n HT40			All	14.50	12.50
802.11ac VHT20			All	14.50	12.50
802.11ac VHT40			All	14.50	12.50
Bluetooth	802.11ac VHT80	All	14.50	12.50	
		Low	10.09		
		Mid	11.83		
Bluetooth LE	High	11.84			
	Low	3.10			
	Mid	5.28			
	High	6.43			

### 6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 7	Frequency range: 2500 - 2570 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20850 2510	20825 2507.5	20800 2505	20775 2502.5		
	Mid	21100 2535	21100 2535	21100 2535	21100 2535		
	High	21350 2560	21375 2562.5	21400 2565	21425 2567.5		
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5	
High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3	
Band 13	Frequency range: 777 - 787 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low				23205/ 779.5			
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			

**General LTE SAR Test and Reporting Considerations (Continued)**

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 17	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High			23800/ 711	23825/ 713.5		
	Band 25	Frequency range: 1850 - 1915 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	26140/ 1860	26115/ 1857.5	26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7
	Mid	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5
	High	26590/ 1905	26615/ 1907.5	26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3
	Band 38	Frequency range: 2570 - 2620 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	37850/ 2580	37825/ 2577.5	37800/ 2575	37775/ 2572.5		
	Mid	38000/ 2595	38000/ 2595	38000/ 2595	38000/ 2595		
	High	38150/ 2610	38175/ 2612.5	38200/ 2615	38225/ 2617.5		
	Band 41	Frequency range: 2496 - 2690 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	39750 / 2506.0					
	Low-Mid	40185 / 2549.5					
Mid	40620 / 2593.0						
Mid-High	41055 / 2636.5						
High	41490 / 2680.0						
Band 66	Frequency range: 1710 - 1780 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7	
Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	
High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3	

**General LTE SAR Test and Reporting Considerations (Continued)**

LTE transmitter and antenna implementation	Refer to Appendix A.																																						
Maximum power reduction (MPR)	<p style="text-align: center;"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design                      The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.                      A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
Power reduction	No																																						
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						

### 6.5. LTE Carrier Aggregation

Combination	CA configuration	Bandwidth (MHz)											
		PCC						SCC1					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4
Intra-Band contiguous	12B				√					√	√		
	7C		√					√	√				
		√						√	√	√			
	66B			√					√	√	√		
		√								√	√		
	66C			√				√	√				
√							√	√	√	√			
Intra-Band non-contiguous	2A-2A	√	√	√	√			√	√	√	√		
	4A-4A	√	√	√	√			√	√	√	√		
	7A-7A			√					√				
		√						√	√				
	66A-66A	√	√	√	√			√	√	√	√		
Inter-Band non-contiguous	2A-4A	√	√	√	√	√	√	√	√	√	√		
	2A-5A	√	√	√	√					√	√		
	2A-7A	√	√	√	√			√	√	√	√		
	2A-12A	√	√	√	√					√	√	√	
	2A-17A			√	√					√	√		
	2A-29A	√	√	√	√					√	√		
	4A-5A	√	√	√	√					√	√		
	4A-7A	√	√	√	√			√	√	√	√		
	4A-12A	√	√	√	√	√	√			√	√	√	
	4A-17A			√	√					√	√		
4A-29A	√	√	√	√					√	√			
5A-7A			√	√	√	√	√	√	√	√			

**Note(s):**

For supported channels, please refer to §6.4

Combination	CA configuration	Bandwidth (MHz)																	
		PCC						SCC1						SCC2					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4	20	15	10	5	3	1.4
Inter-Band non-contiguous	2A-4A-5A	√	√	√	√			√	√	√	√					√	√		
	2A-4A-7A	√	√	√	√			√	√	√	√			√	√	√	√		
	2A-4A-12A	√	√	√	√			√	√	√	√					√	√		
	2A-4A-29A	√	√	√	√			√	√	√	√					√	√		
	2A-7A-7A	√	√	√	√			√	√	√	√			√	√	√	√		
	2A-12B	√	√	√	√					√	√					√	√		
	4A-4A-13A	√	√	√	√			√	√	√	√					√	√		
	4A-4A-29A	√	√	√	√			√	√	√	√					√	√		
	4A-7A-7A	√	√	√	√			√	√	√	√			√	√	√	√		
	4A-12B	√	√	√	√					√	√					√	√		

**Note(s):**

For supported channels, please refer to §6.4

Combination	CA configuration	Bandwidth (MHz)																							
		PCC						SCC1						SCC2						SCC3					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4	20	15	10	5	3	1.4	20	15	10	5	3	1.4
Inter-Band non-contiguous	2A-4A-7A-7A	√	√	√	√			√	√	√	√			√	√	√	√			√	√	√	√		

**Note(s):**

For supported channels, please refer to §6.4

### 6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special Subframe configurations.

Table 4.2-1: Configuration of Special Subframe (lengths of DwPTS/GP/UpPTS).

Special Subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

#### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T<sub>s</sub>) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

#### Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.

## 6.7. Power Reduction by Capacitive Proximity Sensor


### 6.7.1. Proximity Sensor Triggering Distance

Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The measurement was then repeated for the Rear and Front surfaces.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

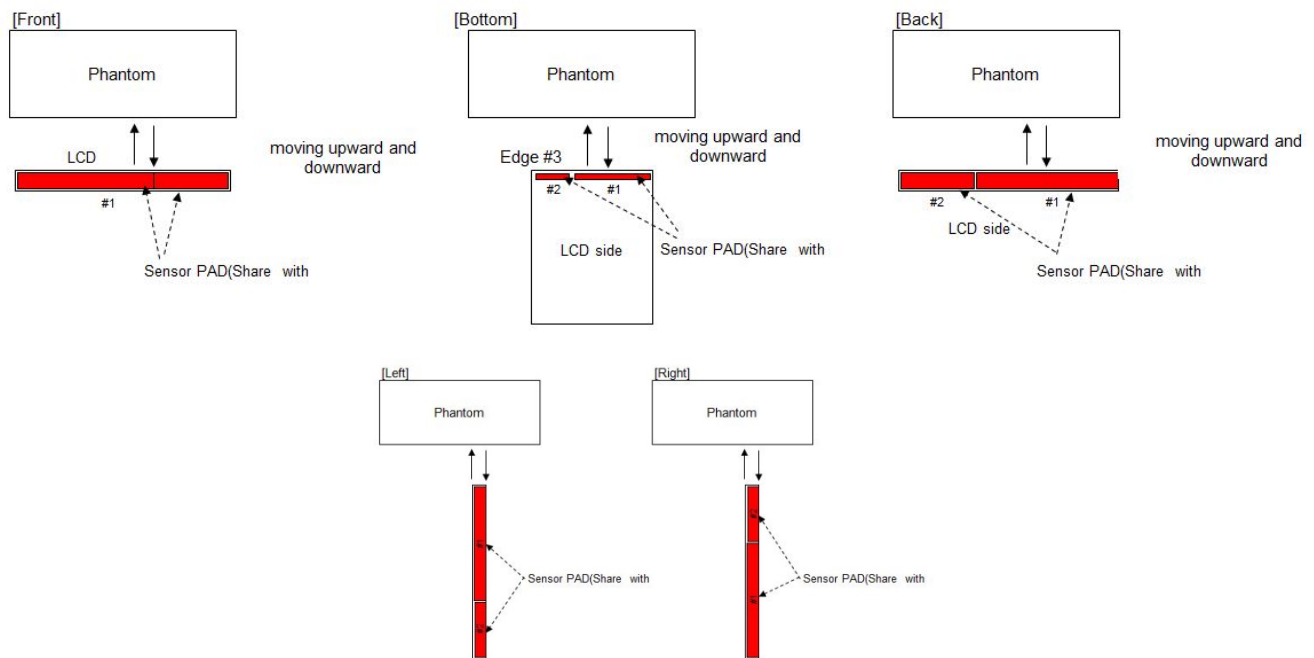

**Proximity Sensor Triggering Distance (continued)**

**Summary of Trigger Distances #1**

Band		Front		Edge 3		Rear		Edge 2		Edge 4	
		upward	downward	upward	downward	upward	downward	upward	downward	upward	downward
GSM	1900	9	13	10	12	3	4	Not detect	-	Not detect	-
UMTS	II	9	11	10	12	3	4	Not detect	-	Not detect	-
	IV	10	11	11	14	3	4	Not detect	-	Not detect	-
LTE	2	9	12	10	14	4	5	Not detect	-	Not detect	-
	4	9	11	11	14	3	4	Not detect	-	Not detect	-
	7	9	10	12	15	3	4	Not detect	-	Not detect	-
	25	9	10	10	13	3	4	Not detect	-	Not detect	-
	38	9	11	10	14	3	4	Not detect	-	Not detect	-
	41	9	10	10	13	3	4	Not detect	-	Not detect	-
	66	8	10	9	11	3	4	Not detect	-	Not detect	-

**Summary of Trigger Distances #2**

Band		Front		Edge 3		Rear		Edge 2		Edge 4	
		upward	downward	upward	downward	upward	downward	upward	downward	upward	downward
GSM	1900	10	13	9	10	3	5	Not detect	-	Not detect	-
UMTS	II	8	10	11	12	3	4	Not detect	-	Not detect	-
	IV	9	11	11	14	4	5	Not detect	-	Not detect	-
LTE	2	10	12	10	13	3	4	Not detect	-	Not detect	-
	4	10	12	10	14	4	5	Not detect	-	Not detect	-
	7	9	12	11	16	3	4	Not detect	-	Not detect	-
	25	8	10	10	13	3	4	Not detect	-	Not detect	-
	38	10	10	12	14	3	4	Not detect	-	Not detect	-
	41	9	10	11	14	3	5	Not detect	-	Not detect	-
	66	8	10	9	11	3	4	Not detect	-	Not detect	-




### 6.7.2. Proximity Sensor Coverage

The rear surface or edge of the DUT is positioned at a test separation distance less than or equal to the distance required for rear surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.

For the rear surface, if the direction of maximum offset is not aligned with the DUT coordinates (physical edges) the device test position would not be aligned with the phantom coordinates (orientations).

Each applicable edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a DUT, both adjacent edges must be considered.

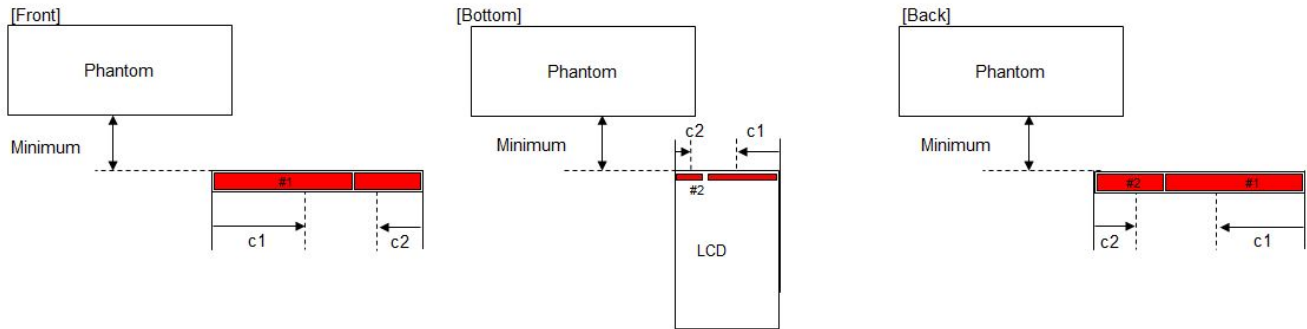


**Summary of DUT Sensor coverage to Proximity Sensor Triggering**

Band		Rear (mm)		Minimum Distance (mm)		Edge 1 (mm)		Minimum Distance (mm)		Edge 4 (mm)		Minimum Distance (mm)	
		#1	#2			#1	#2			#1			
		c1	c2	c1	c2	c1	c2	c1	c2				
GSM	1900	11	8	9	10	16	11	10	9	16	10	3	3
UMTS	II	12	10	9	8	14	10	10	11	16	11	3	3
	IV	12	10	10	9	15	10	11	11	16	13	3	4
LTE	2	11	11	9	10	17	10	10	10	17	14	4	3
	4	14	9	9	10	14	9	11	10	17	12	3	4
	7	11	9	9	9	16	9	12	11	19	14	3	3
	25	12	9	9	8	15	9	10	10	18	13	3	3
	38	11	10	9	10	16	9	10	12	18	14	3	3
	41	12	9	9	9	16	10	10	11	17	13	3	3
	66	11	10	8	8	16	9	9	9	17	12	3	3

### 6.7.3. Proximity Sensor Tilt Angle Assessment

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 3 for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

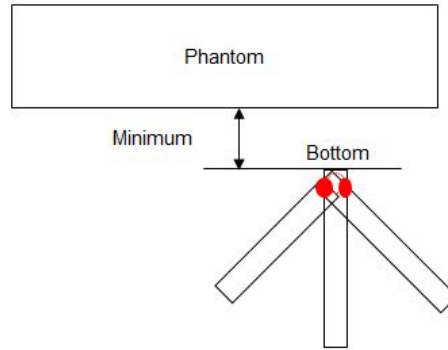

### Summary of DUT Tilt Angle Influence to Proximity Sensor Triggering

Band		Minimum Distance (mm)	
		Edge 1	
		#1	#2
GSM	1900	9	8
UMTS	II	9	11
	IV	11	10
LTE	2	9	10
	4	10	9
	7	10	11
	25	10	10
	38	10	11
	41	10	10
	66	9	8

### 6.7.4. Resulting test positions for SAR measurements

Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
Front	8 mm	8 mm	N/A	7 mm
Rear	3 mm	3 mm	N/A	2 mm
Edge 3	8 mm	9 mm	8 mm	7 mm

## 7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WWAN	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
	Extremity	0 mm	Edge 3 (Bottom)	< 25 mm	Yes
			Edge 4 (Left)	< 25 mm	Yes
			Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
Edge 3 (Bottom)			< 25 mm	Yes	
Edge 4 (Left)			< 25 mm	Yes	
WLAN/BT Main (Chain 0)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
	Extremity	0 mm	Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	< 25 mm	Yes
			Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
Edge 3 (Bottom)			> 25 mm	No	
Edge 4 (Left)			< 25 mm	Yes	

**Notes:**

- SAR is not required when the distance from the antenna to the edge is > 25 mm per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and Edges within 25mm of the antenna.

**RF Exposure Conditions (Test Configurations) continued:**

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WLAN Sub (Chain 1)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No
	Extremity	0 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No

**Notes:**

- SAR is not required when the distance from the antenna to the edge is > 25 mm per KDB 941225 D06 Hot Spot SAR.
- When Hotspot Mode is not supported, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and Edges within 25mm of the antenna.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5\%$  of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ . This is limited to frequencies  $\leq 3$  GHz.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1	6/22/2017	1900	Body	1900	51.17	53.30	-4.00	1.55	1.52	1.97
				1850	51.31	53.30	-3.73	1.49	1.52	-1.78
				1920	51.07	53.30	-4.18	1.56	1.52	2.57
1	6/24/2017	750	Head	750	38.12	41.96	-9.15	0.93	0.89	3.87
				695	39.27	42.24	-7.04	0.88	0.89	-1.03
				790	37.87	41.76	-9.31	0.97	0.90	8.08
1	6/26/2017	1900	Body	1900	51.19	53.30	-3.96	1.62	1.52	6.84
				1850	51.87	53.30	-2.68	1.63	1.52	6.97
				1920	51.20	53.30	-3.94	1.66	1.52	9.34
1	6/27/2017	1750	Body	1750	51.69	53.44	-3.28	1.42	1.49	-4.32
				1710	51.78	53.54	-3.29	1.39	1.46	-4.69
				1755	51.74	53.43	-3.16	1.43	1.49	-3.98
1	6/28/2017	750	Body	750	51.63	55.55	-7.05	1.00	0.96	4.25
				695	52.13	55.76	-6.51	0.95	0.96	-0.81
				790	51.25	55.39	-7.48	1.04	0.97	7.23
1	7/5/2017	1900	Body	1900	51.39	53.30	-3.58	1.54	1.52	1.38
				1850	51.49	53.30	-3.40	1.52	1.52	0.07
				1920	51.24	53.30	-3.86	1.57	1.52	3.03
1	7/12/2017	1900	Body	1900	51.76	53.30	-2.89	1.48	1.52	-2.37
				1850	51.92	53.30	-2.59	1.45	1.52	-4.87
				1920	51.75	53.30	-2.91	1.50	1.52	-1.25
2	6/23/2017	2450	Head	2450	38.67	39.20	-1.35	1.87	1.80	4.00
				2400	38.85	39.30	-1.14	1.83	1.75	4.47
				2480	38.51	39.16	-1.67	1.90	1.83	3.91
2	6/26/2017	2450	Body	2450	51.92	52.70	-1.48	2.04	1.95	4.56
				2400	51.61	52.77	-2.20	1.89	1.90	-0.58
				2480	51.94	52.66	-1.37	2.04	1.99	2.35
2	6/28/2017	2600	Head	2600	40.72	39.01	4.38	2.01	1.96	2.64
				2495	41.01	39.14	4.77	1.91	1.85	3.10
				2690	40.34	38.90	3.71	2.11	2.06	2.41
2	6/28/2017	2600	Body	2600	51.58	52.51	-1.77	2.11	2.16	-2.31
				2495	51.80	52.64	-1.60	1.99	2.01	-1.25
				2690	51.26	52.40	-2.17	2.21	2.29	-3.55
2	7/5/2017	2600	Head	2600	39.08	39.01	0.18	2.01	1.96	2.44
				2495	39.71	39.14	1.45	1.86	1.85	0.61
				2690	38.76	38.90	-0.35	2.13	2.06	3.43

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity ( $\epsilon_r$ )			Conductivity ( $\sigma$ )		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
3	6/21/2017	835	Head	835	41.72	41.50	0.53	0.94	0.90	3.97
				805	42.13	41.68	1.08	0.91	0.90	1.84
				915	40.71	41.50	-1.90	1.01	0.98	3.06
3	6/21/2017	835	Body	835	53.02	55.20	-3.95	0.96	0.97	-1.10
				805	53.26	55.33	-3.75	0.93	0.97	-4.07
				905	52.42	55.00	-4.69	1.03	1.05	-2.52
3	6/24/2017	1900	Head	1900	38.82	40.00	-2.95	1.45	1.40	3.36
				1850	38.72	40.00	-3.20	1.39	1.40	-1.07
				1920	38.80	40.00	-3.00	1.46	1.40	4.21
3	6/26/2017	1750	Head	1750	38.73	40.08	-3.38	1.44	1.37	4.90
				1710	38.93	40.15	-3.03	1.39	1.35	3.31
				1755	38.72	40.08	-3.39	1.44	1.37	4.83
3	7/5/2017	1750	Body	1750	52.28	53.44	-2.17	1.51	1.49	1.67
				1710	52.44	53.54	-2.06	1.45	1.46	-0.79
				1755	52.26	53.43	-2.19	1.52	1.49	1.93
3	7/12/2017	1750	Body	1750	52.28	53.44	-2.17	1.51	1.49	1.67
				1710	52.44	53.54	-2.06	1.45	1.46	-0.79
				1755	52.26	53.43	-2.19	1.52	1.49	1.93
4	6/22/2017	5200	Head	5200	36.85	35.99	2.39	4.62	4.65	-0.77
				5150	36.71	36.05	1.84	4.55	4.60	-1.13
				5350	36.46	35.82	1.79	4.75	4.80	-1.07
4	6/22/2017	5600	Head	5600	36.08	35.53	1.54	5.00	5.06	-1.11
				5500	36.27	35.65	1.74	4.90	4.96	-1.21
				5725	36.02	35.39	1.78	5.15	5.19	-0.83
4	6/26/2017	5600	Head	5600	35.53	35.53	-0.01	5.13	5.06	1.46
				5500	36.02	35.65	1.04	5.03	4.96	1.37
				5725	35.46	35.39	0.19	5.23	5.19	0.88
4	6/26/2017	5800	Head	5800	35.64	35.30	0.96	5.06	5.27	-4.04
				5700	35.79	35.42	1.05	5.27	5.16	2.08
				5850	35.34	35.30	0.11	5.35	5.27	1.50
4	6/28/2017	5200	Body	5200	46.87	49.02	-4.39	5.51	5.29	4.10
				5150	46.97	49.09	-4.31	5.41	5.24	3.37
				5350	46.52	48.82	-4.70	5.70	5.47	4.29
4	6/28/2017	5600	Body	5600	46.20	48.48	-4.70	5.99	5.76	4.04
				5500	46.39	48.61	-4.57	5.82	5.64	3.18
				5700	46.17	48.31	-4.43	6.12	5.91	3.61
4	6/28/2017	5800	Body	5800	46.04	48.20	-4.48	6.18	6.00	3.03
				5700	46.12	48.34	-4.60	6.10	5.88	3.75
				5850	45.92	48.20	-4.73	6.29	6.00	4.88

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0  $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq$  15.0 cm for SAR measurements  $\leq$  3 GHz and  $\geq$  10.0 cm for measurements  $>$  3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.



**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
1	6/22/2017	Body	D1900V2 SN:5d163	9/19/2017	3.990	39.90	39.60	0.76	2.060	20.60	21.00	-1.90	
1	6/24/2017	Head	D750V3 SN:1024	5/12/2018	0.866	8.66	8.47	2.24	0.570	5.70	5.53	3.07	
1	6/26/2017	Body	D1900V2 SN:5d163	9/19/2017	4.250	42.50	39.60	<b>7.32</b>	2.180	21.80	21.00	3.81	1,2
1	6/27/2017	Body	D1750V2 SN:1053	8/16/2017	3.480	34.80	37.40	<b>-6.95</b>	1.840	18.40	19.70	-6.60	3,4
1	6/28/2017	Body	D750V3 SN:1024	5/12/2018	0.817	8.17	8.59	<b>-4.89</b>	0.545	5.45	5.65	-3.54	5,6
1	7/5/2017	Body	D1900V2 SN:5d163	9/19/2017	4.150	41.50	39.60	4.80	2.200	22.00	21.00	4.76	
1	7/12/2017	Body	D1900V2 SN:5d163	9/19/2017	3.900	39.00	39.60	-1.52	2.050	20.50	21.00	-2.38	
2	6/23/2017	Head	D2450V2 SN:899	3/10/2018	5.600	56.00	52.60	6.46	2.570	25.70	24.60	4.47	
2	6/26/2017	Body	D2450V2 SN:899	3/10/2018	5.520	55.20	50.30	<b>9.74</b>	2.540	25.40	23.70	7.17	7,8
2	6/28/2017	Head	D2600V2 SN:1036	3/10/2018	5.820	58.20	57.50	1.22	2.560	25.60	25.60	0.00	
2	6/28/2017	Body	D2600V2 SN:1036	3/10/2018	5.150	51.50	54.60	-5.68	2.290	22.90	24.50	-6.53	
2	7/5/2017	Head	D2600V2 SN:1036	3/10/2018	5.330	53.30	57.50	<b>-7.30</b>	2.370	23.70	25.60	-7.42	9,10
3	6/21/2017	Head	D835V2 SN:4d142	9/22/2017	0.976	9.76	9.30	<b>4.95</b>	0.641	6.41	6.07	5.60	11,12
3	6/21/2017	Body	D835V2 SN:4d142	9/22/2017	0.978	9.78	9.32	4.94	0.650	6.50	6.18	5.18	
3	6/24/2017	Head	D1900V2 SN:5d163	9/19/2017	4.020	40.20	39.80	<b>1.01</b>	2.080	20.80	21.00	-0.95	13,14
3	6/26/2017	Head	D1750V2 SN:1053	8/16/2017	3.780	37.80	37.40	<b>1.07</b>	2.010	20.10	19.70	2.03	15,16
3	7/5/2017	Body	D1750V2 SN:1053	8/16/2017	3.730	37.30	37.40	-0.27	1.980	19.80	19.70	0.51	
3	7/12/2017	Body	D1750V2 SN:1053	8/16/2017	3.770	37.70	37.40	0.80	2.020	20.20	19.70	2.54	
4	6/22/2017	Head	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	8.030	80.30	78.30	2.55	2.280	22.80	22.40	1.79	
4	6/22/2017	Head	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.830	88.30	82.30	7.29	2.510	25.10	23.50	6.81	
4	6/26/2017	Head	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.390	83.90	82.30	1.94	2.370	23.70	23.50	0.85	
4	6/26/2017	Head	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.410	74.10	79.40	-6.68	2.100	21.00	22.70	-7.49	
4	6/28/2017	Body	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	7.920	79.20	74.20	6.74	2.250	22.50	20.90	7.66	
4	6/28/2017	Body	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.650	86.50	78.80	<b>9.77</b>	2.420	24.20	22.00	10.00	17,18
4	6/28/2017	Body	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.930	79.30	75.70	4.76	2.240	22.40	21.10	6.16	

## 9. Conducted Output Power Measurements

### 9.1. GSM

#### GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)
850	GPRS (GMSK)	CS4	1	128	824.2	33.3	24.3
				190	836.6	33.4	24.4
				251	848.8	33.3	24.3
			2	128	824.2	31.7	25.7
				190	836.6	31.7	25.7
				251	848.8	31.6	25.6
			3	128	824.2	29.6	25.3
				190	836.6	29.8	25.5
				251	848.8	29.7	25.4
			4	128	824.2	28.5	25.5
				190	836.6	28.6	25.6
				251	848.8	28.6	25.6
	EGPRS (8PSK)	MCS9	1	128	824.2	27.4	18.4
				190	836.6	27.5	18.5
				251	848.8	27.5	18.5
			2	128	824.2	25.6	19.6
				190	836.6	25.7	19.7
				251	848.8	25.7	19.7
			3	128	824.2	23.9	19.6
				190	836.6	23.9	19.6
				251	848.8	24.0	19.7
			4	128	824.2	23.3	20.3
				190	836.6	23.4	20.4
				251	848.8	23.3	20.3

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ db higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is  $\leq 1.2$ W/kg.

**GSM1900 Measured Results**

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr		Red. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GPRS (GMSK)	CS4	1	512	1850.2	30.3	21.3	28.7	19.7
				661	1880.0	30.3	21.3	28.8	19.8
				810	1909.8	30.2	21.2	28.8	19.8
			2	512	1850.2	28.6	22.6	25.5	19.5
				661	1880.0	28.7	22.7	25.6	19.6
				810	1909.8	28.6	22.6	25.6	19.6
			3	512	1850.2	26.8	22.5	23.5	19.2
				661	1880.0	26.7	22.4	23.7	19.4
				810	1909.8	26.7	22.4	23.8	19.5
			4	512	1850.2	25.8	22.8	22.5	19.5
				661	1880.0	25.8	22.8	22.7	19.7
				810	1909.8	25.5	22.5	22.7	19.7
	EGPRS (8PSK)	MCS9	1	512	1850.2	26.2	17.2	25.9	16.9
				661	1880.0	26.2	17.2	25.9	16.9
				810	1909.8	26.2	17.2	26.0	17.0
			2	512	1850.2	24.3	18.3	24.5	18.5
				661	1880.0	24.3	18.3	24.5	18.5
				810	1909.8	24.3	18.3	24.6	18.6
			3	512	1850.2	22.1	17.8	22.1	17.8
				661	1880.0	22.1	17.8	22.2	17.9
				810	1909.8	22.1	17.8	22.3	18.0
			4	512	1850.2	20.9	17.9	20.9	17.9
				661	1880.0	20.9	17.9	21.0	18.0
				810	1909.8	21.0	18.0	21.0	18.0

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max Power and 4 time slots for Reduced Power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is  $\leq 1/4$ db higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is  $\leq 1.2W/kg$ .

**GSM850 DTM Measured Results**

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr			
						CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
850	GSM(Voice) + GPRS(GMSK)	CS4	1	128	824.2	33.3	24.3		
				190	836.6	33.4	24.4		
				251	848.8	33.3	24.3		
			2	128	824.2	31.6	25.6	31.6	25.6
				190	836.6	31.6	25.6	31.7	25.7
				251	848.8	31.6	25.6	31.6	25.6
			3	128	824.2	29.7	25.4	29.7	25.4
				190	836.6	29.7	25.4	29.7	25.4
				251	848.8	29.7	25.4	29.7	25.4
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	128	824.2	33.3	24.3		
				190	836.6	33.4	24.4		
				251	848.8	33.3	24.3		
			2	128	824.2	31.7	25.7	24.9	18.9
				190	836.6	31.7	25.7	25.0	19.0
				251	848.8	31.7	25.7	25.0	19.0
			3	128	824.2	29.8	25.5	22.8	18.5
				190	836.6	29.9	25.6	22.9	18.6
				251	848.8	29.9	25.6	22.8	18.5

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 1 time slot, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4db higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is ≤ 1.2W/kg.

**GSM1900 DTM Measured Results**

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr				Red. Meas. Avg Pwr			
						CS		PS		CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM(Voice) + GPRS(GMSK)	CS4	1	512	1850.2	30.3	21.3			28.7	19.7		
				661	1880.0	30.3	21.3			28.8	19.8		
				810	1909.8	30.2	21.2			28.8	19.8		
			2	512	1850.2	28.4	22.4	28.6	22.6	25.0	19.0	25.4	19.4
				661	1880.0	28.4	22.4	28.6	22.6	25.1	19.1	25.5	19.5
				810	1909.8	28.3	22.3	28.5	22.5	25.4	19.4	25.7	19.7
			3	512	1850.2	26.3	22.0	26.6	22.3	23.0	18.7	23.4	19.1
				661	1880.0	26.4	22.1	26.7	22.4	23.2	18.9	23.7	19.4
				810	1909.8	26.4	22.1	26.7	22.4	23.3	19.0	23.7	19.4
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	512	1850.2	30.3	21.3			28.7	19.7		
				661	1880.0	30.3	21.3			28.8	19.8		
				810	1909.8	30.2	21.2			28.8	19.8		
			2	512	1850.2	28.4	22.4	24.4	18.4	25.0	19.0	24.5	18.5
				661	1880.0	28.4	22.4	24.4	18.4	25.2	19.2	24.5	18.5
				810	1909.8	28.4	22.4	24.4	18.4	25.4	19.4	24.5	18.5
			3	512	1850.2	26.4	22.1	22.1	17.8	23.1	18.8	22.1	17.8
				661	1880.0	26.5	22.2	22.1	17.8	23.2	18.9	22.3	18.0
				810	1909.8	26.4	22.1	22.1	17.8	23.2	18.9	22.4	18.1

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 1 time slot for Max Power and GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 1 time slot for Reduced Power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4db higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is ≤ 1.2W/kg.

## 9.2. W-CDMA

### Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	Subtest	HSDPA	HSDPA	HSDPA	HSDPA
		1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in Table C.11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15	
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

**DC-HSDPA Setup Procedures used to establish the test signals**

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

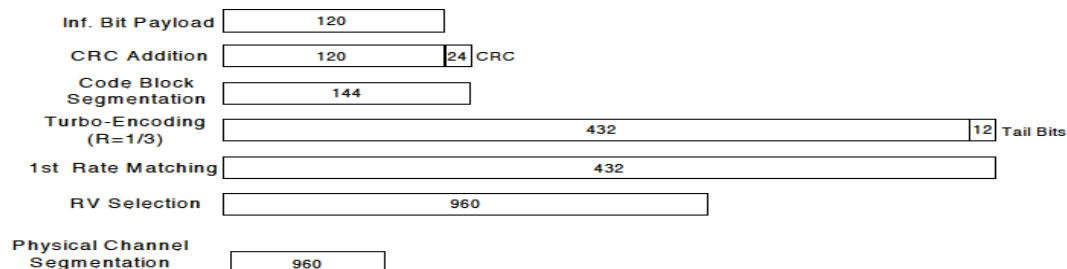

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15			

**HSPA+**

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7 Therefore, the RF conducted power is not measured.

**W-CDMA Band II Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	Reduced Meas. Avg Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.8	20.0
			9400	1880.0	N/A	23.8	20.0
			9538	1907.6	N/A	24.0	20.1
	HSDPA	Subtest 1	9262	1852.4	0	22.7	19.1
			9400	1880.0	0	22.6	18.9
			9538	1907.6	0	23.0	19.1
		Subtest 2	9262	1852.4	0	22.7	19.0
			9400	1880.0	0	22.6	19.0
			9538	1907.6	0	23.0	19.2
		Subtest 3	9262	1852.4	0.5	22.8	18.6
			9400	1880.0	0.5	22.7	18.5
			9538	1907.6	0.5	22.7	18.6
			9262	1852.4	0.5	22.8	18.5
			9400	1880.0	0.5	22.7	18.5
			9538	1907.6	0.5	22.7	18.6
	HSUPA	Subtest 1	9262	1852.4	0	22.7	18.8
			9400	1880.0	0	22.6	19.0
			9538	1907.6	0	22.8	19.0
		Subtest 2	9262	1852.4	2	20.6	17.1
			9400	1880.0	2	20.7	17.0
			9538	1907.6	2	20.7	17.5
		Subtest 3	9262	1852.4	1	21.7	17.7
			9400	1880.0	1	21.6	18.2
			9538	1907.6	1	21.8	18.2
		Subtest 4	9262	1852.4	2	20.7	17.1
			9400	1880.0	2	20.7	17.0
			9538	1907.6	2	20.8	17.5
		Subtest 5	9262	1852.4	0	22.7	18.8
			9400	1880.0	0	22.6	19.0
			9538	1907.6	0	22.8	19.0
	DC-HSDPA	Subtest 1	9262	1852.4	0	22.7	19.1
			9400	1880.0	0	22.6	18.9
			9538	1907.6	0	23.0	19.1
		Subtest 2	9262	1852.4	0	22.7	19.0
			9400	1880.0	0	22.6	19.0
			9538	1907.6	0	23.0	19.2
Subtest 3		9262	1852.4	0.5	22.8	18.6	
		9400	1880.0	0.5	22.7	18.5	
		9538	1907.6	0.5	22.7	18.6	
Subtest 4		9262	1852.4	0.5	22.8	18.5	
		9400	1880.0	0.5	22.7	18.5	



**W-CDMA Band IV Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	Reduced Meas. Avg Pwr (dBm)	
W-CDMA Band IV	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	24.3	20.6	
			1413	1732.6	N/A	24.3	20.5	
			1513	1752.6	N/A	24.2	20.5	
	HSDPA	Subtest 1	1312	1712.4	0	23.3	19.8	
			1413	1732.6	0	23.5	20.0	
			1513	1752.6	0	23.1	19.8	
		Subtest 2	1312	1712.4	0	23.3	19.6	
			1413	1732.6	0	23.5	19.5	
			1513	1752.6	0	23.0	19.6	
		Subtest 3	1312	1712.4	0.5	23.0	19.3	
			1413	1732.6	0.5	23.0	19.3	
			1513	1752.6	0.5	22.9	19.2	
		Subtest 4	1312	1712.4	0.5	23.0	19.3	
			1413	1732.6	0.5	23.0	19.3	
			1513	1752.6	0.5	22.9	19.3	
		HSUPA	Subtest 1	1312	1712.4	0	23.2	19.8
				1413	1732.6	0	23.3	19.8
				1513	1752.6	0	23.2	19.4
	Subtest 2		1312	1712.4	2	21.3	17.8	
			1413	1732.6	2	21.4	17.6	
			1513	1752.6	2	21.2	17.7	
	Subtest 3		1312	1712.4	1	22.3	18.7	
			1413	1732.6	1	22.4	18.6	
			1513	1752.6	1	22.1	18.5	
	Subtest 4		1312	1712.4	2	21.3	17.8	
			1413	1732.6	2	21.4	17.6	
			1513	1752.6	2	21.2	17.7	
	Subtest 5		1312	1712.4	0	23.2	19.8	
			1413	1732.6	0	23.3	19.8	
			1513	1752.6	0	23.2	19.4	
	DC-HSDPA	Subtest 1	1312	1712.4	0	23.3	19.8	
			1413	1732.6	0	23.5	20.0	
			1513	1752.6	0	23.1	19.8	
		Subtest 2	1312	1712.4	0	23.3	19.6	
			1413	1732.6	0	23.5	19.5	
			1513	1752.6	0	23.0	19.6	
		Subtest 3	1312	1712.4	0.5	23.0	19.3	
			1413	1732.6	0.5	23.0	19.3	
			1513	1752.6	0.5	22.9	19.2	
		Subtest 4	1312	1712.4	0.5	23.0	19.3	
			1413	1732.6	0.5	23.0	19.3	
			1513	1752.6	0.5	22.9	19.3	

**W-CDMA Band V Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.5	
			4183	836.6	N/A	24.7	
			4233	846.6	N/A	24.7	
	HSDPA	Subtest 1	4132	826.4	0	23.6	
			4183	836.6	0	23.9	
			4233	846.6	0	23.8	
		Subtest 2	4132	826.4	0	23.3	
			4183	836.6	0	23.7	
			4233	846.6	0	23.9	
		Subtest 3	4132	826.4	0.5	23.1	
			4183	836.6	0.5	23.3	
			4233	846.6	0.5	23.1	
			4132	826.4	0.5	23.0	
			4183	836.6	0.5	23.2	
			4233	846.6	0.5	23.4	
		HSUPA	Subtest 1	4132	826.4	0	23.6
				4183	836.6	0	23.6
				4233	846.6	0	23.6
	Subtest 2		4132	826.4	2	21.7	
			4183	836.6	2	21.8	
			4233	846.6	2	21.8	
	Subtest 3		4132	826.4	1	22.6	
			4183	836.6	1	22.8	
			4233	846.6	1	22.8	
	Subtest 4		4132	826.4	2	21.7	
			4183	836.6	2	21.8	
			4233	846.6	2	21.8	
	Subtest 5		4132	826.4	0	23.6	
			4183	836.6	0	23.6	
			4233	846.6	0	23.6	
	DC-HSDPA		Subtest 1	4132	826.4	0	23.6
				4183	836.6	0	23.9
				4233	846.6	0	23.8
		Subtest 2	4132	826.4	0	23.3	
			4183	836.6	0	23.7	
			4233	846.6	0	23.9	
		Subtest 3	4132	826.4	0.5	23.1	
			4183	836.6	0.5	23.3	
			4233	846.6	0.5	23.1	
		Subtest 4	4132	826.4	0.5	23.0	
			4183	836.6	0.5	23.2	
			4233	846.6	0.5	23.4	

### 9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

#### LTE Band 2 Measured Results

SAR for LTE Band 2 (Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

#### LTE Band 4 Measured Results

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 5 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0		24.7	
			1	25	0		24.6	
			1	49	0		24.6	
			25	0	1		23.6	
			25	12	1		23.6	
			25	25	1		23.6	
			50	0	1		23.6	
		16QAM	1	0	1		24.0	
			1	25	1		23.9	
			1	49	1		23.9	
			25	0	2		22.7	
			25	12	2		22.6	
			25	25	2		22.6	
			50	0	2		22.6	
		64QAM	1	0	2		21.7	
			1	25	2		21.7	
			1	49	2		21.8	
			25	0	3		20.5	
			25	12	3		20.5	
			25	25	3		20.5	
			50	0	3		20.5	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	24.7	24.6	24.5
			1	12	0	24.7	24.6	24.4
			1	24	0	24.7	24.6	24.4
			12	0	1	23.6	23.6	23.5
			12	7	1	23.8	23.6	23.4
			12	13	1	23.7	23.6	23.4
			25	0	1	23.7	23.6	23.5
		16QAM	1	0	1	23.8	24.0	23.7
			1	12	1	23.8	24.0	23.5
			1	24	1	23.8	24.0	23.6
			12	0	2	22.7	22.8	22.6
			12	7	2	22.8	22.7	22.5
			12	13	2	22.8	22.7	22.5
			25	0	2	22.7	22.6	22.5
		64QAM	1	0	2	21.8	22.0	22.0
			1	12	2	21.9	21.8	22.0
			1	24	2	21.8	21.8	21.9
			12	0	3	20.5	20.5	20.7
			12	7	3	20.6	20.5	20.7
			12	13	3	20.6	20.5	20.7
			25	0	3	20.6	20.5	20.7

**Note(s):**

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 5 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	24.6	24.6	24.4
			1	8	0	24.7	24.7	24.5
			1	14	0	24.6	24.6	24.3
			8	0	1	23.6	23.6	23.4
			8	4	1	23.6	23.6	23.4
			8	7	1	23.6	23.6	23.4
			15	0	1	23.6	23.6	23.4
		16QAM	1	0	1	23.7	24.0	23.3
			1	8	1	23.7	24.0	23.4
			1	14	1	23.7	23.9	23.3
			8	0	2	22.7	22.7	22.6
			8	4	2	22.7	22.7	22.5
			8	7	2	22.7	22.7	22.5
		64QAM	15	0	2	22.6	22.6	22.5
			1	0	2	22.1	22.0	21.8
			1	8	2	21.9	22.0	21.8
			1	14	2	22.0	22.0	21.9
			8	0	3	20.7	20.8	20.7
			8	4	3	20.8	20.8	20.7
			8	7	3	20.8	20.8	20.7
		15	0	3	20.7	20.8	20.7	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	24.5	24.5	24.4
			1	3	0	24.6	24.6	24.4
			1	5	0	24.5	24.5	24.3
			3	0	0	24.5	24.5	24.3
			3	1	0	24.6	24.5	24.3
			3	3	0	24.6	24.5	24.3
			6	0	1	23.5	23.5	23.3
		16QAM	1	0	1	23.6	23.9	23.4
			1	3	1	23.6	23.9	23.4
			1	5	1	23.6	23.9	23.4
			3	0	1	23.7	23.7	23.4
			3	1	1	23.8	23.7	23.5
			3	3	1	23.8	23.7	23.5
		64QAM	6	0	2	22.7	22.4	22.5
			1	0	2	22.0	22.0	22.0
			1	3	2	21.9	21.9	21.8
			1	5	2	21.9	22.0	21.8
			3	0	2	21.7	21.8	21.6
			3	1	2	21.8	21.9	21.7
			3	3	2	21.8	21.8	21.7
		6	0	3	20.7	20.7	20.6	

**LTE Band 7 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						2510 MHz	2535 MHz	2560 MHz		2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	24.0	24.7	24.5	0	21.2	21.0	21.2
			1	49	0	24.0	24.2	24.4	0	20.9	20.9	21.0
			1	99	0	24.2	24.3	23.3	0	20.7	20.8	21.1
			50	0	1	22.8	23.7	23.5	0	21.1	21.0	21.1
			50	24	1	22.8	23.6	23.4	0	21.0	21.0	21.1
			50	50	1	22.9	23.6	23.0	0	20.8	20.8	21.0
			100	0	1	23.0	23.4	23.0	0	21.0	20.9	21.1
		16QAM	1	0	1	23.5	24.0	24.0	0	21.1	20.9	21.2
			1	49	1	23.3	24.0	23.8	0	20.8	20.9	21.0
			1	99	1	23.8	24.0	22.8	0	20.6	20.8	21.1
			50	0	2	22.1	22.7	22.8	0	20.6	20.6	20.6
			50	24	2	22.0	22.6	22.7	0	20.5	20.5	20.7
			50	50	2	22.2	22.6	22.3	0	20.3	20.4	20.6
			100	0	2	22.1	22.7	22.3	0	20.5	20.4	20.7
		64QAM	1	0	2	22.0	21.2	21.3	0	20.7	20.4	20.7
			1	49	2	21.6	21.0	21.2	0	20.5	20.3	20.5
			1	99	2	22.0	21.0	21.2	0	20.3	20.4	20.5
			50	0	3	20.6	20.0	20.3	0	20.4	20.3	20.4
			50	24	3	20.5	20.0	20.3	0	20.3	20.3	20.5
			50	50	3	20.5	20.0	20.2	0	20.2	20.2	20.4
			100	0	3	20.5	20.0	20.2	0	20.3	20.2	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						2507.5 MHz	2535 MHz	2562.5 MHz		2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	24.0	24.6	24.5	0	21.1	21.0	21.0
			1	37	0	23.8	24.5	23.7	0	20.8	20.9	20.9
			1	74	0	23.9	24.4	23.4	0	20.7	20.8	20.9
			36	0	1	22.9	23.6	23.4	0	21.0	20.9	21.0
			36	20	1	22.9	23.6	23.3	0	20.9	21.0	21.1
			36	39	1	22.8	23.6	22.9	0	20.8	20.8	21.0
			75	0	1	22.9	23.6	23.0	0	20.9	20.9	21.1
		16QAM	1	0	1	23.5	23.5	23.9	0	21.0	20.8	20.4
			1	37	1	23.8	23.2	23.5	0	20.7	20.7	20.4
			1	74	1	23.3	23.3	22.7	0	20.6	20.6	20.4
			36	0	2	22.1	22.6	22.6	0	20.4	20.5	20.6
			36	20	2	22.1	22.6	22.4	0	20.4	20.5	20.6
			36	39	2	22.1	22.6	22.1	0	20.3	20.4	20.5
			75	0	2	22.0	22.6	22.3	0	20.4	20.5	20.6
		64QAM	1	0	2	22.3	21.4	22.1	0	20.7	20.5	20.5
			1	37	2	21.9	21.2	22.0	0	20.5	20.4	20.5
			1	74	2	21.8	21.2	21.1	0	20.3	20.4	20.4
			36	0	3	20.7	20.0	20.8	0	20.3	20.3	20.4
			36	20	3	20.5	20.0	20.6	0	20.2	20.3	20.4
			36	39	3	20.3	20.0	20.2	0	20.2	20.2	20.4
			75	0	3	20.3	20.0	20.4	0	20.2	20.3	20.4

**LTE Band 7 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						2505 MHz	2535 MHz	2565 MHz		2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	24.0	24.7	24.3	0	21.0	21.0	21.0
			1	25	0	23.8	24.6	23.8	0	20.8	20.9	21.0
			1	49	0	23.7	24.5	23.4	0	20.8	20.8	21.0
			25	0	1	22.9	23.5	23.3	0	21.0	20.9	21.1
			25	12	1	23.0	23.6	23.0	0	20.9	21.0	21.1
			25	25	1	22.8	23.5	22.8	0	20.8	20.9	21.0
		16QAM	50	0	1	22.7	23.6	22.8	0	20.9	20.9	21.0
			1	0	1	23.1	23.9	23.2	0	20.6	20.8	20.5
			1	25	1	23.2	23.8	22.8	0	20.4	20.7	20.4
			1	49	1	22.9	23.8	22.4	0	20.3	20.6	20.4
			25	0	2	22.3	22.6	22.4	0	20.5	20.5	20.7
			25	12	2	22.3	22.6	22.2	0	20.5	20.5	20.6
		64QAM	25	25	2	22.2	22.5	22.0	0	20.5	20.4	20.6
			50	0	2	22.1	22.6	22.1	0	20.5	20.5	20.5
			1	0	2	22.5	22.2	21.9	0	20.4	20.5	20.5
			1	25	2	22.0	22.0	21.3	0	20.3	20.3	20.6
			1	49	2	21.8	22.0	21.0	0	20.2	20.2	20.4
			25	0	3	20.8	20.9	20.5	0	20.2	20.2	20.4
LTE Band 7	5	QPSK	25	12	3	20.7	20.9	20.3	0	20.3	20.3	20.4
			25	25	3	20.4	21.0	20.0	0	20.2	20.3	20.3
			50	0	3	20.5	20.9	20.0	0	20.2	20.3	20.3
			1	0	2	22.5	22.2	21.9	0	20.4	20.5	20.5
			1	25	2	22.0	22.0	21.3	0	20.3	20.3	20.6
			1	49	2	21.8	22.0	21.0	0	20.2	20.2	20.4
		16QAM	25	0	3	20.8	20.9	20.5	0	20.2	20.2	20.4
			25	12	3	20.7	20.9	20.3	0	20.3	20.3	20.4
			25	25	3	20.4	21.0	20.0	0	20.2	20.3	20.3
			50	0	3	20.5	20.9	20.0	0	20.2	20.3	20.3
			1	0	1	23.3	24.0	23.2	0	21.0	20.6	20.7
			1	12	1	23.3	24.0	22.7	0	20.9	20.6	20.7
		64QAM	1	24	1	23.2	23.9	22.7	0	20.9	20.5	20.7
			12	0	2	22.4	22.7	22.2	0	20.7	20.6	20.6
			12	7	2	22.4	22.7	22.1	0	20.6	20.6	20.7
			12	13	2	22.4	22.7	22.0	0	20.6	20.5	20.6
			25	0	2	22.2	22.6	22.0	0	20.5	20.4	20.5
			1	0	2	22.3	22.1	21.5	0	20.5	20.5	20.5
QPSK	1	12	0	23.9	24.5	23.7	0	20.9	20.9	21.1		
	1	24	0	23.9	24.4	23.5	0	20.8	20.9	21.1		
	12	0	1	23.1	23.6	23.0	0	21.0	20.9	21.1		
	12	7	1	23.2	23.6	22.9	0	20.9	20.9	21.1		
	12	13	1	23.1	23.5	22.8	0	20.9	20.9	21.1		
	25	0	1	23.0	23.5	22.9	0	20.9	20.9	21.1		
16QAM	1	0	1	23.3	24.0	23.2	0	21.0	20.6	20.7		
	1	12	1	23.3	24.0	22.7	0	20.9	20.6	20.7		
	1	24	1	23.2	23.9	22.7	0	20.9	20.5	20.7		
	12	0	2	22.4	22.7	22.2	0	20.7	20.6	20.6		
	12	7	2	22.4	22.7	22.1	0	20.6	20.6	20.7		
	12	13	2	22.4	22.7	22.0	0	20.6	20.5	20.6		
64QAM	25	0	2	22.2	22.6	22.0	0	20.5	20.4	20.5		
	1	0	2	22.3	22.1	21.5	0	20.5	20.5	20.5		
	1	12	2	22.2	22.2	21.1	0	20.4	20.6	20.6		
	1	24	2	22.2	22.1	21.2	0	20.3	20.4	20.5		
	12	0	3	21.1	21.0	20.1	0	20.3	20.3	20.3		
	12	7	3	21.1	21.0	20.0	0	20.3	20.3	20.4		
QPSK	12	13	3	20.9	20.9	20.0	0	20.2	20.2	20.4		
	25	0	3	20.8	20.9	20.0	0	20.2	20.2	20.3		

**LTE Band 12 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0		24.8	
			1	25	0		24.7	
			1	49	0		24.6	
			25	0	1		23.7	
			25	12	1		23.7	
			25	25	1		23.6	
		50	0	1		23.6		
		16QAM	1	0	1		24.0	
			1	25	1		24.0	
			1	49	1		23.9	
			25	0	2		22.7	
			25	12	2		22.7	
			25	25	2		22.6	
		50	0	2		22.7		
		64QAM	1	0	2		22.3	
			1	25	2		22.3	
			1	49	2		22.2	
			25	0	3		21.1	
			25	12	3		21.1	
			25	25	3		21.1	
		50	0	3		21.0		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	24.8	24.7	24.7
			1	12	0	24.8	24.6	24.6
			1	24	0	24.8	24.6	24.5
			12	0	1	23.7	23.7	23.6
			12	7	1	23.8	23.7	23.6
			12	13	1	23.7	23.6	23.7
			25	0	1	23.7	23.7	23.6
		16QAM	1	0	1	23.8	24.0	23.8
			1	12	1	23.8	24.0	23.7
			1	24	1	23.8	24.0	23.7
			12	0	2	22.7	22.8	22.7
			12	7	2	22.8	22.8	22.7
			12	13	2	22.8	22.8	22.8
		25	0	2	22.7	22.7	22.6	
		64QAM	1	0	2	22.3	22.5	22.3
			1	12	2	22.3	22.4	22.2
			1	24	2	22.3	22.3	22.3
			12	0	3	21.1	21.1	21.0
			12	7	3	21.1	21.1	21.0
			12	13	3	21.1	21.1	21.1
			25	0	3	21.1	21.1	21.0

**Note(s):**  
 10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices



**LTE Band 12 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	24.7	24.7	24.6
			1	8	0	24.7	24.8	24.7
			1	14	0	24.7	24.7	24.4
			8	0	1	23.7	23.6	23.7
			8	4	1	23.7	23.7	23.7
			8	7	1	23.7	23.6	23.7
			15	0	1	23.6	23.6	23.7
		16QAM	1	0	1	23.7	24.0	23.5
			1	8	1	23.8	24.0	23.6
			1	14	1	23.7	24.0	23.3
			8	0	2	22.7	22.7	22.8
			8	4	2	22.7	22.8	22.8
			8	7	2	22.7	22.7	22.8
			15	0	2	22.6	22.7	22.7
		64QAM	1	0	2	22.3	22.5	22.0
			1	8	2	22.3	22.3	22.2
			1	14	2	22.3	22.2	22.2
			8	0	3	21.0	21.1	21.1
			8	4	3	21.1	21.1	21.1
			8	7	3	21.1	21.1	21.1
			15	0	3	21.0	21.0	21.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	24.6	24.6	24.6
			1	3	0	24.6	24.6	24.6
			1	5	0	24.6	24.6	24.4
			3	0	0	24.6	24.6	24.6
			3	1	0	24.7	24.6	24.6
			3	3	0	24.7	24.6	24.5
			6	0	1	23.6	23.6	23.6
		16QAM	1	0	1	23.6	23.9	23.6
			1	3	1	23.7	24.0	23.7
			1	5	1	23.6	23.9	23.5
			3	0	1	23.8	23.8	23.7
			3	1	1	23.8	23.8	23.7
			3	3	1	23.8	23.8	23.7
			6	0	2	22.8	22.5	22.7
		64QAM	1	0	2	22.1	22.0	22.2
			1	3	2	22.0	22.2	22.2
			1	5	2	22.1	22.3	22.0
			3	0	2	22.1	22.1	22.1
			3	1	2	22.1	22.1	22.1
			3	3	2	22.1	22.1	22.1
			6	0	3	21.0	21.0	21.0

**LTE Band 13 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)
						782 MHz
LTE Band 13	10	QPSK	1	0	0	23.5
			1	25	0	23.5
			1	49	0	23.6
			25	0	1	22.6
			25	12	1	22.6
			25	25	1	22.6
			50	0	1	22.6
		16QAM	1	0	1	22.5
			1	25	1	22.5
			1	49	1	22.7
			25	0	2	21.7
			25	12	2	21.7
			25	25	2	21.7
			50	0	2	21.6
		64QAM	1	0	2	21.0
			1	25	2	20.8
			1	49	2	20.9
			25	0	3	19.7
			25	12	3	19.7
			25	25	3	19.7
			50	0	3	19.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)
						782 MHz
LTE Band 13	5	QPSK	1	0	0	23.6
			1	12	0	23.6
			1	24	0	23.7
			12	0	1	22.6
			12	7	1	22.6
			12	13	1	22.6
			25	0	1	22.6
		16QAM	1	0	1	22.7
			1	12	1	22.6
			1	24	1	22.7
			12	0	2	21.6
			12	7	2	21.6
			12	13	2	21.7
			25	0	2	21.5
		64QAM	1	0	2	21.0
			1	12	2	21.1
			1	24	2	21.1
			12	0	3	19.8
			12	7	3	19.8
			12	13	3	19.8
			25	0	3	19.7

**Note(s):**  
 10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 17 Measured Results**

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 25 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1860 MHz	1882.5 MHz	1905 MHz		1860 MHz	1882.5 MHz	1905 MHz
LTE Band 25	20	QPSK	1	0	0	23.7	23.8	23.7	0	20.2	20.1	20.0
			1	49	0	23.2	23.4	23.5	0	19.7	19.6	19.7
			1	99	0	23.4	23.6	23.4	0	19.9	19.8	19.9
			50	0	1	22.4	22.5	22.7	0	20.0	19.8	20.0
			50	24	1	22.3	22.5	22.6	0	19.8	19.7	19.8
			50	50	1	22.3	22.5	22.5	0	19.8	19.7	19.9
			100	0	1	22.4	22.5	22.6	0	19.9	19.8	19.9
		16QAM	1	0	1	23.0	23.0	23.0	0	20.1	20.1	19.9
			1	49	1	22.7	22.9	22.9	0	19.8	19.7	19.6
			1	99	1	22.8	23.0	22.8	0	19.8	19.8	19.8
			50	0	2	21.4	21.6	21.7	0	19.5	19.4	19.4
			50	24	2	21.3	21.5	21.6	0	19.4	19.3	19.3
			50	50	2	21.3	21.5	21.5	0	19.3	19.2	19.4
			100	0	2	21.4	21.5	21.6	0	19.4	19.3	19.4
		64QAM	1	0	2	21.7	21.7	21.7	0	19.3	19.1	19.2
			1	49	2	21.3	21.3	21.4	0	19.0	18.8	18.9
			1	99	2	21.4	21.3	21.4	0	19.1	18.9	19.1
			50	0	3	20.6	20.8	20.9	0	19.0	18.8	18.9
			50	24	3	20.6	20.8	20.8	0	18.9	18.7	18.8
			50	50	3	20.6	20.8	20.7	0	18.8	18.6	18.9
			100	0	3	20.7	20.7	20.7	0	18.9	18.7	18.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1857.5 MHz	1882.5 MHz	1907.5 MHz		1857.5 MHz	1882.5 MHz	1907.5 MHz
LTE Band 25	15	QPSK	1	0	0	23.6	23.6	23.8	0	20.0	19.8	20.0
			1	37	0	23.3	23.4	23.5	0	19.8	19.6	19.8
			1	74	0	23.3	23.4	23.5	0	19.8	19.6	19.9
			36	0	1	22.4	22.5	22.6	0	19.9	19.8	19.9
			36	20	1	22.3	22.5	22.6	0	19.9	19.7	19.9
			36	39	1	22.3	22.4	22.5	0	19.8	19.7	19.9
			75	0	1	22.3	22.5	22.6	0	19.9	19.7	20.0
		16QAM	1	0	1	23.0	22.5	23.0	0	19.9	19.2	20.0
			1	37	1	22.6	22.3	22.9	0	19.7	19.0	19.7
			1	74	1	22.7	22.4	22.8	0	19.6	19.0	19.9
			36	0	2	21.5	21.6	21.6	0	19.5	19.3	19.4
			36	20	2	21.4	21.5	21.6	0	19.5	19.2	19.4
			36	39	2	21.3	21.4	21.5	0	19.4	19.2	19.4
			75	0	2	21.4	21.5	21.6	0	19.4	19.2	19.5
		64QAM	1	0	2	21.7	21.6	21.6	0	19.3	18.9	19.1
			1	37	2	21.4	21.5	21.4	0	19.1	18.8	18.9
			1	74	2	21.6	21.5	21.4	0	19.1	18.8	19.1
			36	0	3	20.7	20.7	20.8	0	18.9	18.7	18.9
			36	20	3	20.7	20.7	20.8	0	18.9	18.6	18.8
			36	39	3	20.7	20.7	20.8	0	18.8	18.6	18.9
			75	0	3	20.7	20.7	20.7	0	18.9	18.7	18.9

**LTE Band 25 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1855 MHz	1882.5 MHz	1910 MHz		1855 MHz	1882.5 MHz	1910 MHz
LTE Band 25	10	QPSK	1	0	0	23.7	23.7	23.6	0	20.1	19.9	20.0
			1	25	0	23.3	23.4	23.5	0	19.8	19.6	19.9
			1	49	0	23.4	23.6	23.4	0	20.0	19.8	19.9
			25	0	1	22.4	22.5	22.6	0	19.9	19.7	19.9
			25	12	1	22.3	22.4	22.5	0	19.9	19.7	20.0
			25	25	1	22.3	22.4	22.5	0	19.8	19.7	19.9
			50	0	1	22.3	22.5	22.5	0	19.9	19.7	19.9
		16QAM	1	0	1	23.0	22.7	22.7	0	20.0	19.4	19.5
			1	25	1	22.6	22.3	22.5	0	19.6	19.0	19.4
			1	49	1	22.8	22.6	22.4	0	19.8	19.2	19.5
			25	0	2	21.4	21.5	21.7	0	19.4	19.3	19.5
			25	12	2	21.4	21.5	21.7	0	19.4	19.3	19.6
			25	25	2	21.3	21.5	21.6	0	19.4	19.2	19.5
			50	0	2	21.4	21.5	21.6	0	19.4	19.2	19.5
		64QAM	1	0	2	22.0	22.0	22.0	0	19.4	18.9	19.0
			1	25	2	22.0	22.0	21.9	0	19.1	18.6	19.0
			1	49	2	22.0	22.0	21.8	0	19.3	18.8	19.1
			25	0	3	20.6	20.8	20.7	0	18.9	18.7	18.8
			25	12	3	20.6	20.8	20.7	0	18.9	18.6	18.9
			25	25	3	20.6	20.7	20.7	0	18.8	18.6	18.8
			50	0	3	20.6	20.6	20.7	0	18.8	18.6	18.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1852.5 MHz	1882.5 MHz	1912.5 MHz		1852.5 MHz	1882.5 MHz	1912.5 MHz
LTE Band 25	5	QPSK	1	0	0	23.6	23.6	23.6	0	20.1	19.8	20.0
			1	12	0	23.5	23.5	23.5	0	20.0	19.7	19.9
			1	24	0	23.5	23.5	23.5	0	20.0	19.7	20.0
			12	0	1	22.6	22.4	22.5	0	20.1	19.7	19.9
			12	7	1	22.5	22.4	22.5	0	20.0	19.7	19.9
			12	13	1	22.5	22.4	22.5	0	20.0	19.6	20.0
			25	0	1	22.5	22.5	22.5	0	20.1	19.7	19.9
		16QAM	1	0	1	23.0	22.7	22.7	0	20.1	19.4	19.6
			1	12	1	23.0	22.6	22.6	0	20.0	19.3	19.5
			1	24	1	23.0	22.6	22.6	0	20.0	19.4	19.6
			12	0	2	21.8	21.6	21.6	0	19.7	19.3	19.5
			12	7	2	21.7	21.6	21.6	0	19.7	19.3	19.5
			12	13	2	21.7	21.5	21.5	0	19.7	19.2	19.6
			25	0	2	21.6	21.5	21.5	0	19.6	19.2	19.4
		64QAM	1	0	2	22.0	22.0	22.0	0	19.2	18.9	19.1
			1	12	2	22.0	22.0	22.0	0	19.2	18.8	19.1
			1	24	2	22.0	21.9	22.0	0	19.2	18.8	19.1
			12	0	3	20.9	20.7	20.7	0	19.1	18.7	19.0
			12	7	3	20.8	20.7	20.7	0	19.1	18.7	18.9
			12	13	3	20.7	20.7	20.7	0	19.0	18.6	18.9
			25	0	3	20.8	20.7	20.6	0	19.0	18.6	18.8

**LTE Band 25 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1851.5 MHz	1882.5 MHz	1913.5 MHz		1851.5 MHz	1882.5 MHz	1913.5 MHz
LTE Band 25	3	QPSK	1	0	0	23.6	23.4	23.5	0	20.0	19.6	19.8
			1	8	0	23.6	23.5	23.6	0	20.1	19.7	20.0
			1	14	0	23.4	23.4	23.4	0	20.0	19.6	19.9
			8	0	1	22.5	22.4	22.5	0	20.0	19.7	20.0
			8	4	1	22.5	22.4	22.5	0	20.1	19.7	20.0
			8	7	1	22.5	22.5	22.5	0	20.0	19.7	20.0
			15	0	1	22.5	22.5	22.5	0	20.0	19.7	20.0
		16QAM	1	0	1	22.9	22.3	22.6	0	19.9	19.1	19.4
			1	8	1	23.0	22.4	22.6	0	20.0	19.2	19.6
			1	14	1	22.8	22.3	22.5	0	19.9	19.0	19.5
			8	0	2	21.6	21.6	21.6	0	19.6	19.3	19.6
			8	4	2	21.6	21.6	21.6	0	19.6	19.3	19.6
			8	7	2	21.6	21.5	21.6	0	19.6	19.3	19.6
			15	0	2	21.6	21.5	21.5	0	19.6	19.2	19.5
		64QAM	1	0	2	22.0	21.8	21.8	0	19.3	18.8	18.9
			1	8	2	22.0	21.8	21.8	0	19.3	18.7	19.0
			1	14	2	22.0	21.8	21.7	0	19.2	18.7	18.9
			8	0	3	20.8	20.7	20.7	0	19.0	18.6	18.9
			8	4	3	20.9	20.7	20.7	0	19.1	18.7	19.0
			8	7	3	20.8	20.7	20.7	0	19.0	18.6	18.9
			15	0	3	20.8	20.7	20.6	0	19.0	18.6	18.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1850.7 MHz	1882.5 MHz	1914.3 MHz		1850.7 MHz	1882.5 MHz	1914.3 MHz
LTE Band 25	1.4	QPSK	1	0	0	23.4	23.5	23.4	0	19.9	19.8	19.9
			1	3	0	23.5	23.5	23.4	0	20.0	19.9	20.0
			1	5	0	23.4	23.5	23.4	0	19.9	19.8	19.9
			3	0	0	23.5	23.5	23.4	0	20.0	19.9	19.9
			3	1	0	23.5	23.5	23.5	0	20.0	19.9	20.0
			3	3	0	23.5	23.5	23.5	0	20.0	19.9	20.0
			6	0	1	22.4	22.5	22.4	0	20.0	19.8	19.9
		16QAM	1	0	1	22.8	22.6	22.4	0	19.5	19.7	19.5
			1	3	1	22.9	22.7	22.5	0	19.5	19.7	19.6
			1	5	1	22.8	22.6	22.4	0	19.5	19.6	19.5
			3	0	1	22.7	22.6	22.6	0	19.7	19.5	19.5
			3	1	1	22.7	22.6	22.6	0	19.7	19.6	19.5
			3	3	1	22.7	22.6	22.6	0	19.7	19.6	19.5
			6	0	2	21.4	21.7	21.6	0	19.7	19.3	19.5
		64QAM	1	0	2	22.0	22.0	21.8	0	19.2	18.8	19.1
			1	3	2	22.0	22.0	21.8	0	19.3	18.9	19.1
			1	5	2	22.0	22.0	21.7	0	19.2	18.8	19.0
			3	0	2	21.9	22.0	21.6	0	19.0	18.8	18.9
			3	1	2	21.9	22.0	21.6	0	19.1	18.8	19.0
			3	3	2	21.9	22.0	21.6	0	19.0	18.8	18.9
			6	0	3	20.8	20.9	20.6	0	19.0	18.8	18.8

**LTE Band 38 Measured Results**

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 41 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)					MPR	Reduced Meas. Avg Pwr (dBm)						
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
																2506 MHz	2549.5 MHz	2593 MHz
LTE Band 41	20	QPSK	1	0	0	24.7	24.6	24.8	24.8	24.6	0	23.3	23.3	23.3	23.4	23.4		
			1	49	0	24.4	24.4	24.6	24.4	24.5	0	23.1	23.2	23.0	23.1	23.1		
			1	99	0	24.4	24.5	24.5	24.6	24.5	0	23.0	23.1	22.9	23.0	23.0		
			50	0	1	23.7	23.5	23.6	23.5	23.5	0	23.0	23.0	23.0	23.0	22.9		
			50	24	1	23.5	23.5	23.6	23.5	23.6	0	23.0	23.0	23.0	23.0	23.0		
			50	50	1	23.4	23.4	23.5	23.4	23.6	0	23.0	22.8	23.0	23.0	23.0		
		100	0	1	23.5	23.2	23.6	23.3	23.2	0	23.0	22.6	23.0	22.9	22.6			
		16QAM	1	0	1	23.6	23.6	23.8	23.7	23.6	0	22.7	22.8	22.8	22.8	22.9		
			1	49	1	23.3	23.2	23.7	23.4	23.5	0	22.5	22.7	22.5	22.5	22.7		
			1	99	1	23.2	23.4	23.5	23.4	23.5	0	22.4	22.6	22.4	22.3	22.7		
			50	0	2	22.7	22.6	22.6	22.7	22.6	0	21.7	21.8	21.6	21.8	21.8		
			50	24	2	22.5	22.5	22.6	22.6	22.6	0	21.6	21.7	21.5	21.7	21.7		
			50	50	2	22.4	22.4	22.6	22.4	22.6	0	21.6	21.5	21.4	21.6	21.7		
		100	0	2	22.5	22.4	22.6	22.3	22.4	0	21.6	21.5	21.6	21.7	21.6			
		64QAM	1	0	2	21.8	21.1	21.0	21.7	21.8	0	21.5	21.7	21.7	21.2	21.0		
			1	49	2	21.6	21.0	21.0	21.6	21.5	0	21.5	21.8	21.8	21.0	21.0		
			1	99	2	21.4	21.1	21.1	21.6	21.4	0	21.3	21.7	21.6	20.8	21.0		
			50	0	3	21.1	20.7	20.8	21.2	21.0	0	20.5	20.7	20.4	20.0	20.0		
			50	24	3	21.0	20.7	20.9	21.2	20.9	0	20.4	20.5	20.4	20.1	19.9		
			50	50	3	20.9	20.6	20.9	21.0	20.9	0	20.4	20.5	20.3	20.0	19.9		
		100	0	3	20.9	20.6	20.9	21.0	21.0	0	20.4	20.5	20.3	19.8	19.8			
		LTE Band 41	15	QPSK	1	0	0	24.7	24.5	24.6	24.6	24.7	0	23.3	23.2	23.1	23.3	23.3
					1	37	0	24.3	24.4	24.5	24.4	24.5	0	23.1	23.0	23.0	23.1	23.0
					1	74	0	24.3	24.4	24.4	24.3	24.5	0	23.0	22.9	22.9	23.1	23.1
36	0				1	23.6	23.4	23.5	23.5	23.4	0	23.0	22.9	23.0	23.0	22.9		
36	20				1	23.4	23.4	23.5	23.4	23.4	0	23.0	22.8	23.0	23.0	23.0		
36	39				1	23.4	23.4	23.5	23.3	23.5	0	23.0	22.9	23.0	23.0	23.0		
75	0			1	23.4	23.2	23.5	23.1	23.2	0	23.0	22.6	23.0	22.7	22.7			
16QAM	1			0	1	23.6	23.5	23.7	23.6	23.6	0	22.7	22.7	22.6	22.8	22.8		
	1			37	1	23.3	23.2	23.6	23.4	23.4	0	22.6	22.5	22.4	22.6	22.6		
	1			74	1	23.3	23.4	23.4	23.3	23.5	0	22.5	22.4	22.3	22.6	22.6		
	36			0	2	22.5	22.5	22.5	22.6	22.5	0	21.6	21.6	21.6	21.7	21.7		
	36			20	2	22.4	22.4	22.6	22.5	22.5	0	21.6	21.6	21.6	21.6	21.7		
	36			39	2	22.4	22.3	22.5	22.4	22.5	0	21.6	21.5	21.5	21.6	21.7		
75	0			2	22.4	22.3	22.5	22.3	22.3	0	21.6	21.5	21.5	21.7	21.6			
64QAM	1			0	2	22.6	21.8	21.8	22.0	21.8	0	21.8	21.7	21.5	21.4	21.4		
	1			37	2	22.5	21.7	21.7	21.7	21.7	0	21.7	21.6	21.4	21.3	21.3		
	1			74	2	22.3	21.8	21.7	21.6	21.6	0	21.6	21.6	21.5	21.2	21.3		
	36			0	3	21.0	20.7	21.0	21.2	21.1	0	20.5	20.6	20.4	20.3	20.3		
	36			20	3	21.0	20.7	21.0	21.1	21.0	0	20.5	20.5	20.4	20.2	20.3		
	36			39	3	20.9	20.7	21.0	21.1	21.0	0	20.5	20.4	20.3	20.2	20.3		
75	0			3	20.9	20.6	21.0	21.0	20.9	0	20.3	20.5	20.3	20.2	20.2			

**LTE Band 41 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)					MPR	Reduced Meas. Avg Pwr (dBm)					
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz	
LTE Band 41	10	QPSK	1	0	0	24.5	24.4	24.5	24.5	24.5	0	23.1	23.1	23.1	23.1	23.2	
			1	25	0	24.3	24.3	24.5	24.4	24.5	0	23.0	23.1	23.0	23.0	23.1	
			1	49	0	24.3	24.3	24.4	24.4	24.5	0	23.0	23.0	22.9	23.0	23.2	
			25	0	1	23.4	23.4	23.6	23.5	23.5	0	23.0	22.8	23.0	23.0	23.0	
			25	12	1	23.4	23.4	23.6	23.5	23.5	0	23.0	22.8	23.0	23.0	23.0	
			25	25	1	23.4	23.4	23.5	23.3	23.5	0	23.0	22.8	23.0	23.0	23.0	
		50	0	1	23.4	23.3	23.5	23.3	23.5	0	23.0	22.7	23.0	23.0	23.0		
		16QAM	1	0	1	23.5	23.5	23.6	23.6	23.4	0	22.6	22.6	22.7	22.7	22.7	
			1	25	1	23.3	23.4	23.6	23.4	23.4	0	22.5	22.5	22.6	22.6	22.6	
			1	49	1	23.3	23.3	23.6	23.4	23.4	0	22.5	22.4	22.5	22.5	22.6	
			25	0	2	22.4	22.5	22.6	22.6	22.6	0	21.6	21.6	21.6	21.7	21.7	
			25	12	2	22.4	22.5	22.5	22.5	22.5	0	21.6	21.5	21.6	21.7	21.6	
			25	25	2	22.4	22.4	22.5	22.5	22.5	0	21.6	21.5	21.5	21.6	21.6	
		64QAM	50	0	2	22.4	22.4	22.5	22.4	22.5	0	21.6	21.6	21.6	21.6	21.7	
			1	0	2	22.5	21.7	21.7	22.6	21.8	0	21.6	21.2	21.4	21.4	21.0	
			1	25	2	22.5	21.6	21.7	22.6	21.7	0	21.4	21.2	21.3	21.3	21.0	
			1	49	2	22.3	21.5	21.7	22.4	21.6	0	21.5	21.1	21.2	21.3	21.0	
			25	0	3	21.0	20.7	20.9	21.1	20.9	0	20.5	20.4	20.4	20.2	20.2	
			25	12	3	21.0	20.7	20.9	21.1	20.9	0	20.5	20.4	20.3	20.2	20.2	
		LTE Band 41	5	QPSK	25	25	3	20.9	20.7	20.9	21.0	20.9	0	20.4	20.4	20.3	20.2
50	0				3	20.9	20.7	20.9	21.0	20.8	0	20.5	20.4	20.3	20.2	20.2	
16QAM	1				0	0	24.5	24.3	24.6	24.5	24.4	0	23.0	23.1	23.1	23.1	23.1
	1				12	0	24.4	24.4	24.5	24.5	24.5	0	23.0	23.1	23.1	23.0	23.0
	1				24	0	24.4	24.3	24.5	24.4	24.4	0	23.0	23.0	23.0	23.0	23.0
	12				0	1	23.5	23.4	23.6	23.5	23.5	0	23.0	23.0	23.0	22.9	23.0
	12			7	1	23.5	23.4	23.6	23.5	23.5	0	23.0	23.0	23.0	23.0	23.0	
	12			13	1	23.4	23.4	23.5	23.5	23.5	0	23.0	23.0	23.0	22.8	23.0	
	25			0	1	23.5	23.4	23.5	23.4	23.4	0	22.9	23.0	23.0	22.8	23.0	
	64QAM			1	0	1	23.4	23.3	23.7	23.5	23.5	0	22.7	22.6	22.5	22.7	22.6
				1	12	1	23.4	23.3	23.6	23.5	23.4	0	22.7	22.6	22.5	22.6	22.5
				1	24	1	23.3	23.3	23.6	23.4	23.4	0	22.6	22.5	22.4	22.6	22.5
				12	0	2	22.4	22.5	22.6	22.5	22.5	0	21.7	21.7	21.5	21.7	21.7
				12	7	2	22.4	22.5	22.6	22.5	22.5	0	21.7	21.7	21.6	21.7	21.7
				12	13	2	22.4	22.5	22.6	22.5	22.5	0	21.6	21.7	21.5	21.6	21.6
				25	0	2	22.4	22.4	22.5	22.5	22.5	0	21.6	21.6	21.6	21.6	21.6
25				0	2	22.4	21.9	22.0	22.5	22.0	0	21.5	21.5	21.4	21.2	21.3	
64QAM	1			12	2	22.4	21.8	22.0	22.4	22.0	0	21.2	21.5	21.4	21.2	21.4	
	1			24	2	22.4	21.7	22.0	22.4	21.9	0	21.4	21.5	21.3	21.2	21.3	
	12			0	3	20.9	20.7	21.0	21.0	21.0	0	20.4	20.4	20.4	20.2	20.2	
	12	7	3	20.9	20.8	21.0	21.0	21.0	0	20.5	20.4	20.3	20.2	20.2			
	12	13	3	20.9	20.8	21.0	21.1	21.0	0	20.4	20.4	20.3	20.2	20.2			
	25	0	3	20.9	20.8	21.0	21.1	20.9	0	20.5	20.4	20.3	20.2	20.2			

**LTE Band 66 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1720 MHz	1745 MHz	1770 MHz		1720 MHz	1745 MHz	1770 MHz
LTE Band 66	20	QPSK	1	0	0	24.3	24.5	24.5	0	21.0	21.0	20.9
			1	49	0	24.3	24.4	24.0	0	21.0	20.8	20.7
			1	99	0	24.3	24.4	24.3	0	21.0	20.6	20.8
			50	0	1	23.5	23.5	23.5	0	21.0	21.0	20.9
			50	24	1	23.5	23.5	23.5	0	21.0	20.9	20.8
			50	50	1	23.5	23.5	23.4	0	21.0	20.7	20.9
			100	0	1	23.5	23.5	23.5	0	21.0	21.0	20.8
		16QAM	1	0	1	23.5	23.5	23.5	0	21.0	21.0	20.8
			1	49	1	23.5	23.5	23.5	0	21.0	20.6	20.5
			1	99	1	23.5	23.5	23.5	0	21.0	20.6	20.6
			50	0	2	22.5	22.5	22.5	0	20.6	20.5	20.4
			50	24	2	22.5	22.5	22.5	0	20.6	20.4	20.3
			50	50	2	22.5	22.5	22.4	0	20.6	20.2	20.4
			100	0	2	22.5	22.5	22.5	0	20.7	20.4	20.3
		64QAM	1	0	2	21.7	21.6	21.6	0	20.1	20.2	20.0
			1	49	2	21.5	21.4	21.4	0	20.0	19.9	19.8
			1	99	2	21.4	21.5	21.4	0	20.1	19.8	19.9
			50	0	3	20.4	20.3	20.4	0	19.9	19.9	19.8
			50	24	3	20.4	20.3	20.3	0	19.9	19.8	19.7
			50	50	3	20.3	20.3	20.3	0	19.9	19.6	19.7
			100	0	3	20.3	20.3	20.3	0	19.9	19.8	19.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1717.5 MHz	1745 MHz	1772.5 MHz		1717.5 MHz	1745 MHz	1772.5 MHz
LTE Band 66	15	QPSK	1	0	0	24.4	24.5	24.5	0	21.0	21.0	20.9
			1	37	0	24.5	24.4	24.3	0	20.9	20.8	20.7
			1	74	0	24.4	24.4	24.3	0	21.0	20.7	20.8
			36	0	1	23.5	23.5	23.5	0	21.0	21.0	20.9
			36	20	1	23.5	23.5	23.5	0	21.0	20.9	20.8
			36	39	1	23.5	23.5	23.4	0	21.0	20.7	20.9
			75	0	1	23.5	23.4	23.5	0	21.0	20.9	20.8
		16QAM	1	0	1	23.5	23.5	23.4	0	21.0	20.9	20.4
			1	37	1	23.5	23.5	23.2	0	20.7	20.6	20.1
			1	74	1	23.5	23.5	23.3	0	20.9	20.6	20.2
			36	0	2	22.5	22.5	22.5	0	20.5	20.4	20.4
			36	20	2	22.5	22.4	22.5	0	20.5	20.4	20.3
			36	39	2	22.5	22.5	22.5	0	20.5	20.2	20.4
			75	0	2	22.5	22.4	22.5	0	20.5	20.4	20.3
		64QAM	1	0	2	21.8	21.6	21.5	0	20.2	20.1	20.0
			1	37	2	21.6	21.4	21.4	0	20.0	19.9	19.8
			1	74	2	21.6	21.5	21.4	0	20.2	19.8	19.9
			36	0	3	20.4	20.3	20.3	0	19.9	19.8	19.7
			36	20	3	20.3	20.3	20.3	0	19.9	19.8	19.7
			36	39	3	20.3	20.3	20.2	0	19.9	19.6	19.7
			75	0	3	20.3	20.3	20.2	0	19.8	19.8	19.7



**LTE Band 66 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1715 MHz	1745 MHz	1775 MHz		1715 MHz	1745 MHz	1775 MHz
LTE Band 66	10	QPSK	1	0	0	24.3	24.4	24.4	0	21.0	20.9	20.8
			1	25	0	24.4	24.3	24.2	0	21.0	20.8	20.8
			1	49	0	24.4	24.4	24.3	0	21.0	20.6	20.8
			25	0	1	23.5	23.5	23.3	0	21.0	20.9	20.8
			25	12	1	23.5	23.4	23.4	0	21.0	20.9	20.9
			25	25	1	23.5	23.5	23.4	0	21.0	20.7	20.8
			50	0	1	23.5	23.5	23.4	0	21.0	20.9	20.9
		16QAM	1	0	1	23.4	23.5	23.3	0	20.5	20.4	20.2
			1	25	1	23.5	23.4	23.1	0	20.3	20.3	20.2
			1	49	1	23.5	23.4	23.2	0	20.4	20.2	20.2
			25	0	2	22.5	22.5	22.4	0	20.6	20.5	20.4
			25	12	2	22.5	22.5	22.5	0	20.6	20.5	20.4
			25	25	2	22.5	22.5	22.5	0	20.5	20.4	20.4
			50	0	2	22.5	22.5	22.4	0	20.5	20.4	20.4
		64QAM	1	0	2	21.7	21.4	21.5	0	20.1	19.9	19.9
			1	25	2	21.6	21.3	21.4	0	20.1	19.8	19.9
			1	49	2	21.6	21.4	21.4	0	20.2	19.6	19.8
			25	0	3	20.3	20.3	20.2	0	19.8	19.8	19.7
			25	12	3	20.3	20.3	20.2	0	19.8	19.7	19.7
			25	25	3	20.3	20.3	20.2	0	19.7	19.6	19.7
			50	0	3	20.3	20.2	20.2	0	19.8	19.7	19.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)		
						1712.5 MHz	1745 MHz	1777.5 MHz		1712.5 MHz	1745 MHz	1777.5 MHz
LTE Band 66	5	QPSK	1	0	0	24.4	24.5	24.3	0	21.0	20.9	20.9
			1	12	0	24.4	24.4	24.4	0	21.0	20.8	20.9
			1	24	0	24.5	24.5	24.4	0	21.0	20.7	20.9
			12	0	1	23.4	23.5	23.4	0	21.0	20.9	20.8
			12	7	1	23.5	23.4	23.5	0	21.0	20.9	20.8
			12	13	1	23.5	23.4	23.4	0	21.0	20.8	20.8
			25	0	1	23.4	23.5	23.4	0	21.0	20.8	20.8
		16QAM	1	0	1	23.5	22.5	23.5	0	20.6	20.5	20.5
			1	12	1	23.5	23.5	23.5	0	20.6	20.4	20.5
			1	24	1	23.5	22.5	23.5	0	20.6	20.3	20.5
			12	0	2	22.5	22.5	22.5	0	20.6	20.5	20.4
			12	7	2	22.5	22.5	22.5	0	20.6	20.4	20.4
			12	13	2	22.5	22.5	22.5	0	20.5	20.4	20.4
			25	0	2	22.5	22.4	22.5	0	20.4	20.3	20.4
		64QAM	1	0	2	21.5	21.5	21.5	0	20.0	20.0	20.0
			1	12	2	21.5	21.5	21.4	0	20.0	20.0	19.9
			1	24	2	21.5	21.6	21.4	0	20.0	19.9	19.9
			12	0	3	20.3	20.3	20.2	0	19.8	19.8	19.7
			12	7	3	20.3	20.3	20.2	0	19.8	19.8	19.7
			12	13	3	20.3	20.2	20.2	0	19.8	19.7	19.7
			25	0	3	20.3	20.2	20.2	0	19.7	19.7	19.7

**LTE Band 66 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)			MPR	Reduced Meas. Avg Pwr (dBm)				
						1711.5 MHz	1745 MHz	1778.5 MHz		1711.5 MHz	1745 MHz	1778.5 MHz		
LTE Band 66	3	QPSK	1	0	0	24.4	24.4	23.5	0	20.9	20.8	20.9		
			1	8	0	24.5	24.5	24.5	0	21.0	20.9	20.9		
			1	14	0	24.4	24.4	24.4	0	20.9	20.8	20.8		
			8	0	1	23.5	23.5	23.5	0	21.0	20.8	20.8		
			8	4	1	23.5	23.5	23.5	0	21.0	20.9	20.9		
			8	7	1	23.5	23.5	23.5	0	21.0	20.8	20.9		
		16QAM	15	0	1	23.5	23.5	23.5	0	21.0	20.8	20.9		
			1	0	1	23.5	23.5	23.3	0	20.5	20.4	20.3		
			1	8	1	23.5	23.5	23.4	0	20.6	20.4	20.3		
			1	14	1	23.5	23.4	23.3	0	20.5	20.3	20.2		
			8	0	2	22.5	22.5	22.5	0	20.5	20.4	20.5		
			8	4	2	22.5	22.5	22.5	0	20.5	20.4	20.5		
		64QAM	8	7	2	22.5	22.5	22.5	0	20.5	20.4	20.5		
			15	0	2	22.5	22.4	22.5	0	20.4	20.3	20.4		
			1	0	2	21.6	21.4	21.5	0	20.0	19.8	19.7		
			1	8	2	21.6	21.4	21.5	0	20.0	19.7	19.8		
			1	14	2	21.5	21.5	21.4	0	20.0	19.7	19.8		
			8	0	3	20.4	20.2	20.2	0	19.8	19.7	19.7		
		LTE Band 66	1.4	QPSK	8	4	3	20.3	20.2	20.2	0	19.8	19.7	19.7
					8	7	3	20.3	20.2	20.2	0	19.8	19.7	19.7
					15	0	3	20.3	20.2	20.2	0	19.8	19.7	19.7
1	0				0	24.2	24.2	24.3	0	20.8	20.7	20.8		
1	3				0	24.2	24.3	24.3	0	20.8	20.8	20.8		
1	5				0	24.2	24.2	24.3	0	20.8	20.7	20.8		
16QAM	3			0	0	24.1	24.2	24.3	0	20.8	20.7	20.8		
	3			1	0	24.1	24.3	24.3	0	20.8	20.8	20.8		
	3			3	0	24.2	24.3	24.3	0	20.8	20.8	20.8		
	6			0	1	23.3	23.3	23.3	0	20.8	20.8	20.8		
	1			0	1	23.3	23.3	23.3	0	20.3	20.2	20.3		
	1			3	1	23.4	23.3	23.4	0	20.4	20.3	20.4		
64QAM	1			5	1	23.3	23.3	23.3	0	20.3	20.3	20.3		
	3			0	1	23.4	23.4	23.4	0	20.4	20.4	20.4		
	3			1	1	23.4	23.5	23.4	0	20.4	20.5	20.4		
	3			3	1	23.5	23.5	23.4	0	20.4	20.5	20.4		
	6			0	2	22.5	22.5	22.4	0	20.4	20.5	20.5		
	1			0	2	21.5	21.2	21.3	0	20.0	19.7	19.8		
16QAM	1			3	2	21.6	21.3	21.4	0	20.0	19.7	19.9		
	1			5	2	21.4	21.2	21.3	0	20.0	19.7	19.8		
	3			0	2	21.3	21.2	21.2	0	19.8	19.7	19.7		
	3	1	2	21.4	21.2	21.2	0	19.9	19.7	19.7				
	3	3	2	21.3	21.2	21.2	0	19.8	19.7	19.6				
	6	0	3	20.3	20.2	20.1	0	19.8	19.7	19.6				

### 9.4. LTE Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this particular project is only supported in the downlinks.

This device supports CA combinations of one (1) Uplink and up to four (4) Downlinks.

Type	LTECA combinations			PCC (UL)				SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 11 Tx. Power [dBm]	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra-Band Contiguous	12B			QPSK	5	23035	701.5	1,0	10	5107	738.7	24.88	24.92	0.2%
	7C			QPSK	20	21001	2525.1	1,0	20	3199	2664.9	24.34	24.30	-0.2%
	66B			QPSK	15	132597	1772.5	75,0	5	67154	2181.8	23.42	23.41	0.0%
	66C			QPSK	20	132072	1720.0	100,0	20	66734	2139.8	23.50	23.50	0.0%
Intra-Band Non-Contiguous	2A	+	2A	QPSK	20	18700	1860.0	1,0	20	1100	1980.0	23.90	23.90	0.0%
	4A	+	4A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	24.50	24.50	0.0%
	7A	+	7A	QPSK	20	20850	2510.0	1,0	20	3350	2680.0	24.34	24.27	-0.3%
	66A	+	66A	QPSK	20	132572	1770.0	1,0	20	66536	2120.0	24.50	24.50	0.0%
Inter-Band Non-Contiguous	2A	+	4A	QPSK	20	18900	1880.0	1,0	20	2175	2132.5	23.90	23.90	0.0%
	2A	+	5A	QPSK	20	18900	1880.0	1,0	10	2525	881.5	24.00	24.00	0.0%
	2A	+	7A	QPSK	20	18900	1880.0	1,0	20	3100	2655.0	24.00	24.00	0.0%
	2A	+	12A	QPSK	20	18900	1880.0	1,0	10	5095	737.5	24.00	24.00	0.0%
	2A	+	17A	QPSK	10	18900	1880.0	1,0	10	5790	740.0	23.90	23.80	-0.4%
	2A	+	29A	QPSK	20	18900	1880.0	1,0	10	9715	722.5	24.00	23.90	-0.4%
	4A	+	5A	QPSK	20	20175	1732.5	1,0	10	2525	881.5	24.50	24.50	0.0%
	4A	+	7A	QPSK	20	20175	1732.5	1,0	20	3100	2655.0	24.50	24.50	0.0%
	4A	+	12A	QPSK	20	20175	1732.5	1,0	10	5095	737.5	24.50	24.50	0.0%
	4A	+	17A	QPSK	10	20000	1715.0	1,0	10	5790	740.0	24.50	24.30	-0.8%
4A	+	29A	QPSK	20	20175	1732.5	1,0	10	9715	722.5	24.50	24.50	0.0%	
5A	+	7A	QPSK	10	20525	836.5	1,0	20	3100	2655.0	24.80	24.80	0.0%	

Type	LTECA combinations				PCC (UL)				SCC1 (DL)			SCC2 (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 11 Tx. Power [dBm]	Delta		
	PCC	+	SCC1	+	SCC2	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)				Channel	Freq. (MHz)
Inter-Band Non-Contiguous	2A	+	4A	+	5A	QPSK	20	18900	1880.0	100,0	20	2300	2145.0	10	2525	881.5	22.56	22.56	0.0%
	2A	+	4A	+	7A	QPSK	20	18900	1880.0	100,0	20	2300	2145.0	20	3350	2680.0	22.56	22.70	0.6%
	2A	+	4A	+	12A	QPSK	20	18900	1880.0	100,0	20	2300	2145.0	10	5095	737.5	22.56	22.56	0.0%
	2A	+	4A	+	29A	QPSK	20	18900	1880.0	100,0	20	2300	2145.0	10	9715	722.5	22.56	22.55	0.0%
	2A	+	7A	+	7A	QPSK	20	18900	1880.0	100,0	20	2850	2630.0	20	3350	2680.0	22.56	22.68	0.5%
	2A	+	12B			QPSK	20	18900	1880.0	100,0	5	5035	731.5	10	5107	738.7	22.56	22.55	0.0%
	4A	+	4A	+	13A	QPSK	20	20050	1720.0	100,0	20	2300	2145.0	10	5230	751.0	23.46	23.46	0.0%
	4A	+	4A	+	29A	QPSK	20	20050	1720.0	100,0	20	2300	2145.0	10	9715	722.5	23.46	23.47	0.0%
	4A	+	7A	+	7A	QPSK	20	20050	1720.0	100,0	20	2850	2630.0	20	3350	2680.0	23.46	23.45	0.0%
4A	+	12B			QPSK	20	20175	1732.5	100,0	5	5035	731.5	10	5107	738.7	23.44	23.41	-0.1%	

Type	LTECA combinations					PCC (UL)				SCC1 (DL)			SCC2 (DL)			SCC3 (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 11 Tx. Power [dBm]	Delta			
	PCC	+	SCC1	+	SCC2	+	SCC3	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	BW (MHz)	Channel	Freq. (MHz)						
Inter Non-Contiguous	2A	+	4A	+	7A	+	7A	QPSK	20	18900	1880.0	1,0	20	2175	2132.5	20	3100	2655.0	20	3350	2680.0	24.00	24.00	0.0%

**Note:**

Per KDB 941225 D05A LTE Rel. 10 KDB Inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a 1/4 dBm

## 9.5. Wi-Fi 2.4GHz (DTS Band)

### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
2.4	802.11b	1 Mbps	1	2412	13.8	12.4	15.0	13.8	Yes
			6	2437	14.0	12.8			
			11	2462	13.8	12.4			
	802.11g	6 Mbps	2	2417	Not Required	Not Required	15.0	13.8	No
			6	2437					
			11	2462					
	802.11n (HT20)	6.5 Mbps	2	2417	Not Required	Not Required	15.0	13.8	No
			6	2437					
			11	2462					

### Note(s):

- SAR not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.

### 9.6. Wi-Fi 5GHz (U-NII Bands)

#### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
5.2 U-NII 1	802.11a	6 Mbps	36	5180	Not Required	Not Required	14.5	12.5	No
			40	5200					
			44	5220					
			48	5240					
	802.11n (HT20)	6.5 Mbps	36	5180					
			40	5200					
			44	5220					
			48	5240					
	802.11n (HT40)	13.5 Mbps	38	5190					
			46	5230					
	802.11ac (VHT20)	6.5 Mbps	36	5180					
			40	5200					
			44	5220					
48			5240						
802.11ac (VHT40)	13.5 Mbps	38	5190						
		46	5230						
802.11ac (VHT80)	29.3 Mbps	42	5210	13.7	11.1	14.5	12.5	Yes	
5.3 U-NII-2A	802.11a	6 Mbps	52	5260	Not Required	Not Required	14.5	12.5	Yes
			56	5280					
			60	5300					
			64	5320					
	802.11n (HT20)	6.5 Mbps	52	5260					
			56	5280					
			60	5300					
			64	5320					
	802.11n (HT40)	13.5 Mbps	54	5270					
			62	5310					
	802.11ac (VHT20)	6.5 Mbps	52	5260					
			56	5280					
			60	5300					
64			5320						
802.11ac (VHT40)	13.5 Mbps	54	5270						
		62	5310						
802.11ac (VHT80)	29.3 Mbps	58	5290	13.6	11.3	14.5	12.5	No	

#### Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for UNII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

**Measured Results**

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
5.5 U-NII-2C	802.11a	6 Mbps	100	5500	Not Required	Not Required	14.5	12.5	No
			116	5580					
			124	5620					
			140	5700					
	802.11n (HT20)	6.5 Mbps	100	5500					
			116	5580					
			124	5620					
			140	5700					
	802.11n (HT40)	13.5 Mbps	102	5510					
			118	5590					
			134	5670					
	802.11ac (VHT20)	6.5 Mbps	100	5500					
			116	5580					
			124	5620					
			140	5700					
	802.11ac (VHT40)	13.5 Mbps	102	5510					
			118	5590					
			134	5670					
802.11ac (VHT80)	29.3 Mbps	106	5530	13.0	11.1	14.5	12.5	Yes	
		122	5610	13.0	11.3				
		138	5690	13.0	11.4				
5.8 U-NII-3	802.11a	6 Mbps	149	5745	Not Required	Not Required	14.5	12.5	No
			157	5785					
			165	5825					
	802.11n (HT20)	6.5 Mbps	149	5745					
			157	5785					
			165	5825					
	802.11n (HT40)	13.5 Mbps	151	5755					
			159	5795					
	802.11ac (VHT20)	6.5 Mbps	149	5745					
			157	5785					
			165	5825					
	802.11ac (VHT40)	13.5 Mbps	151	5755					
159			5795						
802.11ac (VHT80)	29.3 Mbps	155	5775	13.0	10.5	14.5	12.5	Yes	

**Note(s):**

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

**9.7. Bluetooth**

Maximum tune-up tolerance limit is 11.84 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

## 10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg .

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

### KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR

measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.



**10.1. GSM850**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	OFF	0	Left Touch	190	836.6	29.2	28.6	0.244	0.280	
				Left Tilt	190	836.6	29.2	28.6	0.148	0.170	
				Right Touch	190	836.6	29.2	28.6	0.254	<b>0.292</b>	1
				Right Tilt	190	836.6	29.2	28.6	0.133	0.153	
Body-worn	GPRS 4 Slots	OFF	15	Rear	190	836.6	29.2	28.6	0.217	0.249	
				Front	190	836.6	29.2	28.6	0.306	<b>0.351</b>	2
Hotspot	GPRS 4 Slots	OFF	10	Rear	190	836.6	29.2	28.6	0.310	0.356	
				Front	190	836.6	29.2	28.6	0.425	0.488	
				Edge 2	190	836.6	29.2	28.6	0.275	0.316	
				Edge 3	190	836.6	29.2	28.6	0.340	0.390	
				Edge 4	190	836.6	29.2	28.6	0.083	0.096	
	DTM CS+PS 1 Slot	OFF	10	Front	190	836.6	32.2	31.7	0.439	<b>0.493</b>	3

**10.2. GSM1900**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	OFF	0	Left Touch	661	1880.0	26.2	25.8	0.037	<b>0.041</b>	4
				Left Tilt	661	1880.0	26.2	25.8	0.008	0.009	
				Right Touch	661	1880.0	26.2	25.8	0.036	0.039	
				Right Tilt	661	1880.0	26.2	25.8	0.013	0.014	
Body-worn	GPRS 4 Slots	OFF	15	Rear	661	1880.0	26.2	25.8	0.106	0.116	
				Front	661	1880.0	26.2	25.8	0.473	<b>0.519</b>	5
Hotspot	GPRS 4 Slots	ON	10	Rear	661	1880.0	23.2	22.7	0.130	0.146	
				Front	661	1880.0	23.2	22.7	0.577	<b>0.647</b>	6
				Edge 2	661	1880.0	23.2	22.7	0.013	0.015	
				Edge 3	661	1880.0	23.2	22.7	0.485	0.544	
				Edge 4	661	1880.0	23.2	22.7	0.025	0.028	
	DTM CS+PS 1 Slot	ON	10	Front	661	1880.0	29.2	28.6	0.468	0.537	

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is > 1.2 W/kg. Therefore, Extremity SAR testing is required for this band in accordance with KDB 648474 §2.5 b. Additionally, Extremity SAR was performed at the trigger distance minus 1mm (Refer to Section 6.7.4) at Max Power in accordance with KDB 648474.

**Phablet 10-g Extremity:**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Extremity	GPRS 4 Slots	ON	0	Front	661	1880.0	23.2	22.7	1.610	1.806	
	DTM CS+PS 1 Slot	ON	0	Front	512	1850.2	29.2	28.6	1.760	<b>2.021</b>	7
					661	1880.0	29.2	28.6	1.750	2.009	
Extremity	DTM CS+PS 1 Slot	OFF	7	Front	661	1880	32.2	31.7	0.989	1.110	

**10.3. W-CDMA Band II**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	9400	1880.0	24.0	23.8	0.088	<b>0.092</b>	8
				Left Tilt	9400	1880.0	24.0	23.8	0.019	0.020	
				Right Touch	9400	1880.0	24.0	23.8	0.063	0.066	
				Right Tilt	9400	1880.0	24.0	23.8	0.026	0.027	
Body-worn	Rel 99 RMC	OFF	15	Rear	9400	1880.0	24.0	23.8	0.170	0.178	
				Front	9400	1880.0	24.0	23.8	0.598	<b>0.626</b>	9
Hotspot	Rel 99 RMC	ON	10	Rear	9400	1880.0	20.5	20.0	0.261	0.293	
				Front	9262	1852.4	20.5	20.0	0.750	0.842	
					9400	1880.0	20.5	20.0	0.842	0.945	
					9538	1907.6	20.5	20.1	0.908	0.996	
				Edge 2	9400	1880.0	20.5	20.0	0.020	0.022	
				Edge 3	9262	1852.4	20.5	20.0	0.697	0.782	
					9400	1880.0	20.5	20.0	0.794	0.891	
					9538	1907.6	20.5	20.1	0.909	<b>0.997</b>	10
Edge 4	9400	1880.0	20.5	20.0	0.043	0.048					

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is > 1.2 W/kg. Therefore, Extremity SAR testing is required for this band in accordance with KDB 648474 §2.5 b. Additionally, Extremity SAR was performed at the trigger distance minus 1mm (Refer to Section 6.7.4) at Max Power in accordance with KDB 648474.

**Phablet 10-g Extremity:**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Extremity	Rel 99 RMC	ON	0	Front	9262	1852.4	20.5	20.0	2.430	<b>2.727</b>	11
					9400	1880.0	20.5	20.0	2.380	2.670	
					9538	1907.6	20.5	20.1	2.230	2.445	
		Edge 3		9262	1852.4	20.5	20.0	2.030	2.278		
				9400	1880.0	20.5	20.0	1.940	2.177		
				9538	1907.6	20.5	20.1	1.750	1.919		
Extremity	Rel 99 RMC	OFF	7	Front	9400	1880.0	24.0	23.8	1.470	<b>1.539</b>	
		OFF		Edge 3	9400	1880.0	24.0	23.8	1.400	1.466	

## 10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	1413	1732.6	24.5	24.3	0.105	<b>0.110</b>	12
				Left Tilt	1413	1732.6	24.5	24.3	0.018	0.019	
				Right Touch	1413	1732.6	24.5	24.3	0.088	0.092	
				Right Tilt	1413	1732.6	24.5	24.3	0.015	0.016	
Body-worn	Rel 99 RMC	OFF	15	Rear	1413	1732.6	24.5	24.3	0.152	0.159	
				Front	1413	1732.6	24.5	24.3	0.527	<b>0.552</b>	13
Hotspot	Rel 99 RMC	ON	10	Rear	1413	1732.6	21.0	20.5	0.178	0.200	
				Front	1413	1732.6	21.0	20.5	0.696	<b>0.781</b>	14
				Edge 2	1413	1732.6	21.0	20.5	0.019	0.021	
				Edge 3	1413	1732.6	21.0	20.5	0.595	0.668	
				Edge 4	1413	1732.6	21.0	20.5	0.042	0.047	

### Note(s):

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is > 1.2 W/kg. Therefore, Extremity SAR testing is required for this band in accordance with KDB 648474 §2.5 b. Additionally, Extremity SAR was performed at the trigger distance minus 1mm (Refer to Section 6.7.4) at Max Power in accordance with KDB 648474.

### Phablet 10-g Extremity:

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Extremity	Rel 99 RMC	ON	0	Front	1312	1712.4	21.0	20.6	1.820	1.996	
					1413	1732.6	21.0	20.5	2.060	2.311	
		ON		Edge 3	1513	1752.6	21.0	20.5	2.140	<b>2.401</b>	15
				1413	1732.6	21.0	20.5	1.870	2.098		
Extremity	Rel 99 RMC	OFF	7	Front	1312	1712.4	24.5	24.3	1.310	1.372	
					1413	1732.6	24.5	24.3	1.380	1.445	
				Edge 3	1513	1752.6	24.5	24.2	1.430	1.532	
					1413	1732.6	24.5	24.3	1.120	1.173	

## 10.5. W-CDMA Band V

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	OFF	0	Left Touch	4183	836.6	24.7	24.7	0.210	0.210	
				Left Tilt	4183	836.6	24.7	24.7	0.130	0.130	
				Right Touch	4183	836.6	24.7	24.7	0.256	<b>0.256</b>	16
				Right Tilt	4183	836.6	24.7	24.7	0.138	0.138	
Body-worn	Rel 99 RMC	OFF	15	Rear	4183	836.6	24.7	24.7	0.194	0.194	
				Front	4183	836.6	24.7	24.7	0.243	<b>0.243</b>	17
Hotspot	Rel 99 RMC	OFF	10	Rear	4183	836.6	24.7	24.7	0.308	0.308	
				Front	4183	836.6	24.7	24.7	0.347	<b>0.347</b>	18
				Edge 2	4183	836.6	24.7	24.7	0.265	0.265	
				Edge 3	4183	836.6	24.7	24.7	0.272	0.272	
				Edge 4	4183	836.6	24.7	24.7	0.100	0.100	

## 10.6. LTE Band 2 (20MHz Bandwidth)

SAR for LTE Band 2 (Frequency Range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency Range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

## 10.7. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**10.8. LTE Band 5 (10MHz Bandwidth)**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	0	25.0	24.7	0.226	<b>0.240</b>	19
							25	0	24.0	23.6	0.184	0.200	
				Left Tilt	20525	836.5	1	0	25.0	24.7	0.112	0.119	
							25	0	24.0	23.6	0.089	0.097	
				Right Touch	20525	836.5	1	0	25.0	24.7	0.218	0.231	
							25	0	24.0	23.6	0.172	0.187	
				Right Tilt	20525	836.5	1	0	25.0	24.7	0.099	0.105	
							25	0	24.0	23.6	0.081	0.088	
Body-worn	QPSK	OFF	15	Rear	20525	836.5	1	0	25.0	24.7	0.162	0.172	
							25	0	24.0	23.6	0.136	0.148	
				Front	20525	836.5	1	0	25.0	24.7	0.249	<b>0.264</b>	20
							25	0	24.0	23.6	0.204	0.222	
Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	0	25.0	24.7	0.270	0.286	
							25	0	24.0	23.6	0.223	0.243	
				Front	20525	836.5	1	0	25.0	24.7	0.393	<b>0.417</b>	21
							25	0	24.0	23.6	0.321	0.350	
				Edge 2	20525	836.5	1	0	25.0	24.7	0.255	0.270	
							25	0	24.0	23.6	0.208	0.227	
				Edge 3	20525	836.5	1	0	25.0	24.7	0.287	0.304	
							25	0	24.0	23.6	0.234	0.255	
				Edge 4	20525	836.5	1	0	25.0	24.7	0.123	0.130	
							25	0	24.0	23.6	0.100	0.108	

**10.9. LTE Band 7 (20MHz Bandwidth)**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	21100	2535.0	1	0	25.0	24.7	0.092	0.098	
							50	0	24.0	23.7	0.060	0.065	
				Left Tilt	21100	2535.0	1	0	25.0	24.7	0.069	0.073	
							50	0	24.0	23.7	0.051	0.055	
				Right Touch	21100	2535.0	1	0	25.0	24.7	0.197	<b>0.209</b>	22
							50	0	24.0	23.7	0.168	0.182	
				Right Tilt	21100	2535.0	1	0	25.0	24.7	0.054	0.057	
							50	0	24.0	23.7	0.042	0.045	
Body-worn	QPSK	OFF	15	Rear	21100	2535.0	1	0	25.0	24.7	0.186	0.198	
							50	0	24.0	23.7	0.137	0.148	
				Front	21100	2535.0	1	0	25.0	24.7	0.325	<b>0.345</b>	23
							50	0	24.0	23.7	0.265	0.286	
Hotspot	QPSK	ON	10	Rear	21100	2535.0	1	0	21.5	21.0	0.139	0.157	
							50	0	21.5	21.0	0.138	0.154	
				Front	21100	2535.0	1	0	21.5	21.0	0.371	<b>0.420</b>	24
							50	0	21.5	21.0	0.353	0.395	
				Edge 2	21100	2535.0	1	0	21.5	21.0	0.169	0.191	
							50	0	21.5	21.0	0.167	0.187	
				Edge 3	21100	2535.0	1	0	21.5	21.0	0.310	0.351	
							50	0	21.5	21.0	0.304	0.340	
				Edge 4	21100	2535.0	1	0	21.5	21.0	0.054	0.061	
							50	0	21.5	21.0	0.049	0.055	

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

**10.10. LTE Band 12 (10MHz Bandwidth)**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	OFF	0	Left Touch	23095	707.5	1	0	25.0	24.8	0.184	<b>0.191</b>	25	
							25	0	24.0	23.7	0.158	0.170		
				Left Tilt	23095	707.5	1	0	25.0	24.8	0.091	0.095		
							25	0	24.0	23.7	0.072	0.078		
				Right Touch	23095	707.5	1	0	25.0	24.8	0.179	0.186		
							25	0	24.0	23.7	0.149	0.160		
				Right Tilt	23095	707.5	1	0	25.0	24.8	0.074	0.077		
							25	0	24.0	23.7	0.056	0.060		
Body-worn	QPSK	OFF	15	Rear	23095	707.5	1	0	25.0	24.8	0.189	0.197		
							25	0	24.0	23.7	0.150	0.161		
				Front	23095	707.5	1	0	25.0	24.8	0.286	<b>0.297</b>	26	
							25	0	24.0	23.7	0.225	0.242		
Hotspot	QPSK	OFF	10	Rear	23095	707.5	1	0	25.0	24.8	0.233	0.242		
							25	0	24.0	23.7	0.185	0.199		
				Front	23095	707.5	1	0	25.0	24.8	0.360	<b>0.374</b>	27	
							25	0	24.0	23.7	0.283	0.305		
				Edge 2	23095	707.5	1	0	25.0	24.8	0.259	0.269		
							25	0	24.0	23.7	0.209	0.225		
				Edge 3	23095	707.5	1	0	25.0	24.8	0.122	0.127		
							25	0	24.0	23.7	0.096	0.103		
				Edge 4	23095	707.5	1	0	25.0	24.8	0.242	0.252		
							25	0	24.0	23.7	0.222	0.239		

**10.11. LTE Band 13 (10MHz Bandwidth)**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	OFF	0	Left Touch	23230	782.0	1	49	24.0	23.6	0.162	0.176		
							25	0	23.0	22.6	0.131	0.142		
				Left Tilt	23230	782.0	1	49	24.0	23.6	0.097	0.106		
							25	0	23.0	22.6	0.071	0.077		
				Right Touch	23230	782.0	1	49	24.0	23.6	0.188	<b>0.205</b>	28	
							25	0	23.0	22.6	0.149	0.162		
				Right Tilt	23230	782.0	1	49	24.0	23.6	0.088	0.096		
							25	0	23.0	22.6	0.069	0.075		
Body-worn	QPSK	OFF	15	Rear	23230	782.0	1	49	24.0	23.6	0.156	0.170		
							25	0	23.0	22.6	0.123	0.134		
				Front	23230	782.0	1	49	24.0	23.6	0.231	<b>0.252</b>	29	
							25	0	23.0	22.6	0.182	0.198		
Hotspot	QPSK	OFF	10	Rear	23230	782.0	1	49	24.0	23.6	0.204	0.222		
							25	0	23.0	22.6	0.173	0.188		
				Front	23230	782.0	1	49	24.0	23.6	0.263	<b>0.286</b>	30	
							25	0	23.0	22.6	0.212	0.230		
				Edge 2	23230	782.0	1	49	24.0	23.6	0.175	0.191		
							25	0	23.0	22.6	0.146	0.159		
				Edge 3	23230	782.0	1	49	24.0	23.6	0.187	0.204		
							25	0	23.0	22.6	0.146	0.159		
				Edge 4	23230	782.0	1	49	24.0	23.6	0.110	0.120		
							25	0	23.0	22.6	0.154	0.167		

**10.12. LTE Band 17 (10MHz Bandwidth)**

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

### 10.13. LTE Band 25 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
									Tune-up limit	Meas.	Meas.	Scaled					
Head	QPSK	OFF	0	Left Touch	26365	1882.5	1	0	24.0	23.8	0.083	<b>0.087</b>	31				
							50	0	23.0	22.6	0.063	0.070					
				Left Tilt	26365	1882.5	1	0	24.0	23.8	0.016	0.017					
							50	0	23.0	22.6	0.011	0.012					
				Right Touch	26365	1882.5	1	0	24.0	23.8	0.063	0.066					
							50	0	23.0	22.6	0.044	0.049					
				Right Tilt	26365	1882.5	1	0	24.0	23.8	0.020	0.021					
							50	0	23.0	22.6	0.015	0.017					
Body-worn	QPSK	OFF	15	Rear	26365	1882.5	1	0	24.0	23.8	0.204	0.215					
							50	0	23.0	22.6	0.197	0.219					
				Front	26365	1882.5	1	0	24.0	23.8	0.671	0.706					
							50	0	23.0	22.6	0.677	<b>0.751</b>	32				
				Hotspot	QPSK	ON	10	Rear	26365	1882.5	1	0	20.5	20.1	0.200	0.221	
											50	0	20.5	19.8	0.190	0.221	
Front	26365	1882.5	1					0	20.5	20.1	0.682	0.755					
			50					0	20.5	19.8	0.663	0.772					
Edge 2	26365	1882.5	1					0	20.5	20.1	0.016	0.018					
			50					0	20.5	19.8	0.019	0.022					
Edge 3	26140	1860.0	1					0	20.5	20.2	0.808	0.868					
			50					0	20.5	20.0	0.788	0.888					
			100					0	20.5	19.9	0.771	0.891					
	26365	1882.5	1					0	20.5	20.1	0.730	0.808					
			50					0	20.5	19.8	0.710	0.827					
			26590					1905.0	1	0	20.5	20.0	0.974	<b>1.093</b>	33		
Edge 4	26365	1882.5	50					0	20.5	20.0	0.939	1.063					
			1					0	20.5	20.1	0.035	0.039					
							50	0	20.5	19.8	0.034	0.040					

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is > 1.2 W/kg. Therefore, Extremity SAR testing is required for this band in accordance with KDB 648474 §2.5 b. Additionally, Extremity SAR was performed at the trigger distance minus 1mm (Refer to Section 6.7.4) at Max Power in accordance with KDB 648474.

**Phablet 10-g Extremity:**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		10-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Extremity	QPSK	ON	0	Front	26140	1860.0	1	0	20.5	20.2	2.160	2.320		
							50	0	20.5	20.0	2.070	2.333		
							100	0	20.5	19.9	2.010	2.324		
					26365	1882.5	1	0	20.5	20.1	2.190	<b>2.424</b>	34	
							50	0	20.5	19.8	2.080	2.421		
							26590	1905.0	1	0	20.5	20.0	2.120	2.379
							50	0	20.5	20.0	2.080	2.355		
		Edge 3		26140	1860.0	1	0	20.5	20.2	1.880	2.019			
						50	0	20.5	20.0	1.800	2.029			
						100	0	20.5	19.9	1.660	1.919			
				26365	1882.5	1	0	20.5	20.1	1.810	2.003			
						50	0	20.5	19.8	1.720	2.002			
						26590	1905.0	1	0	20.5	20.0	1.760	1.975	
						50	0	20.5	20.0	1.710	1.936			
Extremity	QPSK	OFF	7	Front	26590	1905.0	1	0	24.0	23.7	1.650	1.752		
		50					0	23.0	22.7	1.310	1.413			
		Edge 3		26590	1905.0	1	0	24.0	23.7	1.340	1.423			
						50	0	23.0	22.7	1.050	1.133			

**10.14. LTE Band 38 (20MHz Bandwidth)**

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**10.15. LTE Band 41 (20MHz Bandwidth)**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	40620	2593.0	1	0	25.0	24.8	0.065	0.068	
							50	24	24.0	23.6	0.053	0.058	
				Left Tilt	40620	2593.0	1	0	25.0	24.8	0.042	0.044	
							50	24	24.0	23.6	0.035	0.038	
				Right Touch	40620	2593.0	1	0	25.0	24.8	0.181	<b>0.190</b>	35
							50	24	24.0	23.6	0.129	0.141	
Right Tilt	40620	2593.0	1	0	25.0	24.8	0.028	0.029					
			50	24	24.0	23.6	0.024	0.026					
Body-worn	QPSK	OFF	15	Rear	40620	2593.0	1	0	25.0	24.8	0.146	0.154	
							50	24	24.0	23.6	0.105	0.115	
				Front	40620	2593.0	1	0	25.0	24.8	0.230	<b>0.242</b>	36
							50	24	24.0	23.6	0.173	0.189	
Hotspot	QPSK	ON	10	Rear	40620	2593.0	1	0	24.0	23.3	0.190	0.223	
							50	0	24.0	23.0	0.181	0.228	
				Front	40620	2593.0	1	0	24.0	23.3	0.381	0.447	
							50	0	24.0	23.0	0.366	0.461	
				Edge 2	40620	2593.0	1	0	24.0	23.3	0.204	0.240	
							50	0	24.0	23.0	0.193	0.243	
				Edge 3	40620	2593.0	1	0	24.0	23.3	0.428	0.503	
							50	0	24.0	23.0	0.417	<b>0.525</b>	37
				Edge 4	40620	2593.0	1	0	24.0	23.3	0.066	0.078	
							50	0	24.0	23.0	0.066	0.083	

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b.

### 10.16. LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	132322	1745.0	1	0	24.5	24.5	0.102	0.102	38
							50	0	23.5	23.5	0.107	<b>0.107</b>	
				Left Tilt	132322	1745.0	1	0	24.5	24.5	0.023	0.023	
							50	0	23.5	23.5	0.021	0.021	
				Right Touch	132322	1745.0	1	0	24.5	24.5	0.090	0.090	
							50	0	23.5	23.5	0.094	0.094	
				Right Tilt	132322	1745.0	1	0	24.5	24.5	0.017	0.017	
							50	0	23.5	23.5	0.021	0.021	
Body-worn	QPSK	OFF	15	Rear	132322	1745.0	1	0	24.5	24.5	0.191	0.191	
							50	0	23.5	23.5	0.197	0.197	
				Front	132072	1720.0	1	0	24.5	24.3	0.738	0.771	
							50	0	24.5	24.5	0.721	0.721	
					132322	1745.0	1	0	24.5	24.5	0.752	0.752	
							50	0	23.5	23.5	0.752	0.752	
132572	1770.0	1	0	24.5	24.5	0.845	<b>0.845</b>	39					
Hotspot	QPSK	ON	10	Rear	132322	1745.0	1	0	21.0	21.0	0.225	0.225	
							50	0	21.0	21.0	0.226	0.226	
				Front	132072	1720.0	1	0	21.0	21.0	0.799	0.799	
							50	0	21.0	21.0	0.797	0.797	
					132322	1745.0	1	0	21.0	21.0	0.851	0.851	
							50	0	21.0	21.0	0.854	0.854	
							100	0	21.0	21.0	0.854	0.854	
							132572	1770.0	1	0	21.0	20.9	0.929
				Edge 2	132322	1745.0	1	0	21.0	21.0	0.020	0.020	
							50	0	21.0	21.0	0.020	0.020	
				Edge 3	132322	1745.0	1	0	21.0	21.0	0.652	0.652	
							50	0	21.0	21.0	0.663	0.663	
				Edge 4	132322	1745.0	1	0	21.0	21.0	0.047	0.047	
							50	0	21.0	21.0	0.048	0.048	

**Note(s):**

Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is > 1.2 W/kg. Therefore, Extremity SAR testing is required for this band in accordance with KDB 648474 §2.5 b. Additionally, Extremity SAR was performed at the trigger distance minus 1mm (Refer to Section 6.7.4) at Max Power in accordance with KDB 648474.

**Phablet 10-g Extremity:**

RF Exposure Conditions	Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		10-g SAR (W/kg)		Plot No.		
									Tune-up limit	Meas.	Meas.	Scaled			
Extremity	QPSK	ON	0	Front	132072	1720.0	1	0	21.0	21.0	1.740	1.740			
							132322	1745.0	1	0	21.0	21.0	2.000	<b>2.000</b>	41
									50	0	21.0	21.0	1.990	1.990	
		Edge 3		132572	1770.0	1	0	21.0	20.9	1.950	1.982				
						132322	1745.0	1	0	21.0	21.0	1.740	1.740		
								50	0	21.0	21.0	1.740	1.740		
Extremity	QPSK	OFF	7	Front	132322	1745.0	1	0	24.5	24.5	0.982	0.982			
							50	0	23.5	23.5	1.010	1.010			
				Edge 3	132072	1720.0	50	0	23.5	23.5	1.020	1.020			
							132322	1745.0	1	0	24.5	24.5	1.290	1.290	
					50	0			23.5	23.5	1.310	1.310			
					132572	1770.0	50	0	23.5	23.5	1.080	1.080			



### 10.17. Wi-Fi (DTS Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.			
									Tune-up limit	Meas.	Meas.	Scaled				
2.4GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.235	15.0	14.0	0.152	0.191				
					Left Tilt	6	2437.0	0.223	15.0	14.0						
					Right Touch	6	2437.0	0.945	15.0	14.0	0.653	0.822				
					Right Tilt	11	2462.0		15.0	13.8	0.645	<b>0.850</b>	42			
			Body-worn	15	Rear	6	2437.0	0.015	15.0	14.0						
					Front	6	2437.0	0.076	15.0	14.0	0.041	<b>0.052</b>	43			
			Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.030	15.0	14.0						
					Front	6	2437.0	0.161	15.0	14.0	0.114	<b>0.144</b>	44			
					Edge 1	6	2437.0	0.009	15.0	14.0						
					Edge 4	6	2437.0	0.141	15.0	14.0						
			2.4GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.225	13.8	12.8	0.148	<b>0.186</b>	45
								Left Tilt	6	2437.0	0.106	13.8	12.8			
Right Touch	6	2437.0						0.039	13.8	12.8	0.028	0.035				
Right Tilt	6	2437.0						0.028	13.8	12.8						
Body-worn	15	Rear				6	2437.0	0.016	13.8	12.8	0.003	<b>0.004</b>	46			
		Front				6	2437.0	0.009	13.8	12.8						
Hotspot & Wi-Fi Direct	10	Rear				6	2437.0	0.014	13.8	12.8						
		Front				6	2437.0	0.022	13.8	12.8						
		Edge 1				6	2437.0	0.005	13.8	12.8						
		Edge 2				6	2437.0	0.023	13.8	12.8	0.012	<b>0.015</b>	47			

### 10.18. Wi-Fi (U-NII Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	58	5290.0	0.281	14.5	13.6					
					Left Tilt	58	5290.0	0.166	14.5	13.6					
					Right Touch	58	5290.0	1.030	14.5	13.6	0.475	<b>0.584</b>	0.126	0.155	48
					Right Tilt	58	5290.0	0.432	14.5	13.6	0.226	0.278	0.065	0.080	
			Body-worn	15	Rear	58	5290.0	0.005	14.5	13.6					
					Front	58	5290.0	0.033	14.5	13.6	0.029	<b>0.036</b>	0.007	0.009	49
			Extremity	0	Rear	58	5290.0	0.140	14.5	13.6					
					Front	58	5290.0	1.290	14.5	13.6	0.917	1.128	0.224	<b>0.276</b>	50
					Edge 1	58	5290.0	0.056	14.5	13.6					
					Edge 4	58	5290.0	0.729	14.5	13.6					

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	106	5530.0	0.185	14.5	13.0					
					Left Tilt	106	5530.0	0.144	14.5	13.0					
					Right Touch	106	5530.0	0.869	14.5	13.0	0.378	<b>0.534</b>	0.105	0.148	54
					Right Tilt	106	5530.0	0.339	14.5	13.0	0.169	0.239	0.047	0.066	
			Body-worn	15	Rear	106	5530.0	0.023	14.5	13.0					
					Front	106	5530.0	0.052	14.5	13.0	0.020	<b>0.028</b>	0.007	0.009	55
			Extremity	0	Rear	106	5530.0	0.085	14.5	13.0					
					Front	106	5530.0	1.160	14.5	13.0	0.713	1.007	0.163	<b>0.230</b>	56
					Edge 1	106	5530.0	0.175	14.5	13.0					
					Edge 4	106	5530.0	0.770	14.5	13.0					

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.405	14.5	13.0					
					Left Tilt	155	5775.0	0.361	14.5	13.0					
					Right Touch	155	5775.0	0.790	14.5	13.0	0.358	<b>0.506</b>	0.098	0.138	60
					Right Tilt	155	5775.0	0.434	14.5	13.0	0.192	0.271	0.054	0.076	
			Body-worn	15	Rear	155	5775.0	0.007	14.5	13.0					
					Front	155	5775.0	0.074	14.5	13.0	0.036	<b>0.051</b>	0.013	0.018	61
			Extremity	0	Rear	155	5775.0	0.088	14.5	13.0					
					Front	155	5775.0	2.040	14.5	13.0	0.797	1.126	0.182	<b>0.257</b>	62
					Edge 1	155	5775.0	0.211	14.5	13.0					
					Edge 4	155	5775.0	1.210	14.5	13.0					

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 1	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.242	12.5	10.5	0.118	<b>0.187</b>	0.034	0.054	63
					Left Tilt	155	5775.0	0.079	12.5	10.5					
					Right Touch	155	5775.0	0.049	12.5	10.5					
					Right Tilt	155	5775.0	0.032	12.5	10.5					
			Body-worn	15	Rear	155	5775.0	0.009	12.5	10.5					
					Front	155	5775.0	0.031	12.5	10.5	0.014	<b>0.022</b>	0.006	0.009	64
			Extremity	0	Rear	155	5775.0	0.105	12.5	10.5					
					Front	155	5775.0	0.653	12.5	10.5	0.301	0.477	0.083	<b>0.132</b>	65
					Edge 1	155	5775.0	0.051	12.5	10.5					
					Edge 2	155	5775.0	0.425	12.5	10.5					

### 10.19. Bluetooth

Maximum tune-up tolerance limit is 11.84 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

### 10.20. Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ ,  
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$   
W/kg for test separation distances ≤ 50 mm;  
where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

#### Body-worn and Hotspot:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	11.84	15	15	1.6	0.210
Bluetooth	Hotspot	2.480	11.84	15	10	2.4	0.315

#### Conclusion:

\*: The computed value is ≤ 3; therefore, this qualifies for Standalone SAR test exclusion.

#### Extremity:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 10-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Extremity	2.480	11.84	15	0	4.7	0.252

#### Conclusion:

\*: The computed value is ≤ 7.5; therefore, this qualifies for Standalone SAR test exclusion.

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.8$  or  $2$  W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or  $2$  W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or  $3.6$  W/kg ( $\sim 10\%$  from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or  $3.75$  W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Front	No	0.360	N/A	N/A
	LTE Band 13	Hotspot	Front	No	0.263	N/A	N/A
850	GSM 850	Hotspot	Front	No	0.439	N/A	N/A
	WCDMA Band V	Hotspot	Front	No	0.347	N/A	N/A
	LTE Band 5	Hotspot	Front	No	0.393	N/A	N/A
1700	WCDMA Band IV	Hotspot	Front	No	0.696	N/A	N/A
	LTE Band 66	Hotspot	Front	Yes	0.929	0.844	1.10
1900	GSM 1900	Hotspot	Front	No	0.577	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	No	0.909	N/A	N/A
	LTE Band 25	Hotspot	Edge 3	Yes	0.974	0.937	1.04
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.645	N/A	N/A
2500	LTE Band 7	Hotspot	Front	No	0.371	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.417	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.475	N/A	N/A
5600	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.378	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.358	N/A	N/A

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is  $< 1.20$ .

**Extremity:**

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1750	W-CDMA Band IV	Extremity	Front	Yes	2.140	2.14	1.00
	LTE Band 66	Extremity	Front	No	2.000	N/A	N/A
1900	GSM 1900	Extremity	Front	No	1.760	N/A	N/A
	W-CDMA Band II	Extremity	Front	Yes	2.430	2.39	1.02
	LTE Band 25	Extremity	Front	No	2.190	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Extremity	Front	No	0.224	N/A	N/A
5600	Wi-Fi 802.11a/n/ac	Extremity	Front	No	0.163	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Extremity	Front	No	0.182	N/A	N/A

**Note(s):**

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20.

## 12. Simultaneous Transmission SAR Analysis

### Simultaneous Transmission Condition

Case	Cellular	WLAN Chain 0 / BT	WLAN Chain 1
1	GSM/GPRS/Edge	BT/BLE	(None)
2	GSM/GPRS/Edge	WLAN 2.4G	(None)
3	GSM/GPRS/Edge	WLAN 2.4G	WLAN 2.4G
4	GSM/GPRS/Edge	WLAN 2.4G	WLAN 5G
5	GSM/GPRS/Edge	WLAN 5G	WLAN 5G
6	GSM/GPRS/Edge	BT WLAN 5G	WLAN 5G
7	UMTS/HSPA	BT/BLE	(None)
8	UMTS/HSPA	WLAN 2.4G	(None)
9	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
10	UMTS/HSPA	WLAN 2.4G	WLAN 5G
11	UMTS/HSPA	WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT WLAN 5G	WLAN 5G
13	LTE	BT/BLE	(None)
14	LTE	WLAN 2.4G	(None)
15	LTE	WLAN 2.4G	WLAN 2.4G
16	LTE	WLAN 2.4G	WLAN 5G
17	LTE	WLAN 5G	WLAN 5G
18	LTE	BT WLAN 5G	WLAN 5G
19	(None)	BT WLAN 5G	WLAN 5G

### 12.1. Sum of the 1-g SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)							
		WWAN		DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS	WWAN + U-NII	WWAN+DTS+U-NII	WWAN+U-NII+BT	U-NII+BT
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	⑥	① + ⑥	① + ②	① + ② + ③	① + ④ + ⑤	① + ② + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥	
Head	Left Touch	0.280	0.191	0.186	0.278	0.369			0.471	0.657	0.927	0.840		0.647	
	Left Tilt	0.170	0.191	0.035	0.278	0.369			0.361	0.396	0.817	0.730		0.647	
	Right Touch	0.292	0.850	0.035	0.584	0.369			1.142	1.177	1.245	1.511		0.953	
	Right Tilt	0.153	0.452	0.035	0.278	0.369			0.605	0.640	0.800	0.974		0.647	
Body-worn	Rear	0.249	0.052	0.004	0.051	0.024	0.210	0.459	0.301	0.305	0.324	0.325	0.534	0.285	
	Front	0.845	0.052	0.004	0.051	0.024	0.210	1.055	0.897	0.901	0.920	0.921	1.130	0.285	
Hotspot	Rear	0.356	0.144	0.015			0.315	0.671	0.500	0.515					
	Front	0.996	0.144	0.015			0.315	1.311	1.140	1.155					
	Edge 1		0.144	0.015			0.315	0.315	0.144	0.159					
	Edge 2	0.316		0.015					0.316	0.331					
	Edge 3	1.093						1.093	1.093	1.093					
	Edge 4	0.252	0.144				0.315	0.567	0.396	0.396					

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1-g SAR is < 1.6 W/kg.

### 12.2. Sum of the 10-g SAR for WWAN & Wi-Fi 5GHz & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 10-g SAR (W/kg)	
		WWAN	U-NII		BT	WWAN+U-NII	WWAN+U-NII+BT
		①	Chain 0 ②	Chain 1 ③	④	① + ② + ③	① + ② + ③ + ④
Extremity	Rear	0.858	0.276	0.202	0.252	1.336	1.588
	Front	2.727	0.276	0.202	0.252	3.205	3.457
	Edge 1		0.276	0.202	0.252	0.478	0.730
	Edge 2	0.089		0.202		0.291	0.291
	Edge 3	2.278				2.278	2.278
	Edge 4	0.236	0.276		0.252	0.512	0.764

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 10-g SAR is < 4.0 W/kg.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**11785278-S1V1 SAR\_App A Setup Photos**

**11785278-S1V1 SAR\_App B System Check Plots**

**11785278-S1V1 SAR\_App C Highest Test Plots**

**11785278-S1V1 SAR\_App D Tissue Ingredients**

**11785278-S1V1 SAR\_App E Probe Cal. Certificates**

**11785278-S1V1 SAR\_App F Dipole Cal. Certificates**

**END OF REPORT**