



**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC**

**FCC ID: PY7-76486O**

**REPORT NUMBER: 11589096AP-E4V1**

**ISSUE DATE: 2017-02-24**

**Prepared for  
SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN**

**Prepared by  
UL LLC  
12 LABORATORY DR.  
RESEARCH TRIANGLE PARK, NC 27709 USA  
TEL: (919) 549-1400**



**NVLAP LAB CODE 200246-0**

Revision History

<u>Ver.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2017-02-24	Initial Issue	Brian Kiewra

## TABLE OF CONTENTS

<b>1. REUSE OF TEST DATA .....</b>	<b>4</b>
1.1. INTRODUCTION .....	4
1.2. DEVICES DIFFERENCES .....	4
1.3. SPOT CHECK VERIFICATION .....	4
1.4. REFERENCE DETAIL .....	4
<b>2. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
<b>4. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
5.1. MEASURING INSTRUMENT CALIBRATION .....	7
5.2. SAMPLE CALCULATION .....	7
5.3. MEASUREMENT UNCERTAINTY .....	7
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
6.1. DESCRIPTION OF EUT .....	8
6.2. MAXIMUM OUTPUT POWER.....	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	8
6.4. SOFTWARE AND FIRMWARE .....	8
6.5. WORST-CASE CONFIGURATION AND MODE.....	9
6.6. LIST OF TEST REDUCTION AND MODES.....	9
6.7. DESCRIPTION OF TEST SETUP .....	10
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>13</b>
<b>8. RADIATED TEST RESULTS .....</b>	<b>14</b>
8.1. LIMITS AND PROCEDURE .....	14
8.2. TRANSMITTER ABOVE 1 GHz .....	15
<b>9. SETUP PHOTOS.....</b>	<b>16</b>

## 1. REUSE OF TEST DATA

### 1.1. INTRODUCTION

According to manufacturer, FCC ID: PY7-29752M and FCC ID: PY7-764860 licensed and unlicensed radios (WWAN/WLAN/BT/BLE) are electrically identical, except the NFC which has a new chipset and LTE B7/41 network matching. With the exception of the NFC, FCC ID: PY7-29752M and FCC ID: PY7-764860 share the same chipsets, same power and same antenna performance including antenna gain. The FCC ID: PY7-29752M test data shall remain representative of FCC ID: PY7-764860, and therefore FCC ID: FCC ID: PY7-768460 leverages test data from FCC ID: PY7-29752M.

The applicant takes full responsibility that the test data as referenced in this section represent compliance for this FCC ID.

### 1.2. DEVICES DIFFERENCES

Difference between PY7-29752M and FCC ID: PY7-768460:

Identical except the NFC chipset is new in PY7-768460. Refer to Report 11589096AP-E2 for PY7-768460 NFC data.

### 1.3. SPOT CHECK VERIFICATION

Spot check verification has been done on device FCC ID: PY7-764860 for the WLAN Radiated Spurious Emissions. 802.11b was chosen as it is considered to have the worst-case Power Spectral Density. Test results were consistent with FCC ID: PY7-29752M.

Technology	Test Items	Configurations	PY7-29752M	PY7-21831Z
			Worst Case Result	Spot Check Result
WLAN DTS	Radiated Spurious	802.11b, 2412 MHz Chain 0	> 10 dB Margin*	-13.71 dB Margin*

\*This emissions were considered Noise Floor.

### 1.4. REFERENCE DETAIL

Equipment Class	Reference FCC ID	Report Title/Section
DTS	PY7-29752M	16J23633A-E4V2 FCC Report DTS WLAN

The following test pages are the test data from FCC ID: PY7-29752M.

## 2. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

**SERIAL NUMBER:** Conducted: CB512AP7SV  
Radiated: CB512AP5SN

**DATE TESTED:** 2016-07-13 to 2016-08-02

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government..

Approved & Released  
For UL LLC By:



Jeff Moser  
EMC Program Manager  
UL – Consumer Technology Division

Prepared By:



Brian T. Kiewra  
EMC Engineer  
UL – Consumer Technology Division

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10:2013.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709
<input type="checkbox"/> Chamber A
<input type="checkbox"/> Chamber C

2800 Suite B Perimeter Park Dr., Morrisville, NC 27560
<input type="checkbox"/> Chamber NORTH
<input checked="" type="checkbox"/> Chamber SOUTH

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://www.nist.gov/nvlap/>

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 6. EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

### 6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b Ch0	13.8	23.99
2412 - 2472	802.11b Ch1	8.60	7.24
2412 - 2472	802.11g	15.57	36.06
2412 - 2472	802.11n HT20	15.62	36.48

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two integrated antennas, with the following maximum gains:

Frequency Range (MHz)	Antenna Gain (dBi)	
	Ant 0 (Main)	Ant 1 (Sub)
2402 - 2480	-6.2	-13.9

### 6.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was SONY, s\_atp\_1\_600\_7\_9

The test utility software used during testing was Tera Term ver 4.89 (SVN# 6182).



## 6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X-Axis orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-Axis orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20 mode: MCS8

802.11g/n SISO mode share same power per chain as 802.11g/n MIMO mode; therefore only MIMO mode was tested.

802.11b only support SISO mode.

## 6.6. LIST OF TEST REDUCTION AND MODES

2400 - 2483.5 MHz Authorized Frequency Band (Antenna Port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
2412 - 2472	802.11g Legacy 1TX	802.11g CDD 2TX
2412 - 2472	802.11n 1TX	802.11n HT20 CDD 2TX
2412 - 2472	802.11n STBC 1TX	802.11n HT20 CDD 2TX
2412 - 2472	802.11n STBC 2TX	802.11n HT20 CDD 2TX

## 6.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Desktop	Lenovo	ThinkCentre	MG00ADEN	NA
Laptop	Lenovo	T450	RTP0116PC0A2UQT	NA
Headphones	Sony	MH410x	12271A100010396	NA
PowerSupply	Sony	1300-7146.1B	5816W02400051	NA


### I/O CABLES


I/O Cable List					
Cable No	Port	# of Identical ports	Connector Type	Cable Length (m)	Remarks
1	Antenna Port	1	RF	<1m	NA
2	DC Mains	1	AC	>1m	NA
3	Audio	1	3.5mm	>1m	Headphone

### TEST SETUP

The EUT is setup as a standalone device. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

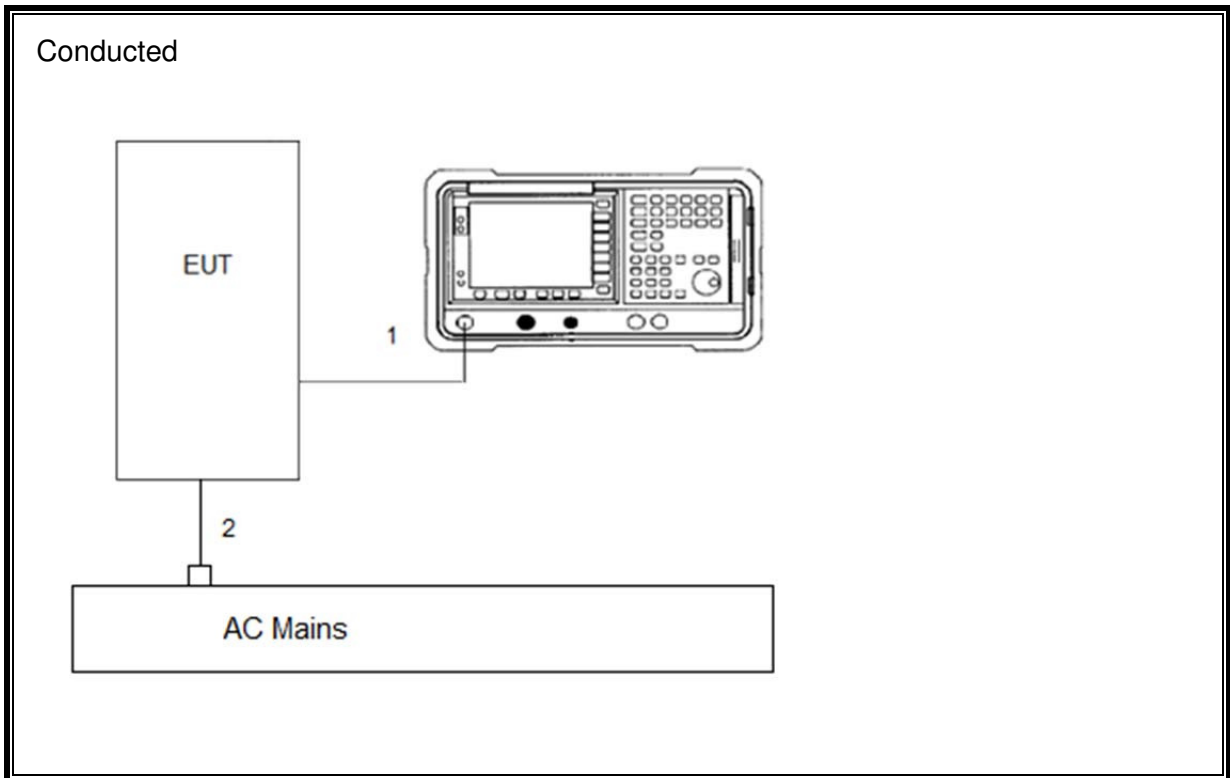

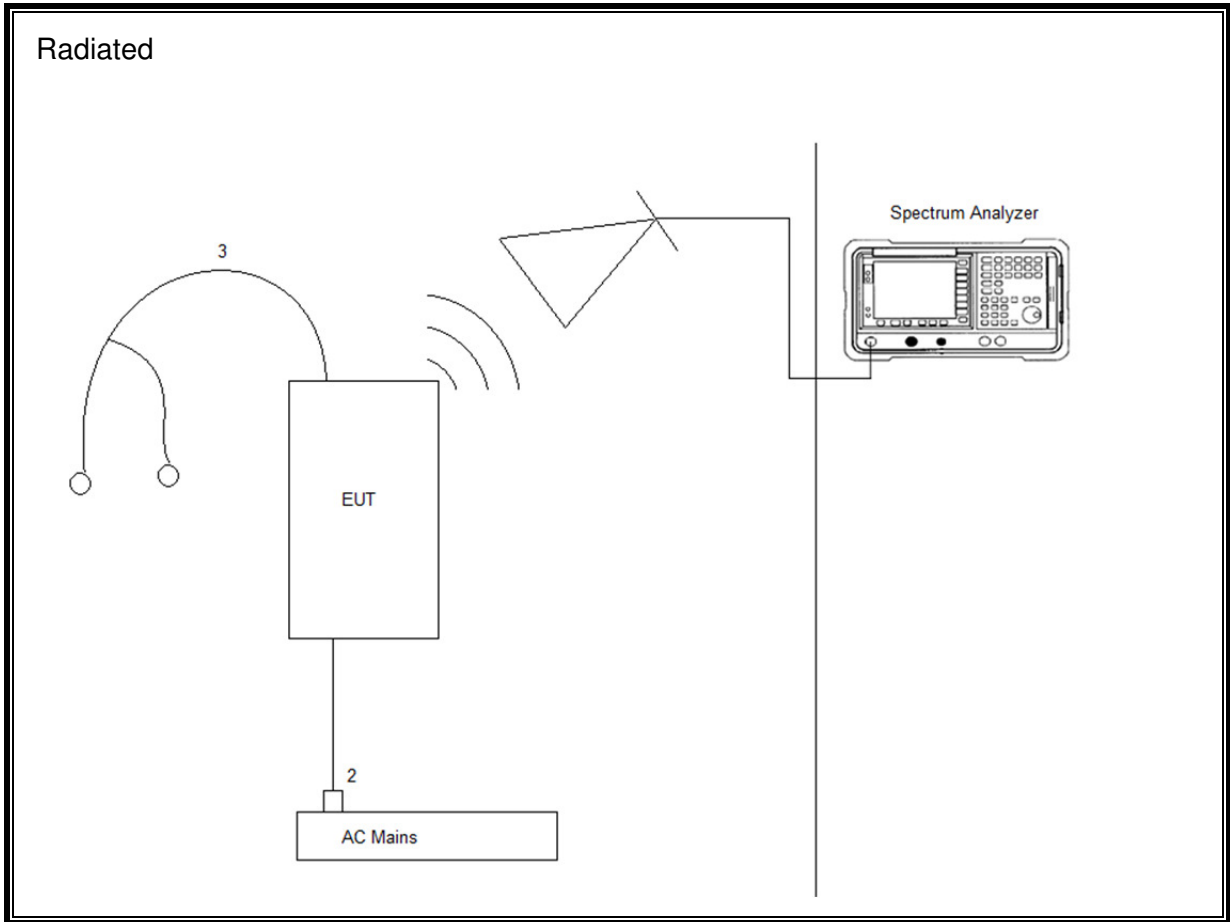

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - North Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	<b>1-18 GHz</b>				
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2016-03-07	2017-03-31
	<b>Gain-Loss Chains</b>				
N-SAC03	Gain-loss string: 1-18GHz	Various	Various	2016-08-28	2017-08-28
	<b>Receiver &amp; Software</b>				
SA0026	Spectrum Analyzer	Agilent	N9030A	2017-02-17	2018-02-17
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements and 1.5 m above the ground plane for above 1GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For peak measurements above 1 GHz, the resolution bandwidth is set to 1 MHz and the video bandwidth is set to 3 MHz. For average measurements above 1GHz, the resolution bandwidth and video bandwidth are set as described in ANSI C63.10:2013 for the applicable measurement. For this evaluation, RMS Power Averaging was used and the resolution/video bandwidth settings were 1MHz/3MHz.


The spectrum from 9 kHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz

### HARMONICS AND SPURIOUS EMISSIONS

2.4 GHz 802.11b

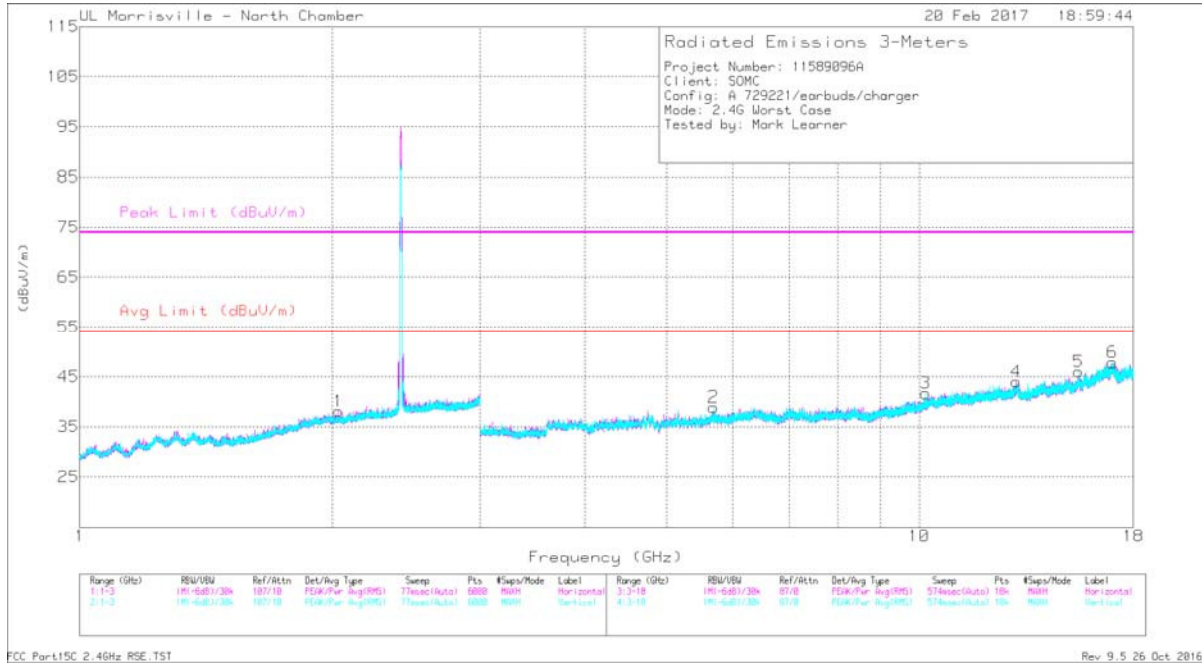

#### Trace Markers

Marker	Freq. (GHz)	Meter Reading (dBuV)	Det	AF AT0072 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 15.48	35.89	PK2	40.1	-24.4	51.59	-	-	74	-22.41	332	116	V
	* 15.48	24.59	MAv1	40.1	-24.4	40.29	54	-13.71	-	-	332	116	V
1	2.033	31.26	Pk	31.3	-24.5	38.06	-	-	-	-	0-360	199	H
2	5.689	35.68	Pk	34.7	-31.5	38.88	-	-	-	-	0-360	102	V
3	10.18	31.77	Pk	37.2	-27.3	41.67	-	-	-	-	0-360	102	V
4	13.054	30.37	Pk	39.2	-25.6	43.97	-	-	-	-	0-360	101	H
6	16.982	31.02	Pk	41.9	-25.1	47.82	-	-	-	-	0-360	102	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

FCC Part15C 2.4GHz RSE.TST

Rev 9.5 26 Oct 2016