Report No.: ZR/2020/C004303
Page: 1 of 32

FCC TEST REPORT

Application No.:	ZR/2020/C0043
Applicant:	Sony Mobile Communications, Inc.
Address of Applicant	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Manufacturer:	Sony Mobile Communications, Inc.
Address of Manufacturer	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
EUT Description:	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC
Trade Mark:	Sony
FCC ID:	PY7-76625R
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C
Date of Receipt:	2021/2/25
Date of Test:	2021/2/25 to 2021/3/15
Date of Issue:	2021/3/18
Test Result :	**PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:



Derek Yang
Wireless Laboratory Manager

1 Version

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2021-03-18		Original

Authorized for issue by:				
Tested By		Dee.Zheng (Dee Zheng) /Project Engineer		
Checked By		David Chen (David Chen) /Reviewer		

2 Test Summary

Test Item	Test Requirement	Test Method	Result	Remark	Test Lab*
AC Power Line Conducted Emission	15.207	ANSI C63.10 (2013)	-	See Note	-
Duty cycle	-	-	PASS	-	A
Conducted Peak Output Power	15.247 (b)(1)	ANSI C63.10 (2013)	PASS	-	A
20dB Emission Bandwidth	15.247 (a)(1)	ANSI C63.10 (2013)	-	See Note	-
Carrier Frequencies Separation	15.247 (a)(1)	ANSI C63.10 (2013)	-	See Note	-
Hopping Channel Number	15.247 (a)(1)	ANSI C63.10 (2013)	-	See Note	-
Dwell Time	15.247 (a)(1)	ANSI C63.10 (2013)	-	See Note	-
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 (2013)	-	See Note	-
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 (2013)	-	See Note	-
Radiated Spurious emissions	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	PASS	-	B
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	PASS	-	B

Note:The RF circuit, output power level and antenna performance is the same in WLAN function across all two FCC ID PY7-54955X and PY7-76625R, since the change, only verify RF output power and radiated spurious emission test data the worst mode was reported in this report.

Contents

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 General Information

3.1 Details of Client

Applicant:	Sony Mobile Communications, Inc.
Address of Applicant	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Manufacturer:	Sony Mobile Communications, Inc.
Address of Manufacturer	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057

Lab B:

Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

FCC Designation Number: CN1271.

3.4 General Description of EUT

EUT Description:	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC
Trade Mark:	Sony
S/N:	005059ADNVM2
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = “Operating Frequency” in MHz, -N = “Channel Number” with the range from 0 to 39.
Bluetooth version:	Bluetooth V5.1
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	☒ Portable Device, ☐Module
Antenna Type:	☐ External, ☒ Integrated
Antenna Gain:	2.0dBi

Operation Frequency of each channel							
Channel	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**	**Channel**	**Frequency**
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz

19	2421MHz	39	2441MHz	59	2461MHz	

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH0)	2402MHz
The Middle channel(CH39)	2441MHz
The Highest channel(CH78)	2480MHz

3.5 Test Environment

Operating Environment:	
Temperature:	25.0 ˚C
Humidity:	50 % RH
Atmospheric Pressure:	101.30 KPa

3.6 Description of Support Units

The EUT has been tested independent unit.

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.	

4.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

4.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

4.2.2 Conclusion

Standard Requirement:
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.
Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
Compliance for section 15.247(a)(1):
According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.
> Number of shift register stages: 9
> Length of pseudo-random sequence: 29 -1 = 511 bits
> Longest sequence of zeros: 8 (non-inverted signal)
Linear Feedback Shift Register for Generation of the PRBS sequence
An example of Pseudorandom Frequency Hopping Sequence as follow:



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.
According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.
Compliance for section 15.247(g):
According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the RF system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.
Compliance for section 15.247(h):
According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels. The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

4.3 Duty clcye

4.3.1 Test Results

Mode	Test Channel	Duty cycle [%]	T(ms)	1/T(kHz)	VBW(kHz)
GFSK	CH0,CH39,CH78	76.57	0.287	3.484	10

4.3.2 Test Plots

Test mode:	GFSK

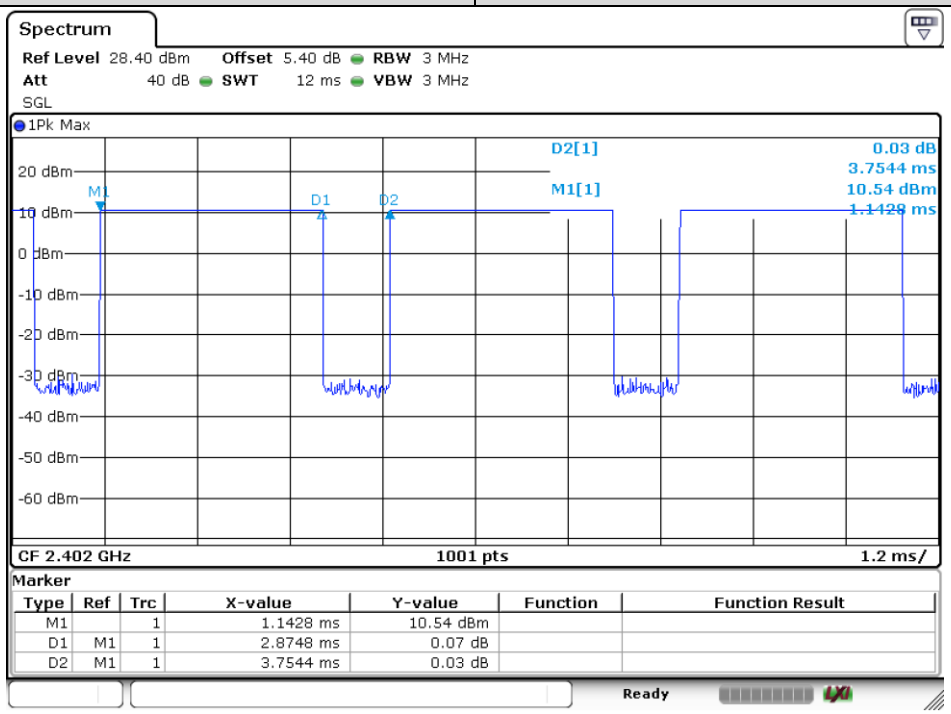

Date: 11.JAN.2021 10:41:20

4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	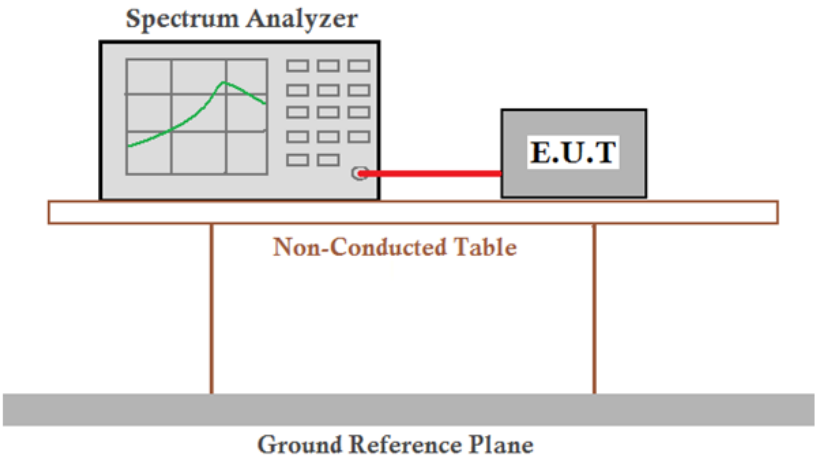
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Limit:	(20.97dBm) 125mW
Test Results:	Pass

4.4.1 Test Results

Measurement Data of Peak Power:

GFSK mode			
Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result
Middle	13.16	20.97	Pass

4.4.2 Test Plots

Test mode:	GFSK	Test channel:	Middle

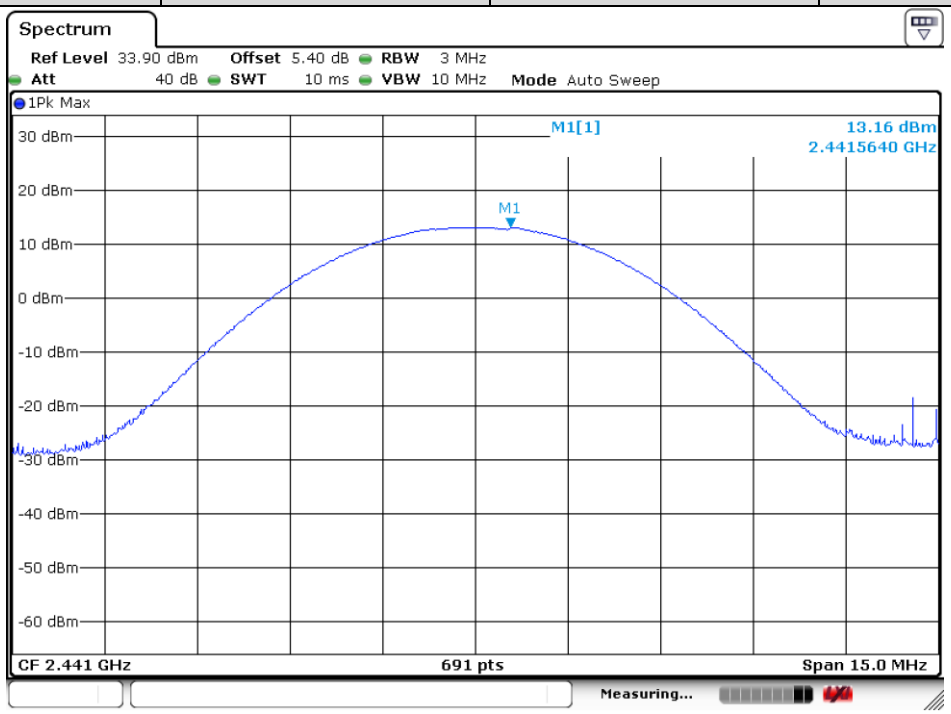

Date: 17.MAR.2021 17:21:02

4.5 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b),Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:	

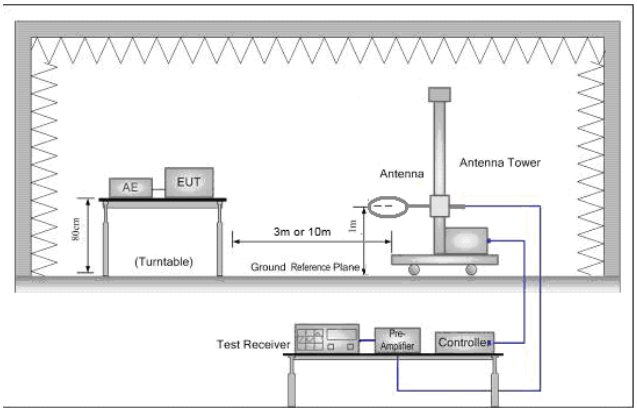

Figure 1. Below 30MHz

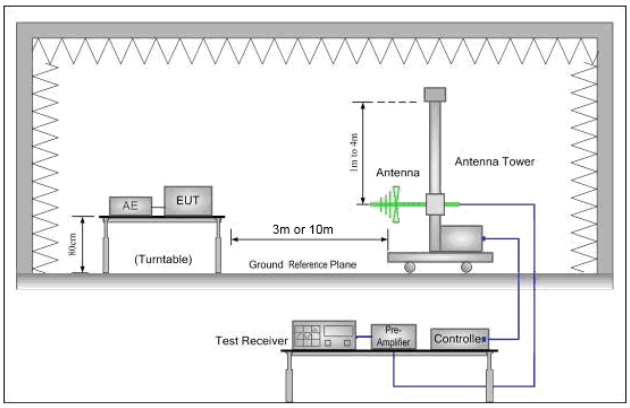

Figure 2. 30MHz to 1GHz

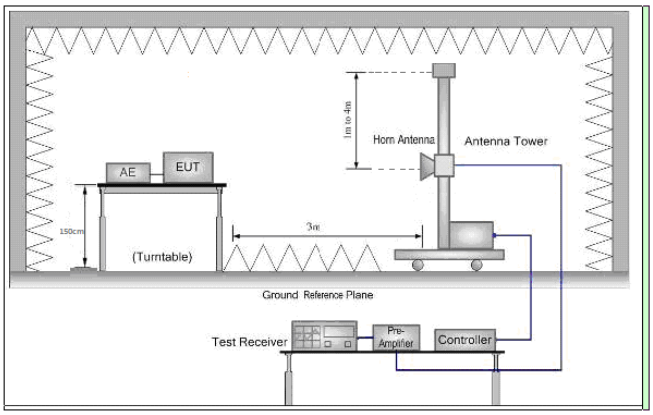

Figure 3. Above 1 GHz

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel ,the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW ⩾ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW ⩾ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Charge + Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass
Remark:	The Emission Test is performed by the Lab B

4.11.1 Radiated Emission below 1GHz

4.11.1.1 Charge + Transmitting

Test Graph

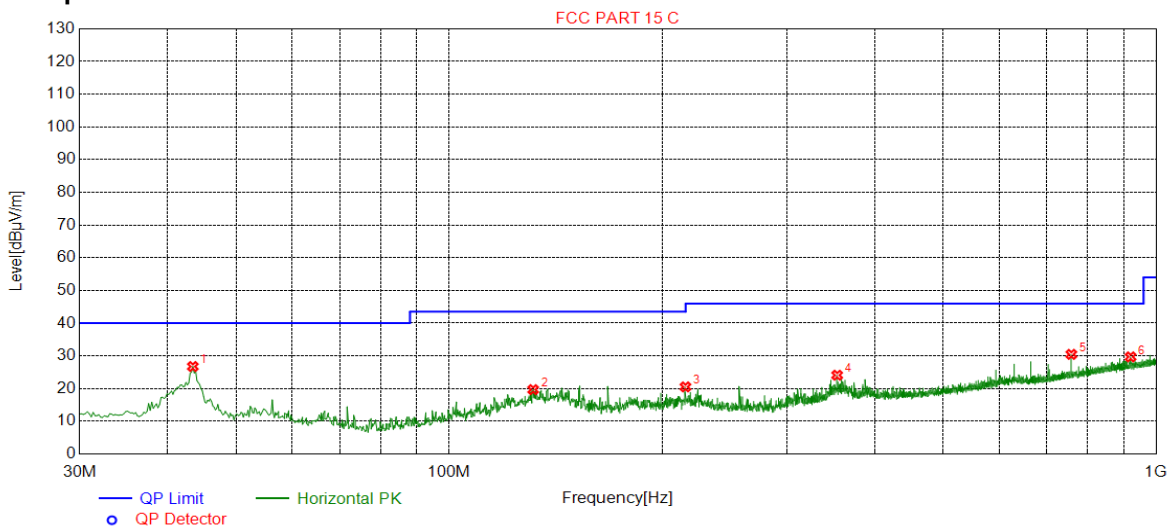

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.3887	26.76	-29.76	40.00	13.24	145	309	Horizontal
2	131.4823	19.69	-35.15	43.50	23.81	256	213	Horizontal
3	215.8892	20.53	-30.82	43.50	22.97	345	207	Horizontal
4	353.8508	24.10	-26.76	46.00	21.90	198	196	Horizontal
5	758.8098	30.47	-18.23	46.00	15.53	203	204	Horizontal
6	920.2501	29.70	-15.81	46.00	16.30	156	196	Horizontal

Final Data List

Test Graph

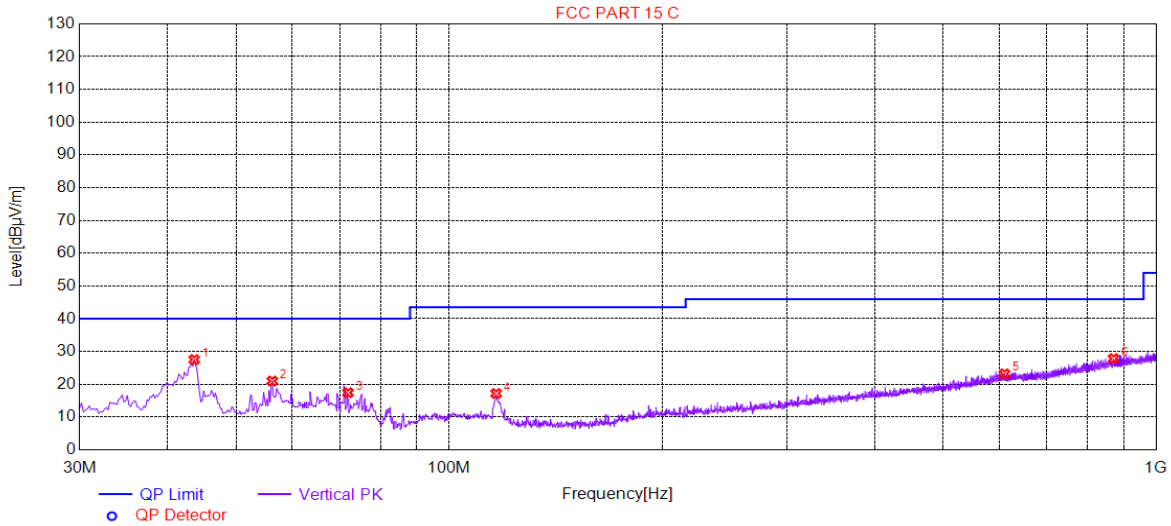

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.5827	27.54	-29.84	40.00	12.46	176	62	Vertical
2	56.1952	21.00	-31.30	40.00	19.00	179	344	Vertical
3	71.9124	17.44	-34.73	40.00	22.56	256	161	Vertical
4	116.5413	17.20	-33.03	43.50	26.30	274	212	Vertical
5	610.3701	23.20	-20.51	46.00	22.80	342	306	Vertical
6	870.7702	27.84	-16.53	46.00	18.16	152	79	Vertical

Final Data List

4.11.2 Transmitter Emission above 1GHz

4.11.2.1 GFSK_Channel 0

Test Graph

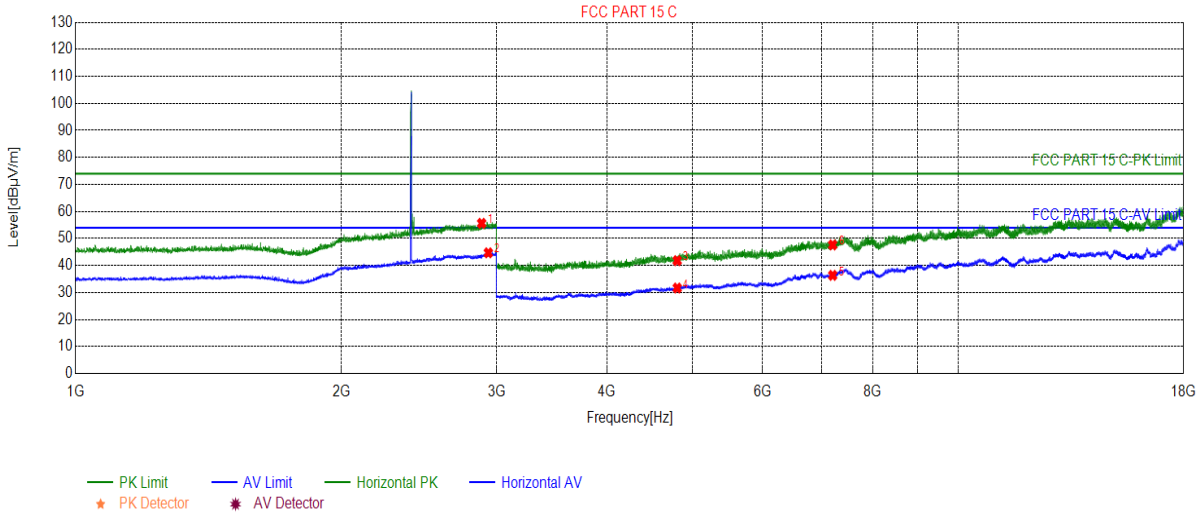

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2884.471	55.61	10.28	74.00	18.39	164	181	Horizontal
2	2934.983	44.69	10.62	54.00	9.31	151	40	Horizontal
3	4804.000	41.81	-17.18	74.00	32.19	186	236	Horizontal
4	4804.000	31.67	-17.18	54.00	22.33	156	133	Horizontal
5	7206.000	36.35	-9.48	54.00	17.65	174	219	Horizontal
6	7206.000	47.61	-9.48	74.00	26.39	201	99	Horizontal

Final Data List

4.11.2.2 GFSK_Channel 0

Test Graph

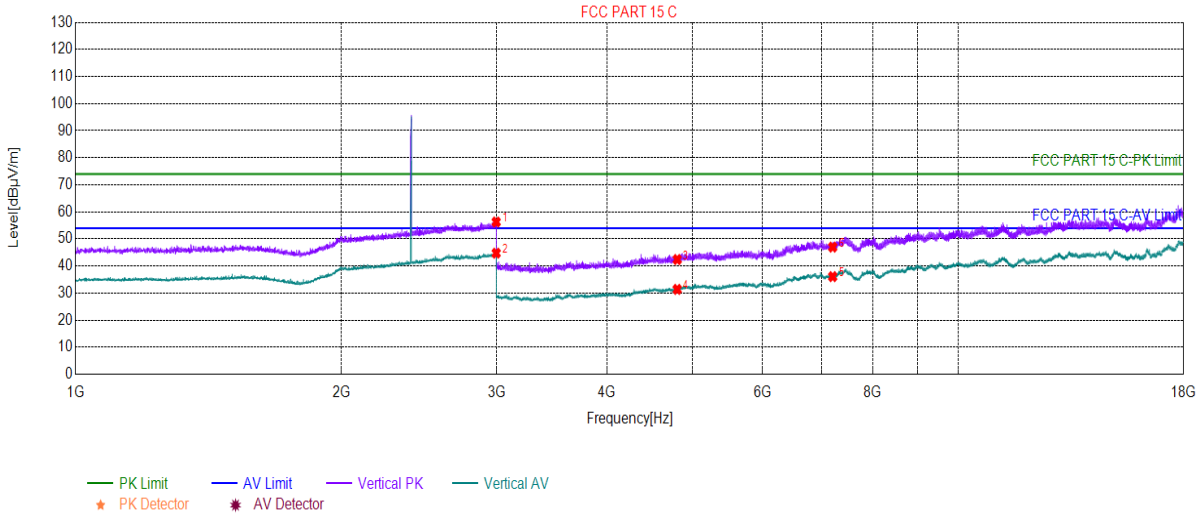

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2995.999	56.27	10.71	74.00	17.73	245	143	Vertical
2	2995.999	44.75	10.71	54.00	9.25	234	247	Vertical
3	4804.000	42.41	-17.18	74.00	31.59	256	159	Vertical
4	4804.000	31.38	-17.18	54.00	22.62	247	73	Vertical
5	7206.000	36.09	-9.48	54.00	17.91	302	142	Vertical
6	7206.000	46.99	-9.48	74.00	27.01	246	108	Vertical

Final Data List

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

4）All Modes have been tested, but only the worst case data displayed in this report.

4.6 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

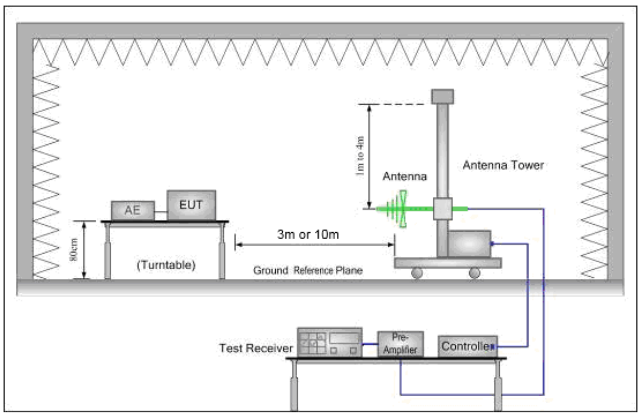

Figure 1. 30MHz to 1GHz

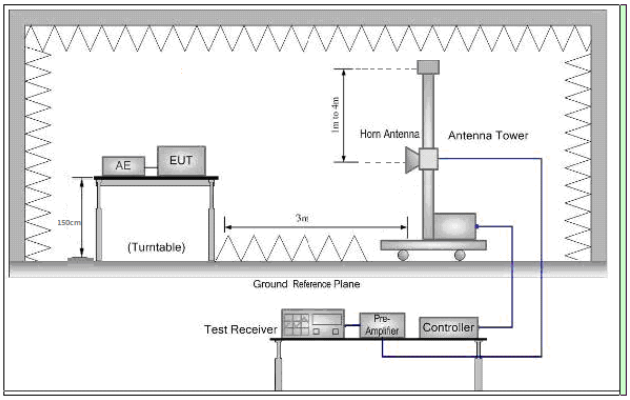

Figure 2. Above 1 GHz

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW ≥ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Charge + Transmitting mode, Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass
Remark:	The Emission Test is performed by the Lab B

4.6.1 Test Plots

4.11.2.3 Worst Case Mode (GFSK(DH5))

4.11.2.4 GFSK_Channel 0

Test Graph

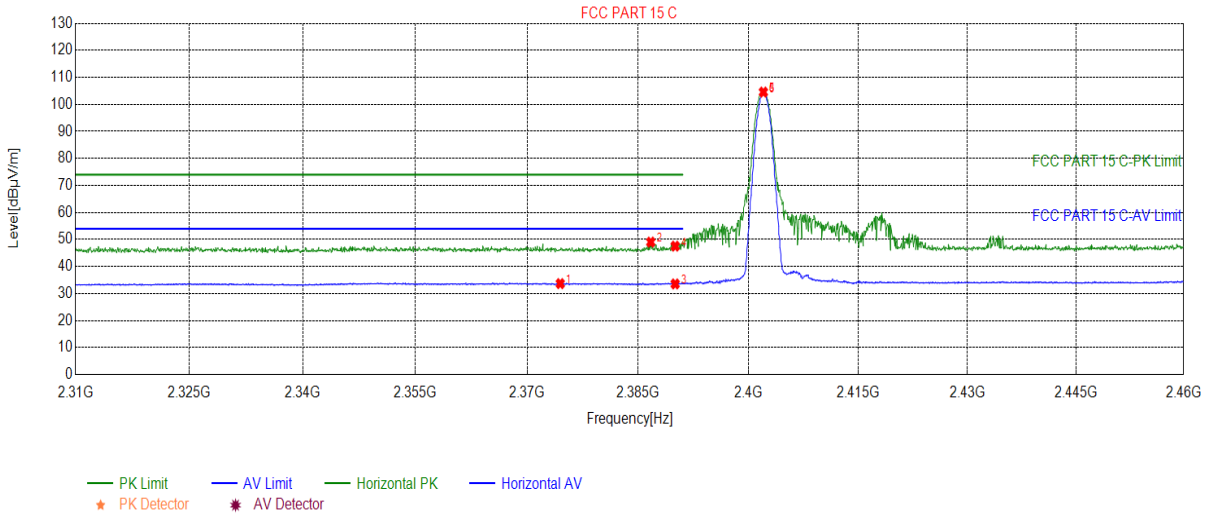

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2374.457	33.66	7.96	54.00	20.34	156	188	Horizontal
2	2386.688	49.03	7.88	74.00	24.97	179	154	Horizontal
3	2390.000	33.55	7.98	54.00	20.45	206	196	Horizontal
4	2390.000	47.53	7.98	74.00	26.47	179	200	Horizontal
5	2402.000	104.55	8.06	0.00	-104.55	165	188	Horizontal
6	2402.000	104.43	8.06	0.00	-104.43	179	184	Horizontal

Final Data List

4.11.2.5 GFSK_Channel 0

Test Graph

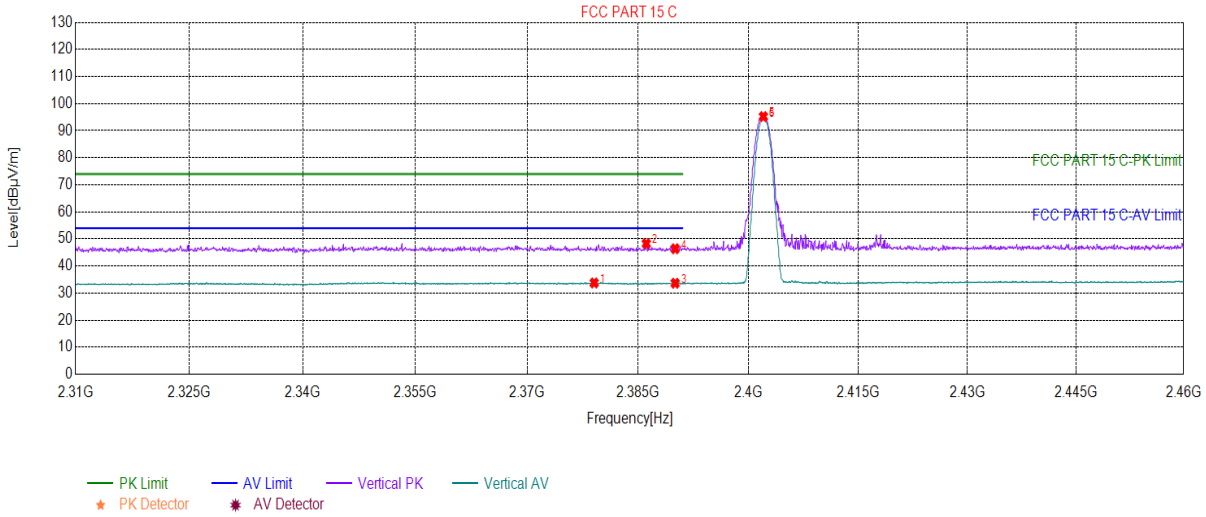

Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2379.034	33.75	7.99	54.00	20.25	256	286	Vertical
2	2386.088	48.29	7.86	74.00	25.71	234	335	Vertical
3	2390.000	33.65	7.98	54.00	20.35	264	84	Vertical
4	2390.000	46.39	7.98	74.00	27.61	305	149	Vertical
5	2402.000	95.20	8.06	0.00	-95.20	241	335	Vertical
6	2402.000	95.09	8.06	0.00	-95.09	231	335	Vertical

Final Data List

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
All Modes have been tested, but only the worst case data displayed in this report.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Measurement Uncertainty (95% confidence levels, k=2)

Lab A:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB

Lab B:

No.	Item	Measurement Uncertainty
1	Radiated Spurious emission test	±4.8dB (30MHz-1GHz)
		±5.2dB (1GHz-6GHz)
		±5.5dB (6GHz-18GHz)
		±5.02dB (18GHz-40GHz)
2	Conduct emission test	±3.4 dB (9KHz- 30MHz)

6 Equipment List

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2020/7/15	2021/7/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2021/1/3	2022/1/2
				2020/1/4	2021/1/3
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/7/14	2021/7/14
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2020/10/27	2021/10/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/14

RSE&RE&CE Test System					
Equipment	**Manufacturer**	**Model No.**	**Cal Date**	**Cal Due Date**	**Inventory No.**
Semi-Anechoic Chamber	Brilliant-emc	966	NCR	NCR	XAW03-35-01
MXA signal analyzer	Keysight	N9020A	2020-04-02	2021-04-02	XAW01-06-01
Radio communication analyzer	ROHDE&SCHWARZ	CMW 500	2020-04-02	2021-04-02	XAW01-03-02
Test receiver	ROHDE&SCHWARZ	ESR	2020-09-11	2021-09-10	XAW01-08-01
Receiving antenna	Rosenberger	VULB 9163	2019-10-13	2021-10-12	XAW01-09-01
Receiving antenna	Rosenberger	BBHA 9120D	2019-10-13	2021-10-12	XAW01-09-02
Receiving antenna	Rosenberger	BBHA 9170	2019-10-13	2021-10-12	XAW01-09-03
Directional antenna rack controller	Max-Full	MF-7802BS	NCR	NCR	XAW03-03-01
High-speed antenna rack controller	Max-Full	MF-7802	NCR	NCR	XAW03-04-01
Filter bank	Tonscend	JS0806-F	NCR	NCR	XAW03-05-01
Filter bank	Tonscend	JS0806s	NCR	NCR	XAW03-05-02
Amplifier	Tonscend	TAP00903040	2020-10-26	2021-10-25	XAW01-41-01
Amplifier	Tonscend	TAP01018048	2020-10-26	2021-10-25	XAW01-41-02
Amplifier	Tonscend	TAP18040048	2020-10-26	2021-10-25	XAW01-41-03
Amplifier	Shanghai Steed	YX28980930	2020-10-26	2021-10-25	XAW01-41-06
Artificial network	ROHDE&SCHWARZ	ENV216	2020-08-04	2021-08-03	XAW01-19-02
Temperature and humidity meter	MingGao	TH101B	2020-06-11	2021-05-11	XAW01-01-01
Measurement Software	Tonscend	TS+ RSE&RE	NCR	NCR	XAW02-05-01
Measurement Software	Tonscend	TS+ CE	NCR	NCR	XAW02-05-02

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7 Photographs - EUT Constructional Details

Refer to Appendix A PCE&NII&DTS&DSS Setup Photos.

The End

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch (Technical Service Co. Ltd.) EMC Laboratory.
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com