

Report No.: ZR/2020/C004305

Page: 1 of 31

FCC TEST REPORT

Application No.: ZR/2020/C0043

Applicant: Sony Mobile Communications, Inc.

Address of Applicant 4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

Manufacturer: Sony Mobile Communications, Inc.

Address of Manufacturer 4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan **EUT Description:** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC

Model No.:

FCC ID: PY7-76625R

47 CFR FCC Part 2, Subpart J Standards:

47 CFR Part 15, Subpart C

Date of Receipt: 2021/1/10

Date of Test: 2021/1/10 to 2021/3/15

Date of Issue: 2021/4/21

Test Result: PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derale yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/C004305

Page: 2 of 31

1 Version

	Revision Record					
Version	Chapter	Date	Modifier	Remark		
01		2021-03-18		Original		
02		2021-04-21	Eason Wang	Update equipment list		

Authorized for issue by:	
Prepared By	(Eason Wang) /Engineer
Checked By	Dand Chen (David Chen) /Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documentations. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/C004305

3 of 31 Page:

Test Summary 2

Test Item	Test Requirement	Test Method	Result	Remark	Test Lab*
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	-	See Note	-
Duty Cycle			PASS	-	Α
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	PASS	-	Α
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	-	See Note	-
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	-	See Note	-
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	-	See Note	-
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	-	See Note	-
Radiated Spurious Emissions	15.247(d);15.205/15.209	ANSI C63.10 2013	PASS	-	В
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d);15.205/15.209	ANSI C63.10 2013	PASS	-	В

Note:The RF circuit, output power level and antenna performance is the same in WLAN function across all two FCC ID PY7-54955X and PY7-76625R, since the change, only verify RF output power and radiated spurious emission test data the worst mode was reported in this report.





Report No.: ZR/2020/C004305

Page: 4 of 31

Contents

1	versi	on	
2	Test \$	Summary	3
3	Gene	ral Information	5
	3.1	Details of Client	5
	3.2	Test Location	5
	3.3	Test Facility	6
	3.4	General Description of EUT	7
	3.5	Test Environment and Mode	8
	3.6	Description of Support Units	
4	Test ı	results and Measurement Data	
	4.1	Antenna Requirement	9
	4.2	Duty Cycle	
	4	4.2.1 Test Result	
	4	4.2.2 Test Graphs	11
	4.3	Conducted Output Power	
	4.4	Radiated Spurious Emissions	
	4	4.4.1 Radiated emission below 1GHz	
		4.4.2 Transmitter emission above 1GHz	
	4.5	Restricted bands around fundamental frequency	
	4	4.5.1 Test Plots	
5		urement Uncertainty (95% confidence levels, k=2)	
6		oment List	
7		ographs - EUT Constructional Details	
		mum conducted output power	
		Test Result	





Report No.: ZR/2020/C004305

5 of 31 Page:

General Information 3

3.1 Details of Client

Applicant:	Sony Mobile Communications, Inc.
Address of Applicant	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Manufacturer:	Sony Mobile Communications, Inc.
Address of Manufacturer	4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

3.2 Test Location

Lab A:

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Test Engineer:	Dee Zheng, Mike Hu

I ab B:

Eud D.	
Company:	SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD.
Address:	1/F, Unit D, Building 1, Kanghong Orange Technology Park, No.137, Keyuan 3rd Road, Fengdong New City, Xi'an, Shaanxi China
Post code:	710086
Test Engineer:	Ben Huang





Report No.: ZR/2020/C004305

6 of 31 Page:

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC -Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

Lab B:

• A2LA (Certificate No. 4854.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (XI 'AN) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4854.01.

• FCC -Designation Number: CN1271





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck-Ress comp.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594



Report No.: ZR/2020/C004305

7 of 31 Page:

3.4 General Description of EUT

EUT Description:	GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS and NFC
Trade Mark:	Sony
S/N:	005059ADNVM2
IEEE 802.11 WLAN Mode Supported	 ⋈ 802.11B (20 MHz channel bandwidth), ⋈ 802.11G (20 MHz channel bandwidth) ⋈ 802.11N (20 MHz channel bandwidth), ⋈ 802.11N (40 MHz channel bandwidth)
Operation Frequency:	2400 MHz -2483.5MHz fc = 2407 MHz + N * 5 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth, or 3 to 9 for the 40 MHz channel bandwidth.
Type of Modulation:	IEEE for 802.11B: DSSS IEEE for 802.11G : OFDM IEEE for 802.11N(HT20) : OFDM
Sample Type:	⊠ Portable Device, ☐Module
Antenna Type:	☐ External, ⊠ Integrated
Antenna Ports	⊠ Ant 1, ⊠ Ant 2, □ Ant 3
Smart System	 SISO (for 802.11B/G/N), MIMO (for 802.11B/G/N): 2 Tx & 2 Rx, □ Diversity (for 802.11B/G): Tx & Rx
Antenna Gain:	2.0dBi(ANT1); -3.0dBi(ANT2);

	Operation Frequency of each channel (802.11B/G/N HT20)								
Channel	Channel Frequency Channel Frequency Channel Frequency Channel Frequence								
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz		
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz		
3	2422MHz	6	2437MHz	9	2452MHz				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/C004305

8 of 31 Page:

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency for 802.11B/G/N (HT20)
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

3.5 Test Environment and Mode

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	50 % RH		
Atmospheric Pressure:	101.30 KPa		
Test mode:			
Modulation	Data Rate		
802.11B	1Mbps		
802.11G	6Mbps		
802.11N HT20	MCS0		

3.6 Description of Support Units

The EUT has been tested independent unit.





Report No.: ZR/2020/C004305

Page: 9 of 31

Test results and Measurement Data 4

4.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.0dBi.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulles extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:To check the authenticity of testing inspection report & certificate, passecontact us at telephone: (86-755) 8307 1443.**

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/C004305

Page: 10 of 31

4.2 Duty Cycle

4.2.1 **Test Result**

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
11B	Ant2	2412	12.30	12.40	99.19		PASS
11G	Ant1	2462	2.03	2.07	98.07		PASS
11N20SISO	Ant1	2412	1.90	1.93	98.45		PASS






Report No.: ZR/2020/C004305

11 of 31 Page:

4.2.2 **Test Graphs**

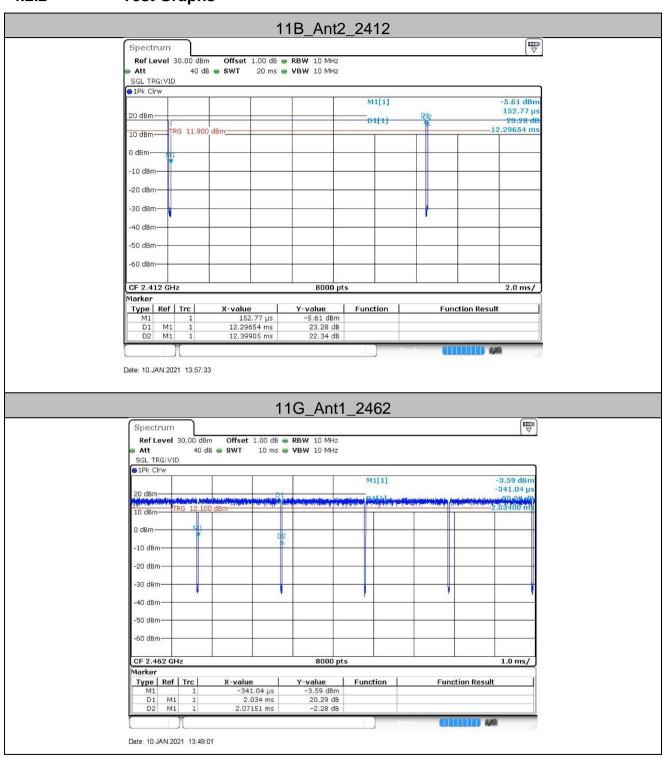



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documentations. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/C004305

12 of 31 Page:

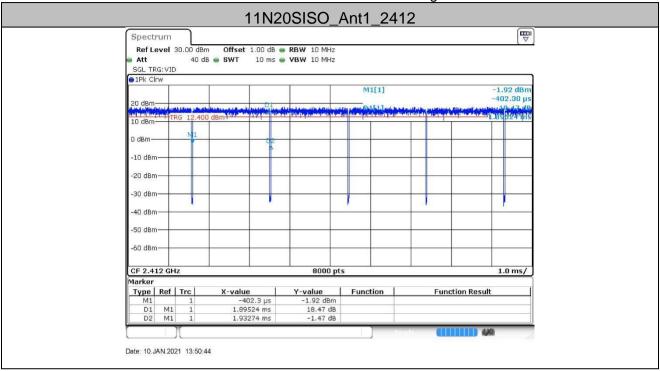






Report No.: ZR/2020/C004305

13 of 31 Page:

4.3 Conducted Output Power

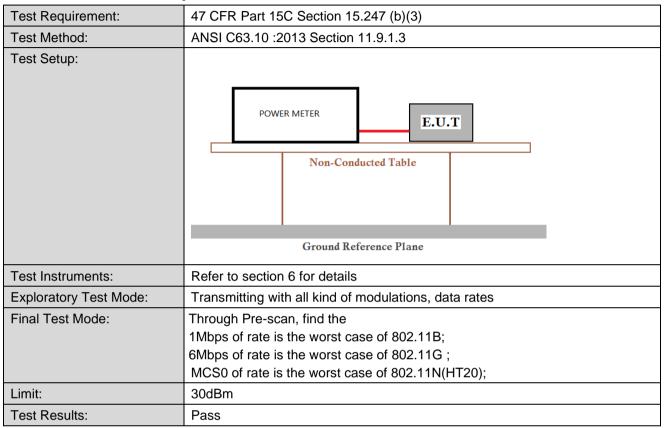

The detailed test data see: Appendix





Report No.: ZR/2020/C004305

Page: 14 of 31

4.4 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section	n 15.209 and 15.20	05					
Test Method:	ANSI C63.10 :2013 Section 11.12							
Test Site:	Measurement Distance:	3m or 10m (Semi-	Anechoic Ch	namber)				
Limit:	Frequency	Frequency Field strength Limit Remark Measuremen (dBuV/m) Remark distance (m)						
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz 30 30							
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Remark: 15.35(b),Unless otherwise specified, the limit on peak radio frequency							
	emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							






Report No.: ZR/2020/C004305

15 of 31 Page:

Test Setup:

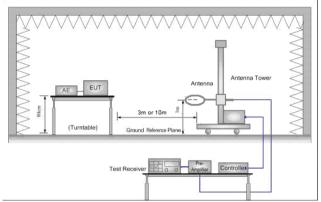

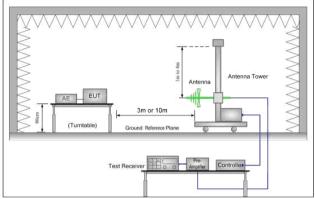


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

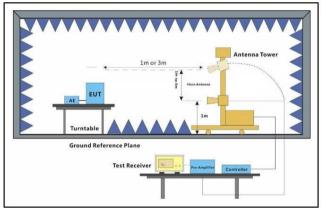


Figure 3. Above 1 GHz

Test Procedure:

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issue defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/C004305

16 of 31 Page:

	would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel ,the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.
Test Configuration:	 Neasurements Below 1000MHz RBW = 120 kHz VBW = 300 kHz Detector = Peak Trace mode = max hold Peak Measurements Above 1000 MHz RBW = 1 MHz VBW ≥ 3 MHz Detector = Peak Sweep time = auto Trace mode = max hold Average Measurements Above 1000MHz RBW = 1 MHz VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum k. transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Charge + Transmitting mode. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11B; 6Mbps of rate is the worst case of 802.11G; MCS0 of rate is the worst case of 802.11N(HT20); For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11B at lowest channel is the worst case. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass
Remark:	The Emission Test is performed by the Lab B






Report No.: ZR/2020/C004305

Page: 17 of 31

4.4.1 Radiated emission below 1GHz

4.4.1.1 **Charge + Transmitting**

Test Graph

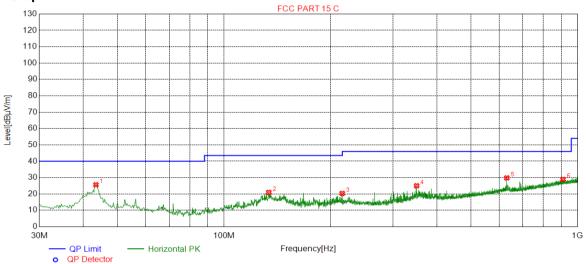

Suspected List

Suspe	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.3887	25.65	-29.76	40.00	14.35	202	11	Horizontal
2	133.8108	20.98	-35.26	43.50	22.52	242	199	Horizontal
3	215.8892	20.35	-30.82	43.50	23.15	156	193	Horizontal
4	350.5521	25.03	-26.85	46.00	20.97	146	230	Horizontal
5	630.7441	29.84	-20.26	46.00	16.16	203	310	Horizontal
6	909.5779	28.91	-15.92	46.00	17.09	247	295	Horizontal

Final Data List






Report No.: ZR/2020/C004305

Page: 18 of 31

Test Graph

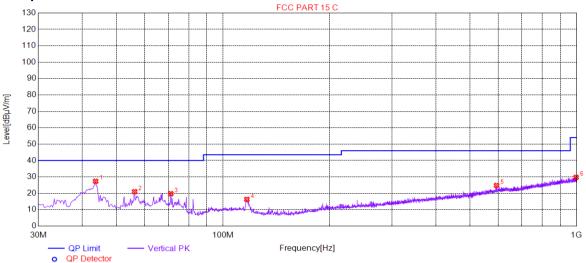

Suspected List

	tica List											
Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	43.5827	27.36	-29.84	40.00	12.64	156	355	Vertical				
2	56.1952	21.01	-31.30	40.00	18.99	123	19	Vertical				
3	71.1362	19.78	-34.59	40.00	20.22	189	255	Vertical				
4	116.7353	16.33	-33.06	43.50	27.17	196	344	Vertical				
5	593.8768	24.83	-20.80	46.00	21.17	176	14	Vertical				
6	997.0894	29.76	-14.83	54.00	24.24	156	14	Vertical				

Final Data List






Report No.: ZR/2020/C004305

Page: 19 of 31

Transmitter emission above 1GHz 4.4.2

4.4.2.1 802.11G Channel 11

Test Graph

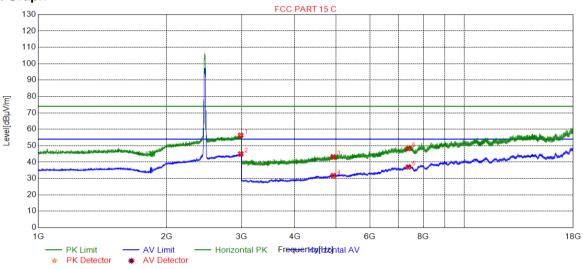

Suspected List

Cacpee								
Suspe	ected List							
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2983.996	56.31	10.61	74.00	17.69	156	212	Horizontal
2	2987.496	44.95	10.59	54.00	9.05	179	280	Horizontal
3	4924.000	43.10	-16.54	74.00	30.90	203	201	Horizontal
4	4924.000	31.76	-16.54	54.00	22.24	165	115	Horizontal
5	7386.000	37.01	-8.98	54.00	16.99	197	286	Horizontal
6	7386.000	48.24	-8.98	74.00	25.76	178	286	Horizontal

Final Data List






Report No.: ZR/2020/C004305

20 of 31 Page:

802.11G Channel 11 4.4.2.2

Test Graph

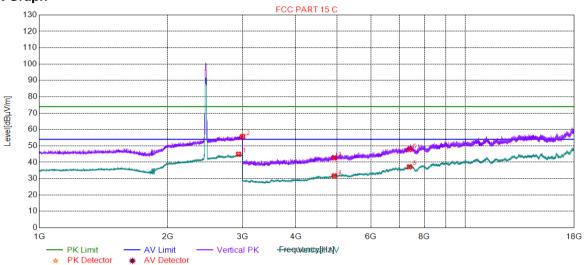

Suspected List

Suspe	Suspected List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2935.483	44.93	10.61	54.00	9.07	207	346	Vertical			
2	3000.000	55.76	10.78	74.00	18.24	279	305	Vertical			
3	4924.000	42.67	-16.54	74.00	31.33	237	109	Vertical			
4	4924.000	31.71	-16.54	54.00	22.29	301	346	Vertical			
5	7386.000	37.08	-8.98	54.00	16.72	247	228	Vertical			
6	7386.000	47.78	-8.98	74.00	26.22	256	211	Vertical			

Final Data List

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz and 18GHz to 25GHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
- 4) All Modes have been tested, but only the worst case data displayed in this report.






Report No.: ZR/2020/C004305

Page: 21 of 31

4.5 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 2	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2013 Section	n 11.12							
Test Site:	Measurement Distance: 3n	n or 10m (Semi-Anechoic	Chamber)						
Limit:	Frequency	Frequency Limit (dBuV/m) Remark							
	30MHz-88MHz	30MHz-88MHz 40.0 Quasi-							
	88MHz-216MHz	88MHz-216MHz 43.5 Quasi-peak							
	216MHz-960MHz	46.0	Quasi-peak						
	960MHz-1GHz	54.0	Quasi-peak						
	Ab 2112 401 b	54.0 Average Value							
	Above 1GHz	Above 1GHz 74.0 Peak Value							
Test Setup:		<u>. </u>							

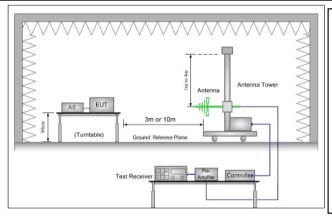

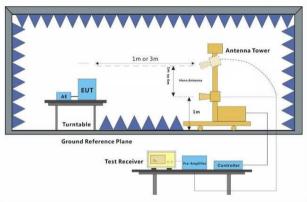


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz





Report No.: ZR/2020/C004305

22 of 31 Page:

Test Procedure: For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. **Test Configuration:** Measurements Below 1000MHz RBW = 120 kHz VBW = 300 kHz Detector = Peak Trace mode = max hold Peak Measurements Above 1000 MHz RBW = 1 MHz VBW ≥ 3 MHz Detector = Peak Sweep time = auto Trace mode = max hold Average Measurements Above 1000MHz RBW = 1 MHz VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. **Exploratory Test Mode:** Transmitting with all kind of modulations, data rates. Charge + Transmitting mode.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or small: CND Doccheck-Regiss complexity.)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594



Report No.: ZR/2020/C004305

Page: 23 of 31

Final Test Mode:	Pretest the EUT at Charge + Transmitting mode.
	Through Pre-scan, find the
	1Mbps of rate is the worst case of 802.11B;
	6Mbps of rate is the worst case of 802.11G;
	MCS0 of rate is the worst case of 802.11N(HT20);
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass
Remark:	The Emission Test is performed by the Lab B






Report No.: ZR/2020/C004305

Page: 24 of 31

Test Plots 4.5.1

802.11N20 Channel 1 4.5.1.1

Test Graph

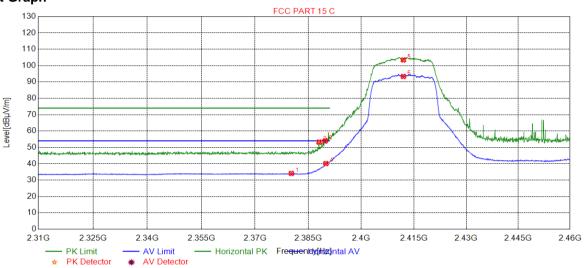

Suspected List

Suspe	Suspected List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	2380.235	34.09	7.99	54.00	19.91	111	358	Horizontal				
2	2388.039	53.24	7.92	74.00	20.76	130	178	Horizontal				
3	2389.764	53.99	7.98	74.00	20.01	153	162	Horizontal				
4	2390.000	40.15	7.98	54.00	13.85	250	166	Horizontal				
5	2412.000	103.46	8.16	0.00	-103.46	260	193	Horizontal				
6	2412.000	93.37	8.16	0.00	-93.37	154	166	Horizontal				

Final Data List






Report No.: ZR/2020/C004305

25 of 31 Page:

802.11N20 Channel 1 4.5.1.2

Test Graph

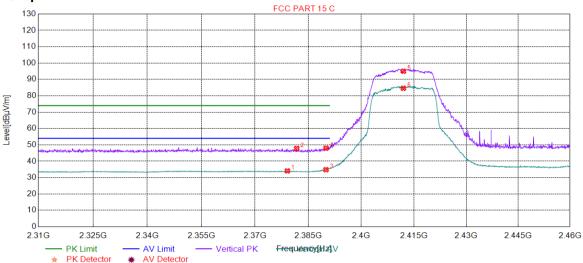

Suspected List

Suspe	Suspected List										
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity			
1	2379.109	34.11	7.99	54.00	19.89	203	77	Vertical			
2	2381.735	47.84	7.94	74.00	26.16	249	126	Vertical			
3	2390.000	34.86	7.98	54.00	19.14	305	324	Vertical			
4	2390.000	47.97	7.98	74.00	26.03	247	5	Vertical			
5	2412.000	95.05	8.16	0.00	-95.05	273	259	Vertical			
6	2412.000	84.62	8.16	0.00	-84.62	245	8	Vertical			

Final Data List

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor All Modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of ilability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

sgs.china@sgs.com



Report No.: ZR/2020/C004305

Page: 26 of 31

5 Measurement Uncertainty (95% confidence levels, k=2)

Lab A:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB

Lab B:

No.	Item	Measurement Uncertainty		
		±4.8dB (30MHz-1GHz)		
4	Dedicted Courieus arrivaies test	±5.2dB (1GHz-6GHz)		
1	Radiated Spurious emission test	±5.5dB (6GHz-18GHz)		
		±5.02dB (18GHz-40GHz)		
2	Conduct emission test	±3.4 dB (9KHz- 30MHz)		





Report No.: ZR/2020/C004305

Page: 27 of 31

Equipment List

RF conducted						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)	
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2020/4/16	2021/4/15	
DC Power Supply	Rohde & Schwarz	HMP2020	W009-08	2020/7/15	2021/7/15	
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/13	
Humidity/ Temperature Indicator	· IMPTEOTOTOTICAL INDUSTRY		W006-17	2020/4/21	2021/4/20	

CE Test System						
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date	
Shielding Room	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10	
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10	
Artificial network	ROHDE&SCHWARZ	ENV216	XAW01-04-01	2020-08-04	2021-08-03	
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2020-11-06	2021-11-05	
Measurement Software	Tonscend	TS+ CE V2.5	XAW02-05-02	NCR	NCR	





Report No.: ZR/2020/C004305

Page: 28 of 31

RSE Test System						
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date	
Semi-Anechoic Chamber	Brilliant-emc	N/A	XAW03-35-01	2019-09-11	2022-09-10	
MXA signal analyzer	Keysight	N9020A	XAW01-06-01	2020-04-02	2021-04-01	
Test receiver	ROHDE&SCHWARZ	ESR	XAW01-08-01	2020-09-11	2021-09-10	
Receiving antenna (30MHz-3GHz)	Schwarzbeck	VULB 9163	XAW01-09-01	2019-10-13	2021-10-12	
Receiving antenna (1GHz~18GHz)	Schwarzbeck	BBHA 9120D	XAW01-09-02	2019-10-13	2021-10-12	
Receiving antenna (15GHz~40GHz)	Schwarzbeck	BBHA 9170	XAW01-09-03	2019-10-13	2021-10-12	
Directional antenna rack controller	Max-Full	MF-7802BS	XAW03-03-01	NCR	NCR	
High-speed antenna rack controller	Max-Full	MF-7802	XAW03-04-01	NCR	NCR	
Filter bank	Tonscend	JS0806-F	XAW03-05-01	NCR	NCR	
Filter bank	Tonscend	JS0806s	XAW03-05-02	NCR	NCR	
Amplifier	Tonscend	TAP00903040	XAW01-41-01	2020-10-26	2021-10-25	
Amplifier	Tonscend	TAP01018048	XAW01-41-02	2020-10-26	2021-10-25	
Amplifier	Tonscend	TAP18040048	XAW01-41-03	2020-10-27	2021-10-26	
Amplifier	Shanghai Steed	YX28980930	XAW01-41-06	2020-10-26	2021-10-25	
Temperature and humidity meter	MingGao	TH101B	XAW01-01-01	2020-11-06	2021-11-05	
Measurement Software Tonscend		TS+ RSE V3.0.0.2	XAW02-05-01	NCR	NCR	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documentations. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized attention, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/C004305

Page: 29 of 31

7 **Photographs - EUT Constructional Details**

Refer to Appendix A PCE&NII&DTS&DSS Setup Photos.





Report No.: ZR/2020/C004305

30 of 31 Page:

Appendix





Report No.: ZR/2020/C004305

Page: 31 of 31

Maximum conducted output power **Test Result**

TestMode	Antenna	Channel	Result[dBm]	Verdict
11B	Ant2	2412	15.51	PASS

The End

