



SAR EVALUATION REPORT

IEEE Std 1528-2013

For

GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC

FCC ID: PY7-76709C

PY7-54773M

Report Number: R15110027-S4

Issue Date: 2024-04-15

Prepared for

Sony Corporation

1-7-1 Konan Minato-ku

Tokyo, 108-0075, Japan

Prepared by

UL LLC

12 LABORATORY DR

RTP, NC 27709, U.S.A.

TEL: (919) 549-1400



Revision History

Rev.	Date	Revisions	Revised By
V1	2024-04-15	Initial Issue	--

Table of Contents

1. Attestation of Test Results..... 5

2. Test Specification, Methods and Procedures..... 7

3. Facilities and Accreditation..... 8

4. SAR Measurement System & Test Equipment 9

 4.1. SAR Measurement System 9

 4.2. SAR Scan Procedures..... 10

 4.3. Test Equipment 12

5. Measurement Uncertainty 14

6. Device Under Test (DUT) Information 15

 6.1. DUT Description 15

 6.2. Wireless Technologies 16

 6.3. General LTE SAR Test and Reporting Considerations 18

 6.4. LTE (TDD) Considerations 21

 6.5. General NR(FR1) SAR Test and Reporting Considerations..... 22

 6.6. Power Back-off Operation..... 23

7. RF Exposure Conditions (Test Configurations) 23

8. Dielectric Property Measurements & System Check 24

 8.1. Dielectric Property Measurements..... 24

 8.2. System Check..... 26

9. Conducted Output Power Measurements..... 28

 9.1. GSM 28

 9.2. W-CDMA 31

 9.3. LTE 36

 9.4. 5G NR (FR1) 54

 9.5. Wi-Fi 2.4GHz (DTS Band) 55

 9.6. Wi-Fi 5GHz (U-NII Bands) 57

 9.7. Bluetooth 62

10. Measured and Reported (Scaled) SAR Results..... 64

 10.1. GSM 850..... 66

 10.2. GSM 1900..... 66

 10.3. W-CDMA II..... 67

 10.4. W-CDMA IV 67

 10.5. W-CDMA V 67

10.6. *LTE Band 2 (20MHz Bandwidth)*..... 68

10.7. *LTE Band 4 (20MHz Bandwidth)*..... 69

10.8. *LTE Band 5 (10MHz Bandwidth)*..... 69

10.9. *LTE Band 12 (10MHz Bandwidth)*..... 70

10.10. *LTE Band 13 (10MHz Bandwidth)*..... 70

10.11. *LTE Band 41 (20MHz Bandwidth)*..... 71

10.12. *NR n66 (20MHz Bandwidth)* 71

10.13. *Wi-Fi (DTS Band)*..... 72

10.14. *Wi-Fi (U-NII Band)*..... 73

10.15. *Bluetooth*..... 79

10.16. *NFC*..... 79

11. SAR Measurement Variability **80**

12. Simultaneous Transmission Conditions..... **81**

12.1. *Simultaneous transmission SAR test exclusion considerations*..... 81

12.2. *Sum of the SAR for WWAN Cellular Main 1 & Wi-Fi Normal State & BT*..... 82

12.3. *Sum of the SAR for WWAN Cellular Main 1 & Wi-Fi Simultaneous 2G_5G State*..... 82

12.4. *Sum of the SAR for WWAN Cellular Main 2 & Wi-Fi Normal State & BT*..... 82

12.5. *Sum of the SAR for WWAN Cellular Main 2 & Wi-Fi Simultaneous 2G_5G State*..... 83

12.6. *Sum of the SAR for DC_2A_n66A & Wi-Fi Normal State & BT* 83

12.7. *Sum of the SAR for DC_2A_n66A & Wi-Fi Simultaneous 2G_5G State*..... 83

12.8. *Sum of the SAR for DC_13A_n66A & Wi-Fi Normal State & BT* 83

12.9. *Sum of the SAR for DC_13A_n66A & Wi-Fi Simultaneous 2G_5G State*..... 83

12.10. *Sum of the SAR for Wi-Fi Normal State & NFC*..... 84

Appendixes..... 85

Appendix A: SAR Setup Photos 85

Appendix B: SAR System Check Plots..... 85

Appendix C: SAR Highest Test Plots 85

Appendix D: SAR Tissue Ingredients 85

Appendix E: SAR Probe Certificates 85

Appendix F: SAR Dipole Certificates..... 85

1. Attestation of Test Results

Applicant Name		Sony Corporation				
FCC ID		PY7-76709C PY7-54773M				
Applicable Standards		Published RF exposure KDB procedures IEEE Std 1528-2013				
Exposure Category		SAR Limits (W/Kg)				
		Peak spatial-average (1g of tissue)			Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure		1.6			4	
RF Exposure Conditions: PY7-76709C		Equipment Class - Highest Reported SAR (W/kg)				
		PCE	DTS	NII	DSS	NFC
Head		0.407	0.526	0.301	0.202	N/A
Body-worn*		0.412	0.248	0.140	0.174	N/A
Hotspot/BT Tethering		0.428	0.248	0.140	0.174	N/A
Extremity (10g)		N/A	N/A	0.292	N/A	0.021
Simultaneous TX	Head/Body- worn/Hotspot/ BT Tethering (1g)	1.205	1.205	1.205	1.193	N/A
	Extremity (10g)	N/A	N/A	0.563	N/A	0.563
Date Tested		2024-01-04 to 2024-03-29				
Test Results		Pass				
RF Exposure Conditions: PY7-54773M		Equipment Class - Highest Reported SAR (W/kg)				
		PCE	DTS	NII	DSS	NFC
Head		0.132	0.526	0.301	0.202	N/A
Body-worn*		0.378	0.248	0.140	0.174	N/A
Hotspot/BT Tethering		0.378	0.248	0.140	0.174	N/A
Extremity (10g)		N/A	N/A	0.292	N/A	0.021
Simultaneous TX	Head/Body- worn/Hotspot/ BT Tethering (1g)	0.794	0.787	0.787	0.775	N/A
	Extremity (10g)	N/A	N/A	0.563	N/A	0.563
Date Tested		2024-01-04 to 2024-03-29				
Test Results		Pass				
<p>*Note: The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.</p>						
<p>Class II Permissive Change Note:</p> <p>The intent of the Class II Permissive Change is to enable EN-DC capability for PY7-76709C; more specifically, the EN-DC capability includes the addition of EN-DC modes and EN-DC simultaneous transmission combinations to the SAR report.</p>						

Note: Some WWAN conducted output power and SAR data are referenced from **UL report # R15110020-S1** and all WLAN and Bluetooth data is referenced from **UL report # R15110020-S1** to cover PY7-76709C and PY7-54773M. All circuitry and features for leveraged WWAN, WLAN, and Bluetooth operations are identical between their respective variants.

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government, or any agency of the U.S. government.

Approved & Released By:



Richard Jankovics
Staff Engineer
UL LLC

Prepared By:



Lindsay Ryan
Engineer
UL LLC

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB Workshop](#) October 2014; RF Exposure Procedures (Other LTE Considerations)
- [TCB Workshop](#) April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- [TCB Workshop](#) October 2015; RF Exposure Procedures (KDB 941225 D05A)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB Workshop](#) May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- [TCB Workshop](#) April 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))
- [TCB Workshop](#) April 2019; RF Exposure Procedures (802.11ax SAR Testing)

3. Facilities and Accreditation

UL LLC is accredited by A2LA, cert. # 0751.06 for all testing performed within the scope of this report. Testing was performed at the locations noted below.

The test sites and measurement facilities used to collect data are located at 2800 Perimeter Park Dr, Morrisville, NC, USA.


- SAR Lab 1A
- SAR Lab 2A
- SAR Lab 2B

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

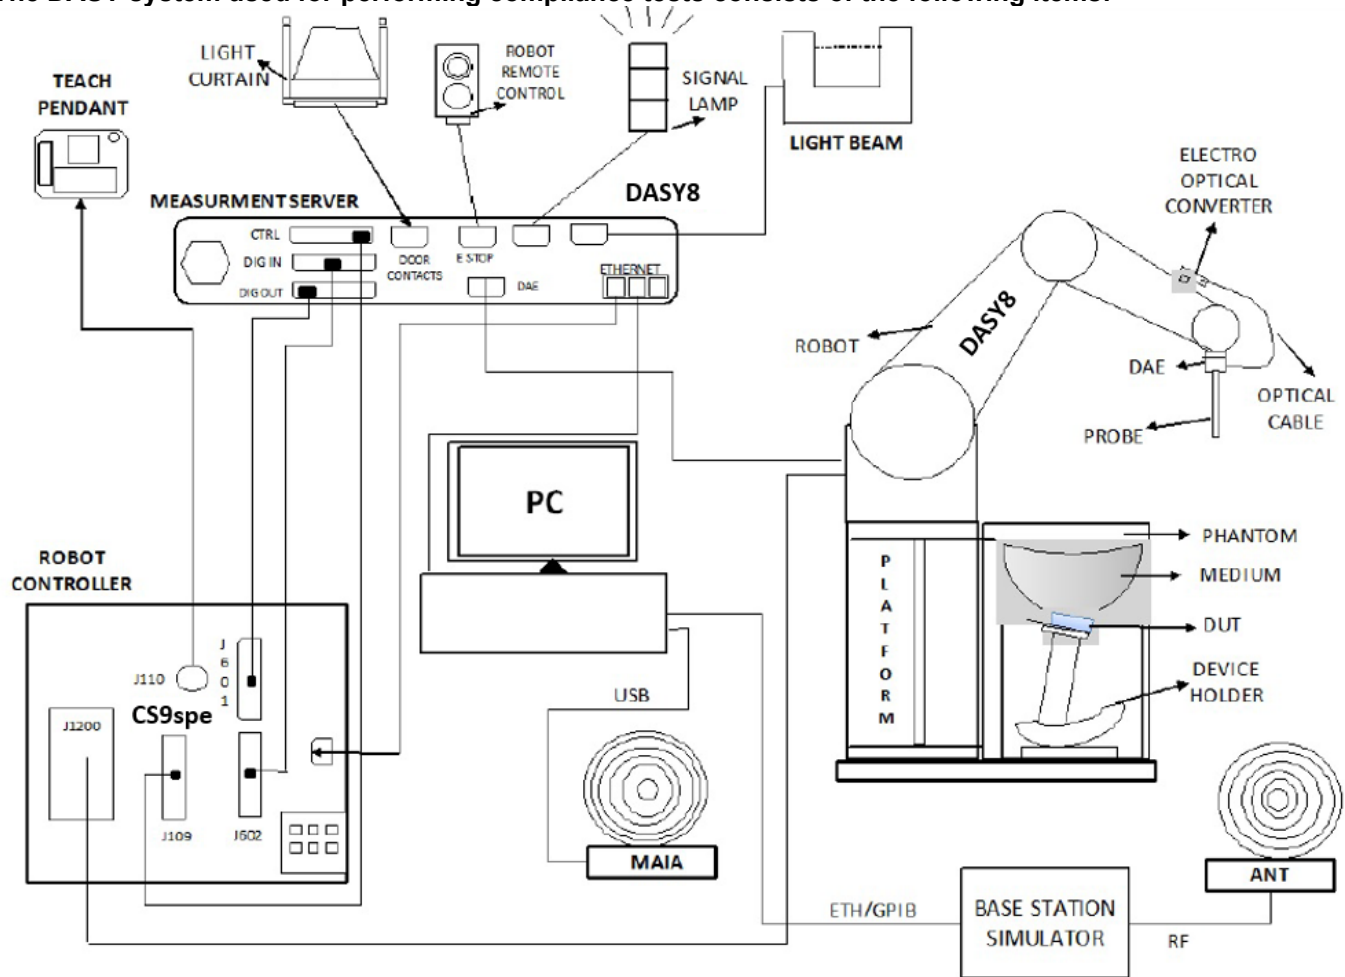

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY8 software used: DASY16.2.4.2521 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm $3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
Network Analyzer	Keysight	E5063A	MY54100681	2023-08-04	2024-08-04
Dielectric Probe	SPEAG	DAKS-3.5	1051	2023-10-25	2024-10-25
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 DA	2023-10-25	2024-10-25
Dielectric Probe	SPEAG	DAKS-12	1037	2023-03-29	2024-03-29
Shorting Block	SPEAG	DAK-12 Short	2044	2023-03-29	2024-03-29
Thermometer	Fisher Scientific	15-078-181	1817705017	2023-03-30	2024-03-30

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
Signal Generator	Keysight	N5181A	MY50140788	2023-08-03	2024-08-03
RF Power Meter	Keysight	N1912A	MY55136012	2023-08-04	2024-08-04
RF Power Sensor	Keysight	N1921A	MY55090023	2023-04-03	2024-04-03
RF Power Sensor	Keysight	N1921A	MY55090030	2023-06-26	2024-06-26
Amplifier	Mini-Circuits	ZVA-183WA-S+	S C484802241	N/A	N/A
Directional Coupler	Mini-Circuits	ZJDC10-183+	2214	NA	NA
Dual Directional Coupler	Werlatone	C5100-10	92249	N/A	N/A
DC Power Supply	Miteq	PS 15V1	1990186	N/A	N/A
RF Power Source	Speag	PowerSource1	4278	2023-06-13	2024-06-13

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
E-Field Probe	SPEAG	EX3DV4	7709	2023-11-30	2024-11-30
E-Field Probe ²	SPEAG	EX3DV4	7710	2024-01-16	2025-01-16
E-Field Probe	SPEAG	EX3DV4	7711	2023-03-29	2024-03-29
Data Acquisition Electronics	SPEAG	DAE4	1714	2023-11-22	2024-11-22
Data Acquisition Electronics ¹	SPEAG	DAE4	1715	2023-01-31	2024-01-31
Data Acquisition Electronics ¹	SPEAG	DAE4	1716	2023-03-16	2024-03-16
Data Acquisition Electronics ²	SPEAG	DAE4	1357	2024-01-09	2025-01-09
System Validation Dipole ¹	SPEAG	CLA13	1017	2023-03-20	2024-03-20
System Validation Dipole	SPEAG	D750V3	1139	2023-10-19	2024-10-19
System Validation Dipole	SPEAG	D900V2	1d180	2023-10-19	2024-10-19
System Validation Dipole	SPEAG	D1750V2	1136	2023-10-20	2024-10-20
System Validation Dipole	SPEAG	D1900V2	5d202	2023-10-19	2024-10-19
System Validation Dipole	SPEAG	D2450V2	963	2023-10-20	2024-10-20
System Validation Dipole	SPEAG	D2600V2	1104	2023-10-20	2024-10-20
System Validation Dipole	SPEAG	D5GHzV2	1213	2023-10-17	2024-10-17
Environmental Indicator ¹	Control Company	06-662-4	200037610	2022-02-24	2024-02-24
Environmental Indicator ¹	Fisher Scientific	Traceable	200037610	2022-02-24	2024-02-24
Environmental Indicator ²	Fisher Scientific	Traceable	240072452	2024-01-24	2026-01-24
Environmental Indicator ²	Fisher Scientific	Traceable	240072459	2024-01-24	2026-01-24

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Date	Cal. Due Date
RF Power Meter	Keysight	N1911a	MY55116001	2023-07-31	2024-07-31
RF Power Meter	Keysight	N1911a	MY55116002	2023-08-02	2024-08-02
RF Power Meter	Keysight	N1912a	MY55136012	2023-08-02	2024-08-02
RF Power Sensor	Keysight	N1921a	MY55120011	2023-07-31	2024-07-31
RF Power Sensor	Keysight	N1921a	MY55090025	2023-08-21	2024-08-21
RF Power Sensor	Keysight	N1921a	MY55090030	2023-06-30	2024-06-30
RF Power Sensor	Keysight	N1921a	MY55090023	2023-04-03	2024-04-03
RF Power Sensor	Keysight	E9323A	MY55110008	2023-08-21	2024-08-21
RF Power Sensor	Boonton Electronics	RTP5008	12001	2023-08-01	2024-08-01
RF Power Sensor	Boonton Electronics	RTP5008	12002	2023-08-01	2024-08-01
RF Power Sensor	Boonton Electronics	RTP5008	11835	2023-08-01	2024-08-01
RF Power Sensor	Boonton Electronics	RTP5008	11997	2023-08-01	2024-08-01
RF Power Sensor	Boonton Electronics	RTP5008	11835	2023-08-01	2024-08-01
Base Station Simulator	R & S	CMW 500	170194	2023-06-06	2024-06-06
Base Station Simulator	Anritsu	MT8821C	6262116751	2023-06-05	2024-06-05
Base Station Simulator	Anritsu	MT8000A	6272354129	2023-06-09	2024-06-09

Note(s):

1. Equipment not used for calibrated measurements past calibration due date.
2. Equipment not used for calibrated measurements prior to the calibration.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A																																												
Back Cover	The Back Cover is not removable																																												
Battery Options	The rechargeable battery is not user accessible.																																												
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.2 GHz and 5.8 GHz)																																												
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other Per Manufacturer, the DUT support only as a group client and not support as a group owner.																																												
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. <input checked="" type="checkbox"/> BT Tethering (Bluetooth 2.4 GHz)																																												
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>QV77001AL2</td> <td>SAR EN-DC (Conducted Power)</td> </tr> <tr> <td>QV77003DL2</td> <td>SAR EN-DC Radiated</td> </tr> <tr> <td>QV770018L2</td> <td>FCC 2G/3G/5G SAR Conducted Main/Sub #1</td> </tr> <tr> <td>QV77000KL2</td> <td>FCC 4G SAR Conducted Main/Sub #2</td> </tr> <tr> <td>QV7700CHLQ</td> <td>FCC SAR #1 2G/3G</td> </tr> <tr> <td>QV7700GKLQ</td> <td>FCC SAR #3 4G/5G</td> </tr> <tr> <td>QV7700KFLQ</td> <td>WLAN/BT Radiated #1</td> </tr> <tr> <td>QV7700DSLQ</td> <td>FCC Cellular Conducted #1</td> </tr> <tr> <td>QV7700UMLQ</td> <td>FCC Cellular Conducted #2</td> </tr> <tr> <td>QV7700NTLQ</td> <td>FCC SAR #2 2G/3G</td> </tr> <tr> <td>QC77001BLQ</td> <td>FCC SAR #4 4G/5G</td> </tr> <tr> <td>QC7700RVLQ</td> <td>FCC SAR #5 4G/5G</td> </tr> <tr> <td>QV7700NWLQ</td> <td>WLAN/BT Radiated #2</td> </tr> <tr> <td>QV7700G0LQ</td> <td>WLAN/BT Radiated #3</td> </tr> <tr> <td>QV770077LQ</td> <td>NFC + FCC Part 15B</td> </tr> <tr> <td>QV77006PL3</td> <td>SAR WLAN/BT - 2.4GHz/5GHz (Conducted) #1</td> </tr> <tr> <td>QV7700EPLQ</td> <td>2G-4G SAR Conducted - Low Power</td> </tr> <tr> <td>QV7700R9LQ</td> <td>2G-4G SAR Conducted - High Power</td> </tr> <tr> <td>QV7700QFLQ</td> <td>Cellular Conducted #1</td> </tr> <tr> <td>QV77003DLQ</td> <td>SAR(Main, Sub) #1 3G/4G</td> </tr> <tr> <td>QV7700TKLQ</td> <td>SAR(Main, Sub) #2 3G/4G</td> </tr> </tbody> </table>	S/N	Notes	QV77001AL2	SAR EN-DC (Conducted Power)	QV77003DL2	SAR EN-DC Radiated	QV770018L2	FCC 2G/3G/5G SAR Conducted Main/Sub #1	QV77000KL2	FCC 4G SAR Conducted Main/Sub #2	QV7700CHLQ	FCC SAR #1 2G/3G	QV7700GKLQ	FCC SAR #3 4G/5G	QV7700KFLQ	WLAN/BT Radiated #1	QV7700DSLQ	FCC Cellular Conducted #1	QV7700UMLQ	FCC Cellular Conducted #2	QV7700NTLQ	FCC SAR #2 2G/3G	QC77001BLQ	FCC SAR #4 4G/5G	QC7700RVLQ	FCC SAR #5 4G/5G	QV7700NWLQ	WLAN/BT Radiated #2	QV7700G0LQ	WLAN/BT Radiated #3	QV770077LQ	NFC + FCC Part 15B	QV77006PL3	SAR WLAN/BT - 2.4GHz/5GHz (Conducted) #1	QV7700EPLQ	2G-4G SAR Conducted - Low Power	QV7700R9LQ	2G-4G SAR Conducted - High Power	QV7700QFLQ	Cellular Conducted #1	QV77003DLQ	SAR(Main, Sub) #1 3G/4G	QV7700TKLQ	SAR(Main, Sub) #2 3G/4G
	S/N	Notes																																											
	QV77001AL2	SAR EN-DC (Conducted Power)																																											
	QV77003DL2	SAR EN-DC Radiated																																											
	QV770018L2	FCC 2G/3G/5G SAR Conducted Main/Sub #1																																											
	QV77000KL2	FCC 4G SAR Conducted Main/Sub #2																																											
	QV7700CHLQ	FCC SAR #1 2G/3G																																											
	QV7700GKLQ	FCC SAR #3 4G/5G																																											
	QV7700KFLQ	WLAN/BT Radiated #1																																											
	QV7700DSLQ	FCC Cellular Conducted #1																																											
	QV7700UMLQ	FCC Cellular Conducted #2																																											
	QV7700NTLQ	FCC SAR #2 2G/3G																																											
	QC77001BLQ	FCC SAR #4 4G/5G																																											
	QC7700RVLQ	FCC SAR #5 4G/5G																																											
	QV7700NWLQ	WLAN/BT Radiated #2																																											
	QV7700G0LQ	WLAN/BT Radiated #3																																											
	QV770077LQ	NFC + FCC Part 15B																																											
	QV77006PL3	SAR WLAN/BT - 2.4GHz/5GHz (Conducted) #1																																											
	QV7700EPLQ	2G-4G SAR Conducted - Low Power																																											
	QV7700R9LQ	2G-4G SAR Conducted - High Power																																											
QV7700QFLQ	Cellular Conducted #1																																												
QV77003DLQ	SAR(Main, Sub) #1 3G/4G																																												
QV7700TKLQ	SAR(Main, Sub) #2 3G/4G																																												
Hardware Version	A																																												
Software Version	EN-DC Conducted: 0.123 EN-DC SAR: 0.110 2G-4G Conducted: 0.220 and 0.225 WLAN/BT Conducted: 0.308 SAR Measurements: 0.220 and 0.223																																												

6.2. Wireless Technologies

PY7-76709C Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 9) HSUPA (Rel. 9) DC-HSDPA (Rel. 8)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41	QPSK 16QAM 64QAM Rel. 16 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) ^{Power Class 3}
5G NR (FR1)	n66	DFT-S-OFDM: $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM		100% (FDD)
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ax (HE20)		99.8% ^{(802.11b) 1} 99.6% ^{(802.11g 20MHz BW) 1}
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)		99.7% ^{(802.11n 40MHz BW) 1} 99.7% ^{(802.11ac 80MHz BW) 1} 99.7% ^{(802.11ac 160MHz BW) 1}
		Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Bluetooth	2.4 GHz	BR, EDR, LE		76.8% ¹
NFC	13.56 MHz	Type A/B/F/V		N/A

Notes:

1. Duty cycle is referenced from the Section 9.

PY7-54773M Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
W-CDMA (UMTS)	Band II Band IV	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 9) HSUPA (Rel. 9) DC-HSDPA (Rel. 8)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 12 FDD Band 17	QPSK 16QAM 64QAM Rel. 16 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) ^{Power Class 3}
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ax (HE20)		99.8% ^{(802.11b) 1} 99.6% ^{(802.11g 20MHz BW) 1}
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)		99.7% ^{(802.11n 40MHz BW) 1} 99.7% ^{(802.11ac 80MHz BW) 1} 99.7% ^{(802.11ac 160MHz BW) 1}
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	BR, EDR, LE		76.8% ¹
NFC	13.56 MHz	Type A/B/F/V		N/A

Notes:

1. Duty cycle is referenced from the Section 9.

6.3. General LTE SAR Test and Reporting Considerations

PY7-76709C

Item	Description						
	Band 2	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700/1860	18675/1857.5	18650/1855	18625/1852.5	18615/1851.5	18607/1850.7
	Mid	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880
	High	19100/1900	19125/1902.5	19150/1905	19175/1907.5	19185/1908.5	19193/1909.3
	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5	19965/1711.5	19957/1710.7
	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5
	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5	20385/1753.5	20393/1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
Low			20450/829	20425/826.5	20415/825.5	20407/824.7	
Mid			20525/836.5	20525/836.5	20525/836.5	20525/836.5	
High			20600/844	20625/846.5	20635/847.5	20643/848.3	
Band 12	Frequency range: 699 - 716 MHz (BW = 17 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz	
Low			23060/704	23035/701.5	23025/700.5	23017/699.7	
Mid			23095/707.5	23095/707.5	23095/707.5	23095/707.5	
High			23130/711	23155/713.5	23165/714.5	23173/715.3	
Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low				23205/779.5			
Mid			23230/782	23230/782			
High				23255/784.5			
Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz	
Low			23780/709	23755/706.5			
Mid			23790/710	23790/710			
High			23800/711	23825/713.5			
Band 41 ²	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	39750 / 2506.0						
Mid-Low	40185 / 2549.5						

	Mid	40620 / 2593.0																																																																
	Mid-High	41055 / 2636.5																																																																
	High	41490 / 2680.0																																																																
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																	
Maximum power reduction (MPR)	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>				Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																											
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																												
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																											
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																											
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																											
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																											
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																											
256 QAM	≥ 1						≤ 5																																																											
Power reduction	No																																																																	
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																	

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

PY7-54773M

Item	Description							
	Band 2	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low	18700/1860	18675/1857.5	18650/1855	18625/1852.5	18615/1851.5	18607/1850.7	
	Mid	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	18900/1880	
	High	19100/1900	19125/1902.5	19150/1905	19175/1907.5	19185/1908.5	19193/1909.3	
	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)						
		Channel Bandwidth						
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5	19965/1711.5	19957/1710.7	
	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5	
	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5	20385/1753.5	20393/1754.3	
	Band 12	Frequency range: 699 - 716 MHz (BW = 17 MHz)						
		Channel Bandwidth						
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz	
Low			23060/704	23035/701.5	23025/700.5	23017/699.7		
Mid			23095/707.5	23095/707.5	23095/707.5	23095/707.5		
High			23130/711	23155/713.5	23165/714.5	23173/715.3		
Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)							
	Channel Bandwidth							

	20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz																																																														
Low			23780/ 709	23755/ 706.5																																																																
Mid			23790/ 710	23790/ 710																																																																
High			23800/ 711	23825/ 713.5																																																																
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																			
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>						Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})							MPR (dB)																																																												
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																														
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																													
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																													
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																													
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																													
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																													
256 QAM	≥ 1						≤ 5																																																													
Power reduction	No																																																																			
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																			

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

6.5. General NR(FR1) SAR Test and Reporting Considerations

PY7-76709C

Item	Description										
	n66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)									
		Channel Bandwidth (MHz)									
		100	90	80	70	60	50	20	15	10	5
	Low							344000 /1720	343500 /1717.5	343000 /1715	342500 /1712.5
	Mid							349000 /1745	349000 /1745	349000 /1745	349000 /1745
High							354000 /1770	354500 /1772.5	355000 /1775	355500 /1777.5	
SCS	15 kHz (n66)										
NR(FR1) transmitter and antenna implementation	Refer to Appendix A.										
A-MPR(Additional MPR) disabled for SAT testing?	Yes										
EN-DC Carrier Aggregation Possible Combinations	DC_2A_n66A DC_13A_n66A										

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per FCC Guidance.
- SAR test for NR bands and LTE anchor Bands were performed separately due to limitations in SAR probe calibration factors. And, due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.

6.6. Power Back-off Operation

The DUT supports power reduction when Simultaneous WLAN transmission is active (i.e. WLAN Chain 0 and Chain 1 transmitting simultaneously).

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Phablet SAR (Extremity 10g)
WLAN Simultaneous Tx	Wi-Fi 2.4GHz Wi-Fi 5GHz	✓	✓	✓	✓

Note(s):

Tune-Up Limits for WLAN (Simultaneous 2G_5G state) is Reduced Average Power. Please refer to §9 for all conducted power measurements.

Phablet SAR (Extremity 10g):

When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

PY7-76709C

Antenna	Band	Head	Rear	Front	Top Edge	Right Edge	Bottom Edge	Left Edge	Extremity (0 mm)
Cellular Main Antenna 1	GSM 850 W-CDMA BV LTE B5/12/13/17	Yes	Yes	Yes	No	No	Yes	Yes	No
Cellular Main Antenna 2	GSM 1900 W-CDMA BII, IV LTE B2/4/41 NR n66	Yes	Yes	Yes	No	Yes	Yes	No	No
Cellular Sub Antenna	LTE B2	Yes	Yes	Yes	Yes	Yes	No	No	No
Wi-Fi Main Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	Yes	No	No	Yes	Yes
Wi-Fi Sub Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	No	No	Yes	Yes	Yes
NFC	NFC Type V	No	No	No	No	No	No	No	Yes

PY7-54773M

Antenna	Band	Head	Rear	Front	Top Edge	Right Edge	Bottom Edge	Left Edge	Extremity (0 mm)
Cellular Main Antenna 1	GSM 850 LTE B12/17	Yes	Yes	Yes	No	No	Yes	Yes	No
Cellular Main Antenna 2	GSM 1900 W-CDMA BII, IV LTE B2/4	Yes	Yes	Yes	No	Yes	Yes	No	No
Wi-Fi Main Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	Yes	No	No	Yes	Yes
Wi-Fi Sub Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	No	No	Yes	Yes	Yes
NFC	NFC Type V	No	No	No	No	No	No	No	Yes

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1A	2024-02-29	13	Head	13	54.3	55.0	-1.25	0.75	0.75	-0.49
				12	54.3	55.0	-1.25	0.75	0.75	-0.51
				14	54.3	55.0	-1.33	0.75	0.75	-0.48
2A	2024-02-12	2600	Head	2600	40.2	39.0	3.15	1.89	1.96	-3.68
				2495	40.4	39.1	3.13	1.81	1.85	-2.36
				2690	40.1	38.9	3.12	1.97	2.06	-4.49
2A	2024-02-20	2600	Head	2600	39.3	39.0	0.74	1.88	1.96	-4.03
				2495	39.4	39.1	0.73	1.80	1.85	-2.74
				2690	39.2	38.9	0.68	1.96	2.06	-4.88
2A	2024-02-26	2450	Head	2450	41.0	39.2	4.64	1.84	1.80	2.44
				2400	41.1	39.3	4.56	1.81	1.75	3.16
				2480	41.0	39.2	4.64	1.87	1.83	2.05
2A	2024-03-25	1750	Head	1750	41.0	40.1	2.36	1.39	1.37	1.76
				1710	41.1	40.2	2.40	1.37	1.35	1.45
				1755	41.0	40.1	2.38	1.40	1.37	1.76
2B	2024-01-16	1750	Head	1750	39.0	40.1	-2.63	1.35	1.37	-1.75
				1710	39.1	40.2	-2.53	1.32	1.35	-2.04
				1755	39.0	40.1	-2.61	1.35	1.37	-1.73
2B	2024-02-01	750	Head	750	40.9	42.0	-2.55	0.90	0.89	0.25
				660	41.2	42.4	-2.98	0.87	0.89	-2.23
				800	40.8	41.7	-2.10	0.91	0.90	1.46
2B	2024-02-05	1900	Head	1900	38.3	40.0	-4.30	1.41	1.40	0.50
				1850	38.4	40.0	-4.05	1.38	1.40	-1.36
				1920	38.2	40.0	-4.45	1.42	1.40	1.50
2B	2024-02-12	750	Head	750	41.9	42.0	-0.22	0.88	0.89	-1.45
				660	42.1	42.4	-0.69	0.85	0.89	-3.92
				850	41.6	41.5	0.19	0.92	0.92	0.03
2B	2024-02-12	900	Head	900	41.6	41.5	0.14	0.93	0.97	-3.64
				850	41.6	41.5	0.19	0.92	0.92	0.03
				915	41.5	41.5	0.00	0.94	0.98	-4.19
2B	2024-02-19	1900	Head	1900	39.6	40.0	-0.98	1.44	1.40	2.57
				1850	39.7	40.0	-0.85	1.41	1.40	0.79
				1920	39.6	40.0	-1.08	1.45	1.40	3.64
2B	2024-02-19	2450	Head	2450	38.8	39.2	-1.12	1.83	1.80	1.61
				2400	38.8	39.3	-1.16	1.79	1.75	2.25
				2480	38.7	39.2	-1.15	1.86	1.83	1.29
2B	2024-02-19	900	Head	900	41.5	41.5	0.07	0.93	0.97	-4.38
				800	41.8	41.7	0.25	0.89	0.90	-0.74
				915	41.5	41.5	-0.12	0.93	0.91	3.00
2B	2024-02-26	5250	Head	5250	34.9	35.9	-2.76	4.56	4.70	-2.98
				5150	35.1	36.0	-2.60	4.45	4.60	-3.32
				5350	34.8	35.8	-2.98	4.67	4.80	-2.78
2B	2024-02-26	5600	Head	5600	34.3	35.5	-3.56	4.95	5.06	-2.14
				5500	34.5	35.6	-3.33	4.83	4.96	-2.62
				5725	34.0	35.4	-3.82	5.11	5.19	-1.43
2B	2024-02-26	5750	Head	5750	34.0	35.4	-3.80	5.14	5.21	-1.34
				5700	34.1	35.4	-3.73	5.08	5.16	-1.64
				5850	33.9	35.3	-4.11	5.25	5.32	-1.35
2B	2024-02-26	5850	Head	5850	33.9	35.3	-4.11	5.25	5.32	-1.35
				5900	33.7	35.2	-4.15	5.30	5.38	-1.51
				5925	33.7	35.2	-4.26	5.24	5.40	-3.00
2B	2024-03-04	5250	Head	5250	35.0	35.9	-2.68	4.55	4.70	-3.30
				5150	35.2	36.1	-2.49	4.44	4.60	-3.47
				5350	34.8	35.8	-2.87	4.65	4.80	-3.13
2B	2024-03-04	5750	Head	5750	34.1	35.4	-3.63	5.13	5.21	-1.68
				5700	34.2	35.4	-3.56	5.06	5.16	-1.99
				5850	33.9	35.3	-3.94	5.23	5.32	-1.67

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was recorded and the results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type_Serial #	Dipole Cal. Due Data	Dipole Power (dBm)	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
						Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
1A	2024-02-29	Head	CLA13 SN: 1017	3/20/2024	16.00	0.021	0.53	0.55	-3.74	0.013	0.33	0.34	-4.52	1
2A	2024-02-12	Head	D2600V2 SN: 1104	10/20/2024	17.00	2.600	51.88	55.90	-7.20	1.190	23.74	25.20	-5.78	
2A	2024-02-20	Head	D2600V2 SN: 1104	10/20/2024	17.00	2.580	51.48	55.90	-7.91	1.180	23.54	25.20	-6.57	2
2A	2024-02-26	Head	D2450V2 SN: 963	10/20/2024	17.00	2.430	48.48	53.30	-9.03	1.140	22.75	25.10	-9.38	3
2A	2024-03-25	Head	D1750V2 SN: 1136	10/20/2024	17.00	1.680	33.52	36.00	-6.89	0.901	17.98	19.00	-5.38	4
2B	2024-01-16	Head	D1750V2 SN: 1136	10/20/2024	17.00	1.670	33.32	36.00	-7.44	0.889	17.74	19.00	-6.64	5
2B	2024-02-01	Head	D750V3 SN: 1139	10/19/2024	17.00	0.422	8.42	8.67	-2.88	0.275	5.49	5.69	-3.57	6
2B	2024-02-05	Head	D1900V2 SN: 5d202	10/19/2024	17.00	2.000	39.91	39.60	0.77	1.030	20.55	20.80	-1.20	
2B	2024-02-12	Head	D750V3 SN: 1139	10/19/2024	17.00	0.432	8.62	8.67	-0.58	0.288	5.75	5.69	0.99	
2B	2024-02-12	Head	D900V2 SN: 1d180	10/19/2024	17.00	0.563	11.23	11.10	1.20	0.368	7.34	7.11	3.27	7
2B	2024-02-19	Head	D1900V2 SN: 5d202	10/19/2024	17.00	2.160	43.10	39.60	8.83	1.130	22.55	20.80	8.40	8
2B	2024-02-19	Head	D2450V2 SN: 963	10/20/2024	17.00	2.730	54.47	53.30	2.20	1.270	25.34	25.10	0.96	9
2B	2024-02-20	Head	D900V2 SN: 1d180	10/19/2024	17.00	0.549	10.95	11.10	-1.32	0.360	7.18	7.11	1.03	
2B	2024-02-26	Head	D5GHzV2 SN: 1213 (5.25 GHz)	10/17/2024	17.00	3.680	73.43	80.10	-8.33	1.050	20.95	23.10	-9.31	10
2B	2024-02-26	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/17/2024	17.00	4.100	81.81	83.80	-2.38	1.150	22.95	23.90	-3.99	11
2B	2024-02-26	Head	D5GHzV2 SN: 1213 (5.75 GHz)	10/17/2024	17.00	3.700	73.82	80.30	-8.06	1.050	20.95	23.00	-8.91	
2B	2024-02-26	Head	D5GHzV2 SN: 1213 (5.85 GHz)	10/17/2024	17.00	3.740	74.62	81.40	-8.33	1.050	20.95	23.10	-9.31	12
2B	2024-03-04	Head	D5GHzV2 SN: 1213 (5.25 GHz)	10/17/2024	17.00	3.660	73.03	80.10	-8.83	1.050	20.95	23.10	-9.31	
2B	2024-03-04	Head	D5GHzV2 SN: 1213 (5.75 GHz)	10/17/2024	17.00	3.690	73.63	80.30	-8.31	1.050	20.95	23.00	-8.91	13

9. Conducted Output Power Measurements

Tune-Up Power Limits provided by the manufacturer are used to scale measured SAR values.

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GSMK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Maximum Output Power (Tune-up Limit) for GSM

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

RF Air interface	Mode	GSM Burst Power Tune-up Limit (dBm)		GSM DTM CS Burst Power Tune-Up Limit (dBm)		GSM DTM PS Burst Power Tune-Up Limit (dBm)	
		Cellular Main 1st	Cellular Main 2nd	Cellular Main 1st	Cellular Main 2nd	Cellular Main 1st	Cellular Main 2nd
		Normal	Normal	Normal	Normal	Normal	Normal
GSM850	Voice/GPRS (1 slot)	33.5		33.5			
	GPRS 2 slots	30.5		30.5		30.5	
	GPRS 3 slots	28.7		28.7		28.7	
	GPRS 4 slots	27.5					
	EGPRS 1 slot	28.0		33.5			
	EGPRS 2 slot	25.0		30.5		25.0	
	EGPRS 3 slot	23.2		28.7		23.2	
GSM1900	Voice/GPRS (1 slot)		29.0		29.0		
	GPRS 2 slots		26.0		26.0		26.0
	GPRS 3 slots		24.2		24.2		24.2
	GPRS 4 slots		23.0				
	EGPRS 1 slot		27.0		29.0		
	EGPRS 2 slot		24.0		26.0		24.0
	EGPRS 3 slot		22.2		24.2		22.2
	EGPRS 4 slots		21.0				

GSM850 Measured Results (Cellular Main 1st) – FCC ID: PY7-76709C and PY7-54773M

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.4	23.3	33.5	24.5
			190	836.6	32.9	23.9		
			251	848.8	33.1	24.0		
		2	128	824.2	29.5	23.5	30.5	24.5
			190	836.6	29.5	23.5		
			251	848.8	29.7	23.7		
		3	128	824.2	27.6	23.4	28.7	24.4
			190	836.6	27.8	23.5		
			251	848.8	27.8	23.6		
		4	128	824.2	26.5	23.5	27.5	24.5
			190	836.6	26.8	23.7		
			251	848.8	26.8	23.7		
EDGE (8PSK)	MCS5	1	128	824.2	27.1	18.1	28.0	19.0
			190	836.6	27.4	18.3		
			251	848.8	27.5	18.5		
		2	128	824.2	24.1	18.0	25.0	19.0
			190	836.6	24.1	18.0		
			251	848.8	24.2	18.2		
		3	128	824.2	22.2	17.9	23.2	18.9
			190	836.6	22.0	17.7		
			251	848.8	22.3	18.0		
		4	128	824.2	21.2	18.2	22.0	19.0
			190	836.6	21.1	18.1		
			251	848.8	21.3	18.2		

Note(s):
 Referenced from UL report # R15110020-S1

GSM1900 Measured Results (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.9	18.9	29.0	20.0
			661	1880.0	28.0	19.0		
			810	1909.8	28.0	19.0		
		2	512	1850.2	24.7	18.7	26.0	20.0
			661	1880.0	24.7	18.7		
			810	1909.8	25.0	18.9		
		3	512	1850.2	22.9	18.7	24.2	19.9
			661	1880.0	23.0	18.8		
			810	1909.8	23.1	18.9		
		4	512	1850.2	22.1	19.1	23.0	20.0
			661	1880.0	22.0	19.0		
			810	1909.8	22.1	19.1		
EDGE (8PSK)	MCS5	1	512	1850.2	26.6	17.6	27.0	18.0
			661	1880.0	26.9	17.9		
			810	1909.8	26.9	17.9		
		2	512	1850.2	23.5	17.5	24.0	18.0
			661	1880.0	23.7	17.6		
			810	1909.8	23.8	17.8		
		3	512	1850.2	21.7	17.5	22.2	17.9
			661	1880.0	22.1	17.9		
			810	1909.8	22.1	17.8		
		4	512	1850.2	20.3	17.3	21.0	18.0
			661	1880.0	20.7	17.7		
			810	1909.8	20.6	17.6		

Note(s):
 Referenced from UL report # R15110020-S1

GSM850 DTM Measured Results (Cellular Main 1st) – FCC ID: PY7-76709C and PY7-54773M

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.6		23.6		33.5		24.5	
			190	836.6	32.8		23.7					
			251	848.8	33.0		24.0					
		2	128	824.2	30.1	29.5	24.1	23.5	30.5	30.5	24.5	24.5
			190	836.6	30.1	30.2	24.0	24.2				
			251	848.8	30.2	29.5	24.2	23.5				
		3	128	824.2	27.5	27.4	23.2	23.1	28.7	28.7	24.4	24.4
			190	836.6	27.4	27.6	23.1	23.3				
			251	848.8	28.0	27.7	23.7	23.4				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	32.6		23.6		33.5		24.5	
			190	836.6	32.8		23.7					
			251	848.8	33.0		24.0					
		2	128	824.2	30.1	23.8	24.1	17.8	30.5	25.0	24.5	19.0
			190	836.6	30.1	23.9	24.0	17.9				
			251	848.8	30.2	24.1	24.2	18.1				
		3	128	824.2	27.5	21.8	23.2	17.5	28.7	23.2	24.4	18.9
			190	836.6	27.4	21.4	23.1	17.2				
			251	848.8	28.0	21.9	23.7	17.6				

Note(s):

Referenced from UL report # R15110020-S1

GSM1900 DTM Measured Results (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	512	1850.2	28.0		18.9		29.0		20.0	
			661	1880.0	28.1		19.1					
			810	1909.8	28.1		19.1					
		2	512	1850.2	24.9	24.9	18.8	18.8	26.0	26.0	20.0	20.0
			661	1880.0	24.9	24.8	18.9	18.8				
			810	1909.8	24.7	24.6	18.7	18.5				
		3	512	1850.2	23.1	22.9	18.8	18.7	24.2	24.2	19.9	19.9
			661	1880.0	23.0	22.9	18.7	18.6				
			810	1909.8	23.0	22.9	18.7	18.7				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	28.0		18.9		29.0		20.0	
			661	1880.0	28.1		19.1					
			810	1909.8	28.1		19.1					
		2	512	1850.2	24.9	23.2	18.8	17.2	26.0	24.0	20.0	18.0
			661	1880.0	24.9	23.6	18.9	17.6				
			810	1909.8	24.7	23.7	18.7	17.7				
		3	512	1850.2	23.1	21.7	18.8	17.4	24.2	22.2	19.9	17.9
			661	1880.0	23.0	21.9	18.7	17.6				
			810	1909.8	23.0	21.8	18.7	17.6				

Note(s):

Referenced from UL report # R15110020-S1

9.2. W-CDMA

Per KDB 941225 D01 3G SAR Procedures for W-CDMA:

Maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's"

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1. A summary of these settings is illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPCCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPCCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPCCH power scaling at max power which could results in slightly smaller MPR values.

DC-HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests for DC-HSDPA were completed according to procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings is illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+ Setup Procedures used to establish the test signals

The following 1 Sub-test was completed according to procedures in table C.11.1.4 of 3GPP TS34.121. A summary of these settings is illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CGI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

Maximum Output Power (Tune-up Limit) for W-CDMA

SAR measurement is not required for the HSDPA, HSUPA. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq 1/4$ dB higher than the primary mode

RF Air interface	Mode	Tune-up PowerLimit (dBm)
		Normal
W-CDMA Band II (Cellular Main 2nd)	R99	19.7
	HSDPA	19.0
	HSUPA	19.0
	DC-HSDPA	19.0
W-CDMA Band IV (Cellular Main 2nd)	R99	18.7
	HSDPA	18.0
	HSUPA	18.0
	DC-HSDPA	18.0
	HSPA+	18.0
W-CDMA Band V (Cellular Main 1st)	R99	22.7
	HSDPA	22.0
	HSUPA	22.0
	DC-HSDPA	22.0

W-CDMA Band II Measured Results (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	19.7	N/A	19.7
		9400	1880.0	18.9		
		9538	1907.6	18.8		
HSDPA	Subtest 1	9262	1852.4	17.9	0	19.0
		9400	1880.0	17.9		
		9538	1907.6	17.8		
	Subtest 2	9262	1852.4	17.9	0	19.0
		9400	1880.0	17.9		
		9538	1907.6	17.9		
	Subtest 3	9262	1852.4	17.4	0.5	18.5
		9400	1880.0	17.4		
		9538	1907.6	17.3		
	Subtest 4	9262	1852.4	17.5	0.5	18.5
		9400	1880.0	17.4		
		9538	1907.6	17.3		
HSUPA	Subtest 1	9262	1852.4	18.0	0	19.0
		9400	1880.0	18.0		
		9538	1907.6	17.9		
	Subtest 2	9262	1852.4	16.0	2	17.0
		9400	1880.0	16.0		
		9538	1907.6	15.9		
	Subtest 3	9262	1852.4	17.0	1	18.0
		9400	1880.0	17.0		
		9538	1907.6	16.9		
	Subtest 4	9262	1852.4	15.8	2	17.0
		9400	1880.0	16.0		
		9538	1907.6	15.9		
	Subtest 5	9262	1852.4	18.0	0	19.0
		9400	1880.0	18.0		
		9538	1907.6	17.9		
DC-HSDPA	Subtest 1	9262	1852.4	18.5	0	19.0
		9400	1880.0	17.8		
		9538	1907.6	17.8		
	Subtest 2	9262	1852.4	17.8	0	19.0
		9400	1880.0	18.0		
		9538	1907.6	17.8		
	Subtest 3	9262	1852.4	17.7	0.5	18.5
		9400	1880.0	17.4		
		9538	1907.6	17.3		
	Subtest 4	9262	1852.4	17.3	0.5	18.5
		9400	1880.0	17.4		
		9538	1907.6	17.3		

W-CDMA Band IV Measured Results (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	21.5	N/A	21.7
		1413	1732.6	21.5		
		1513	1752.6	21.6		
HSDPA	Subtest 1	1312	1712.4	20.5	0	21.0
		1413	1732.6	20.4		
		1513	1752.6	20.6		
	Subtest 2	1312	1712.4	20.6	0	21.0
		1413	1732.6	20.6		
		1513	1752.6	20.6		
	Subtest 3	1312	1712.4	20.0	0.5	20.5
		1413	1732.6	20.0		
		1513	1752.6	20.1		
	Subtest 4	1312	1712.4	19.9	0.5	20.5
		1413	1732.6	19.9		
		1513	1752.6	20.0		
HSUPA	Subtest 1	1312	1712.4	20.6	0	21.0
		1413	1732.6	20.5		
		1513	1752.6	20.6		
	Subtest 2	1312	1712.4	18.5	2	19.0
		1413	1732.6	18.5		
		1513	1752.6	18.7		
	Subtest 3	1312	1712.4	19.4	1	20.0
		1413	1732.6	19.6		
		1513	1752.6	19.2		
	Subtest 4	1312	1712.4	18.3	2	19.0
		1413	1732.6	18.4		
		1513	1752.6	18.6		
	Subtest 5	1312	1712.4	20.4	0	21.0
		1413	1732.6	20.3		
		1513	1752.6	20.4		
DC-HSDPA	Subtest 1	1312	1712.4	20.5	0	21.0
		1413	1732.6	20.5		
		1513	1752.6	20.6		
	Subtest 2	1312	1712.4	20.5	0	21.0
		1413	1732.6	20.5		
		1513	1752.6	20.6		
	Subtest 3	1312	1712.4	20.1	0.5	20.5
		1413	1732.6	20.0		
		1513	1752.6	20.1		
	Subtest 4	1312	1712.4	20.1	0.5	20.5
		1413	1732.6	19.9		
		1513	1752.6	20.0		

W-CDMA Band V Measured Results (Cellular Main 1st) – FCC ID: PY7-76709C

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.4	N/A	22.7
		4183	836.6	22.4		
		4233	846.6	22.4		
HSDPA	Subtest 1	4132	826.4	21.4	0	22.0
		4183	836.6	21.4		
		4233	846.6	21.4		
	Subtest 2	4132	826.4	21.4	0	22.0
		4183	836.6	21.3		
		4233	846.6	21.4		
	Subtest 3	4132	826.4	20.9	0.5	21.5
		4183	836.6	20.8		
		4233	846.6	20.9		
	Subtest 4	4132	826.4	20.9	0.5	21.5
		4183	836.6	20.9		
		4233	846.6	20.9		
HSUPA	Subtest 1	4132	826.4	21.4	0	22.0
		4183	836.6	21.4		
		4233	846.6	21.5		
	Subtest 2	4132	826.4	19.4	2	20.0
		4183	836.6	19.3		
		4233	846.6	19.3		
	Subtest 3	4132	826.4	20.3	1	21.0
		4183	836.6	20.3		
		4233	846.6	20.4		
	Subtest 4	4132	826.4	19.3	2	20.0
		4183	836.6	19.4		
		4233	846.6	19.3		
	Subtest 5	4132	826.4	21.4	0	22.0
		4183	836.6	21.5		
		4233	846.6	21.5		
DC-HSDPA	Subtest 1	4132	826.4	21.4	0	22.0
		4183	836.6	21.4		
		4233	846.6	21.4		
	Subtest 2	4132	826.4	21.4	0	22.0
		4183	836.6	21.4		
		4233	846.6	21.4		
	Subtest 3	4132	826.4	20.9	0.5	21.5
		4183	836.6	20.9		
		4233	846.6	20.9		
	Subtest 4	4132	826.4	20.9	0.5	21.5
		4183	836.6	20.9		
		4233	846.6	20.9		

Note(s):
Referenced from UL report # R15110020-S1

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be ≤ the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

For some LTE Bands, certain channel bandwidths do not support at least three non-overlapping channels. When a device supports overlapping channel assignments in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices. Please refer to section 6.3. for a detailed list of LTE test channels

- LTE Band 4 (1710-1755 MHz)
- LTE Band 5 (824-849 MHz)
- LTE Band 12 (699-716 MHz)
- LTE Band 13 (777-787 MHz)
- LTE Band 17 (704-716 MHz)

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is ≤ ½ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

RF Air interface	Mode	Tune-up PowerLimit (dBm)		
		Cellular Main 1st	Cellular Main 2nd	Cellular Sub
		Normal	Normal	Normal
LTE Band 2	QPSK		19.0	15.0
LTE Band 4	QPSK		21.0	
LTE Band 5	QPSK	22.0		
LTE Band 12	QPSK	22.0		
LTE Band 13	QPSK	22.0		
LTE Band 17	QPSK	22.0		
LTE Band 41	QPSK		19.0	

LTE Band 2 Measured Result (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				18700	18900	19100	MPR	Tune-up Limit
				1860 MHz	1880 MHz	1900 MHz		
20	QPSK	1	0	18.3	18.2	18.3	0	19.0
		1	49	18.3	18.4	18.4	0	19.0
		1	99	18.3	18.4	18.4	0	19.0
		50	0	18.3	18.3	18.4	0	19.0
		50	24	18.4	18.3	18.4	0	19.0
		50	50	18.4	18.4	18.4	0	19.0
		100	0	18.4	18.3	18.4	0	19.0
	16QAM	1	0	18.5	18.7	18.7	0	19.0
		1	49	18.6	18.8	18.7	0	19.0
		1	99	18.5	18.8	18.6	0	19.0
		50	0	18.3	18.3	18.4	0	19.0
		50	24	18.4	18.3	18.5	0	19.0
		50	50	18.4	18.4	18.4	0	19.0
	64QAM	100	0	18.4	18.3	18.4	0	19.0
		1	0	18.4	18.4	18.5	0	19.0
		1	49	18.5	18.5	18.5	0	19.0
		1	99	18.4	18.5	18.5	0	19.0
		50	0	18.1	18.1	18.2	0	19.0
		50	24	18.2	18.2	18.3	0	19.0
		50	50	18.2	18.2	18.2	0	19.0
	100	0	18.2	18.2	18.3	0	19.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18675	18900	19125	MPR	Tune-up Limit
				1857.5 MHz	1880 MHz	1902.5 MHz		
15	QPSK	1	0	18.3	18.2	18.3	0	19.0
		1	37	18.3	18.4	18.4	0	19.0
		1	74	18.3	18.4	18.4	0	19.0
		36	0	18.3	18.3	18.3	0	19.0
		36	20	18.4	18.3	18.4	0	19.0
		36	39	18.4	18.4	18.4	0	19.0
		75	0	18.3	18.3	18.3	0	19.0
	16QAM	1	0	18.5	18.6	18.6	0	19.0
		1	37	18.6	18.7	18.7	0	19.0
		1	74	18.5	18.7	18.7	0	19.0
		36	0	18.3	18.3	18.4	0	19.0
		36	20	18.4	18.4	18.4	0	19.0
		36	39	18.4	18.4	18.4	0	19.0
		75	0	18.4	18.3	18.3	0	19.0
	64QAM	1	0	18.5	18.4	18.4	0	19.0
		1	37	18.6	18.5	18.5	0	19.0
		1	74	18.5	18.5	18.4	0	19.0
		36	0	18.2	18.2	18.2	0	19.0
		36	20	18.3	18.2	18.3	0	19.0
		36	39	18.3	18.3	18.3	0	19.0
		75	0	18.3	18.2	18.2	0	19.0

LTE Band 2 Measured Result (Cellular Main 2nd) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				18650	18900	19150	MPR	Tune-up Limit	
				1855 MHz	1880 MHz	1905 MHz			
10	QPSK	1	0	18.3	18.3	18.4	0	19.0	
		1	25	18.3	18.4	18.3	0	19.0	
		1	49	18.3	18.3	18.3	0	19.0	
		25	0	18.3	18.3	18.3	0	19.0	
		25	12	18.4	18.3	18.4	0	19.0	
		25	25	18.4	18.4	18.4	0	19.0	
		50	0	18.3	18.3	18.3	0	19.0	
	16QAM	1	0	18.6	18.4	18.6	0	19.0	
		1	25	18.7	18.5	18.7	0	19.0	
		1	49	18.6	18.5	18.6	0	19.0	
		25	0	18.4	18.4	18.4	0	19.0	
		25	12	18.4	18.4	18.4	0	19.0	
		25	25	18.4	18.5	18.4	0	19.0	
	64QAM	50	0	18.4	18.3	18.3	0	19.0	
		1	0	18.3	18.5	18.4	0	19.0	
		1	25	18.3	18.6	18.5	0	19.0	
		1	49	18.3	18.5	18.4	0	19.0	
		25	0	18.3	18.2	18.2	0	19.0	
		25	12	18.3	18.2	18.3	0	19.0	
	5	QPSK	25	25	18.3	18.3	18.3	0	19.0
			50	0	18.3	18.3	18.2	0	19.0
5	QPSK		1	0	18.4	18.5	18.5	0	19.0
			1	12	18.3	18.4	18.3	0	19.0
			1	24	18.3	18.4	18.4	0	19.0
			12	0	18.4	18.4	18.4	0	19.0
			12	7	18.3	18.3	18.4	0	19.0
		12	13	18.3	18.4	18.4	0	19.0	
		25	0	18.3	18.3	18.4	0	19.0	
	16QAM	1	0	18.8	18.8	18.8	0	19.0	
		1	12	18.8	18.7	18.6	0	19.0	
		1	24	18.8	18.8	18.7	0	19.0	
		12	0	18.5	18.4	18.5	0	19.0	
		12	7	18.5	18.4	18.5	0	19.0	
		12	13	18.4	18.4	18.4	0	19.0	
		25	0	18.3	18.3	18.4	0	19.0	
	64QAM	1	0	18.5	18.6	18.7	0	19.0	
		1	12	18.5	18.5	18.6	0	19.0	
		1	24	18.5	18.6	18.6	0	19.0	
		12	0	18.3	18.3	18.2	0	19.0	
		12	7	18.3	18.3	18.2	0	19.0	
		12	13	18.2	18.4	18.2	0	19.0	
		25	0	18.2	18.2	18.3	0	19.0	

LTE Band 2 Measured Result (Cellular Main 2nd) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18615	18900	19185	MPR	Tune-up Limit
				1851.5 MHz	1880 MHz	1908.5 MHz		
3	QPSK	1	0	18.3	18.3	18.3	0	19.0
		1	8	18.3	18.4	18.4	0	19.0
		1	14	18.2	18.3	18.2	0	19.0
		8	0	18.3	18.3	18.4	0	19.0
		8	4	18.3	18.4	18.4	0	19.0
		8	7	18.3	18.4	18.3	0	19.0
		15	0	18.3	18.3	18.3	0	19.0
	16QAM	1	0	18.6	18.7	18.6	0	19.0
		1	8	18.8	18.8	18.7	0	19.0
		1	14	18.5	18.7	18.6	0	19.0
		8	0	18.4	18.4	18.4	0	19.0
		8	4	18.4	18.5	18.5	0	19.0
		8	7	18.4	18.5	18.4	0	19.0
	64QAM	15	0	18.4	18.3	18.4	0	19.0
		1	0	18.5	18.4	18.5	0	19.0
		1	8	18.5	18.5	18.6	0	19.0
		1	14	18.3	18.3	18.4	0	19.0
		8	0	18.3	18.3	18.3	0	19.0
		8	4	18.4	18.4	18.3	0	19.0
		8	7	18.4	18.4	18.3	0	19.0
	15	0	18.2	18.2	18.2	0	19.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18607	18900	19193	MPR	Tune-up Limit
				1850.7 MHz	1880 MHz	1909.3 MHz		
1.4	QPSK	1	0	18.3	18.2	18.3	0	19.0
		1	3	18.3	18.3	18.3	0	19.0
		1	5	18.3	18.3	18.3	0	19.0
		3	0	18.3	18.3	18.3	0	19.0
		3	1	18.3	18.3	18.3	0	19.0
		3	3	18.3	18.3	18.3	0	19.0
		6	0	18.3	18.3	18.3	0	19.0
	16QAM	1	0	18.7	18.7	18.7	0	19.0
		1	3	18.7	18.7	18.7	0	19.0
		1	5	18.7	18.7	18.7	0	19.0
		3	0	18.5	18.4	18.5	0	19.0
		3	1	18.4	18.5	18.5	0	19.0
		3	3	18.5	18.5	18.5	0	19.0
		6	0	18.4	18.5	18.4	0	19.0
	64QAM	1	0	18.5	18.4	18.4	0	19.0
		1	3	18.5	18.4	18.5	0	19.0
		1	5	18.4	18.4	18.5	0	19.0
		3	0	18.4	18.4	18.3	0	19.0
		3	1	18.3	18.4	18.3	0	19.0
		3	3	18.3	18.4	18.3	0	19.0
		6	0	18.2	18.3	18.3	0	19.0

Note(s):

Referenced from UL report # R15110020-S1

LTE Band 2 Measured Result (Cellular Sub) – FCC ID: PY7-76709C

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				18700	18900	19100	MPR	Tune-up Limit
				1860 MHz	1880 MHz	1900 MHz		
20	QPSK	1	0	13.7	13.8	13.9	0	15.0
		1	49	13.8	13.9	14.1	0	15.0
		1	99	13.9	14.0	14.0	0	15.0
		50	0	13.8	13.9	14.0	0	15.0
		50	24	13.9	14.0	14.2	0	15.0
		50	50	13.9	14.0	14.1	0	15.0
		100	0	13.9	14.0	14.1	0	15.0
	16QAM	1	0	14.0	14.1	14.3	0	15.0
		1	49	14.1	14.3	14.3	0	15.0
		1	99	14.2	14.3	14.3	0	15.0
		50	0	13.8	13.9	14.0	0	15.0
		50	24	13.9	14.0	14.2	0	15.0
		50	50	13.9	14.0	14.1	0	15.0
		100	0	13.9	13.9	14.1	0	15.0
	64QAM	1	0	13.9	14.1	14.3	0	15.0
		1	49	14.1	14.2	14.4	0	15.0
		1	99	14.2	14.2	14.3	0	15.0
		50	0	13.8	13.9	14.0	0	15.0
		50	24	13.9	14.0	14.1	0	15.0
		50	50	13.9	14.0	14.1	0	15.0
		100	0	13.9	13.9	14.1	0	15.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18675	18900	19125	MPR	Tune-up Limit
				1857.5 MHz	1880 MHz	1902.5 MHz		
15	QPSK	1	0	13.7	13.9	14.0	0	15.0
		1	37	13.8	14.0	14.1	0	15.0
		1	74	13.8	14.0	14.0	0	15.0
		36	0	13.8	13.9	14.1	0	15.0
		36	20	13.8	14.0	14.1	0	15.0
		36	39	13.9	14.0	14.1	0	15.0
		75	0	13.8	13.9	14.1	0	15.0
	16QAM	1	0	14.0	14.1	14.2	0	15.0
		1	37	14.1	14.3	14.4	0	15.0
		1	74	14.1	14.2	14.3	0	15.0
		36	0	13.8	14.0	14.1	0	15.0
		36	20	13.9	13.9	14.2	0	15.0
		36	39	13.9	14.0	14.1	0	15.0
		75	0	13.8	14.0	14.1	0	15.0
	64QAM	1	0	14.0	14.1	14.3	0	15.0
		1	37	14.1	14.3	14.4	0	15.0
		1	74	14.1	14.2	14.3	0	15.0
		36	0	13.8	14.0	14.1	0	15.0
		36	20	13.9	14.0	14.2	0	15.0
		36	39	13.9	14.1	14.2	0	15.0
		75	0	13.8	14.0	14.2	0	15.0

LTE Band 2 Measured Result (Cellular Sub) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					
				18650	18900	19150	MPR	Tune-up Limit	
				1855 MHz	1880 MHz	1905 MHz			
10	QPSK	1	0	13.8	14.0	14.1	0	15.0	
		1	25	13.8	14.1	14.2	0	15.0	
		1	49	13.8	14.0	14.1	0	15.0	
		25	0	13.8	13.9	14.1	0	15.0	
		25	12	13.8	14.0	14.1	0	15.0	
		25	25	13.8	14.1	14.1	0	15.0	
		50	0	13.8	14.0	14.1	0	15.0	
	16QAM	1	0	13.9	14.1	14.3	0	15.0	
		1	25	14.0	14.3	14.3	0	15.0	
		1	49	13.9	14.2	14.3	0	15.0	
		25	0	13.7	14.0	14.1	0	15.0	
		25	12	13.9	14.0	14.1	0	15.0	
		25	25	13.8	14.0	14.1	0	15.0	
	64QAM	50	0	13.8	14.0	14.0	0	15.0	
		1	0	14.0	14.2	14.4	0	15.0	
		1	25	14.1	14.2	14.4	0	15.0	
		1	49	14.0	14.1	14.3	0	15.0	
		25	0	13.8	14.0	14.1	0	15.0	
		25	12	13.9	14.0	14.1	0	15.0	
	5	QPSK	25	25	13.8	14.1	14.2	0	15.0
			50	0	13.8	14.0	14.1	0	15.0
16QAM	1		0	14.1	14.3	14.5	0	15.0	
	1		12	14.1	14.3	14.4	0	15.0	
	1		24	14.1	14.3	14.4	0	15.0	
	12		0	13.7	13.9	14.1	0	15.0	
	12		7	13.8	13.9	14.1	0	15.0	
	12	13	13.7	14.0	14.1	0	15.0		
	25	0	13.8	13.9	14.1	0	15.0		
	64QAM	1	0	14.0	14.3	14.3	0	15.0	
		1	12	13.9	14.3	14.3	0	15.0	
		1	24	14.0	14.3	14.2	0	15.0	
		12	0	13.9	13.9	14.0	0	15.0	
		12	7	14.0	13.9	14.1	0	15.0	
		12	13	14.0	13.9	14.1	0	15.0	
		25	0	13.8	14.0	14.1	0	15.0	

LTE Band 2 Measured Result (Cellular Sub) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18615	18900	19185	MPR	Tune-up Limit
				1851.5 MHz	1880 MHz	1908.5 MHz		
3	QPSK	1	0	13.7	13.9	14.0	0	15.0
		1	8	13.8	14.0	14.1	0	15.0
		1	14	13.7	13.9	14.0	0	15.0
		8	0	13.7	13.9	14.0	0	15.0
		8	4	13.8	14.0	14.0	0	15.0
		8	7	13.8	13.9	14.1	0	15.0
		15	0	13.8	13.9	14.0	0	15.0
	16QAM	1	0	13.9	14.2	14.3	0	15.0
		1	8	14.0	14.2	14.4	0	15.0
		1	14	13.9	14.2	14.2	0	15.0
		8	0	13.8	13.9	14.0	0	15.0
		8	4	13.8	14.0	14.0	0	15.0
		8	7	13.8	14.0	14.1	0	15.0
		15	0	13.8	13.9	14.0	0	15.0
	64QAM	1	0	13.8	14.1	14.2	0	15.0
		1	8	14.1	14.1	14.4	0	15.0
		1	14	14.0	14.0	14.3	0	15.0
		8	0	13.8	14.0	14.1	0	15.0
		8	4	13.8	14.0	14.1	0	15.0
		8	7	13.8	14.0	14.2	0	15.0
		15	0	13.8	14.0	14.0	0	15.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				18607	18900	19193	MPR	Tune-up Limit
				1850.7 MHz	1880 MHz	1909.3 MHz		
1.4	QPSK	1	0	13.8	13.9	14.0	0	15.0
		1	3	13.8	14.0	14.1	0	15.0
		1	5	13.8	14.0	14.0	0	15.0
		3	0	13.8	13.9	14.0	0	15.0
		3	1	13.8	13.9	14.0	0	15.0
		3	3	13.8	13.9	14.0	0	15.0
		6	0	13.8	13.9	14.0	0	15.0
	16QAM	1	0	14.2	14.2	14.3	0	15.0
		1	3	14.2	14.2	14.2	0	15.0
		1	5	14.2	14.2	14.2	0	15.0
		3	0	13.9	14.1	14.2	0	15.0
		3	1	14.0	14.1	14.1	0	15.0
		3	3	14.0	14.1	14.1	0	15.0
		6	0	13.8	14.0	14.1	0	15.0
	64QAM	1	0	14.1	14.2	14.3	0	15.0
		1	3	14.2	14.3	14.3	0	15.0
		1	5	14.2	14.2	14.2	0	15.0
		3	0	13.9	14.1	14.1	0	15.0
		3	1	13.9	14.1	14.2	0	15.0
		3	3	13.9	14.1	14.1	0	15.0
		6	0	13.8	14.0	14.0	0	15.0

Note(s):

Referenced from UL report # R15110020-S1

LTE Band 4 Measured Result (Cellular Main 2nd) – FCC ID: PY7-76709C and PY7-54773M

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				20050	20175	20300	MPR	Tune-up Limit
				1720 MHz	1732.5 MHz	1745 MHz		
20	QPSK	1	0	20.3	20.3	20.3	0	21.0
		1	49	20.3	20.3	20.4	0	21.0
		1	99	20.3	20.3	20.3	0	21.0
		50	0	20.3	20.3	20.4	0	21.0
		50	24	20.4	20.4	20.5	0	21.0
		50	50	20.4	20.4	20.4	0	21.0
		100	0	20.4	20.4	20.4	0	21.0
	16QAM	1	0	20.5	20.4	20.4	0	21.0
		1	49	20.5	20.5	20.5	0	21.0
		1	99	20.5	20.4	20.4	0	21.0
		50	0	20.4	20.3	20.4	0	21.0
		50	24	20.4	20.4	20.5	0	21.0
		50	50	20.4	20.4	20.4	0	21.0
	64QAM	100	0	20.4	20.4	20.4	0	21.0
		1	0	20.5	20.7	20.6	0	21.0
		1	49	20.5	20.8	20.7	0	21.0
		1	99	20.6	20.7	20.6	0	21.0
		50	0	20.4	20.4	20.4	0	21.0
		50	24	20.4	20.4	20.5	0	21.0
		50	50	20.4	20.4	20.5	0	21.0
	100	0	20.4	20.4	20.5	0	21.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20025	20175	20325	MPR	Tune-up Limit
				1717.5 MHz	1732.5 MHz	1747.5 MHz		
15	QPSK	1	0	20.3	20.3	20.4	0	21.0
		1	37	20.3	20.4	20.4	0	21.0
		1	74	20.3	20.3	20.4	0	21.0
		36	0	20.3	20.3	20.4	0	21.0
		36	20	20.4	20.4	20.4	0	21.0
		36	39	20.4	20.4	20.5	0	21.0
		75	0	20.3	20.3	20.3	0	21.0
	16QAM	1	0	20.4	20.5	20.4	0	21.0
		1	37	20.5	20.5	20.5	0	21.0
		1	74	20.6	20.5	20.6	0	21.0
		36	0	20.4	20.4	20.4	0	21.0
		36	20	20.4	20.3	20.3	0	21.0
		36	39	20.4	20.4	20.4	0	21.0
		75	0	20.3	20.3	20.3	0	21.0
	64QAM	1	0	20.4	20.7	20.7	0	21.0
		1	37	20.7	20.7	20.7	0	21.0
		1	74	20.7	20.7	20.7	0	21.0
		36	0	20.4	20.4	20.4	0	21.0
		36	20	20.4	20.4	20.3	0	21.0
		36	39	20.4	20.4	20.4	0	21.0
		75	0	20.4	20.3	20.4	0	21.0

LTE Band 4 Measured Result (Cellular Main 2nd) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20000	20175	20350	MPR	Tune-up Limit
				1715 MHz	1732.5 MHz	1750 MHz		
10	QPSK	1	0	20.4	20.3	20.3	0	21.0
		1	25	20.4	20.4	20.4	0	21.0
		1	49	20.3	20.3	20.3	0	21.0
		25	0	20.3	20.3	20.3	0	21.0
		25	12	20.3	20.3	20.4	0	21.0
		25	25	20.3	20.3	20.3	0	21.0
		50	0	20.3	20.3	20.3	0	21.0
	16QAM	1	0	20.5	20.5	20.6	0	21.0
		1	25	20.5	20.6	20.6	0	21.0
		1	49	20.4	20.4	20.6	0	21.0
		25	0	20.4	20.4	20.4	0	21.0
		25	12	20.4	20.5	20.5	0	21.0
		25	25	20.4	20.5	20.5	0	21.0
		50	0	20.4	20.4	20.5	0	21.0
	64QAM	1	0	20.5	20.7	20.6	0	21.0
		1	25	20.7	20.7	20.7	0	21.0
		1	49	20.6	20.6	20.6	0	21.0
		25	0	20.4	20.4	20.5	0	21.0
		25	12	20.4	20.5	20.6	0	21.0
		25	25	20.4	20.5	20.5	0	21.0
		50	0	20.4	20.5	20.5	0	21.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19975	20175	20375	MPR	Tune-up Limit
				1712.5 MHz	1732.5 MHz	1752.5 MHz		
5	QPSK	1	0	20.4	20.4	20.5	0	21.0
		1	12	20.4	20.5	20.5	0	21.0
		1	24	20.4	20.4	20.5	0	21.0
		12	0	20.3	20.4	20.5	0	21.0
		12	7	20.4	20.5	20.5	0	21.0
		12	13	20.4	20.5	20.5	0	21.0
		25	0	20.4	20.4	20.5	0	21.0
	16QAM	1	0	20.4	20.4	20.5	0	21.0
		1	12	20.5	20.5	20.6	0	21.0
		1	24	20.6	20.5	20.6	0	21.0
		12	0	20.4	20.3	20.4	0	21.0
		12	7	20.4	20.4	20.4	0	21.0
		12	13	20.4	20.4	20.5	0	21.0
		25	0	20.4	20.3	20.4	0	21.0
	64QAM	1	0	20.4	20.7	20.7	0	21.0
		1	12	20.8	20.8	20.8	0	21.0
		1	24	20.8	20.8	20.8	0	21.0
		12	0	20.5	20.4	20.5	0	21.0
		12	7	20.5	20.5	20.5	0	21.0
		12	13	20.4	20.4	20.5	0	21.0
		25	0	20.4	20.4	20.4	0	21.0

LTE Band 4 Measured Result (Cellular Main 2nd) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19965	20175	20385	MPR	Tune-up Limit
				1711.5 MHz	1732.5 MHz	1753.5 MHz		
3	QPSK	1	0	20.3	20.3	20.4	0	21.0
		1	8	20.4	20.5	20.7	0	21.0
		1	14	20.3	20.3	20.4	0	21.0
		8	0	20.4	20.4	20.4	0	21.0
		8	4	20.4	20.5	20.5	0	21.0
		8	7	20.4	20.4	20.5	0	21.0
		15	0	20.4	20.4	20.4	0	21.0
	16QAM	1	0	20.4	20.5	20.6	0	21.0
		1	8	20.6	20.6	20.8	0	21.0
		1	14	20.4	20.5	20.6	0	21.0
		8	0	20.4	20.5	20.5	0	21.0
		8	4	20.4	20.5	20.6	0	21.0
		8	7	20.4	20.5	20.6	0	21.0
	64QAM	15	0	20.4	20.5	20.5	0	21.0
		1	0	20.6	20.6	20.6	0	21.0
		1	8	20.7	20.7	20.8	0	21.0
		1	14	20.6	20.6	20.6	0	21.0
		8	0	20.4	20.5	20.5	0	21.0
		8	4	20.4	20.5	20.5	0	21.0
		8	7	20.4	20.5	20.6	0	21.0
	15	0	20.4	20.5	20.5	0	21.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19957	20175	20393	MPR	Tune-up Limit
				1710.7 MHz	1732.5 MHz	1754.3 MHz		
1.4	QPSK	1	0	20.4	20.3	20.3	0	21.0
		1	3	20.4	20.3	20.3	0	21.0
		1	5	20.4	20.4	20.4	0	21.0
		3	0	20.3	20.3	20.3	0	21.0
		3	1	20.3	20.3	20.3	0	21.0
		3	3	20.4	20.4	20.4	0	21.0
		6	0	20.3	20.4	20.4	0	21.0
	16QAM	1	0	20.4	20.4	20.5	0	21.0
		1	3	20.5	20.6	20.5	0	21.0
		1	5	20.6	20.6	20.6	0	21.0
		3	0	20.4	20.5	20.4	0	21.0
		3	1	20.5	20.5	20.5	0	21.0
		3	3	20.5	20.5	20.5	0	21.0
		6	0	20.3	20.4	20.4	0	21.0
	64QAM	1	0	20.4	20.7	20.7	0	21.0
		1	3	20.8	20.8	20.7	0	21.0
		1	5	20.8	20.8	20.9	0	21.0
		3	0	20.6	20.6	20.5	0	21.0
		3	1	20.6	20.6	20.6	0	21.0
		3	3	20.6	20.6	20.6	0	21.0
		6	0	20.5	20.5	20.5	0	21.0

LTE Band 5 Measured Result (Cellular Main 1st) – FCC ID: PY7-76709C

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				20450	20525	20600	MPR	Tune-up Limit
				829 MHz	836.5 MHz	844 MHz		
10	QPSK	1	0	20.3	20.3	20.3	0	22.0
		1	25	20.3	20.3	20.3	0	22.0
		1	49	20.2	20.2	20.1	0	22.0
		25	0	20.3	20.3	20.3	0	22.0
		25	12	20.3	20.3	20.3	0	22.0
		25	25	20.3	20.3	20.1	0	22.0
		50	0	20.3	20.2	20.2	0	22.0
	16QAM	1	0	20.5	20.6	20.6	0	22.0
		1	25	20.5	20.6	20.5	0	22.0
		1	49	20.4	20.5	20.4	0	22.0
		25	0	20.3	20.3	20.3	0	22.0
		25	12	20.4	20.3	20.3	0	22.0
		25	25	20.3	20.3	20.1	0	22.0
	64QAM	50	0	20.3	20.3	20.2	0	22.0
		1	0	20.6	20.4	20.4	0	22.0
		1	25	20.6	20.5	20.4	0	22.0
		1	49	20.5	20.4	20.3	0	22.0
		25	0	20.2	20.2	20.2	0	22.0
		25	12	20.3	20.3	20.2	0	22.0
		25	25	20.3	20.2	20.1	0	22.0
	50	0	20.3	20.2	20.2	0	22.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz		
5	QPSK	1	0	20.3	20.4	20.2	0	22.0
		1	12	20.3	20.3	20.2	0	22.0
		1	24	20.3	20.3	20.1	0	22.0
		12	0	20.3	20.3	20.3	0	22.0
		12	7	20.4	20.3	20.2	0	22.0
		12	13	20.3	20.2	20.2	0	22.0
		25	0	20.3	20.3	20.2	0	22.0
	16QAM	1	0	20.8	20.7	20.5	0	22.0
		1	12	20.7	20.7	20.5	0	22.0
		1	24	20.8	20.6	20.5	0	22.0
		12	0	20.4	20.3	20.2	0	22.0
		12	7	20.4	20.3	20.2	0	22.0
		12	13	20.4	20.3	20.1	0	22.0
		25	0	20.4	20.3	20.2	0	22.0
	64QAM	1	0	20.6	20.5	20.4	0	22.0
		1	12	20.6	20.5	20.4	0	22.0
		1	24	20.6	20.4	20.4	0	22.0
		12	0	20.4	20.3	20.2	0	22.0
		12	7	20.4	20.3	20.2	0	22.0
		12	13	20.4	20.2	20.2	0	22.0
		25	0	20.3	20.2	20.2	0	22.0

LTE Band 5 Measured Results (Cellular Main 1st) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz		
3	QPSK	1	0	20.1	20.3	20.2	0	22.0
		1	8	20.0	20.4	20.2	0	22.0
		1	14	20.1	20.2	20.1	0	22.0
		8	0	20.0	20.3	20.2	0	22.0
		8	4	20.0	20.3	20.2	0	22.0
		8	7	20.0	20.3	20.2	0	22.0
		15	0	20.1	20.3	20.2	0	22.0
	16QAM	1	0	20.3	20.7	20.5	0	22.0
		1	8	20.2	20.7	20.5	0	22.0
		1	14	20.3	20.6	20.4	0	22.0
		8	0	20.1	20.4	20.3	0	22.0
		8	4	20.1	20.4	20.3	0	22.0
		8	7	20.1	20.4	20.2	0	22.0
		15	0	20.1	20.3	20.2	0	22.0
	64QAM	1	0	20.4	20.5	20.4	0	22.0
		1	8	20.5	20.6	20.5	0	22.0
		1	14	20.4	20.4	20.3	0	22.0
		8	0	20.4	20.3	20.2	0	22.0
		8	4	20.4	20.3	20.2	0	22.0
		8	7	20.4	20.3	20.2	0	22.0
		15	0	20.3	20.3	20.2	0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4	QPSK	1	0	20.3	20.3	20.1	0	22.0
		1	3	20.3	20.3	20.0	0	22.0
		1	5	20.3	20.3	20.1	0	22.0
		3	0	20.3	20.2	20.0	0	22.0
		3	1	20.3	20.2	20.0	0	22.0
		3	3	20.3	20.2	20.0	0	22.0
		6	0	20.3	20.2	20.1	0	22.0
	16QAM	1	0	20.6	20.5	20.3	0	22.0
		1	3	20.6	20.5	20.2	0	22.0
		1	5	20.6	20.5	20.3	0	22.0
		3	0	20.4	20.4	20.1	0	22.0
		3	1	20.4	20.4	20.1	0	22.0
		3	3	20.4	20.4	20.1	0	22.0
		6	0	20.3	20.3	20.1	0	22.0
	64QAM	1	0	20.6	20.4	20.4	0	22.0
		1	3	20.6	20.5	20.4	0	22.0
		1	5	20.5	20.4	20.3	0	22.0
		3	0	20.4	20.3	20.2	0	22.0
		3	1	20.4	20.4	20.2	0	22.0
		3	3	20.4	20.4	20.1	0	22.0
		6	0	20.4	20.3	20.1	0	22.0

Note(s):

Referenced from UL report # R15110020-S1

LTE Band 12 Measured Results (Cellular Main 1st) – FCC ID: PY7-76709C and PY7-54773M

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10	QPSK	1	0	21.1	21.1	21.1	0	22.0
		1	25	21.1	21.1	21.1	0	22.0
		1	49	21.1	21.1	21.1	0	22.0
		25	0	21.0	21.1	21.1	0	22.0
		25	12	21.1	21.1	21.2	0	22.0
		25	25	21.1	21.2	21.2	0	22.0
		50	0	21.1	21.1	21.1	0	22.0
	16QAM	1	0	21.3	21.4	21.3	0	22.0
		1	25	21.3	21.5	21.4	0	22.0
		1	49	21.4	21.4	21.3	0	22.0
		25	0	21.0	21.2	21.1	0	22.0
		25	12	21.2	21.2	21.2	0	22.0
		25	25	21.1	21.2	21.2	0	22.0
	64QAM	50	0	21.1	21.1	21.1	0	22.0
		1	0	21.3	21.2	21.3	0	22.0
		1	25	21.3	21.3	21.3	0	22.0
		1	49	21.4	21.3	21.3	0	22.0
		25	0	21.0	21.1	21.1	0	22.0
		25	12	21.1	21.1	21.2	0	22.0
		25	25	21.1	21.2	21.1	0	22.0
	50	0	21.1	21.1	21.0	0	22.0	
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5	QPSK	1	0	21.2	21.1	21.2	0	22.0
		1	12	21.1	21.2	21.2	0	22.0
		1	24	21.1	21.1	21.1	0	22.0
		12	0	21.1	21.1	21.1	0	22.0
		12	7	21.1	21.1	21.2	0	22.0
		12	13	21.1	21.1	21.1	0	22.0
		25	0	21.1	21.1	21.1	0	22.0
	16QAM	1	0	21.5	21.5	21.5	0	22.0
		1	12	21.5	21.6	21.5	0	22.0
		1	24	21.4	21.5	21.4	0	22.0
		12	0	21.1	21.2	21.2	0	22.0
		12	7	21.1	21.2	21.2	0	22.0
		12	13	21.1	21.2	21.2	0	22.0
		25	0	21.1	21.1	21.1	0	22.0
	64QAM	1	0	21.4	21.4	21.5	0	22.0
		1	12	21.4	21.5	21.5	0	22.0
		1	24	21.4	21.3	21.4	0	22.0
		12	0	21.1	21.0	21.1	0	22.0
		12	7	21.1	21.0	21.1	0	22.0
		12	13	21.1	21.0	21.1	0	22.0
		25	0	21.1	21.1	21.1	0	22.0

LTE Band 12 Measured Results (Cellular Main 1st) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3	QPSK	1	0	21.0	21.1	21.1	0	22.0
		1	8	21.2	21.2	21.2	0	22.0
		1	14	21.0	21.1	21.0	0	22.0
		8	0	21.0	21.1	21.1	0	22.0
		8	4	21.1	21.1	21.1	0	22.0
		8	7	21.1	21.1	21.1	0	22.0
		15	0	21.1	21.1	21.1	0	22.0
	16QAM	1	0	21.3	21.5	21.4	0	22.0
		1	8	21.4	21.6	21.6	0	22.0
		1	14	21.3	21.5	21.4	0	22.0
		8	0	21.1	21.1	21.2	0	22.0
		8	4	21.2	21.2	21.2	0	22.0
		8	7	21.1	21.2	21.2	0	22.0
		15	0	21.1	21.1	21.2	0	22.0
	64QAM	1	0	21.2	21.4	21.4	0	22.0
		1	8	21.3	21.5	21.5	0	22.0
		1	14	21.2	21.3	21.3	0	22.0
		8	0	21.1	21.2	21.2	0	22.0
		8	4	21.2	21.2	21.2	0	22.0
		8	7	21.1	21.2	21.2	0	22.0
		15	0	21.1	21.1	21.2	0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4	QPSK	1	0	21.0	21.1	21.0	0	22.0
		1	3	21.0	21.1	21.0	0	22.0
		1	5	21.0	21.1	21.0	0	22.0
		3	0	21.0	21.1	21.0	0	22.0
		3	1	21.0	21.0	21.0	0	22.0
		3	3	21.0	21.1	21.0	0	22.0
		6	0	21.0	21.1	21.1	0	22.0
	16QAM	1	0	21.3	21.4	21.3	0	22.0
		1	3	21.2	21.4	21.2	0	22.0
		1	5	21.2	21.4	21.3	0	22.0
		3	0	21.1	21.2	21.2	0	22.0
		3	1	21.2	21.2	21.1	0	22.0
		3	3	21.2	21.2	21.1	0	22.0
		6	0	21.1	21.1	21.1	0	22.0
	64QAM	1	0	21.4	21.3	21.3	0	22.0
		1	3	21.4	21.3	21.3	0	22.0
		1	5	21.4	21.3	21.3	0	22.0
		3	0	21.2	21.2	21.2	0	22.0
		3	1	21.2	21.2	21.2	0	22.0
		3	3	21.2	21.3	21.2	0	22.0
		6	0	21.1	21.1	21.2	0	22.0

Note(s):

Referenced from UL report # R15110020-S1

LTE Band 13 Measured Results (Cellular Main 1st) – FCC ID: PY7-76709C

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)				
				23230			MPR	Tune-up Limit
				782 MHz				
10	QPSK	1	0		21.4		0	22.0
		1	25		21.5		0	22.0
		1	49		21.6		0	22.0
		25	0		21.4		0	22.0
		25	12		21.5		0	22.0
		25	25		21.5		0	22.0
		50	0		21.5		0	22.0
	16QAM	1	0		21.6		0	22.0
		1	25		21.7		0	22.0
		1	49		21.7		0	22.0
		25	0		21.5		0	22.0
		25	12		21.5		0	22.0
		25	25		21.6		0	22.0
		50	0		21.5		0	22.0
	64QAM	1	0		21.8		0	22.0
		1	25		21.9		0	22.0
		1	49		21.9		0	22.0
		25	0		21.5		0	22.0
		25	12		21.5		0	22.0
		25	25		21.6		0	22.0
		50	0		21.6		0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)			MPR	Tune-up Limit
				23205	23230	23255		
				779.5 MHz	782 MHz	784.5 MHz		
5	QPSK	1	0	21.5	21.5	21.5	0	22.0
		1	12	21.5	21.5	21.6	0	22.0
		1	24	21.5	21.5	21.6	0	22.0
		12	0	21.4	21.4	21.5	0	22.0
		12	7	21.5	21.5	21.6	0	22.0
		12	13	21.5	21.5	21.6	0	22.0
		25	0	21.5	21.5	21.5	0	22.0
	16QAM	1	0	21.7	21.9	21.8	0	22.0
		1	12	21.7	21.9	21.9	0	22.0
		1	24	21.7	21.8	21.9	0	22.0
		12	0	21.6	21.6	21.6	0	22.0
		12	7	21.7	21.6	21.6	0	22.0
		12	13	21.6	21.6	21.6	0	22.0
		25	0	21.5	21.5	21.5	0	22.0
	64QAM	1	0	21.7	21.7	21.8	0	22.0
		1	12	21.8	21.8	21.9	0	22.0
		1	24	21.7	21.7	21.8	0	22.0
		12	0	21.4	21.5	21.6	0	22.0
		12	7	21.5	21.5	21.7	0	22.0
		12	13	21.5	21.6	21.7	0	22.0
		25	0	21.5	21.5	21.5	0	22.0

Note(s):
Referenced from UL report # R15110020-S1

LTE Band 41 Measured Results (Cellular Main 2nd) – FCC ID: PY7-76709C

BW (MHz)	Mode	RB Allocation	RB Offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20	QPSK	1	0	18.5	18.5	18.5	18.5	18.4	0	19.0
		1	49	18.5	18.6	18.6	18.6	18.5	0	19.0
		1	99	18.4	18.4	18.4	18.5	18.3	0	19.0
		50	0	18.4	18.5	18.5	18.6	18.4	0	19.0
		50	24	18.5	18.6	18.6	18.7	18.5	0	19.0
		50	50	18.5	18.6	18.6	18.6	18.5	0	19.0
		100	0	18.5	18.6	18.6	18.6	18.5	0	19.0
	16QAM	1	0	18.5	18.7	18.6	18.6	18.4	0	19.0
		1	49	18.6	18.7	18.7	18.7	18.5	0	19.0
		1	99	18.6	18.6	18.5	18.6	18.4	0	19.0
		50	0	18.5	18.6	18.5	18.6	18.5	0	19.0
		50	24	18.6	18.6	18.6	18.7	18.5	0	19.0
		50	50	18.5	18.6	18.6	18.7	18.5	0	19.0
		100	0	18.5	18.6	18.6	18.7	18.5	0	19.0
	64QAM	1	0	18.5	18.6	18.5	18.7	18.4	0	19.0
		1	49	18.5	18.6	18.6	18.8	18.5	0	19.0
		1	99	18.5	18.5	18.5	18.7	18.3	0	19.0
		50	0	18.5	18.6	18.5	18.6	18.5	0	19.0
		50	24	18.6	18.7	18.6	18.7	18.6	0	19.0
		50	50	18.6	18.6	18.6	18.7	18.5	0	19.0
		100	0	18.5	18.6	18.6	18.7	18.5	0	19.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15	QPSK	1	0	18.4	18.5	18.5	18.5	18.4	0	19.0
		1	37	18.5	18.5	18.5	18.7	18.5	0	19.0
		1	74	18.4	18.5	18.5	18.6	18.4	0	19.0
		36	0	18.4	18.5	18.5	18.5	18.4	0	19.0
		36	20	18.5	18.6	18.5	18.7	18.5	0	19.0
		36	39	18.5	18.5	18.6	18.6	18.5	0	19.0
		75	0	18.4	18.5	18.5	18.6	18.4	0	19.0
	16QAM	1	0	18.5	18.5	18.5	18.6	18.5	0	19.0
		1	37	18.6	18.7	18.6	18.7	18.5	0	19.0
		1	74	18.4	18.5	18.6	18.6	18.4	0	19.0
		36	0	18.5	18.5	18.5	18.6	18.4	0	19.0
		36	20	18.6	18.6	18.5	18.7	18.5	0	19.0
		36	39	18.5	18.6	18.6	18.7	18.5	0	19.0
		75	0	18.5	18.6	18.5	18.6	18.5	0	19.0
	64QAM	1	0	18.6	18.5	18.5	18.6	18.5	0	19.0
		1	37	18.6	18.6	18.6	18.7	18.6	0	19.0
		1	74	18.5	18.5	18.5	18.6	18.5	0	19.0
		36	0	18.5	18.5	18.5	18.6	18.5	0	19.0
		36	20	18.6	18.6	18.5	18.7	18.5	0	19.0
		36	39	18.6	18.6	18.6	18.7	18.5	0	19.0
		75	0	18.5	18.6	18.6	18.7	18.5	0	19.0

LTE Band 41 Measured Results (Cellular Main 2nd) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10	QPSK	1	0	18.4	18.5	18.5	18.5	18.4	0	19.0
		1	25	18.5	18.5	18.6	18.6	18.4	0	19.0
		1	49	18.5	18.5	18.6	18.6	18.4	0	19.0
		25	0	18.4	18.5	18.6	18.5	18.4	0	19.0
		25	12	18.6	18.6	18.6	18.7	18.5	0	19.0
		25	25	18.5	18.6	18.6	18.6	18.5	0	19.0
		50	0	18.5	18.6	18.6	18.6	18.4	0	19.0
	16QAM	1	0	18.6	18.6	18.6	18.7	18.5	0	19.0
		1	25	18.6	18.6	18.6	18.7	18.5	0	19.0
		1	49	18.6	18.6	18.6	18.7	18.5	0	19.0
		25	0	18.5	18.5	18.6	18.6	18.4	0	19.0
		25	12	18.6	18.6	18.7	18.7	18.5	0	19.0
		25	25	18.6	18.6	18.7	18.7	18.5	0	19.0
		50	0	18.5	18.6	18.6	18.7	18.5	0	19.0
	64QAM	1	0	18.4	18.5	18.6	18.6	18.5	0	19.0
		1	25	18.5	18.5	18.6	18.7	18.5	0	19.0
		1	49	18.5	18.4	18.5	18.7	18.4	0	19.0
		25	0	18.5	18.6	18.5	18.6	18.5	0	19.0
		25	12	18.6	18.6	18.6	18.7	18.6	0	19.0
		25	25	18.6	18.6	18.6	18.7	18.6	0	19.0
		50	0	18.6	18.6	18.6	18.7	18.6	0	19.0
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5	QPSK	1	0	18.5	18.5	18.5	18.6	18.5	0	19.0
		1	12	18.6	18.6	18.6	18.7	18.6	0	19.0
		1	24	18.6	18.5	18.6	18.5	18.4	0	19.0
		12	0	18.5	18.6	18.5	18.6	18.4	0	19.0
		12	7	18.5	18.6	18.6	18.7	18.5	0	19.0
		12	13	18.5	18.6	18.6	18.6	18.5	0	19.0
		25	0	18.5	18.6	18.6	18.6	18.5	0	19.0
	16QAM	1	0	18.6	18.7	18.7	18.5	18.5	0	19.0
		1	12	18.6	18.7	18.7	18.7	18.6	0	19.0
		1	24	18.6	18.6	18.6	18.6	18.4	0	19.0
		12	0	18.5	18.5	18.6	18.5	18.5	0	19.0
		12	7	18.5	18.5	18.7	18.6	18.6	0	19.0
		12	13	18.5	18.6	18.7	18.6	18.5	0	19.0
		25	0	18.6	18.6	18.6	18.7	18.5	0	19.0
	64QAM	1	0	18.6	18.5	18.6	18.6	18.5	0	19.0
		1	12	18.6	18.6	18.7	18.7	18.6	0	19.0
		1	24	18.5	18.5	18.5	18.6	18.4	0	19.0
		12	0	18.7	18.6	18.6	18.6	18.5	0	19.0
		12	7	18.7	18.7	18.7	18.8	18.6	0	19.0
		12	13	18.7	18.6	18.6	18.7	18.6	0	19.0
		25	0	18.6	18.6	18.6	18.7	18.5	0	19.0

Note(s):

Referenced from UL report # R15110020-S1

9.4. 5G NR (FR1)

RF Air interface	Mode	Tune-up PowerLimit (dBm)	
		Cellular Main 1st	Cellular Main 2nd
		Normal	Normal
NR n66	QPSK		21.0

NR n66 (Cellular Main 2nd) – FCC ID: PY7-76709C

ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
								344000	349000	354000	MPR	Tune-up Limit
								1720 MHz	1745 MHz	1770 MHz		
100	20	20	DFT-s	15	$\pi/2$ BPSK	1	1	20.7	20.8	20.8	0	21
						1	53	20.8	20.8	20.7	0	21
						1	104	20.8	20.8	20.7	0	21
						50	28	20.8	20.9	20.8	0	21
					QPSK	1	1	20.7	20.8	20.8	0	21
						1	53	20.8	20.8	20.7	0	21
						1	104	20.8	20.8	20.6	0	21
						50	28	20.8	20.8	20.8	0	21
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
343500	349000	354500	MPR	Tune-up Limit								
1717.5 MHz	1745 MHz	1772.5 MHz										
100	20	15	DFT-s	15	$\pi/2$ BPSK	1	1	20.8	20.9	20.8	0	21
						1	39	20.7	20.8	20.7	0	21
						1	77	20.9	20.8	20.7	0	21
						36	22	20.8	20.8	20.7	0	21
					QPSK	1	1	20.8	20.9	20.8	0	21
						1	39	20.7	20.8	20.7	0	21
						1	77	20.8	20.8	20.7	0	21
						36	22	20.7	20.8	20.6	0	21
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
343000	349000	355000	MPR	Tune-up Limit								
1715 MHz	1745 MHz	1775 MHz										
100	20	10	DFT-s	15	$\pi/2$ BPSK	1	1	20.8	20.7	20.8	0	21
						1	26	20.8	20.8	20.8	0	21
						1	50	20.8	20.7	20.7	0	21
						25	14	20.8	20.8	20.7	0	21
					QPSK	1	1	20.7	20.8	20.7	0	21
						1	26	20.7	20.8	20.7	0	21
						1	50	20.8	20.7	20.7	0	21
						25	14	20.6	20.6	20.6	0	21
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
342500	349000	355500	MPR	Tune-up Limit								
1712.5 MHz	1745 MHz	1777.5 MHz										
100	20	5	DFT-s	15	$\pi/2$ BPSK	1	1	20.8	20.9	20.8	0	21
						1	12	20.8	20.9	20.8	0	21
						1	23	20.9	20.9	20.8	0	21
						12	6	20.8	20.9	20.8	0	21
					QPSK	1	1	20.8	20.9	20.8	0	21
						1	12	20.8	20.9	20.8	0	21
						1	23	20.8	20.8	20.7	0	21
						12	6	20.7	20.8	20.7	0	21

Note(s):

Referenced from UL report # R15110020-S1

9.5. Wi-Fi 2.4GHz (DTS Band)

Maximum Output Power (Tune-up Limit) for Wi-Fi 2.4 GHz

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11b/g/n mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Mode	Max Tune-Up Power Limit (dBm)			
	WLAN Chain 0		WLAN Chain 1	
	Normal	Simultaneous 2G_5G	Normal	Simultaneous 2G_5G
11b	14.0	11.5	12.5	11.5
11g	14.0	11.5	14.0	11.5
11n HT-20	14.0	11.5	14.0	11.5
11ax HE-20	14.0	11.5	14.0	11.5

Wi-Fi 2.4GHz Normal State Measured Results – FCC ID: PY7-76709C and PY7-54773M

Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1	2412	13.7	14.0	Yes	12.5	12.5	Yes
		6	2437	13.7	14.0		12.5	12.5	
		11	2462	13.5	14.0		12.5	12.5	

Note(s):

Referenced from UL report # R15110020-S1

Wi-Fi 2.4GHz Simultaneous State Measured Results – FCC ID: PY7-76709C and PY7-54773M

Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1	2412	11.4	11.5	Yes	10.5	11.5	Yes
		6	2437	11.3	11.5		11.0	11.5	
		11	2462	10.9	11.5		11.1	11.5	

Note(s):

Referenced from UL report # R15110020-S1

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11b	1 Mbps	12.39	12.41	99.8%	1.00
802.11g	6 Mbps	5.426	5.447	99.6%	1.00

Note(s):


Duty Cycle = (T on / period) * 100%

WLAN 2.4GHz Duty Cycle

802.11b



802.11g

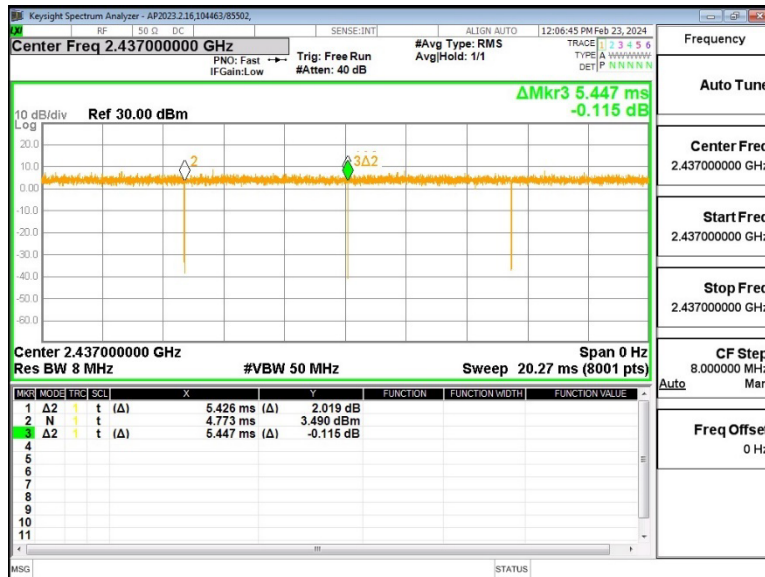

9.6. Wi-Fi 5GHz (U-NII Bands)

Maximum Output Power (Tune-up Limit) for Wi-Fi 5 GHz

When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 transmission mode is selected.

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

11a		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	6Mbps	6Mbps
5150~5250MHz	36	11.5	9.5
	40-48	11.5	9.5
	52-60	11.5	9.5
5250~5350MHz	64	11.5	9.5
	100	11.5	9.5
5470~5730MHz	104-136,144	11.5	9.5
	140	11.5	9.5
	149	11.5	9.5
5735~5850MHz	153-161	11.5	9.5
	165	11.5	9.5

11n HT-20(2G/5G) 11ac VHT-20(5G) 11ax HE-20(2G/5G)		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	mcs-0	mcs-0
5150~5250MHz	36	11.5	9.5
	40-48	11.5	9.5
	52-60	11.5	9.5
5250~5350MHz	64	11.5	9.5
	100,140	11.5	9.5
5470~5730MHz	104-136,144	11.5	9.5
	149	11.5	9.5
	153-161,165	11.5	9.5

11n HT-40(5G)		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	mcs-0	mcs-0
5150~5250MHz	38	11.5	9.5
	46	11.5	9.5
	54	11.5	9.5
5250~5350MHz	62	11.5	9.5
	102	11.5	9.5
5470~5730MHz	110-142	11.5	9.5
	151	11.5	9.5
5735~5850MHz	159	11.5	9.5

11ac VHT-40(5G) 11ax HE-40(5G)		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	mcs-0	mcs-0
5150~5250MHz	38	11.5	9.5
	46	11.5	9.5
	54	11.5	9.5
5250~5350MHz	62	11.5	9.5
	102	11.5	9.5
5470~5730MHz	110-142	11.5	9.5
	151	11.5	9.5
5735~5850MHz	159	11.5	9.5

11ac VHT-80(5G) 11ax HE-80(5G)		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	mcs-0	mcs-0
5150~5250MHz	42	11.5	9.5
	58	11.0	9.5
	106	10.5	9.5
5470~5730MHz	122-138	11.5	9.5
	155	9.0	9.0

11ac VHT-160(5G) 11ax HE-160(5G)		Normal State (FCC_Norm) [dBm]	Simultaneous 2G Tx and 5G Tx State (Simul_2g5g) [dBm]
Band	channel	mcs-0	mcs-0
5150~5350MHz	50	11.5	9.5
5470~5730MHz	114	9.5	9.5

Wi-Fi 5 GHz Normal State Measured Results – FCC ID: PY7-76709C and PY7-54773M

Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 5.2 GHz	802.11ac (VHT80)	42	5210	11.2	11.5	Yes	10.9	11.5	Yes
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 & 2A	802.11ac (VHT160)	50	5250	11.3	11.5	Yes	11.1	11.5	Yes
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11ac (VHT80)	106	5530	10.3	10.5	Yes	10.3	10.5	Yes
		122	5610	11.3	11.5		11.2	11.5	
		138	5690	11.4	11.5		11.1	11.5	
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 5.8 GHz	802.11n (HT40)	151	5755	11.4	11.5	Yes	11.1	11.5	Yes
		159	5795	11.4	11.5		11.0	11.5	

Note(s):

Referenced from UL report # R15110020-S1

Wi-Fi 5 GHz Simultaneous State Measured Results – FCC ID: PY7-76709C and PY7-54773M

Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 5.2 GHz	802.11ac (VHT80)	42	5210	9.3	9.5	Yes	9.4	9.5	Yes
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 & 2A	802.11ac (VHT160)	50	5250	9.1	9.5	Yes	9.5	9.5	Yes
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11ac (VHT160)	114	5570	9.0	9.5	Yes	9.4	9.5	Yes
Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 5.8 GHz	802.11n (HT40)	151	5755	9.2	9.5	Yes	9.4	9.5	Yes
		159	5795	8.9	9.5		9.4	9.5	

Note(s):

Referenced from UL report # R15110020-S1


Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
802.11ac VHT160	MCS0	5.426	5.444	99.7%	1.00
802.11ac VHT80	MCS0	5.426	5.444	99.7%	1.00
802.11n HT40	MCS0	5.429	5.447	99.7%	1.00


Note(s):

Duty Cycle = (T on / period) * 100%


WLAN 5GHz Duty Cycle
802.11ac VHT160

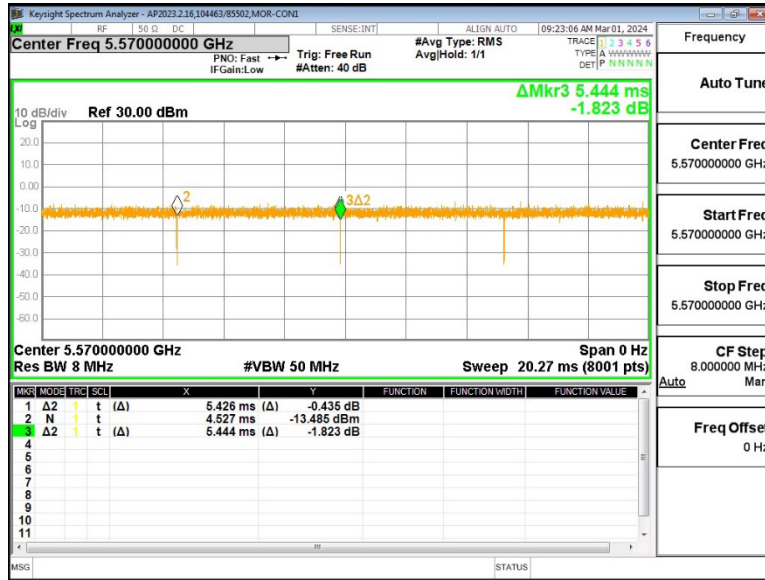

802.11ac VHT80

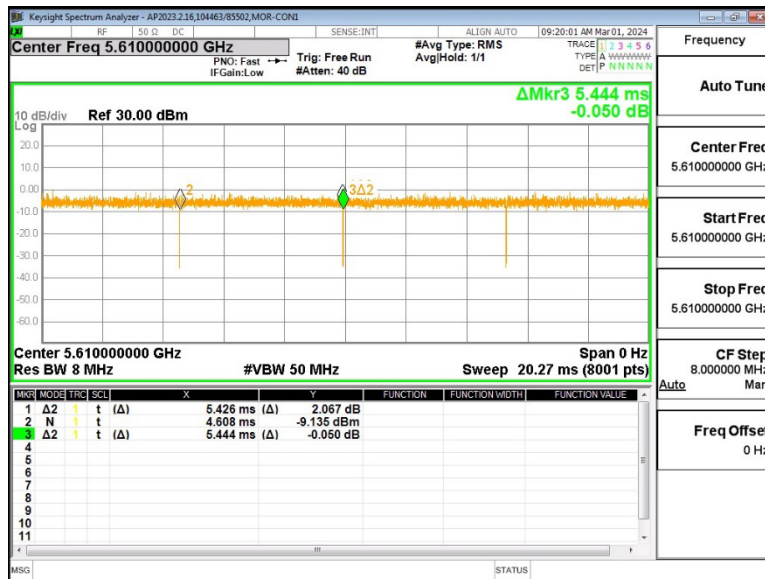

802.11n HT40

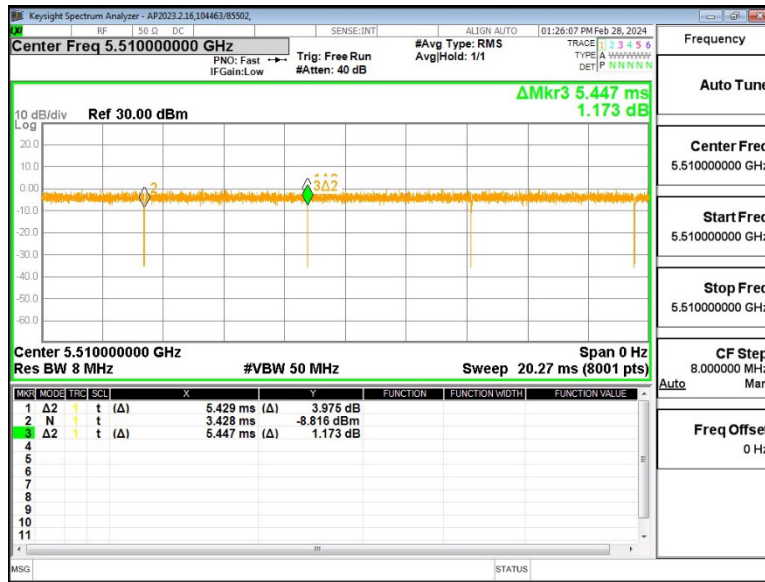

9.7. Bluetooth

Maximum Output Power (Tune-up Limit) for Bluetooth

From October 2016 TCB workshop, Power and SAR were measured with the device connected to a call box with hopping disabled using DH5 modulation. The duty cycle value from the device is taken from the Duty Cycle plot below.

SAR measurement is not required for the EDR and LE. When the secondary mode is $\leq 1/4$ dB higher than the primary mode.

		Manufacturing Max Power (dBm)					
		BR	EDR	BLE 1Mbps	BLE 2Mbps	BLE LR s2	BLE LR s8
2400~2485MHz	Low	14.0	14.0	10.79	10.79	10.79	10.79
	Mid	14.0	14.0	10.79	10.79	10.79	10.79
	High	14.0	14.0	10.79	10.79	10.79	10.79

Bluetooth Measured Results – FCC ID: PY7-76709C and PY7-54773M

Band	Mode	Ch #	Freq. (MHz)	WLAN Chain 0 Average Power (dBm)			WLAN Chain 1 Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
Bluetooth 2.4 GHz	BR GFSK	0	2402	13.9	14.0	Yes	13.7	14.0	Yes
		39	2441	13.1	14.0		13.7	14.0	
		78	2480	13.9	14.0		13.7	14.0	
	EDR, $\pi/4$ DQPSK	0	2402	12.9	14.0	No	13.7	14.0	No
		39	2441	12.2	14.0		13.8	14.0	
		78	2480	13.1	14.0		13.7	14.0	
	EDR, 8-DPSK	0	2402	12.9	14.0	No	13.7	14.0	No
		39	2441	12.1	14.0		13.8	14.0	
		78	2480	13.0	14.0		13.8	14.0	
	LE, GFSK	0	2402	9.94	10.79	No	9.55	10.79	No
		19	2440	9.71	10.79		9.50	10.79	
		39	2480	9.72	10.79		10.47	10.79	

Note(s):

Referenced from UL report # R15110020-S1

Duty Factor Measured Results

Mode	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
BR GFSK	2.88	3.750	76.80%	1.30

Note(s):

Duty Cycle = (T on / period) * 100%

Bluetooth Duty Cycle

BT BR GFSK



10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN and Bluetooth = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM 850

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	Cellular Main 1st Antenna	0	Left Touch	190	836.6	27.5	26.8	0.112	0.132	1
				Left Tilt	190	836.6	27.5	26.8	0.066	0.078	
				Right Touch	190	836.6	27.5	26.8	0.096	0.113	
				Right Tilt	190	836.6	27.5	26.8	0.053	0.062	
Body/Hotspot	GPRS 4 Slots	Cellular Main 1st Antenna	10	Back	190	836.6	27.5	26.8	0.249	0.293	2
				Front	190	836.6	27.5	26.8	0.160	0.188	
Hotspot	GPRS 4 Slots	Cellular Main 1st Antenna	10	Edge Bottom	190	836.6	27.5	26.8	0.155	0.182	
				Edge Left	190	836.6	27.5	26.8	0.128	0.150	
Body / Hotspot	DTM GPRS/EDG E 2 Slots	Cellular Main 1st Antenna	10	Back	190	836.6	30.5	30.2	0.249	0.267	3

Note(s):

1. FCC ID: PY7-76709C and PY7-54773M
2. Referenced from UL report # R15110020-S1

10.2. GSM 1900

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	Cellular Main 2nd Antenna	0	Left Touch	661	1880.0	23.0	22.0	0.011	0.014	
				Left Tilt	661	1880.0	23.0	22.0	0.011	0.014	
				Right Touch	661	1880.0	23.0	22.0	0.016	0.020	4
				Right Tilt	661	1880.0	23.0	22.0	0.007	0.009	
Body/Hotspot	GPRS 4 Slots	Cellular Main 2nd Antenna	10	Back	661	1880.0	23.0	22.0	0.161	0.201	5
				Front	661	1880.0	23.0	22.0	0.144	0.180	
Hotspot	GPRS 4 Slots	Cellular Main 2nd Antenna	10	Edge Right	661	1880.0	23.0	22.0	0.086	0.107	
				Edge Bottom	661	1880.0	23.0	22.0	0.212	0.264	6
Body / Hotspot	DTM GPRS/EDG E 2 Slots	Cellular Main 2nd Antenna	10	Back	661	1880	26.0	24.8	0.195	0.257	7

Note(s):

1. FCC ID: PY7-76709C and PY7-54773M
2. Referenced from UL report # R15110020-S1

10.3. W-CDMA II

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	0	Left Touch	9262	1852.4	19.7	19.7	0.030	0.030	8
				Left Tilt	9262	1852.4	19.7	19.7	0.018	0.018	
				Right Touch	9262	1852.4	19.7	19.7	0.052	0.052	
				Right Tilt	9262	1852.4	19.7	19.7	0.025	0.025	
Body/Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	10	Back	9262	1852.4	19.7	19.7	0.215	0.215	9
				Front	9262	1852.4	19.7	19.7	0.215	0.215	
Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	10	Edge Right	9262	1852.4	19.7	19.7	0.112	0.112	10
				Edge Bottom	9262	1852.4	19.7	19.7	0.222	0.222	

Note(s):

- FCC ID: PY7-76709C and PY7-54773M

10.4. W-CDMA IV

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	0	Left Touch	1413	1732.6	21.7	21.5	0.062	0.065	11
				Left Tilt	1413	1732.6	21.7	21.5	0.044	0.046	
				Right Touch	1413	1732.6	21.7	21.5	0.116	0.121	
				Right Tilt	1413	1732.6	21.7	21.5	0.053	0.055	
Body/Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	10	Back	1413	1732.6	21.7	21.5	0.362	0.378	12
				Front	1413	1732.6	21.7	21.5	0.220	0.230	
Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 2nd Antenna	10	Edge Right	1413	1732.6	21.7	21.5	0.238	0.249	
				Edge Bottom	1413	1732.6	21.7	21.5	0.344	0.359	

Note(s):

- FCC ID: PY7-76709C and PY7-54773M

10.5. W-CDMA V

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC 12.2 kbps	Cellular Main 1st Antenna	0	Left Touch	4183	836.6	22.7	22.4	0.121	0.131	13
				Left Tilt	4183	836.6	22.7	22.4	0.064	0.069	
				Right Touch	4183	836.6	22.7	22.4	0.121	0.131	
				Right Tilt	4183	836.6	22.7	22.4	0.054	0.058	
Body/Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 1st Antenna	10	Back	4183	836.6	22.7	22.4	0.255	0.276	14
				Front	4183	836.6	22.7	22.4	0.176	0.190	
Hotspot	Rel 99 RMC 12.2 kbps	Cellular Main 1st Antenna	10	Edge Bottom	4183	836.6	22.7	22.4	0.174	0.188	
				Edge Left	4183	836.6	22.7	22.4	0.121	0.131	

Note(s):

- FCC ID: PY7-76709C
- Referenced from UL report # R15110020-S1

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	Cellular Main 2nd Antenna	0	Left Touch	18900	1880.0	1	49	19.0	18.4	0.017	0.020	15	
							50	50	19.0	18.4	0.017	0.020		
				Left Tilt	18900	1880.0	1	49	19.0	18.4	0.021	0.024		
							50	50	19.0	18.4	0.023	0.026		
				Right Touch	18900	1880.0	1	49	19.0	18.4	0.022	0.025		
							50	50	19.0	18.4	0.023	0.026		
Right Tilt	18900	1880.0	1	49	19.0	18.4	0.014	0.016						
			50	50	19.0	18.4	0.014	0.016						
Body/Hotspot	QPSK	Cellular Main 2nd Antenna	10	Back	18900	1880.0	1	49	19.0	18.4	0.171	0.196		
							50	50	19.0	18.4	0.175	0.201		
				Front	18900	1880.0	1	49	19.0	18.4	0.177	0.203		
							50	50	19.0	18.4	0.179	0.206		
Hotspot	QPSK	Cellular Main 2nd Antenna	10	Edge Right	18900	1880.0	1	49	19.0	18.4	0.099	0.114		
							50	50	19.0	18.4	0.101	0.116		
				Edge Bottom	18900	1880.0	1	49	19.0	18.4	0.229	0.263		
							50	50	19.0	18.4	0.232	0.266		
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
Head	QPSK	Cellular Sub	0	Left Touch	18900	1880.0	1	99	15.0	14.0	0.269	0.339	18	
							50	50	15.0	14.0	0.274	0.345		
				Left Tilt	18900	1880.0	1	99	15.0	14.0	0.315	0.397		
							50	50	15.0	14.0	0.323	0.407		
				Right Touch	18900	1880.0	1	99	15.0	14.0	0.231	0.291		
							50	50	15.0	14.0	0.236	0.297		
Right Tilt	18900	1880.0	1	99	15.0	14.0	0.289	0.364						
			50	50	15.0	14.0	0.296	0.373						
Body/Hotspot	QPSK	Cellular Sub	10	Back	18900	1880.0	1	99	15.0	14.0	0.092	0.116	19	
							50	50	15.0	14.0	0.093	0.117		
				Front	18900	1880.0	1	99	15.0	14.0	0.073	0.092		
							50	50	15.0	14.0	0.075	0.094		
Hotspot	QPSK	Cellular Sub	10	Edge Top	18900	1880.0	1	99	15.0	14.0	0.154	0.194	20	
							50	50	15.0	14.0	0.157	0.198		
				Edge Right	18900	1880.0	1	99	15.0	14.0	0.003	0.004		
							50	50	15.0	14.0	0.004	0.005		

Note(s):

1. Main antenna supports FCC ID: PY7-76709C and PY7-54773M
2. Sub antenna supports FCC ID: PY7-76709C

10.7. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	Cellular Main 2nd Antenna	0	Left Touch	20175	1732.5	1	0	21.0	20.3	0.067	0.079	21	
							50	24	21.0	20.4	0.068	0.078		
				Left Tilt	20175	1732.5	1	0	21.0	20.3	0.037	0.043		
							50	24	21.0	20.4	0.036	0.041		
				Right Touch	20175	1732.5	1	0	21.0	20.3	0.090	0.106		
							50	24	21.0	20.4	0.092	0.106		
Right Tilt	20175	1732.5	1	0	21.0	20.3	0.031	0.036						
			50	24	21.0	20.4	0.031	0.036						
Body/Hotspot	QPSK	Cellular Main 2nd Antenna	10	Back	20175	1732.5	1	0	21.0	20.3	0.190	0.223	22	
							50	24	21.0	20.4	0.199	0.228		
				Front	20175	1732.5	1	0	21.0	20.3	0.183	0.215		
							50	24	21.0	20.4	0.193	0.222		
Hotspot	QPSK	Cellular Main 2nd Antenna	10	Edge Right	20175	1732.5	1	0	21.0	20.3	0.181	0.213		
							50	24	21.0	20.4	0.183	0.210		
				Edge Bottom	20175	1732.5	1	0	21.0	20.3	0.275	0.323		
							50	24	21.0	20.4	0.285	0.327		

Note(s):

1. FCC ID: PY7-76709C and PY7-54773M

10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	Cellular Main 1st Antenna	0	Left Touch	20525	836.5	1	0	22.0	20.3	0.073	0.108	24	
							25	0	22.0	20.3	0.074	0.109		
				Left Tilt	20525	836.5	1	0	22.0	20.3	0.044	0.065		
							25	0	22.0	20.3	0.044	0.065		
				Right Touch	20525	836.5	1	0	22.0	20.3	0.076	0.112		
							25	0	22.0	20.3	0.077	0.114		
Right Tilt	20525	836.5	1	0	22.0	20.3	0.042	0.062						
			25	0	22.0	20.3	0.042	0.062						
Body/Hotspot	QPSK	Cellular Main 1st Antenna	10	Back	20525	836.5	1	0	22.0	20.3	0.205	0.303	25	
							25	0	22.0	20.3	0.208	0.308		
				Front	20525	836.5	1	0	22.0	20.3	0.134	0.198		
							25	0	22.0	20.3	0.134	0.198		
Hotspot	QPSK	Cellular Main 1st Antenna	10	Edge Bottom	20525	836.5	1	0	22.0	20.3	0.114	0.169		
							25	0	22.0	20.3	0.113	0.167		
				Edge Left	20525	836.5	1	0	22.0	20.3	0.104	0.154		
							25	0	22.0	20.3	0.104	0.154		

Note(s):

2. FCC ID: PY7-76709C
3. Referenced from UL report # R15110020-S1

10.9. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	Cellular Main 1st Antenna	0	Left Touch	23095	707.5	1	0	22.0	21.1	0.075	0.092	26	
							25	25	22.0	21.2	0.079	0.095		
				Left Tilt	23095	707.5	1	0	22.0	21.1	0.036	0.044		
							25	25	22.0	21.2	0.035	0.042		
				Right Touch	23095	707.5	1	0	22.0	21.1	0.074	0.091		
							25	25	22.0	21.2	0.074	0.089		
Right Tilt	23095	707.5	1	0	22.0	21.1	0.029	0.036						
			25	25	22.0	21.2	0.029	0.035						
Body/Hotspot	QPSK	Cellular Main 1st Antenna	10	Back	23095	707.5	1	0	22.0	21.1	0.145	0.178	27	
							25	25	22.0	21.2	0.154	0.185		
				Front	23095	707.5	1	0	22.0	21.1	0.093	0.114		
							25	25	22.0	21.2	0.095	0.114		
Hotspot	QPSK	Cellular Main 1st Antenna	10	Edge Bottom	23095	707.5	1	0	22.0	21.1	0.078	0.096	28	
							25	25	22.0	21.2	0.084	0.101		
				Edge Left	23095	707.5	1	0	22.0	21.1	0.154	0.189		
							25	25	22.0	21.2	0.155	0.186		

Note(s):

1. FCC ID: PY7-76709C and PY7-54773M
2. Referenced from UL report # R15110020-S1

10.10. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	Cellular Main 1st Antenna	0	Left Touch	23230	782.0	1	49	22.0	21.6	0.051	0.056	29	
							25	12	22.0	21.5	0.057	0.064		
				Left Tilt	23230	782.0	1	49	22.0	21.6	0.033	0.036		
							25	12	22.0	21.5	0.035	0.039		
				Right Touch	23230	782.0	1	49	22.0	21.6	0.049	0.054		
							25	12	22.0	21.5	0.054	0.061		
Right Tilt	23230	782.0	1	49	22.0	21.6	0.027	0.030						
			25	12	22.0	21.5	0.030	0.034						
Body/Hotspot	QPSK	Cellular Main 1st Antenna	10	Back	23230	782.0	1	49	22.0	21.6	0.113	0.124	30	
							25	12	22.0	21.5	0.121	0.136		
				Front	23230	782.0	1	49	22.0	21.6	0.080	0.088		
							25	12	22.0	21.5	0.087	0.098		
Hotspot	QPSK	Cellular Main 1st Antenna	10	Edge Bottom	23230	782.0	1	49	22.0	21.6	0.062	0.068		
							25	12	22.0	21.5	0.068	0.076		
				Edge Left	23230	782.0	1	49	22.0	21.6	0.062	0.068		
							25	12	22.0	21.5	0.069	0.077		

Note(s):

1. FCC ID: PY7-76709C
2. Referenced from UL report # R15110020-S1

10.11. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	Cellular Main 2nd Antenna	0	Left Touch	40620	2593.0	1	49	19.0	18.6	0.011	0.012	
							50	24	19.0	18.6	0.010	0.011	
				Left Tilt	40620	2593.0	1	49	19.0	18.6	0.011	0.012	
							50	24	19.0	18.6	0.011	0.012	
				Right Touch	40620	2593.0	1	49	19.0	18.6	0.019	0.021	31
							50	24	19.0	18.6	0.018	0.020	
Right Tilt	40620	2593.0	1	49	19.0	18.6	0.007	0.008					
			50	24	19.0	18.6	0.004	0.004					
Body/Hotspot	QPSK	Cellular Main 2nd Antenna	10	Back	40620	2593.0	1	49	19.0	18.6	0.083	0.091	32
							50	24	19.0	18.6	0.083	0.091	
				Front	40620	2593.0	1	49	19.0	18.6	0.064	0.070	
							50	24	19.0	18.6	0.065	0.071	
Hotspot	QPSK	Cellular Main 2nd Antenna	10	Edge Right	40620	2593.0	1	49	19.0	18.6	0.040	0.044	
							50	24	19.0	18.6	0.038	0.042	
				Edge Bottom	40620	2593.0	1	49	19.0	18.6	0.150	0.164	
							50	24	19.0	18.6	0.152	0.167	

Note(s):

- FCC ID: PY7-76709C
- Referenced from UL report # R15110020-S1

10.12. NR n66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	Cellular Main 2nd Antenna	0	Left Touch	349000	1745.0	1	1	21.0	20.8	0.062	0.065	
							50	28	21.0	20.8	0.072	0.075	
				Left Tilt	349000	1745.0	1	1	21.0	20.8	0.060	0.063	
							50	28	21.0	20.8	0.054	0.057	
				Right Touch	349000	1745.0	1	1	21.0	20.8	0.137	0.143	34
							50	28	21.0	20.8	0.124	0.130	
Right Tilt	349000	1745.0	1	1	21.0	20.8	0.071	0.074					
			50	28	21.0	20.8	0.069	0.072					
Body/Hotspot	QPSK	Cellular Main 2nd Antenna	10	Back	349000	1745.0	1	1	21.0	20.8	0.364	0.381	35
							50	28	21.0	20.8	0.393	0.412	
				Front	349000	1745.0	1	1	21.0	20.8	0.307	0.321	
							50	28	21.0	20.8	0.280	0.293	
Hotspot	QPSK	Cellular Main 2nd Antenna	10	Edge Right	349000	1745.0	1	1	21.0	20.8	0.265	0.277	
							50	28	21.0	20.8	0.261	0.273	
				Edge Bottom	349000	1745.0	1	1	21.0	20.8	0.401	0.420	
							50	28	21.0	20.8	0.409	0.428	

Note(s):

- FCC ID: PY7-76709C
- Referenced from UL report # R15110020-S1

10.13. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11b	WLAN Chain 0	Normal	0	Left Touch	6	2437.0	0.096	99.8%	14.0	13.7	0.102	0.110	
					Left Tilt	6	2437.0	0.020	99.8%	14.0	13.7			
					Right Touch	6	2437.0	0.458	99.8%	14.0	13.7	0.487	0.526	37
					Right Tilt	6	2437.0	0.092	99.8%	14.0	13.7			
Body/Hotspot	802.11b	WLAN Chain 0	Normal	10	Back	6	2437.0	0.096	99.8%	14.0	13.7	0.096	0.104	38
					Front	6	2437.0	0.053	99.8%	14.0	13.7			
Hotspot	802.11b	WLAN Chain 0	Normal	10	Edge Top	6	2437.0	0.007	99.8%	14.0	13.7			
					Edge Left	6	2437.0	0.155	99.8%	14.0	13.7	0.156	0.168	39
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11b	WLAN Chain 0	Simul	0	Left Touch	6	2437.0	0.053	99.8%	11.5	11.3			
					Left Tilt	6	2437.0	0.010	99.8%	11.5	11.3			
					Right Touch	6	2437.0	0.224	99.8%	11.5	11.3	0.240	0.255	40
					Right Tilt	6	2437.0	0.039	99.8%	11.5	11.3			
Body/Hotspot	802.11b	WLAN Chain 0	Simul	10	Back	6	2437.0	0.051	99.8%	11.5	11.3	0.051	0.054	41
					Front	6	2437.0	0.035	99.8%	11.5	11.3			
Hotspot	802.11b	WLAN Chain 0	Simul	10	Edge Top	6	2437.0	0.005	99.8%	11.5	11.3			
					Edge Left	6	2437.0	0.088	99.8%	11.5	11.3	0.088	0.093	42
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11b	WLAN Chain 1	Normal	0	Left Touch	6	2437.0	0.005	99.8%	12.5	12.5	0.003	0.003	43
					Left Tilt	6	2437.0	0.000	99.8%	12.5	12.5			
					Right Touch	6	2437.0	0.002	99.8%	12.5	12.5			
					Right Tilt	6	2437.0	0.001	99.8%	12.5	12.5			
Body/Hotspot	802.11b	WLAN Chain 1	Normal	10	Back	6	2437.0	0.242	99.8%	12.5	12.5	0.245	0.248	44
					Front	6	2437.0	0.023	99.8%	12.5	12.5			
Hotspot	802.11b	WLAN Chain 1	Normal	10	Edge Bottom	6	2437.0	0.035	99.8%	12.5	12.5			
					Edge Left	6	2437.0	0.024	99.8%	12.5	12.5			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11b	WLAN Chain 1	Simul	0	Left Touch	6	2437.0	0.002	99.8%	11.5	11.0	<0.01	<0.01	-
					Left Tilt	6	2437.0	0.000	99.8%	11.5	11.0			
					Right Touch	6	2437.0	0.001	99.8%	11.5	11.0			
					Right Tilt	6	2437.0	0.000	99.8%	11.5	11.0			
Body/Hotspot	802.11b	WLAN Chain 1	Simul	10	Back	6	2437.0	0.119	99.8%	11.5	11.0	0.119	0.133	45
					Front	6	2437.0	0.012	99.8%	11.5	11.0			
Hotspot	802.11b	WLAN Chain 1	Simul	10	Edge Bottom	6	2437.0	0.021	99.8%	11.5	11.0			
					Edge Left	6	2437.0	0.015	99.8%	11.5	11.0			

Notes:

- 10-g extremity SAR is not required since hotspot mode 1-g report SAR < 1.2 W/kg
- For results listed with "-", the SAR result is less than 0.01 W/kg.
- FCC ID: PY7-76709C and PY7-54773M
- Referenced from UL report # R15110020-S1

Antenna	DSSS SAR (W/kg)	DSSS Power (dBm)	OFDMA Power (dBm)	Adjusted SAR (W/kg)	Additional SAR Test
Chain 0	0.526	14.0	14.0	0.526	Not Test
Chain 1	0.248	12.5	14.0	0.350	Not Test

10.14. Wi-Fi (U-NII Band)

UNII-1 &2A

When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is

- ≤ 1.2 W/kg, SAR is not required for UNII band I
- > 1.2 W/kg, both bands should be tested independently for SAR.

UNII-1

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Hotspot	802.11ac VHT80	WLAN Chain 0	Normal	10	Back	42	5210	0.027	99.7%	11.5	11.2			
					Front	42	5210	0.016	99.7%	11.5	11.2			
					Edge Top	42	5210	0.002	99.7%	11.5	11.2			
					Edge Left	42	5210	0.032	99.7%	11.5	11.2	0.030	0.032	46
Hotspot	802.11ac VHT80	WLAN Chain 0	Simul_2g5g/6G	10	Back	42	5210	0.018	99.7%	9.5	9.3			
					Front	42	5210	0.010	99.7%	9.5	9.3			
					Edge Top	42	5210	0.003	99.7%	9.5	9.3			
					Edge Left	42	5210	0.018	99.7%	9.5	9.3	0.018	0.019	47
Hotspot	802.11ac VHT80	WLAN Chain 1	Normal	10	Back	42	5210	0.059	99.7%	11.5	10.9	0.066	0.076	48
					Front	42	5210	<0.01	99.7%	11.5	10.9			
					Edge Bottom	42	5210	0.004	99.7%	11.5	10.9			
					Edge Left	42	5210	0.007	99.7%	11.5	10.9			
Hotspot	802.11ac VHT80	WLAN Chain 1	Simul_2g5g/6G	10	Back	42	5210	0.018	99.7%	9.5	9.4	0.016	0.016	49
					Front	42	5210	<0.01	99.7%	9.5	9.4			
					Edge Bottom	42	5210	<0.01	99.7%	9.5	9.4			
					Edge Left	42	5210	<0.01	99.7%	9.5	9.4			

Notes:

1. For results listed with “-”, the SAR result is less than 0.01 W/kg.
2. FCC ID: PY7-76709C and PY7-54773M
3. Referenced from UL report # R15110020-S1

UNII-2A

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT160	WLAN Chain 0	Normal	0	Left Touch	50	5250	0.063	99.7%	11.5	11.3			
					Left Tilt	50	5250	0.060	99.7%	11.5	11.3			
					Right Touch	50	5250	0.220	99.7%	11.5	11.3	0.287	0.301	50
					Right Tilt	50	5250	0.118	99.7%	11.5	11.3			
Body	802.11ac VHT160	WLAN Chain 0	Normal	10	Back	50	5250	0.031	99.7%	11.5	11.3	0.032	0.034	51
					Front	50	5250	0.023	99.7%	11.5	11.3			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 0	Normal	0	Back	50	5250	0.093	99.7%	11.5	11.3			
					Front	50	5250	0.140	99.7%	11.5	11.3			
					Edge Top	50	5250	0.016	99.7%	11.5	11.3			
					Edge Left	50	5250	0.200	99.7%	11.5	11.3	0.211	0.222	52
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	0	Left Touch	50	5250	0.042	99.7%	9.5	9.1			
					Left Tilt	50	5250	0.031	99.7%	9.5	9.1			
					Right Touch	50	5250	0.147	99.7%	9.5	9.1	0.156	0.172	53
					Right Tilt	50	5250	0.061	99.7%	9.5	9.1			
Body	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	10	Back	50	5250	0.015	99.7%	9.5	9.1	0.008	0.009	-
					Front	50	5250	0.011	99.7%	9.5	9.1			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	0	Back	50	5250	0.060	99.7%	9.5	9.1			
					Front	50	5250	0.100	99.7%	9.5	9.1			
					Edge Top	50	5250	0.010	99.7%	9.5	9.1			
					Edge Left	50	5250	0.135	99.7%	9.5	9.1	0.134	0.148	54

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT160	WLAN Chain 1	Normal	0	Left Touch	50	5250	0.00	99.7%	11.5	11.1	<0.01	<0.01	-
					Left Tilt	50	5250	0.000	99.7%	11.5	11.1			
					Right Touch	50	5250	0.000	99.7%	11.5	11.1			
					Right Tilt	50	5250	0.000	99.7%	11.5	11.1			
Body	802.11ac VHT160	WLAN Chain 1	Normal	10	Back	50	5250	0.077	99.7%	11.5	11.1	0.078	0.086	55
					Front	50	5250	0.000	99.7%	11.5	11.1			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 1	Normal	0	Back	50	5250	0.178	99.7%	11.5	11.1	0.172	0.189	56
					Front	50	5250	0.001	99.7%	11.5	11.1			
					Edge Bottom	50	5250	0.006	99.7%	11.5	11.1			
					Edge Left	50	5250	0.014	99.7%	11.5	11.1			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	0	Left Touch	50	5250	0.012	99.7%	9.5	9.5	<0.01	<0.01	-
					Left Tilt	50	5250	0.000	99.7%	9.5	9.5			
					Right Touch	50	5250	0.000	99.7%	9.5	9.5			
					Right Tilt	50	5250	0.000	99.7%	9.5	9.5			
Body	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	10	Back	50	5250	0.031	99.7%	9.5	9.5	0.031	0.031	57
					Front	50	5250	0.004	99.7%	9.5	9.5			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	0	Back	50	5250	0.100	99.7%	9.5	9.5	0.092	0.092	58
					Front	50	5250	0.002	99.7%	9.5	9.5			
					Edge Bottom	50	5250	0.003	99.7%	9.5	9.5			
					Edge Left	50	5250	0.009	99.7%	9.5	9.5			

Notes:

1. For results listed with "-", the SAR result is less than 0.01 W/kg.
2. FCC ID: PY7-76709C and PY7-54773M
3. Referenced from UL report # R15110020-S1

Wi-Fi UNII-2C

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT80	WLAN Chain 0	Normal	0	Left Touch	122	5610	0.010	99.7%	11.5	11.3			
					Left Tilt	122	5610	0.007	99.7%	11.5	11.3			
					Right Touch	122	5610	0.123	99.7%	11.5	11.3	0.131	0.138	59
					Right Tilt	122	5610	0.190	99.7%	11.5	11.3			
Body	802.11ac VHT80	WLAN Chain 0	Normal	10	Back	122	5610	0.025	99.7%	11.5	11.3	0.015	0.016	60
					Front	122	5610	0.012	99.7%	11.5	11.3			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT80	WLAN Chain 0	Normal	0	Back	122	5610	0.135	99.7%	11.5	11.3			
					Front	122	5610	0.061	99.7%	11.5	11.3			
					Edge Top	122	5610	0.002	99.7%	11.5	11.3			
					Edge Left	122	5610	0.265	99.7%	11.5	11.3	0.278	0.292	61
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	0	Left Touch	114	5570	0.003	99.6%	9.5	9.0			
					Left Tilt	114	5570	<0.01	99.6%	9.5	9.0			
					Right Touch	114	5570	0.047	99.6%	9.5	9.0	0.062	0.070	62
					Right Tilt	114	5570	0.008	99.6%	9.5	9.0			
Body	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	10	Back	114	5570	0.006	99.6%	9.5	9.0	0.002	0.002	63
					Front	114	5570	0.002	99.6%	9.5	9.0			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		10-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 0	Simul_2g5g/6G	0	Back	114	5570	0.083	99.6%	9.5	9.0			
					Front	114	5570	0.042	99.6%	9.5	9.0			
					Edge Top	114	5570	<0.01	99.6%	9.5	9.0			
					Edge Left	114	5570	0.122	99.6%	9.5	9.0	0.126	0.142	64

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT80	WLAN Chain 1	Normal	0	Left Touch	122	5610	<0.01	99.7%	11.5	11.2	<0.01	<0.01	-
					Left Tilt	122	5610	<0.01	99.7%	11.5	11.2			
					Right Touch	122	5610	<0.01	99.7%	11.5	11.2			
					Right Tilt	122	5610	<0.01	99.7%	11.5	11.2			
Body	802.11ac VHT80	WLAN Chain 1	Normal	10	Back	122	5610	0.033	99.7%	11.5	11.2	0.027	0.029	65
					Front	122	5610	0.016	99.7%	11.5	11.2			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT80	WLAN Chain 1	Normal	0	Back	122	5610	0.238	99.7%	11.5	11.2	0.233	0.250	66
					Front	122	5610	0.002	99.7%	11.5	11.2			
					Edge Bottom	122	5610	0.006	99.7%	11.5	11.2			
					Edge Left	122	5610	0.013	99.7%	11.5	11.2			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	0	Left Touch	114	5570	<0.01	99.6%	9.5	9.4	<0.01	<0.01	-
					Left Tilt	114	5570	<0.01	99.6%	9.5	9.4			
					Right Touch	114	5570	<0.01	99.6%	9.5	9.4			
					Right Tilt	114	5570	<0.01	99.6%	9.5	9.4			
Body	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	10	Back	114	5570	0.03	99.6%	9.5	9.4	0.033	0.034	67
					Front	114	5570	0.000	99.6%	9.5	9.4			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Extremity	802.11ac VHT160	WLAN Chain 1	Simul_2g5g/6G	0	Back	114	5570	0.130	99.6%	9.5	9.4	0.108	0.111	68
					Front	114	5570	0.004	99.6%	9.5	9.4			
					Edge Bottom	114	5570	0.003	99.6%	9.5	9.4			
					Edge Left	114	5570	0.010	99.6%	9.5	9.4			

Notes:

1. For results listed with "-", the SAR result is less than 0.01 W/kg.
2. FCC ID: PY7-76709C and PY7-54773M
3. Referenced from UL report # R15110020-S1

Wi-Fi UNII-3

RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up Limit	Meas.	Meas.	Scaled	
Head	802.11n HT40	WLAN Chain 0	Normal	0	Left Touch	159	5795	0.042	99.7%	11.5	11.4			
					Left Tilt	159	5795	0.025	99.7%	11.5	11.4			
					Right Touch	159	5795	0.151	99.7%	11.5	11.4	0.169	0.173	69
					Right Tilt	159	5795	0.055	99.7%	11.5	11.4			
Body/Hotspot	802.11n HT40	WLAN Chain 0	Normal	10	Back	159	5795	0.067	99.7%	11.5	11.4	0.059	0.061	70
					Front	159	5795	0.022	99.7%	11.5	11.4			
Hotspot	802.11n HT40	WLAN Chain 0	Normal	10	Edge Top	159	5795	0.018	99.7%	11.5	11.4			
					Edge Left	159	5795	0.094	99.7%	11.5	11.4	0.092	0.094	71
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11n HT40	WLAN Chain 0	Simul_2g5g/6G	0	Left Touch	151	5755	0.023	99.7%	9.5	9.2			
					Left Tilt	151	5755	0.020	99.7%	9.5	9.2			
					Right Touch	151	5755	0.094	99.7%	9.5	9.2	0.108	0.116	72
					Right Tilt	151	5755	0.027	99.7%	9.5	9.2			
Body/Hotspot	802.11n HT40	WLAN Chain 0	Simul_2g5g/6G	10	Back	151	5755	0.018	99.7%	9.5	9.2	0.050	0.054	73
					Front	151	5755	0.005	99.7%	9.5	9.2			
Hotspot	802.11n HT40	WLAN Chain 0	Simul_2g5g/6G	10	Edge Top	151	5755	0.005	99.7%	9.5	9.2			
					Edge Left	151	5755	0.023	99.7%	9.5	9.2	0.066	0.071	74
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11n HT40	WLAN Chain 1	Normal	0	Left Touch	151	5755	0.033	99.7%	11.5	11.1	<0.01	<0.01	-
					Left Tilt	151	5755	0.029	99.7%	11.5	11.1			
					Right Touch	151	5755	0.005	99.7%	11.5	11.1			
					Right Tilt	151	5755	0.002	99.7%	11.5	11.1			
Body/Hotspot	802.11n HT40	WLAN Chain 1	Normal	10	Back	151	5755	0.112	99.7%	11.5	11.1	0.127	0.140	75
					Front	151	5755	0.001	99.7%	11.5	11.1			
Hotspot	802.11n HT40	WLAN Chain 1	Normal	10	Edge Bottom	151	5755	0.01	99.7%	11.5	11.1			
					Edge Left	151	5755	0.026	99.7%	11.5	11.1			
RF Exposure Conditions	Mode	Antenna	Power State	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max SAR (W/kg)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	802.11n HT40	WLAN Chain 1	Simul_2g5g/6G	0	Left Touch	159	5795	0.012	99.7%	9.5	9.4	<0.01	<0.01	-
					Left Tilt	159	5795	0.009	99.7%	9.5	9.4			
					Right Touch	159	5795	0.003	99.7%	9.5	9.4			
					Right Tilt	159	5795	0.002	99.7%	9.5	9.4			
Body/Hotspot	802.11n HT40	WLAN Chain 1	Simul_2g5g/6G	10	Back	159	5795	0.087	99.7%	9.5	9.4	0.093	0.095	76
					Front	159	5795	0.007	99.7%	9.5	9.4			
Hotspot	802.11n HT40	WLAN Chain 1	Simul_2g5g/6G	10	Edge Bottom	159	5795	0.008	99.7%	9.5	9.4			
					Edge Left	159	5795	0.017	99.7%	9.5	9.4			

Notes:

1. For results listed with "-", the SAR result is less than 0.01 W/kg.
2. FCC ID: PY7-76709C and PY7-54773M
3. Referenced from UL report # R15110020-S1

10.15. Bluetooth

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up Limit	Meas.	Meas.	Scaled	
Head	GFSK	WLAN Chain 0	0	Left Touch	78	2480.0	100.00%	14.0	13.9	0.051	0.052	
				Left Tilt	78	2480.0	100.00%	14.0	13.9	0.013	0.013	
				Right Touch	78	2480.0	100.00%	14.0	13.9	0.197	0.202	77
				Right Tilt	78	2480.0	100.00%	14.0	13.9	0.041	0.042	
Body/Hotspot	GFSK	WLAN Chain 0	10	Back	78	2480.0	100.00%	14.0	13.9	0.007	0.007	
				Front	78	2480.0	100.00%	14.0	13.9	0.035	0.036	78
Hotspot	GFSK	WLAN Chain 0	10	Edge Top	78	2480.0	100.00%	14.0	13.9	0.007	0.007	
				Edge Left	78	2480.0	100.00%	14.0	13.9	0.127	0.130	79
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
Head	GFSK	WLAN Chain 1	0	Left Touch	39	2441.0	100.00%	14.0	13.7	<0.01	<0.01	-
				Left Tilt	39	2441.0	100.00%	14.0	13.7	<0.01	<0.01	
				Right Touch	39	2441.0	100.00%	14.0	13.7	<0.01	<0.01	
				Right Tilt	39	2441.0	100.00%	14.0	13.7	<0.01	<0.01	
Body/Hotspot	GFSK	WLAN Chain 1	10	Back	39	2441.0	100.00%	14.0	13.7	0.162	0.174	80
				Front	39	2441.0	100.00%	14.0	13.7	0.018	0.019	
Hotspot	GFSK	WLAN Chain 1	10	Edge Bottom	39	2441.0	100.00%	14.0	13.7	0.025	0.027	
				Edge Left	39	2441.0	100.00%	14.0	13.7	0.012	0.013	

Notes:

- For results listed with "-", the SAR result is less than 0.01 W/kg.
- FCC ID: PY7-76709C and PY7-54773M
- Referenced from UL report # R15110020-S1
- TCB Workshop October 2016 was referenced to support utilizing a 100% Duty Cycle for Bluetooth.

10.16. NFC

Mode	Dist. (mm)	Freq. (MHz)	Tolerance Scaling ¹ (dB)	Test Position	10-g SAR (W/kg)		Plot No.
					Meas.	Scaled	
Type V PRBS9 26k	0	13.56	2	Rear	0.013	0.021	81
				Front	0.000	0.000	
				Left	0.000	0.000	

Note(s):

- The SAR values for the NFC are not scaled for maximum production power because measurements of actual output power are not practical. The values were measured with the device operated within expected tolerances of the transmitter specifications and after accounting for production tolerances the contribution to the RF exposure budget from the NFC transmitter would remain negligible.
- FCC ID: PY7-76709C and PY7-54773M
- Referenced from UL report # R15110020-S1

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note(s):

Repeated measurement is not required since the original highest measured SAR is < 0.8 W/kg (1-g) or 2 W/kg (10-g) .

12. Simultaneous Transmission Conditions

PY7-76709C

RF Exposure Condition	Tx Mode	WWAN		WiFi Main			Wi-Fi Sub			NFC
		Cellular Main 1st	Cellular Main 2nd	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	
Head, Body-Worn, & Hotspot	1	✓		✓			✓			
	2	✓			✓			✓		
	3	✓				✓			✓	
	4	✓								
	5	✓				✓	✓		✓	✓
	6	✓				✓			✓	
	7	✓			✓	✓		✓	✓	
	8		✓	✓	✓			✓		
	9			✓		✓			✓	
	10			✓			✓			✓
	11			✓		✓			✓	
	12			✓		✓				✓
	13			✓						
	14			✓	✓			✓		
	15	✓	✓	✓	✓			✓		
	16	✓	✓							
	17	✓	✓			✓	✓		✓	✓
	18	✓	✓							
	19	✓	✓			✓	✓		✓	✓
	20	✓	✓							
	21	✓	✓		✓			✓		
Extremity	22				✓			✓	✓	

PY7-54773M

RF Exposure Condition	Tx Mode	WWAN		WiFi Main			Wi-Fi Sub			NFC
		Cellular Main 1st	Cellular Main 2nd	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	
Head, Body-Worn, & Hotspot	1	✓		✓			✓			
	2	✓			✓			✓		
	3	✓				✓				
	4	✓							✓	
	5	✓				✓	✓		✓	
	6	✓				✓			✓	✓
	7	✓			✓	✓		✓	✓	
	8		✓	✓	✓			✓		
	9			✓		✓			✓	
	10			✓			✓			
	11			✓			✓			✓
	12			✓		✓	✓		✓	
	13			✓		✓			✓	✓
	14			✓	✓	✓		✓	✓	
Extremity	15				✓			✓	✓	

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Sum of the SAR for WWAN Cellular Main 1 & Wi-Fi Normal State & BT

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)						
	WWAN			WLAN 2.4 GHz			WLAN 5 GHz			BT	WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	WLAN Chain 0 ⑧	WLAN Chain 1 ⑨	① + ④ + ⑤	① + ⑥ + ⑦	① + ⑥ + ⑦ + ⑧	① + ⑥ + ⑦ + ⑧	① + ⑥ + ⑦ + ⑧	① + ⑧	① + ⑧
Head	0.132	0.143	0.407	0.526	0.003	0.301	0.140	0.202	0.174	0.661	0.573	0.775	0.747	0.334	0.306	
Body	0.308	0.412	0.117	0.104	0.248	0.061	0.140	0.036	0.174	0.660	0.509	0.545	0.683	0.344	0.482	
Hotspot	0.308	0.428	0.198	0.168	0.248	0.094	0.140	0.130	0.027	0.724	0.542	0.672	0.569	0.438	0.335	

PY7-54773M

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)						
	WWAN			WLAN 2.4 GHz			WLAN 5 GHz			BT	WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	WLAN Chain 0 ⑧	WLAN Chain 1 ⑨	① + ④ + ⑤	① + ⑥ + ⑦	① + ⑥ + ⑦ + ⑧	① + ⑥ + ⑦ + ⑧	① + ⑥ + ⑦ + ⑧	① + ⑧	① + ⑧
Head	0.132	0.121		0.526	0.003	0.301	0.140	0.202	0.174	0.661	0.573	0.775	0.747	0.334	0.306	
Body	0.293	0.378		0.104	0.248	0.061	0.140	0.036	0.174	0.645	0.494	0.530	0.668	0.329	0.467	
Hotspot	0.293	0.378		0.168	0.248	0.094	0.140	0.130	0.027	0.709	0.527	0.657	0.554	0.423	0.320	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.3. Sum of the SAR for WWAN Cellular Main 1 & Wi-Fi Simultaneous 2G_5G State

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	① + ④ + ⑤ + ⑥ + ⑦
Head	0.132	0.143	0.407	0.255	0.133	0.172	0.095	0.787
Body	0.308	0.412	0.117	0.054	0.133	0.054	0.095	0.644
Hotspot	0.308	0.428	0.198	0.093	0.133	0.071	0.095	0.700

PY7-54773M

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	① + ④ + ⑤ + ⑥ + ⑦
Head	0.132	0.121		0.255	0.133	0.172	0.095	0.787
Body	0.293	0.378		0.054	0.133	0.054	0.095	0.629
Hotspot	0.293	0.378		0.093	0.133	0.071	0.095	0.685

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.4. Sum of the SAR for WWAN Cellular Main 2 & Wi-Fi Normal State & BT

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)						
	WWAN			WLAN 2.4 GHz			WLAN 5 GHz			BT	WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	WLAN Chain 0 ⑧	WLAN Chain 1 ⑨	② + ④ + ⑤	① + ⑥ + ⑦	② + ⑥ + ⑦ + ⑧	② + ⑥ + ⑦ + ⑧	② + ⑥ + ⑦ + ⑧	② + ⑧	② + ⑧
Head	0.132	0.143	0.407	0.526	0.003	0.301	0.140	0.202	0.174	0.672	0.584	0.786	0.758	0.345	0.317	
Body	0.308	0.412	0.117	0.104	0.248	0.061	0.140	0.036	0.174	0.764	0.613	0.649	0.787	0.448	0.586	
Hotspot	0.308	0.428	0.198	0.168	0.248	0.094	0.140	0.130	0.027	0.844	0.662	0.792	0.689	0.558	0.455	

PY7-54773M

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)						
	WWAN			WLAN 2.4 GHz			WLAN 5 GHz			BT	WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 ④	WLAN Chain 1 ⑤	WLAN Chain 0 ⑥	WLAN Chain 1 ⑦	WLAN Chain 0 ⑧	WLAN Chain 1 ⑨	② + ④ + ⑤	① + ⑥ + ⑦	② + ⑥ + ⑦ + ⑧	② + ⑥ + ⑦ + ⑧	② + ⑧	② + ⑧	
Head	0.132	0.121		0.526	0.003	0.301	0.140	0.202	0.174	0.650	0.562	0.764	0.736	0.323	0.295	
Body	0.293	0.378		0.104	0.248	0.061	0.140	0.036	0.174	0.730	0.579	0.615	0.753	0.414	0.552	
Hotspot	0.293	0.378		0.168	0.248	0.094	0.140	0.130	0.027	0.794	0.612	0.742	0.639	0.508	0.405	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.5. Sum of the SAR for WWAN Cellular Main 2 & Wi-Fi Simultaneous 2G_5G State

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz (② + ④ + ⑤ + ⑥ + ⑦)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	
Head	0.132	0.143	0.407	0.255	0.133	0.172	0.095	0.798
Body	0.308	0.412	0.117	0.054	0.133	0.054	0.095	0.748
Hotspot	0.308	0.428	0.198	0.093	0.133	0.071	0.095	0.820

PY7-54773M

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz (② + ④ + ⑤ + ⑥ + ⑦)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	
Head	0.132	0.121		0.255	0.133	0.172	0.095	0.776
Body	0.293	0.378		0.054	0.133	0.054	0.095	0.714
Hotspot	0.293	0.378		0.093	0.133	0.071	0.095	0.770

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.6. Sum of the SAR for DC_2A_n66A & Wi-Fi Normal State & BT

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)			
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz (② + ③ + ④ + ⑤)	WWAN + WLAN 5 GHz (② + ③ + ⑥ + ⑦)	WWAN + WLAN 5 GHz + BT (② + ③ + ⑥ + ⑦ + ⑧)	WWAN + WLAN 5 GHz + BT (② + ③ + ⑥ + ⑦ + ⑨)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	WLAN Chain 0 (8)	WLAN Chain 1 (9)				
Head		0.143	0.407	0.526	0.003	0.301	0.140	0.202	0.174	1.079	0.991	1.193	1.165
Body		0.412	0.117	0.104	0.248	0.061	0.140	0.036	0.174	0.881	0.730	0.766	0.904
Hotspot		0.428	0.198	0.168	0.248	0.094	0.140	0.130	0.027	1.042	0.860	0.990	0.887

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.7. Sum of the SAR for DC_2A_n66A & Wi-Fi Simultaneous 2G_5G State

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz (② + ③ + ④ + ⑤ + ⑥ + ⑦)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	
Head		0.143	0.407	0.255	0.133	0.172	0.095	1.205
Body		0.412	0.117	0.054	0.133	0.054	0.095	0.748
Hotspot		0.428	0.198	0.093	0.133	0.071	0.095	0.820

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.8. Sum of the SAR for DC_13A_n66A & Wi-Fi Normal State & BT

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)									Σ 1-g SAR (W/kg)			
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz (① + ② + ④ + ⑤)	WWAN + WLAN 5 GHz (① + ② + ⑥ + ⑦)	WWAN + WLAN 5 GHz + BT (① + ② + ⑥ + ⑦ + ⑧)	WWAN + WLAN 5 GHz + BT (① + ② + ⑥ + ⑦ + ⑨)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	WLAN Chain 0 (8)	WLAN Chain 1 (9)				
Head	0.064	0.143		0.526	0.003	0.301	0.140	0.202	0.174	0.736	0.648	0.850	0.822
Body	0.136	0.412		0.104	0.248	0.061	0.140	0.036	0.174	0.900	0.749	0.785	0.923
Hotspot	0.136	0.428		0.168	0.248	0.094	0.140	0.130	0.027	0.980	0.798	0.928	0.825

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.9. Sum of the SAR for DC_13A_n66A & Wi-Fi Simultaneous 2G_5G State

PY7-76709C

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)
	WWAN			WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4GHz + WLAN 5 GHz (① + ② + ④ + ⑤ + ⑥ + ⑦)
	Cellular 1st ①	Cellular 2nd ②	Cellular Sub ③	WLAN Chain 0 (4)	WLAN Chain 1 (5)	WLAN Chain 0 (6)	WLAN Chain 1 (7)	
Head	0.064	0.143		0.255	0.133	0.172	0.095	0.862
Body	0.136	0.412		0.054	0.133	0.054	0.095	0.884
Hotspot	0.136	0.428		0.093	0.133	0.071	0.095	0.956

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.10. Sum of the SAR for Wi-Fi Normal State & NFC**PY7-76709C and PY7-54773M**

RF Exposure Conditions	Standalone SAR (W/kg)			Σ 10-g SAR (W/kg)
	WLAN 5 GHz		NFC	WLAN 5 GHz + NFC
	WLAN Chain 0 ①	WLAN Chain 1 ②	NFC ③	① + ② + ③
Extremity	0.292	0.250	0.021	0.563

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 10-g SAR is < 4 W/kg or the SPLSR is < 0.1 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT