



FCC RADIO TEST REPORT

FCC ID : PY7-77089S
Equipment : GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS and NFC
Brand Name : Sony
Applicant : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Manufacturer : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 08, 2021 and testing was started from Jun. 18, 2021 and completed on Jul. 07, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this spot check data report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description..... 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 5

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 8

 2.4 EUT Operation Test Setup 8

3 Test Result..... 9

 3.1 Output Power Measurement..... 9

 3.2 Radiated Band Edges and Spurious Emission Measurement 10

 3.3 Antenna Requirements 14

4 List of Measuring Equipment 15

5 Uncertainty of Evaluation..... 16

Appendix A. Conducted Test Results

Appendix B. Radiated Spurious Emission

Appendix C. Radiated Spurious Emission Plots

Appendix D. Duty Cycle Plots



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FR133143B | 01 | Initial issue of report | Jul. 12, 2021 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|--------------------|--|--------------------|--|
| - | 15.247(a)(2) | 6dB Bandwidth | - | See Note |
| - | 2.1049 | 99% Occupied Bandwidth | - | See Note |
| 3.1 | 15.247(b)(3) | Output Power | Pass | - |
| - | 15.247(e) | Power Spectral Density | - | See Note |
| - | 15.247(d) | Conducted Band Edges and Spurious Emission | - | See Note |
| 3.2 | 15.247(d) | Radiated Band Edges and Spurious Emission | Pass | Under limit 3.73 dB at 18000.000 MHz |
| - | 15.207 | AC Conducted Emission | - | See Note |
| 3.3 | 15.203 & 15.247(b) | Antenna Requirement | Pass | - |

Note: The RF circuit, output power level and antenna performance is the same in Bluetooth - LE function across all two FCC ID PY7-77089S and PY7-38061M, since the change, only verify RF output power and radiated spurious emission test data the worst mode was reported in this report.

| |
|-----------------------------------|
| Declaration of Conformity: |
|-----------------------------------|

| |
|--|
| The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. |
|--|

| |
|-----------------------------------|
| Comments and Explanations: |
|-----------------------------------|

| |
|--|
| The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification. |
|--|

Reviewed by: Keven Cheng

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac/ax, NFC, FM Receiver, and GNSS.

| Product Specification subjective to this standard | |
|---|--|
| Antenna Type / Gain | <Ant. 0>: Loop Antenna with gain -2.3 dBi <Ant. 1>: Loop Antenna with gain -7.0 dBi |

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

| EUT Information List | | | |
|----------------------|------------|------------|----------------------------|
| HW Version | SW Version | S/N | Performed Test Item |
| A | 3.46 | QV72002H9B | RF conducted measurement |
| | 3.46 | QV72001G9B | Radiated Spurious Emission |

| Accessory List | |
|----------------|----------------------|
| AC Adapter | Model Name : XQZ-UC1 |
| | S/N : 0020W51300039 |
| Earphone | Model Name : STH40D |
| | S/N : N/A |
| USB Cable | Model Name : XQZ-UB1 |
| | S/N : N/A |

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

| | |
|---------------------------|--|
| Test Site | Sporton International Inc. EMC & Wireless Communications Laboratory |
| Test Site Location | No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978 |
| Test Site No. | Sporton Site No. TH02-HY |
| Test Site | Sporton International Inc. Wensan Laboratory |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 |
| Test Site No. | Sporton Site No. 03CH15-HY (TAF Code: 3786) |
| Remark | The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory. |

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 0 | 2402 | 21 | 2444 |
| | 1 | 2404 | 22 | 2446 |
| | 2 | 2406 | 23 | 2448 |
| | 3 | 2408 | 24 | 2450 |
| | 4 | 2410 | 25 | 2452 |
| | 5 | 2412 | 26 | 2454 |
| | 6 | 2414 | 27 | 2456 |
| | 7 | 2416 | 28 | 2458 |
| | 8 | 2418 | 29 | 2460 |
| | 9 | 2420 | 30 | 2462 |
| | 10 | 2422 | 31 | 2464 |
| | 11 | 2424 | 32 | 2466 |
| | 12 | 2426 | 33 | 2468 |
| | 13 | 2428 | 34 | 2470 |
| | 14 | 2430 | 35 | 2472 |
| | 15 | 2432 | 36 | 2474 |
| | 16 | 2434 | 37 | 2476 |
| | 17 | 2436 | 38 | 2478 |
| | 18 | 2438 | 39 | 2480 |
| | 19 | 2440 | - | - |
| 20 | 2442 | - | - | |

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find (X plane for Ant. 0; Z plane for Ant. 1) as worst plane.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases | |
|--|--|
| Test Item | Data Rate / Modulation |
| Radiated Test Cases | Bluetooth – LE / GFSK |
| | Mode 1: Bluetooth Tx CH00_2402 MHz_2Mbps |
| | Mode 2: Bluetooth Tx CH39_2480 MHz_2Mbps |
| Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the original report worse case. | |

2.3 Connection Diagram of Test System

<Bluetooth-LE Tx Mode>

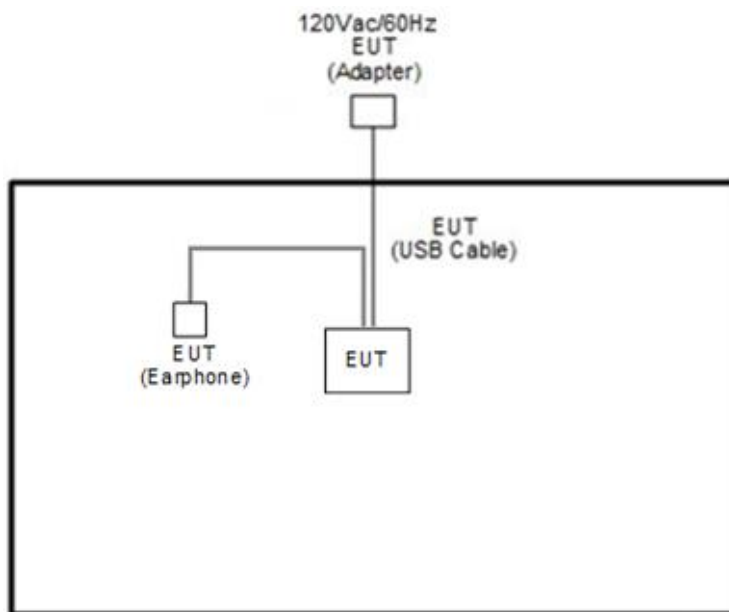

2.4 EUT Operation Test Setup

The RF test items, utility “Android Debug Bridge version1.0.26” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGP-M-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.1.4 Test Setup

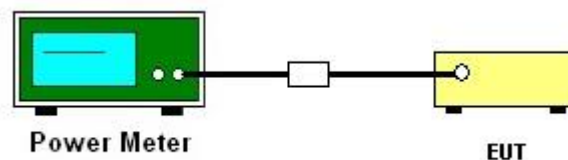

3.1.5 Test Result of Average Output Power

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.




3.2.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and be reported.
7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and be reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated test below 30MHz

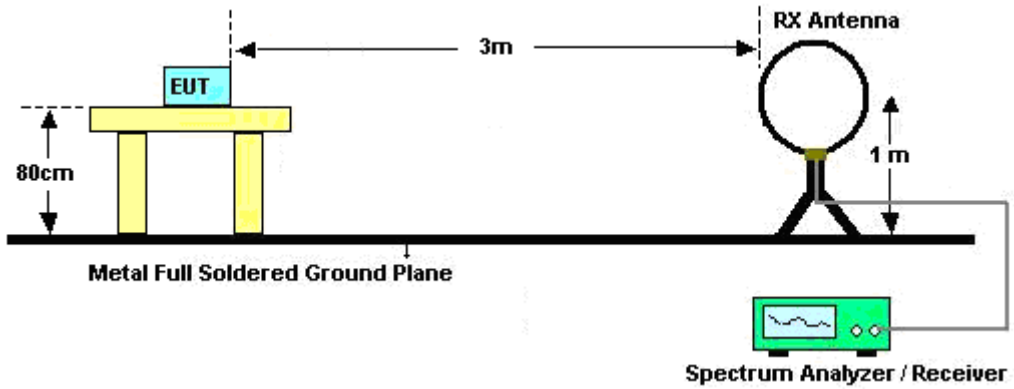


For radiated test from 30MHz to 1GHz

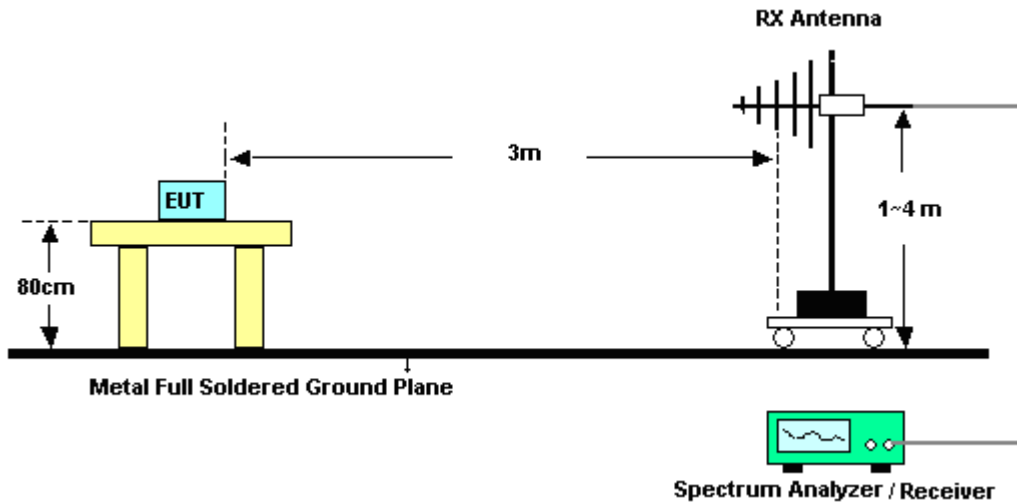

For radiated test from 1GHz to 18GHz

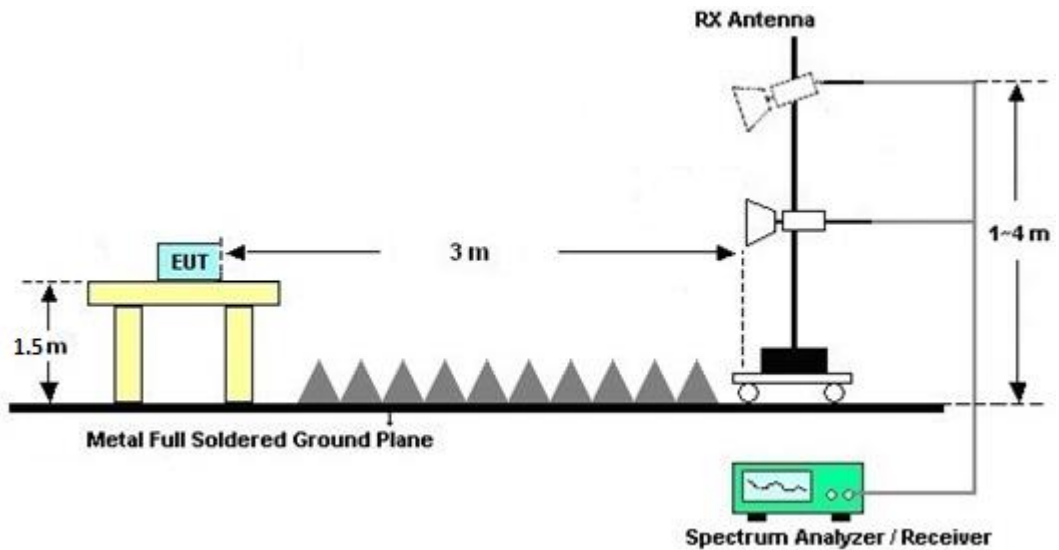

For radiated test above 18GHz

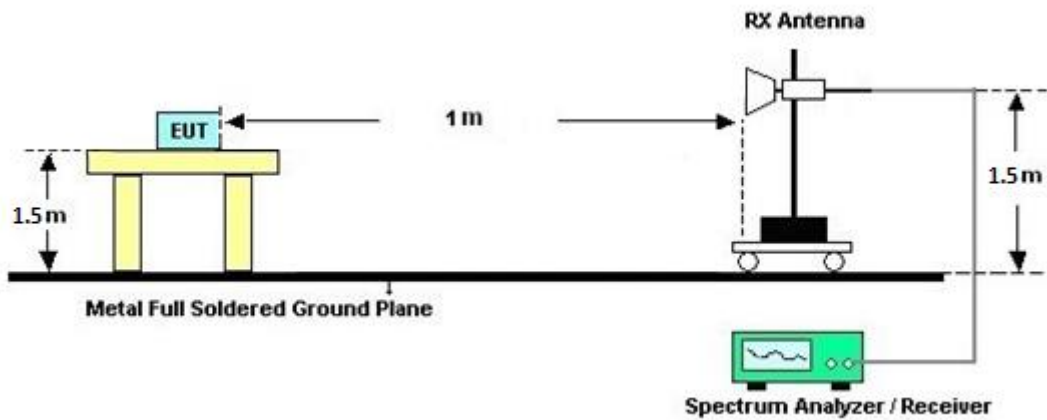

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Brand Name | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------------|--------------------|-------------------------------------|--|----------------------------|------------------|---------------------------------|---------------|--------------------------|
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100488 | 9 kHz~30 MHz | Jul. 14, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Jul. 13, 2021 | Radiation (03CH15-HY) |
| Bilog Antenna | TESEQ | CBL 6111D & 00800N1D01 N-06 | 41912 & 05 | 30MHz~1GHz | Feb. 08, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | Feb. 07, 2022 | Radiation (03CH15-HY) |
| Amplifier | SONOMA | 310N | 363440 | 9kHz~1GHz | Dec. 28, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Dec. 27, 2021 | Radiation (03CH15-HY) |
| Horn Antenna | SCHWARZB ECK | BBHA 9120 D | 9120D-01620 | 1GHz~18GHz | Nov. 03, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Nov. 02, 2021 | Radiation (03CH15-HY) |
| SHF-EHF Horn Antenna | SCHWARZB ECK | BBHA 9170 | BBHA9170251 | 18GHz~40GHz | Dec. 02, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Dec. 01, 2021 | Radiation (03CH15-HY) |
| Preamplifier | Jet-Power | JPA0118-55- 303 | 171000180005 5006 | 1GHz~18GHz | May 06, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | May 05, 2022 | Radiation (03CH15-HY) |
| Preamplifier | Keysight | 83017A | MY53270195 | 1GHz~26.5GHz | Aug. 21, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Aug. 20, 2021 | Radiation (03CH15-HY) |
| Preamplifier | EMEC | EM18G40G | 0600789 | 18-40GHz | Oct. 27, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Oct. 26, 2021 | Radiation (03CH15-HY) |
| EMI Test Receiver | Keysight | N9038A(MX E) | MY54130085 | 20MHz~8.4GHz | Nov. 02, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Nov. 01, 2021 | Radiation (03CH15-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY54200485 | 10Hz~44GHz | Mar. 05, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | Mar. 04, 2022 | Radiation (03CH15-HY) |
| Antenna Mast | ChainTek | MBS-520-1 | N/A | 1m~4m | N/A | Jul. 05, 2021~ Jul. 07, 2021 | N/A | Radiation (03CH15-HY) |
| Turn Table | ChainTek | T-200-S-1 | N/A | 0~360 Degree | N/A | Jul. 05, 2021~ Jul. 07, 2021 | N/A | Radiation (03CH15-HY) |
| Software | Audix | E3 6.2009-8-24(k5) | RK-000451 | N/A | N/A | Jul. 05, 2021~ Jul. 07, 2021 | N/A | Radiation (03CH15-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104, 102E | MY36980/4, MY9838/4PE,5 08405/2E | 30MHz~18G | Nov. 16, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Nov. 15, 2021 | Radiation (03CH15-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 505134/2 | 30MHz-40GHz | Feb. 22, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | Feb. 21, 2022 | Radiation (03CH15-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 102 | 800740/2 | 30MHz-40GHz | Feb. 22, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | Feb. 21, 2022 | Radiation (03CH15-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY9837/4PE | 9kHz~30MHz | Mar. 11, 2021 | Jul. 05, 2021~ Jul. 07, 2021 | Mar. 10, 2022 | Radiation (03CH15-HY) |
| Filter | Wainwright | WLK4-1000- 1530-8000-4 0SS | SN12 | 1.53GHz Low Pass Filter | Sep. 15, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Sep. 14, 2021 | Radiation (03CH15-HY) |
| Filter | Wainwright | WHKX12-27 00-3000-180 00-60ST | SN4 | 3GHz High Pass Filter | Sep. 16, 2020 | Jul. 05, 2021~ Jul. 07, 2021 | Sep. 15, 2021 | Radiation (03CH15-HY) |
| Hygrometer | Testo | 608-H1 | 34893241 | N/A | Mar. 02, 2021 | Jun. 18, 2021 | Mar. 01, 2022 | Conducted (TH02-HY) |
| Power Sensor | DARE | RPR3006W | 16I00054SNO1 2 | 10MHz~6GHz | Dec. 16, 2020 | Jun. 18, 2021 | Dec. 15, 2021 | Conducted (TH02-HY) |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101566 | 10Hz ~ 40GHz | Jul. 22, 2020 | Jun. 18, 2021 | Jul. 21, 2021 | Conducted (TH02-HY) |
| Switch Box & RF Cable | EM Electronics | EMSW18SE | SW200302 | N/A | Mar. 17, 2021 | Jun. 18, 2021 | Mar. 16, 2022 | Conducted (TH02-HY) |



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.7 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 5.3 dB |
|---|--------|

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

| | |
|---|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.9 dB |
|---|--------|

Appendix A. Test Result of Conducted Test Items

| | | | | |
|----------------|-------------|--------------------|-------|----|
| Test Engineer: | Eason Huang | Temperature: | 21~25 | °C |
| Test Date: | 2021/6/18 | Relative Humidity: | 51~54 | % |

<Ant. 0>

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|-------------------------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 8.50 |
| BLE | 1Mbps | 1 | 19 | 2440 | 8.80 |
| BLE | 1Mbps | 1 | 39 | 2480 | 8.80 |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|-------------------------------|
| BLE | 2Mbps | 1 | 0 | 2402 | 8.70 |
| BLE | 2Mbps | 1 | 19 | 2440 | 9.00 |
| BLE | 2Mbps | 1 | 39 | 2480 | 9.00 |

<Ant. 1>

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|-------------------------------|
| BLE | 1Mbps | 1 | 0 | 2402 | 8.40 |
| BLE | 1Mbps | 1 | 19 | 2440 | 8.50 |
| BLE | 1Mbps | 1 | 39 | 2480 | 8.50 |

TEST RESULTS DATA
Average Power Table

| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Average Conducted Power (dBm) |
|------|-----------|-----|-----|-------------|-------------------------------|
| BLE | 2Mbps | 1 | 0 | 2402 | 8.50 |
| BLE | 2Mbps | 1 | 19 | 2440 | 8.60 |
| BLE | 2Mbps | 1 | 39 | 2480 | 8.60 |



Appendix B. Radiated Spurious Emission

| | | | |
|-----------------|--------------------------------------|---------------------|-------------|
| Test Engineer : | Leo Lee, Mancy Chou and Bigshow Wang | Temperature : | 22.7~23.7°C |
| | | Relative Humidity : | 46~52% |

<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

| BLE Ant. | Note | Frequency (MHz) | Level (dBμV/m) | Over Limit (dB) | Limit Line (dBμV/m) | Read Level (dBμV) | Antenna Factor (dB/m) | Path Loss (dB) | Preamp Factor (dB) | Ant Pos (cm) | Table Pos (deg) | Peak Avg. (P/A) | Pol. (H/V) |
|-------------------|---|-------------------|------------------|-------------------|-----------------------|---------------------|-------------------------|------------------|----------------------|----------------|-------------------|-------------------|--------------|
| BLE CH 39 2480MHz | | 4960 | 40.35 | -33.65 | 74 | 57.94 | 31.22 | 10.17 | 58.98 | 100 | 0 | P | H |
| | | 7440 | 46.55 | -27.45 | 74 | 56.06 | 36.3 | 12.39 | 58.2 | 100 | 0 | P | H |
| | | 18000 | 60.78 | -13.22 | 74 | 50.13 | 49 | 18.89 | 57.24 | 100 | 28 | P | H |
| | | 18000 | 50.27 | -3.73 | 54 | 39.62 | 49 | 18.89 | 57.24 | 100 | 28 | A | H |
| | | 4960 | 39.62 | -34.38 | 74 | 57.21 | 31.22 | 10.17 | 58.98 | 100 | 0 | P | V |
| | | 7440 | 45.59 | -28.41 | 74 | 55.1 | 36.3 | 12.39 | 58.2 | 100 | 0 | P | V |
| | | 17985 | 59.89 | -14.11 | 74 | 49.55 | 48.73 | 18.88 | 57.27 | 100 | 47 | P | V |
| | | 17985 | 49.91 | -4.09 | 54 | 39.57 | 48.73 | 18.88 | 57.27 | 100 | 47 | A | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



Emission above 18GHz

2.4GHz BLE (SHF)

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. |
|----------------------|--|-----------|------------|--------|------------|--------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 0 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 2.4GHz BLE SHF | | 22256 | 39.9 | -34.1 | 74 | 43.56 | 38.76 | 12.23 | 54.65 | 150 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | | 21208 | 38.27 | -35.73 | 74 | 43.41 | 38.24 | 11.42 | 54.8 | 150 | 0 | P |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | |



Emission below 1GHz

2.4GHz BLE (LF)

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. | |
|---------------------|--|-----------|------------|--------|------------|--------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 0 | | (MHz) | (dBµV/m) | (dB) | (dBµV/m) | (dBµV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 2.4GHz BLE LF | | 44.55 | 27.35 | -12.65 | 40 | 42.06 | 17.06 | 0.82 | 32.59 | 100 | 0 | P | H | |
| | | 185.2 | 27.26 | -16.24 | 43.5 | 43.09 | 14.79 | 1.85 | 32.47 | - | - | P | H | |
| | | 312.27 | 23.51 | -22.49 | 46 | 34.24 | 19.37 | 2.4 | 32.5 | - | - | P | H | |
| | | 494.63 | 24.59 | -21.41 | 46 | 30.29 | 23.87 | 2.99 | 32.56 | - | - | P | H | |
| | | 558.65 | 27.74 | -18.26 | 46 | 31.19 | 25.94 | 3.22 | 32.61 | - | - | P | H | |
| | | 858.38 | 30.75 | -15.25 | 46 | 29.54 | 29.04 | 4.01 | 31.84 | - | - | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 43.58 | 33.95 | -6.05 | 40 | 48.25 | 17.47 | 0.81 | 32.58 | 100 | 0 | P | V |
| | | | 99.84 | 21.93 | -21.57 | 43.5 | 37.2 | 15.91 | 1.32 | 32.5 | - | - | P | V |
| | | | 156.1 | 21.46 | -22.04 | 43.5 | 35.5 | 16.66 | 1.8 | 32.5 | - | - | P | V |
| | | | 427.7 | 23.89 | -22.11 | 46 | 30.62 | 22.92 | 2.76 | 32.41 | - | - | P | V |
| | | | 731.31 | 29.56 | -16.44 | 46 | 30.95 | 27.41 | 3.65 | 32.45 | - | - | P | V |
| | | | 817.64 | 30.88 | -15.12 | 46 | 31.25 | 27.81 | 3.88 | 32.06 | - | - | P | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | | |



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. | |
|----------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| BLE CH 00 2402MHz | | 2351.475 | 54.59 | -19.41 | 74 | 41.33 | 27.69 | 6.58 | 30.93 | 176 | 317 | P | H | |
| | | 2362.5 | 44.35 | -9.65 | 54 | 31.11 | 27.65 | 6.6 | 30.93 | 176 | 317 | A | H | |
| | * | 2402 | 97.44 | - | - | 84.27 | 27.5 | 6.66 | 30.91 | 176 | 317 | P | H | |
| | * | 2402 | 95.09 | - | - | 81.92 | 27.5 | 6.66 | 30.91 | 176 | 317 | A | H | |
| | | | | | | | | | | | | | H | |
| | | | | | | | | | | | | | H | |
| | | | 2339.4 | 54.91 | -19.09 | 74 | 41.65 | 27.72 | 6.56 | 30.94 | 100 | 35 | P | V |
| | | | 2377.305 | 44.59 | -9.41 | 54 | 31.38 | 27.59 | 6.62 | 30.92 | 100 | 35 | A | V |
| | * | | 2402 | 96.84 | - | - | 83.67 | 27.5 | 6.66 | 30.91 | 100 | 35 | P | V |
| | * | | 2402 | 95.16 | - | - | 81.99 | 27.5 | 6.66 | 30.91 | 100 | 35 | A | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| BLE | Note | Frequency | Level | Over | Limit | Read | Antenna | Path | Preamp | Ant | Table | Peak | Pol. |
|-------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| BLE CH 00 2402MHz | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



Appendix C. Radiated Spurious Emission Plots

| | | | |
|-----------------|--------------------------------------|---------------------|-------------|
| Test Engineer : | Leo Lee, Mancy Chou and Bigshow Wang | Temperature : | 22.7~23.7°C |
| | | Relative Humidity : | 46~52% |

<2Mbps>

2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

| | | |
|------|---|---|
| BLE | 2.4GHz 2400~2483.5MHz Harmonic @ 3m | |
| Ant | BLE CH39 2480MHz | |
| 0 | Horizontal | Vertical |
| Peak | <p>Site : 03CH15-4Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL Detector : Peak</p> | <p>Site : 03CH15-4Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL Detector : Peak</p> |



Emission above 18GHz

2.4GHz BLE (SHF)
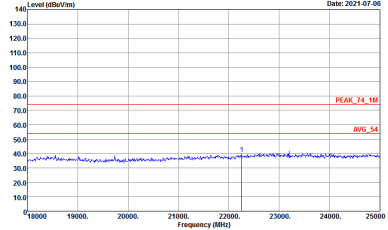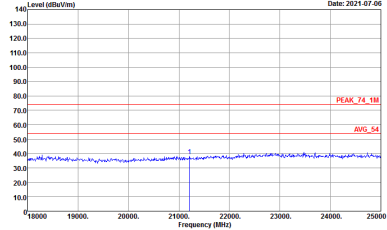
| | | |
|-------------|---|--|
| BLE | 2.4GHz 2400~2483.5MHz | |
| Ant | BLE SHF | |
| 0 | Horizontal | Vertical |
| Peak / Avg. |  <p>Site : 03CH15-HY Condition : PEAK_74_IM 1m SHF HORN 88HA9170576 HORIZONTAL Detector : Peak</p> |  <p>Site : 03CH15-HY Condition : PEAK_74_IM 1m SHF HORN 88HA9170576 VERTICAL Detector : Peak</p> |



Emission below 1GHz





2.4GHz BLE (LF)

| | | |
|----------------------|---|---|
| BLE | 2.4GHz 2400~2483.5MHz | |
| Ant | BLE LF | |
| 0 | Horizontal | Vertical |
| QP / Peak | <p>Site : 03CH15-HY Condition : QP 3m 8IL06_41912_20210208 HORIZONTAL Detector : Peak</p> | <p>Site : 03CH15-HY Condition : QP 3m 8IL06_41912_20210208 VERTICAL Detector : Peak</p> |



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)
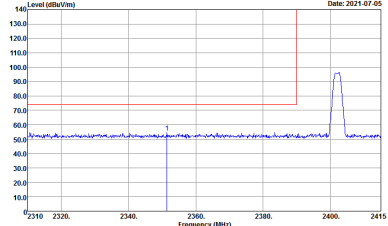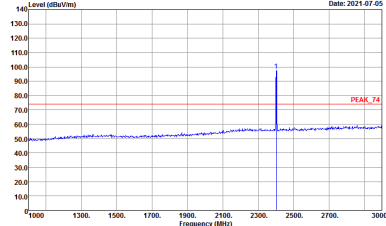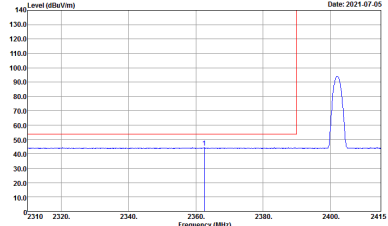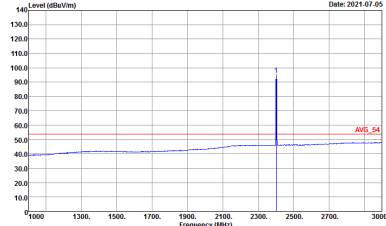
| BLE | 2.4GHz 2400~2483.5MHz Band Edge @ 3m | |
|------|--|--|
| Ant. | BLE CH00 2402MHz | |
| 1 | Horizontal | Fundamental |
| Peak |  <p>Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> |  <p>Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> |
| Avg. |  <p>Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 133143</p> |  <p>Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak Project : 133143</p> |




| BLE | 2.4GHz 2400~2483.5MHz Band Edge @ 3m | |
|------|---|--|
| Ant. | BLE CH00 2402MHz | |
| 1 | Vertical | Fundamental |
| Peak | <p>Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> | <p>Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p> |
| Avg. | <p>Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p> | <p>Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:1.000KHz SWT:Auto</p> |




Appendix D. Duty Cycle Plots

| Antenna | Band | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting | Duty Factor(dB) |
|---------|-------------------------|---------------|-------|----------|-------------|-----------------|
| 0 | Bluetooth –LE for 2Mbps | 57.33 | 1075 | 0.93 | 1kHz | 2.42 |
| 1 | Bluetooth –LE for 2Mbps | 57.33 | 1075 | 0.93 | 1kHz | 2.42 |

<Ant. 0>

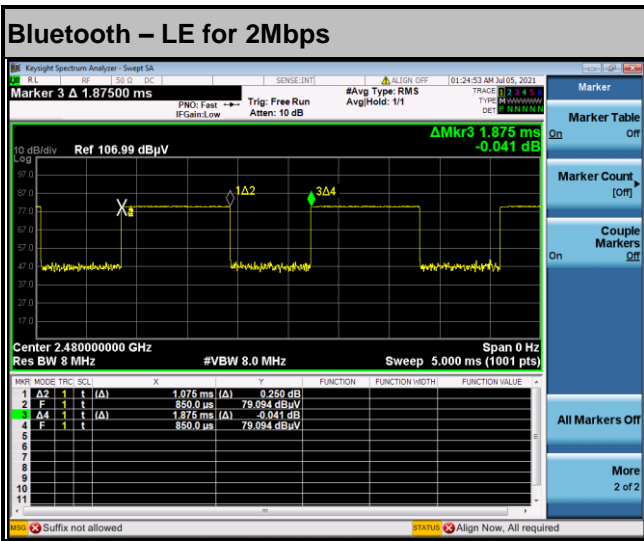

<Ant. 1>

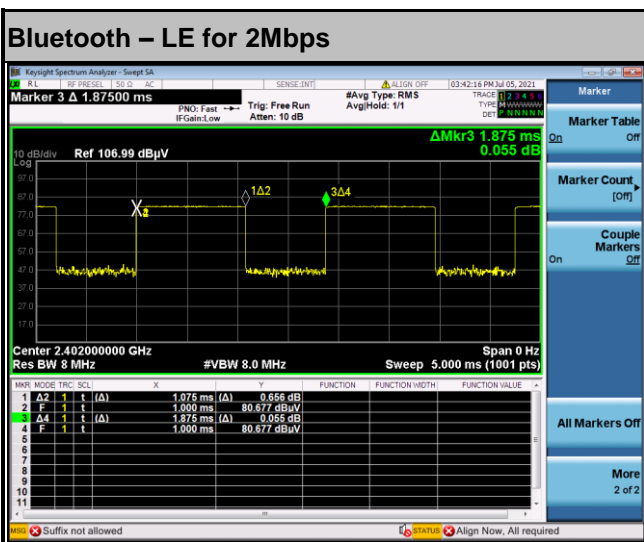

—THE END—