

#01_GSM850_GPRS (4 Tx slots)_Left Cheek_Ch128

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL_850_210621 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 824.2 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.172 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.41 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.186 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

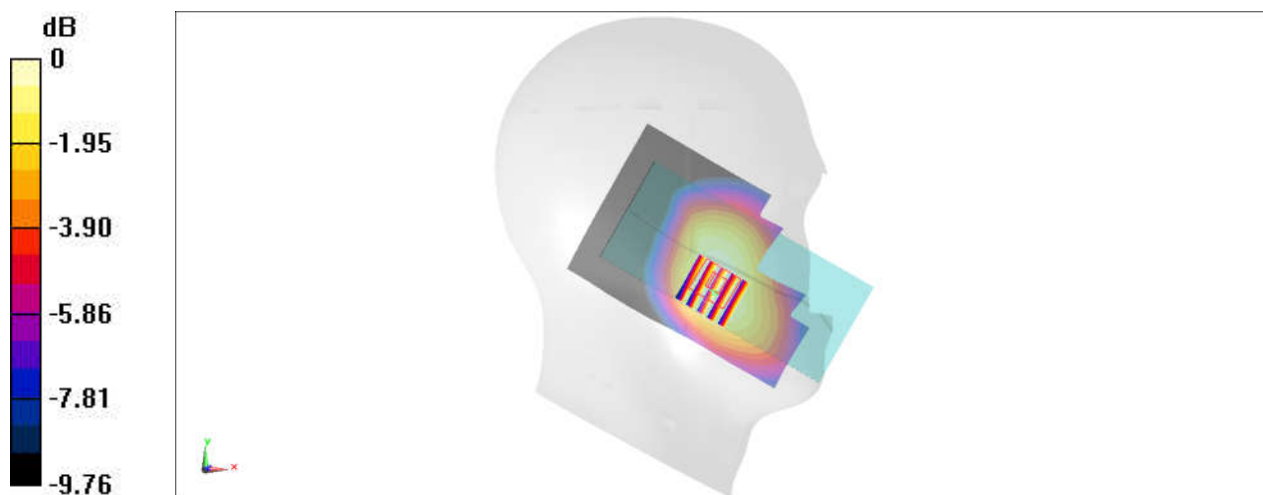

0 dB = 0.166 W/kg = -7.80 dBW/kg

#02_GSM1900_GPRS (4 Tx slots)_Right Cheek_Ch661


Communication System:PCS; Frequency: 1880 MHz;Duty Cycle: 1:2.08
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0392 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.875 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0440 W/kg
SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.019 W/kg
Maximum value of SAR (measured) = 0.0382 W/kg

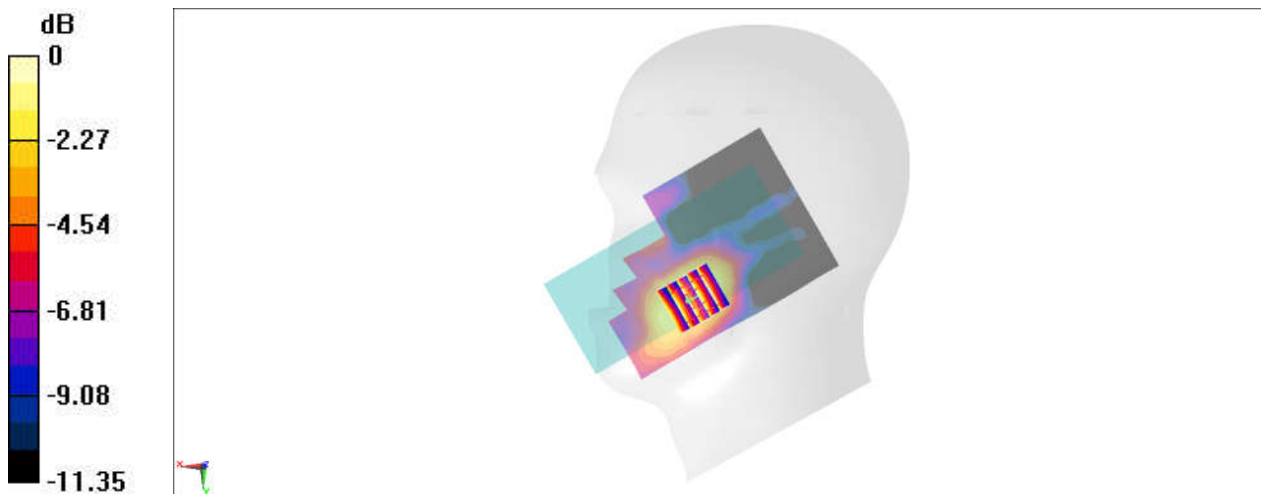

0 dB = 0.0382 W/kg = -14.18 dBW/kg

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_Ch9400


Communication System:WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0539 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.778 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0620 W/kg
SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.026 W/kg
Maximum value of SAR (measured) = 0.0514 W/kg

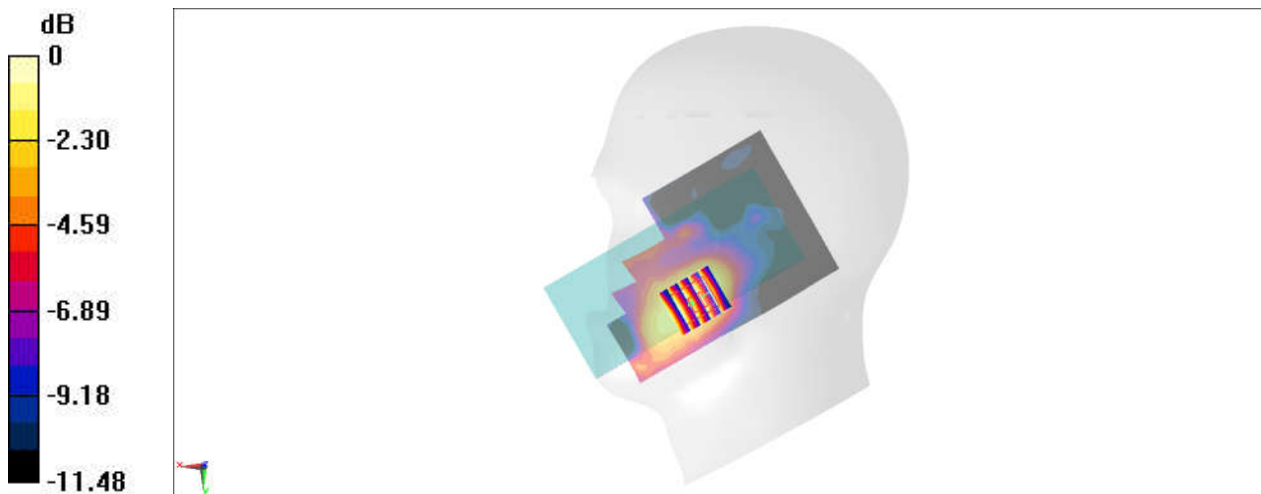

0 dB = 0.0514 W/kg = -12.89 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_Ch1312


Communication System:WCDMA; Frequency: 1712.4 MHz;Duty Cycle: 1:1
Medium: HSL_1750_210623 Medium parameters used : $f = 1712.4$ MHz; $\sigma = 1.308$ S/m; $\epsilon_r = 39.054$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1712.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0738 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.824 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.0810 W/kg
SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.037 W/kg
Maximum value of SAR (measured) = 0.0697 W/kg

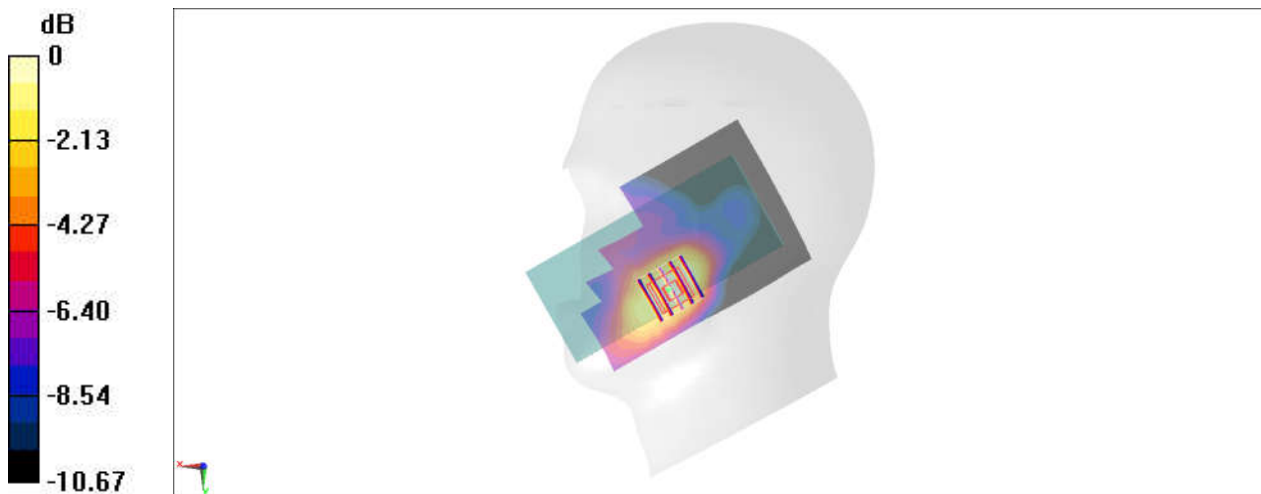

0 dB = 0.0697 W/kg = -11.57 dBW/kg

#05_WCDMA V_RMC 12.2Kbps_Left Cheek_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: HSL_850_210621 Medium parameters used : $f = 826.4 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 42.436$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 826.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.212 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 15.76 V/m ; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.228 W/kg
SAR(1 g) = 0.168 W/kg ; SAR(10 g) = 0.124 W/kg
 Maximum value of SAR (measured) = 0.204 W/kg

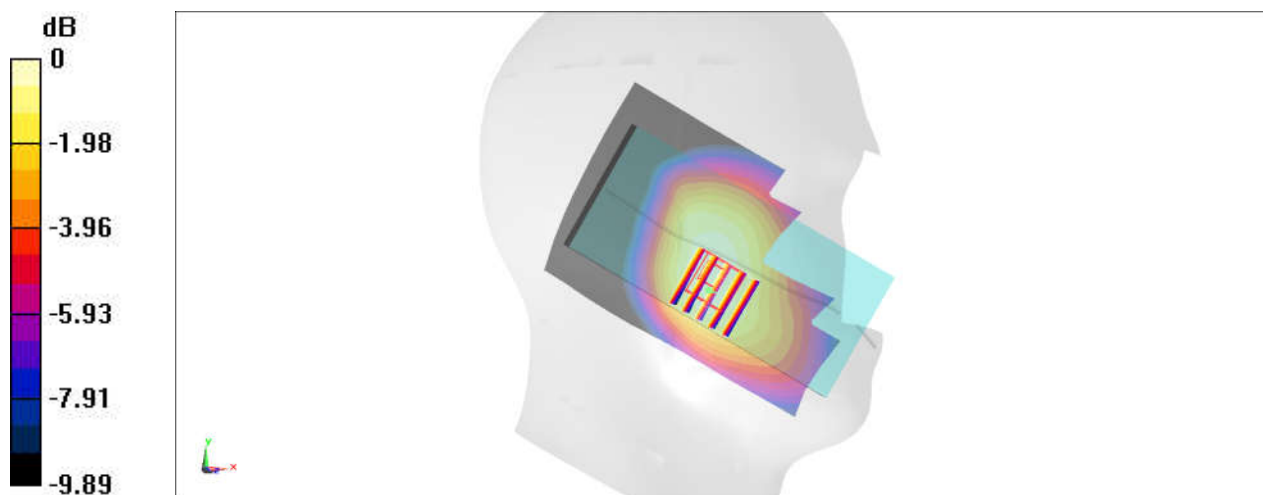

0 dB = 0.204 W/kg = -6.90 dBW/kg

#06_LTE Band 4_20M_QPSK_1_0_Right Cheek_Ch20175


Communication System:LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
Medium: HSL_1750_210623 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.069$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1732.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0592 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.988 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.0660 W/kg
SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.030 W/kg
Maximum value of SAR (measured) = 0.0583 W/kg

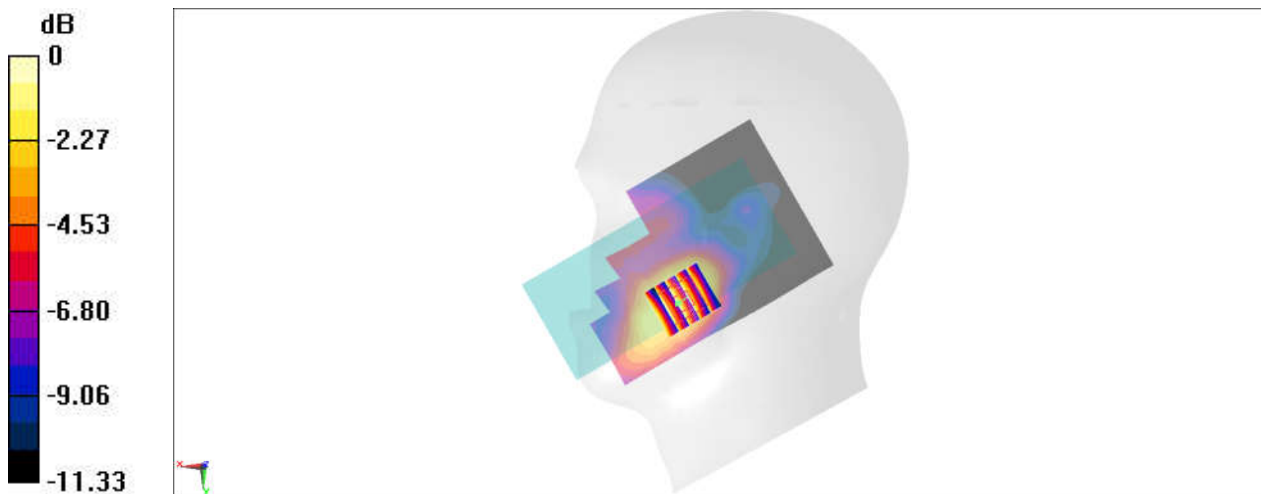

0 dB = 0.0583 W/kg = -12.34 dBW/kg

#07_LTE Band 5_10M_QPSK_25_12_Right Cheek_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium: HSL_850_210621 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.314$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 836.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.226 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 15.52 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.248 W/kg
SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.142 W/kg
 Maximum value of SAR (measured) = 0.226 W/kg

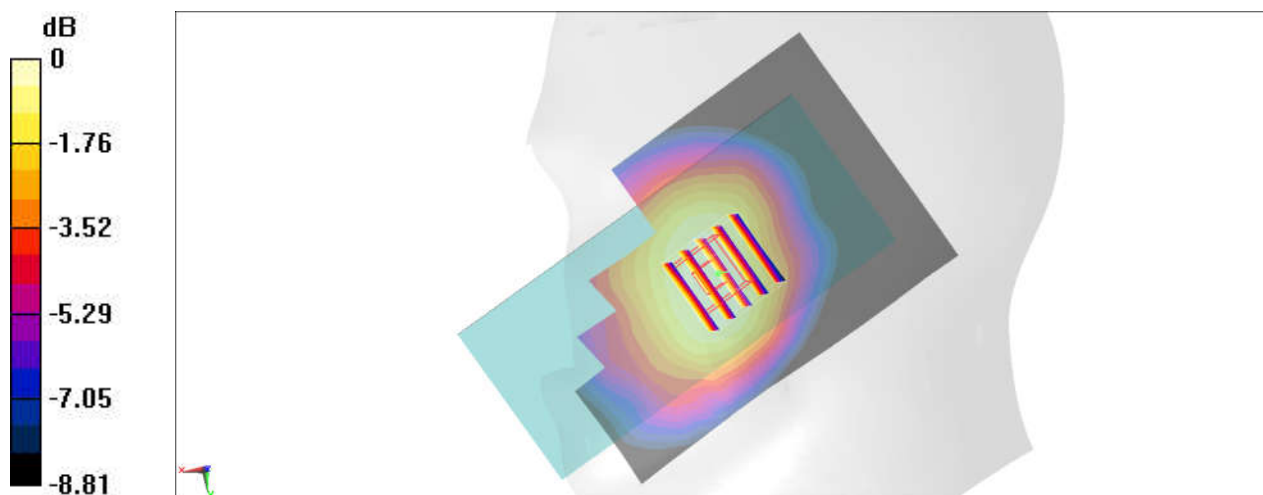

0 dB = 0.226 W/kg = -6.46 dBW/kg

#08_LTE Band 7_20M_QPSK_1_99_Left Cheek_Ch20850

Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL_2600_210624 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 39.444$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2510 MHz; Calibrated: 2020/7/6

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19

- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0369 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.345 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.0077 W/kg

Maximum value of SAR (measured) = 0.0221 W/kg

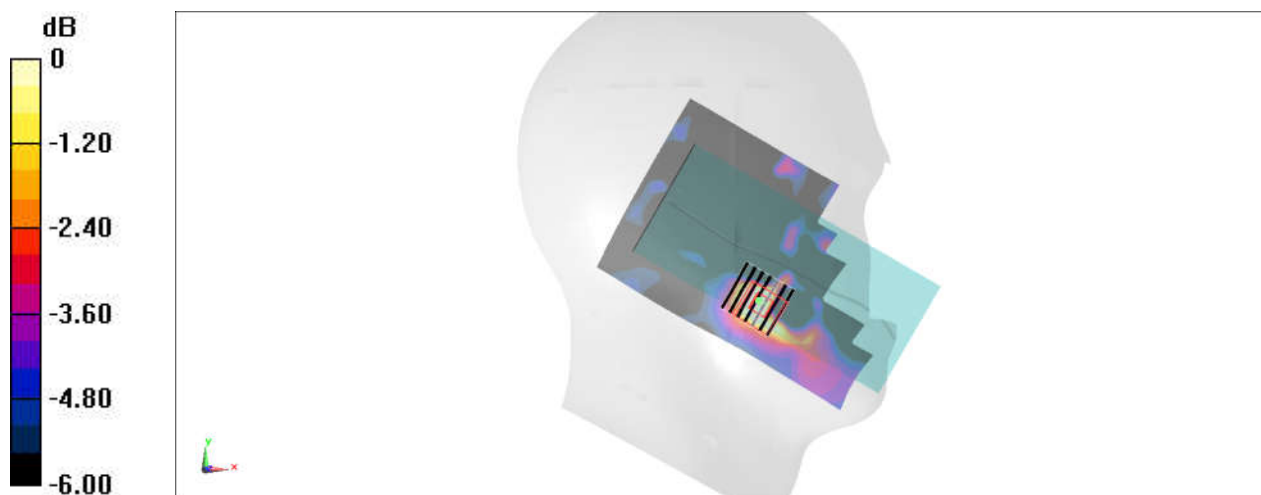

#09_LTE Band 13_10M_QPSK_25_25_Left Cheek_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_210625 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 41.301$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 782 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.126 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 11.67 V/m ; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.132 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.073 W/kg
Maximum value of SAR (measured) = 0.120 W/kg

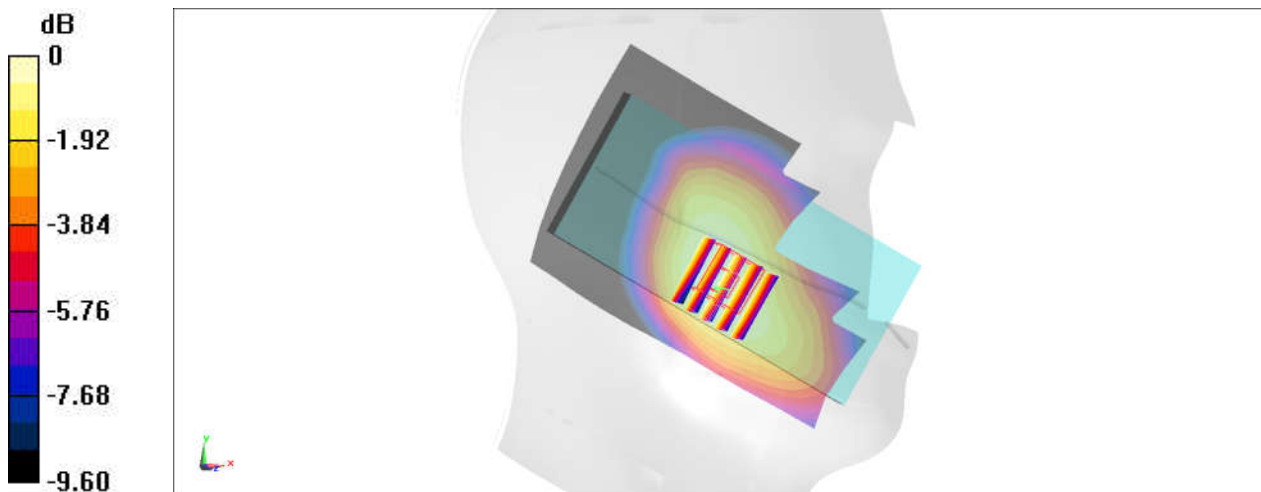

0 dB = 0.120 W/kg = -9.21 dBW/kg

#10_LTE Band 17_10M_QPSK_25_25_Left Cheek_Ch23790

Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: HSL_750_210625 Medium parameters used: $f = 710$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.552$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 710 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.60 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.100 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

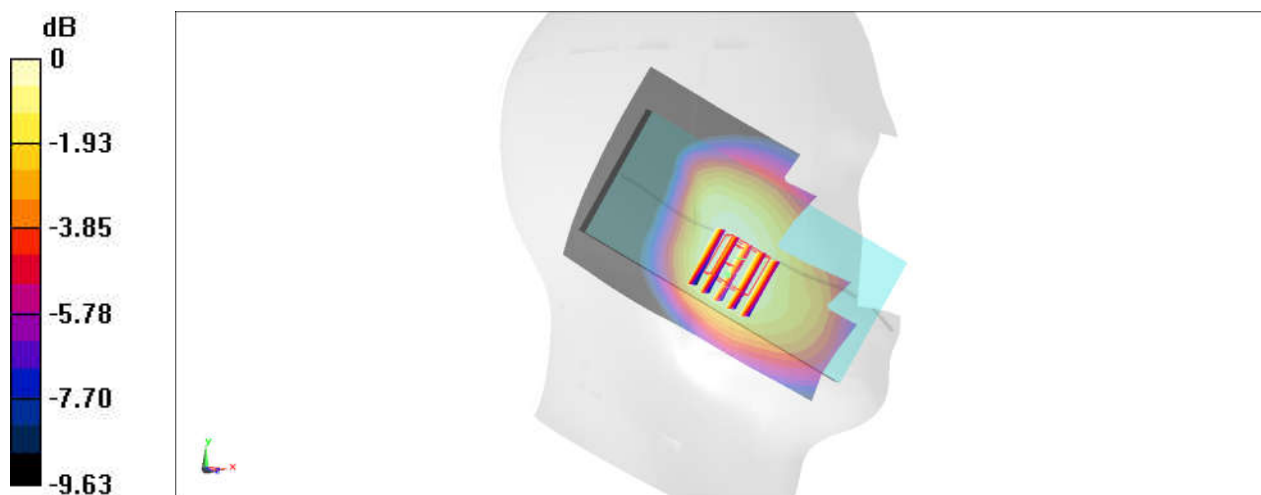

0 dB = 0.158 W/kg = -8.01 dBW/kg

#11_LTE Band 41_20M_QPSK_1_99_Right Tilted_Ch40620


Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_210624 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 39.18$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.46, 7.46, 7.46) @ 2593 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0232 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.237 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.0320 W/kg
SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.010 W/kg
Maximum value of SAR (measured) = 0.0243 W/kg

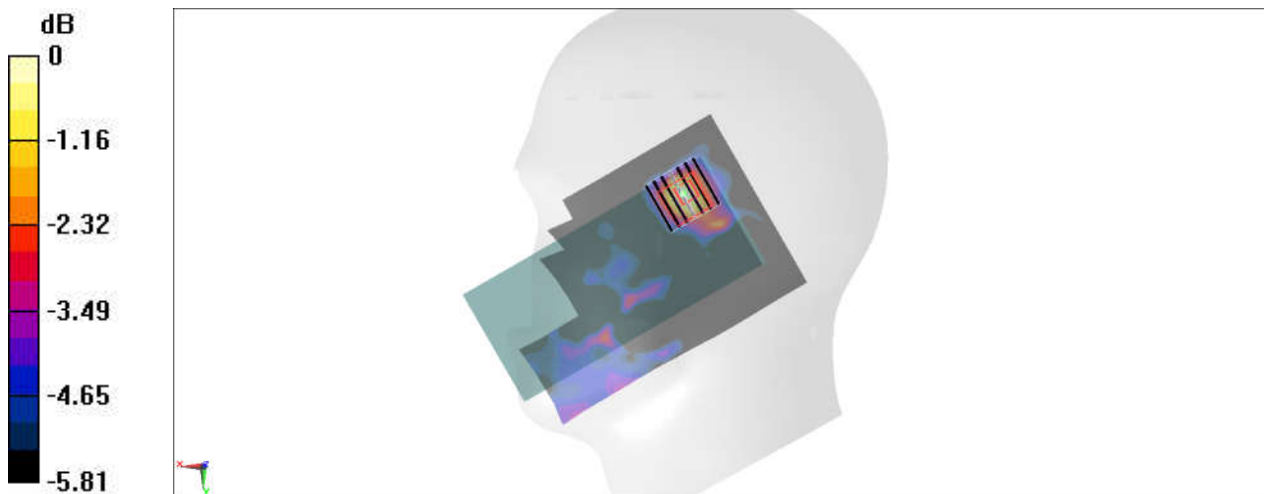

0 dB = 0.0243 W/kg = -16.14 dBW/kg

#12_WLAN2.4GHz_802.11b 1Mbps_Right Cheek_Ch11;Chain 0

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.018

Medium: HSL_2450_210628 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2462 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.828 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.15 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

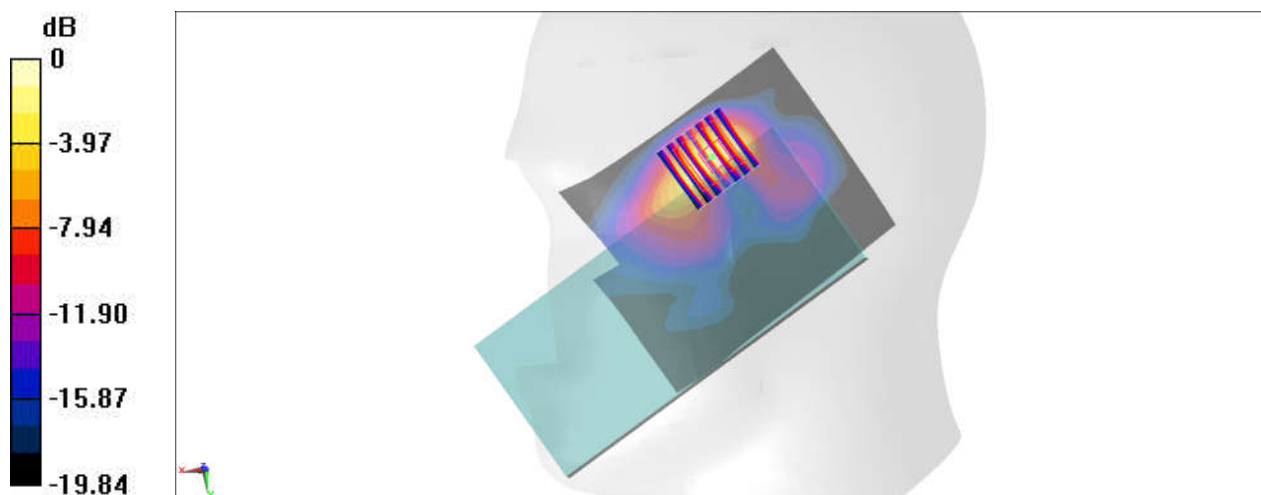

0 dB = 0.722 W/kg = -1.41 dBW/kg

#13_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_Ch50;Chain 1


Communication System: 802.11ac ; Frequency: 5250 MHz;Duty Cycle: 1:1.003
Medium: HSL_5G_210626 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.801$ S/m; $\epsilon_r = 37.002$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.23, 5.23, 5.23) @ 5250 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2021/5/21
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.274 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 6.964 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.078 W/kg
Maximum value of SAR (measured) = 0.789 W/kg

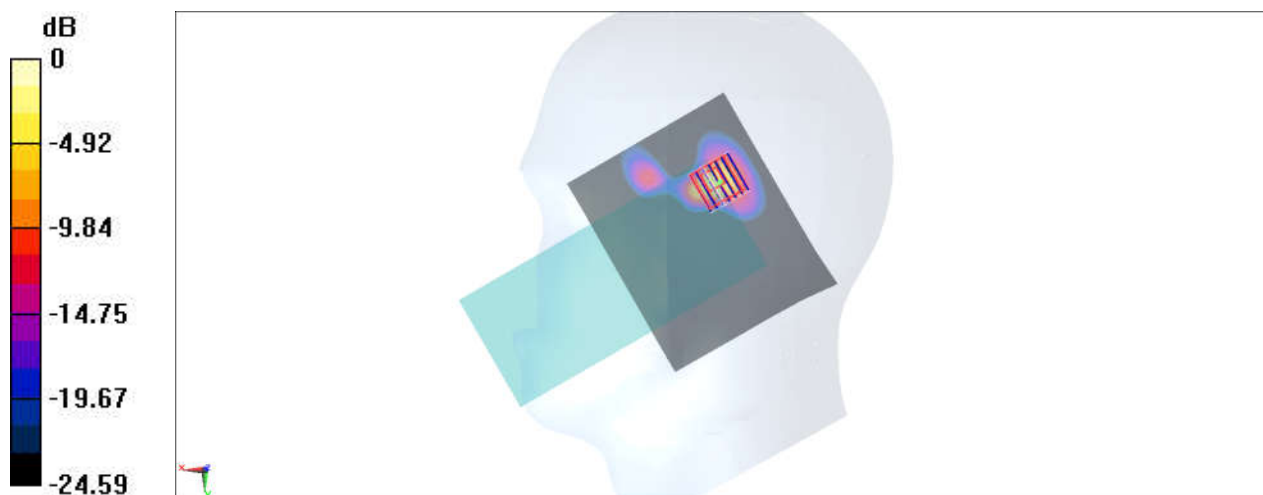

0 dB = 0.789 W/kg = -1.03 dBW/kg

#14_WLAN5GHz_802.11ac-VHT160 MCS0_Right Cheek_Ch114;Chain 0

Communication System: 802.11ac ; Frequency: 5570 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used : $f = 5570$ MHz; $\sigma = 5.069$ S/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.02, 5.02, 5.02) @ 5570 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (91x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.283 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.827 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

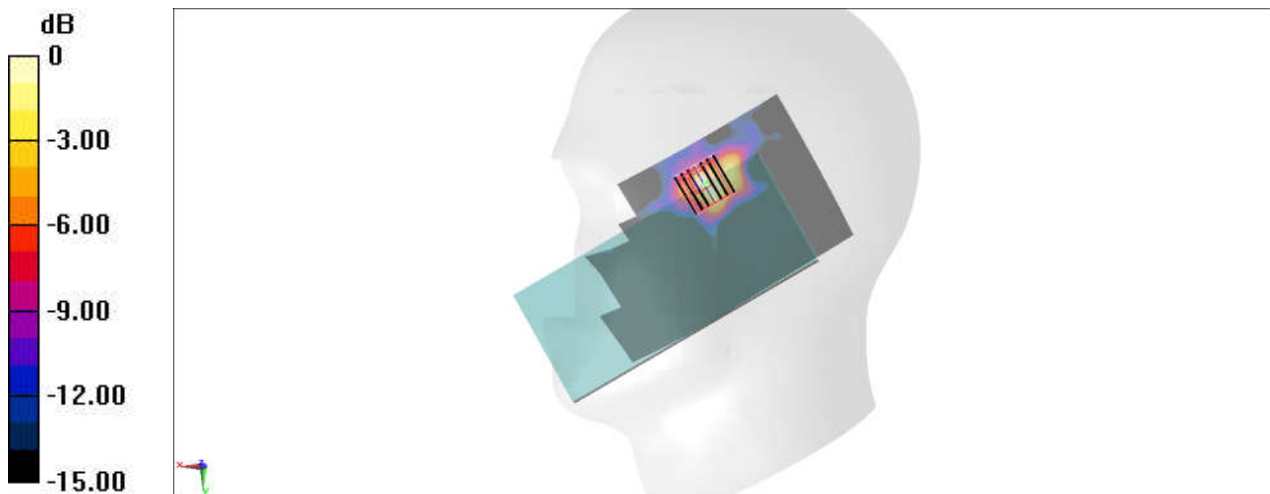

0 dB = 0.260 W/kg = -5.85 dBW/kg

#15_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_Ch155;Chain 1

Communication System: 802.11ac ; Frequency: 5775 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.303$ S/m; $\epsilon_r = 36.109$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.15, 5.15, 5.15) @ 5775 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.178 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.381 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.396 W/kg

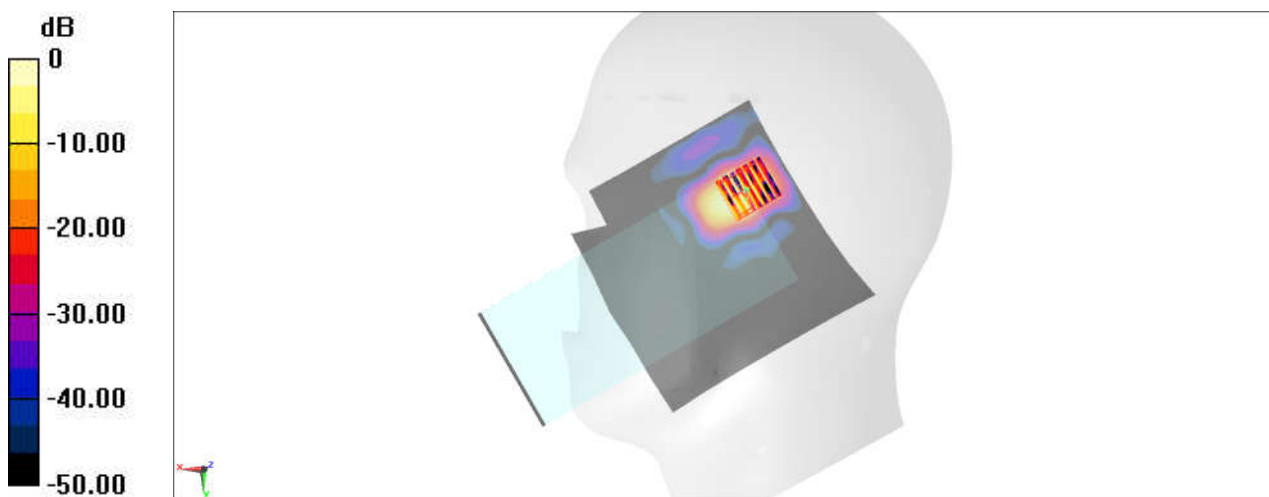

0 dB = 0.396 W/kg = -4.02 dBW/kg

#16_Bluetooth_1Mbps_Right Cheek_Ch78;Chain 0

Communication System: Bluetooth ; Frequency: 2480 MHz;Duty Cycle: 1:1.302

Medium: HSL_2450_210628 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.743$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2480 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (101x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.356 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.031 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.368 W/kg

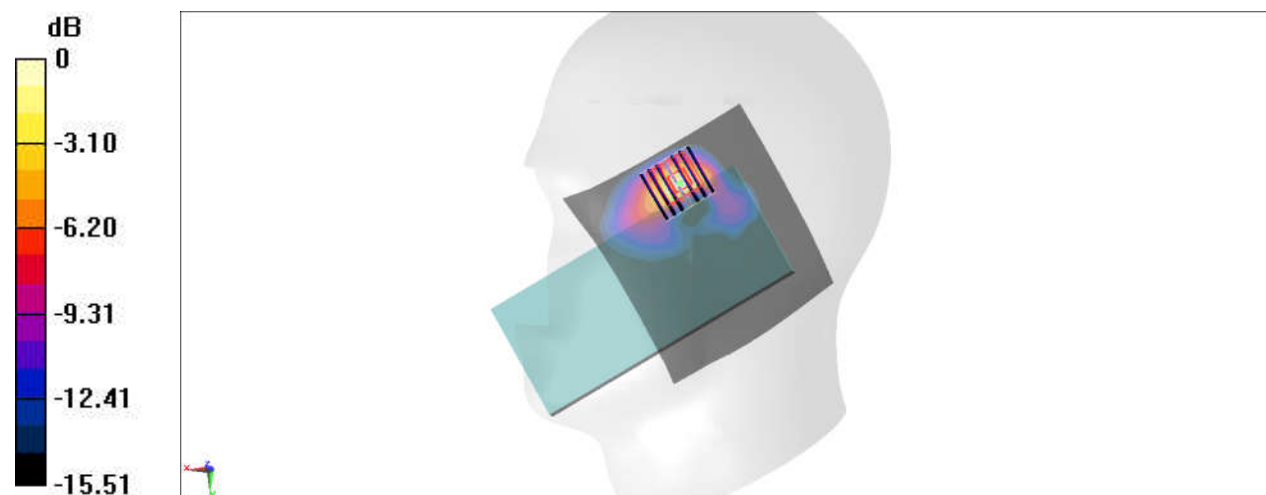

0 dB = 0.368 W/kg = -4.34 dBW/kg

#17_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch128


Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_850_210621 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 824.2 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.193 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.29 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.217 W/kg
SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.099 W/kg
Maximum value of SAR (measured) = 0.190 W/kg

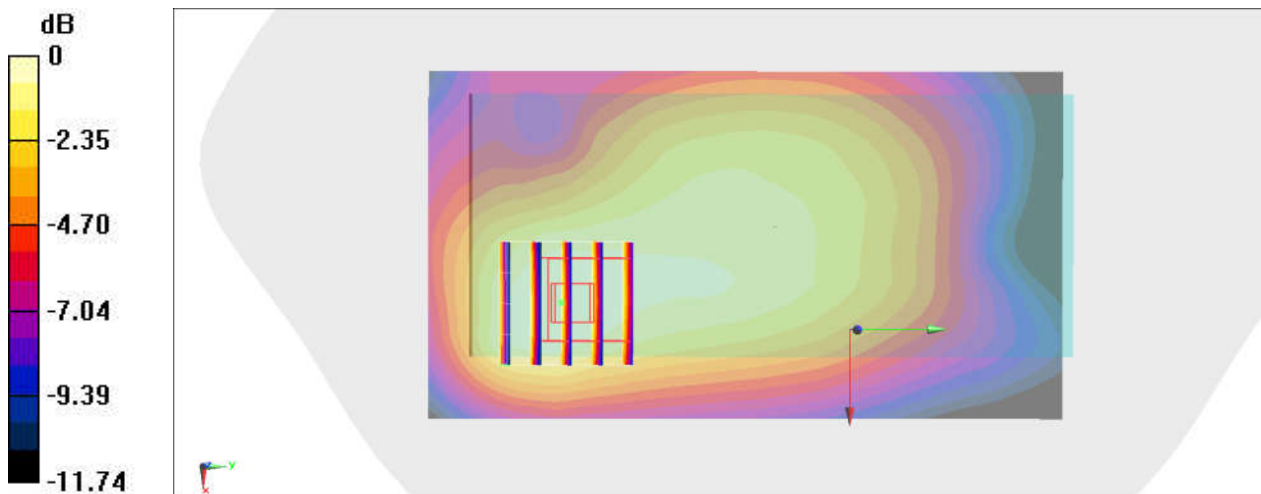

0 dB = 0.190 W/kg = -7.21 dBW/kg

#18_GSM1900_GPRS (4 Tx slots)_Bottom Side_10mm_Ch661


Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.719 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.29 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.815 W/kg
SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.253 W/kg
Maximum value of SAR (measured) = 0.692 W/kg

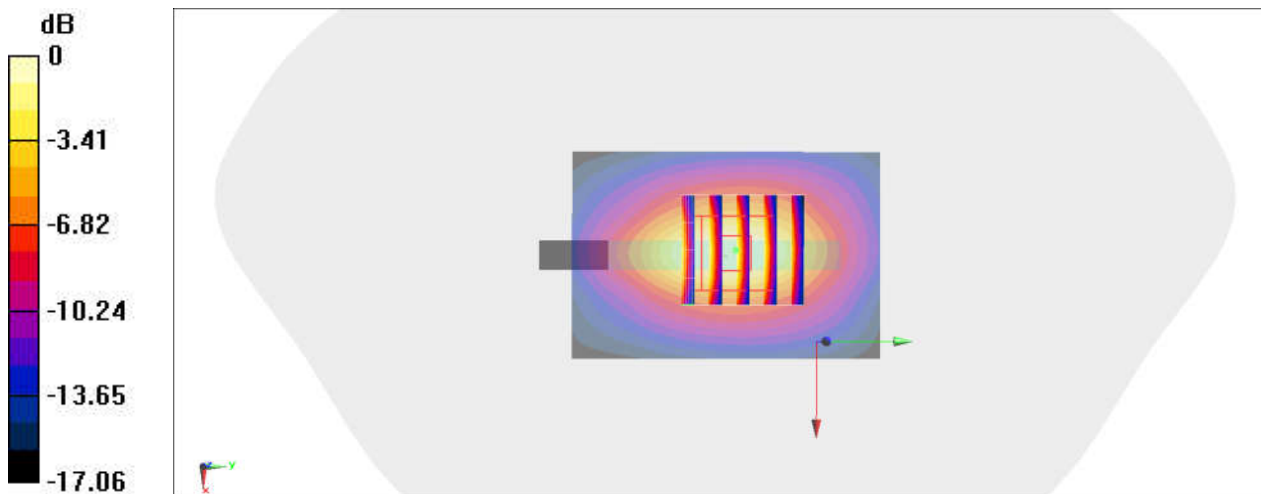

#19_WCDMA II_RMC 12.2Kbps_Bottom Side_10mm_Ch9400


Communication System:WCDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.986 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.90 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 0.954 W/kg

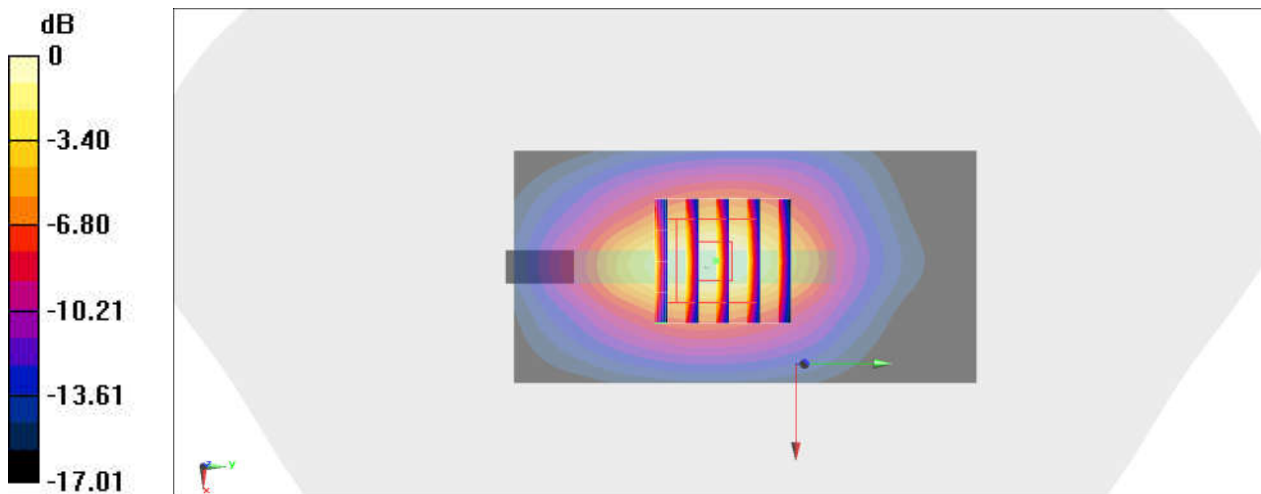

0 dB = 0.954 W/kg = -0.20 dBW/kg

#20_WCDMA IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1312


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_210623 Medium parameters used : $f = 1712.4$ MHz; $\sigma = 1.308$ S/m; $\epsilon_r = 39.054$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1712.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.986 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 28.22 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.355 W/kg
 Maximum value of SAR (measured) = 0.986 W/kg

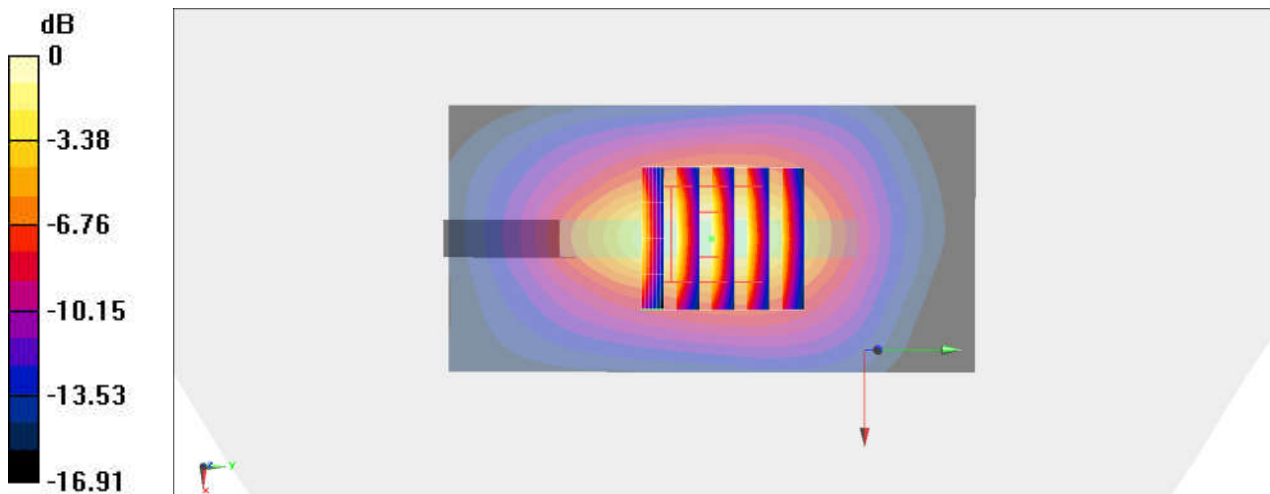

0 dB = 0.986 W/kg = -0.06 dBW/kg

#21_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_210621 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.436$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 826.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.356 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.62 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.390 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.176 W/kg
Maximum value of SAR (measured) = 0.338 W/kg

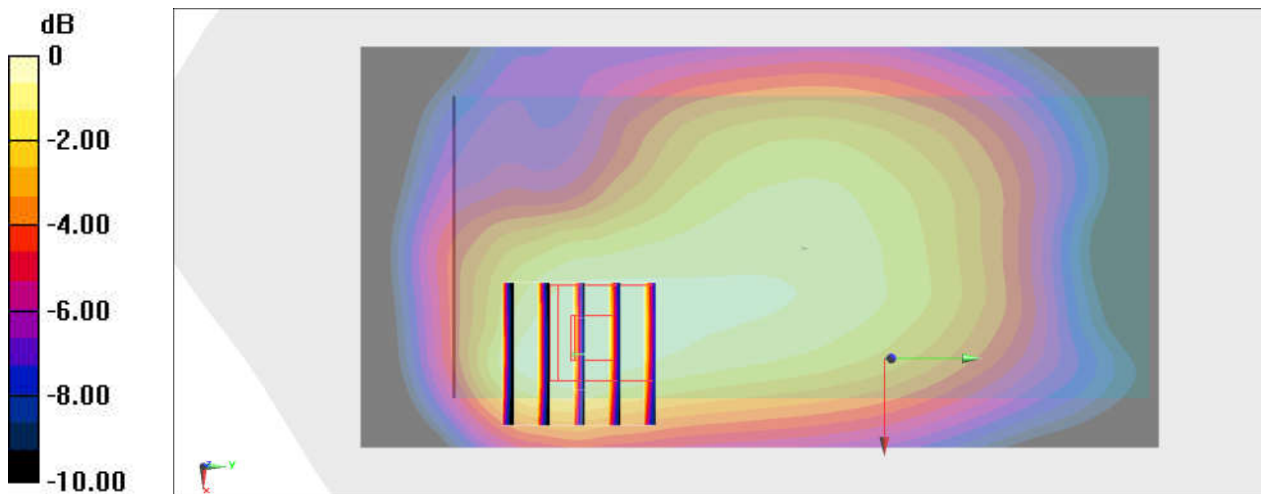

0 dB = 0.338 W/kg = -4.71 dBW/kg

#22_LTE Band 4_20M_QPSK_50_0_Bottom Side_10mm_Ch20175


Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750_210623 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.322 \text{ S/m}$; $\epsilon_r = 39.069$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1732.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.967 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 27.79 V/m ; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.645 W/kg ; SAR(10 g) = 0.345 W/kg
Maximum value of SAR (measured) = 0.971 W/kg

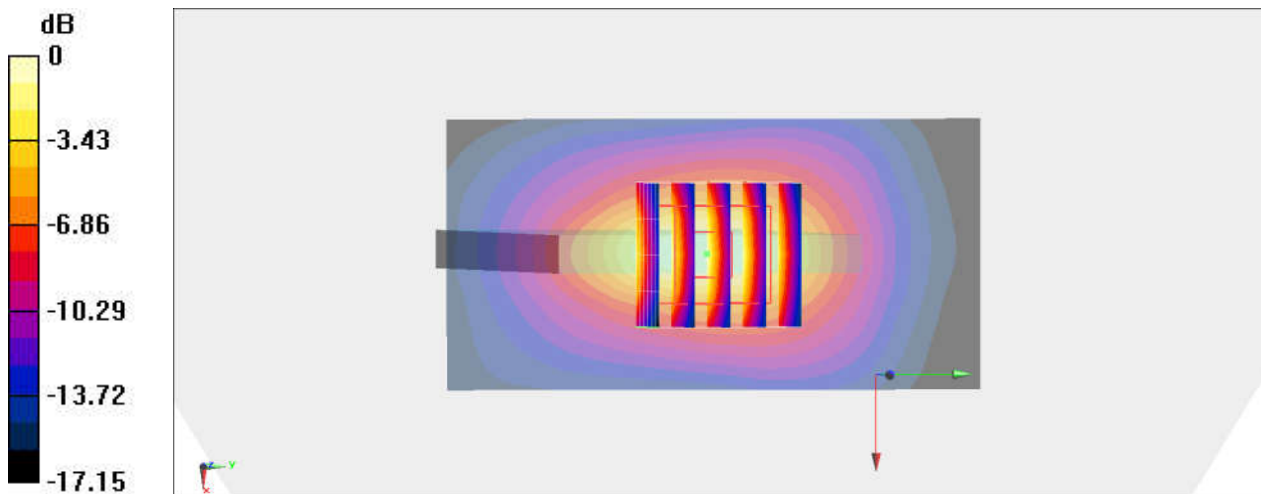

0 dB = 0.971 W/kg = -0.13 dBW/kg

#23_LTE Band 5_10M_QPSK_25_12_Right Side_10mm_Ch20525


Communication System:LTE; Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: HSL_850_210621 Medium parameters used : $f = 836.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.314$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 836.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (51x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.352 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.33 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.410 W/kg
SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.176 W/kg
Maximum value of SAR (measured) = 0.355 W/kg

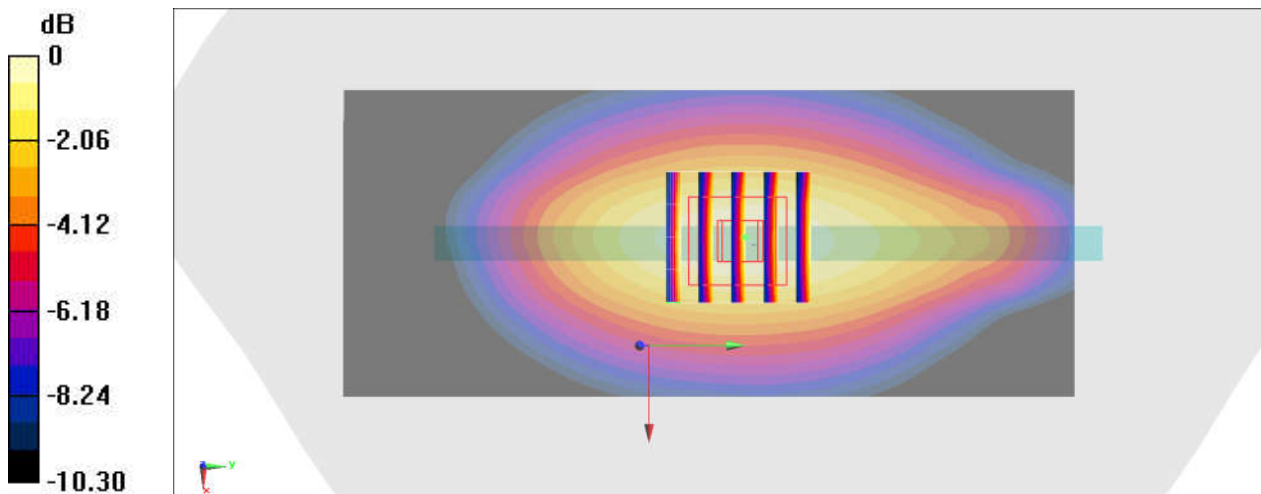

#24_LTE Band 7_20M_QPSK_50_24_Bottom Side_10mm_Ch20850


Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600_210624 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 39.444$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2510 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.755 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.093 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.903 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.235 W/kg
Maximum value of SAR (measured) = 0.750 W/kg

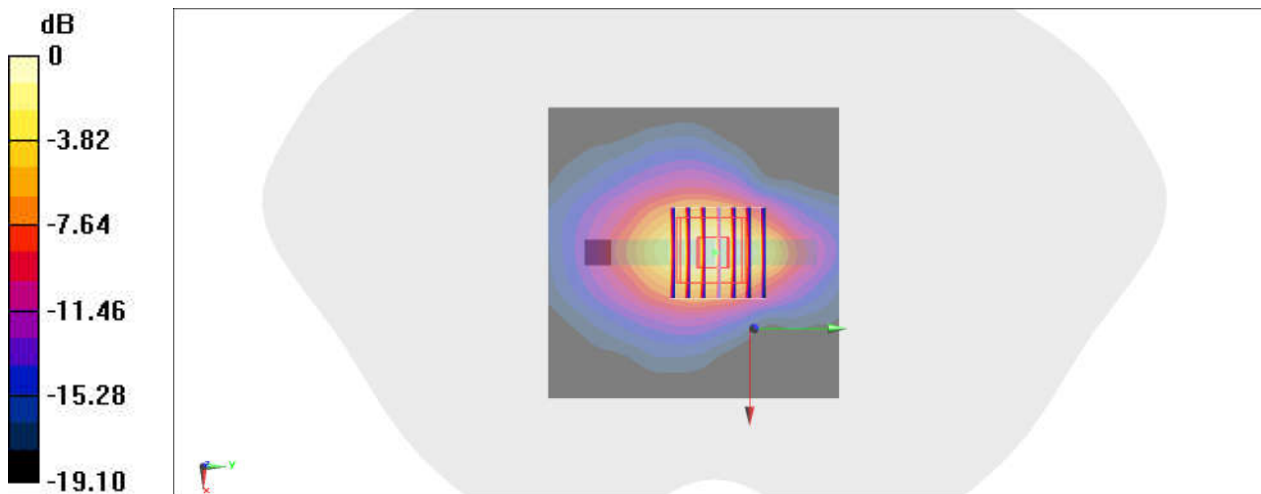

0 dB = 0.750 W/kg = -1.25 dBW/kg

#25_LTE Band 13_10M_QPSK_25_25_Back_10mm_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_210625 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 41.301$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 782 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.372 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 19.57 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.423 W/kg
SAR(1 g) = 0.275 W/kg ; SAR(10 g) = 0.178 W/kg
Maximum value of SAR (measured) = 0.360 W/kg

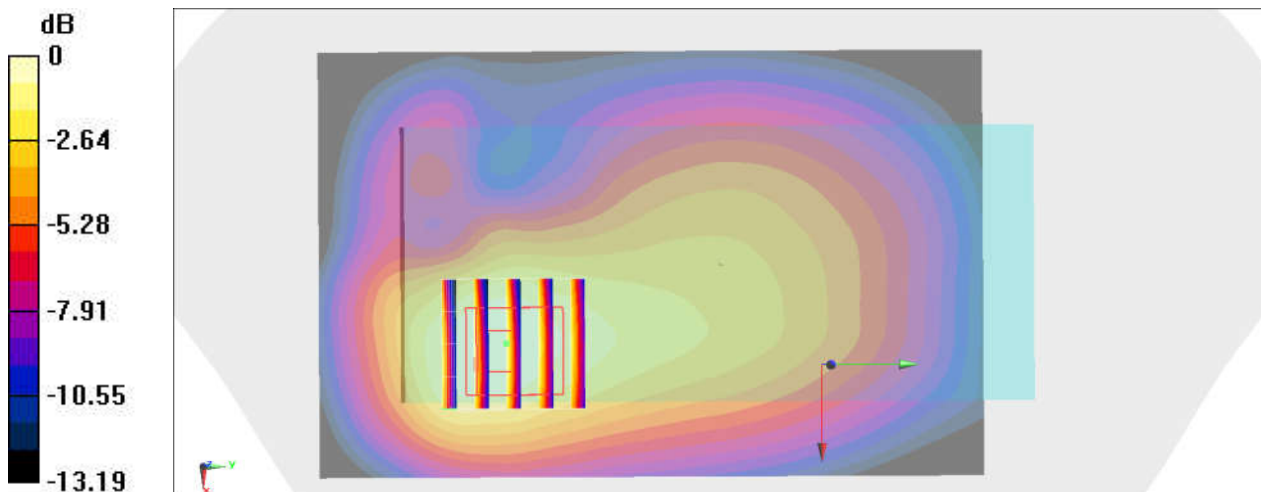

0 dB = 0.360 W/kg = -4.44 dBW/kg

#26_LTE Band 17_10M_QPSK_1_0_Left Side_10mm_Ch23790


Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: HSL_750_210625 Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.552$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 710 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (41x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 18.34 V/m ; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.327 W/kg
SAR(1 g) = 0.222 W/kg ; SAR(10 g) = 0.153 W/kg
Maximum value of SAR (measured) = 0.288 W/kg

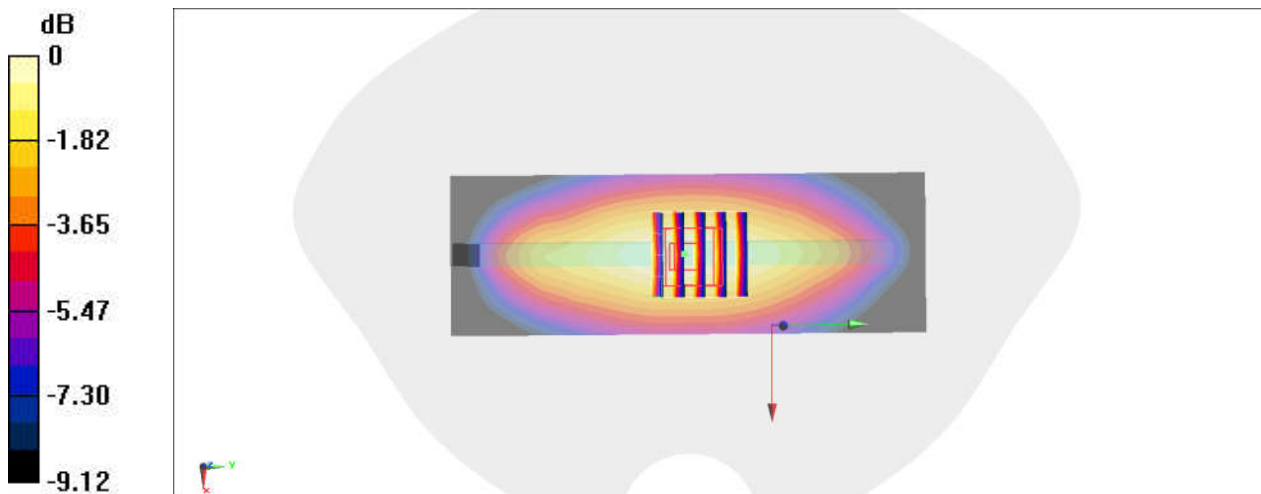

0 dB = $0.288 \text{ W/kg} = -5.41 \text{ dBW/kg}$

#27_LTE Band 41_20M_QPSK_50_24_Bottom Side_10mm_Ch40620


Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_210624 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 39.18$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.46, 7.46, 7.46) @ 2593 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.533 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.785 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.629 W/kg
SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.164 W/kg
Maximum value of SAR (measured) = 0.512 W/kg

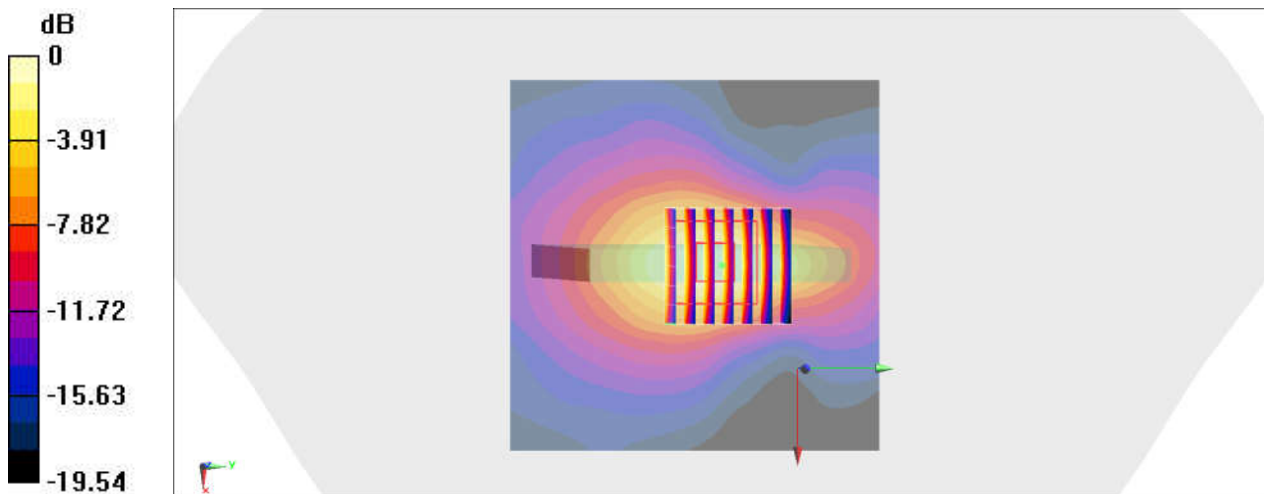

0 dB = 0.512 W/kg = -2.91 dBW/kg

#28_WLAN2.4GHz_802.11b 1Mbps_Left Side_10mm_Ch11;Chain 0

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.018

Medium: HSL_2450_210628 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2462 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.437 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.297 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

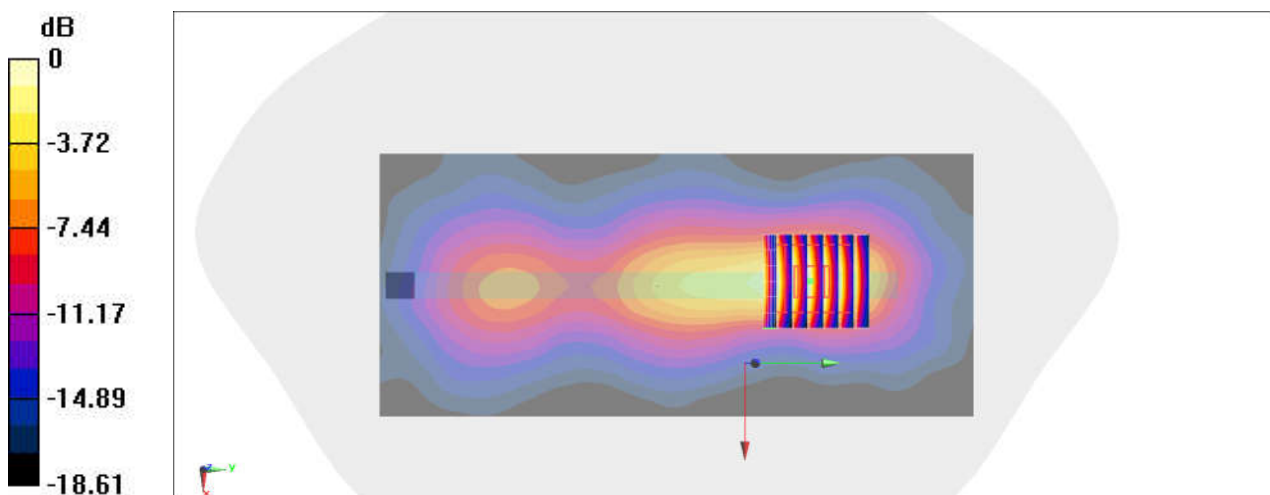

0 dB = 0.418 W/kg = -3.79 dBW/kg

#29_WLAN5GHz_802.11ac-VHT80 MCS0_Left Side_10mm_Ch42;Chain 0

Communication System: 802.11ac ; Frequency: 5210 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used : $f = 5210$ MHz; $\sigma = 4.685$ S/m; $\epsilon_r = 36.906$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.54, 5.54, 5.54) @ 5210 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (61x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.138 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.644 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

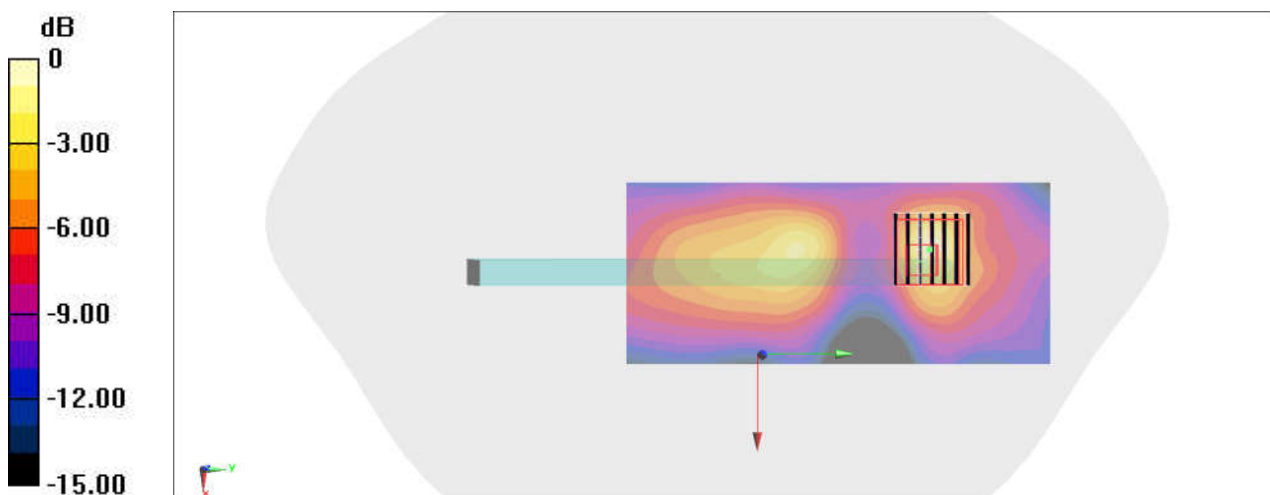

0 dB = 0.158 W/kg = -8.01 dBW/kg

#30_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155;Chain 1


Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.003
 Medium: HSL_5G_210629 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.303$ S/m; $\epsilon_r = 36.109$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.15, 5.15, 5.15) @ 5775 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0820 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 1.553 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.132 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.010 W/kg
 Maximum value of SAR (measured) = 0.0884 W/kg

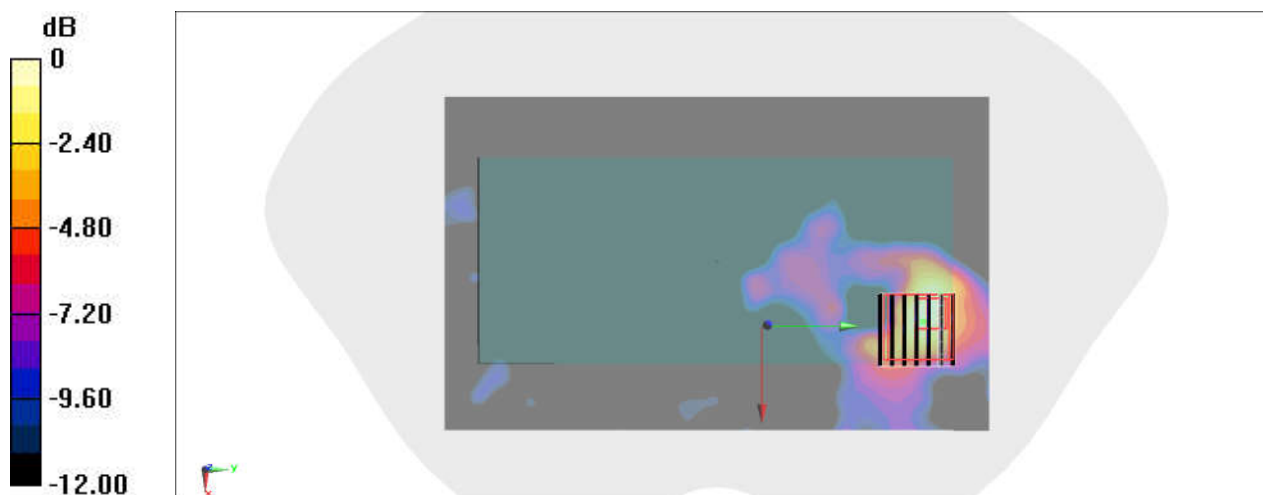

0 dB = 0.0884 W/kg = -10.54 dBW/kg

#31_Bluetooth_1Mbps_Left Side_10mm_Ch78;Chain 0


Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_210628 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.743$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2480 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (51x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.157 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.071 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.180 W/kg
SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.043 W/kg
Maximum value of SAR (measured) = 0.147 W/kg

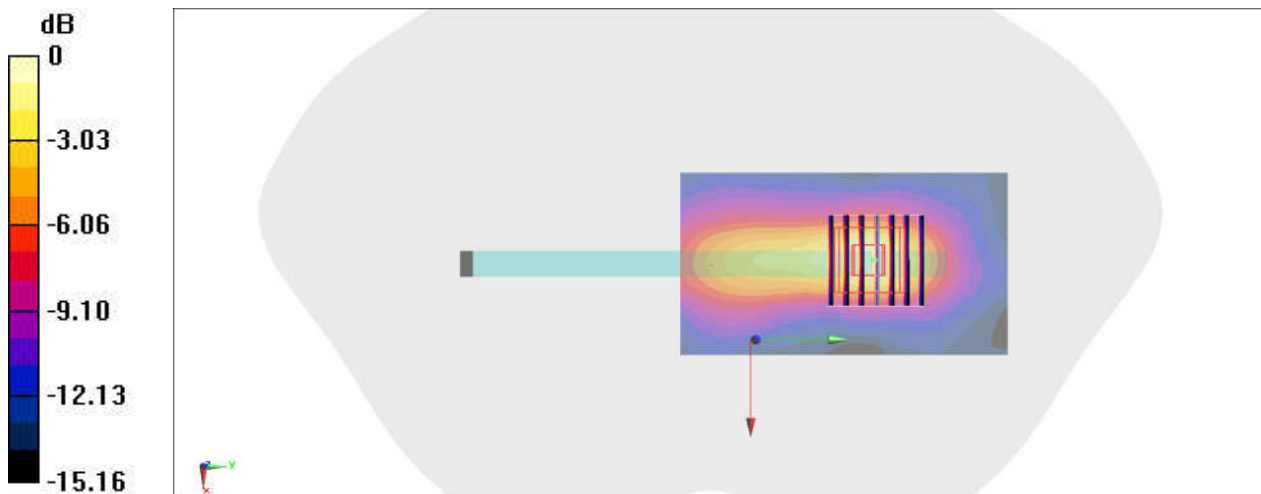

0 dB = 0.147 W/kg = -8.33 dBW/kg

#32_GSM850_GPRS (4 Tx slots)_Back_10mm_Ch128

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.08

Medium: HSL_850_210621 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.46$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 824.2 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.193 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.29 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.190 W/kg

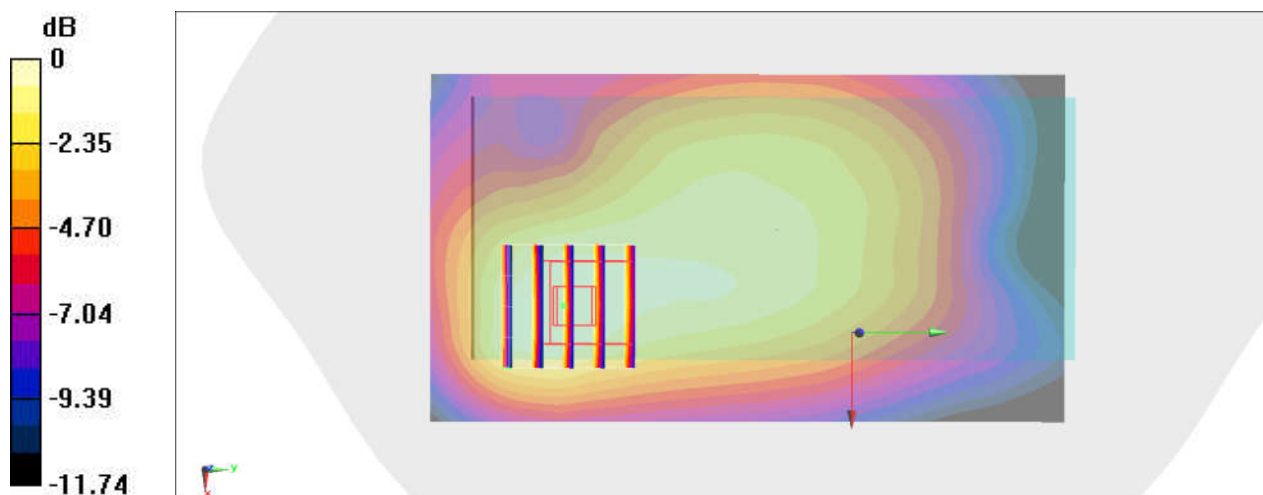

0 dB = 0.190 W/kg = -7.21 dBW/kg

#33_GSM1900_GPRS (4 Tx slots)_Back_10mm_Ch661


Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.455 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.64 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.529 W/kg
SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.175 W/kg
Maximum value of SAR (measured) = 0.458 W/kg

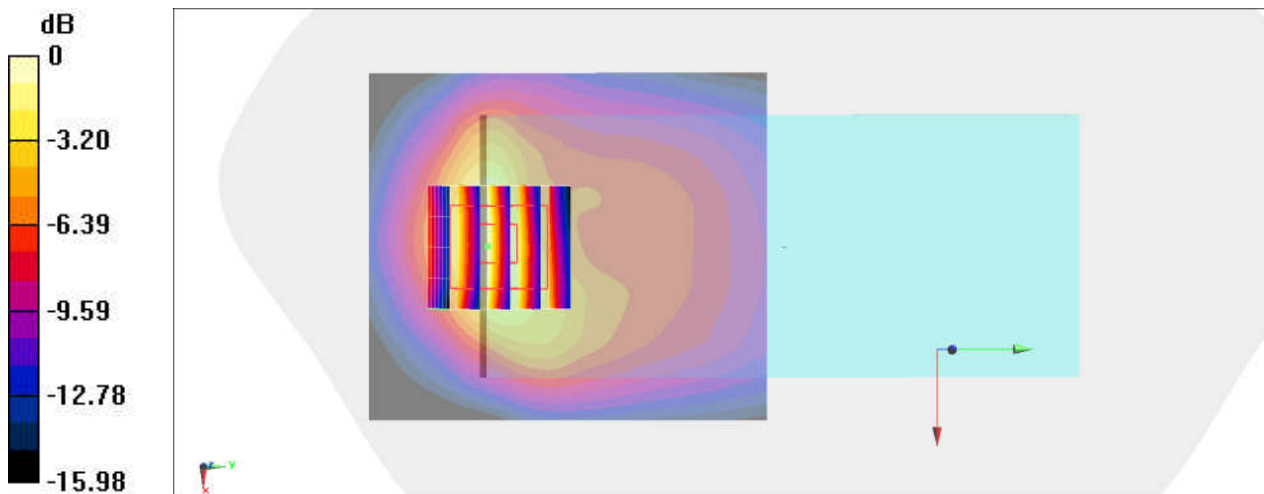

0 dB = 0.458 W/kg = -3.39 dBW/kg

#34_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9400


Communication System:WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium: HSL_1900_210622 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.252$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.22, 8.22, 8.22) @ 1880 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.639 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.60 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.752 W/kg
SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.244 W/kg
Maximum value of SAR (measured) = 0.649 W/kg

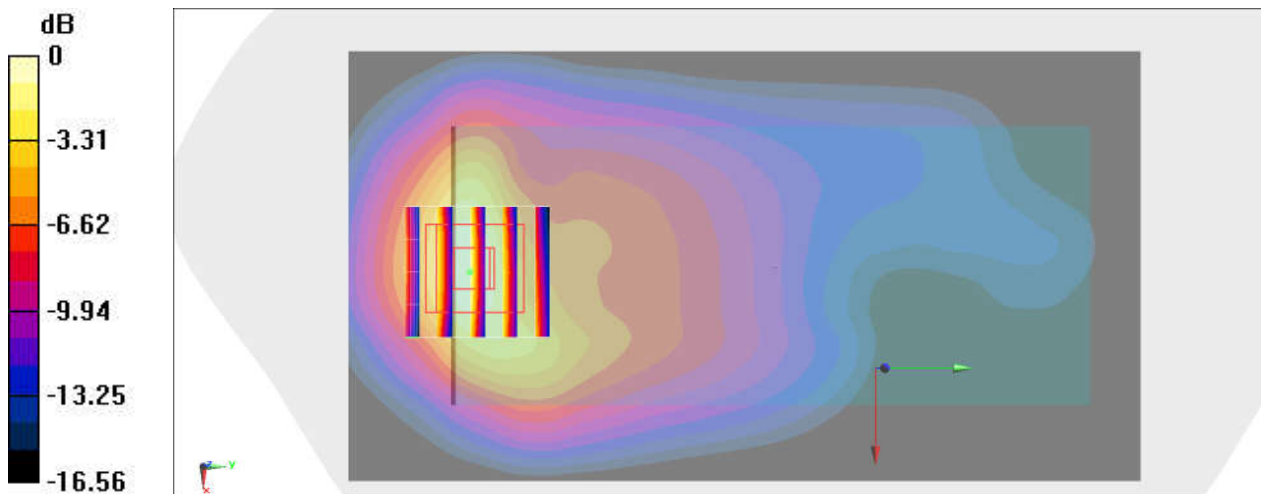

0 dB = 0.649 W/kg = -1.88 dBW/kg

#35_WCDMA_IV_RMC 12.2Kbps_Back_10mm_Ch1312


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL_1750_210623 Medium parameters used : $f = 1712.4$ MHz; $\sigma = 1.308$ S/m; $\epsilon_r = 39.054$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1712.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.640 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.41 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.749 W/kg
SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.254 W/kg
Maximum value of SAR (measured) = 0.654 W/kg

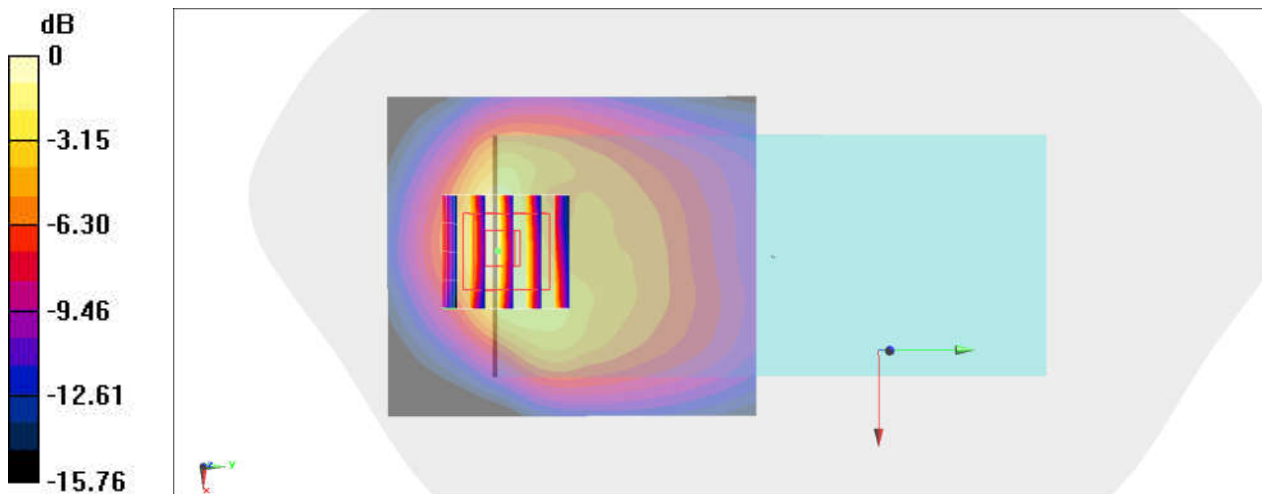

0 dB = 0.654 W/kg = -1.84 dBW/kg

#36_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_210621 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.436$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 826.4 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.356 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.62 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.390 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.176 W/kg
Maximum value of SAR (measured) = 0.338 W/kg

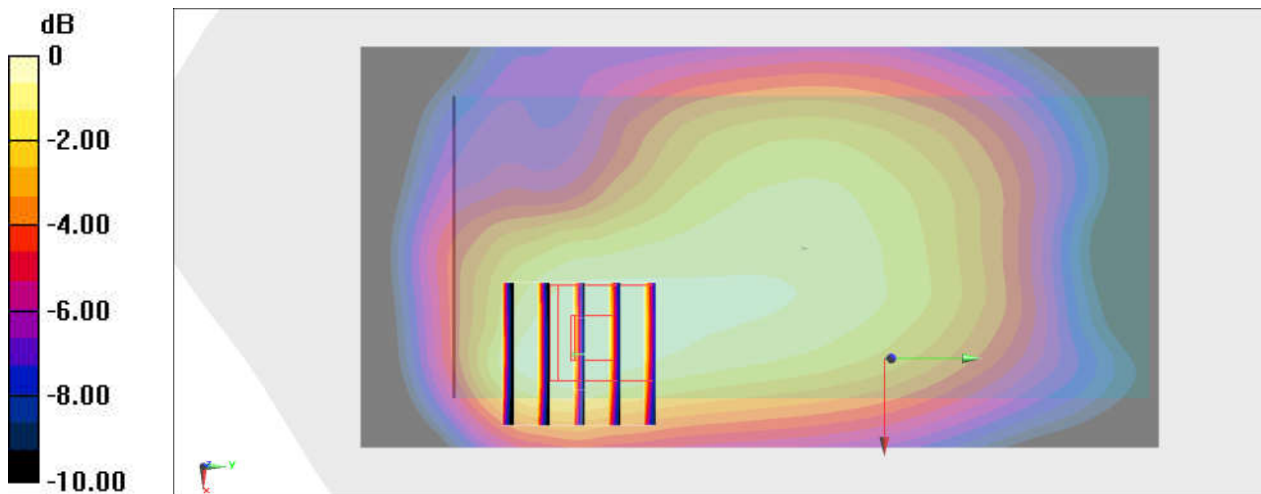

0 dB = 0.338 W/kg = -4.71 dBW/kg

#37_LTE Band 4_20M_QPSK_50_0_Back_10mm_Ch20175


Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1750_210623 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 39.069$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.55, 8.55, 8.55) @ 1732.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.620 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.68 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.719 W/kg
SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.242 W/kg
Maximum value of SAR (measured) = 0.625 W/kg

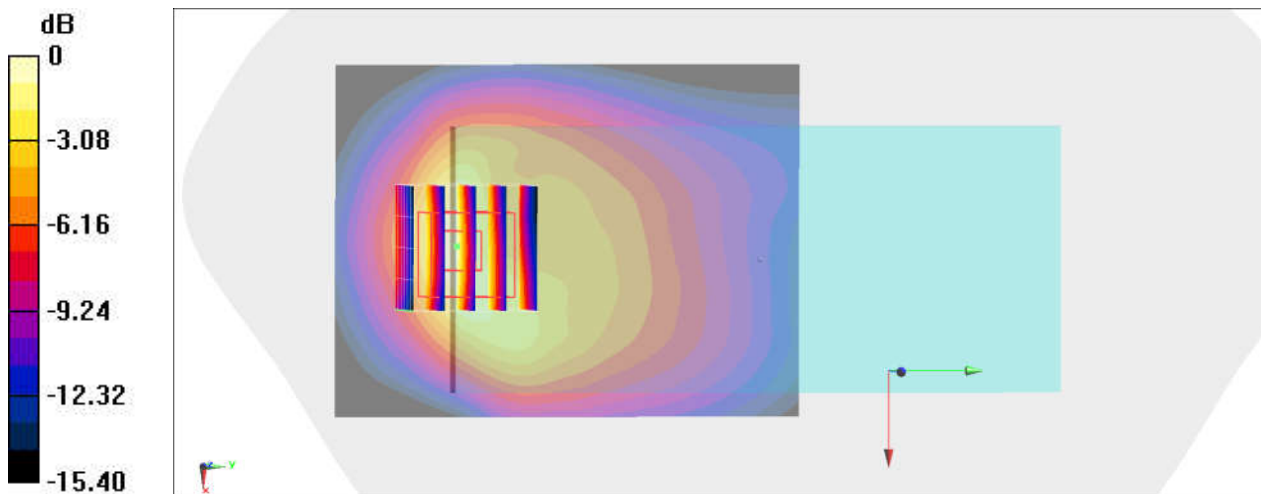

0 dB = 0.625 W/kg = -2.04 dBW/kg

#38_LTE Band 5_10M_QPSK_25_12_Back_10mm_Ch20525


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_850_210621 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.314$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.16, 10.16, 10.16) @ 836.5 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (61x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.329 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.70 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.359 W/kg
SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.155 W/kg
Maximum value of SAR (measured) = 0.309 W/kg

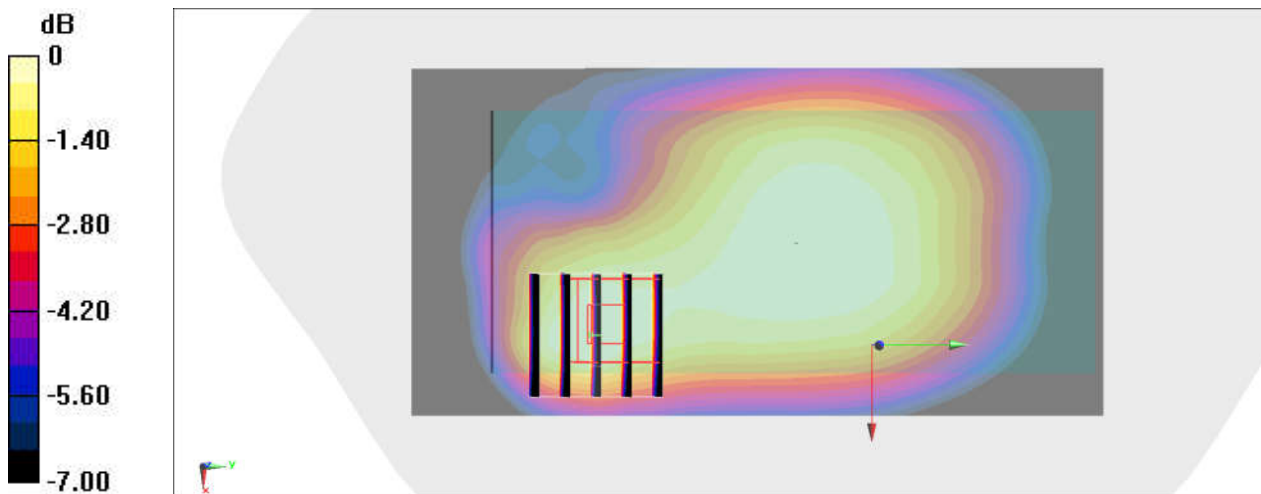

0 dB = 0.309 W/kg = -5.10 dBW/kg

#39_LTE Band 7_20M_QPSK_50_24_Back_10mm_Ch20850


Communication System:LTE; Frequency: 2510 MHz;Duty Cycle: 1:1
Medium: HSL_2600_210624 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 39.444$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2510 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.351 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.52 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.339 W/kg

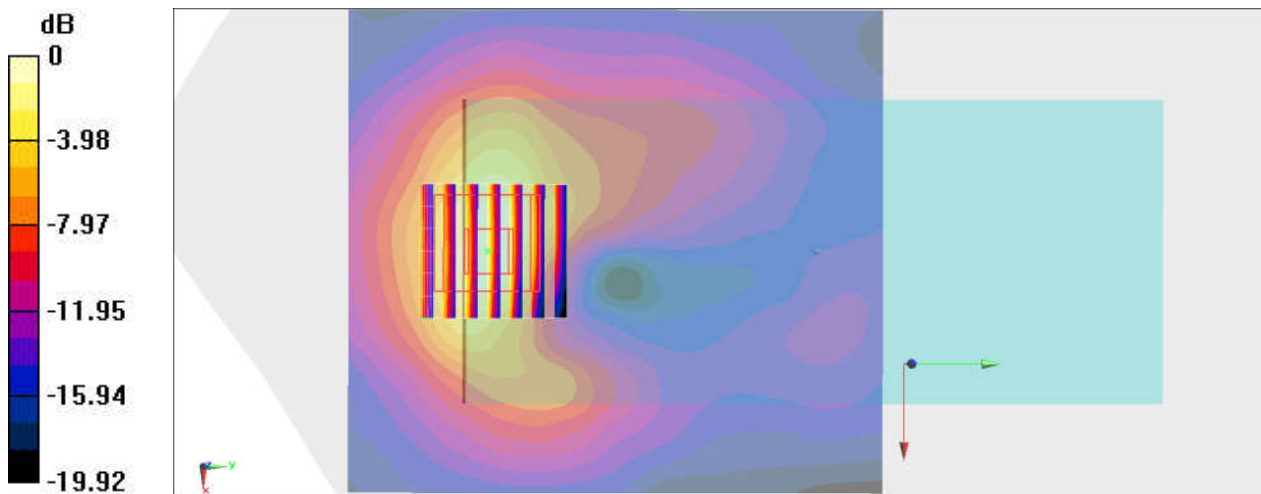

0 dB = 0.339 W/kg = -4.70 dBW/kg

#40_LTE Band 13_10M_QPSK_25_25_Back_10mm_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_210625 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 41.301$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 782 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x111x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.372 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 19.57 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.423 W/kg
SAR(1 g) = 0.275 W/kg ; SAR(10 g) = 0.178 W/kg
Maximum value of SAR (measured) = 0.360 W/kg

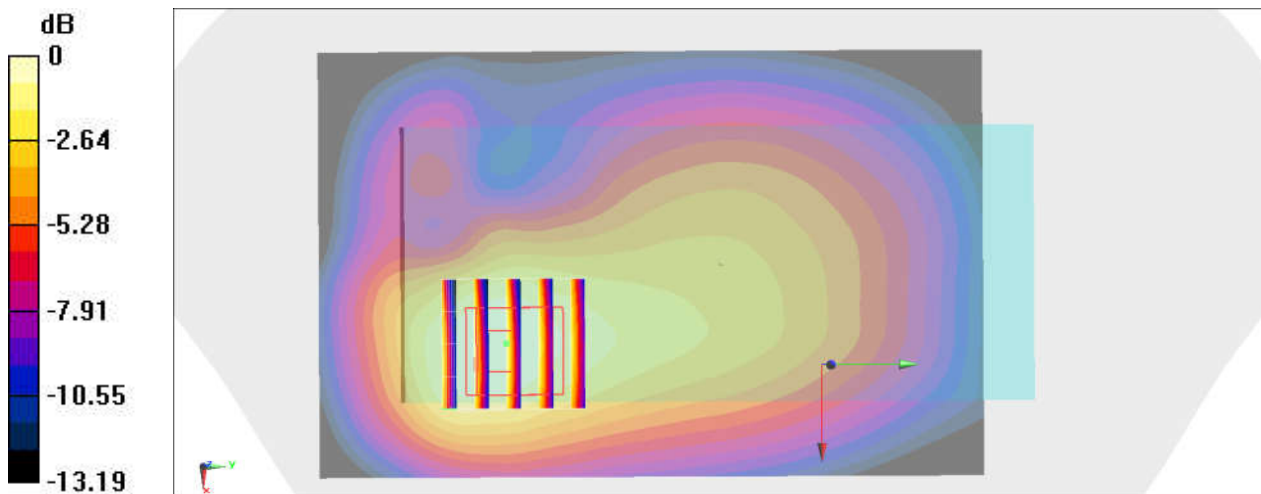

0 dB = 0.360 W/kg = -4.44 dBW/kg

#41_LTE Band 17_10M_QPSK_1_0_Back_10mm_Ch23790


Communication System: LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium: HSL_750_210625 Medium parameters used: $f = 710$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 41.552$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(10.52, 10.52, 10.52) @ 710 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.240 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.77 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.260 W/kg
SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.149 W/kg
Maximum value of SAR (measured) = 0.238 W/kg

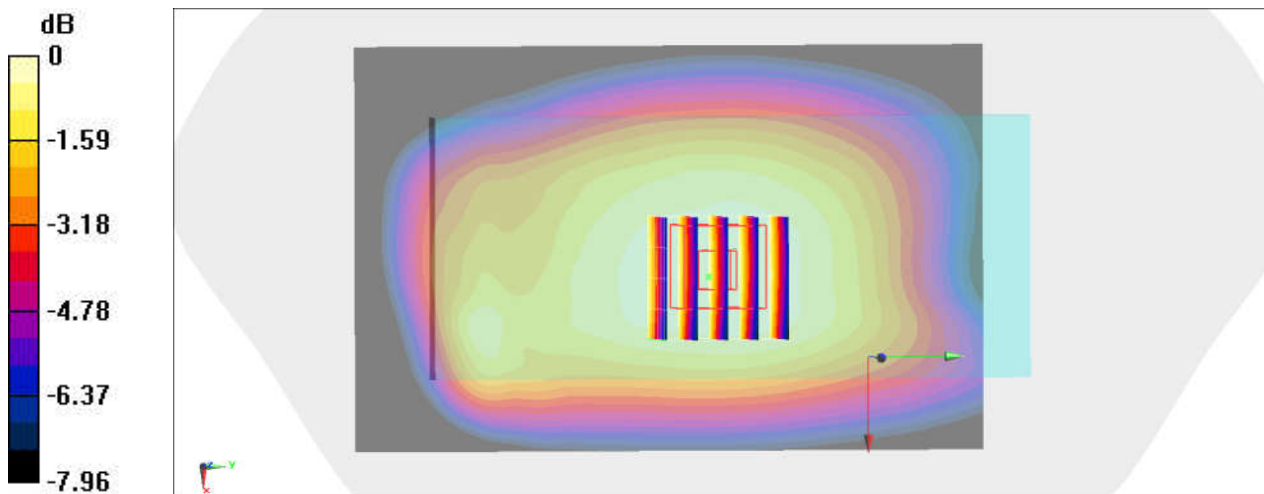

0 dB = 0.238 W/kg = -6.23 dBW/kg

#42_LTE Band 41_20M_QPSK_50_24_Back_10mm_Ch40620


Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_210624 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 39.18$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.46, 7.46, 7.46) @ 2593 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.240 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.35 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.077 W/kg
Maximum value of SAR (measured) = 0.246 W/kg

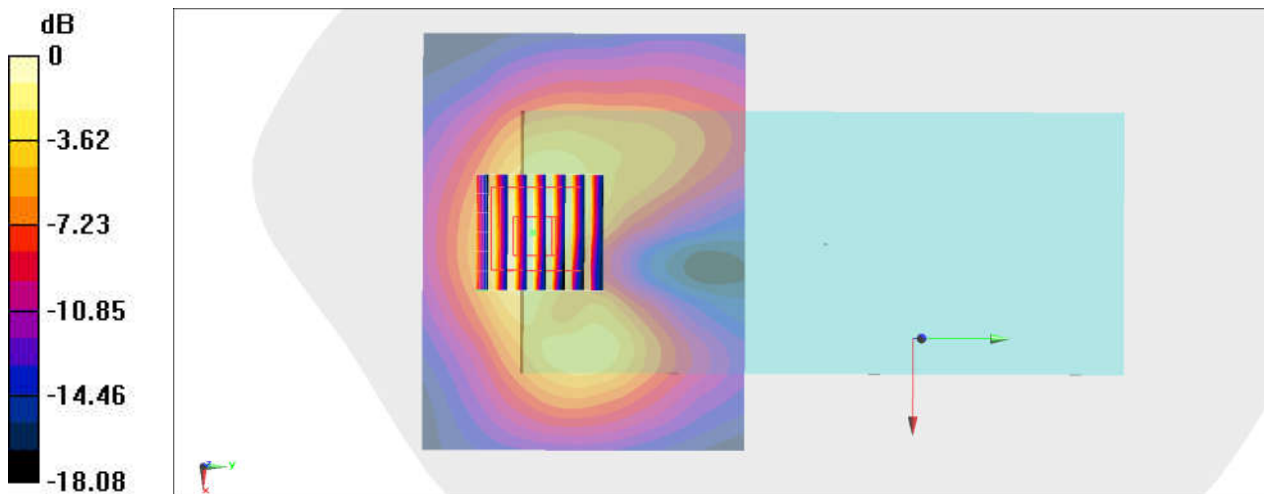

0 dB = 0.246 W/kg = -6.09 dBW/kg

#43_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch11;Chain 0

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.018

Medium: HSL_2450_210628 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.807 \text{ S/m}$; $\epsilon_r = 38.69$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2462 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (91x151x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.331 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.915 V/m ; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.207 W/kg ; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

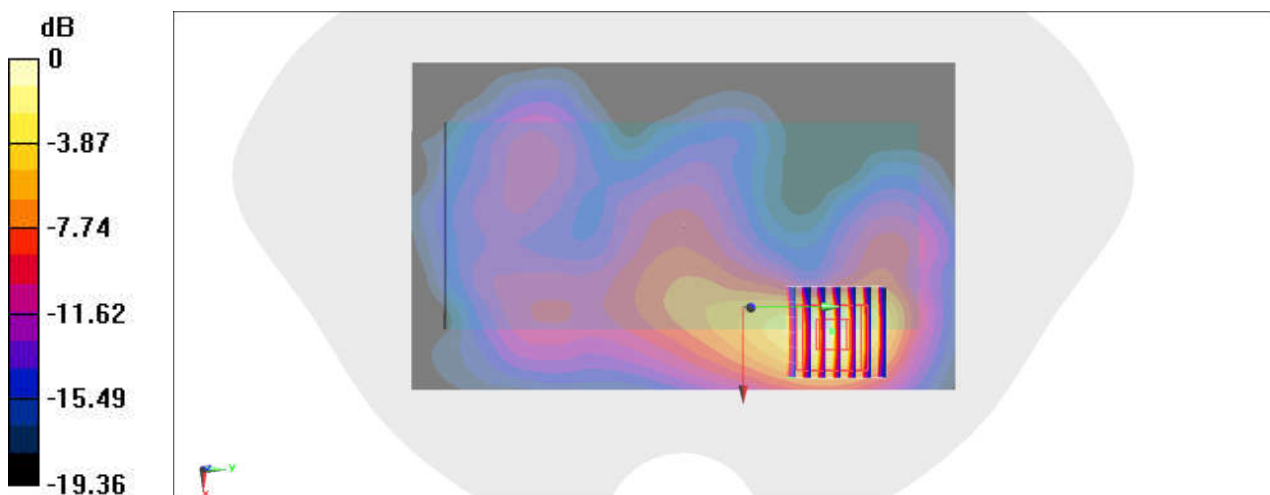

0 dB = 0.333 W/kg = -4.78 dBW/kg

#44_WLAN5GHz_802.11ac-VHT160 MCS0_Back_10mm_Ch50;Chain 0

Communication System: 802.11ac ; Frequency: 5250 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.715$ S/m; $\epsilon_r = 36.916$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.54, 5.54, 5.54) @ 5250 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0784 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.235 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

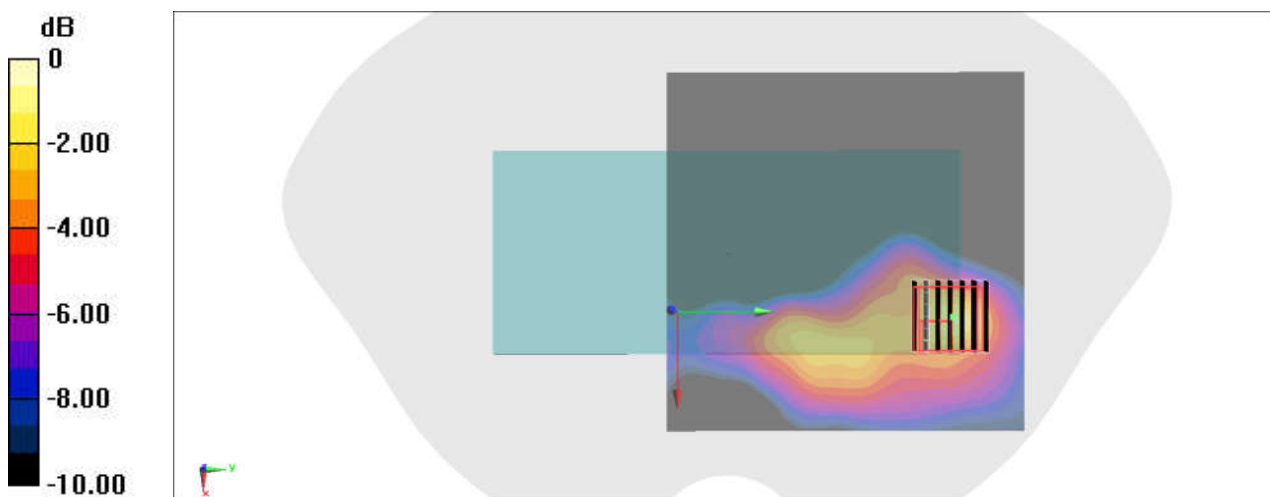

0 dB = 0.105 W/kg = -9.79 dBW/kg

#45_WLAN5GHz_802.11ac-VHT160 MCS0_Back_10mm_Ch114;Chain 1

Communication System: 802.11ac ; Frequency: 5570 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used : $f = 5570$ MHz; $\sigma = 5.069$ S/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.02, 5.02, 5.02) @ 5570 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0818 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.690 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

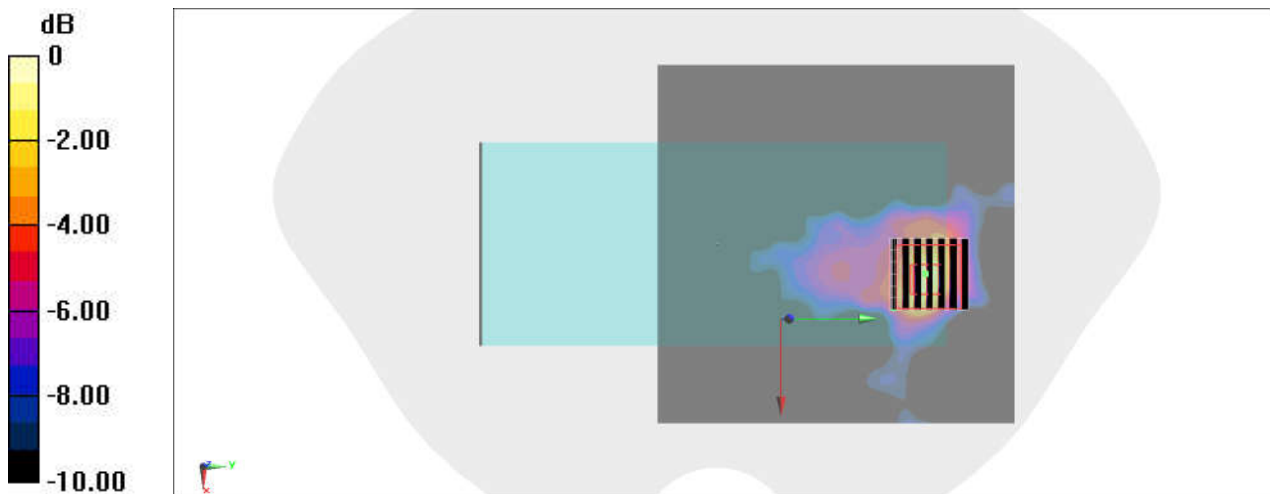

0 dB = 0.0949 W/kg = -10.23 dBW/kg

#46_WLAN5GHz_802.11ac-VHT80 MCS0_Back_10mm_Ch155;Chain 1


Communication System: 802.11ac; Frequency: 5775 MHz; Duty Cycle: 1:1.003
Medium: HSL_5G_210629 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.303$ S/m; $\epsilon_r = 36.109$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.15, 5.15, 5.15) @ 5775 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (111x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.0820 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.553 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.132 W/kg
SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.010 W/kg
Maximum value of SAR (measured) = 0.0884 W/kg

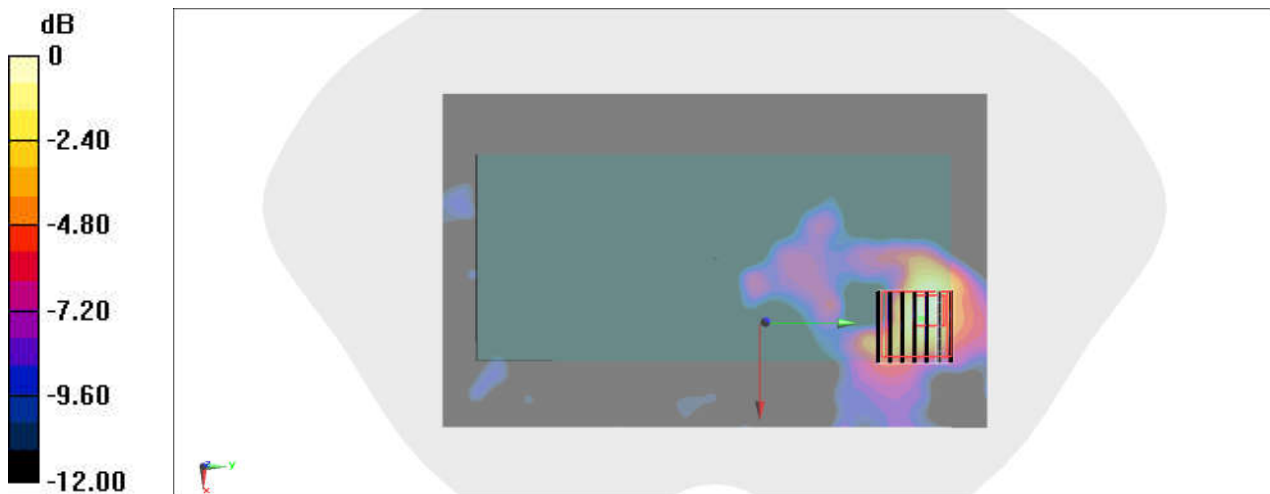

0 dB = 0.0884 W/kg = -10.54 dBW/kg


#47_Bluetooth_1Mbps_Back_10mm_Ch78;Chain 0

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.302
Medium: HSL_2450_210628 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 38.743$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

- DASY5 Configuration:
- Probe: EX3DV4 - SN7351; ConvF(7.66, 7.66, 7.66) @ 2480 MHz; Calibrated: 2020/7/6
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
 - Phantom: Twin-SAM V8.0 (30deg probe tilt)_Left; Type: QD 000 P41 Ax; Serial: 1303
 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (101x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.140 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.292 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.173 W/kg
SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.039 W/kg
Maximum value of SAR (measured) = 0.140 W/kg

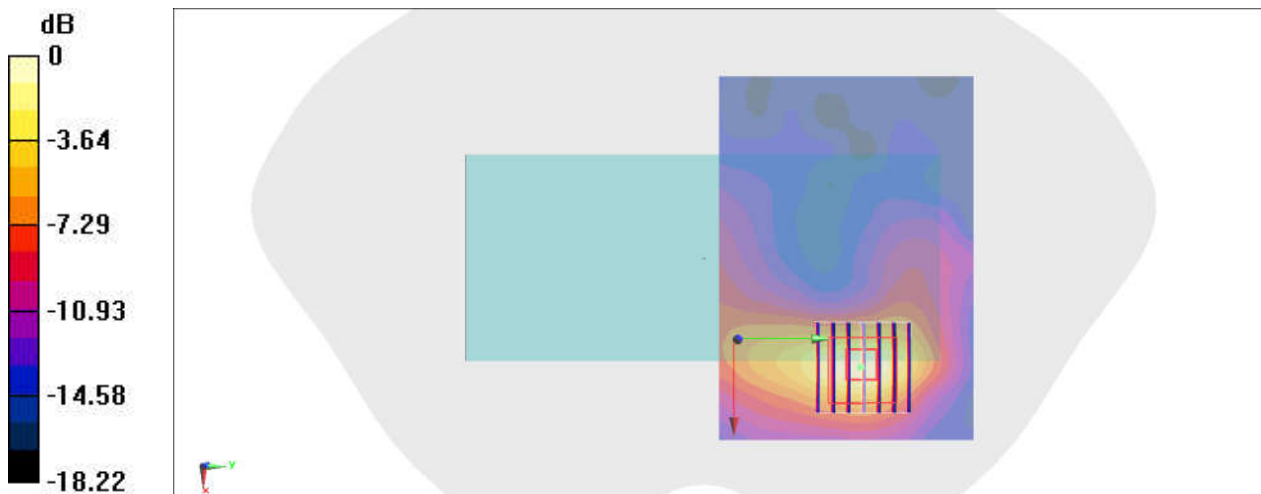

0 dB = 0.140 W/kg = -8.54 dBW/kg

#48_WLAN5GHz_802.11ac-VHT160 MCS0_Back_0mm_Ch50;Chain 1

Communication System: 802.11ac ; Frequency: 5250 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210626 Medium parameters used : $f = 5250$ MHz; $\sigma = 4.801$ S/m; $\epsilon_r = 37.002$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(5.23, 5.23, 5.23) @ 5250 MHz; Calibrated: 2021/2/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2021/5/21
- Phantom: SAM_Left; Type: QD000P40CB; Serial: S/N:1488
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.439 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.34 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 6.31 W/kg

SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

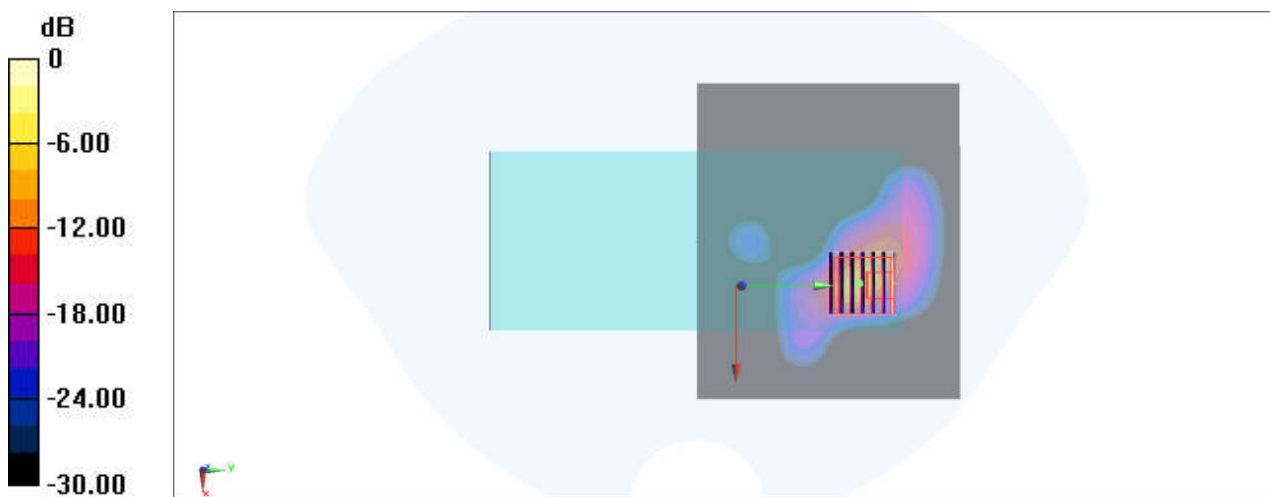

0 dB = 3.10 W/kg = 4.91 dBW/kg

#49_WLAN5GHz_802.11ac-VHT160 MCS0_Back_0mm_Ch114;Chain 1

Communication System: 802.11ac ; Frequency: 5570 MHz;Duty Cycle: 1:1.003

Medium: HSL_5G_210629 Medium parameters used: $f = 5570$ MHz; $\sigma = 5.069$ S/m; $\epsilon_r = 36.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.02, 5.02, 5.02) @ 5570 MHz; Calibrated: 2020/7/6
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2021/1/19
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Type: QD 000 P41 Ax; Serial: 1919
- Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7483)

Area Scan (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.25 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.155 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 5.14 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.184 W/kg

Maximum value of SAR (measured) = 2.61 W/kg

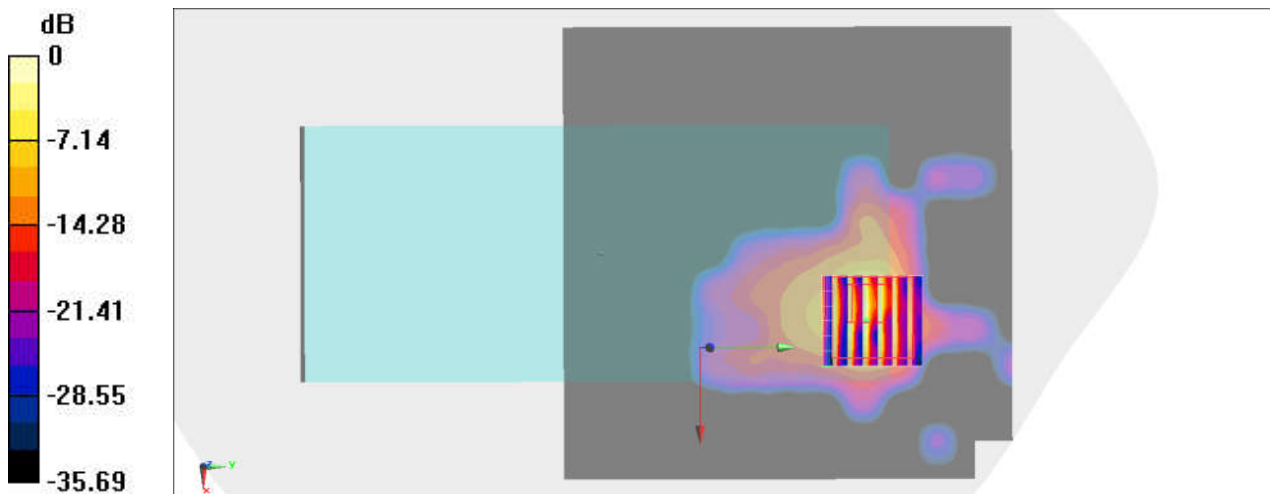

0 dB = 2.61 W/kg = 4.17 dBW/kg