



FCC RADIO TEST REPORT

FCC ID : PY7-81713C
 Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, NFC, FM receiver and GNSS
 Brand Name : SONY
 Applicant : Sony Corporation
 1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
 Manufacturer : Sony Corporation
 1-7-1 Konan Minato-ku Tokyo, 108-0076 Japan
 Standard : FCC 47 CFR Part 2, 22(H), 27(H)
 Test Date(s) : Dec. 17, 2021 ~ Dec. 28, 2021

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
 People's Republic of China**



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Product Feature of Equipment Under Test.....5

 1.2 Modification of EUT5

 1.3 Emission Designator.....5

 1.4 Testing Location6

 1.5 Applicable Standards.....6

2 Test Configuration of Equipment Under Test7

 2.1 Test Mode.....7

 2.2 Connection Diagram of Test System.....8

 2.3 Support Unit used in test configuration and system8

 2.4 Measurement Results Explanation Example.....8

 2.5 Frequency List of Low/Middle/High Channels9

3 Conducted Test Items.....10

 3.1 Measuring Instruments10

 3.2 Conducted Output Power and ERP/EIRP11

 3.3 Peak-to-Average Ratio12

 3.4 Occupied Bandwidth.....13

 3.5 Conducted Band Edge14

 3.6 Conducted Spurious Emission15

 3.7 Frequency Stability16

4 Radiated Test Items17

 4.1 Measuring Instruments17

 4.2 Radiated Spurious Emission Measurement19

5 List of Measuring Equipment.....20

6 Uncertainty of Evaluation.....21

Appendix A. Test Results of Conducted Test

Appendix B. Test Results of Radiated Test



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (Band 5)	Pass	-
	§27.50(c)(10)	Effective Radiated Power (Band 12)		
3.3	§27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917(a) §27.53(g)	Conducted Band Edge Measurement (Band 5) (Band 12)	Pass	-
3.6	§2.1051 §22.917(a) §27.53(g)	Conducted Spurious Emission (Band 5) (Band 12)	Pass	-
3.7	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917(a) §27.53(g)	Radiated Spurious Emission (Band 5) (Band 12)	Pass	Under limit 41.99 dB at 2473.770 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, FM Receiver, and GNSS

Product Specification subjective to this standard	
Antenna Type	PIFA Antenna
Antenna Gain	LTE Band 5: -1.3dBi LTE Band 12: -1.8dBi

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

EUT Information List			
HW Version	SW Version	IMEI Code	Performed Test Item
A	0.386	00440253133924	Conducted Measurement
		004402543133387	Radiated Spurious Emission
		004402543133387	ERP/EIRP Test

Note: For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Emission Designator

LTE Band 5		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.1016	1M10G7D	0.0839	1M10W7D
3	825.5 ~ 847.5	0.1009	2M74G7D	0.0845	2M73W7D
5	826.5 ~ 846.5	0.0998	4M51G7D	0.0826	4M51W7D
10	829.0 ~ 844.0	0.1019	9M05G7D	0.0857	9M05W7D
LTE Band 12		QPSK		16QAM/64QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	699.7 ~ 715.3	0.0910	1M09G7D	0.0745	1M10W7D
3	700.5 ~ 714.5	0.0916	2M72G7D	0.0738	2M73W7D
5	701.5 ~ 713.5	0.0916	4M50G7D	0.0748	4M51W7D
10	704.0 ~ 711.0	0.0918	9M05G7D	0.0757	9M05W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.



1.4 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-SZ	CN1256	421272

Test data subcontracted: conducted test items in section 4 of this report.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Y,X plane as worst plane.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	5				v	-	-	v	v	v			v		v	
	12				v	-	-	v	v	v			v		v	
26dB and 99% Bandwidth	5	v	v	v	v	-	-	v	v	v			v	v	v	v
	12	v	v	v	v	-	-	v	v	v			v	v	v	v
Conducted Band Edge	5	v	v	v	v	-	-	v	v	v	v		v			v
	12	v	v	v	v	-	-	v	v	v	v		v			v
Conducted Spurious Emission	5	v	v	v	v	-	-	v			v			v	v	v
	12	v	v	v	v	-	-	v			v			v	v	v
Frequency Stability	5				v	-	-	v					v		v	
	12				v	-	-	v					v		v	
E.R.P / E.I.R.P	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	5	Worst Case											v	v	v	
	12	Worst Case											v	v	v	
Remark	<ol style="list-style-type: none"> The mark "v" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 															

2.2 Connection Diagram of Test System

<EUT With Accessory>

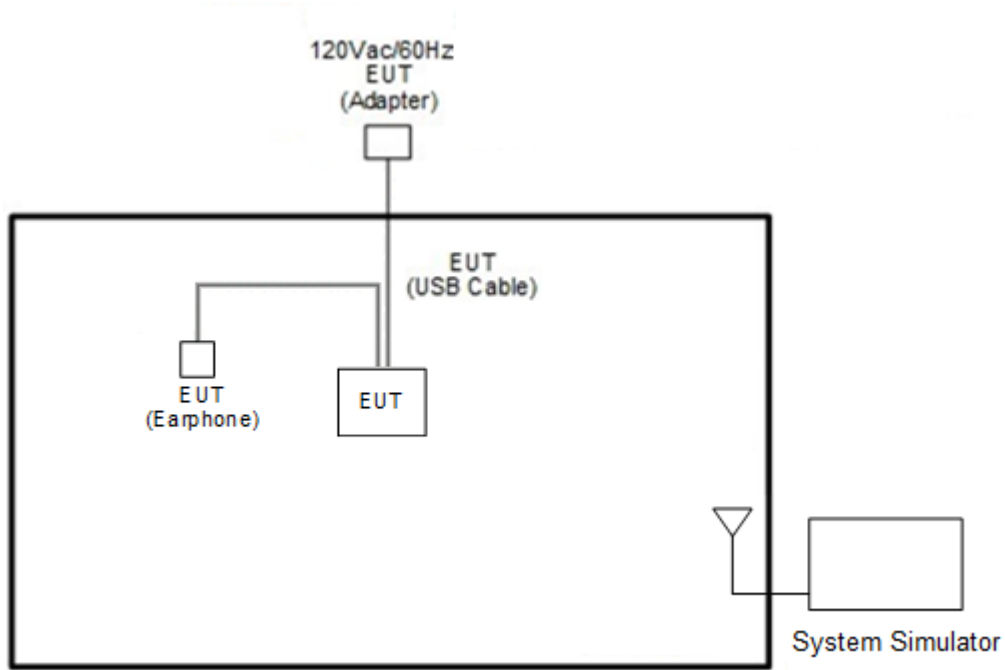

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$Offset = RF\ cable\ loss.$

Following shows an offset computation example with cable loss 4.7 dB.

Example :

$$Offset(dB) = RF\ cable\ loss(dB).$$

$$= 4.7 (dB)$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

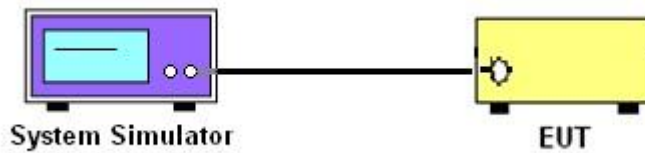

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

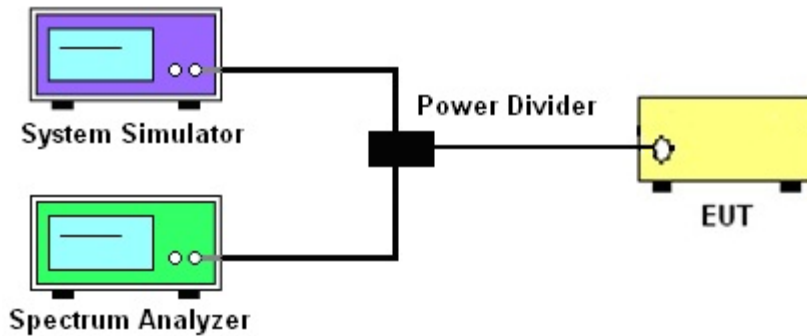

3.1.4 Frequency Stability

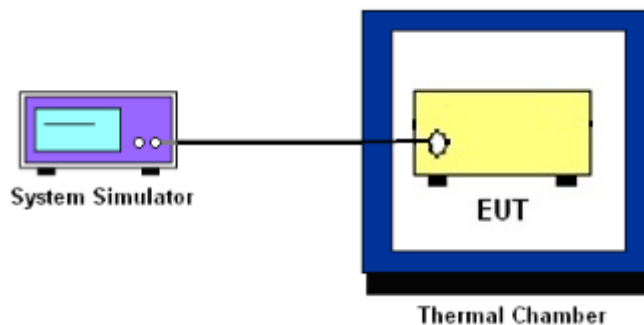

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup


For radiated test below 30MHz

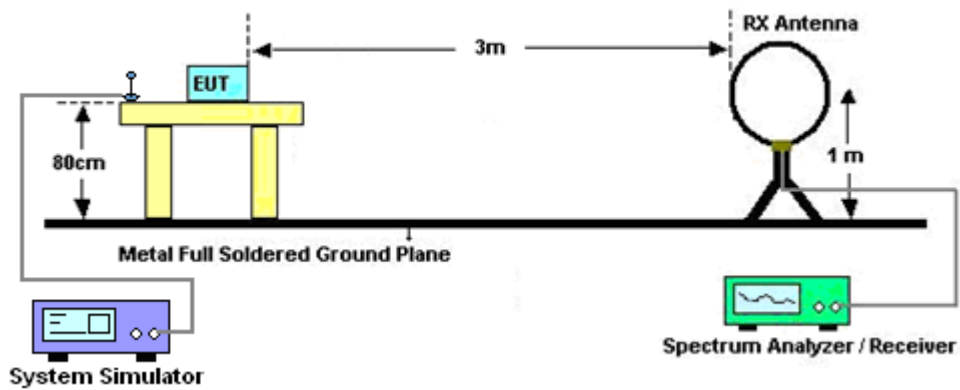

For radiated test from 30MHz to 1GHz

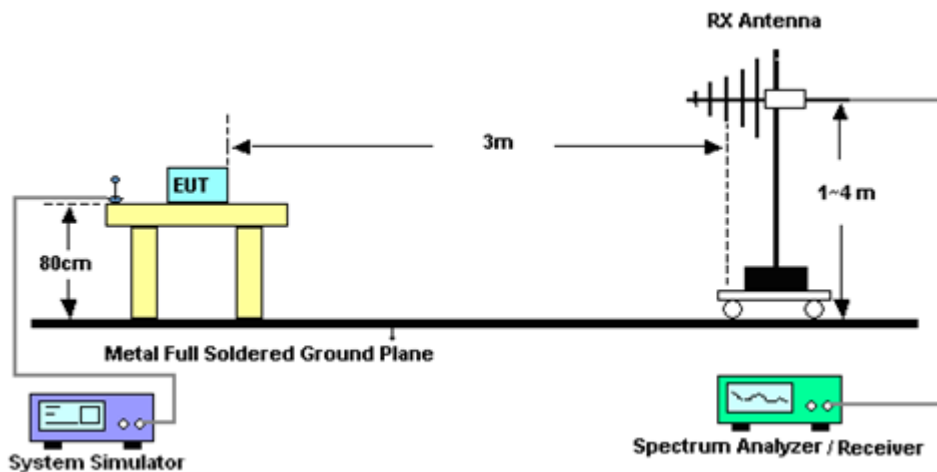

For radiated test above 1GHz

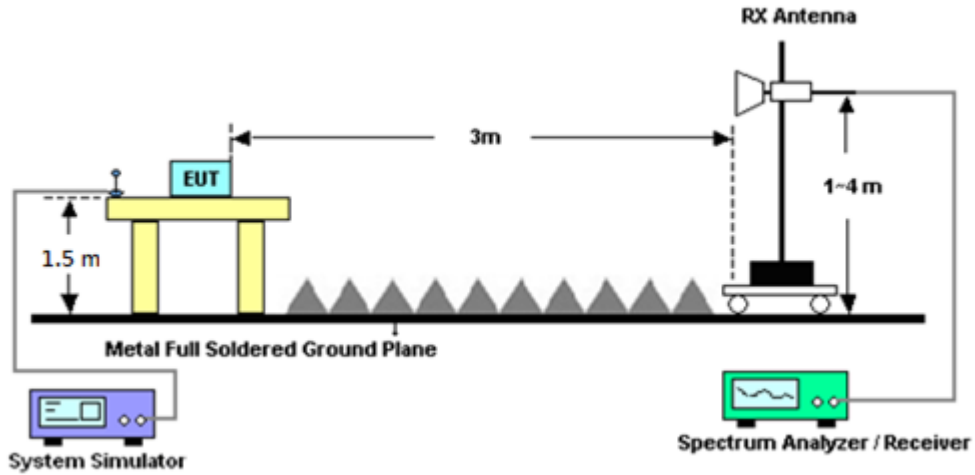

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

4.2.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$

$ERP \text{ (dBm)} = EIRP - 2.15$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Dec. 17, 2021~ Dec. 28, 2021	Oct. 13, 2022	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2021	Dec. 17, 2021~ Dec. 28, 2021	Aug. 25, 2022	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 12, 2021	Dec. 17, 2021~ Dec. 28, 2021	Jul. 11, 2022	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 22,2021	Dec. 28, 2021	Oct. 21,2022	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 20, 2021	Dec. 28, 2021	Jul. 19, 2022	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Dec. 28, 2021	Jun. 21, 2022	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Oct. 22,2021	Dec. 28, 2021	Oct. 21,2022	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Jul. 15, 2021	Dec. 28, 2021	Jul. 14, 2022	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 25, 2021	Dec. 28, 2021	Jul. 24, 2022	Radiation (03CH04-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 22,2021	Dec. 28, 2021	Oct. 21,2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 22,2021	Dec. 28, 2021	Oct. 21,2022	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 20. 2021	Dec. 28, 2021	Jul. 19. 2022	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY53270156	500MHz~26.5GHz	Oct. 22,2021	Dec. 28, 2021	Oct. 21,2022	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Dec. 28, 2021	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 28, 2021	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 28, 2021	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) and ERP/EIRP

LTE Band 5:

BW [MHz]	Modulation	RB Size	RB Offset	Power	Power	Power	ERP(W)		
				Low	Middle	High			
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.			
Channel				20450	20525	20600			
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	23.51	23.53	23.41	0.1014	0.1019	0.0991
10	QPSK	1	25	23.38	23.43	23.36	0.0984	0.0995	0.0979
10	QPSK	1	49	23.42	23.46	23.34	0.0993	0.1002	0.0975
10	QPSK	25	0	22.51	22.61	22.50	0.0805	0.0824	0.0804
10	QPSK	25	12	22.58	22.53	22.44	0.0818	0.0809	0.0793
10	QPSK	25	25	22.40	22.51	22.50	0.0785	0.0805	0.0804
10	QPSK	50	0	22.47	22.57	22.45	0.0798	0.0817	0.0794
10	16QAM	1	0	22.62	22.72	22.78	0.0826	0.0845	0.0857
10	16QAM	1	25	22.71	22.71	22.69	0.0843	0.0843	0.0839
10	16QAM	1	49	22.50	22.59	22.68	0.0804	0.0820	0.0838
10	16QAM	25	0	21.62	21.54	21.46	0.0656	0.0644	0.0632
10	16QAM	25	12	21.54	21.47	21.46	0.0644	0.0634	0.0632
10	16QAM	25	25	21.41	21.50	21.48	0.0625	0.0638	0.0635
10	16QAM	50	0	21.46	21.55	21.63	0.0632	0.0646	0.0658
10	64QAM	1	0	21.64	21.54	21.48	0.0659	0.0644	0.0635
10	64QAM	1	25	21.54	21.62	21.56	0.0644	0.0656	0.0647
10	64QAM	1	49	21.73	21.66	21.75	0.0673	0.0662	0.0676
10	64QAM	25	0	20.62	20.56	20.58	0.0521	0.0514	0.0516
10	64QAM	25	12	20.60	20.57	20.53	0.0519	0.0515	0.0511
10	64QAM	25	25	20.52	20.62	20.54	0.0509	0.0521	0.0512
10	64QAM	50	0	20.45	20.43	20.43	0.0501	0.0499	0.0499
Channel				20425	20525	20625	ERP(W)		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	23.38	23.44	23.22	0.0984	0.0998	0.0948
5	QPSK	1	12	23.31	23.44	23.33	0.0968	0.0998	0.0973



5	QPSK	1	24	23.35	23.30	23.14	0.0977	0.0966	0.0931
5	QPSK	12	0	22.42	22.52	22.33	0.0789	0.0807	0.0773
5	QPSK	12	7	22.56	22.51	22.29	0.0815	0.0805	0.0766
5	QPSK	12	13	22.19	22.45	22.52	0.0748	0.0794	0.0807
5	QPSK	25	0	22.26	22.23	22.35	0.0760	0.0755	0.0776
5	16QAM	1	0	22.60	22.51	22.60	0.0822	0.0805	0.0822
5	16QAM	1	12	22.57	22.62	22.52	0.0817	0.0826	0.0807
5	16QAM	1	24	22.33	22.55	22.57	0.0773	0.0813	0.0817
5	16QAM	12	0	21.64	21.45	21.42	0.0659	0.0631	0.0627
5	16QAM	12	7	21.51	21.28	21.33	0.0640	0.0607	0.0614
5	16QAM	12	13	21.43	21.44	21.33	0.0628	0.0630	0.0614
5	16QAM	25	0	21.33	21.37	21.61	0.0614	0.0619	0.0655
5	64QAM	1	0	21.62	21.46	21.29	0.0656	0.0632	0.0608
5	64QAM	1	12	21.45	21.51	21.45	0.0631	0.0640	0.0631
5	64QAM	1	24	21.75	21.50	21.65	0.0676	0.0638	0.0661
5	64QAM	12	0	20.53	20.43	20.44	0.0511	0.0499	0.0500
5	64QAM	12	7	20.51	20.50	20.35	0.0508	0.0507	0.0490
5	64QAM	12	13	20.44	20.61	20.38	0.0500	0.0520	0.0493
5	64QAM	25	0	20.31	20.37	20.42	0.0485	0.0492	0.0498
Channel				20415	20525	20635	ERP(W)		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	23.49	23.32	23.32	0.1009	0.0971	0.0971
3	QPSK	1	8	23.23	23.32	23.23	0.0951	0.0971	0.0951
3	QPSK	1	14	23.36	23.27	23.26	0.0979	0.0959	0.0957
3	QPSK	8	0	22.43	22.34	22.44	0.0791	0.0774	0.0793
3	QPSK	8	4	22.54	22.43	22.23	0.0811	0.0791	0.0755
3	QPSK	8	7	22.27	22.49	22.49	0.0762	0.0802	0.0802
3	QPSK	15	0	22.29	22.23	22.49	0.0766	0.0755	0.0802
3	16QAM	1	0	22.48	22.60	22.72	0.0800	0.0822	0.0845
3	16QAM	1	8	22.72	22.66	22.49	0.0845	0.0834	0.0802
3	16QAM	1	14	22.48	22.42	22.54	0.0800	0.0789	0.0811
3	16QAM	8	0	21.54	21.56	21.26	0.0644	0.0647	0.0604
3	16QAM	8	4	21.50	21.26	21.36	0.0638	0.0604	0.0618
3	16QAM	8	7	21.37	21.43	21.29	0.0619	0.0628	0.0608
3	16QAM	15	0	21.36	21.49	21.61	0.0618	0.0637	0.0655
3	64QAM	1	0	21.66	21.51	21.29	0.0662	0.0640	0.0608



3	64QAM	1	8	21.50	21.57	21.47	0.0638	0.0649	0.0634
3	64QAM	1	14	21.69	21.48	21.63	0.0667	0.0635	0.0658
3	64QAM	8	0	20.51	20.45	20.59	0.0508	0.0501	0.0518
3	64QAM	8	4	20.51	20.51	20.46	0.0508	0.0508	0.0502
3	64QAM	8	7	20.41	20.51	20.41	0.0497	0.0508	0.0497
3	64QAM	15	0	20.47	20.24	20.43	0.0504	0.0478	0.0499
Channel				20407	20525	20643	ERP(W)		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	23.52	23.46	23.30	0.1016	0.1002	0.0966
1.4	QPSK	1	3	23.23	23.28	23.33	0.0951	0.0962	0.0973
1.4	QPSK	1	5	23.42	23.30	23.23	0.0993	0.0966	0.0951
1.4	QPSK	3	0	23.19	23.31	23.17	0.0942	0.0968	0.0938
1.4	QPSK	3	1	23.16	23.26	23.18	0.0935	0.0957	0.0940
1.4	QPSK	3	3	23.15	23.24	23.15	0.0933	0.0953	0.0933
1.4	QPSK	6	0	22.45	22.33	22.50	0.0794	0.0773	0.0804
1.4	16QAM	1	0	22.49	22.50	22.40	0.0802	0.0804	0.0785
1.4	16QAM	1	3	22.38	22.42	22.39	0.0782	0.0789	0.0783
1.4	16QAM	1	5	22.43	22.25	22.55	0.0791	0.0759	0.0813
1.4	16QAM	3	0	22.44	22.62	22.64	0.0793	0.0826	0.0830
1.4	16QAM	3	1	22.52	22.69	22.50	0.0807	0.0839	0.0804
1.4	16QAM	3	3	22.44	22.48	22.69	0.0793	0.0800	0.0839
1.4	16QAM	6	0	21.56	21.36	21.26	0.0647	0.0618	0.0604
1.4	64QAM	1	0	21.47	21.31	21.28	0.0634	0.0611	0.0607
1.4	64QAM	1	3	21.28	21.33	21.28	0.0607	0.0614	0.0607
1.4	64QAM	1	5	21.43	21.40	21.52	0.0628	0.0624	0.0641
1.4	64QAM	3	0	21.49	21.40	21.29	0.0637	0.0624	0.0608
1.4	64QAM	3	1	21.48	21.51	21.48	0.0635	0.0640	0.0635
1.4	64QAM	3	3	21.67	21.51	21.57	0.0664	0.0640	0.0649
1.4	64QAM	6	0	20.42	20.37	20.54	0.0498	0.0492	0.0512



LTE Band 12:

BW [MHz]	Modulation	RB Size	RB Offset	Power	Power	Power	ERP(W)		
				Low	Middle	High			
Channel				23060	23095	23130			
Frequency (MHz)				704	707.5	711	L	M	H
10	QPSK	1	0	23.56	23.58	23.48	0.0914	0.0918	0.0897
10	QPSK	1	25	23.43	23.46	23.40	0.0887	0.0893	0.0881
10	QPSK	1	49	23.48	23.40	23.51	0.0897	0.0881	0.0904
10	QPSK	25	0	22.57	22.68	22.55	0.0728	0.0746	0.0724
10	QPSK	25	12	22.57	22.45	22.38	0.0728	0.0708	0.0697
10	QPSK	25	25	22.50	22.58	22.56	0.0716	0.0729	0.0726
10	QPSK	50	0	22.44	22.49	22.41	0.0706	0.0714	0.0701
10	16QAM	1	0	22.71	22.70	22.69	0.0752	0.0750	0.0748
10	16QAM	1	25	22.54	22.63	22.69	0.0723	0.0738	0.0748
10	16QAM	1	49	22.64	22.74	22.73	0.0740	0.0757	0.0755
10	16QAM	25	0	21.70	21.59	21.49	0.0596	0.0581	0.0568
10	16QAM	25	12	21.50	21.61	21.64	0.0569	0.0583	0.0587
10	16QAM	25	25	21.52	21.63	21.73	0.0571	0.0586	0.0600
10	16QAM	50	0	21.52	21.53	21.61	0.0571	0.0573	0.0583
10	64QAM	1	0	21.69	21.64	21.71	0.0594	0.0587	0.0597
10	64QAM	1	25	21.79	21.68	21.77	0.0608	0.0593	0.0605
10	64QAM	1	49	21.67	21.56	21.62	0.0592	0.0577	0.0585
10	64QAM	25	0	20.51	20.63	20.69	0.0453	0.0466	0.0472
10	64QAM	25	12	20.58	20.57	20.57	0.0460	0.0459	0.0459
10	64QAM	25	25	20.72	20.61	20.54	0.0475	0.0463	0.0456
10	64QAM	50	0	20.49	20.55	20.48	0.0451	0.0457	0.0450
Channel				23035	23095	23155	ERP(W)		
Frequency (MHz)				701.5	707.5	713.5	L	M	H
5	QPSK	1	0	23.57	23.49	23.37	0.0916	0.0899	0.0875
5	QPSK	1	12	23.30	23.28	23.27	0.0861	0.0857	0.0855
5	QPSK	1	24	23.32	23.41	23.40	0.0865	0.0883	0.0881
5	QPSK	12	0	22.46	22.41	22.38	0.0710	0.0701	0.0697
5	QPSK	12	7	22.58	22.29	22.30	0.0729	0.0682	0.0684
5	QPSK	12	13	22.40	22.41	22.51	0.0700	0.0701	0.0718
5	QPSK	25	0	22.30	22.31	22.23	0.0684	0.0685	0.0673



5	16QAM	1	0	22.64	22.62	22.59	0.0740	0.0736	0.0731
5	16QAM	1	12	22.40	22.46	22.62	0.0700	0.0710	0.0736
5	16QAM	1	24	22.56	22.57	22.69	0.0726	0.0728	0.0748
5	16QAM	12	0	21.49	21.40	21.36	0.0568	0.0556	0.0551
5	16QAM	12	7	21.49	21.45	21.63	0.0568	0.0562	0.0586
5	16QAM	12	13	21.38	21.52	21.62	0.0553	0.0571	0.0585
5	16QAM	25	0	21.36	21.39	21.40	0.0551	0.0555	0.0556
5	64QAM	1	0	21.65	21.61	21.71	0.0589	0.0583	0.0597
5	64QAM	1	12	21.78	21.70	21.60	0.0607	0.0596	0.0582
5	64QAM	1	24	21.68	21.43	21.49	0.0593	0.0560	0.0568
5	64QAM	12	0	20.33	20.63	20.59	0.0435	0.0466	0.0461
5	64QAM	12	7	20.58	20.59	20.47	0.0460	0.0461	0.0449
5	64QAM	12	13	20.56	20.59	20.37	0.0458	0.0461	0.0439
5	64QAM	25	0	20.48	20.41	20.35	0.0450	0.0443	0.0437
Channel				23025	23095	23165	ERP(W)		
Frequency (MHz)				700.5	707.5	714.5	L	M	H
3	QPSK	1	0	23.36	23.57	23.43	0.0873	0.0916	0.0887
3	QPSK	1	8	23.26	23.24	23.40	0.0853	0.0849	0.0881
3	QPSK	1	14	23.33	23.19	23.45	0.0867	0.0839	0.0891
3	QPSK	8	0	22.49	22.52	22.34	0.0714	0.0719	0.0690
3	QPSK	8	4	22.47	22.23	22.32	0.0711	0.0673	0.0687
3	QPSK	8	7	22.49	22.36	22.66	0.0714	0.0693	0.0743
3	QPSK	15	0	22.34	22.34	22.32	0.0690	0.0690	0.0687
3	16QAM	1	0	22.53	22.61	22.49	0.0721	0.0735	0.0714
3	16QAM	1	8	22.33	22.52	22.55	0.0689	0.0719	0.0724
3	16QAM	1	14	22.52	22.53	22.63	0.0719	0.0721	0.0738
3	16QAM	8	0	21.48	21.41	21.49	0.0566	0.0557	0.0568
3	16QAM	8	4	21.40	21.62	21.53	0.0556	0.0585	0.0573
3	16QAM	8	7	21.36	21.64	21.55	0.0551	0.0587	0.0575
3	16QAM	15	0	21.32	21.42	21.53	0.0546	0.0558	0.0573
3	64QAM	1	0	21.58	21.47	21.58	0.0579	0.0565	0.0579
3	64QAM	1	8	21.72	21.47	21.68	0.0598	0.0565	0.0593
3	64QAM	1	14	21.66	21.55	21.55	0.0590	0.0575	0.0575
3	64QAM	8	0	20.45	20.42	20.67	0.0447	0.0444	0.0470
3	64QAM	8	4	20.57	20.38	20.37	0.0459	0.0440	0.0439
3	64QAM	8	7	20.73	20.49	20.47	0.0476	0.0451	0.0449




3	64QAM	15	0	20.51	20.45	20.37	0.0453	0.0447	0.0439
Channel				23017	23095	23173	ERP(W)		
Frequency (MHz)				699.7	707.5	715.3	L	M	H
1.4	QPSK	1	0	23.48	23.46	23.28	0.0897	0.0893	0.0857
1.4	QPSK	1	3	23.27	23.36	23.38	0.0855	0.0873	0.0877
1.4	QPSK	1	5	23.41	23.24	23.31	0.0883	0.0849	0.0863
1.4	QPSK	3	0	23.54	23.33	23.38	0.0910	0.0867	0.0877
1.4	QPSK	3	1	23.30	23.24	23.21	0.0861	0.0849	0.0843
1.4	QPSK	3	3	23.30	23.42	23.26	0.0861	0.0885	0.0853
1.4	QPSK	6	0	22.49	22.53	22.48	0.0714	0.0721	0.0713
1.4	16QAM	1	0	22.49	22.27	22.18	0.0714	0.0679	0.0665
1.4	16QAM	1	3	22.30	22.49	22.67	0.0684	0.0714	0.0745
1.4	16QAM	1	5	22.27	22.33	22.32	0.0679	0.0689	0.0687
1.4	16QAM	3	0	22.61	22.53	22.48	0.0735	0.0721	0.0713
1.4	16QAM	3	1	22.39	22.54	22.56	0.0698	0.0723	0.0726
1.4	16QAM	3	3	22.44	22.57	22.64	0.0706	0.0728	0.0740
1.4	16QAM	6	0	21.63	21.50	21.42	0.0586	0.0569	0.0558
1.4	64QAM	1	0	21.28	21.55	21.43	0.0541	0.0575	0.0560
1.4	64QAM	1	3	21.51	21.64	21.53	0.0570	0.0587	0.0573
1.4	64QAM	1	5	21.40	21.48	21.62	0.0556	0.0566	0.0585
1.4	64QAM	3	0	21.66	21.56	21.63	0.0590	0.0577	0.0586
1.4	64QAM	3	1	21.61	21.51	21.67	0.0583	0.0570	0.0592
1.4	64QAM	3	3	21.58	21.39	21.50	0.0579	0.0555	0.0569
1.4	64QAM	6	0	20.49	20.53	20.69	0.0451	0.0455	0.0472



LTE Band 5

Peak-to-Average Ratio


Mode	LTE Band 5 / 10MHz			
Mod.	QPSK	16QAM	64QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Result
Middle CH	4.96	5.94	6.55	PASS

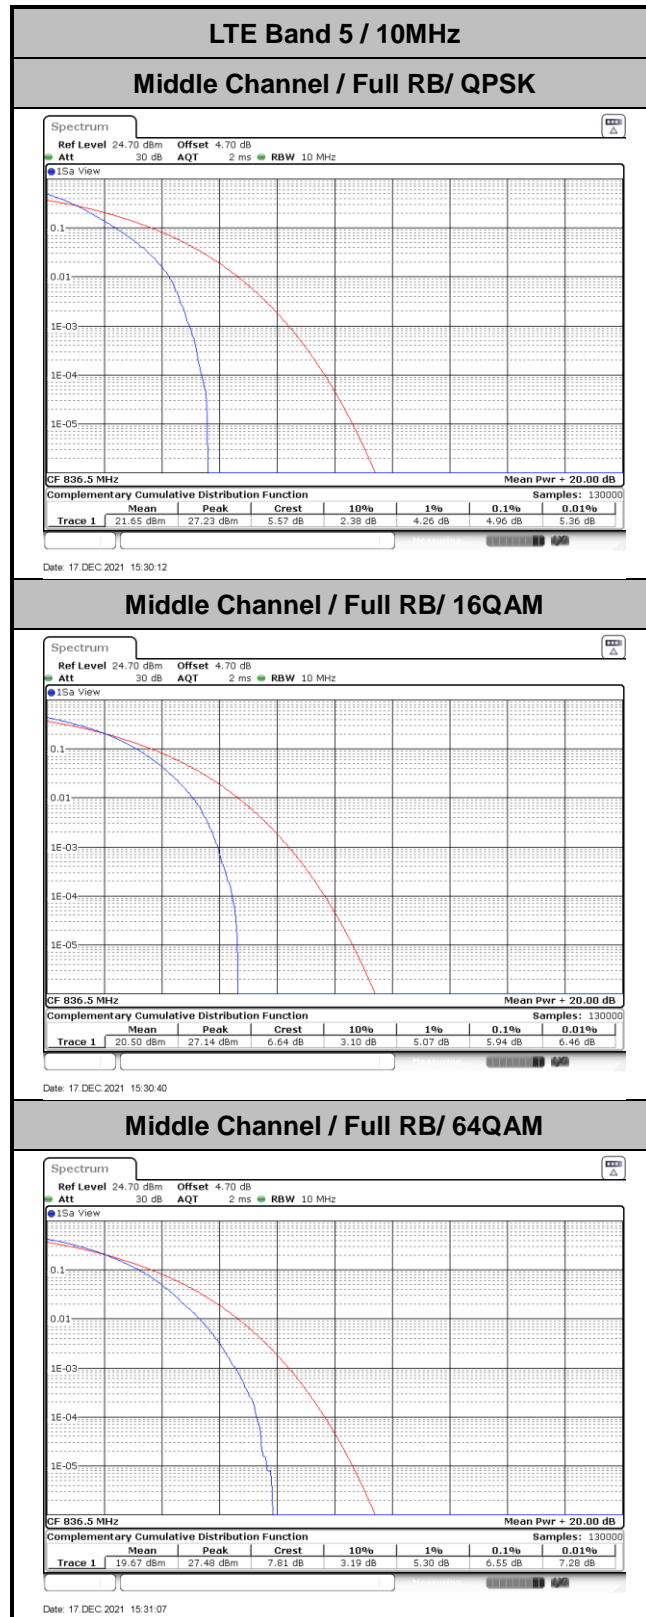



26dB Bandwidth


Mode	LTE Band 5 : 26dB BW(MHz)		
BW	1.4 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	1.22	1.22	1.23
Middle CH	1.23	1.22	1.23
Highest CH	1.22	1.22	1.21

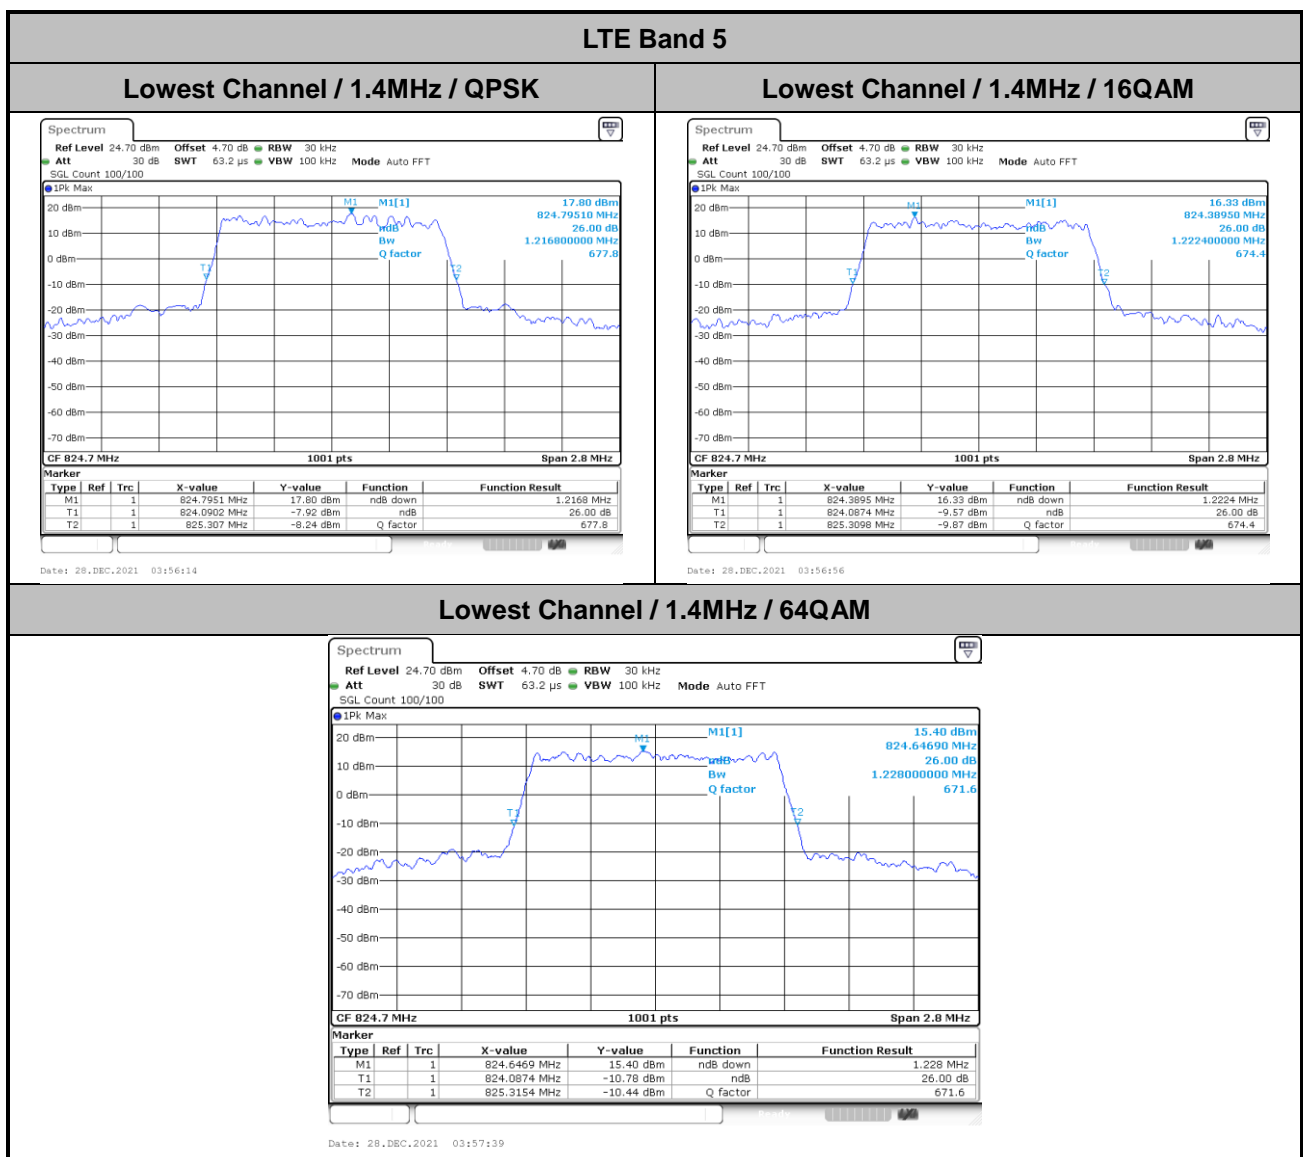




LTE Band 5

Middle Channel / 1.4MHz / QPSK

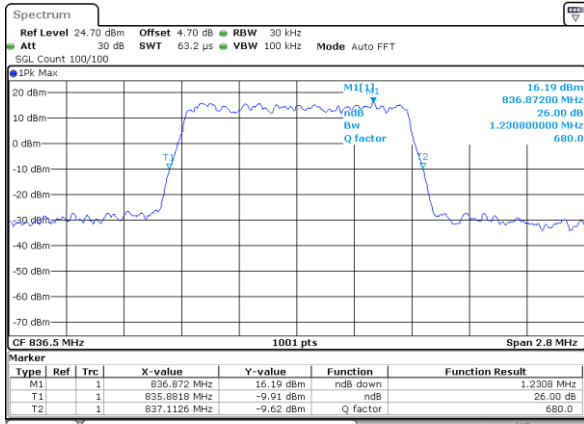


Date: 28.DEC.2021 03:58:23

Middle Channel / 1.4MHz / 16QAM

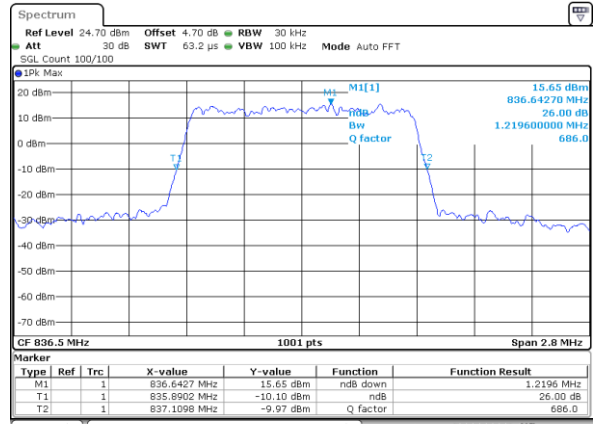

Date: 28.DEC.2021 03:59:03

Middle Channel / 1.4MHz / 64QAM

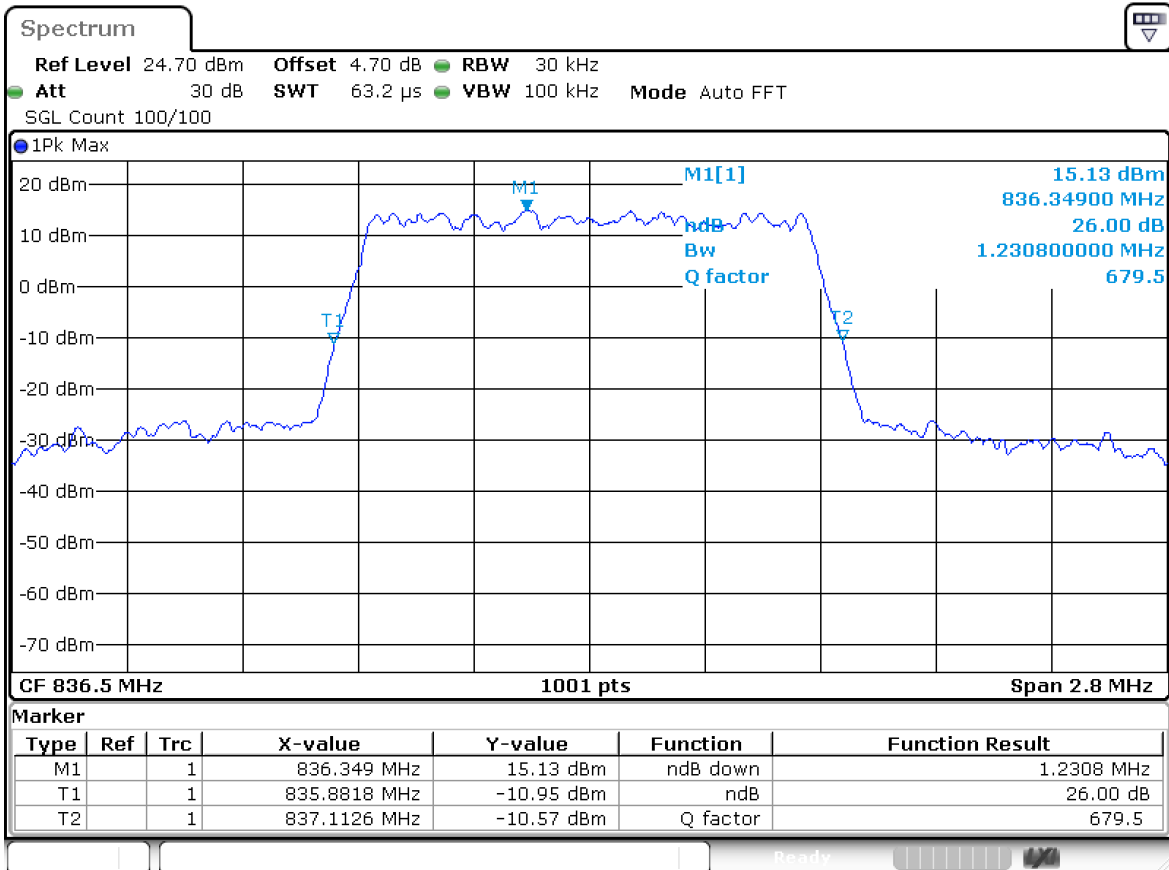


Date: 28.DEC.2021 03:59:45




LTE Band 5

Highest Channel / 1.4MHz / QPSK

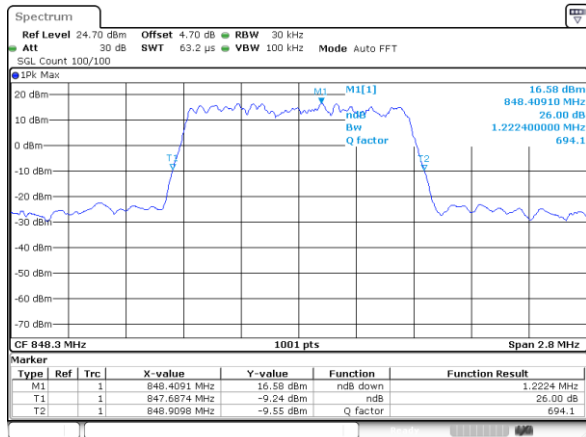


Date: 28. DEC. 2021 04:00:27

Highest Channel / 1.4MHz / 16QAM

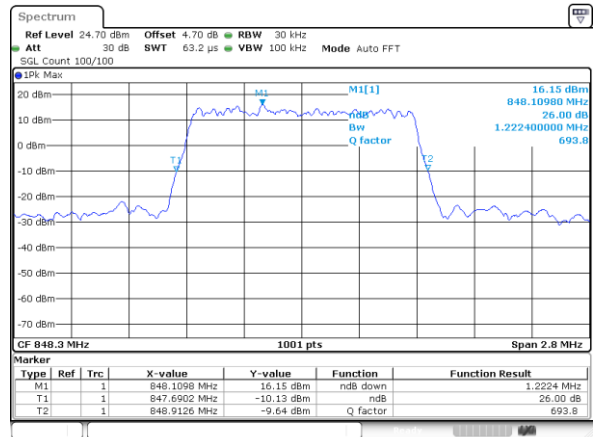

Date: 28. DEC. 2021 04:01:09

Highest Channel / 1.4MHz / 64QAM

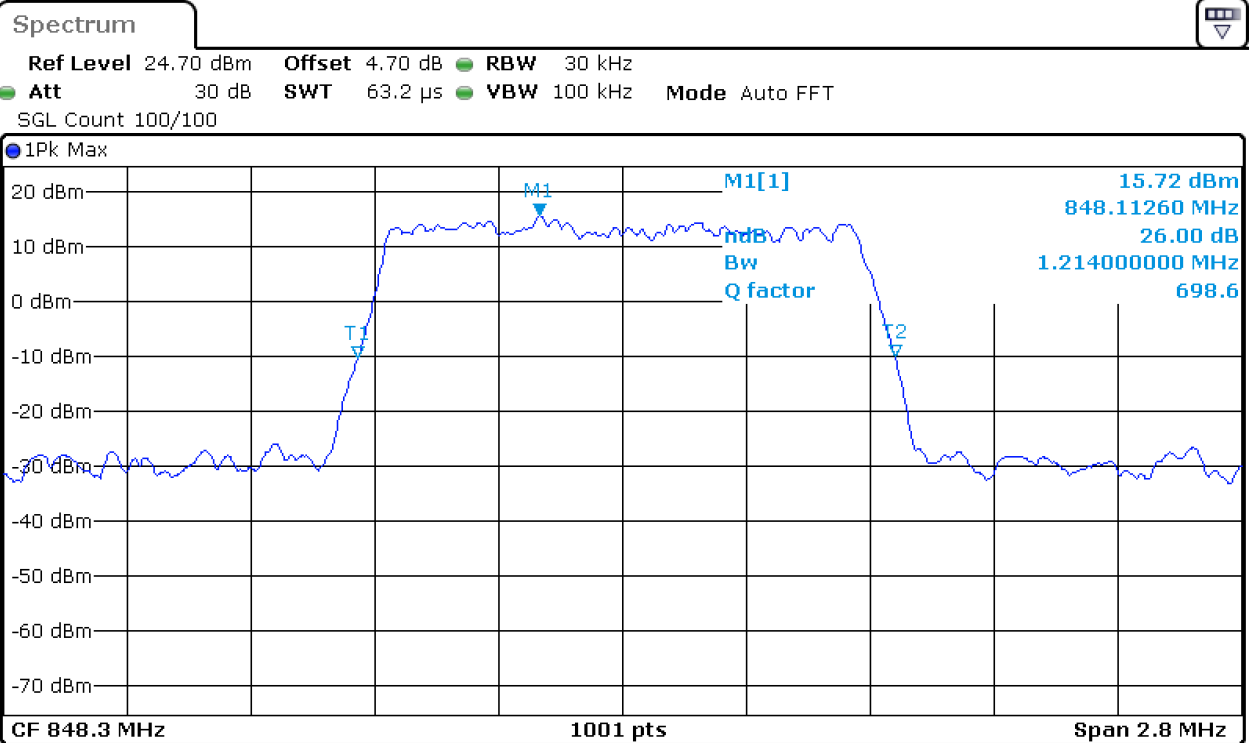


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		848.1126 MHz	15.72 dBm	ndB down	1.214 MHz
T1	1		847.7014 MHz	-10.03 dBm	ndB	26.00 dB
T2	1		848.9154 MHz	-9.87 dBm	Q factor	698.6

Date: 28. DEC. 2021 04:01:51




Mode	LTE Band 5 : 26dB BW(MHz)		
BW	3 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	3.05	3.01	3.03
Middle CH	3.00	3.03	3.05
Highest CH	3.02	3.00	2.99

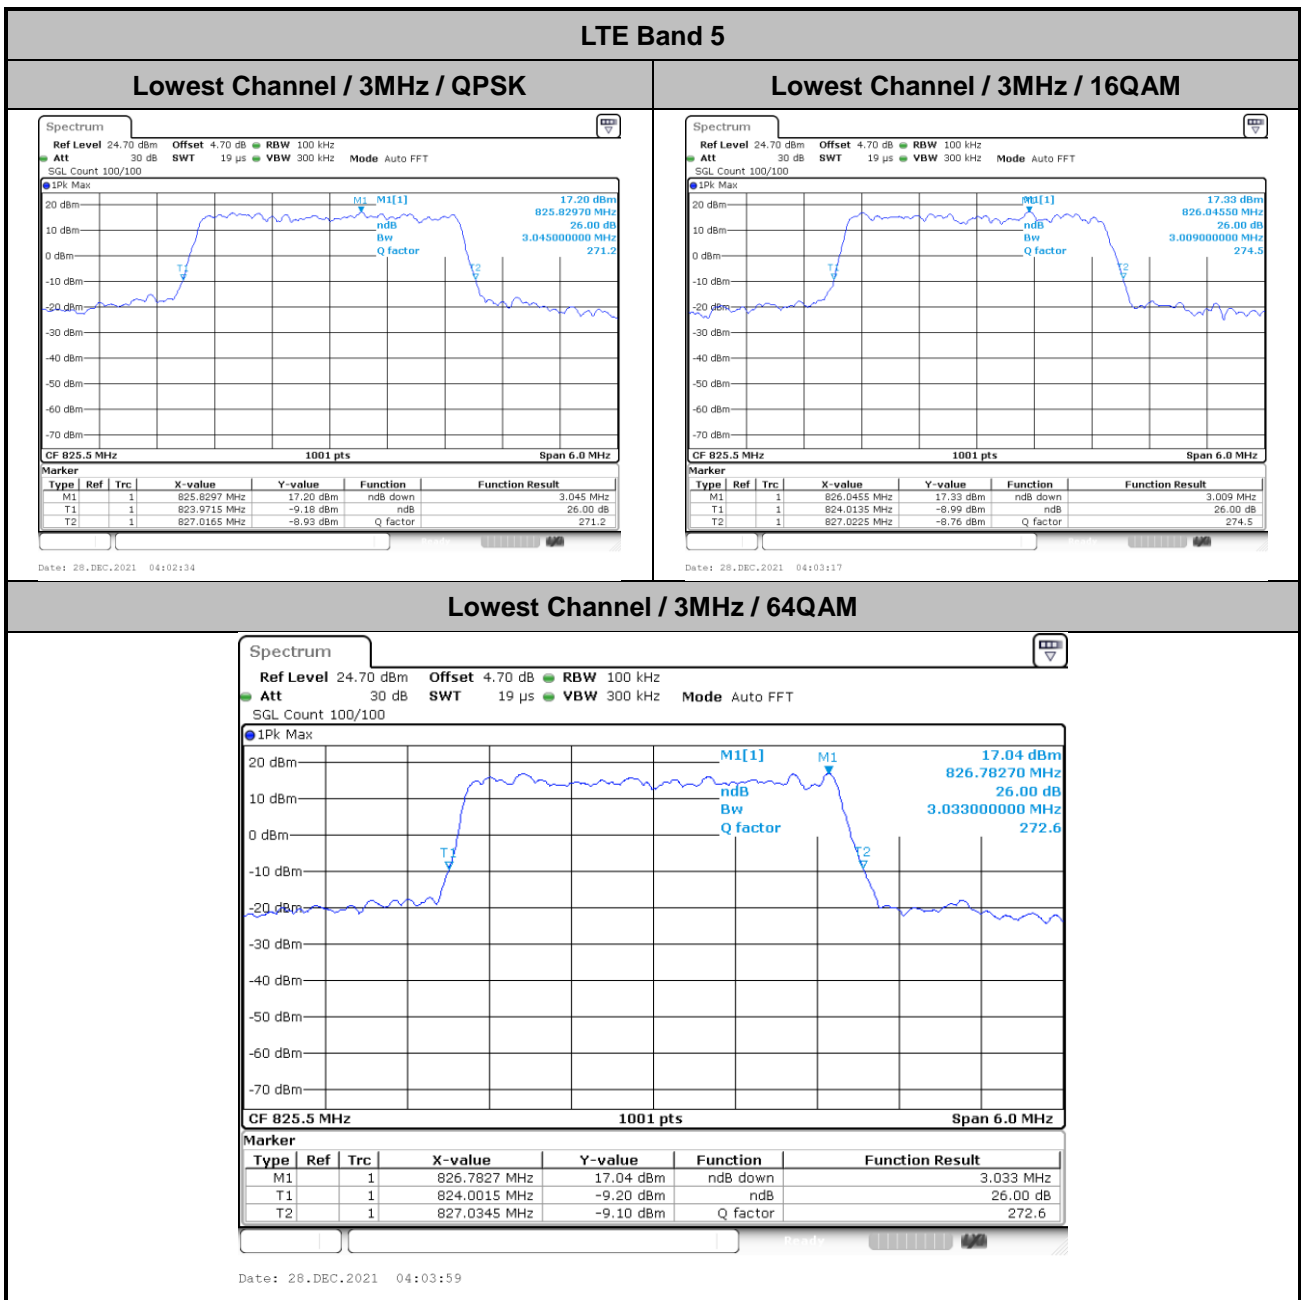




LTE Band 45

Middle Channel / 3MHz / QPSK

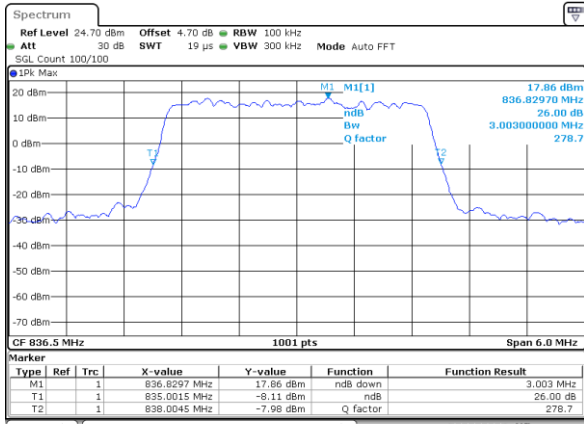


Date: 28.DEC.2021 04:04:43

Middle Channel / 3MHz / 16QAM

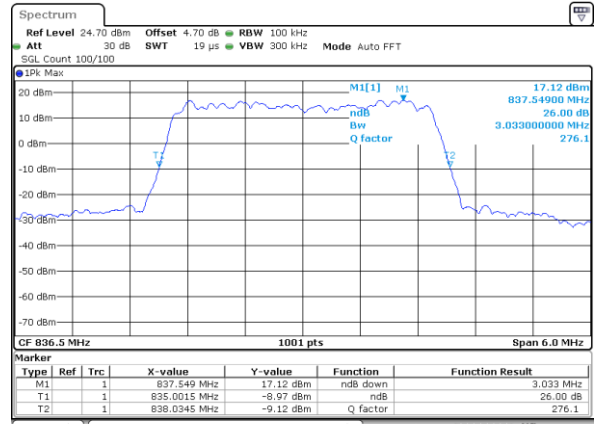

Date: 28.DEC.2021 04:05:23

Middle Channel / 3MHz / 64QAM

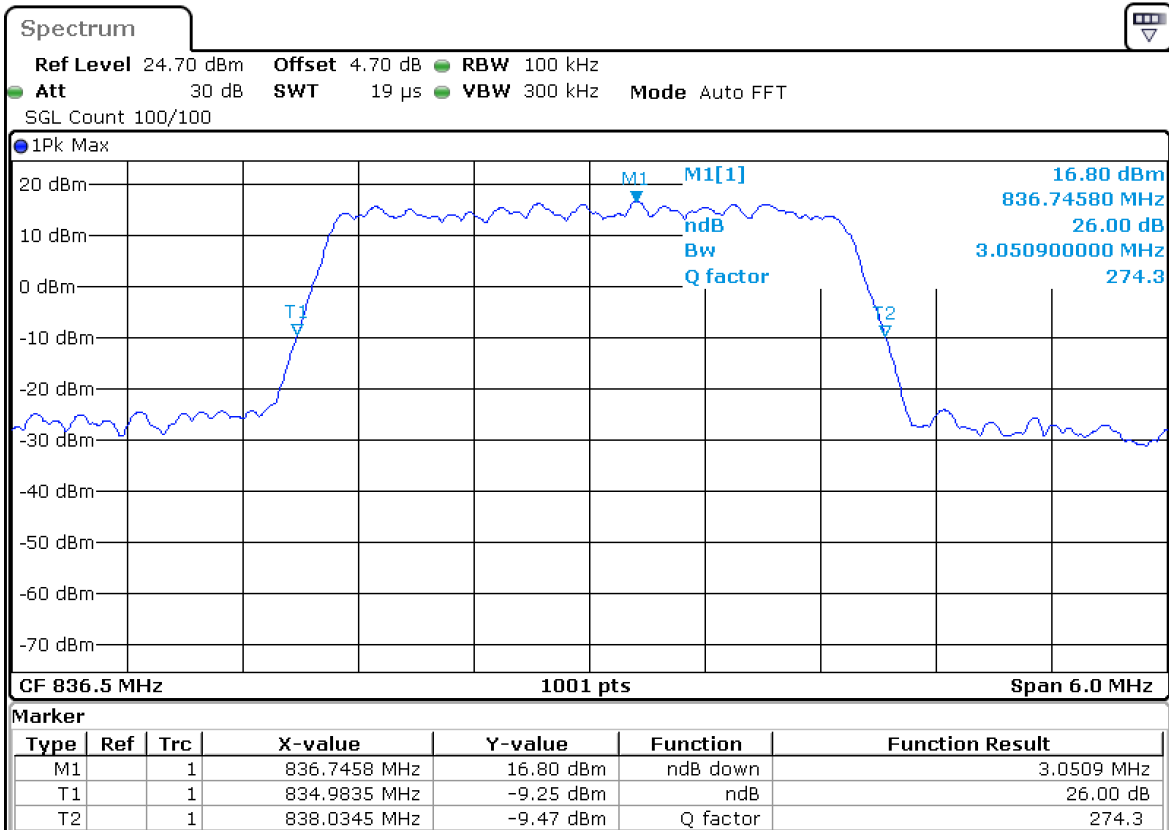


Date: 28.DEC.2021 04:06:05




LTE Band 5

Highest Channel / 3MHz / QPSK

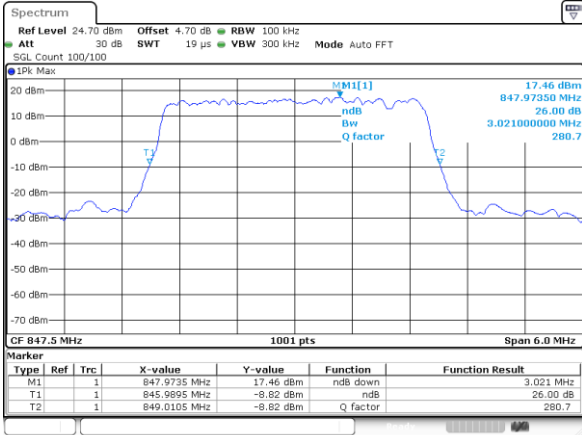


Date: 28.DEC.2021 04:06:48

Highest Channel / 3MHz / 16QAM

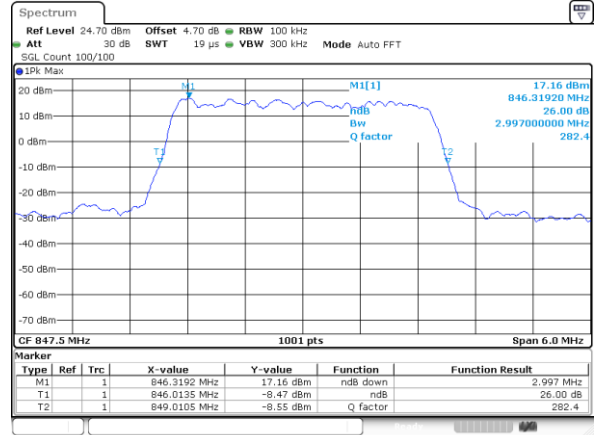

Date: 28.DEC.2021 04:07:30


Highest Channel / 3MHz / 64QAM

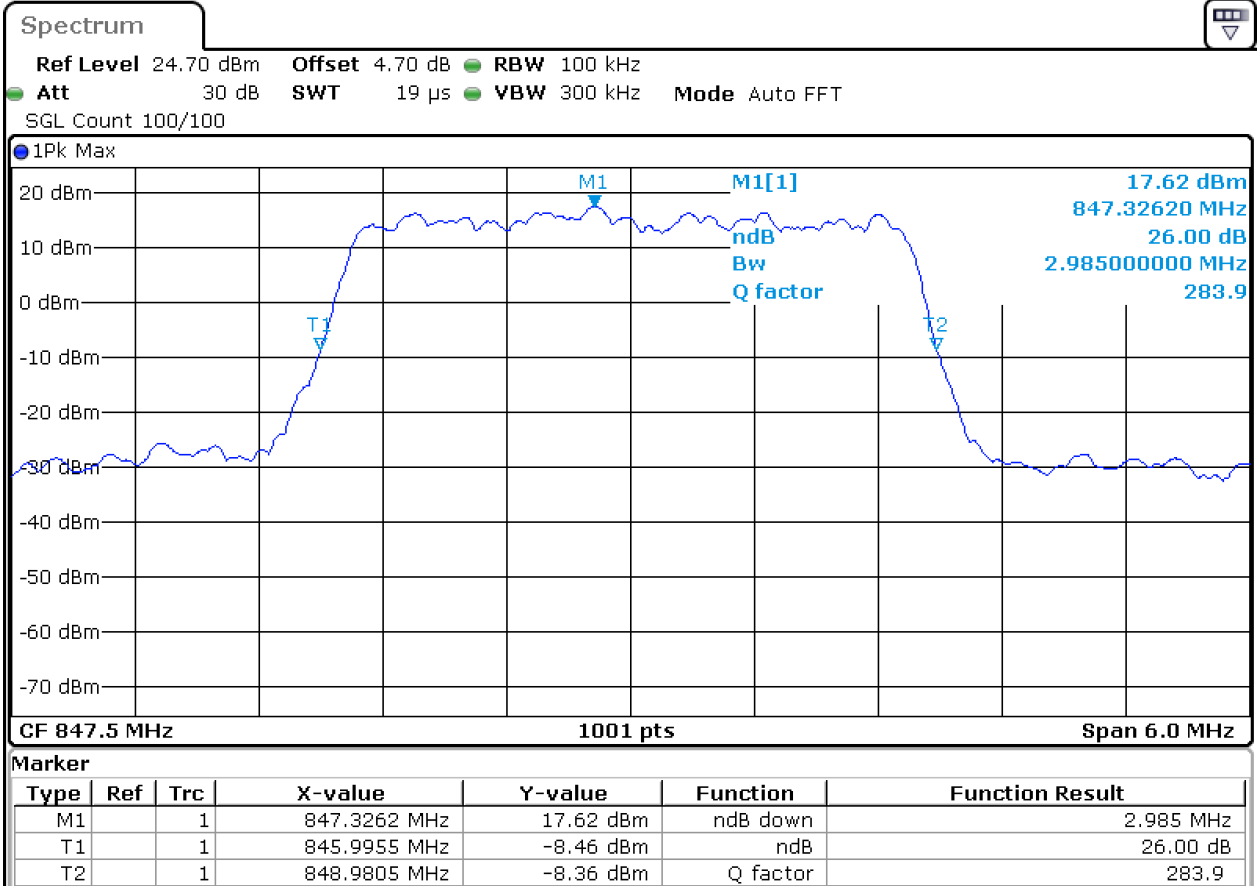

Date: 28.DEC.2021 04:08:12




Mode	LTE Band 5 : 26dB BW(MHz)		
BW	5 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	4.95	4.92	4.89
Middle CH	4.87	4.89	4.93
Highest CH	4.92	4.93	4.86

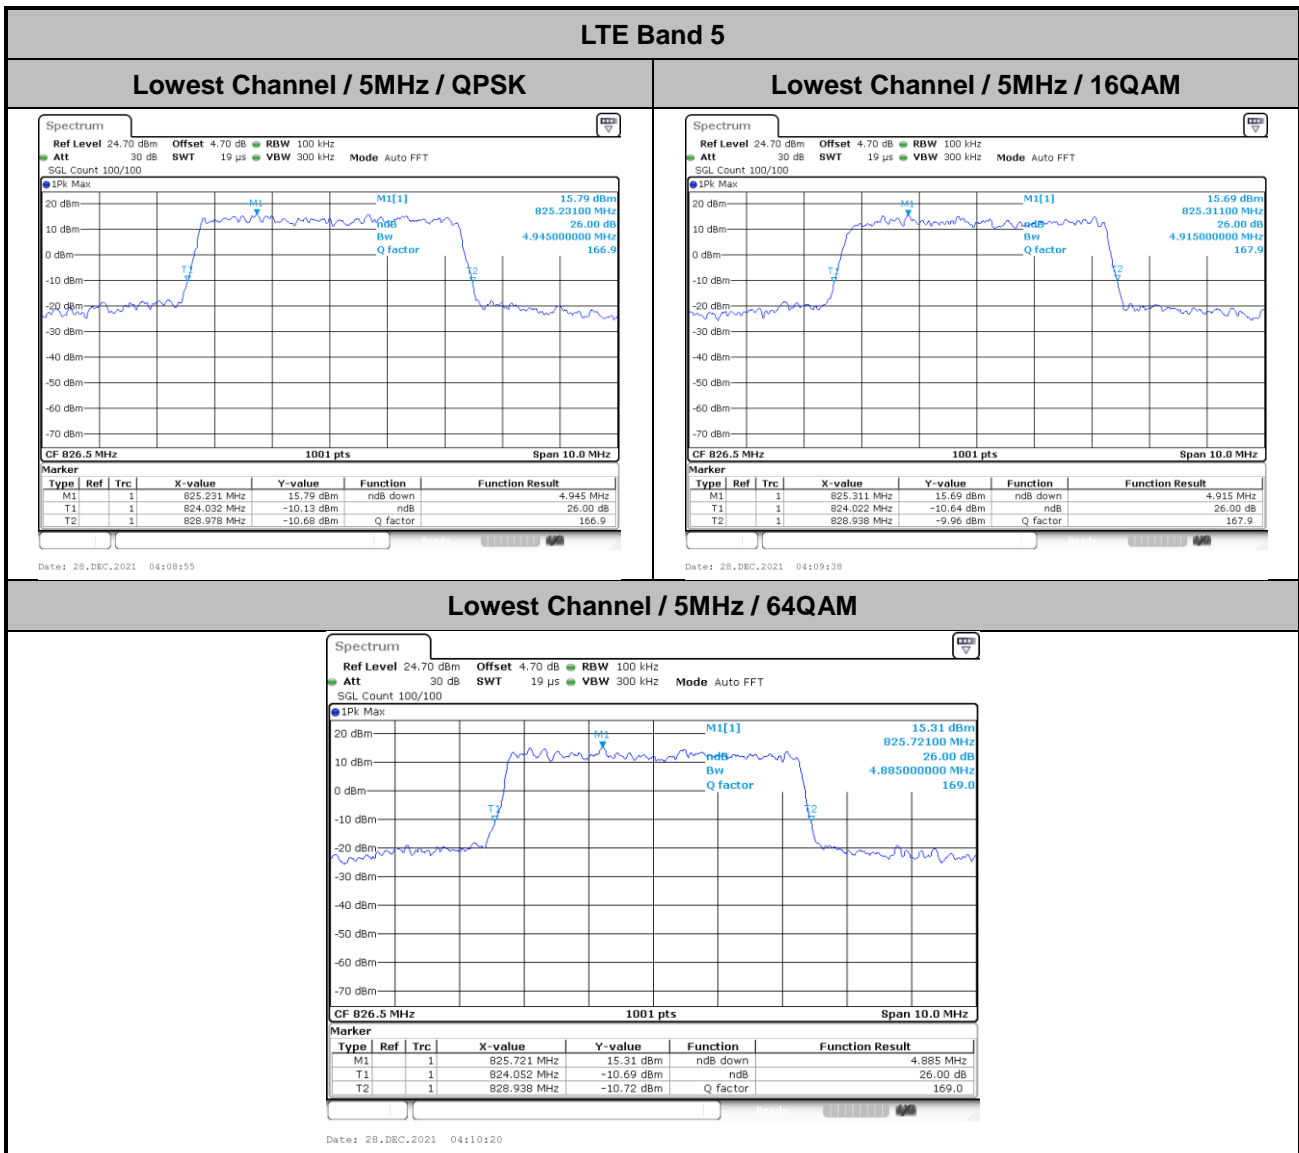




LTE Band 5

Middle Channel / 5MHz / QPSK

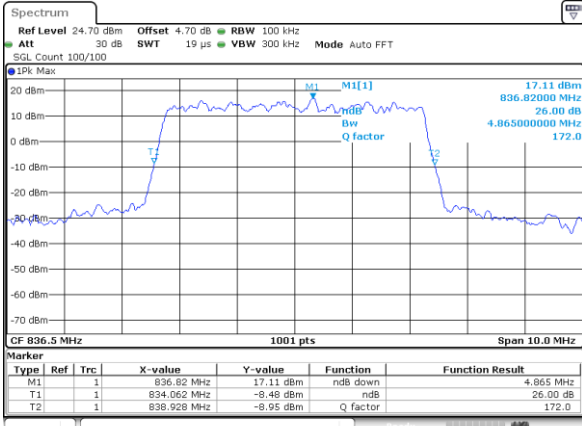


Date: 28.DEC.2021 04:11:02

Middle Channel / 5MHz / 16QAM

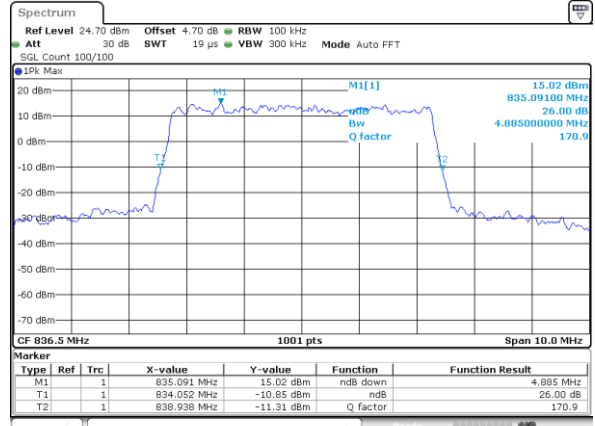

Date: 28.DEC.2021 04:11:44

Middle Channel / 5MHz / 64QAM

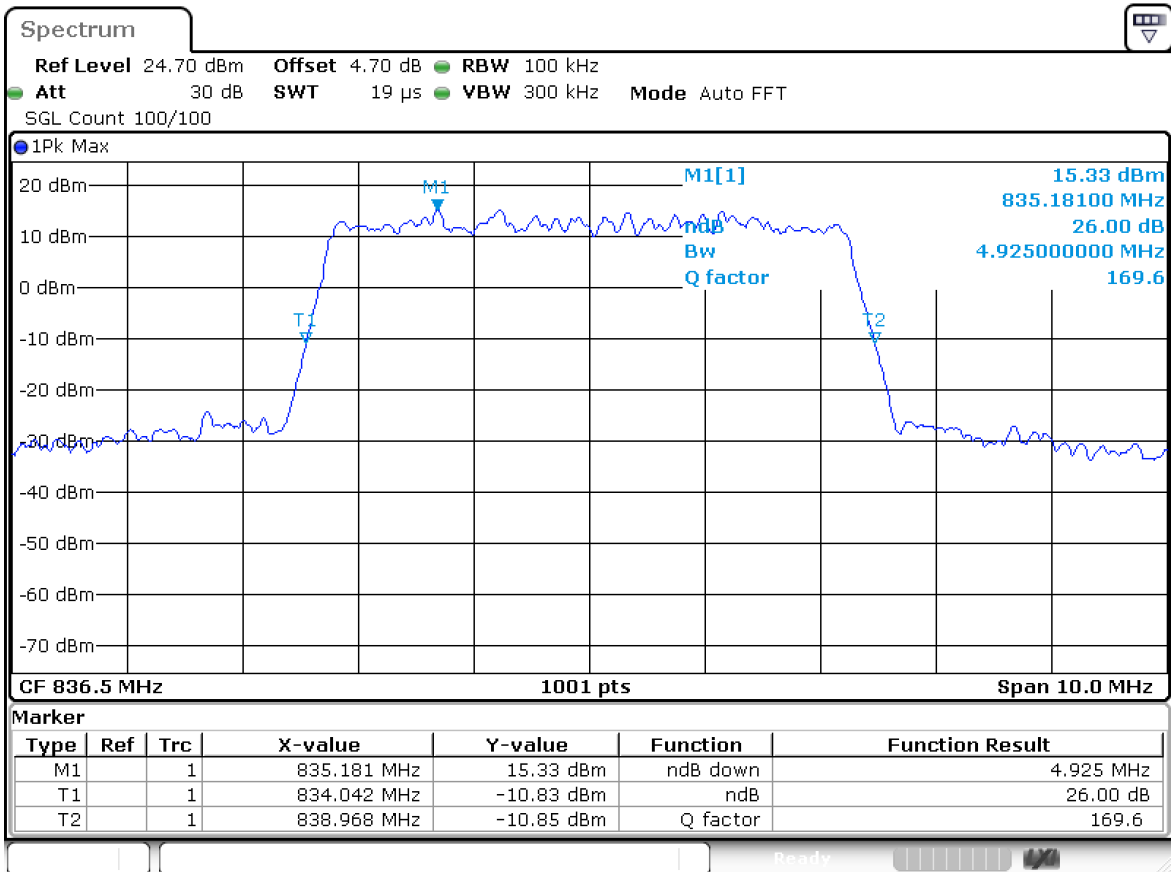


Date: 28.DEC.2021 04:12:26




LTE Band 5

Highest Channel / 5MHz / QPSK

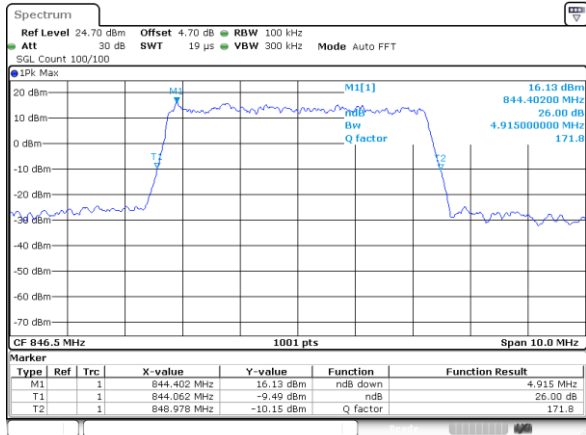


Date: 28.DEC.2021 04:13:09

Highest Channel / 5MHz / 16QAM

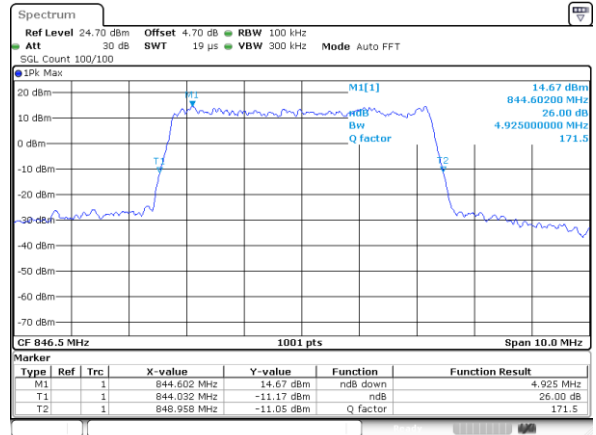

Date: 28.DEC.2021 04:13:51


Highest Channel / 5MHz / 64QAM

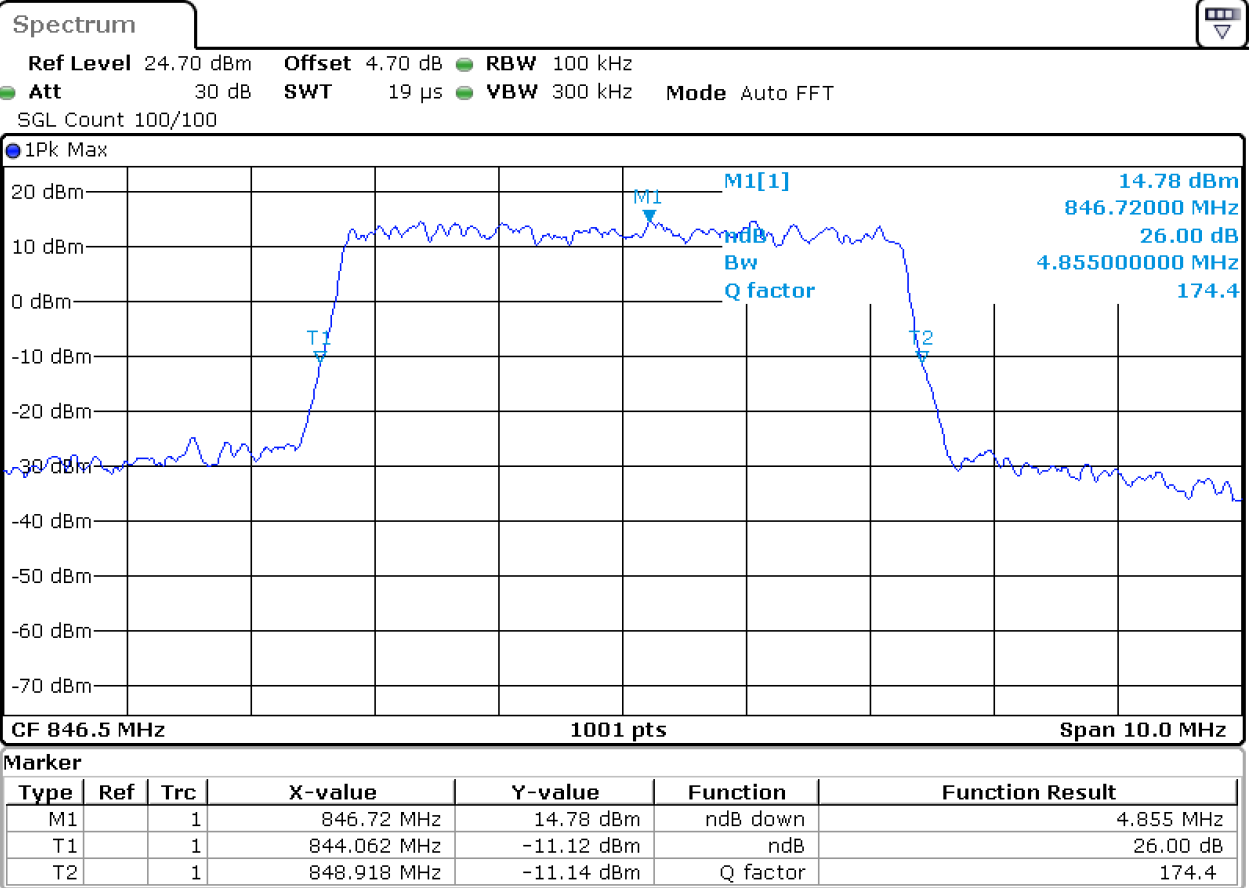

Date: 28.DEC.2021 04:14:33




Mode	LTE Band 5 : 26dB BW(MHz)		
BW	10 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	9.91	9.87	9.81
Middle CH	9.75	9.63	9.71
Highest CH	9.79	9.89	9.95

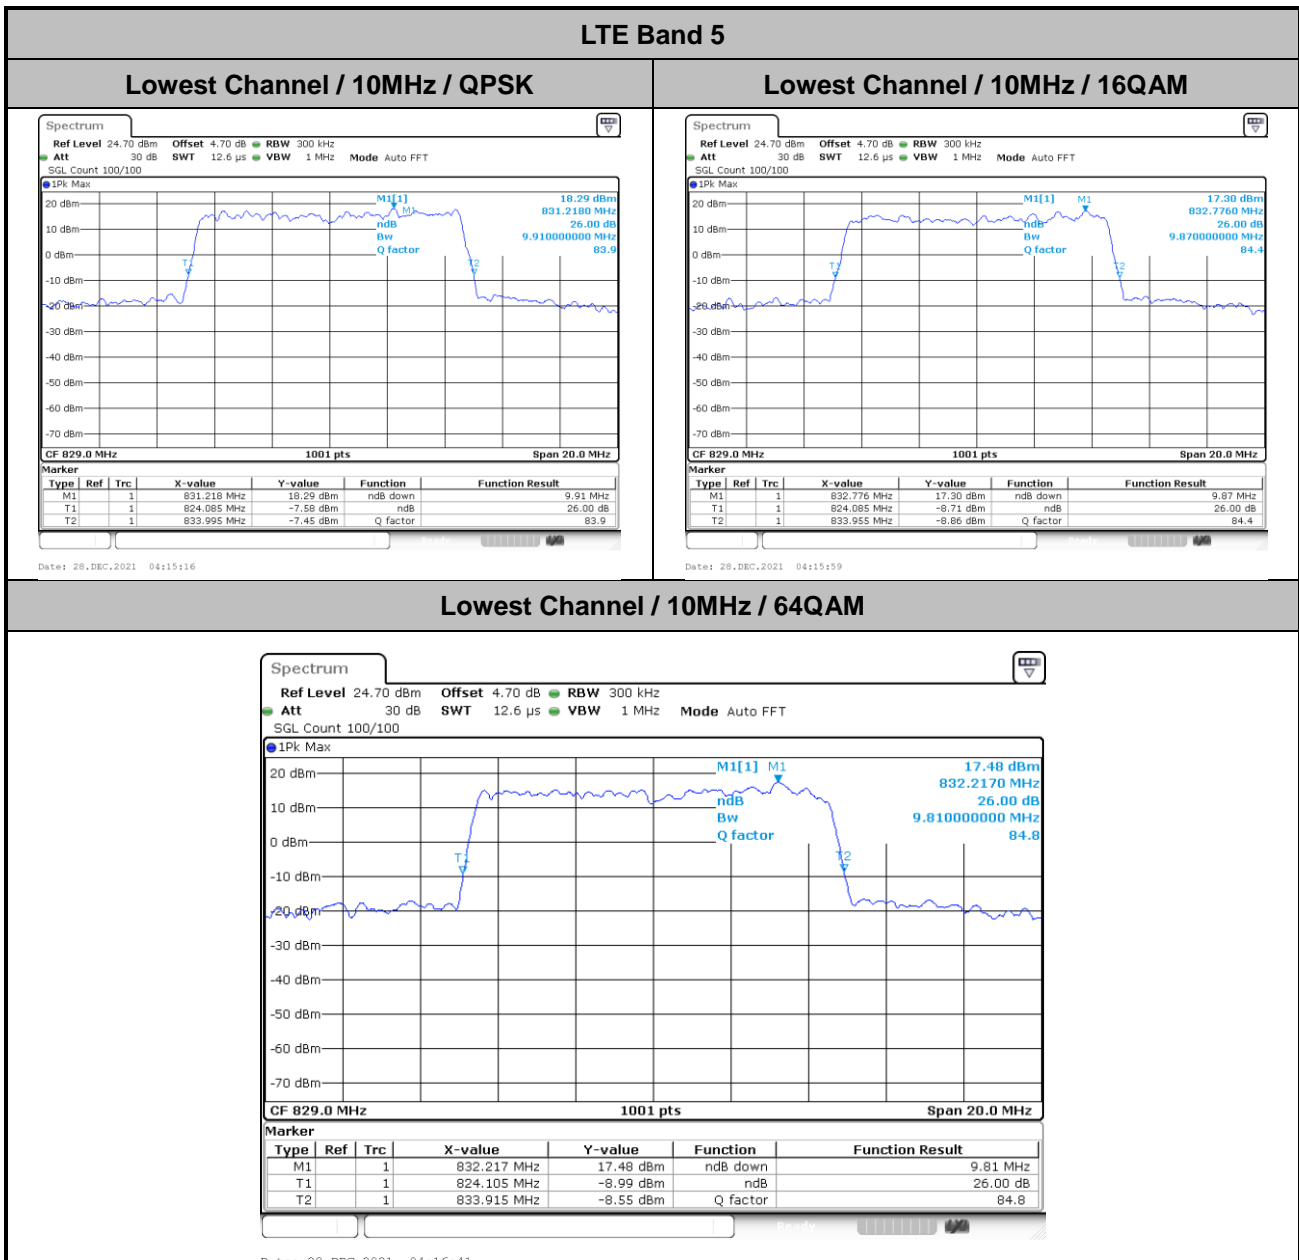




LTE Band 5

Middle Channel / 10MHz / QPSK

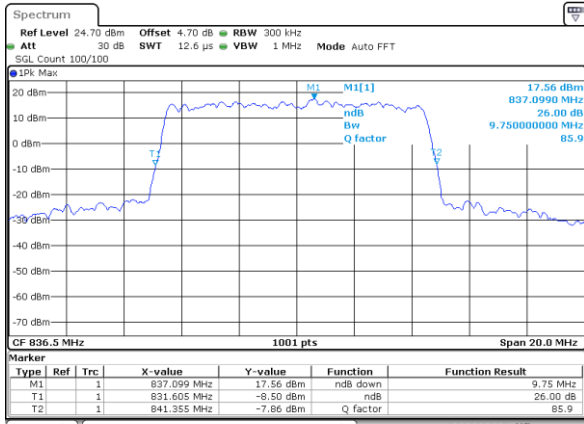


Date: 28.DEC.2021 04:17:23

Middle Channel / 10MHz / 16QAM

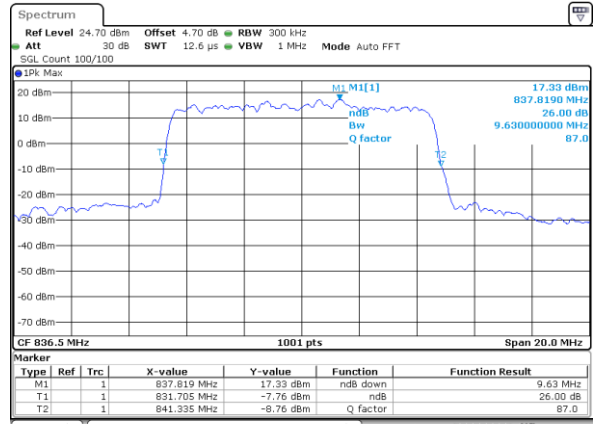

Date: 28.DEC.2021 04:18:05

Middle Channel / 10MHz / 64QAM

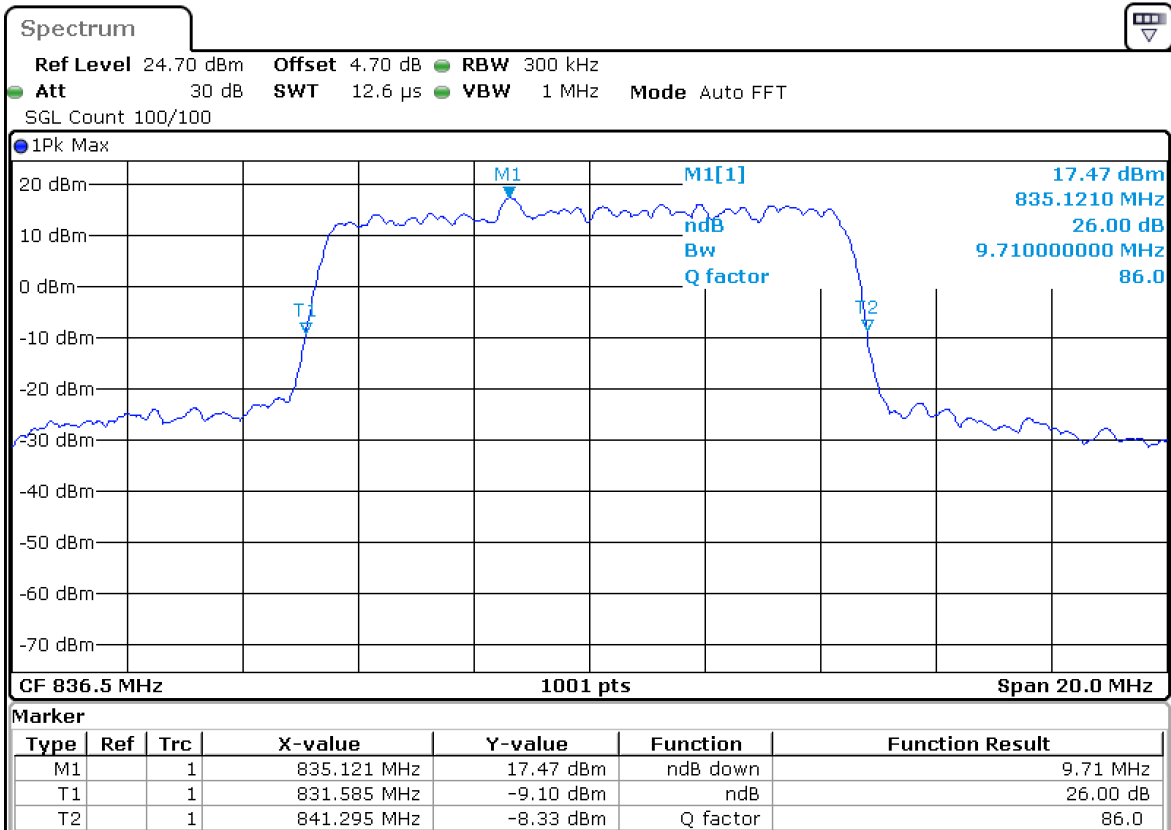


Date: 28.DEC.2021 04:18:46




LTE Band 5

Highest Channel / 10MHz / QPSK

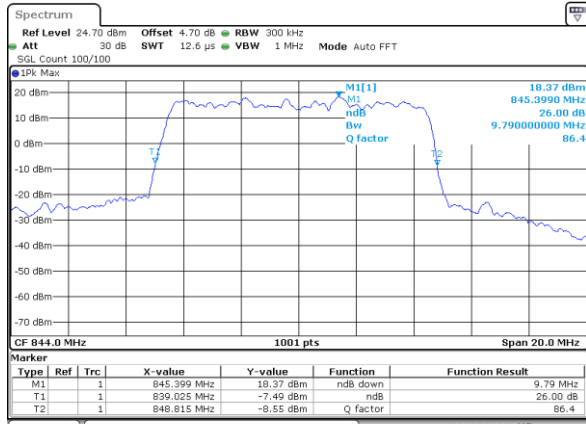


Date: 28.DEC.2021 04:19:29

Highest Channel / 10MHz / 16QAM

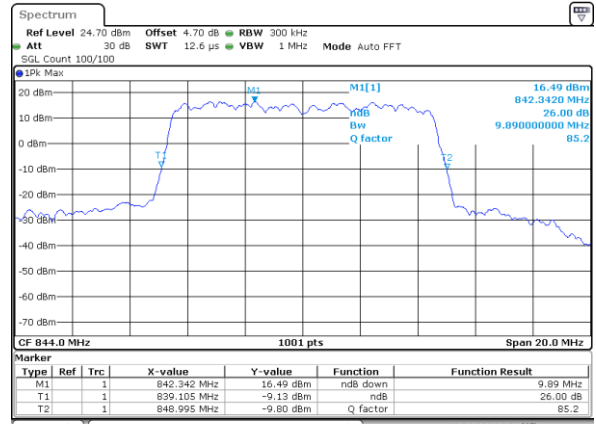

Date: 28.DEC.2021 04:20:11

Highest Channel / 10MHz / 64QAM

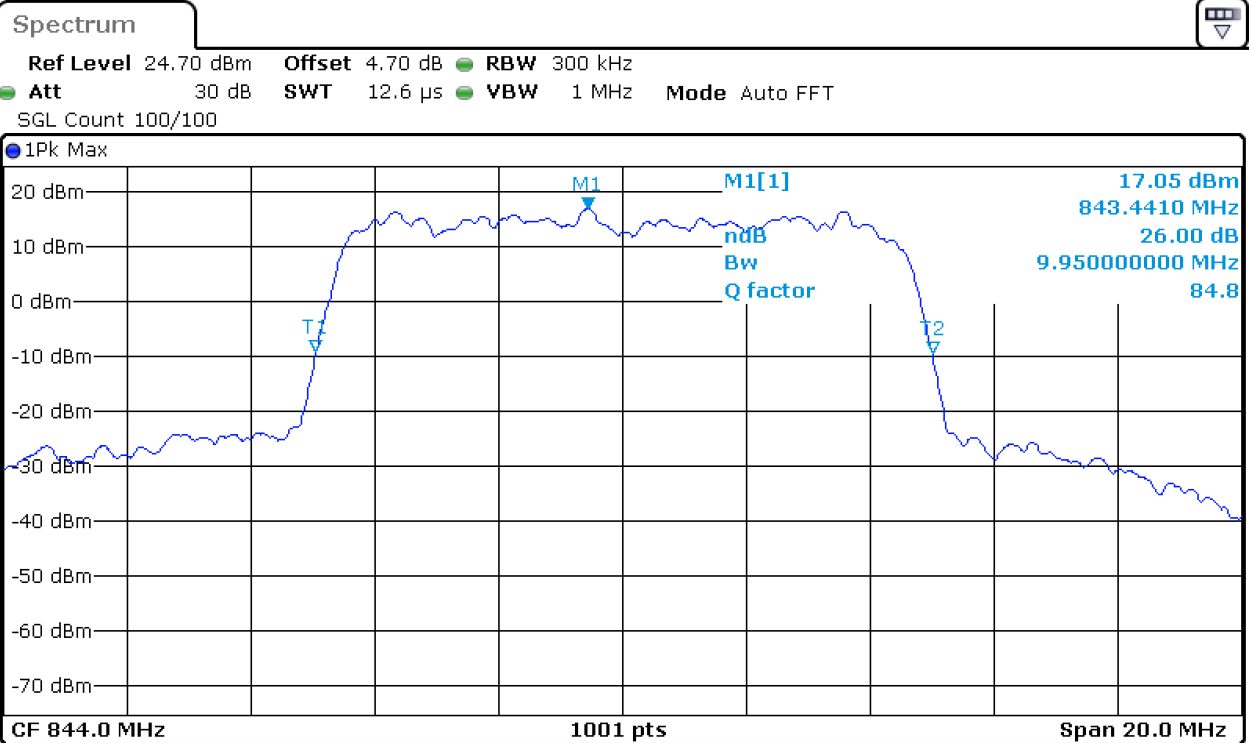


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		843.441 MHz	17.05 dBm	ndB down	9.95 MHz
T1	1		839.045 MHz	-9.14 dBm	ndB	26.00 dB
T2	1		848.995 MHz	-9.42 dBm	Q factor	84.8

Date: 28.DEC.2021 04:20:53



Occupied Bandwidth


Mode	LTE Band 5 : 99%OBW(MHz)		
BW	1.4 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	1.09	1.10	1.09
Middle CH	1.09	1.09	1.09
Highest CH	1.10	1.10	1.09

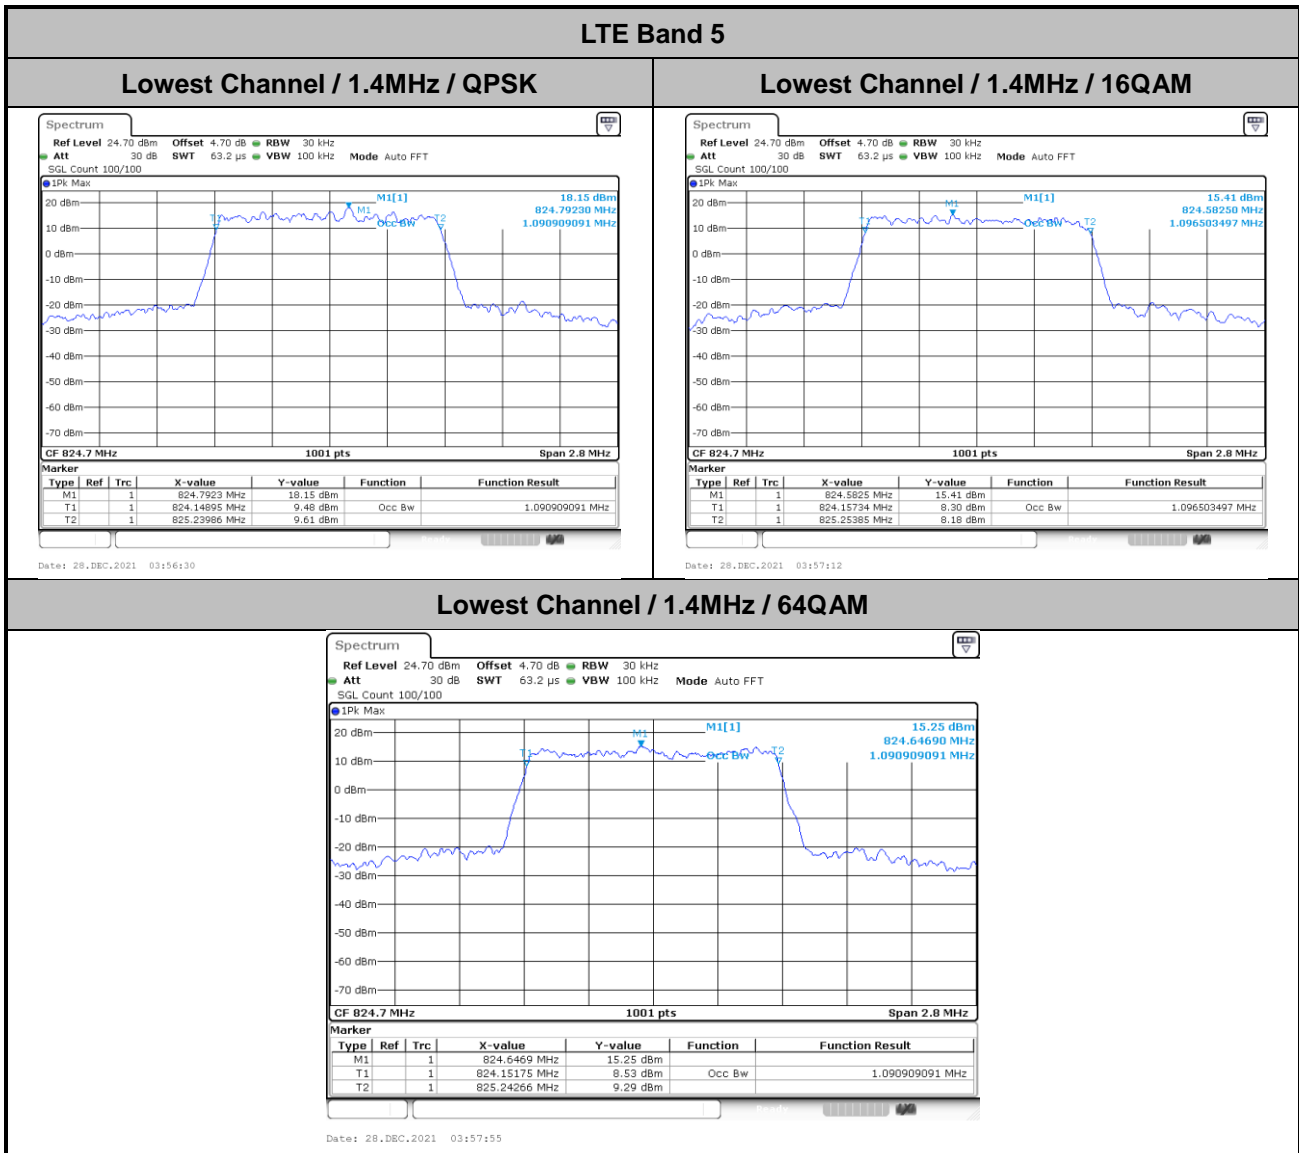




LTE Band 5

Middle Channel / 1.4MHz / QPSK

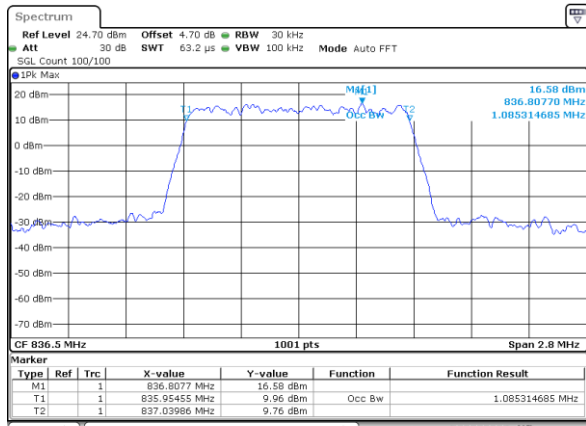


Date: 28.DEC.2021 03:58:37

Middle Channel / 1.4MHz / 16QAM

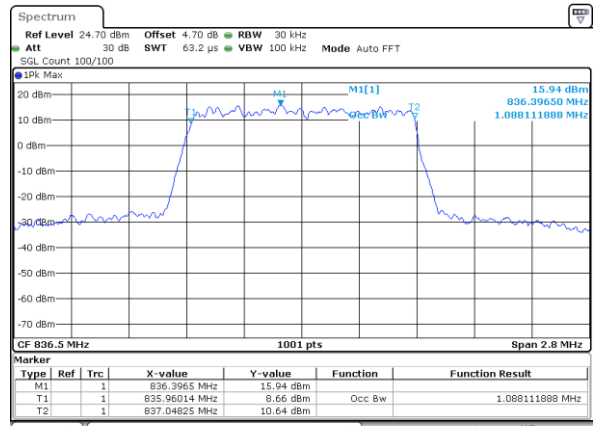

Date: 28.DEC.2021 03:59:19

Middle Channel / 1.4MHz / 64QAM

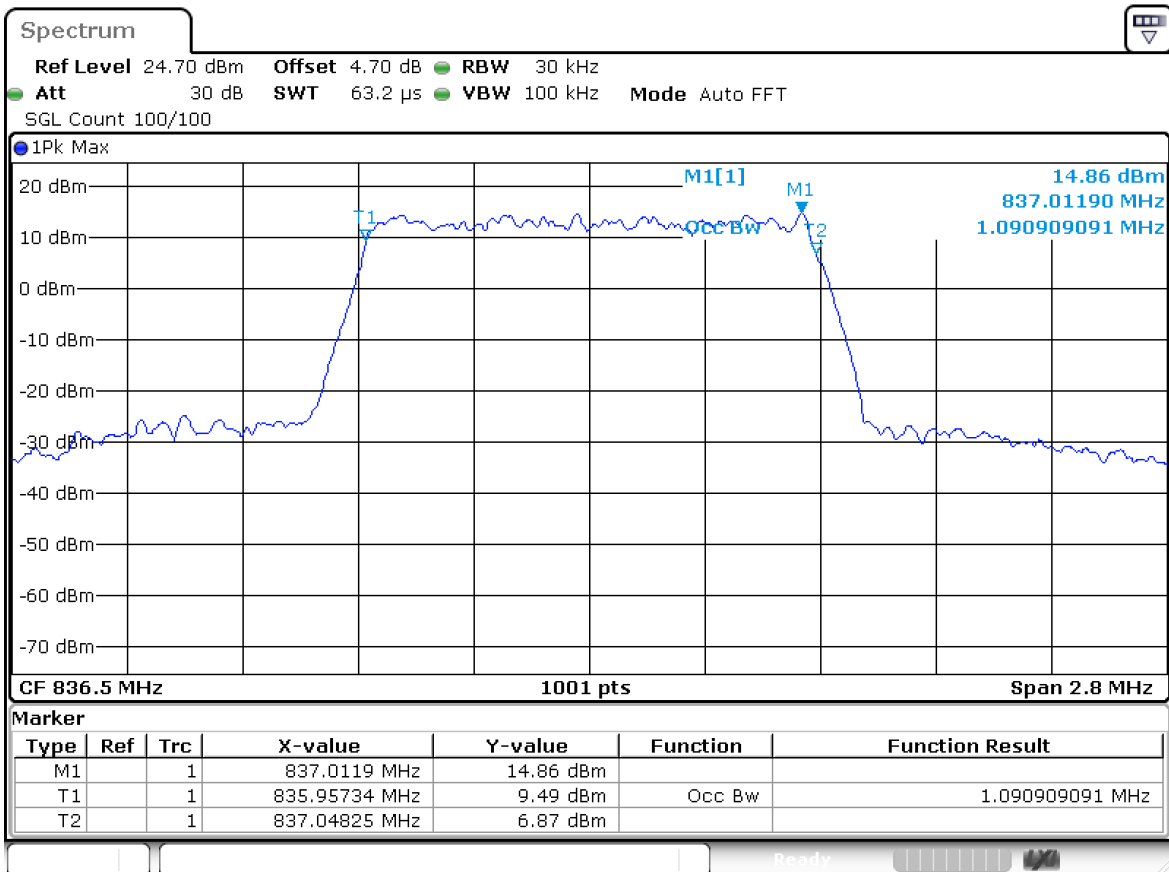


Date: 28.DEC.2021 04:00:01




LTE Band 5


Highest Channel / 1.4MHz / QPSK

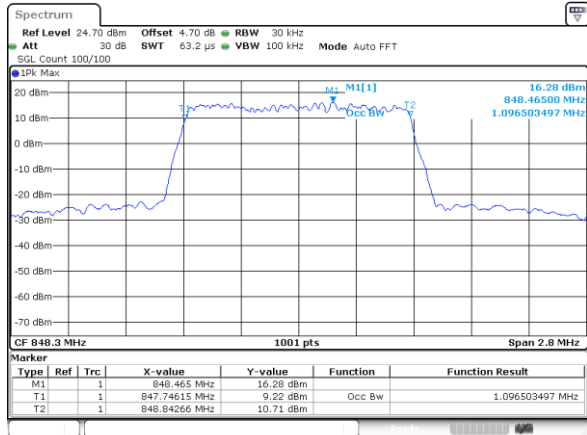

Highest Channel / 1.4MHz / 16QAM

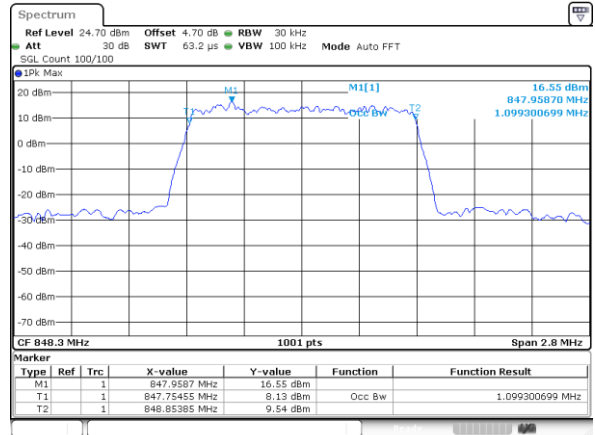


Highest Channel / 1.4MHz / 64QAM

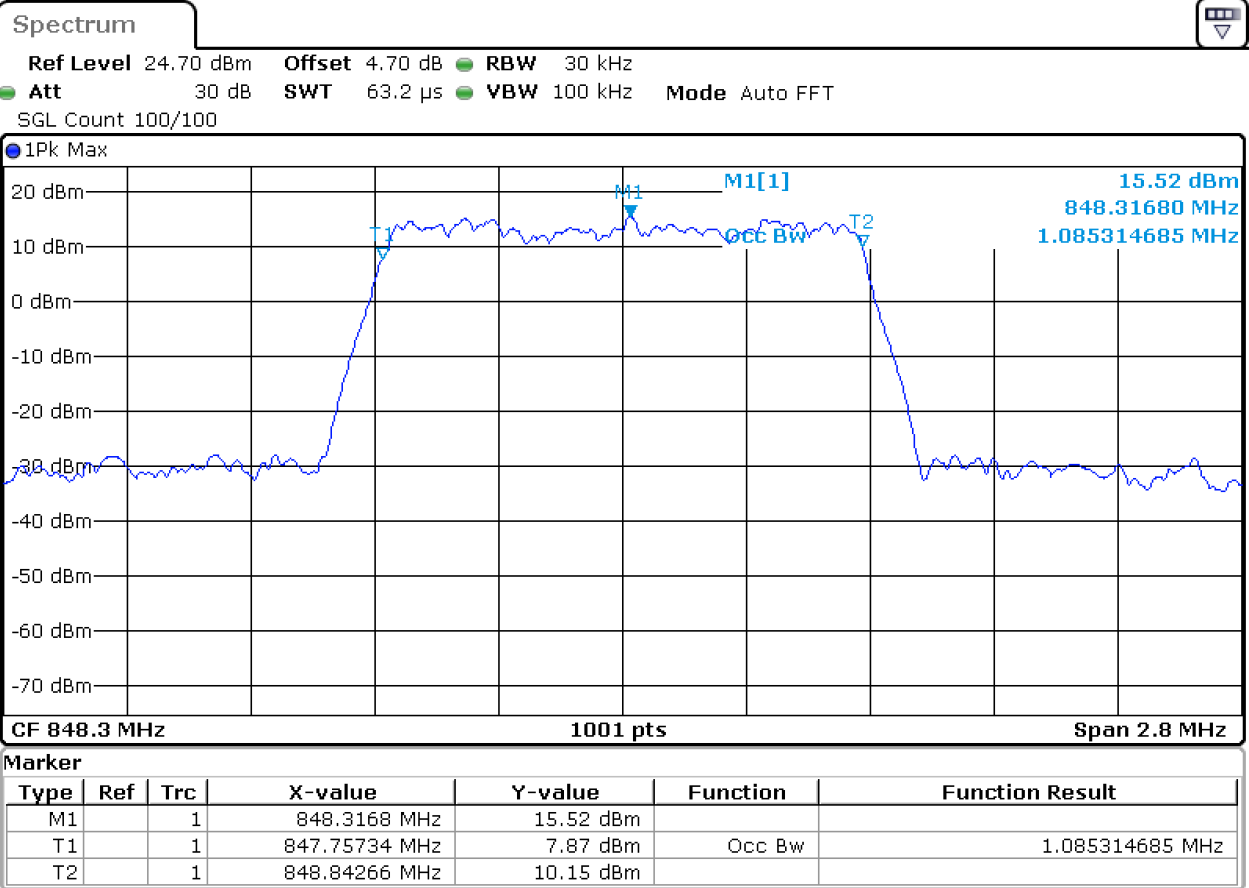

Date: 28.DEC.2021 04:02:08




Mode	LTE Band 5 : 99%OBW(MHz)		
BW	3 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	2.70	2.70	2.69
Middle CH	2.74	2.70	2.73
Highest CH	2.72	2.73	2.72

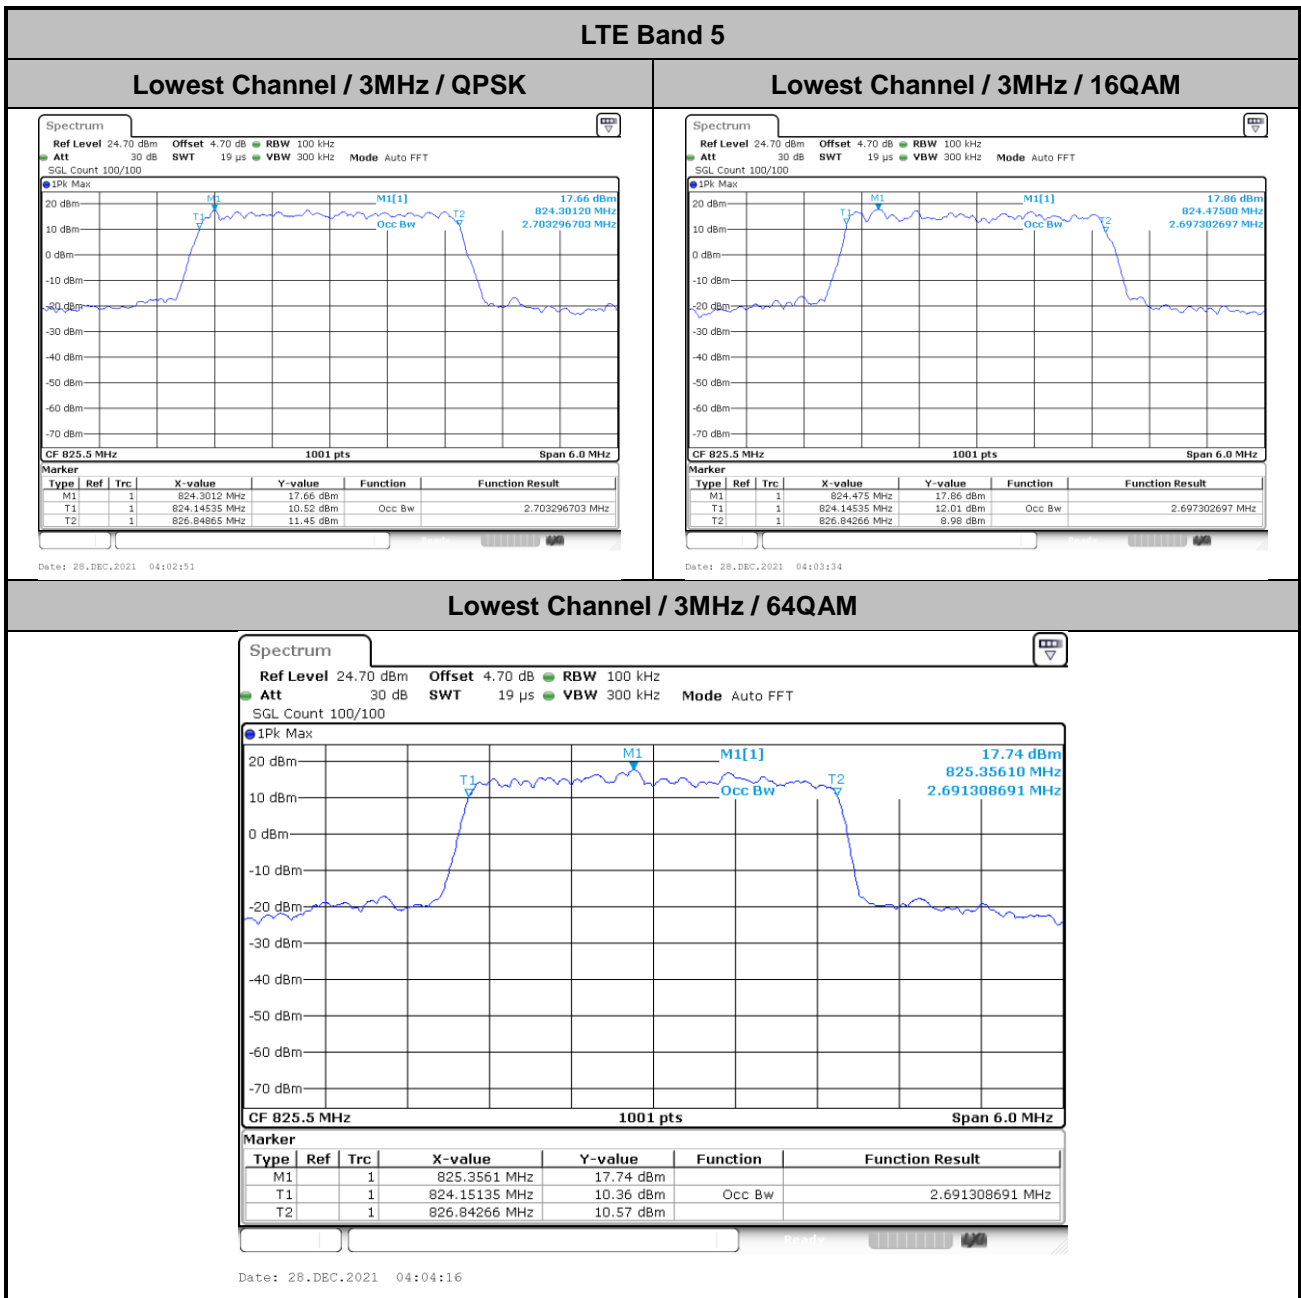




LTE Band 5

Middle Channel / 3MHz / QPSK

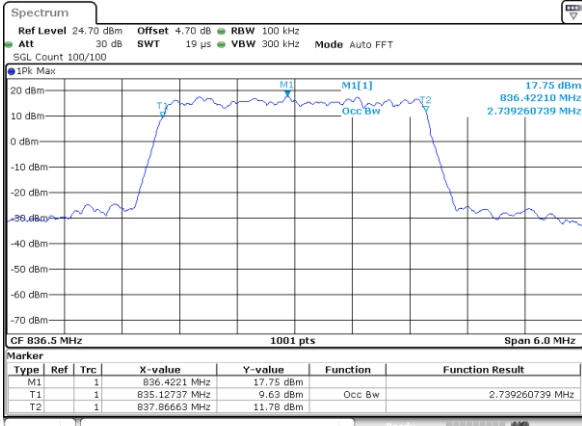


Date: 28.DEC.2021 04:04:59

Middle Channel / 3MHz / 16QAM

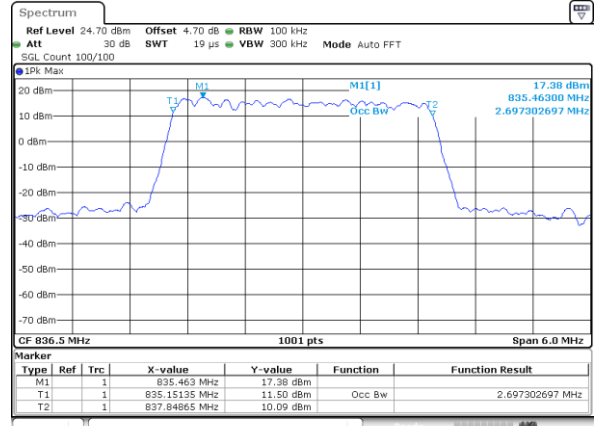

Date: 28.DEC.2021 04:05:40

Middle Channel / 3MHz / 64QAM

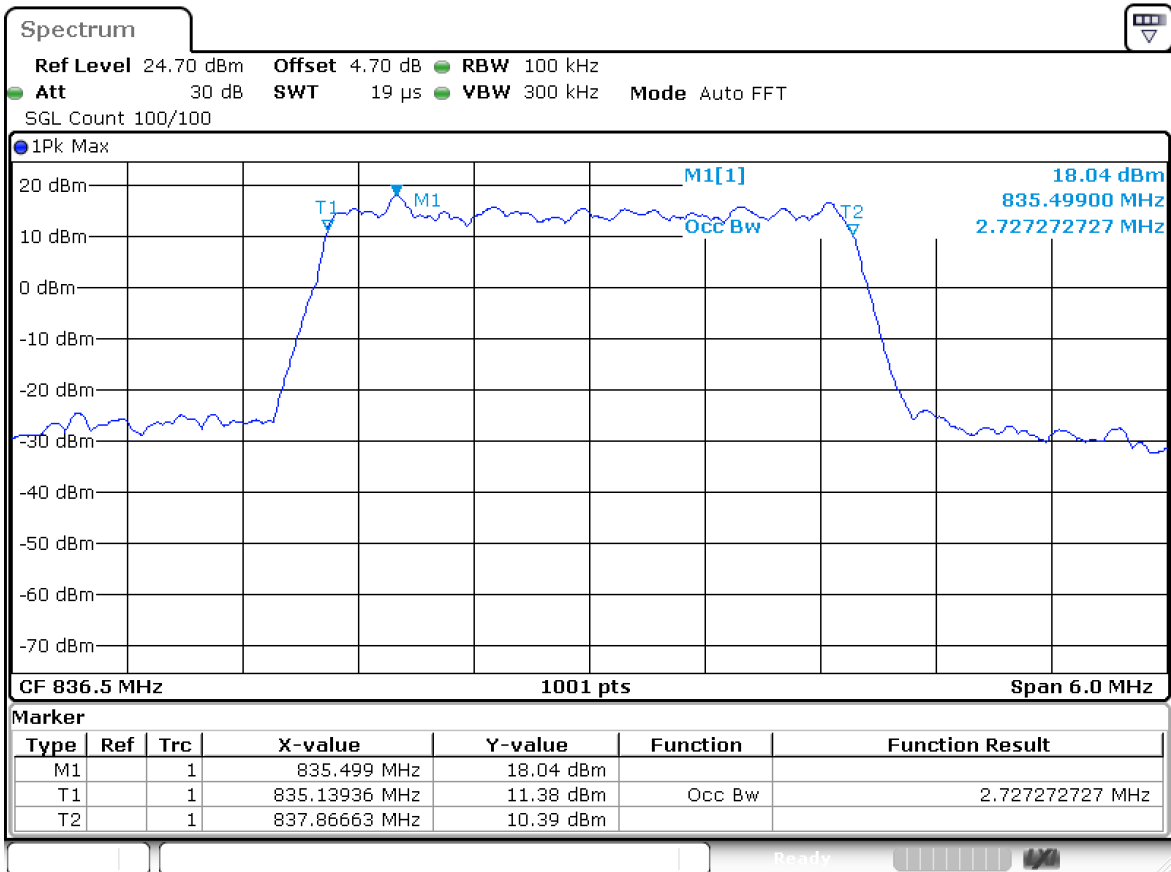


Date: 28.DEC.2021 04:06:22




LTE Band 5

Highest Channel / 3MHz / QPSK

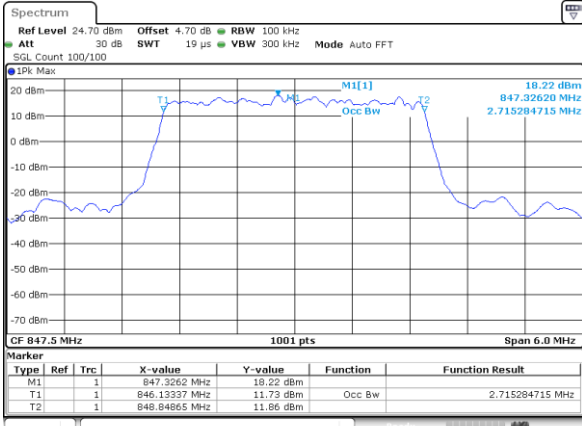


Date: 28.DEC.2021 04:07:04

Highest Channel / 3MHz / 16QAM

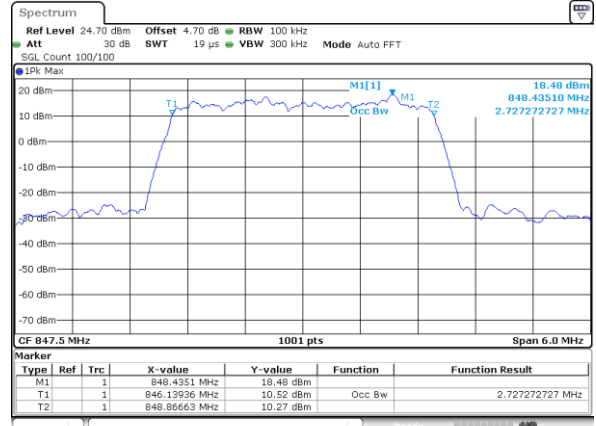

Date: 28.DEC.2021 04:07:46


Highest Channel / 3MHz / 64QAM

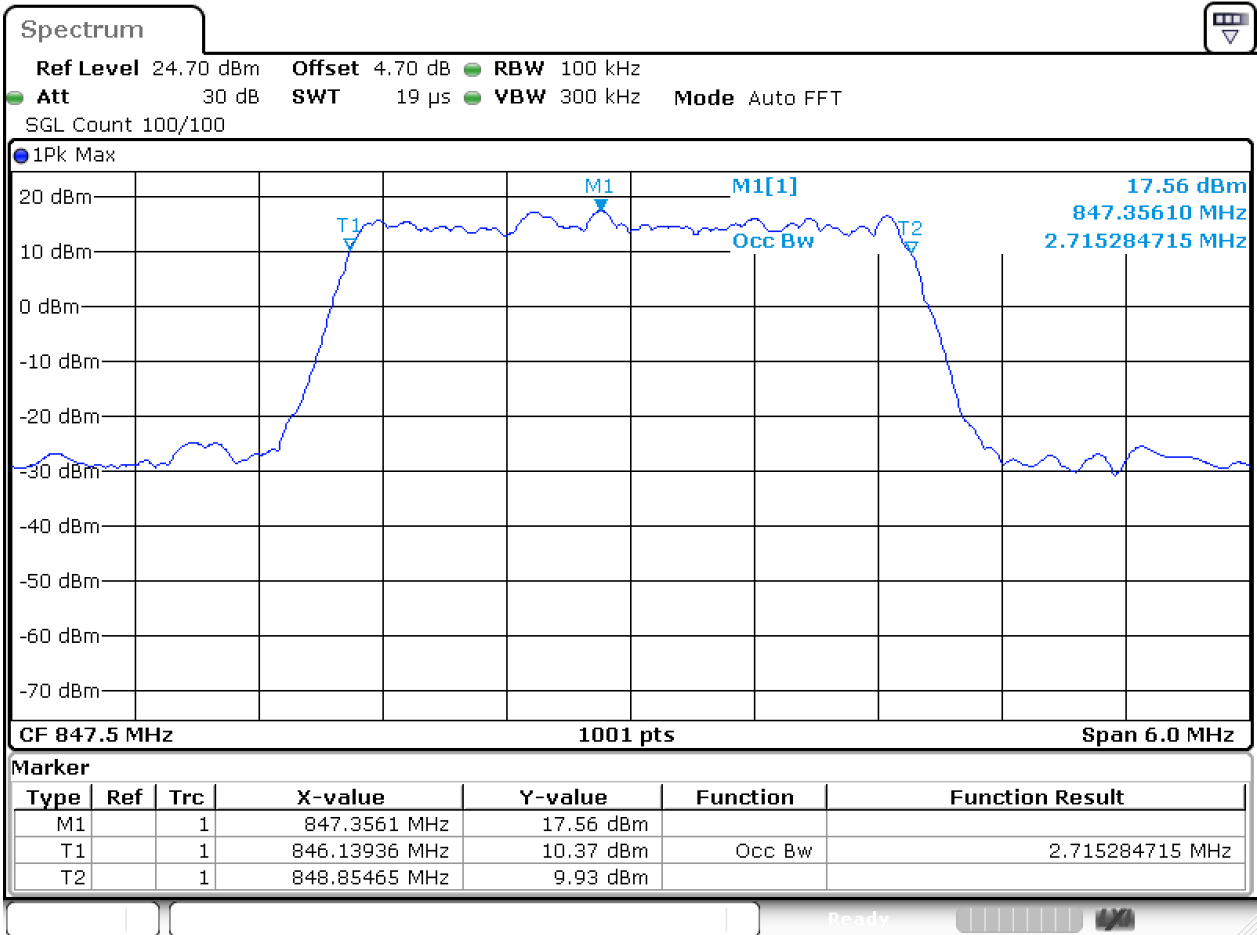

Date: 28.DEC.2021 04:08:29




Mode	LTE Band 5 : 99%OBW(MHz)		
BW	5 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	4.49	4.50	4.49
Middle CH	4.50	4.48	4.49
Highest CH	4.51	4.49	4.51

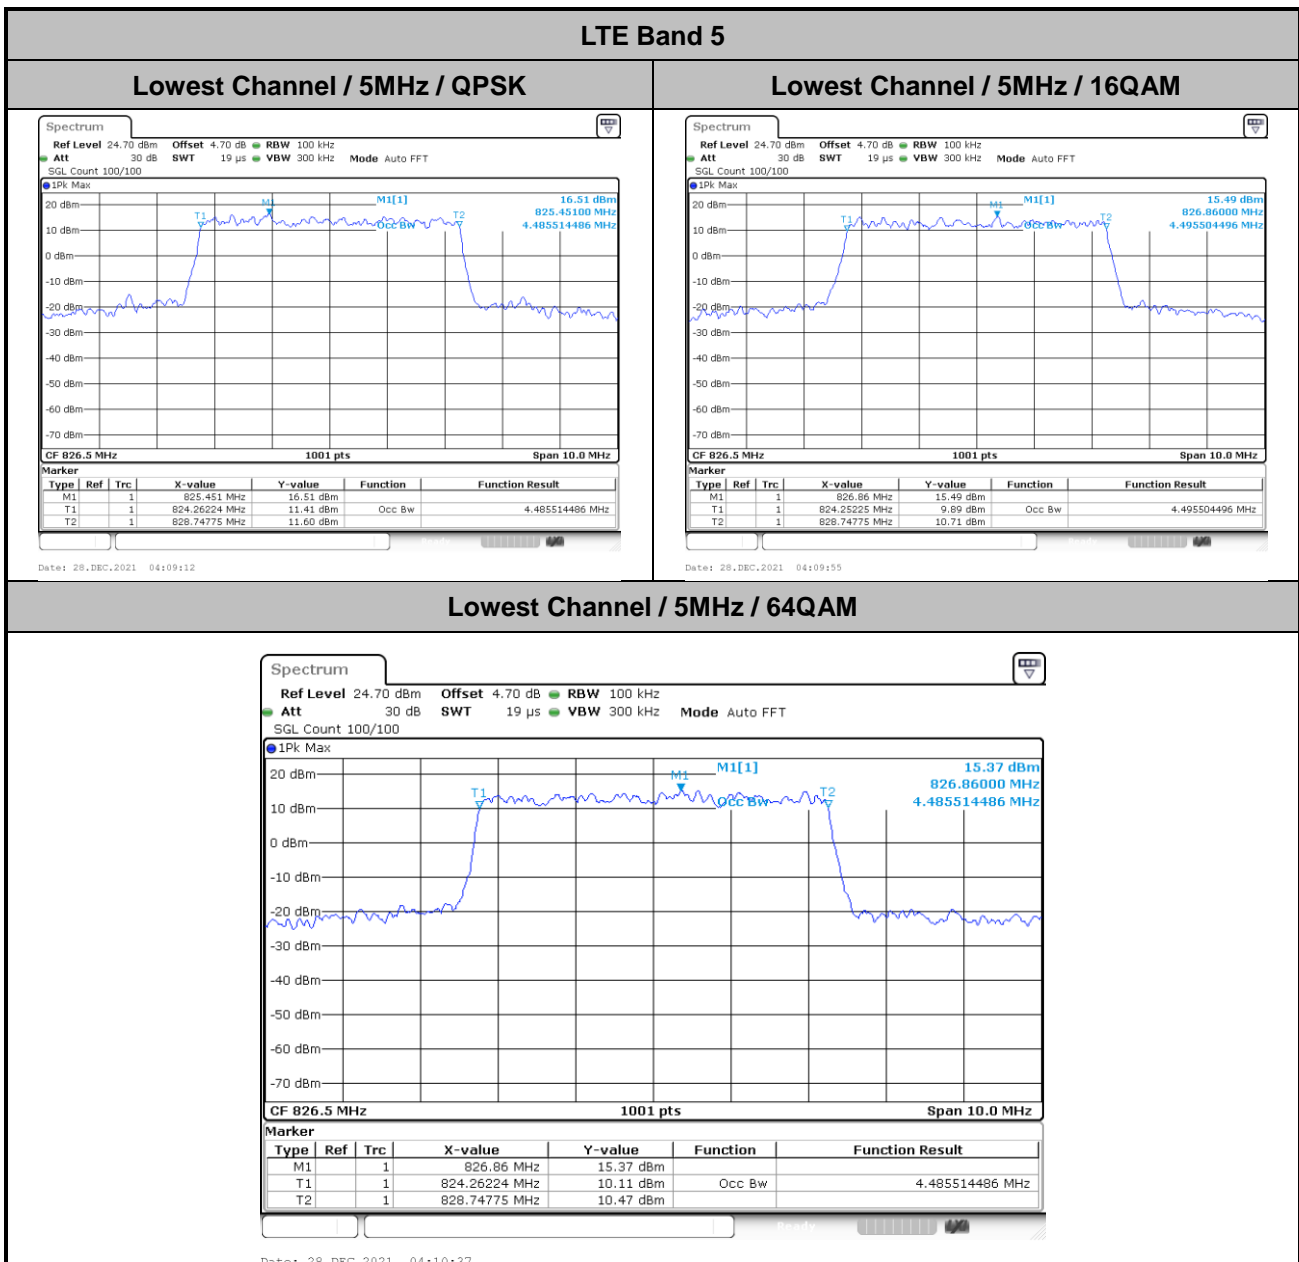




LTE Band 5

Middle Channel / 5MHz / QPSK

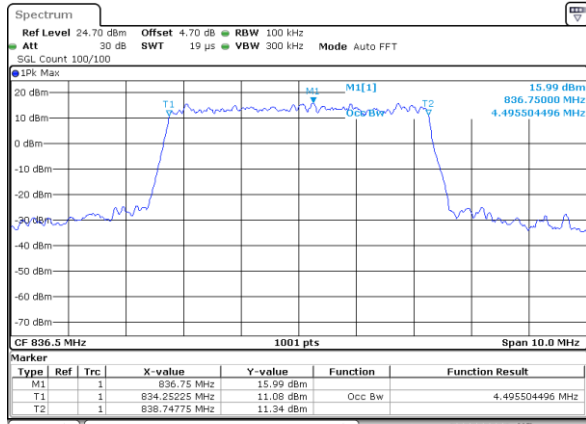


Date: 28.DEC.2021 04:11:19

Middle Channel / 5MHz / 16QAM

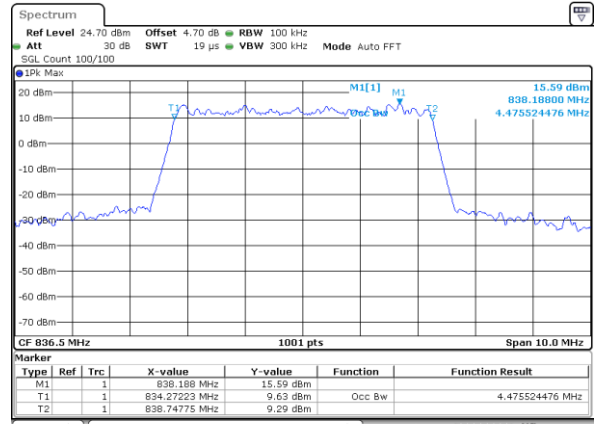

Date: 28.DEC.2021 04:12:01

Middle Channel / 5MHz / 64QAM

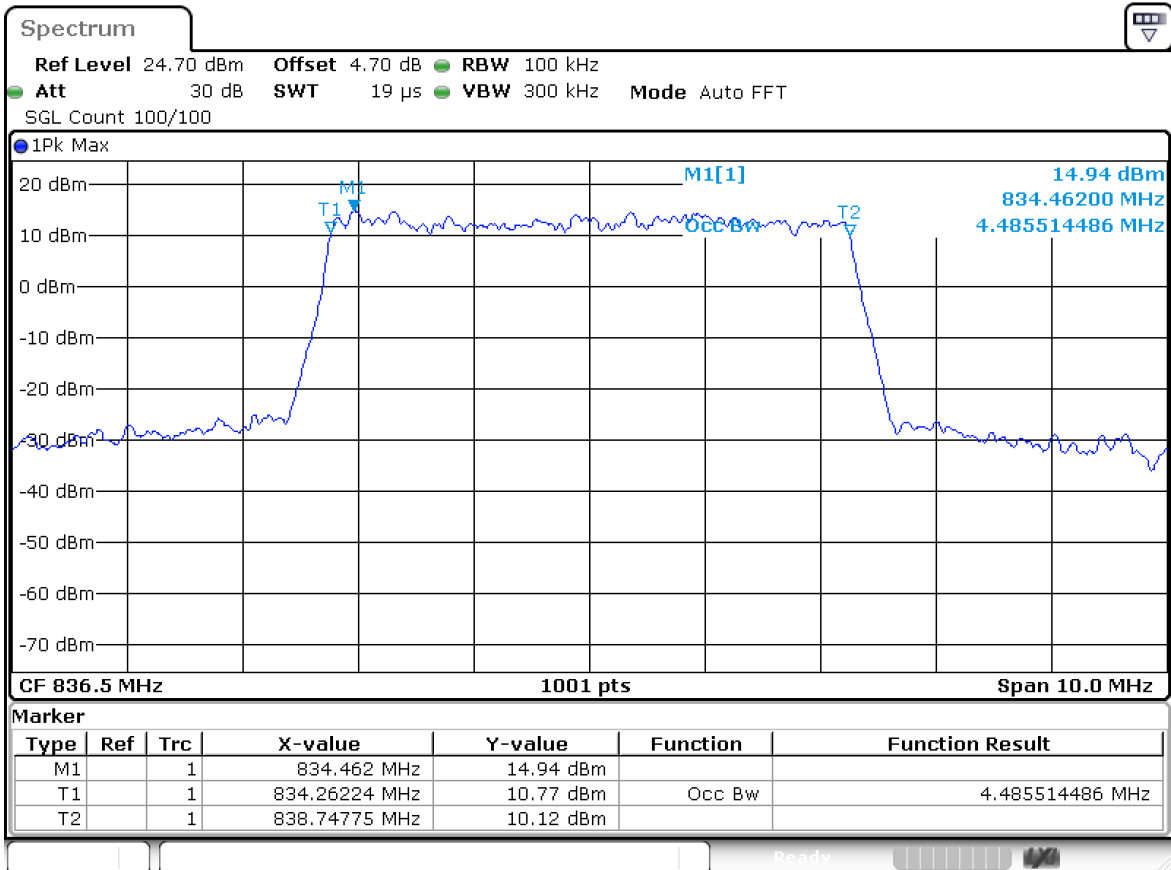


Date: 28.DEC.2021 04:12:43




LTE Band 5

Highest Channel / 5MHz / QPSK

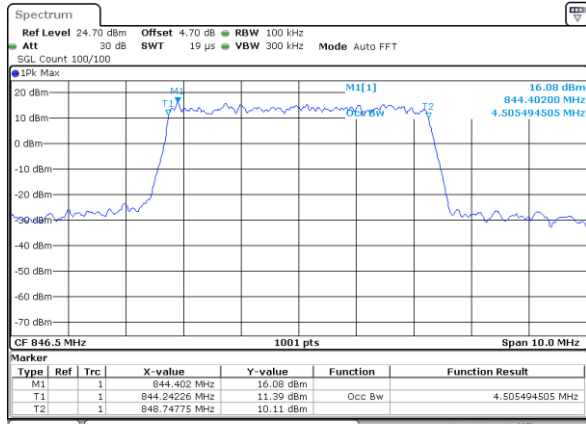


Date: 28.DEC.2021 04:13:25

Highest Channel / 5MHz / 16QAM

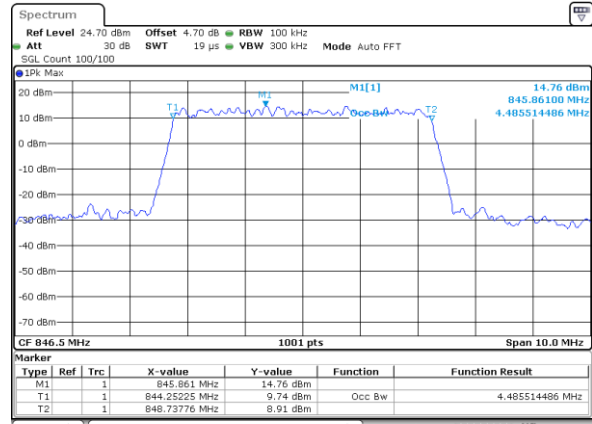

Date: 28.DEC.2021 04:14:08

Highest Channel / 5MHz / 64QAM

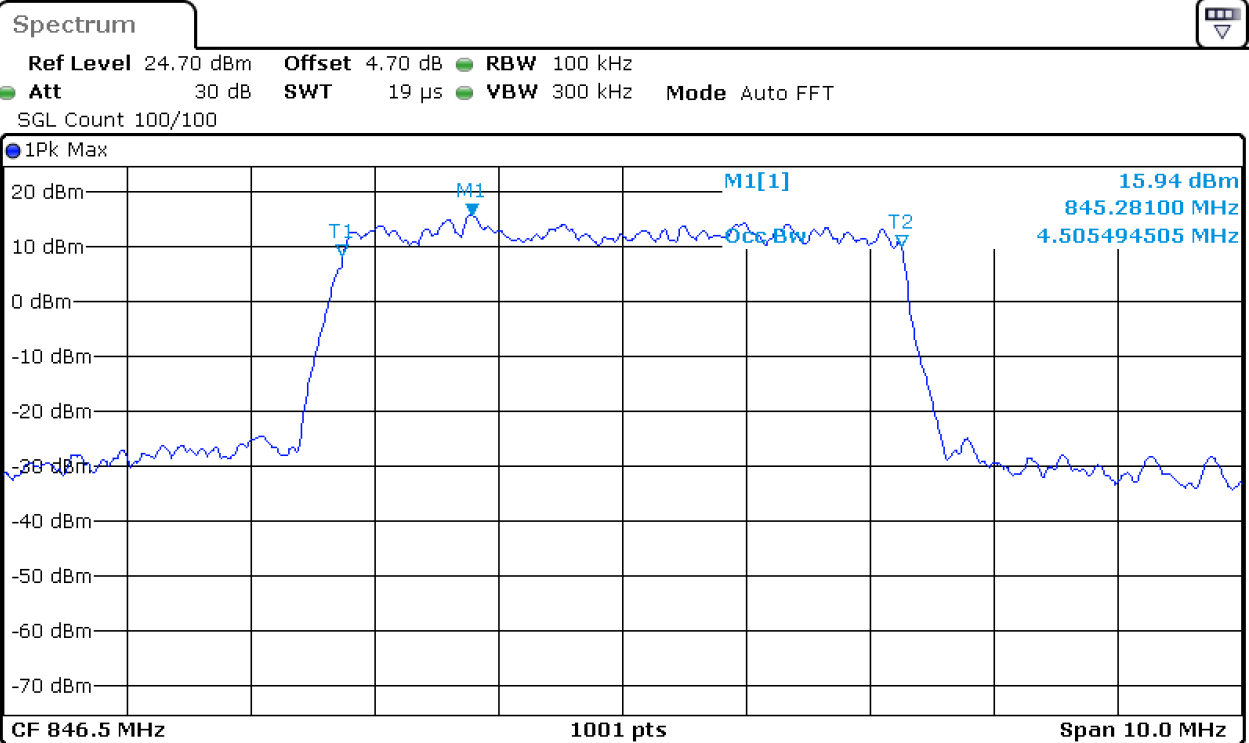


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		845.281 MHz	15.94 dBm		
T1	1		844.24226 MHz	8.48 dBm	Occ Bw	4.505494505 MHz
T2	1		848.74775 MHz	10.03 dBm		

Date: 28.DEC.2021 04:14:50




Mode	LTE Band 5 : 99%OBW(MHz)		
BW	10 MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	9.05	9.05	9.01
Middle CH	8.97	8.99	8.97
Highest CH	9.01	9.05	9.05

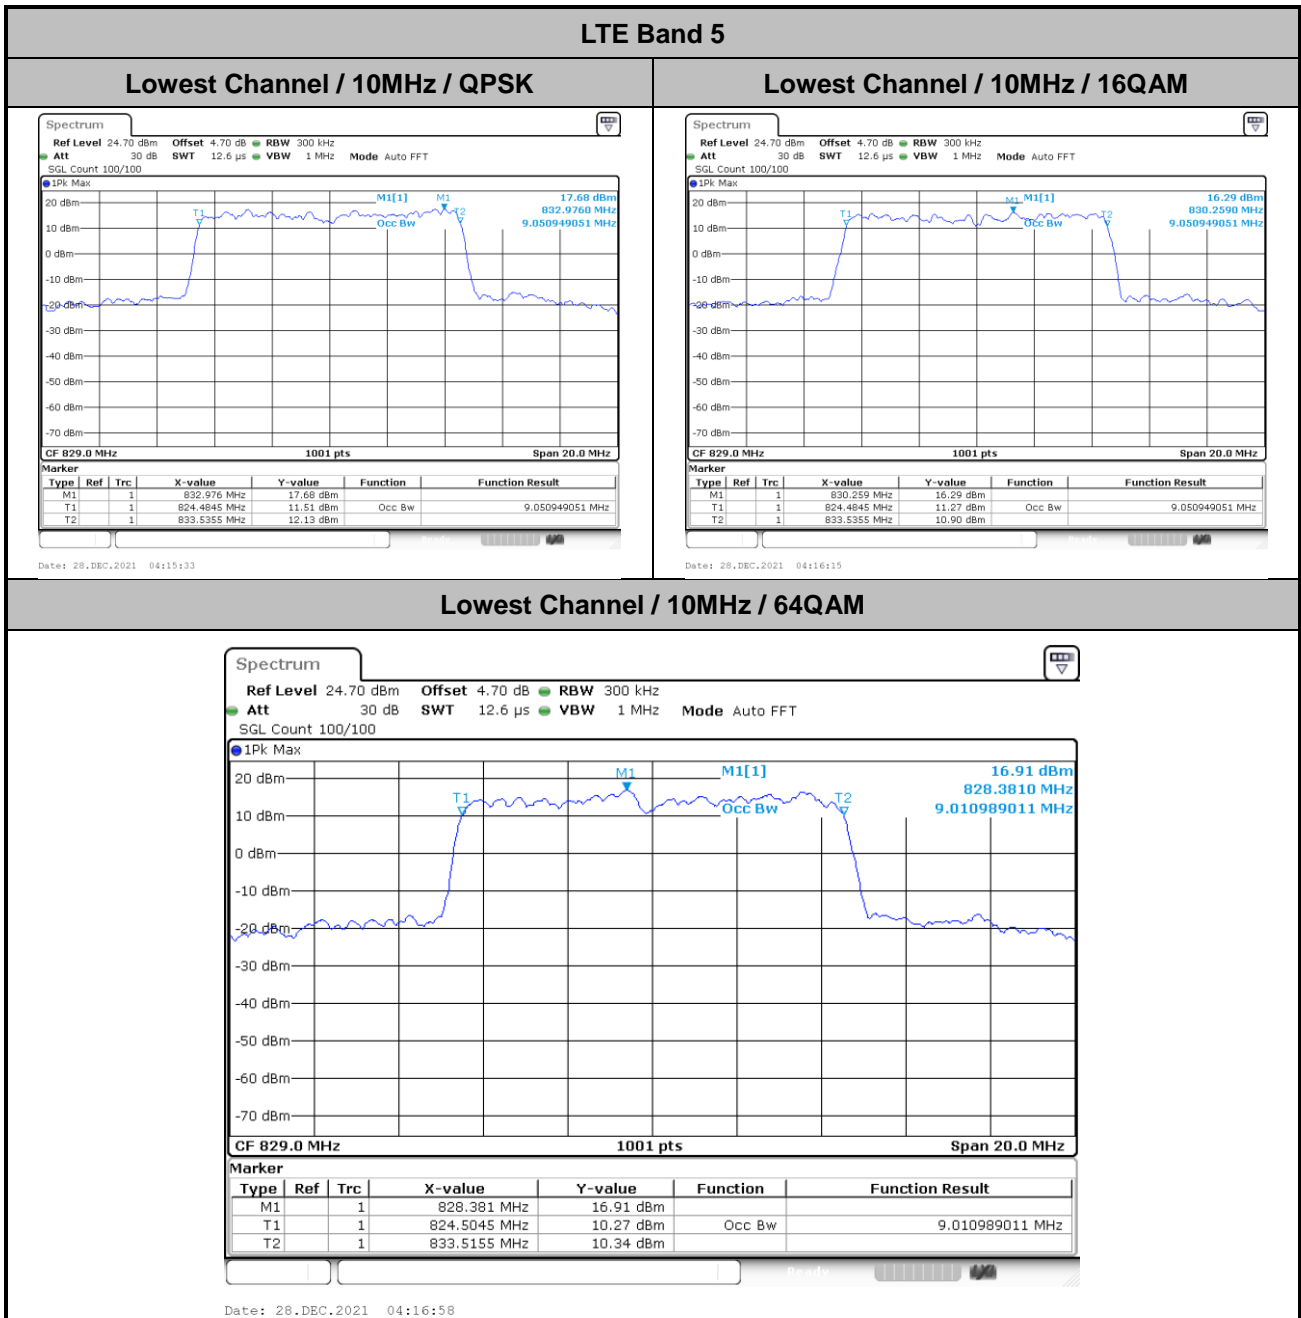




LTE Band 5

Middle Channel / 10MHz / QPSK

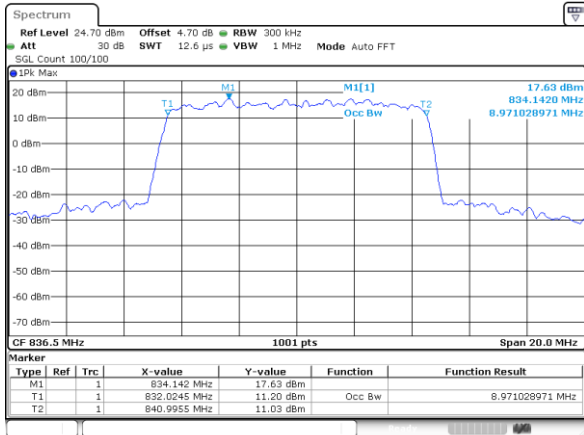


Date: 28.DEC.2021 04:17:40

Middle Channel / 10MHz / 16QAM

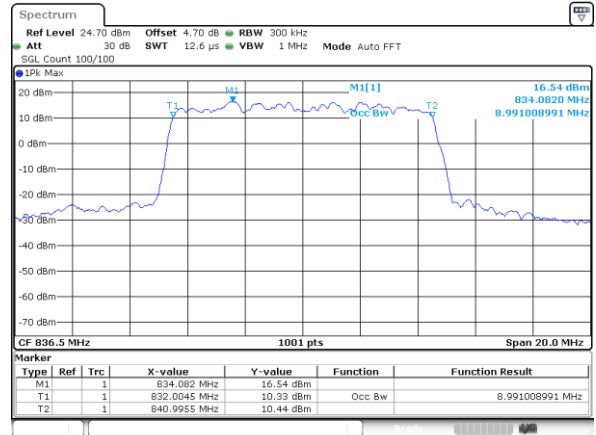

Date: 28.DEC.2021 04:18:21

Middle Channel / 10MHz / 64QAM

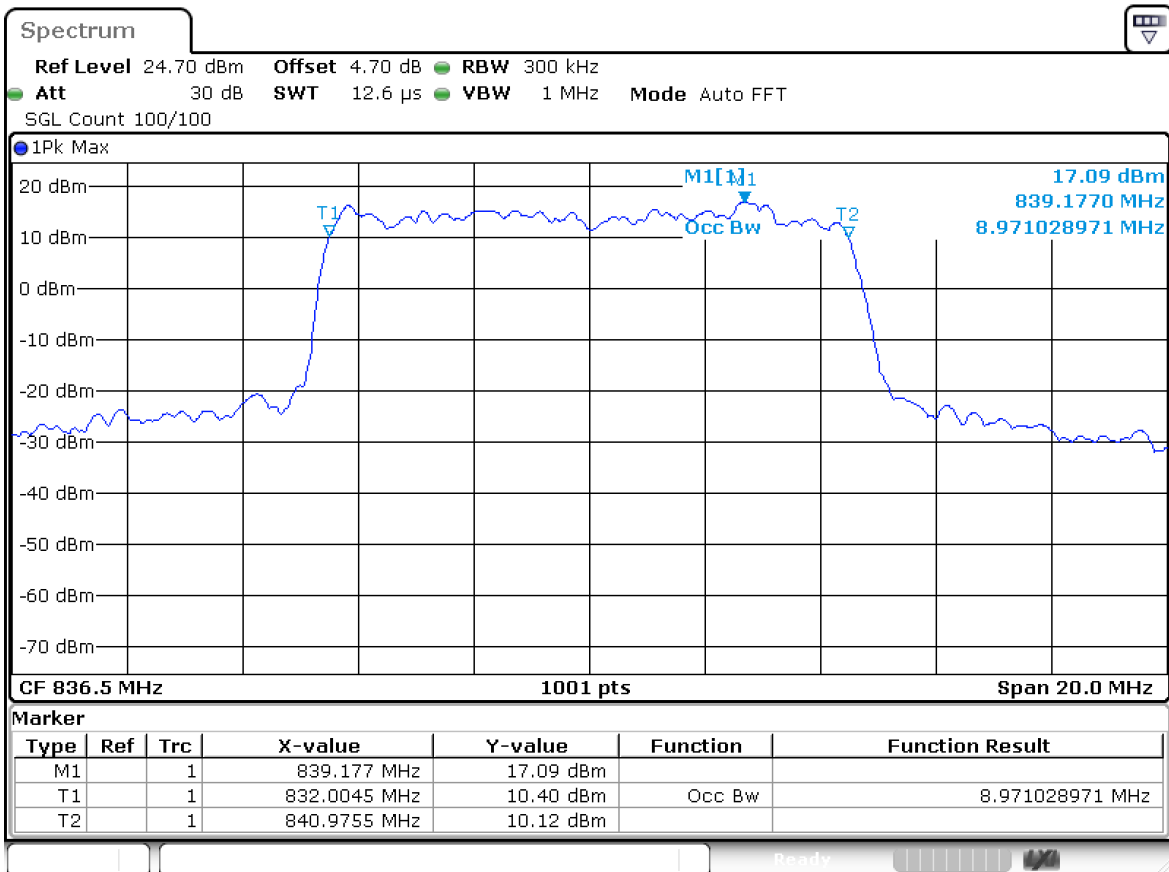


Date: 28.DEC.2021 04:19:03




LTE Band 5

Highest Channel / 10MHz / QPSK

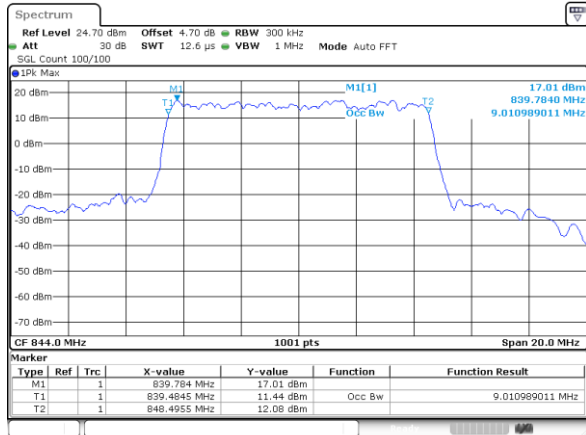


Date: 28.DEC.2021 04:19:45

Highest Channel / 10MHz / 16QAM

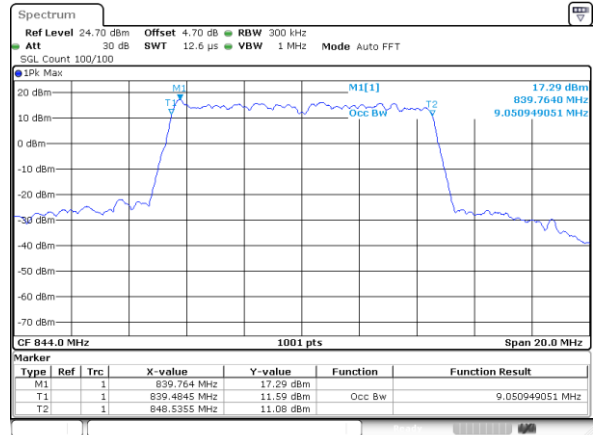

Date: 28.DEC.2021 04:20:28

Highest Channel / 10MHz / 64QAM

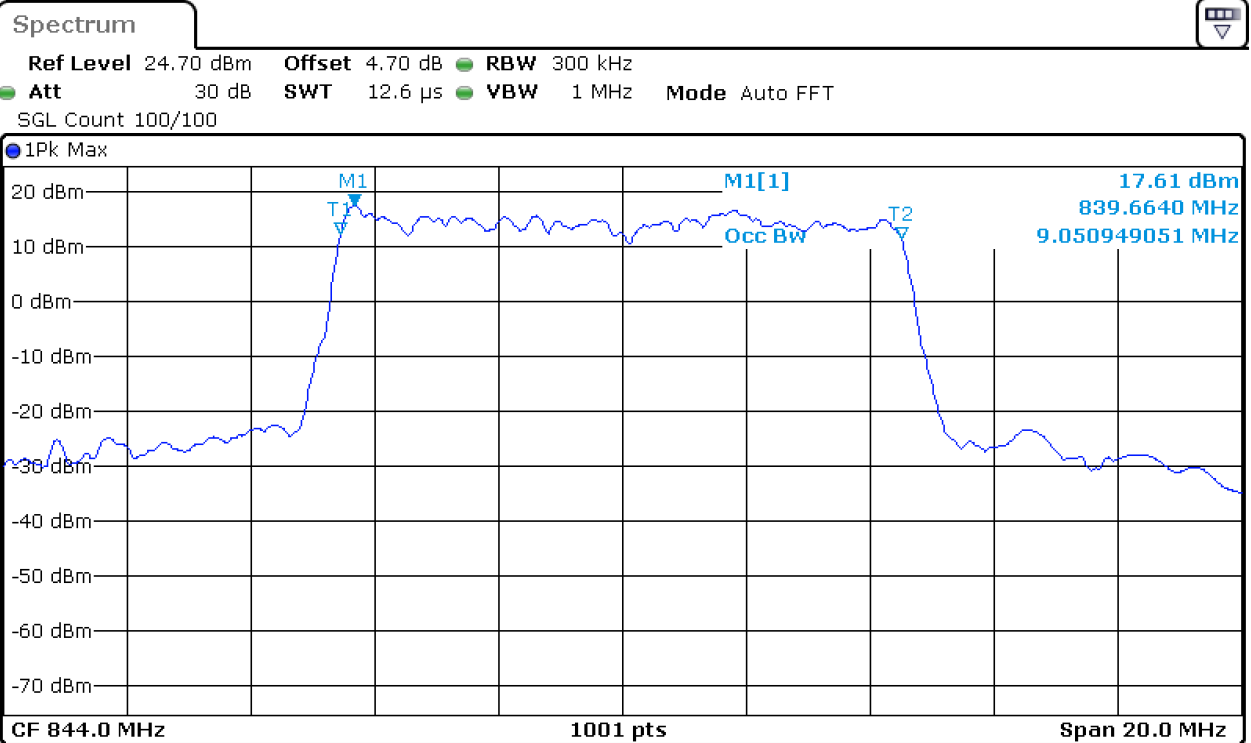


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		839.664 MHz	17.61 dBm		
T1	1		839.4446 MHz	12.49 dBm	Occ Bw	9.050949051 MHz
T2	1		848.4955 MHz	11.59 dBm		

Date: 28.DEC.2021 04:21:10



Conducted Band Edge


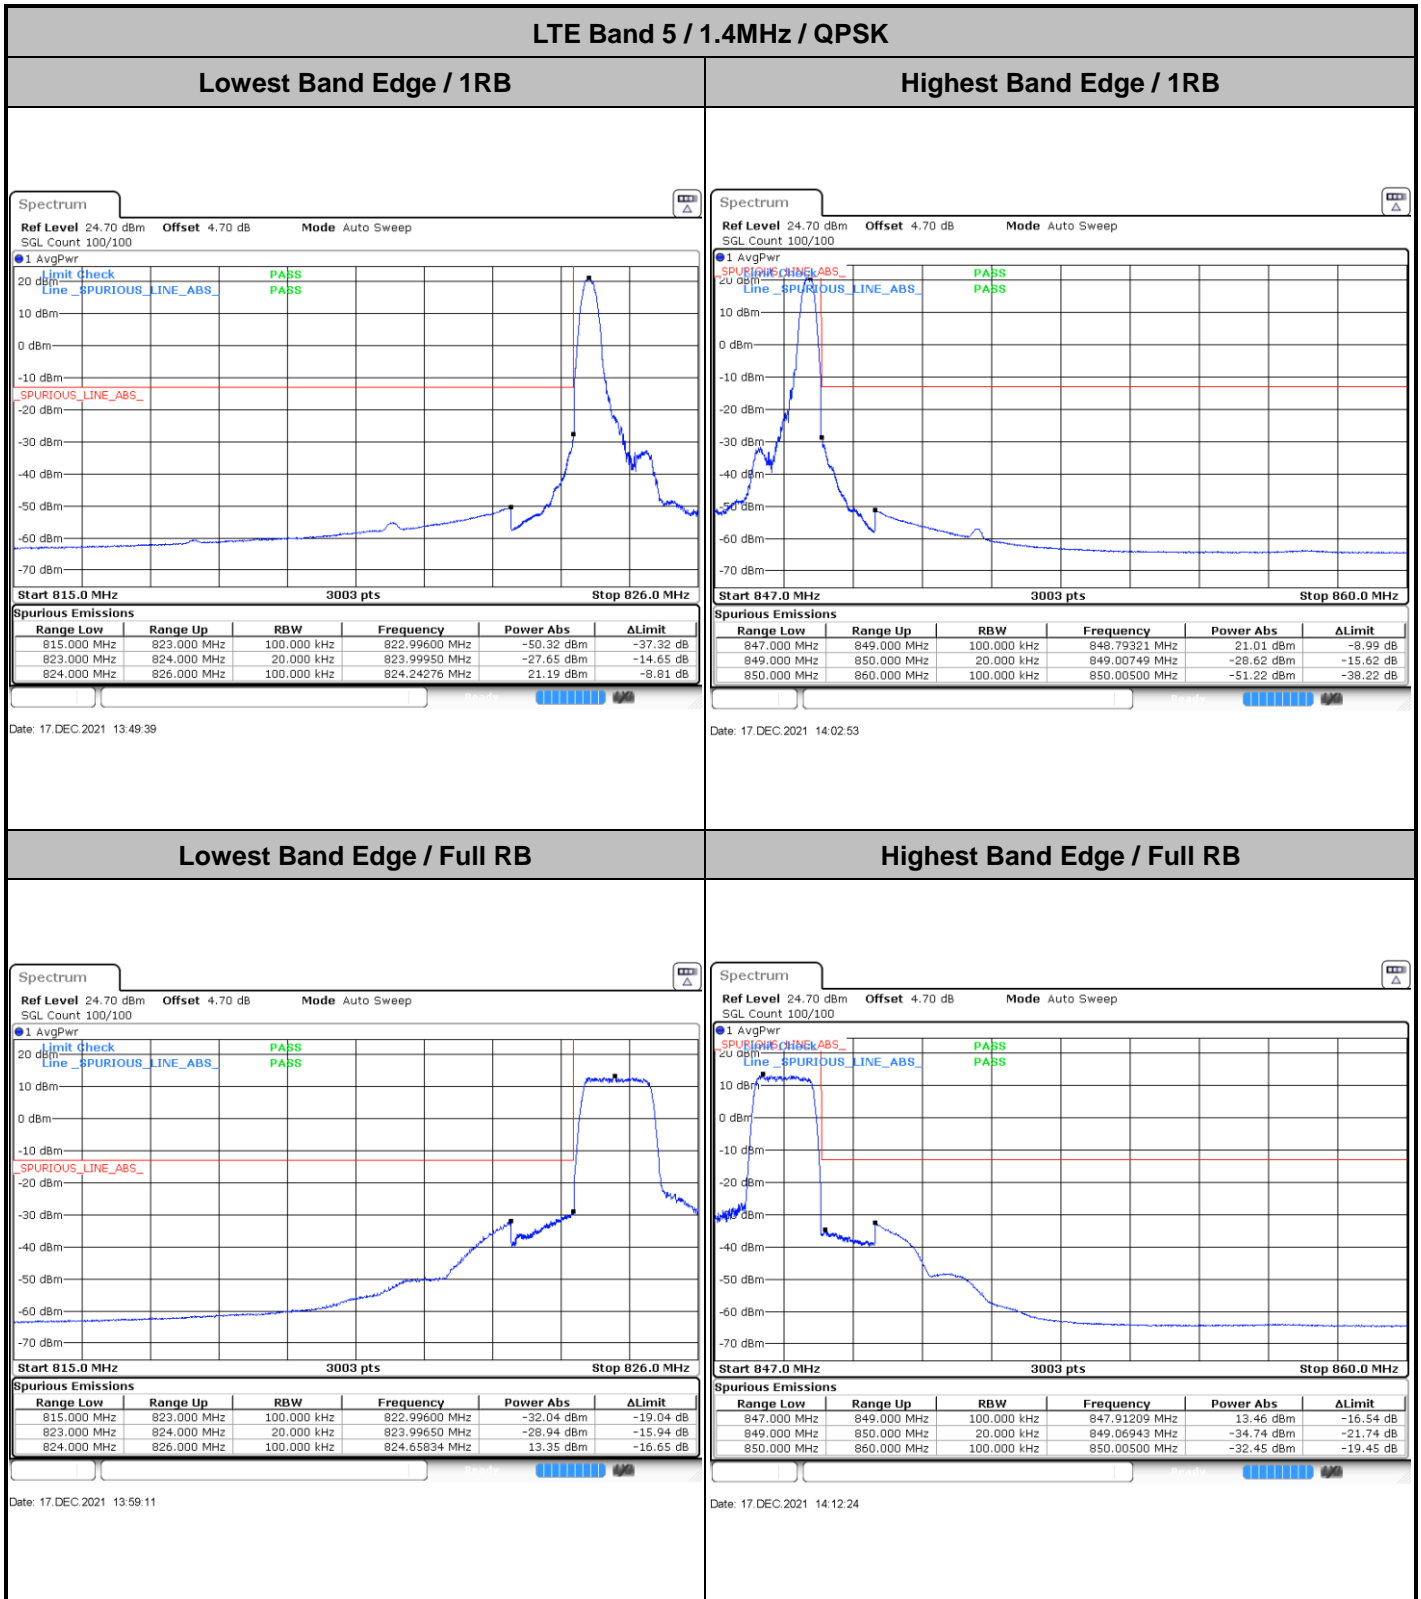




LTE Band 5 / 1.4MHz / 16QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

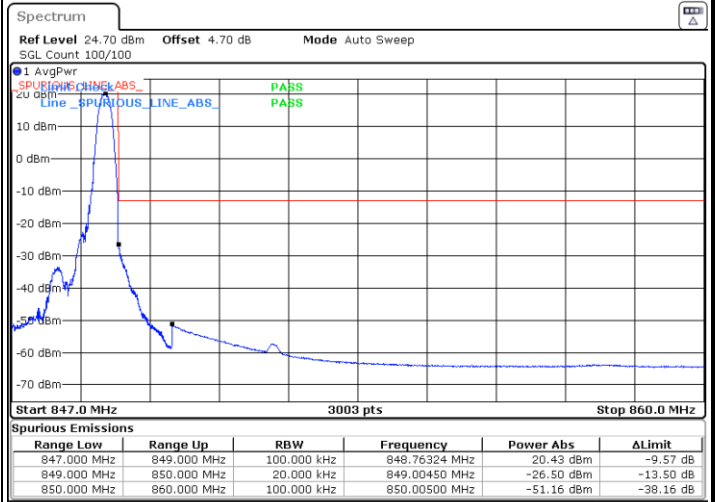
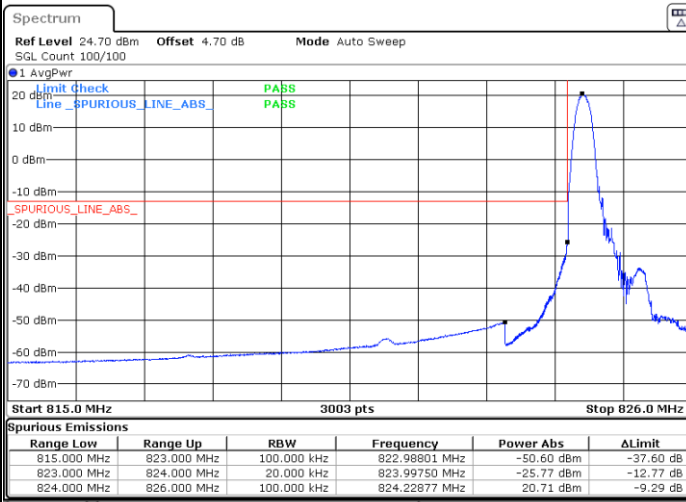


Date: 17.DEC.2021 13:51:35

Date: 17.DEC.2021 14:04:49

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

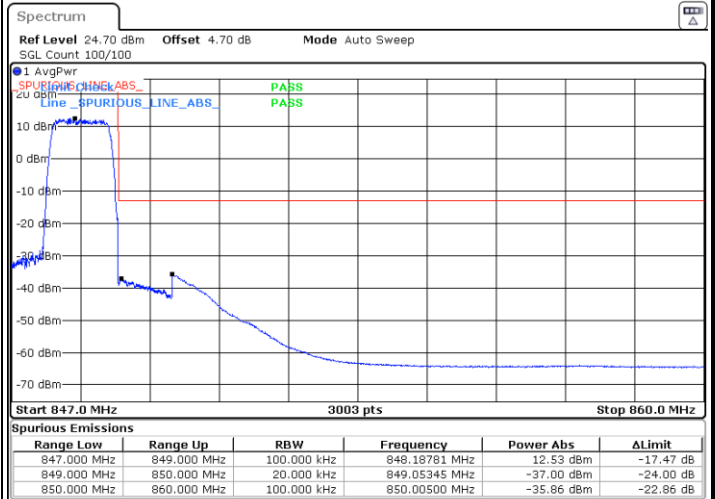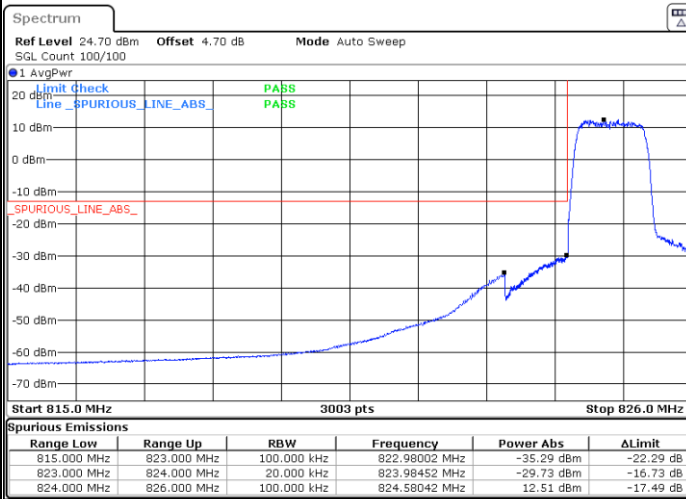

Date: 17.DEC.2021 13:57:17

Date: 17.DEC.2021 14:10:30




LTE Band 5 / 1.4MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB




Date: 17.DEC.2021 13:53:29

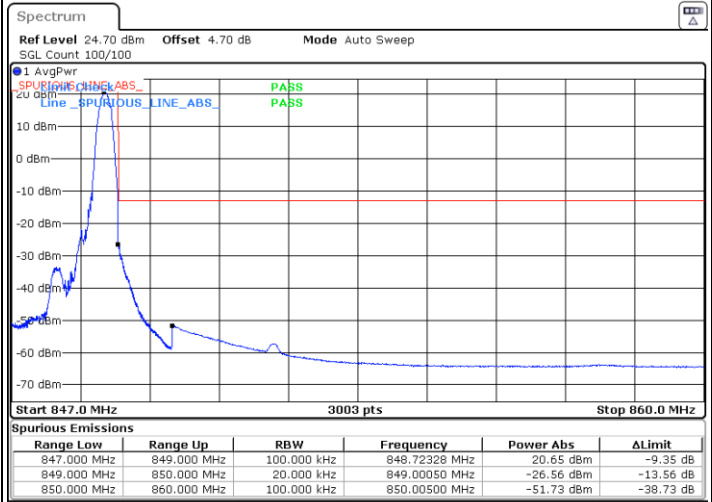


Date: 17.DEC.2021 14:06:42

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

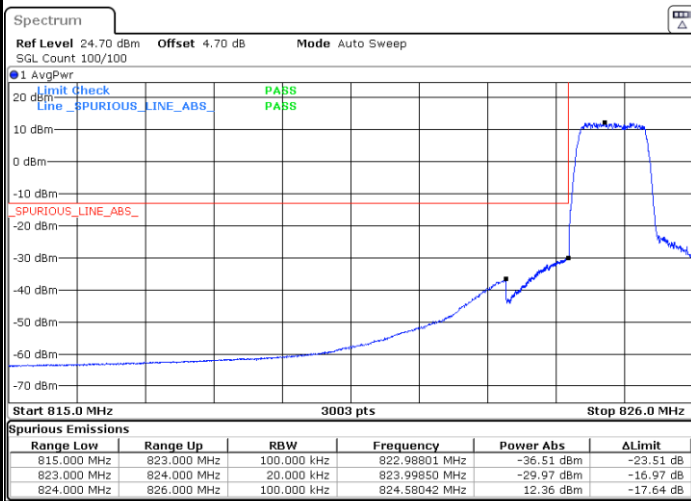

Date: 17.DEC.2021 13:55:24

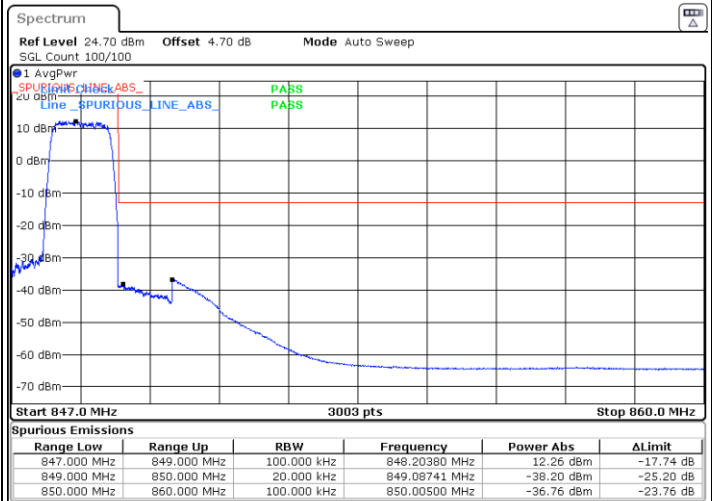


Date: 17.DEC.2021 14:08:37




LTE Band 5 / 3MHz / QPSK

Lowest Band Edge / 1RB

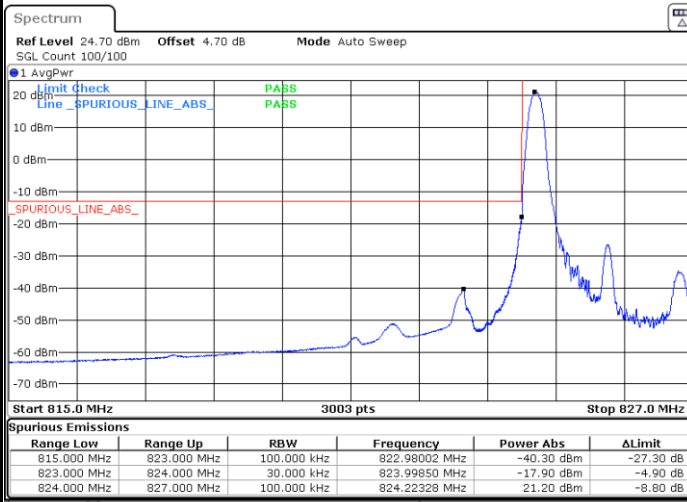


Date: 17.DEC.2021 14:15:03

Highest Band Edge / 1 RB

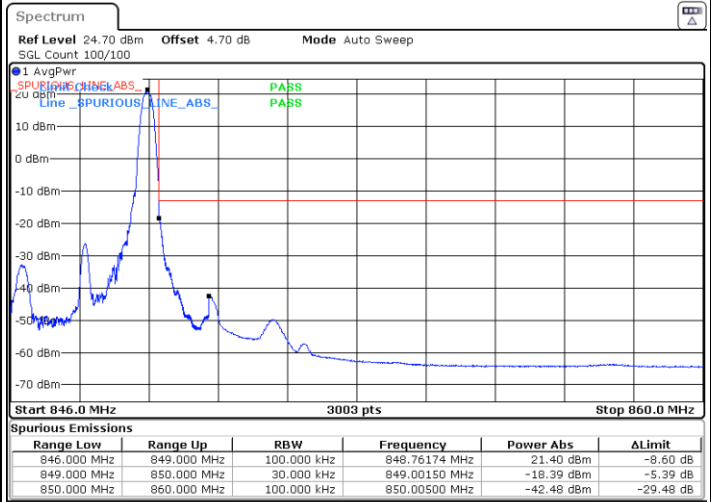


Date: 17.DEC.2021 14:28:14

Lowest Band Edge / Full RB

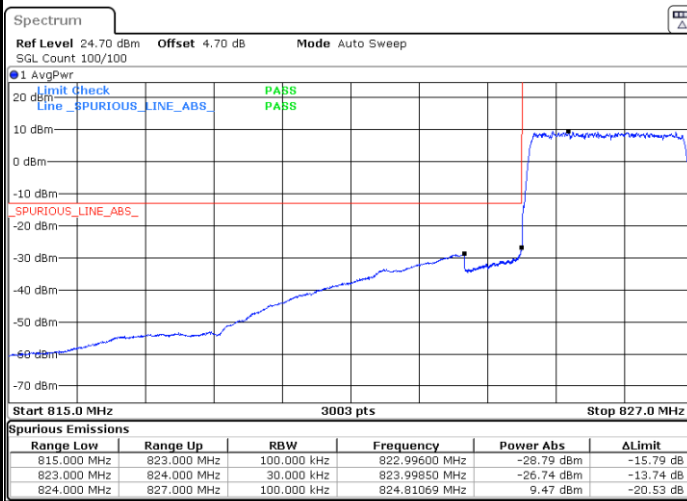

Date: 17.DEC.2021 14:24:32

Highest Band Edge / Full RB

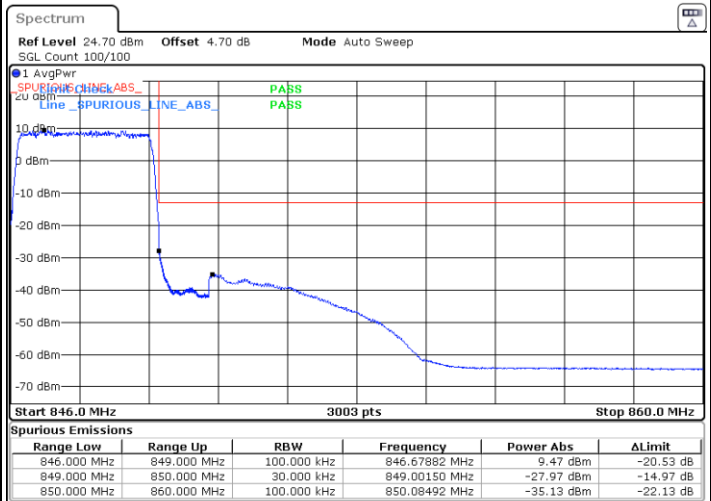


Date: 17.DEC.2021 14:37:46




LTE Band 5 / 3MHz / 16QAM

Lowest Band Edge / 1 RB

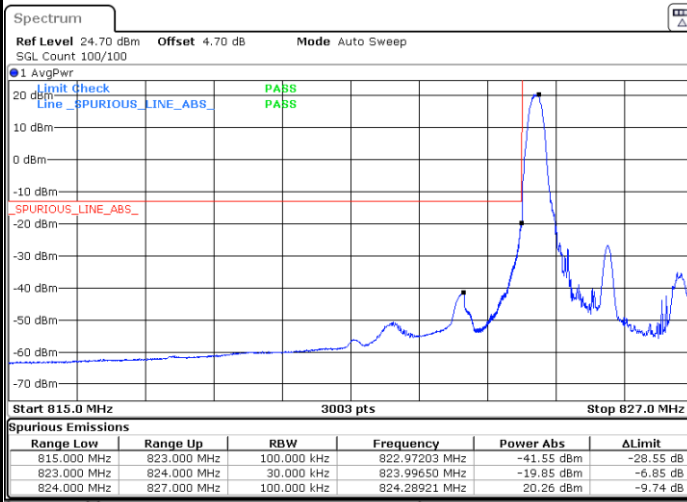


Date: 17.DEC.2021 14:16:56

Highest Band Edge / 1 RB

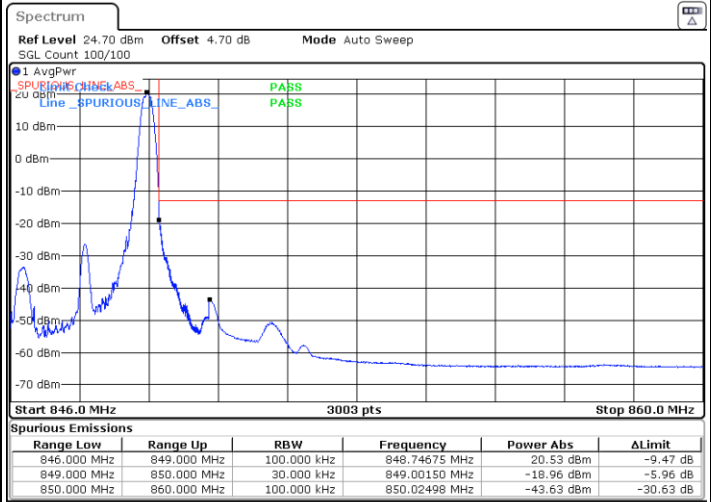


Date: 17.DEC.2021 14:30:09

Lowest Band Edge / Full RB

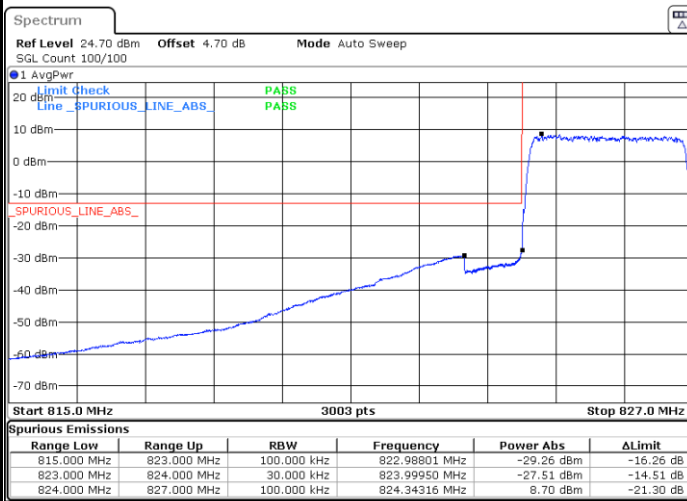

Date: 17.DEC.2021 14:22:38

Highest Band Edge / Full RB

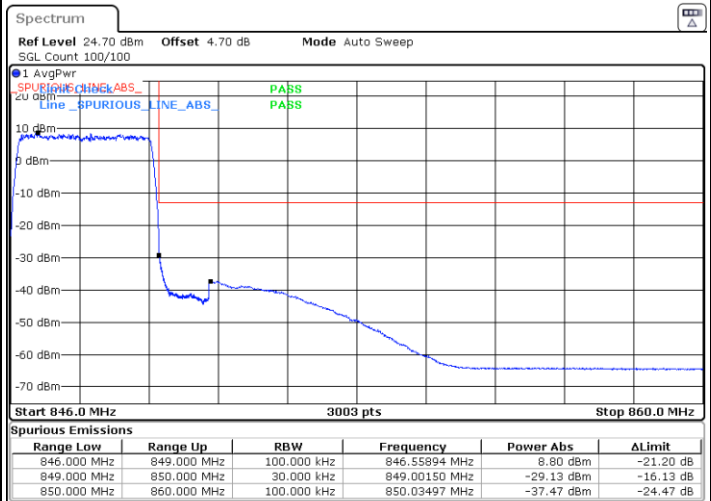



Date: 17.DEC.2021 14:35:52



LTE Band 5 / 3MHz / 64QAM

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

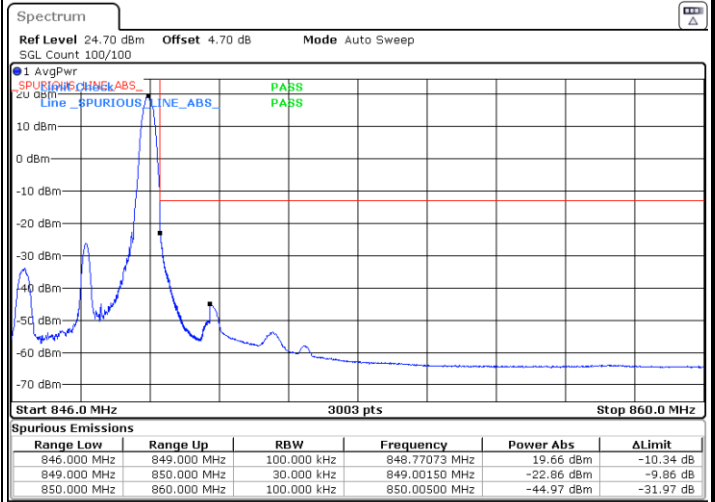
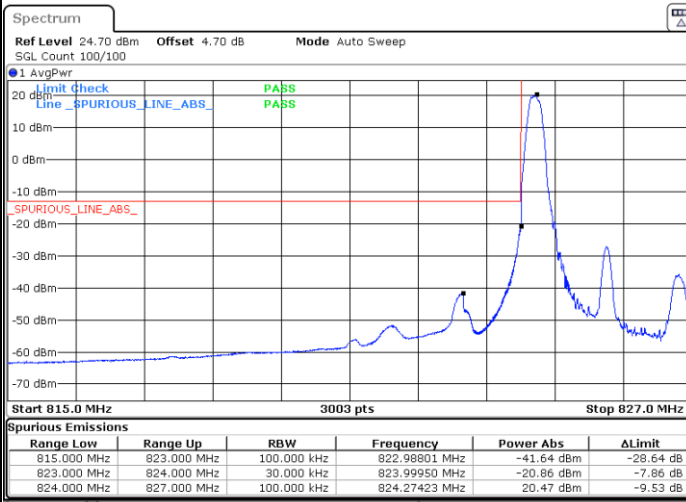


Date: 17.DEC.2021 14:18:50

Date: 17.DEC.2021 14:32:03

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

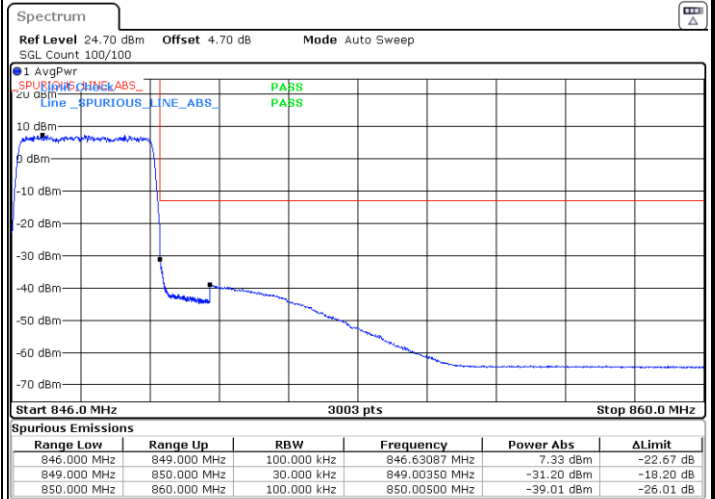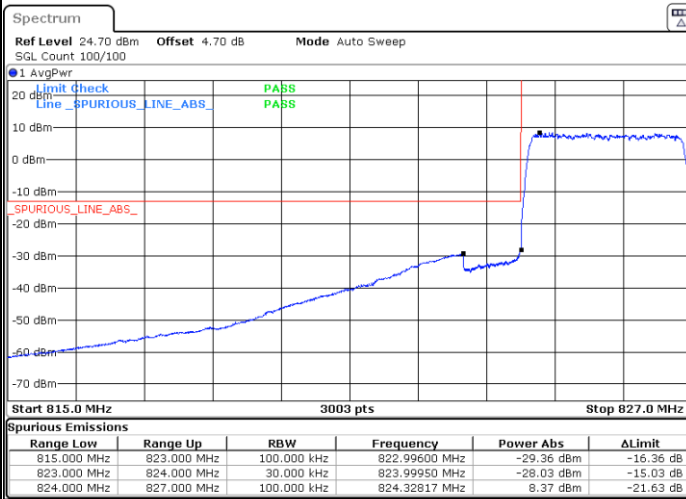


Date: 17.DEC.2021 14:20:44

Date: 17.DEC.2021 14:33:58




LTE Band 5 / 5MHz / QPSK

Lowest Band Edge / 1 RB

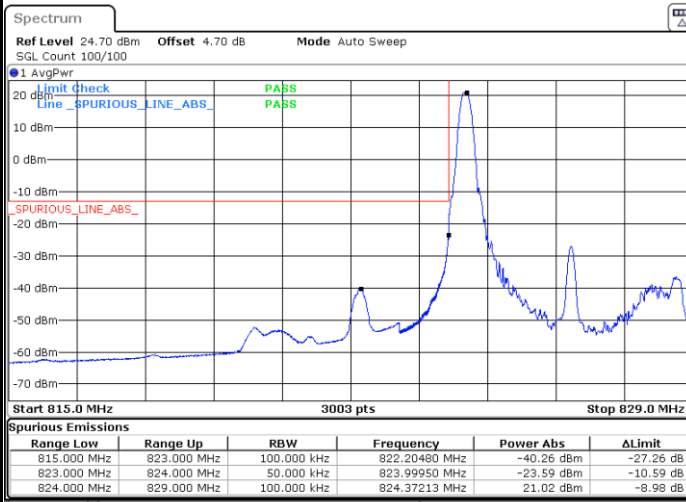


Date: 17.DEC.2021 14:40:24

Highest Band Edge / 1 RB

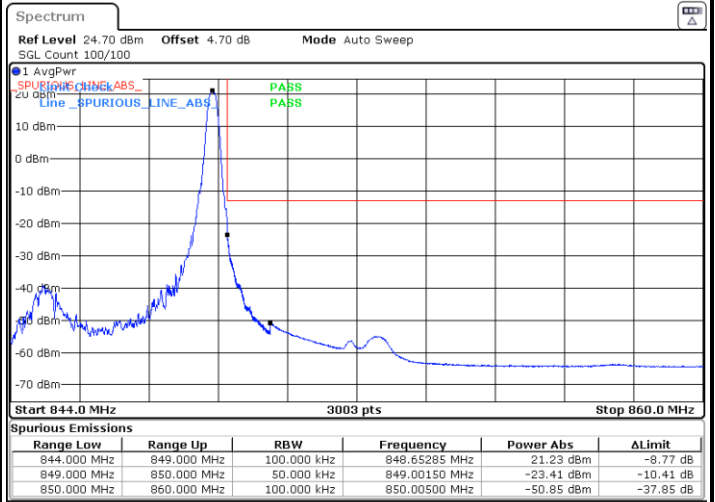


Date: 17.DEC.2021 14:53:36

Lowest Band Edge / Full RB

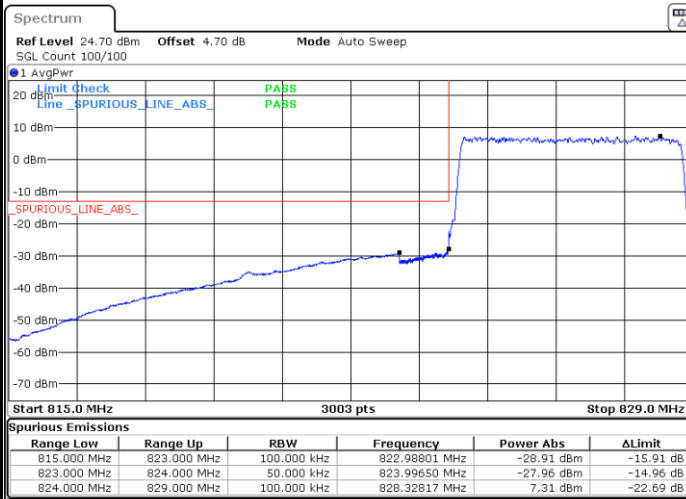

Date: 17.DEC.2021 14:49:55

Highest Band Edge / Full RB

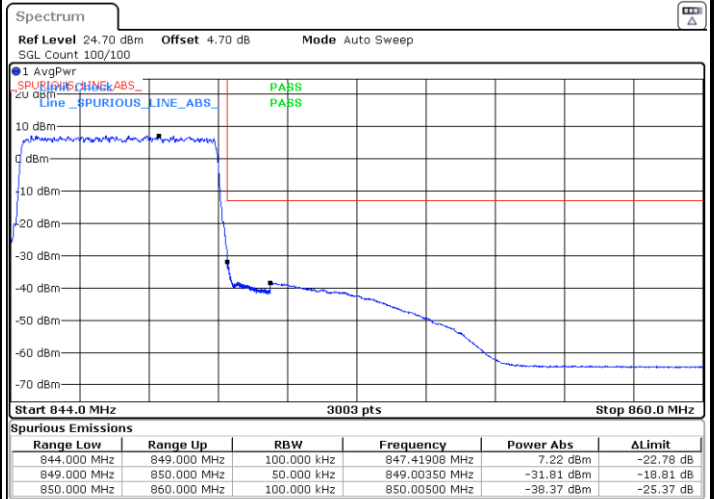

Date: 17.DEC.2021 15:03:05