

TEST REPORT

Report Number. : R14634918-E2

Applicant : Sony Corporation
1-7-1 Konan Minat-Ku
Tokyo, 108-0075, Japan

FCC ID : PY7-12907W

EUT Description : GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax,
GPS, WPT & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2023-03-13

Prepared by:
UL LLC
12 Laboratory Dr.
Research Triangle Park, NC 27709 U.S.A.
TEL: (919) 549-1400



REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	2023-02-24	Initial Issue	Charles Moody
V2	2023-03-13	Updated KDB version information in Section 3, corrected plot title typo, added VBW declaration, and updated antenna information.	Charles Moody

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
TABLE OF CONTENTS	3
1. ATTESTATION OF TEST RESULTS	5
2. TEST RESULTS SUMMARY	6
3. TEST METHODOLOGY	6
4. FACILITIES AND ACCREDITATION	6
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	7
5.1. METROLOGICAL TRACEABILITY	7
5.2. DECISION RULES.....	7
5.3. MEASUREMENT UNCERTAINTY.....	7
5.4. SAMPLE CALCULATION	7
6. EQUIPMENT UNDER TEST	8
6.1. EUT DESCRIPTION	8
6.2. MAXIMUM OUTPUT POWER.....	8
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
6.4. SOFTWARE AND FIRMWARE.....	8
6.5. WORST-CASE CONFIGURATION AND MODE.....	9
6.6. DESCRIPTION OF TEST SETUP.....	10
7. TEST AND MEASUREMENT EQUIPMENT	11
8. MEASUREMENT METHODS	14
9. ANTENNA PORT TEST RESULTS	15
9.1. ON TIME AND DUTY CYCLE.....	15
9.2. 20 dB BANDWIDTH.....	16
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	16
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	18
9.3. HOPPING FREQUENCY SEPARATION	20
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	21
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	23
9.4. NUMBER OF HOPPING CHANNELS.....	25
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	26
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	30
9.5. AVERAGE TIME OF OCCUPANCY.....	34
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	35

9.5.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	39
9.6.	<i>OUTPUT POWER</i>	43
9.6.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	44
9.6.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	45
9.6.3.	BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION	46
9.7.	<i>AVERAGE POWER</i>	47
9.7.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	48
9.7.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	48
9.7.3.	BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION	48
9.8.	<i>CONDUCTED SPURIOUS EMISSIONS</i>	49
9.8.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION	50
9.8.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	54
10.	RADIATED TEST RESULTS	58
10.1.	<i>TRANSMITTER ABOVE 1 GHz</i>	60
10.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION.....	60
10.1.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	80
10.2.	<i>WORST CASE BELOW 30MHz</i>	100
10.3.	<i>WORST CASE 30-1000MHz</i>	102
10.4.	<i>WORST CASE 18-26 GHz</i>	106
11.	AC POWER LINE CONDUCTED EMISSIONS	110
11.1.1.	AC Power Line Norm – CHAIN 0.....	111
11.1.2.	AC Power Line Norm – CHAIN 1	113
12.	SETUP PHOTOS	115

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Sony Corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0075, Japan

EUT DESCRIPTION: GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax,
GPS, WPT & NFC

SERIAL NUMBER: QV70015FA, QV7700E1FN, QV7700FRFN, QV77004MFN

SAMPLE RECEIPT DATE: 2022-12-12, 2023-01-20

DATE TESTED: 2023-01-06 TO 2023-02-01

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document.

Approved & Released For
UL LLC By:

Prepared By:



Mike Antola
Staff Engineer
Consumer Technology Division
UL LLC

Charles Moody
Engineer
Consumer Technology Division
UL LLC

2. TEST RESULTS SUMMARY

This report contains data provided by the applicant which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

Below is a list of the data provided by the customer:

- 1) Antenna gain and type (see section 6.3)
- 2) Cable loss (see sections 9.6 and 9.7)

FCC Clause	Requirement	Result	Comment
See Comment	Duty Cycle	Reporting purposes only	Per ANSI C63.10, Section 11.6.
See Comment	20dB BW	Reporting purposes only	ANSI C63.10 Sections 6.9.2.
15.247 (a)(1)	Hopping Frequency Separation	Compliant	None
15.247 (a)(1)(iii)	Number of Hopping Channels		
15.247 (a)(1)(iii)	Average Time of Occupancy		
15.247 (b)(1)	Output Power		
See Comment	Average Power	Reporting purposes only	Per ANSI C63.10, Section 11.9.2.3.2.
15.247 (d)	Conducted Spurious Emissions	Compliant	None
15.209, 15.205	Radiated Emissions		
15.207	AC Mains Conducted Emissions		

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, and KDB 414788 D01 Radiated Test Site v01r01.

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, certification # 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A		27265	

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss}$$

$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G Phone with BT, DTS,/UNII a/b/g/n/ac/ax, GPS, WPT & NFC. This report covers BT testing.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
Chain 0			
2402 - 2480	Basic GFSK	14.21	26.36
2402 - 2480	Enhanced DQPSK	16.28	42.46
2402 - 2480	Enhanced 8PSK	16.81	47.97
Chain 1			
2402 - 2480	Basic GFSK	13.82	24.10
2402 - 2480	Enhanced DQPSK	16.03	40.09
2402 - 2480	Enhanced 8PSK	16.60	45.71

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

The radio utilizes two antennas for diversity, with the following types and maximum gains:

Chain	Designation in Documentation	Type	Frequency Range (MHz)	Maximum Gain (dBi)
0	WiFi Main	Loop	2402-2480	-0.43
1	WiFi Sub	Monopole	2402-2480	-4.44

6.4. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was 0.81 for the radiated sample and 0.293 for the conducted sample

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. This was found to be GFSK at high channel, 2480 MHz.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low and high channels, as well as mid channel for radiated emissions. Bandedged and spurious emissions were run at GFSK and 8PSK as worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y, and Z on each antenna. It was determined that X orientation was worst-case orientation for Chain 0 and Chain 1. Therefore, all final radiated testing was performed with the EUT in X orientation for Chain 0 and Chain 1 testing.

Worst-case data rates as provided by the client were:

GFSK mode: DH5
8PSK mode: 3-DH5

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	Inspiron 15 3000	5KPQJP3	
AC Adaptor	Sony	XQZ-UC1	1821W34209742	NA
Headphones	Sony	MDR-EX15AP	NA	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB-C	1	USB-C	Non-Shielded	<3m	Connected to power supply
2	3.5mm	1	AUX	Non-Shielded	<3m	Connected to headphones

TEST SETUP

The EUT is setup as a standalone device. Test software exercised the radio card.

SETUP DIAGRAMS

Please refer to R14634918-EP2 for setup diagrams

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Common Equipment					
Conducted Room 2					
SA0025	Spectrum Analyzer	Keysight Technologies	N9030A	2022-05-02	2023-05-02
PWM003	RF Power Meter	Keysight Technologies	N1911A	2022-09-10	2023-09-10
PWS005	Peak and Avg Power Sensor, 50MHz to 18GHz	Keysight Technologies	N1921A	2022-06-15	2023-06-15
PWS001 (PRE0137347)	Peak and Avg Power Sensor, 50MHz to 18GHz	Keysight Technologies	N1921A	2022-07-07	2023-07-07
HI0090	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
76021	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	NA	NA
SOFTEMI	Antenna Port Software	UL	Version 2022.8.16	NA	NA
Additional Equipment used					
MM0167 (PRE0126458)	True RMS Multimeter	Agilent	U1232A	2021-08-17	2023-08-17
CBL102	Armored Test Cable, 40GHz Male	Mini-Circuits	KBL-1.5FT-LOW+	2022-06-27	2023-06-27
CLB103	Armored Test Cable, 40GHz Male	Mini-Circuits	KBL-1.5FT-LOW+	2022-06-23	2023-06-23
226561	SMA Coaxial 10dB Attenuator 25MHz-18GHz	CentricRF	C18S2-10	2022-05-03	2023-05-03
226563	SMA Coaxial 10dB Attenuator 25MHz-18GHz	CentricRF	C18S2-10	2022-05-03	2023-05-03

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL087	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3W06143-240	2022-04-05	2023-04-05
HI0091	Environmental Meter	Fisher Scientific	15-077-963	2022-07-20	2023-07-20
LISN003	LISN, 50-ohm/50-uH, 250uH 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50/250-25-2-01	2022-08-01	2023-08-01
75141	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2022-08-03	2023-08-03
ATA222	Transient Limiter, 0.009-100MHz	Electro-Metrics	EM-7600	2022-04-05	2023-04-05
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02397)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Miscellaneous (if needed)					
CDECABLE001	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2022-09-12	2023-09-12

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 1)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
0.009-30MHz					
135144	Active Loop Antenna	ETS-Lindgren	6502	2023-01-17	2024-01-17
18-40 GHz					
204704	Horn Antenna, 18-26.5GHz	Com-Power	AH-626	2022-07-11	2023-07-11
Gain-Loss Chains					
C1-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2022-05-05	2023-05-05
C1-SAC04	Gain-loss string: 18-40GHz	Various	Various	2022-05-05	2023-05-05
Receiver & Software					
SA0020	Spectrum Analyzer	Agilent	E4446A	2022-06-08	2023-06-08
206496	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-02-15	2023-02-15
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
200539	Environmental Meter	Fisher Scientific	15-077-963 s/n 18474341	2022-10-05	2023-10-05

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
30-1000 MHz					
AT0074	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2022-09-07	2023-09-07
1-18 GHz					
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-03-21	2023-03-21
Gain-Loss Chains					
C2-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2022-05-10	2023-05-10
C2-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-10	2023-05-10
Receiver & Software					
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-03-08	2023-03-08
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
Additional Equipment used					
210642	Environmental Meter	Fisher Scientific	15-077-963 s/n 181474409	2021-08-16	2023-08-16

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0067	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-05-24	2023-05-24
	Gain-Loss Chains				
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-20	2023-05-20
	Receiver & Software				
SA0026	Spectrum Analyzer	Agilent	N9030A	2022-08-02	2023-08-02
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
210642	Environmental Meter	Fisher Scientific	15-077-963 (s/n 181474409)	2022-10-05	2023-10-05

8. MEASUREMENT METHODS

On Time and Duty Cycle: ANSI C63.10-2013 Section 11.6

Occupied BW (20dB): ANSI C63.10-2013 Section 6.9.2

Carrier Frequency Separation: ANSI C63.10-2013 Section 7.8.2

Number of Hopping Frequencies: ANSI C63.10-2013 Section 7.8.3

Time of Occupancy (Dwell Time): ANSI C63.10-2013 Section 7.8.4

Peak Output Power: ANSI C63.10-2013 Section 7.8.5

Conducted Spurious Emissions: ANSI C63.10-2013 Section 7.8.8

Conducted Band-Edge: ANSI C63.10-2013 Section 6.10.4

General Radiated Spurious Emissions: ANSI C63.10-2013 Section 6.3 to 6.6

Radiated Band-edge: ANSI C63.10-2013 Section 6.10.5

AC Power-line conducted emissions: ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS





None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
Bluetooth GFSK Chain 0	2.895	3.750	0.772	77.20	2.25	0.345
Bluetooth 8PSK Chain 0	2.880	3.750	0.768	76.80	2.29	0.347
Bluetooth GFSK Chain 1	2.895	3.750	0.772	77.20	2.25	0.345
Bluetooth 8PSK Chain 1	2.895	3.750	0.772	77.20	2.25	0.345

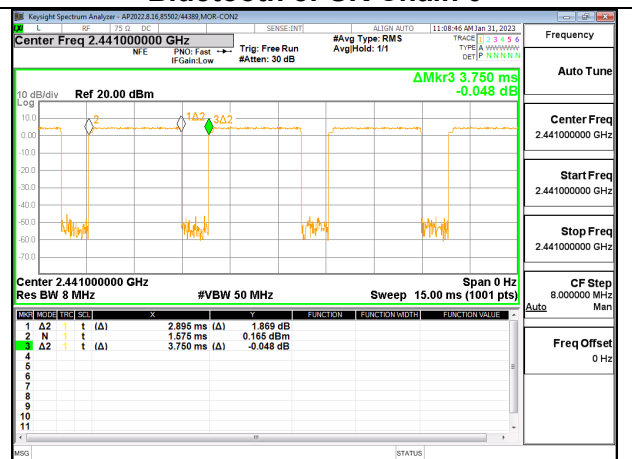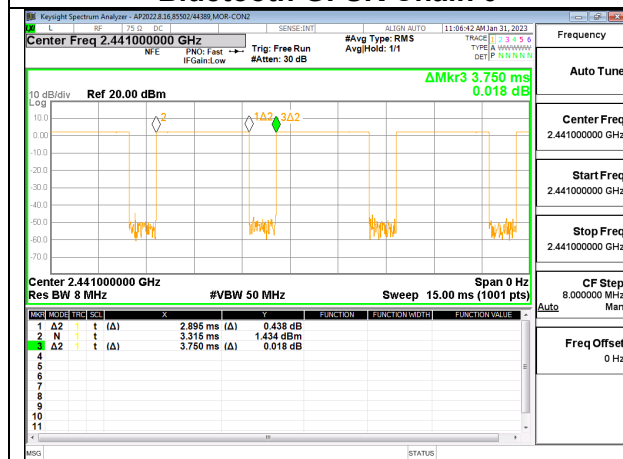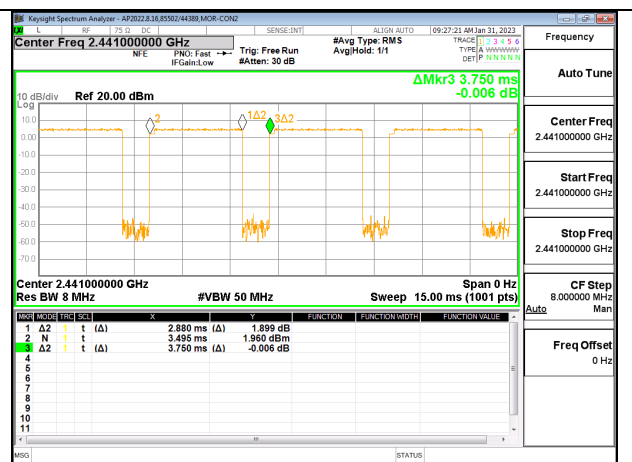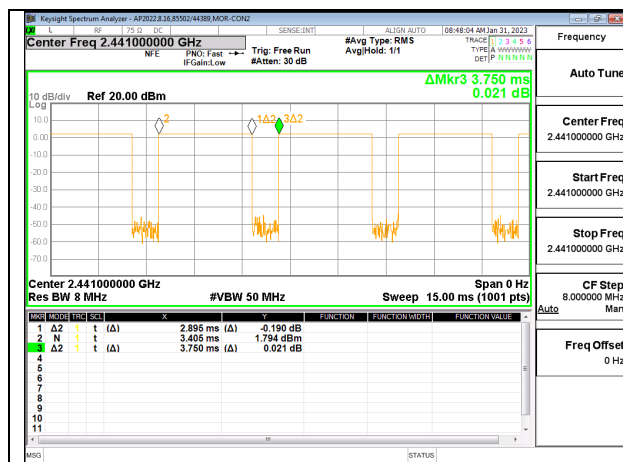

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


Chain 0

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.940
Mid	2441	0.940
High	2480	0.914

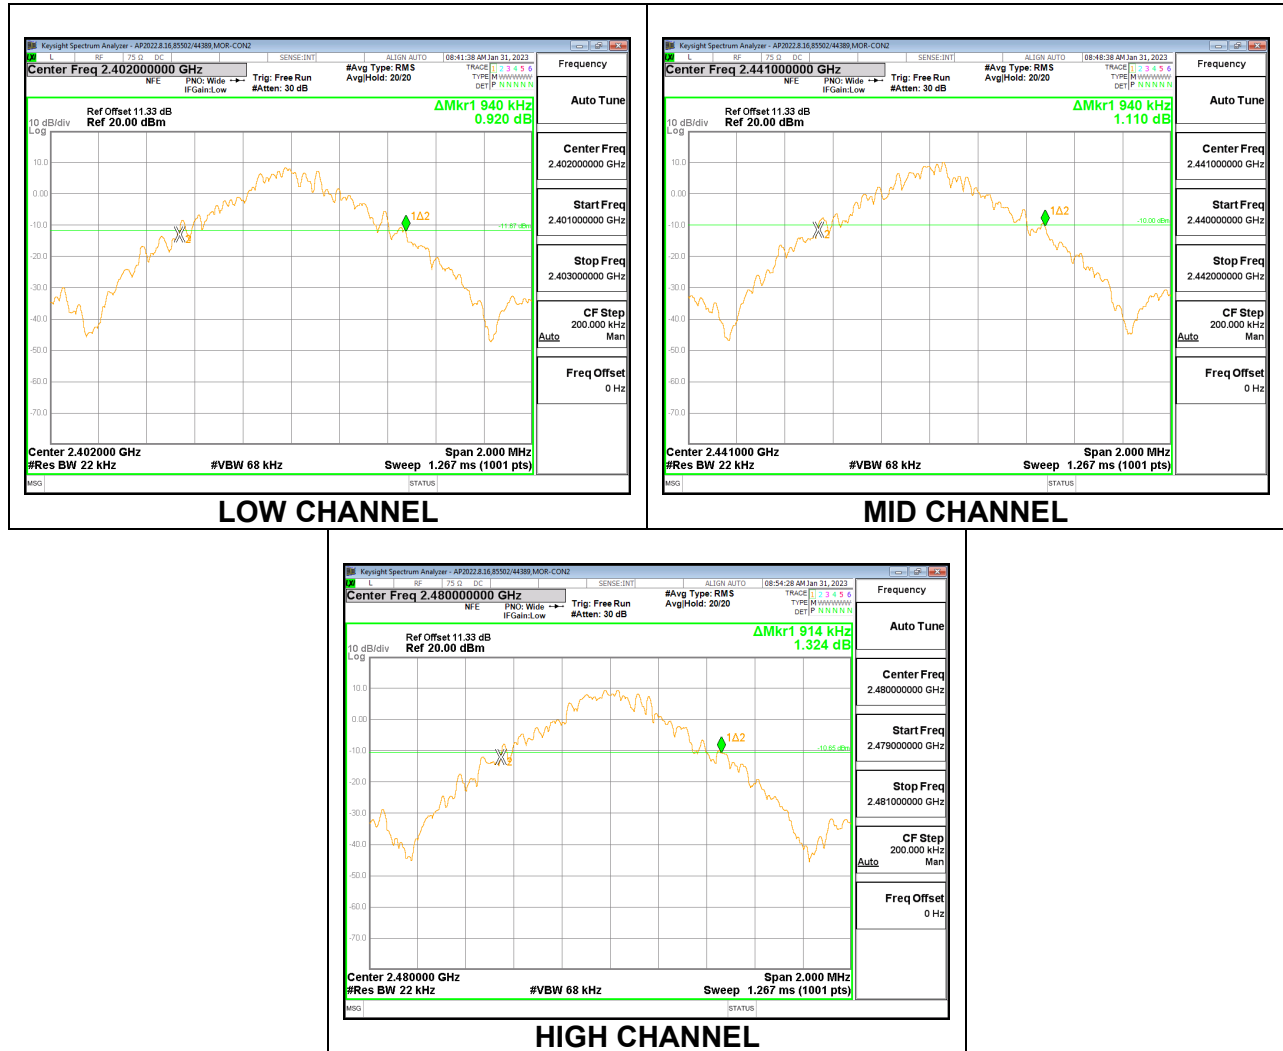

Chain 1



Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.916
Mid	2441	0.936
High	2480	0.930

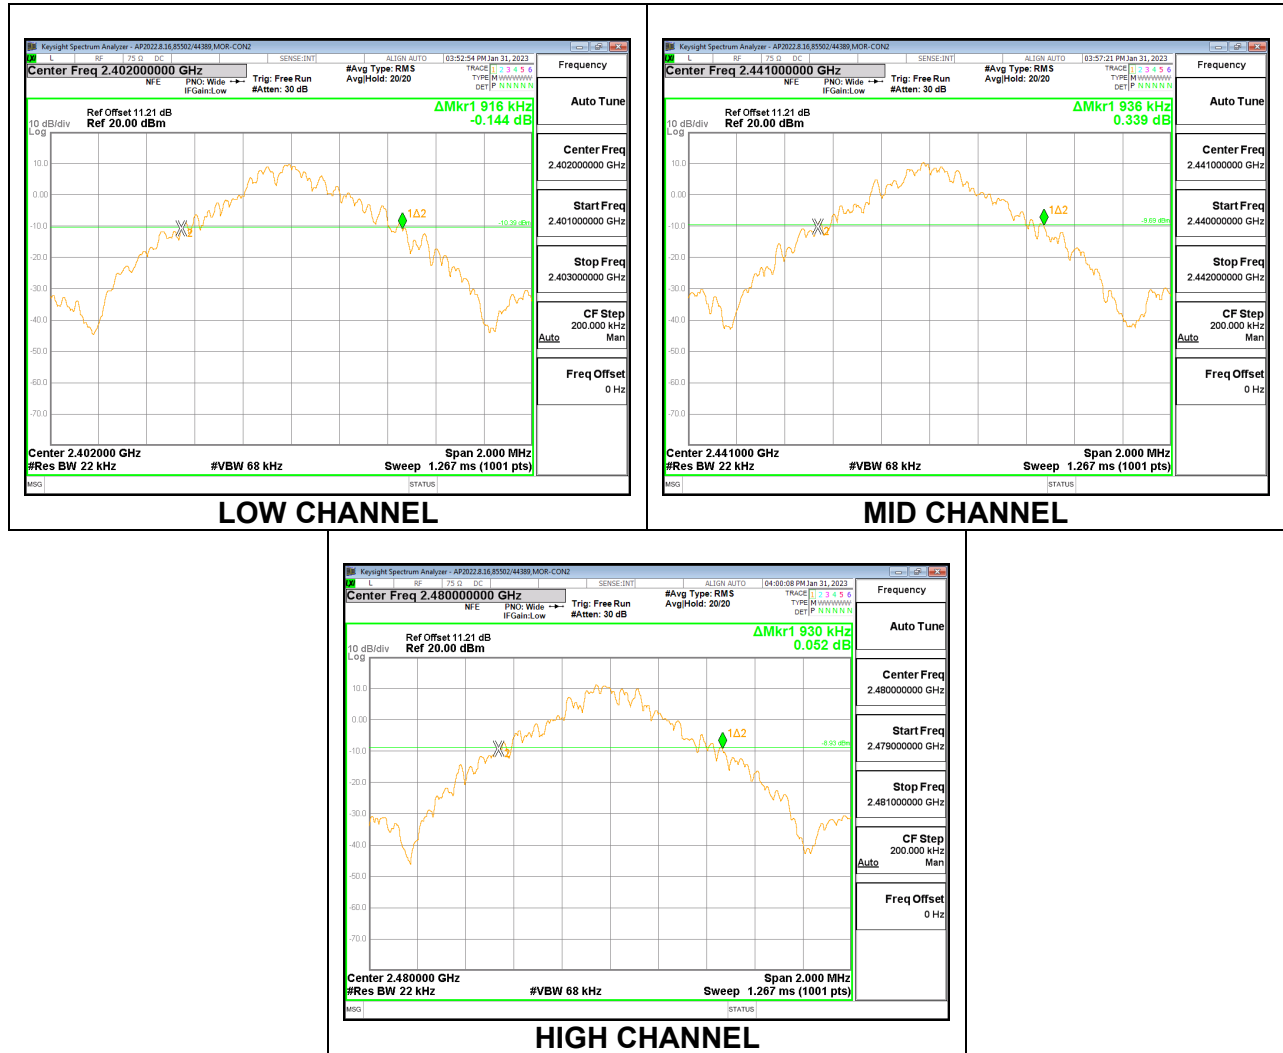

9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


Chain 0

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.300
Mid	2441	1.244
High	2480	1.352

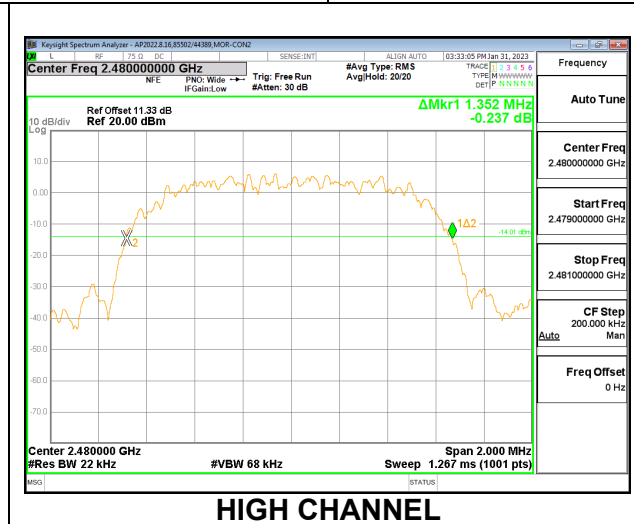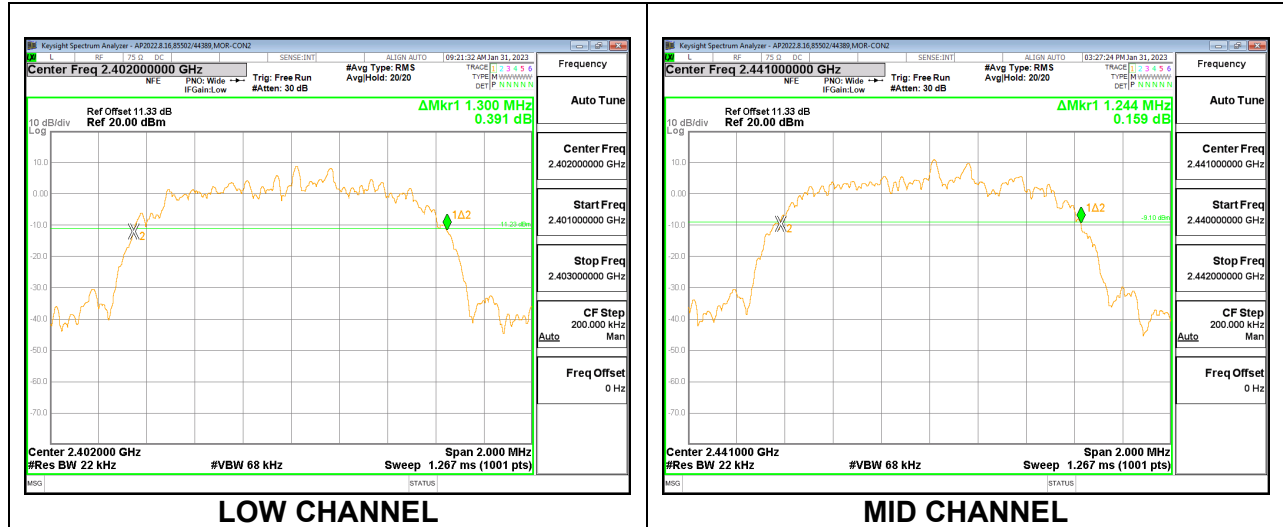

Chain 1

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.274
Mid	2441	1.346
High	2480	1.290

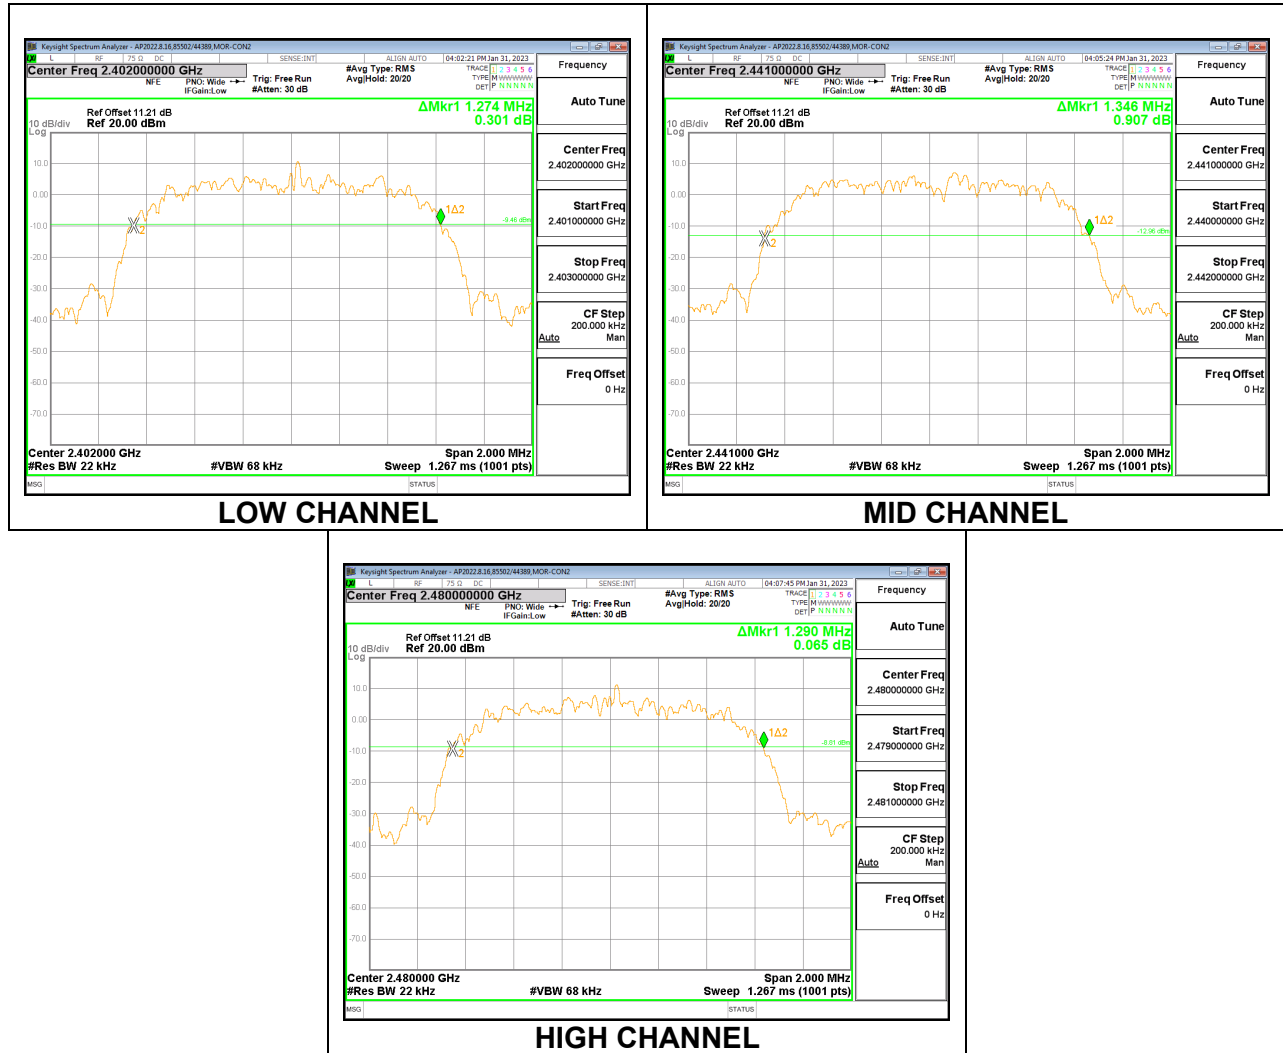

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.


RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Chain 0

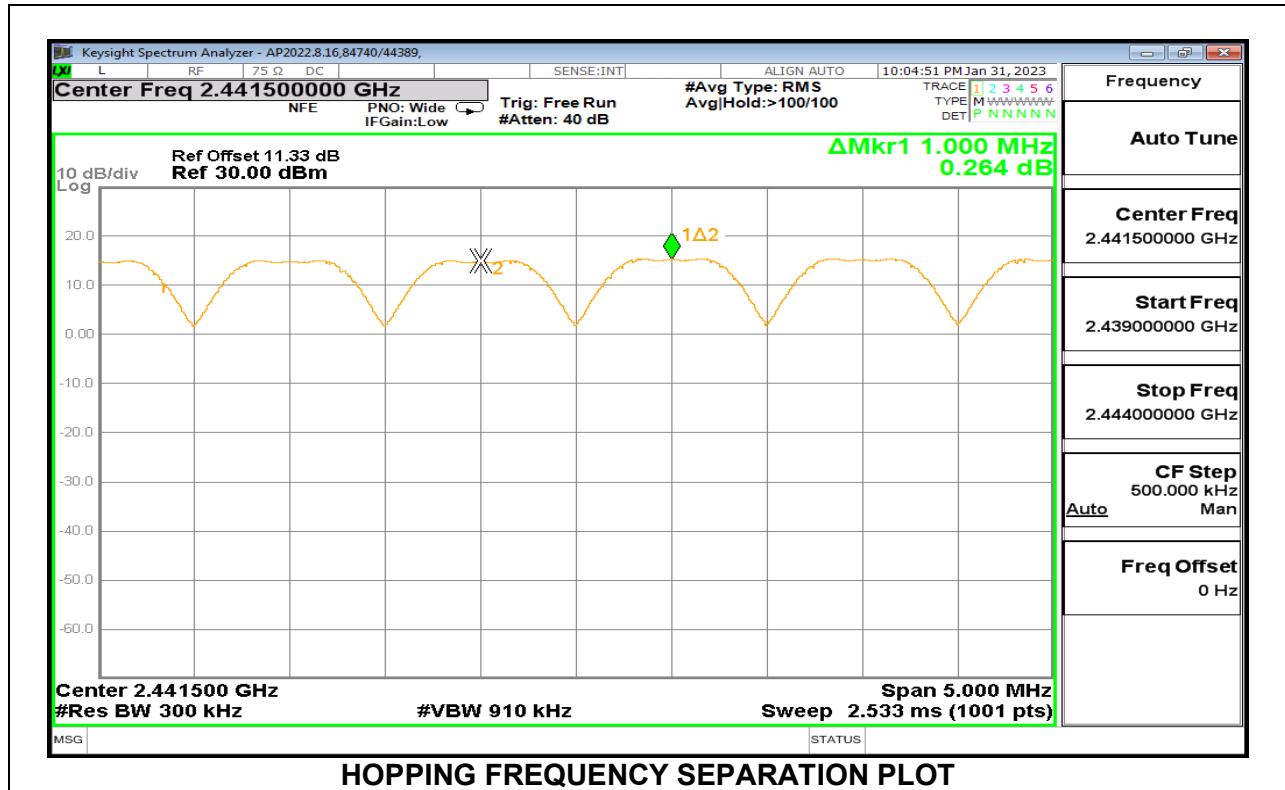


Chain 1

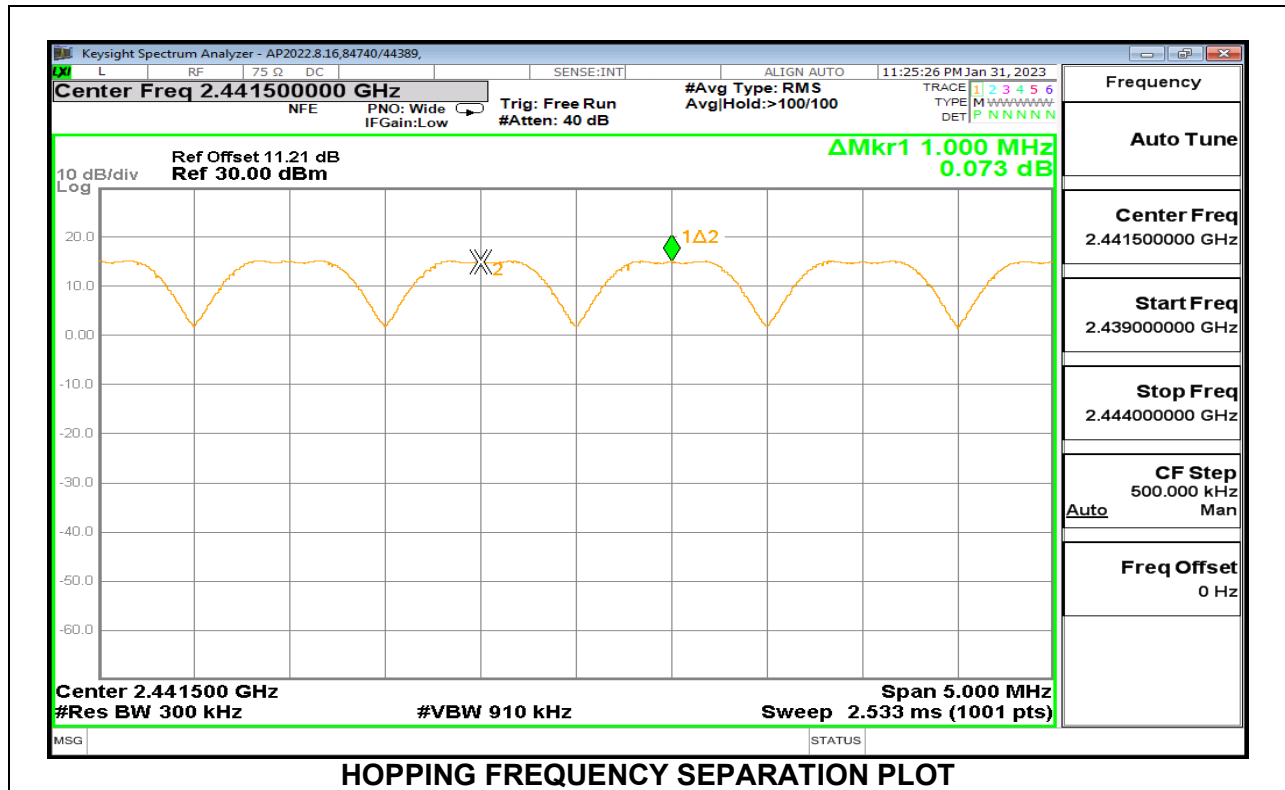

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


Chain 0

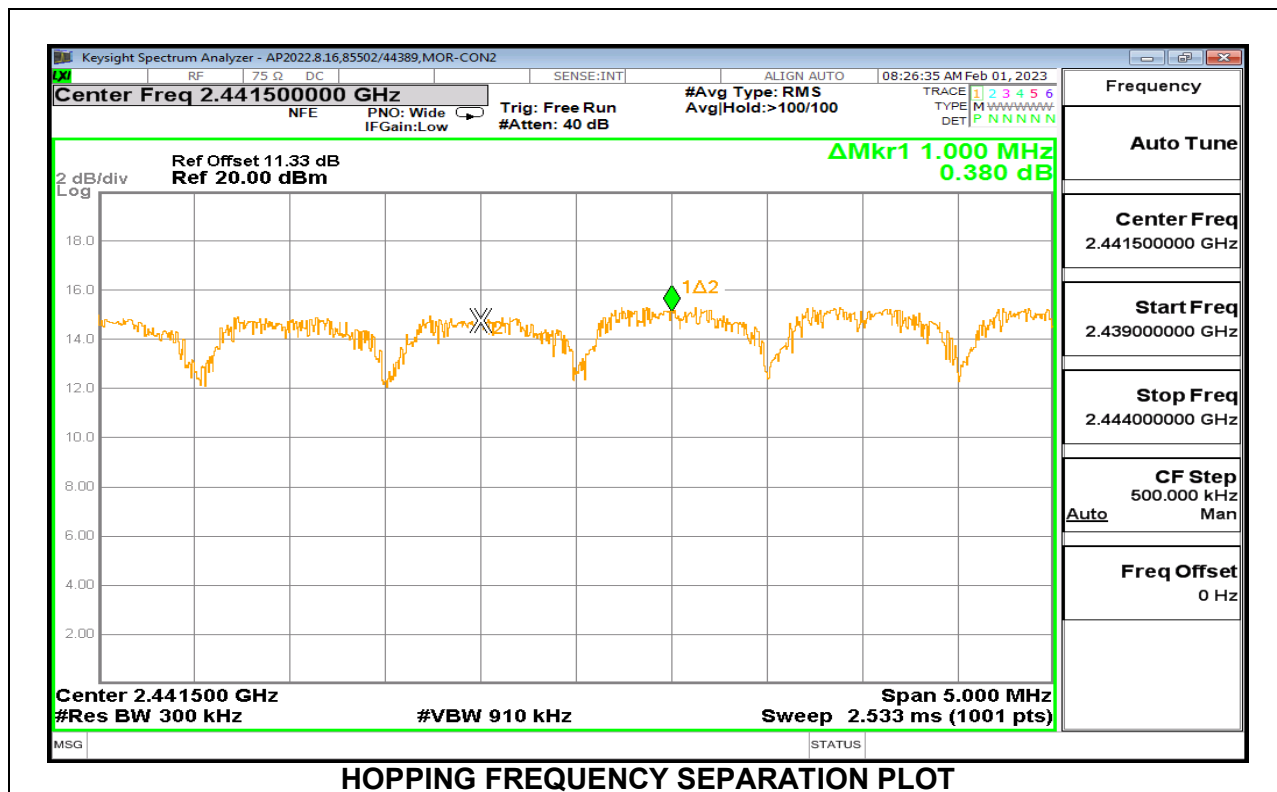

Since output power is <125mW (21dBm), Separation can be > 2/3 20dB BW

Output Power (dBm)	Separation (MHz)	20dB BW (MHz)	2/3 dB BW (MHz)	Margin (MHz)
16.81	1.000	1.244	0.829	-0.171

Chain 1

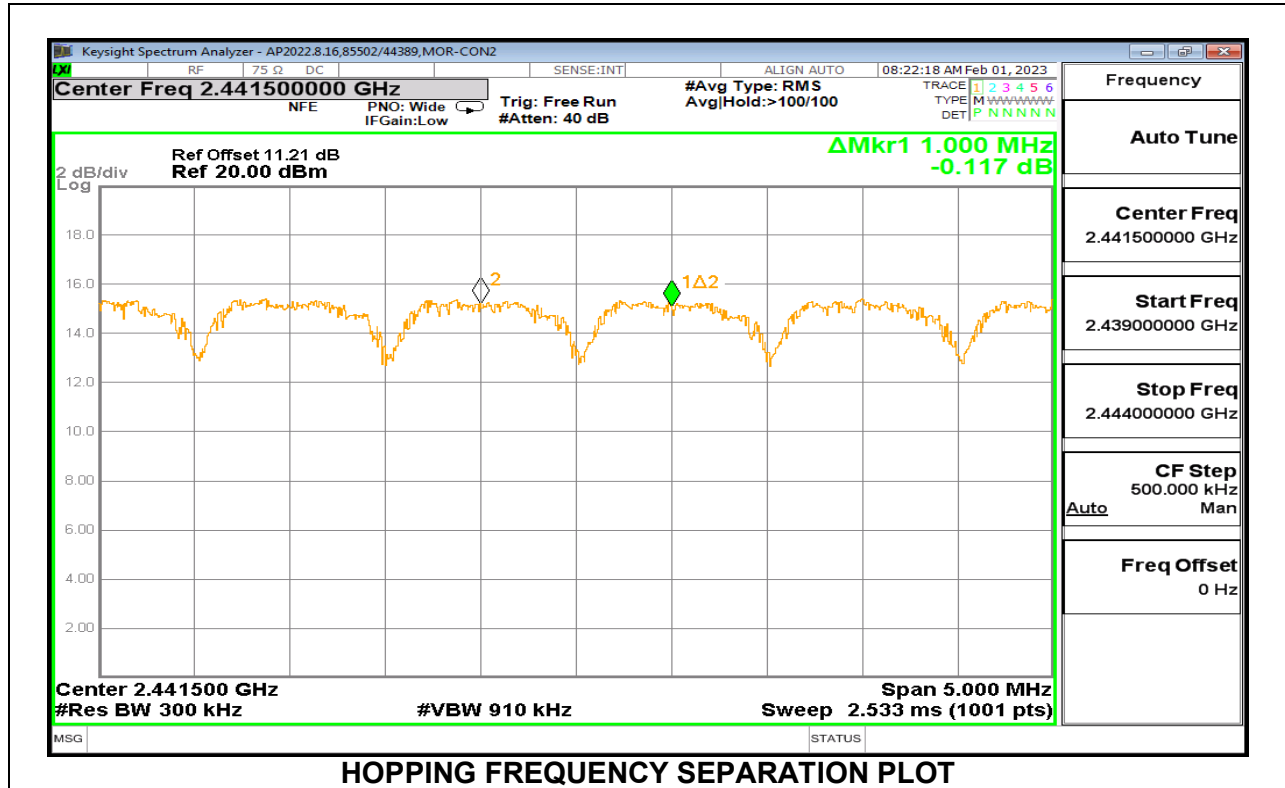

Since output power is <125mW (21dBm), Separation can be > 2/3 20dB BW

Output Power (dBm)	Separation (MHz)	20dB BW (MHz)	2/3 dB BW (MHz)	Margin (MHz)
16.60	1.000	1.346	0.897	-0.103

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels Observed


9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Chain 0

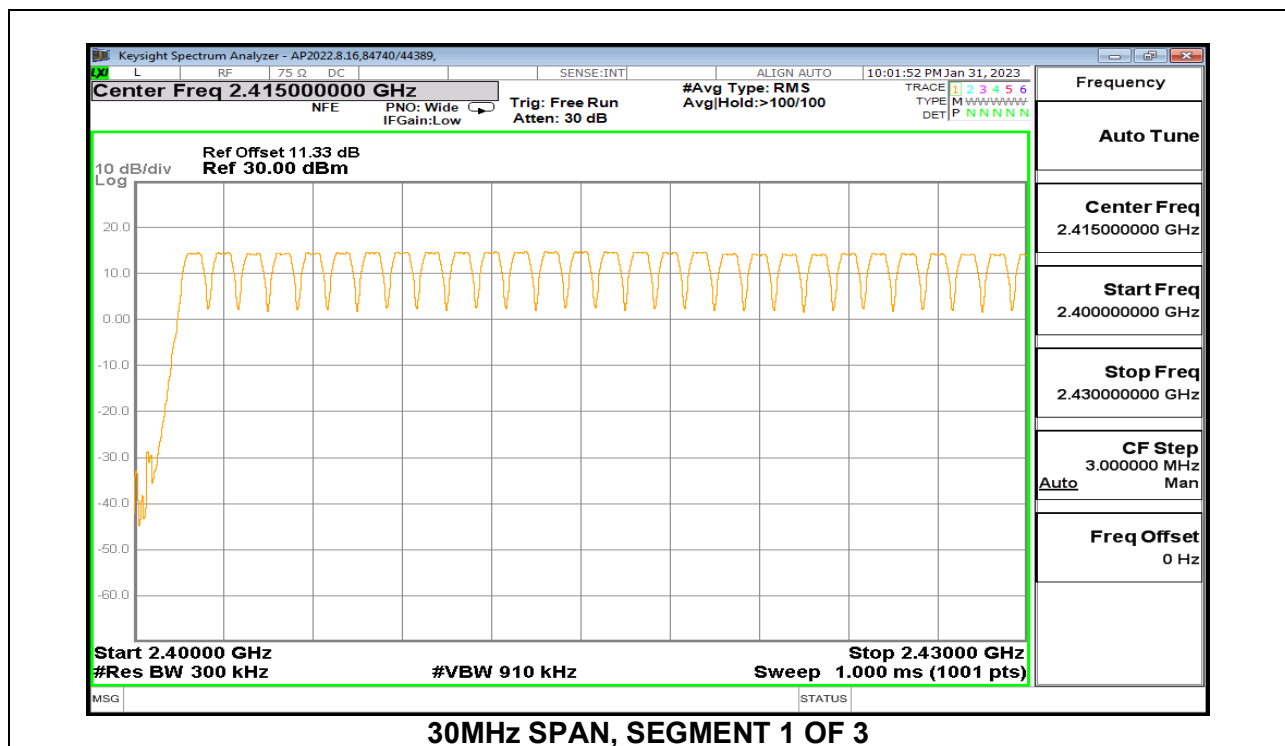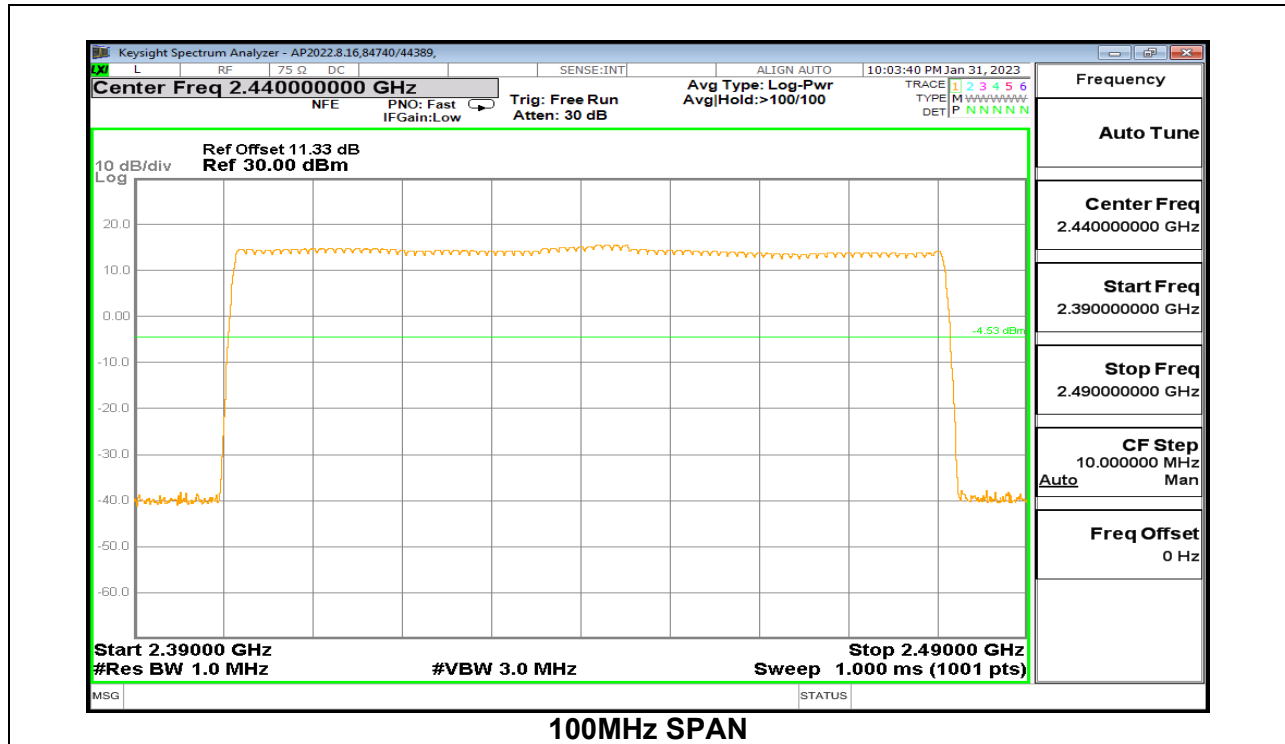


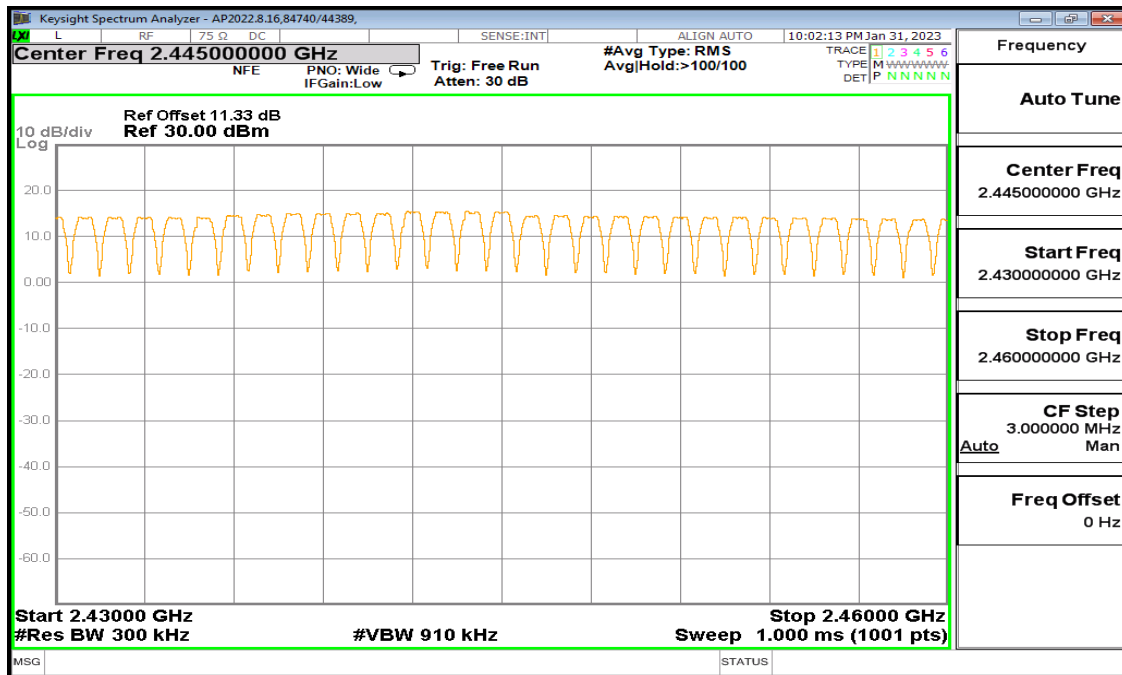



30MHz SPAN, SEGMENT 2 OF 3

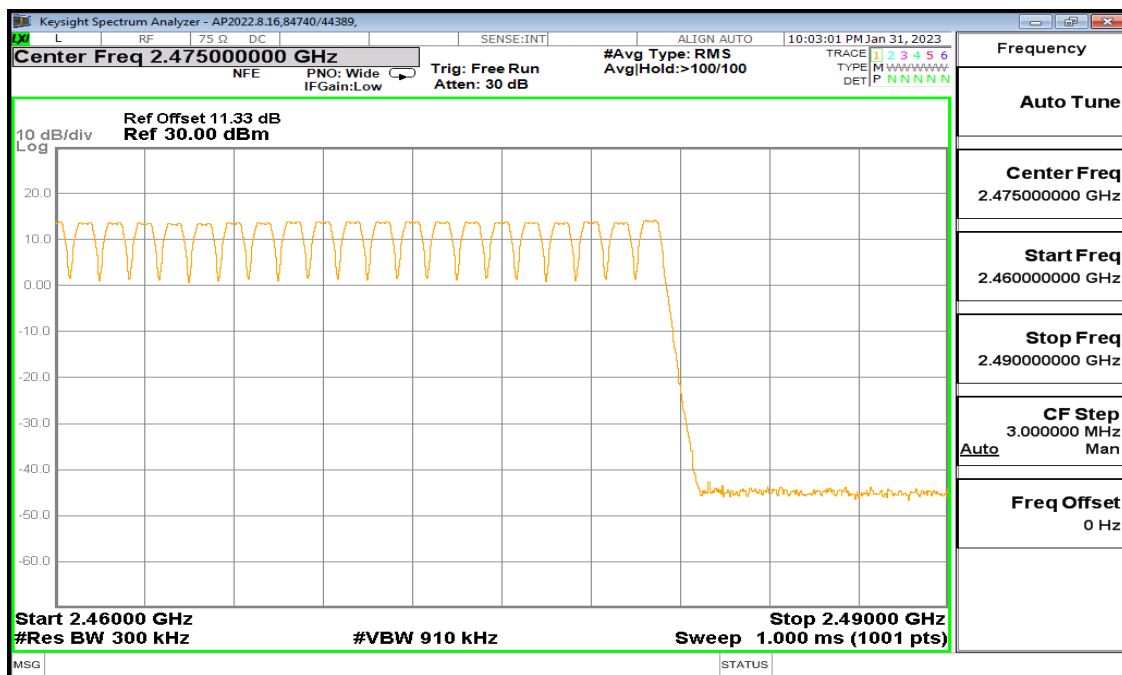


30MHz SPAN, SEGMENT 3 OF 3

Chain 1

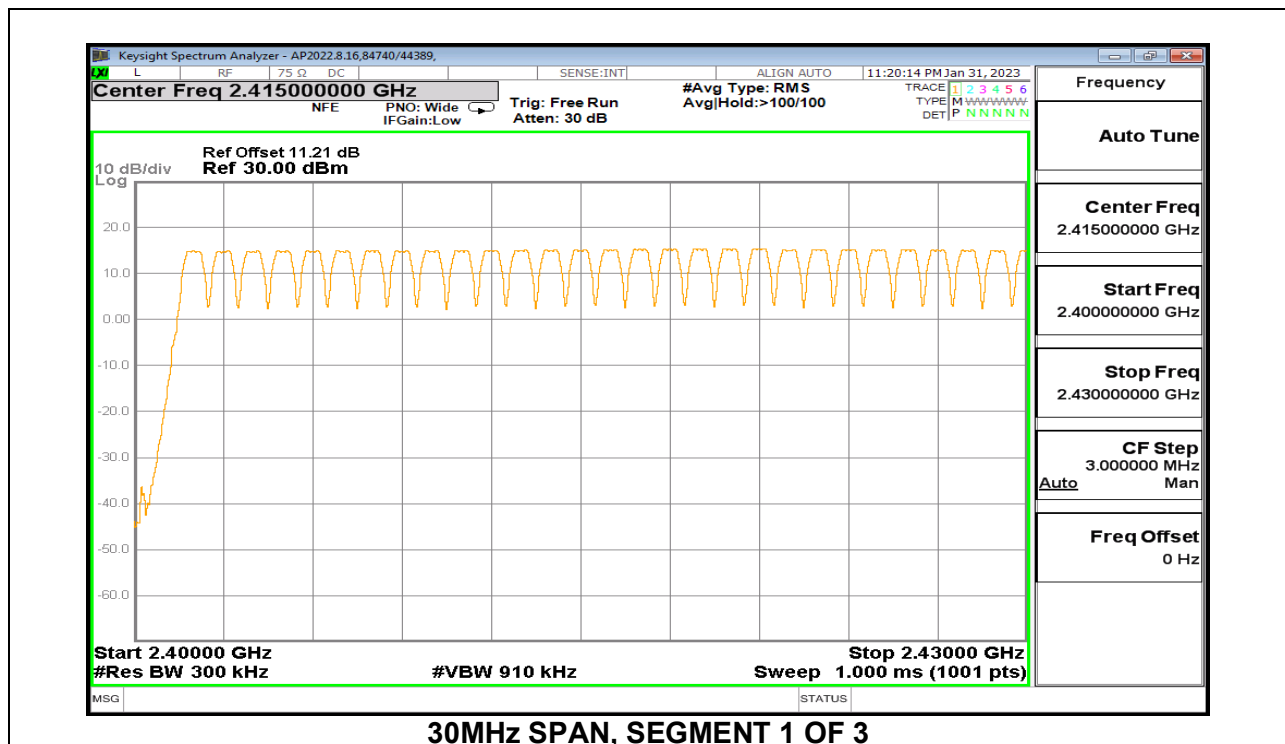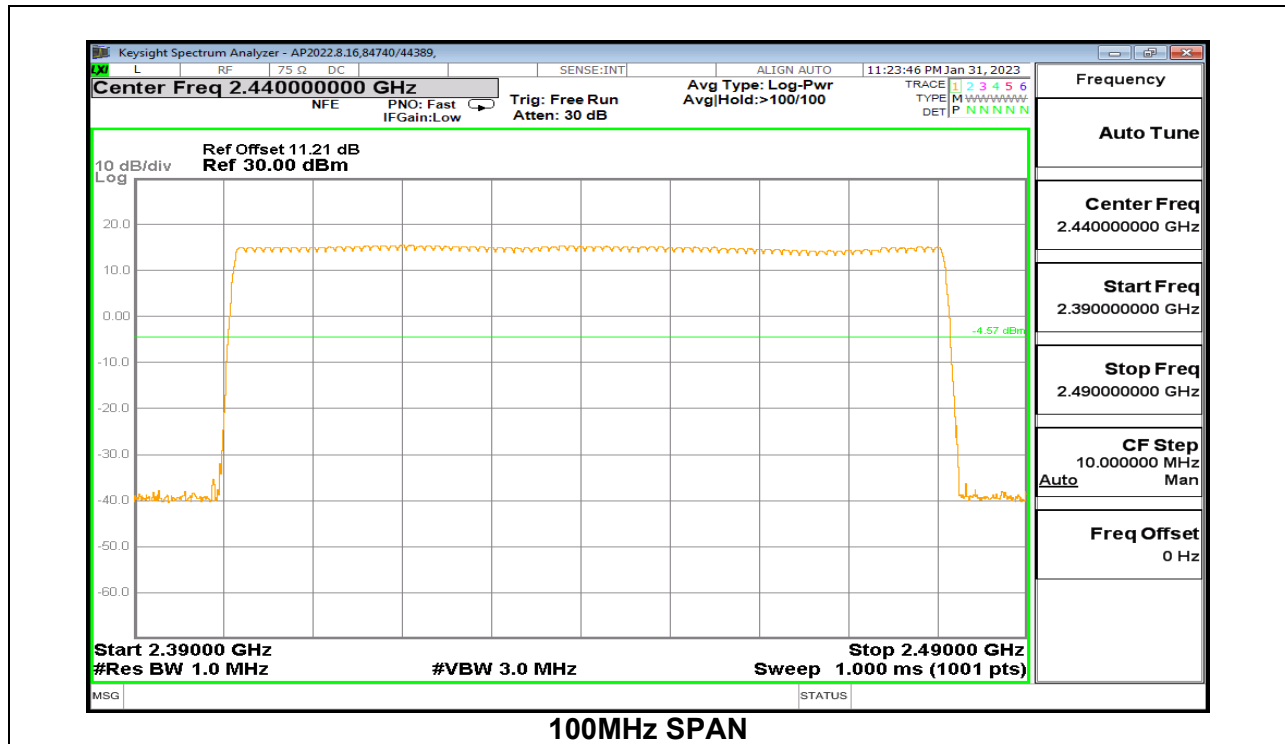

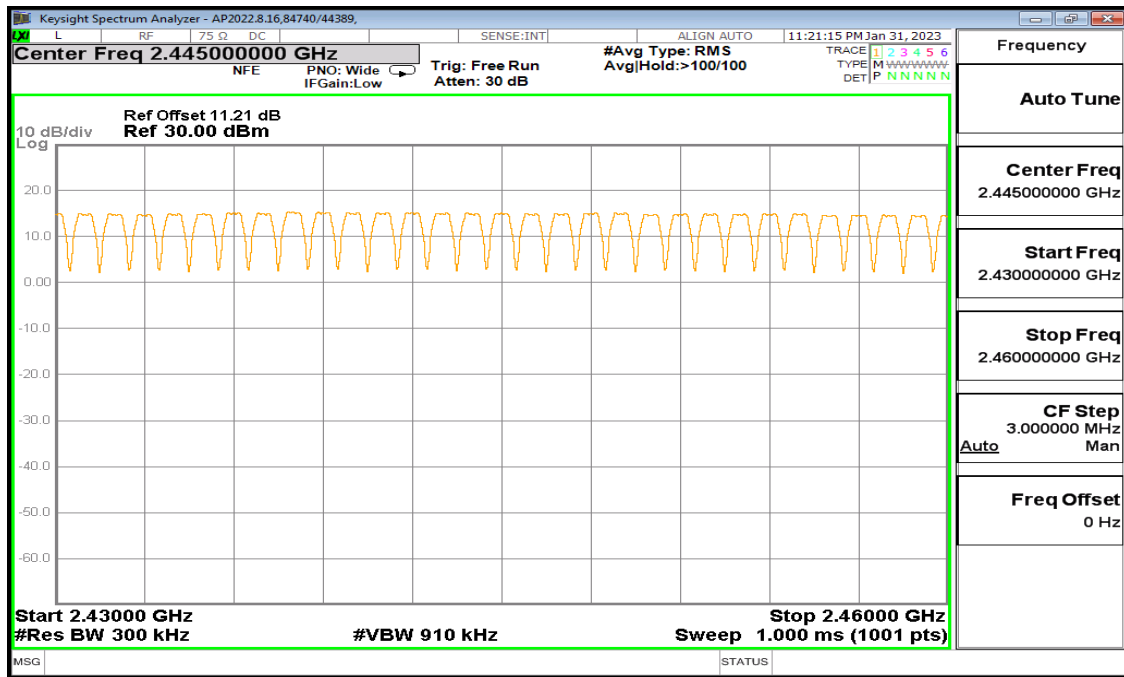



30MHz SPAN, SEGMENT 2 OF 3

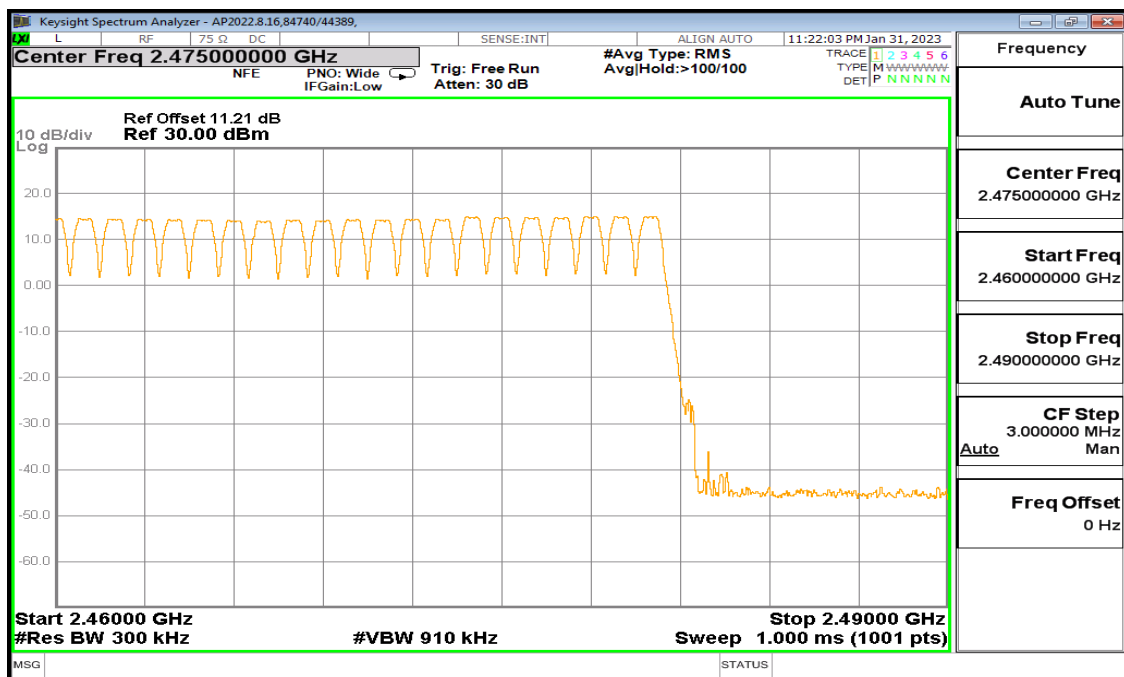


30MHz SPAN, SEGMENT 3 OF 3


9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Chain 0

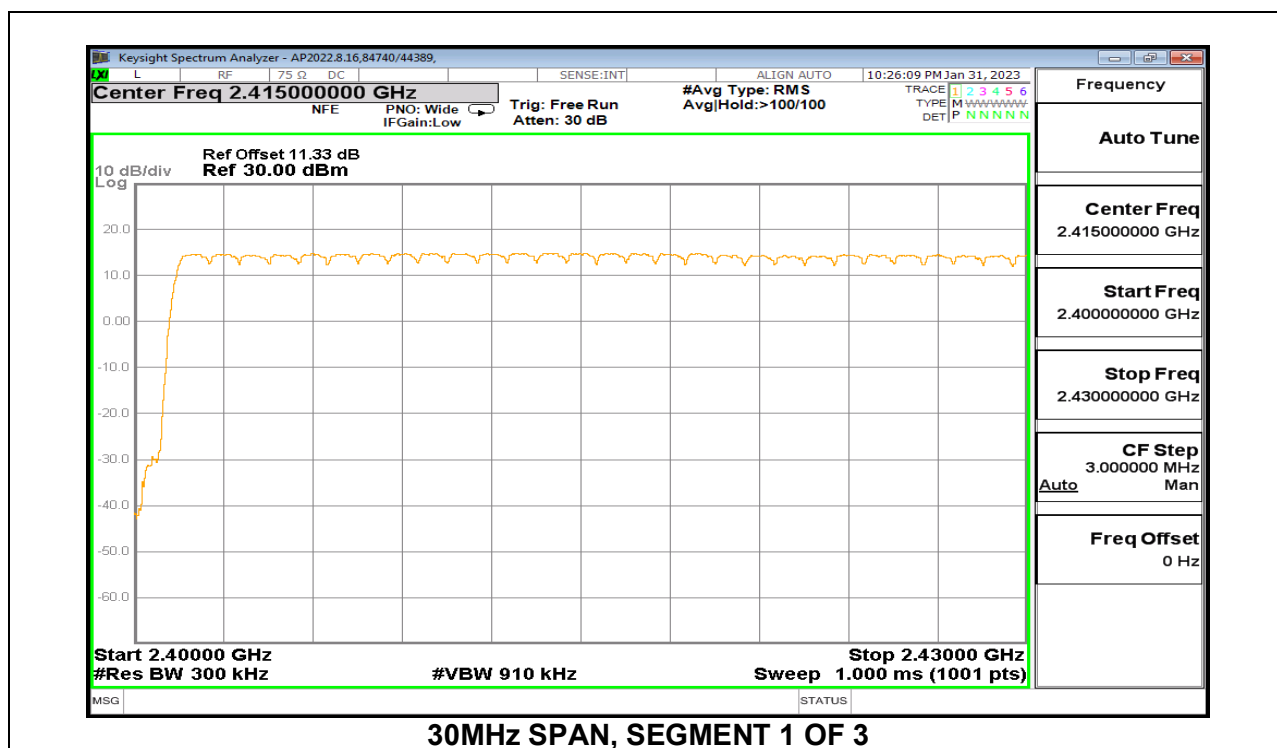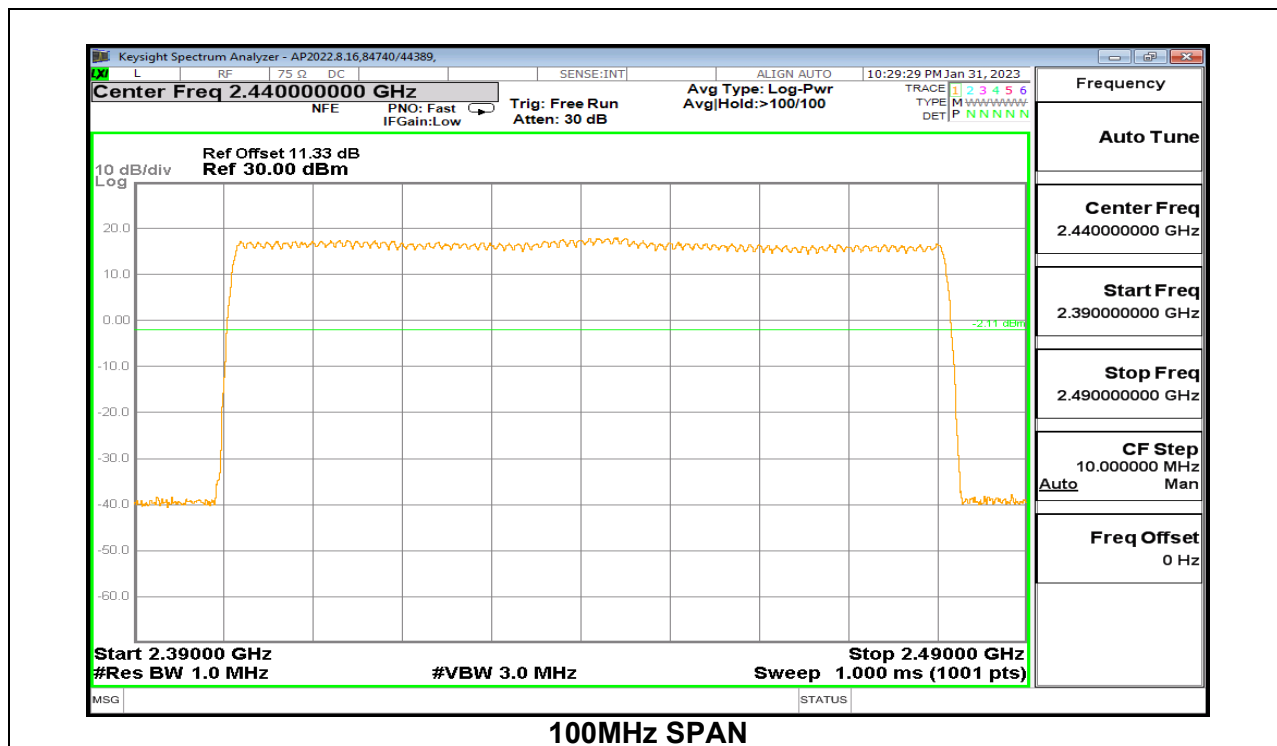


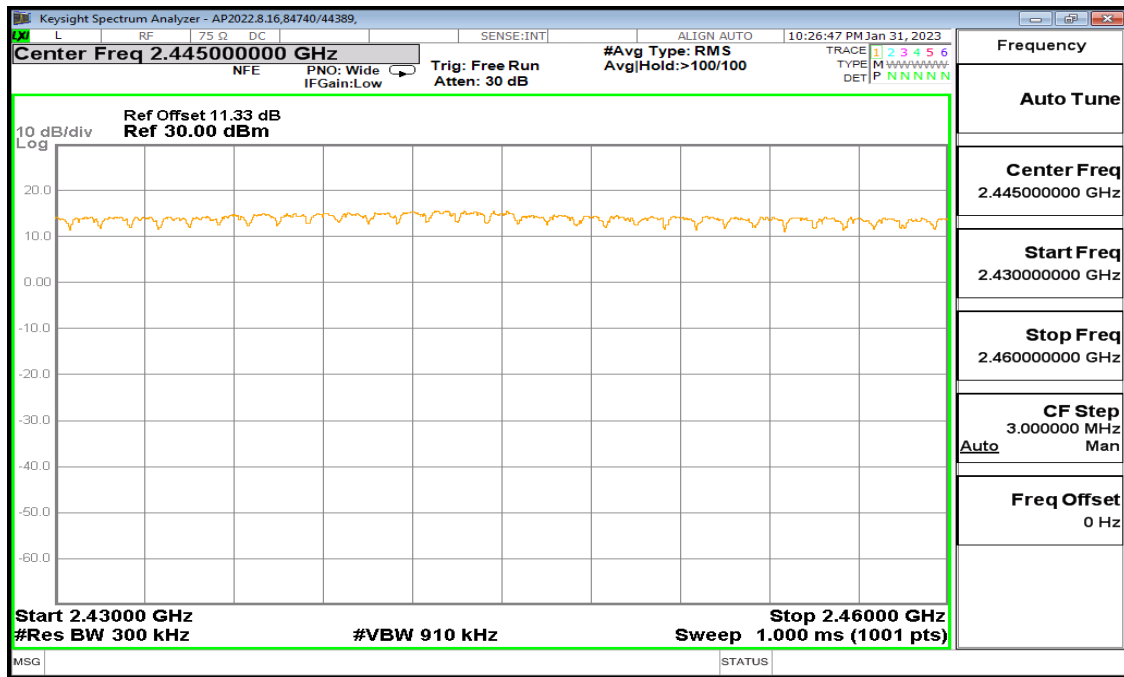



30MHz SPAN, SEGMENT 2 OF 3

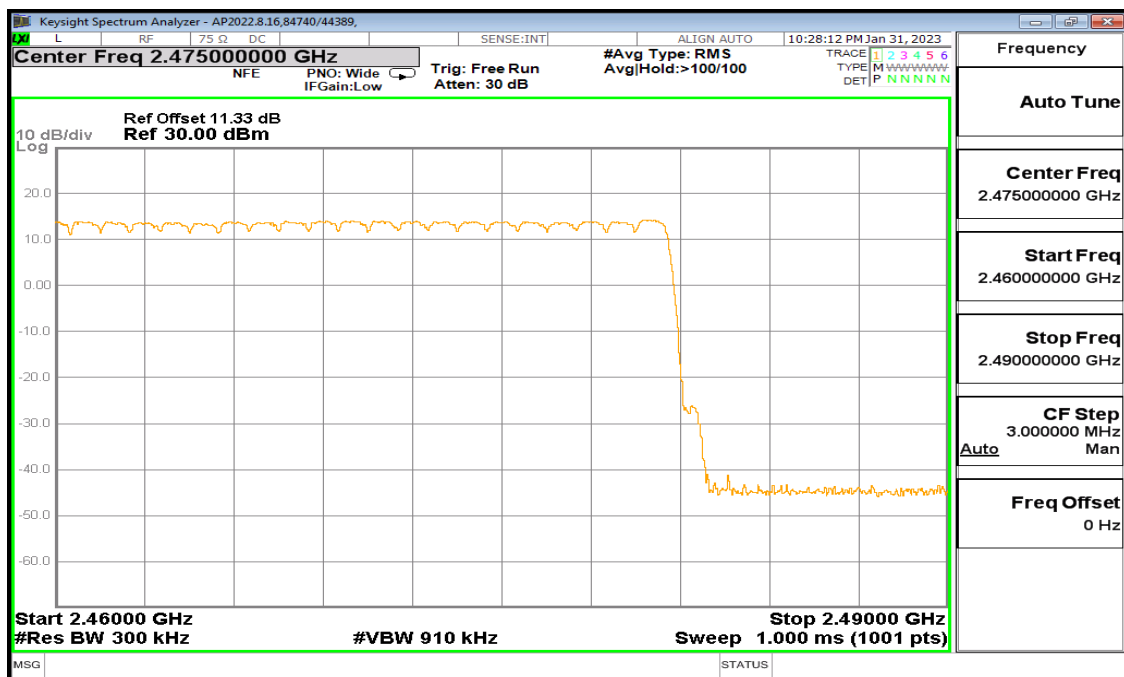


30MHz SPAN, SEGMENT 3 OF 3

Chain 1

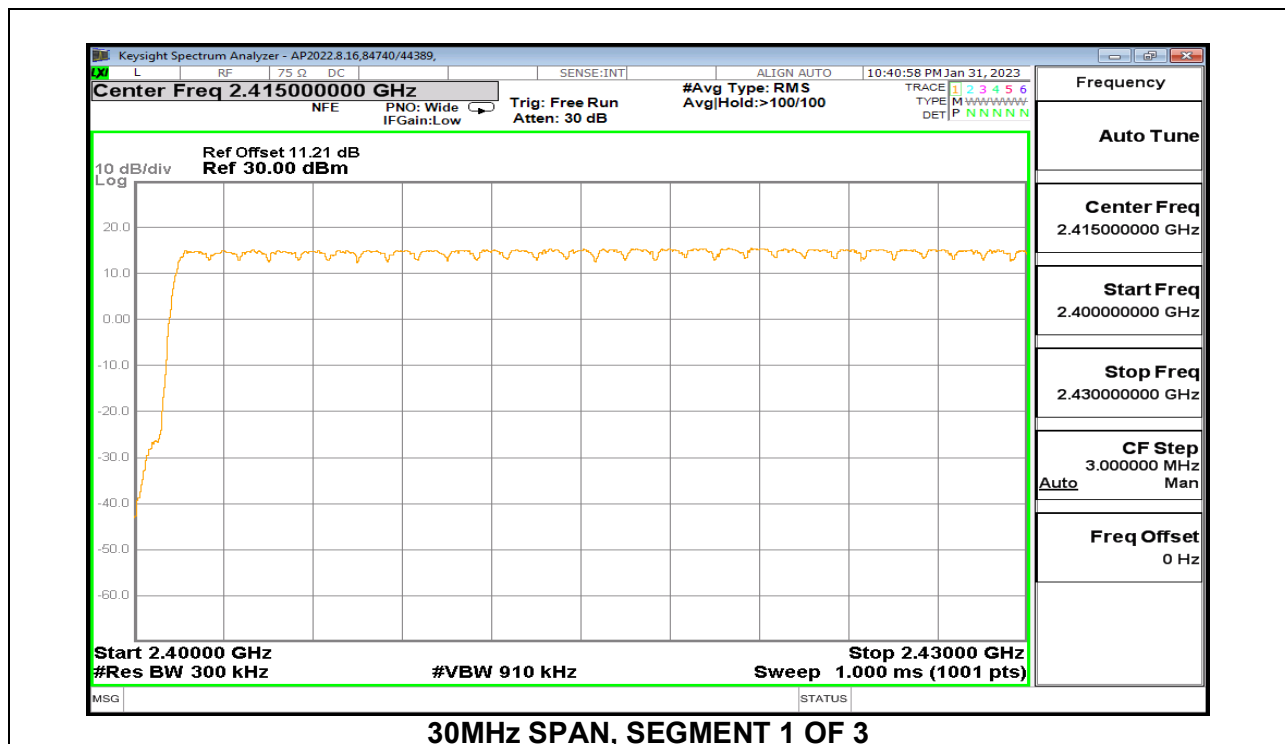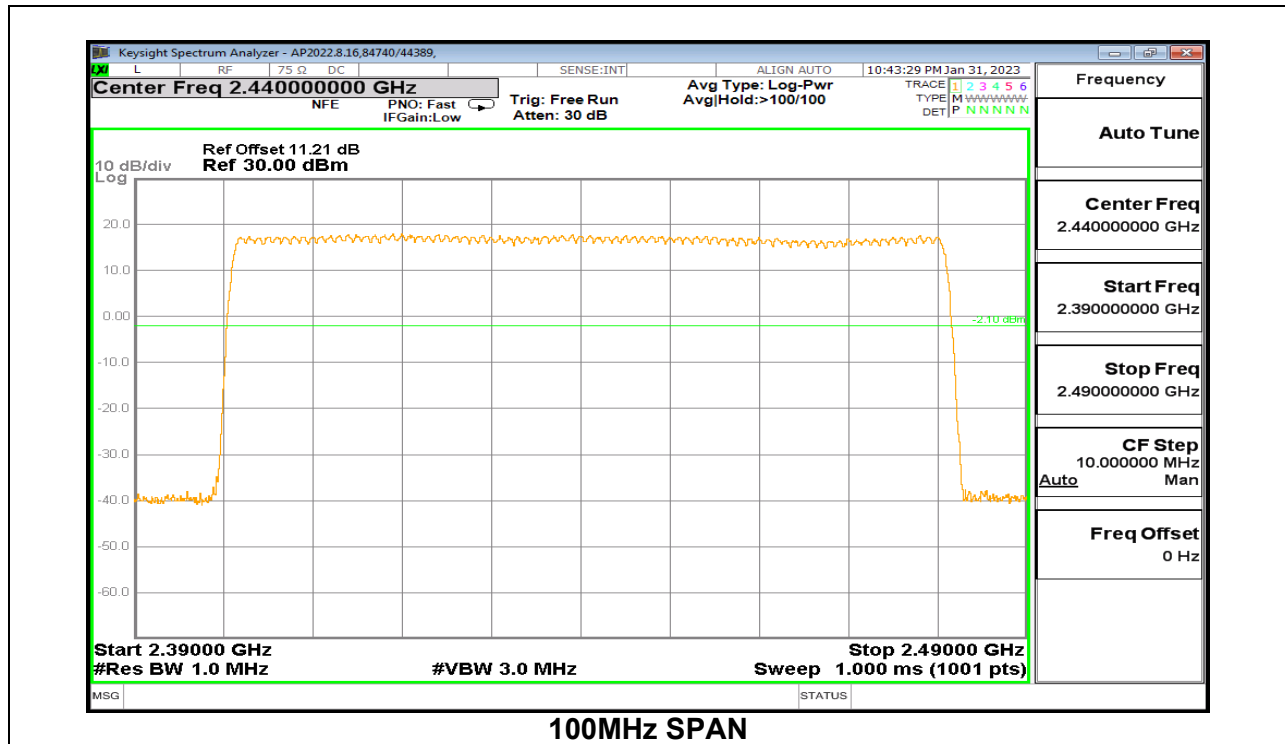

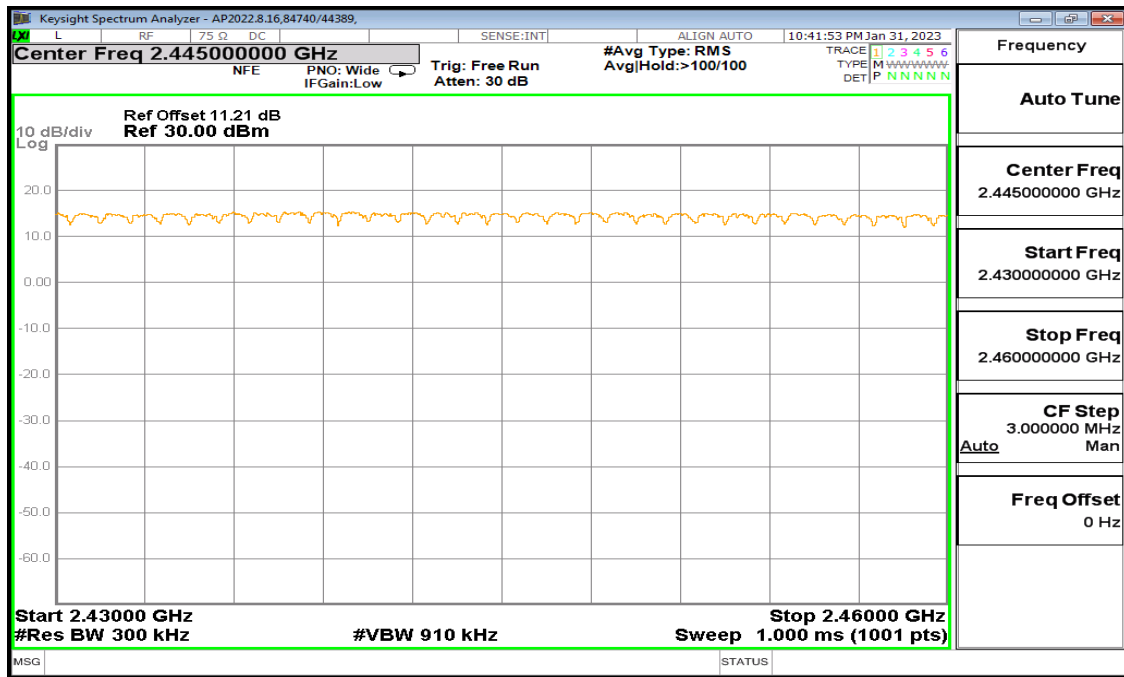

30MHz SPAN, SEGMENT 2 OF 3

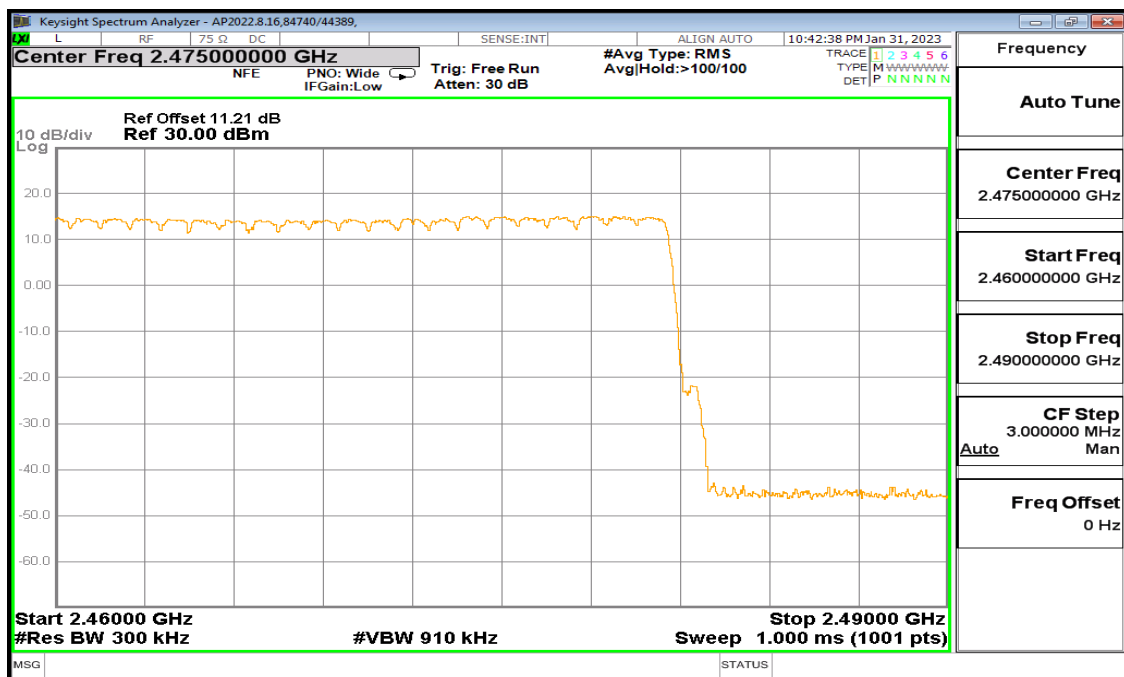

30MHz SPAN, SEGMENT 3 OF 3

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

RESULTS


9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Chain 0


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	31	0.1172	0.4	-0.2828
DH3	1.632	13	0.2122	0.4	-0.1878
DH5	2.876	10	0.2876	0.4	-0.1124
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	7.75	0.02930	0.4	-0.3707
DH3	1.632	3.25	0.05304	0.4	-0.3470
DH5	2.876	2.5	0.07190	0.4	-0.3281

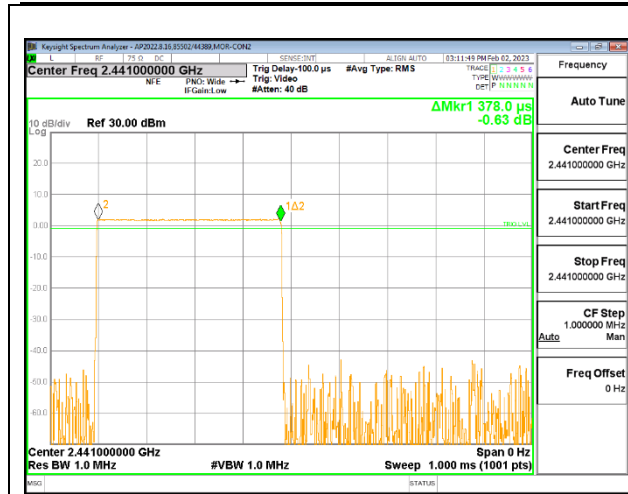


PULSE WIDTH – DH1

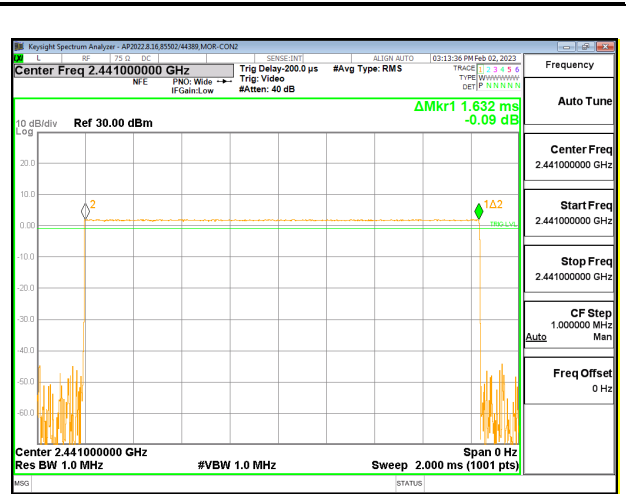


PULSE WIDTH – DH3

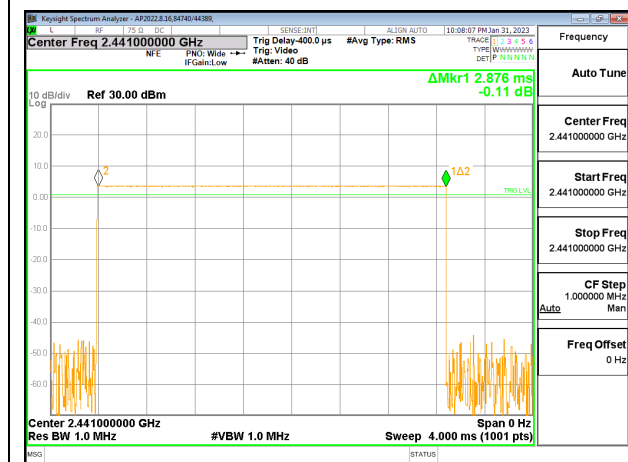


PULSE WIDTH – DH5

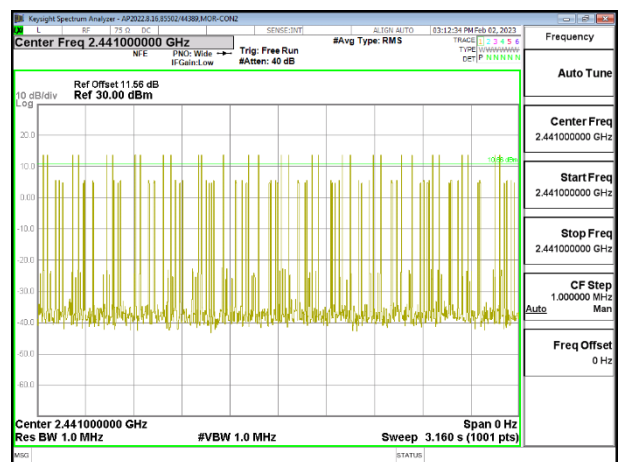

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH1**

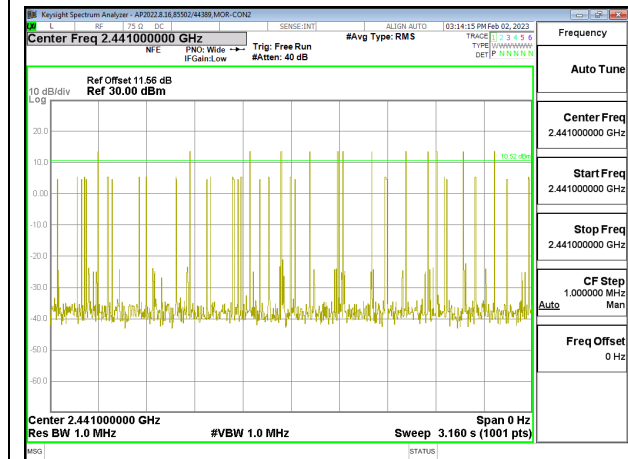


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH3**

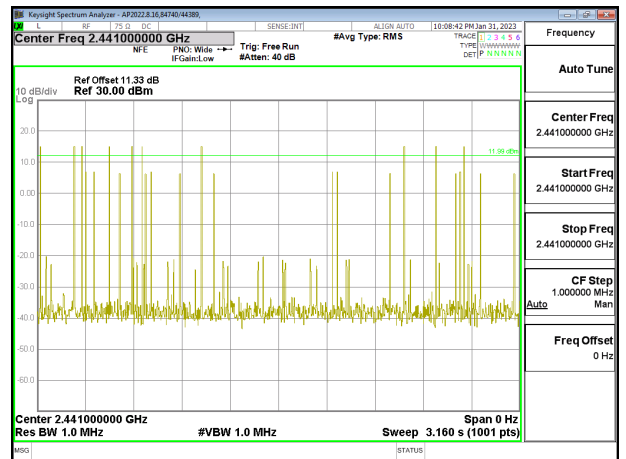


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH5**

Chain 1


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.378	31	0.1172	0.4	-0.2828
DH3	1.632	15	0.2448	0.4	-0.1552
DH5	2.872	10	0.2872	0.4	-0.1128
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.378	7.75	0.02930	0.4	-0.3707
DH3	1.632	3.75	0.06120	0.4	-0.3388
DH5	2.872	2.5	0.07180	0.4	-0.3282

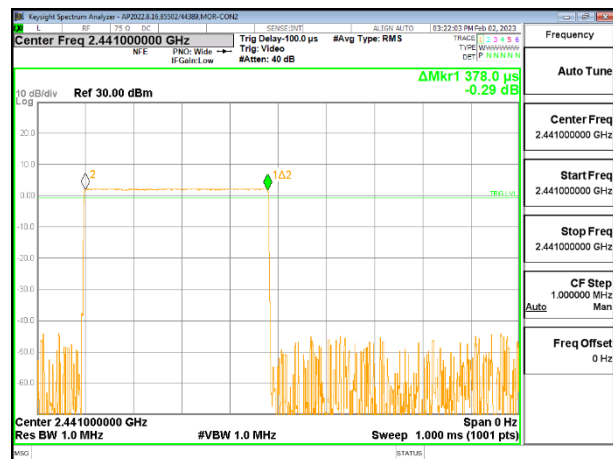


PULSE WIDTH – DH1

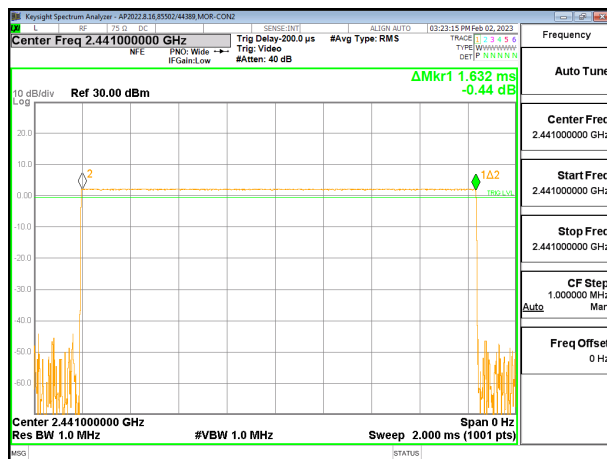


PULSE WIDTH – DH3

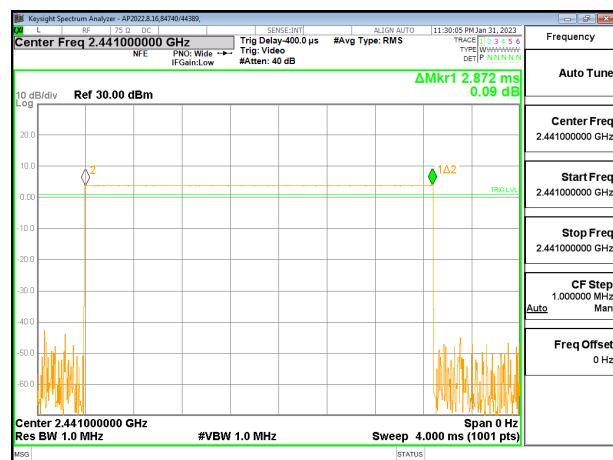


PULSE WIDTH – DH5

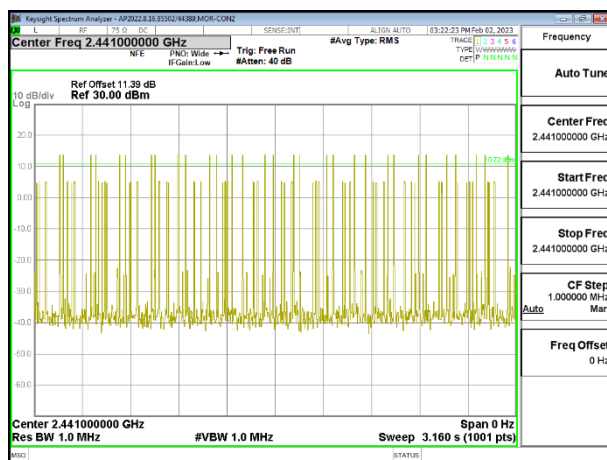

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH1**

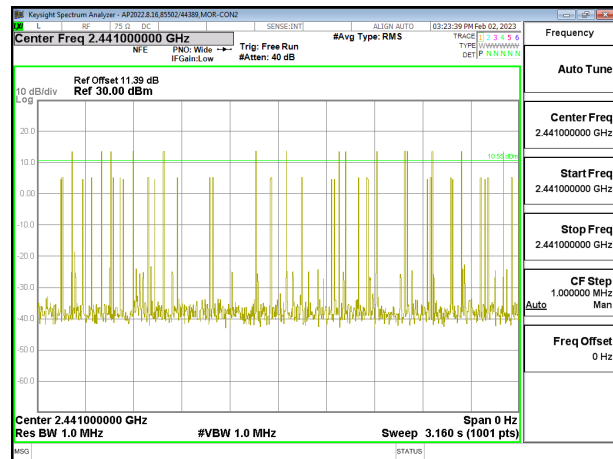

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH3**

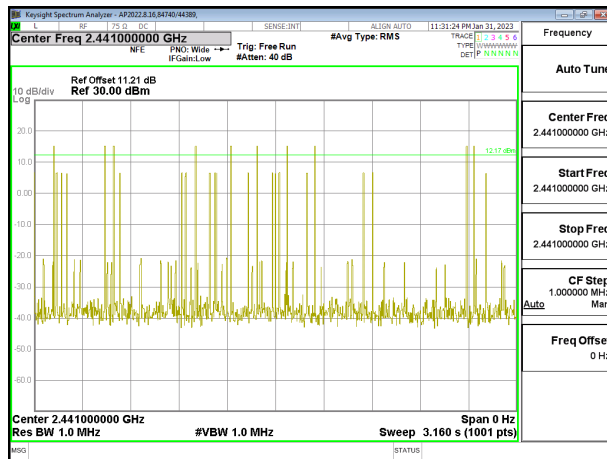


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – DH5**


9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Chain 0


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
DH1	0.379	31	0.1175	0.4	-0.2825
DH3	1.626	16	0.2602	0.4	-0.1398
DH5	2.872	10	0.2872	0.4	-0.1128
8PSK AFH Mode					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.379	7.75	0.02937	0.4	-0.3706
DH3	1.626	4	0.06504	0.4	-0.3350
DH5	2.872	2.5	0.07180	0.4	-0.3282

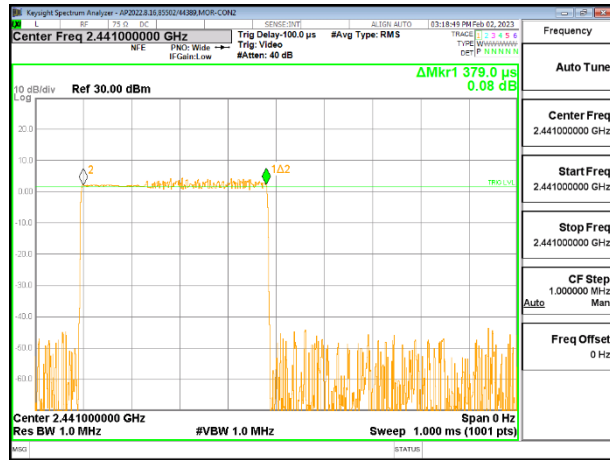


PULSE WIDTH – 3DH1

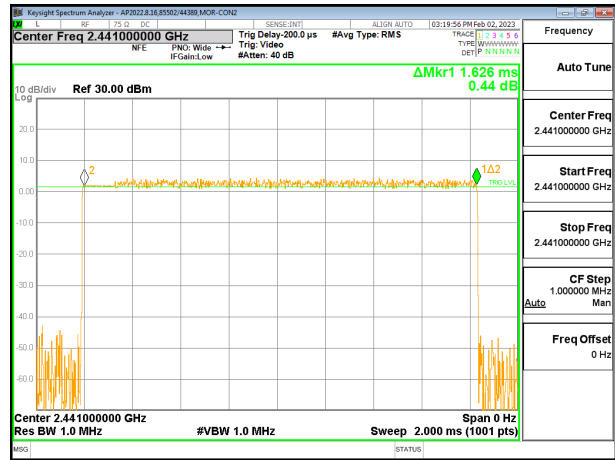


PULSE WIDTH – 3DH3

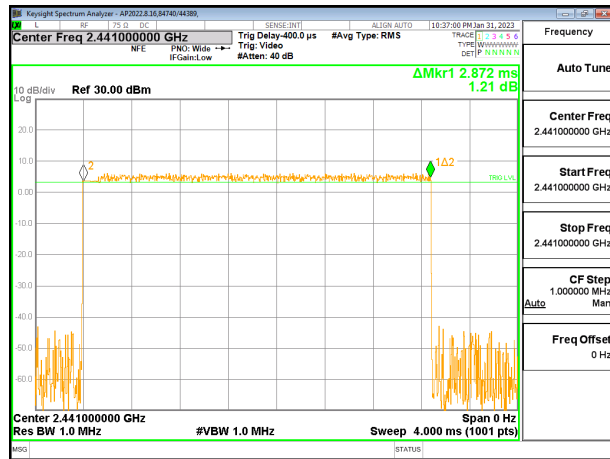


PULSE WIDTH – 3DH5

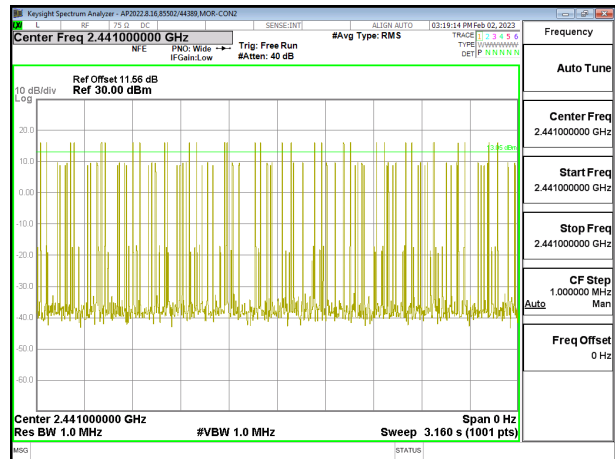

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH1**

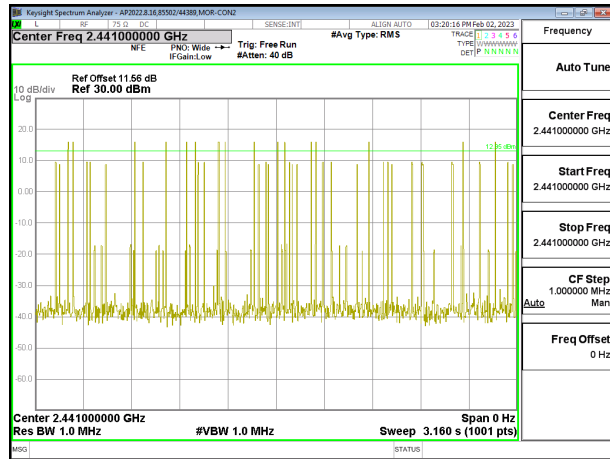


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH3**

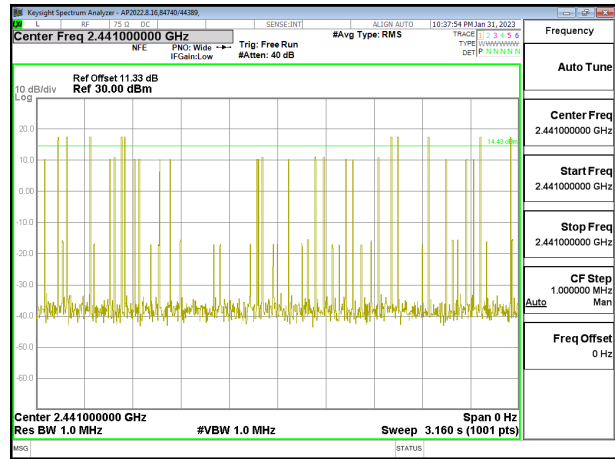


**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH5**

Chain 1


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
8PSK Normal Mode					
DH1	0.379	31	0.1175	0.4	-0.2825
DH3	1.628	15	0.2442	0.4	-0.1558
DH5	2.872	10	0.2872	0.4	-0.1128
8PSK AFH Mode					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.379	7.75	0.02937	0.4	-0.3706
DH3	1.628	3.75	0.06105	0.4	-0.3390
DH5	2.872	2.5	0.07180	0.4	-0.3282

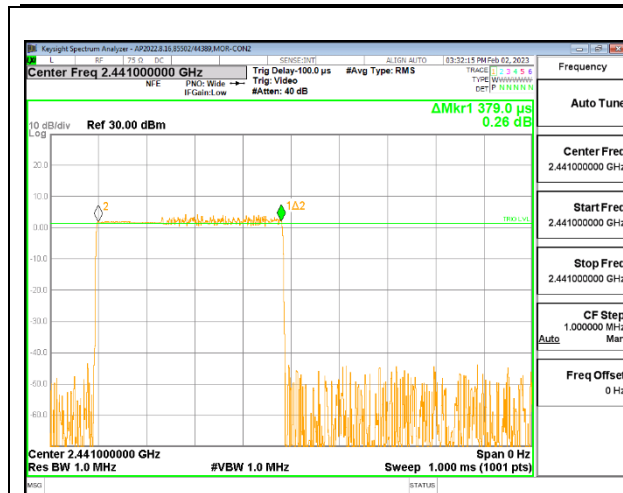


PULSE WIDTH – 3DH1

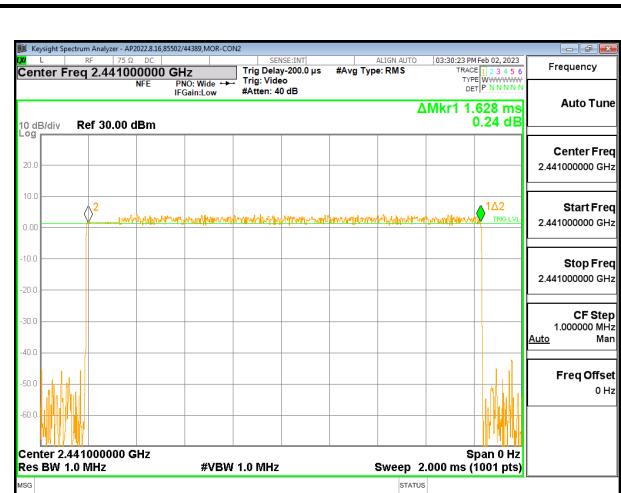


PULSE WIDTH – 3DH3

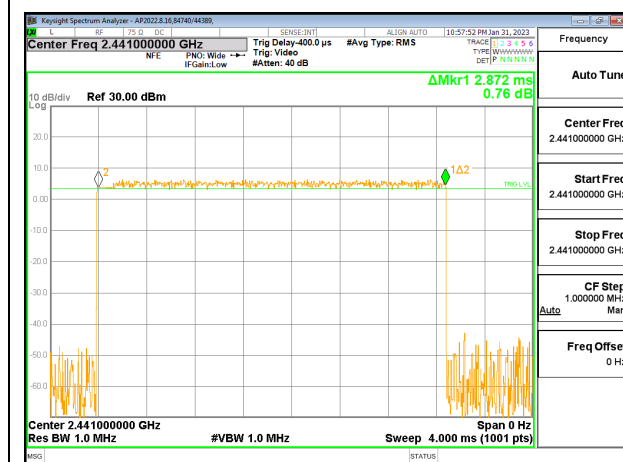


PULSE WIDTH – 3DH5

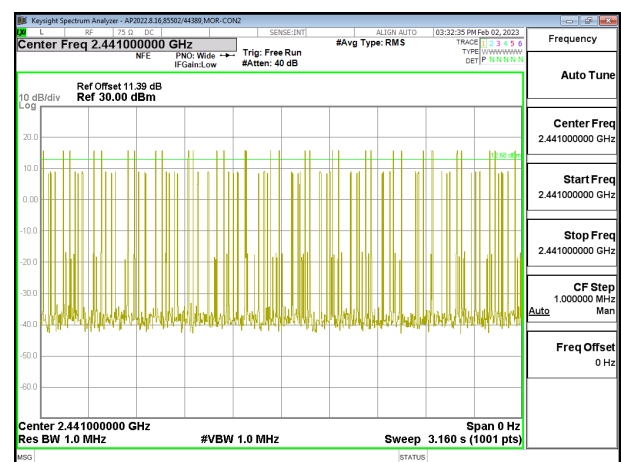

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH1**

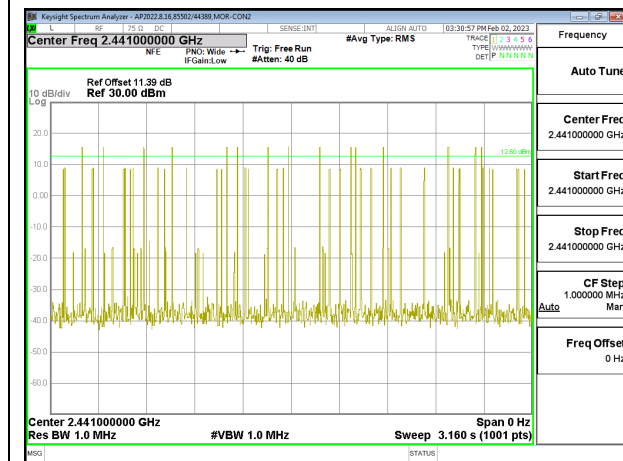

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH3**

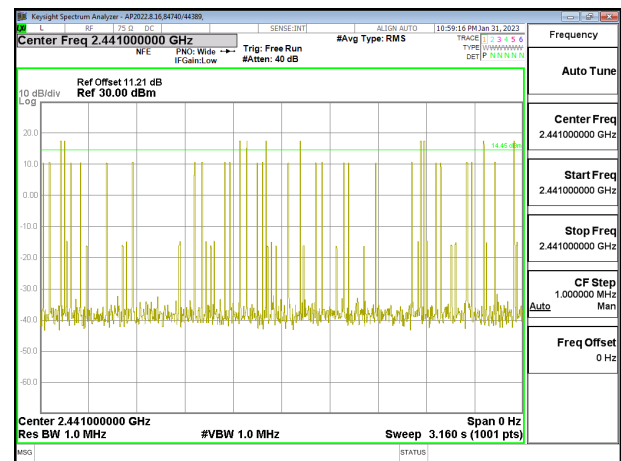

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3DH5**

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of 11.33 dB (including 9.68 dB pad and 0.35 dB cable) was entered as an offset in the power meter to allow for a peak reading of power.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband power sensor. Peak output power was read directly from power meter.

RESULTS

9.6.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Chain 0

Tested By:	84740/44389
Date:	2023-01-06

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	13.01	30	-16.99
Middle	2441	13.76	30	-16.24
High	2480	14.21	30	-15.79

Chain 1

Tested By:	84740/44389
Date:	2023-01-26

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	12.66	30	-17.34
Middle	2441	13.37	30	-16.63
High	2480	13.82	30	-16.18

9.6.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Chain 0

Tested By:	84740/44389
Date:	2023-01-06

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.81	30	-14.19
Middle	2441	16.25	30	-13.75
High	2480	16.81	30	-13.19

Chain 1

Tested By:	84740/44389
Date:	2023-01-06

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.84	30	-14.16
Middle	2441	16.16	30	-13.84
High	2480	16.60	30	-13.4

9.6.3. BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION

Chain 0

Tested By:	84740/44389
Date:	2023-01-06

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.27	30	-14.73
Middle	2441	15.72	30	-14.28
High	2480	16.28	30	-13.72

Chain 1

Tested By:	84740/44389
Date:	2023-01-06

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	15.17	30	-14.83
Middle	2441	15.68	30	-14.32
High	2480	16.03	30	-13.97

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.

The cable assembly insertion loss of 11.33 dB (including 9.68 dB pad and 0.35 dB cable) was entered as an offset in the power meter.

The power output was measured on the EUT antenna port using SMA cable with 10dB attenuator connected to a power meter via wideband average power sensor. Gated average output power was read directly from power meter.

RESULTS

9.7.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Tested By:	84740/44389
Date	2023-01-06

Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2402	12.68	12.40
Middle	2441	13.48	13.16
High	2480	13.92	13.55

9.7.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Tested By:	84740/44389
Date	2023-01-06

Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2402	12.50	12.47
Middle	2441	12.95	12.90
High	2480	13.45	13.35

9.7.3. BLUETOOTH ENHANCED DATA RATE DQPSK MODULATION

Tested By:	84740/44389
Date	2023-01-06

Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2402	12.50	12.46
Middle	2441	12.98	12.95
High	2480	13.46	13.36

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


Chain 0 SPURIOUS EMISSIONS, NON-HOPPING

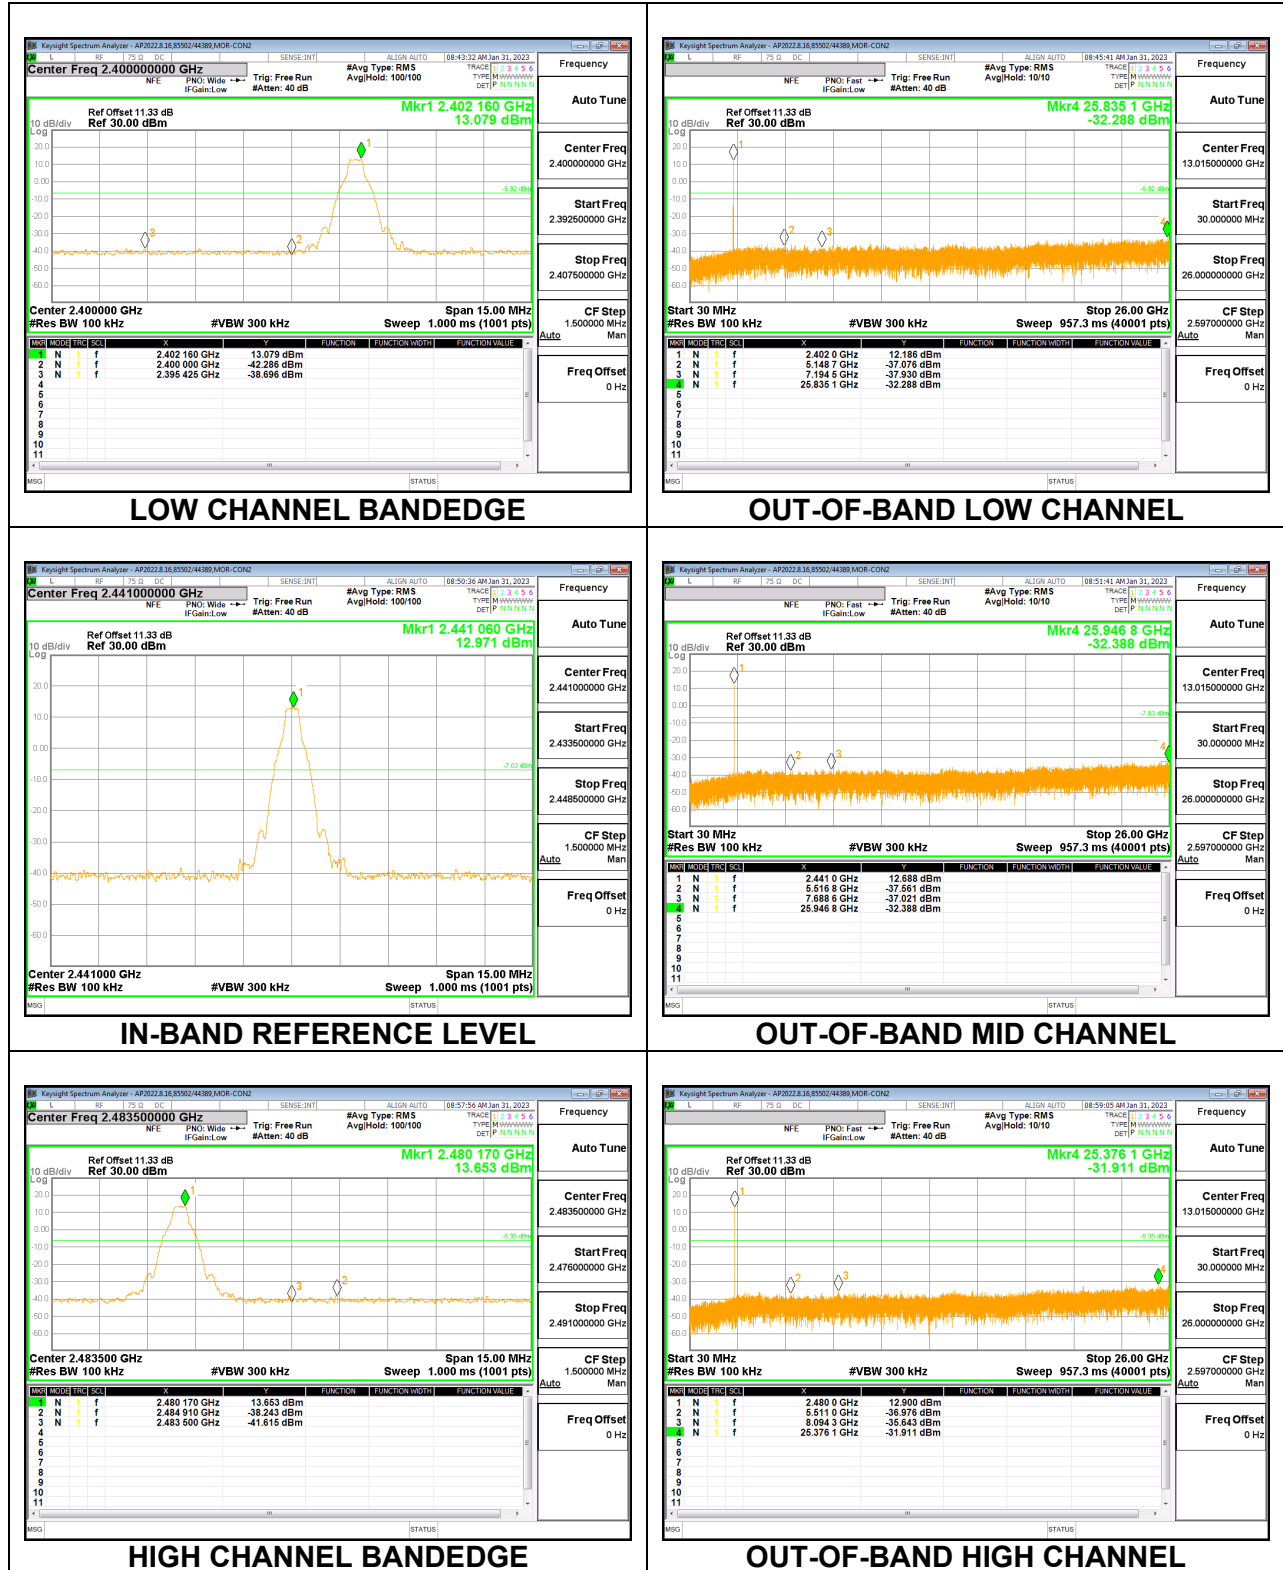


Chain 0 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

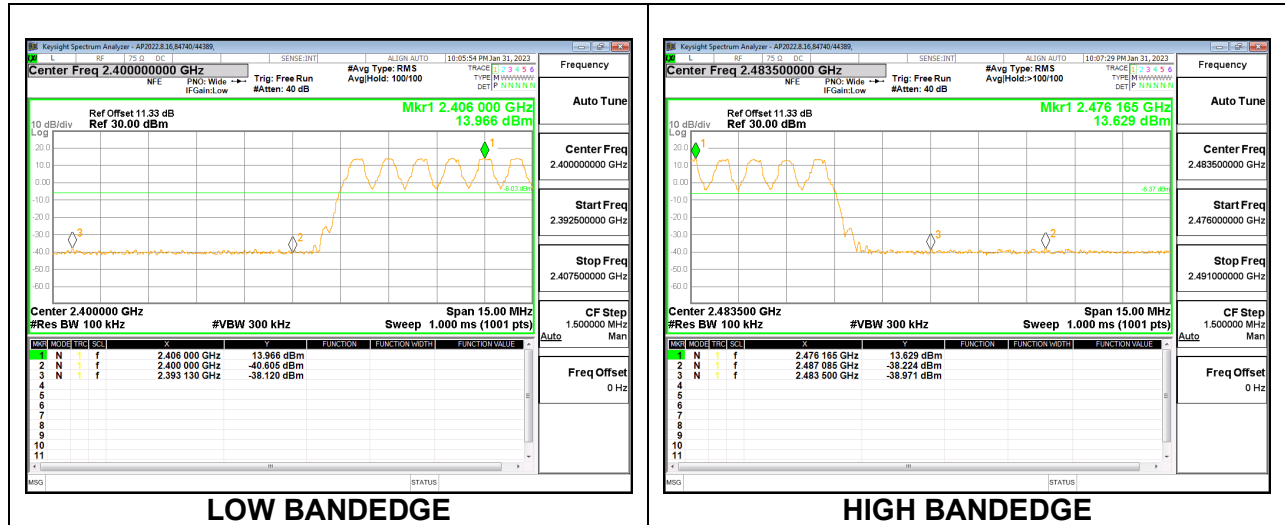


Chain 1 SPURIOUS EMISSIONS, NON-HOPPING

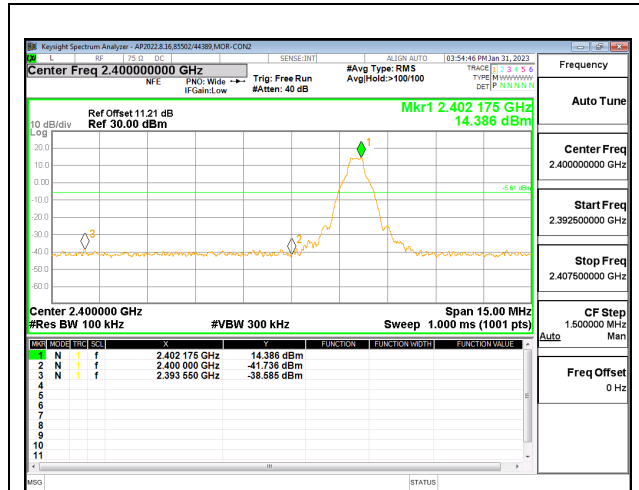


LOW CHANNEL BANDEDGE

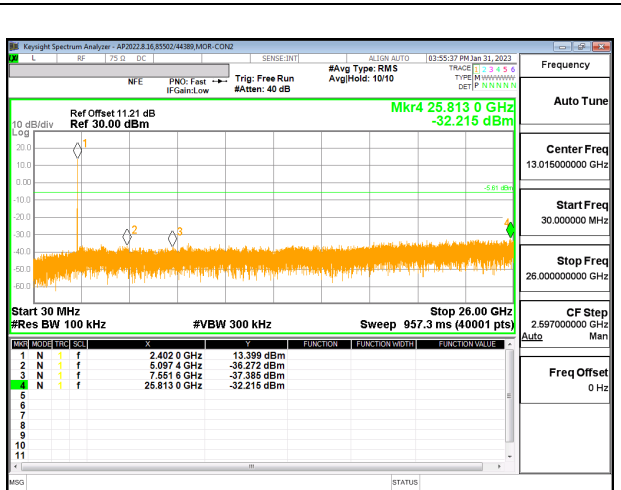


OUT-OF-BAND LOW CHANNEL

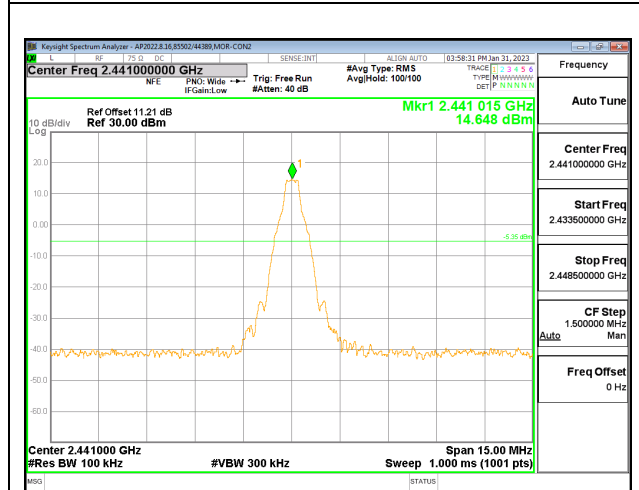


IN-BAND REFERENCE LEVEL

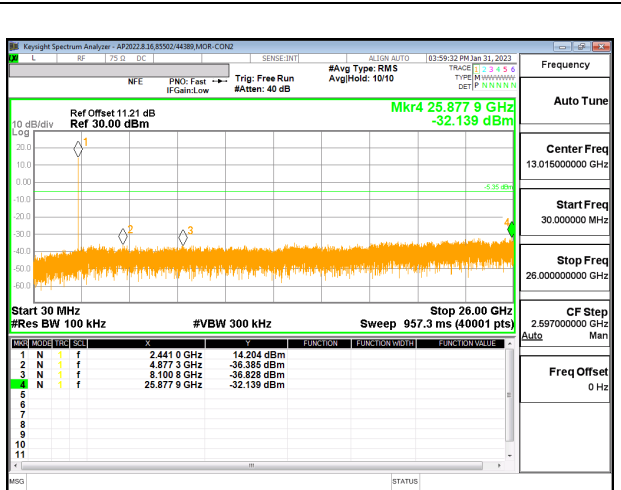

OUT-OF-BAND MID CHANNEL

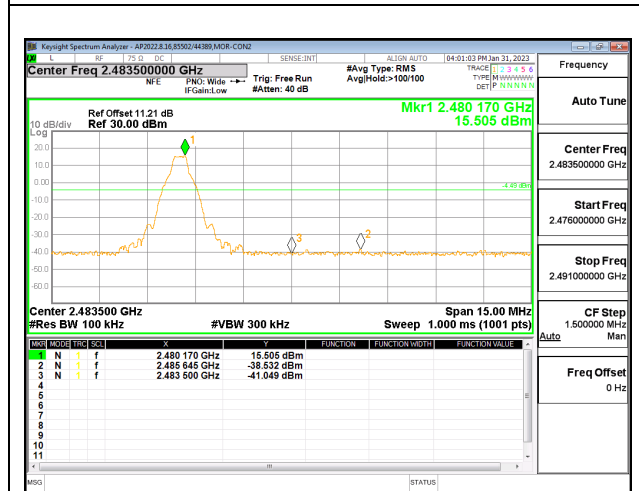


HIGH CHANNEL BANDEDGE

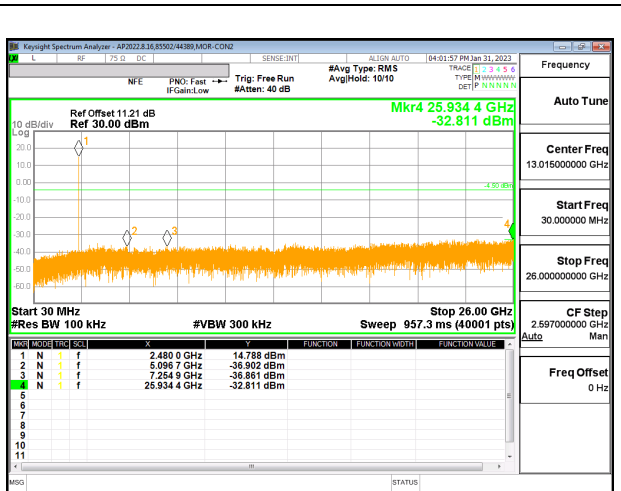

OUT-OF-BAND HIGH CHANNEL

Chain 1 SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

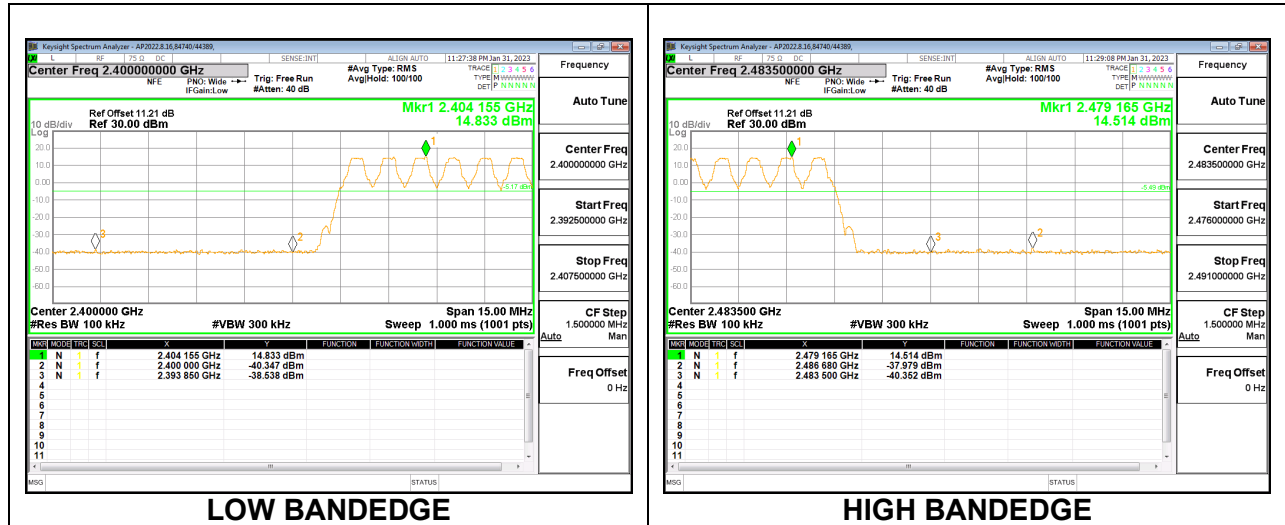

9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Chain 0 SPURIOUS EMISSIONS, NON-HOPPING

