



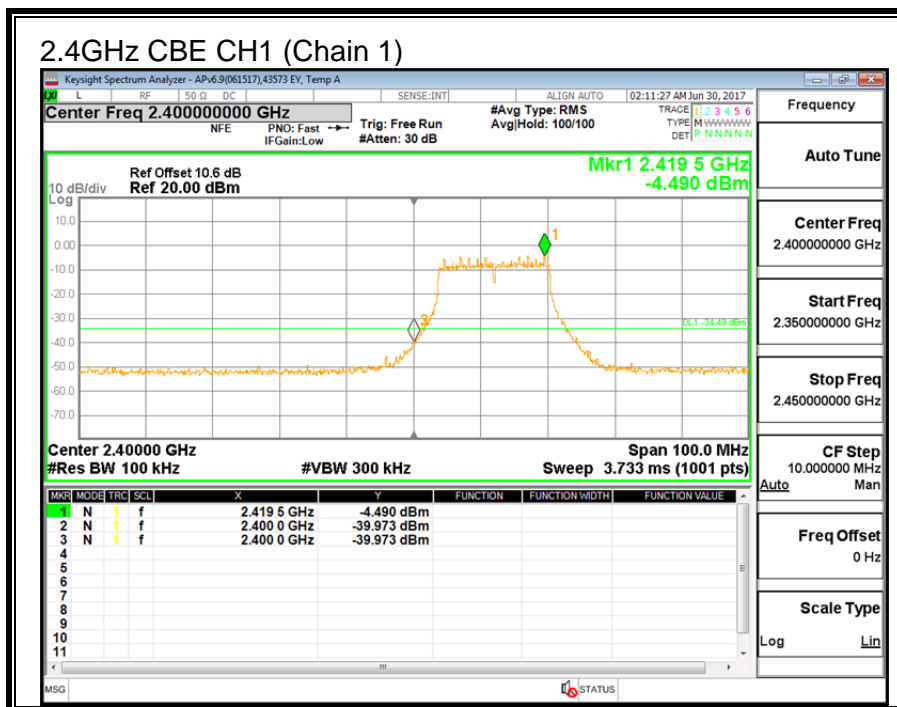
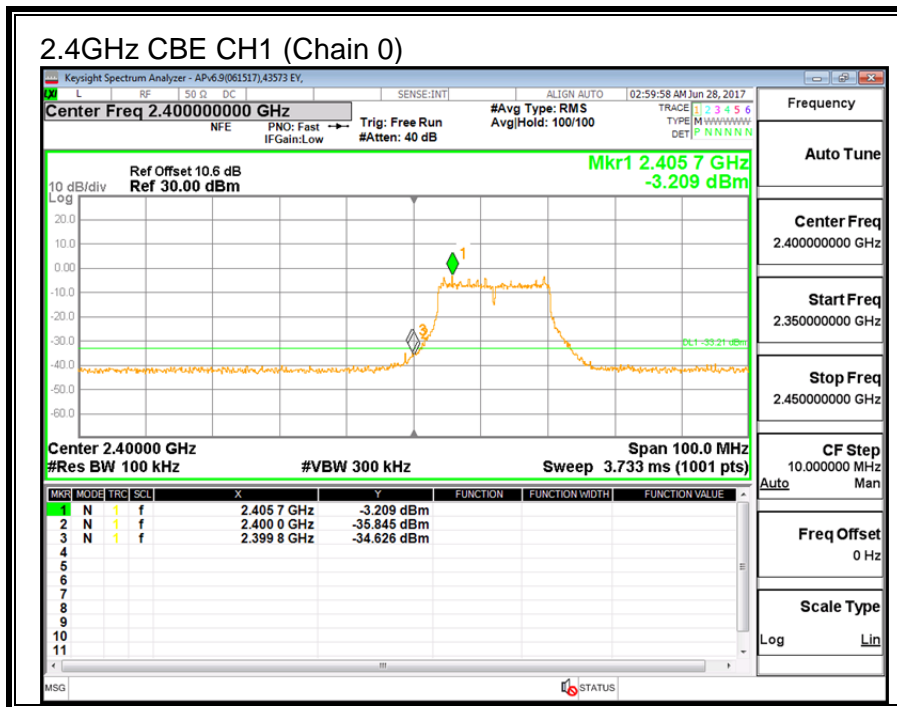
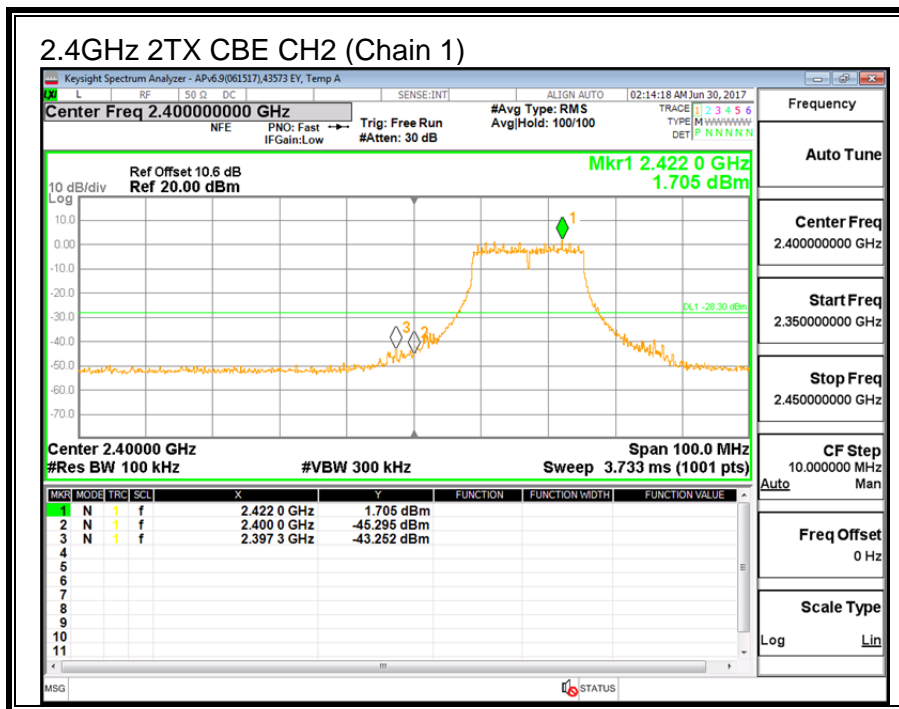
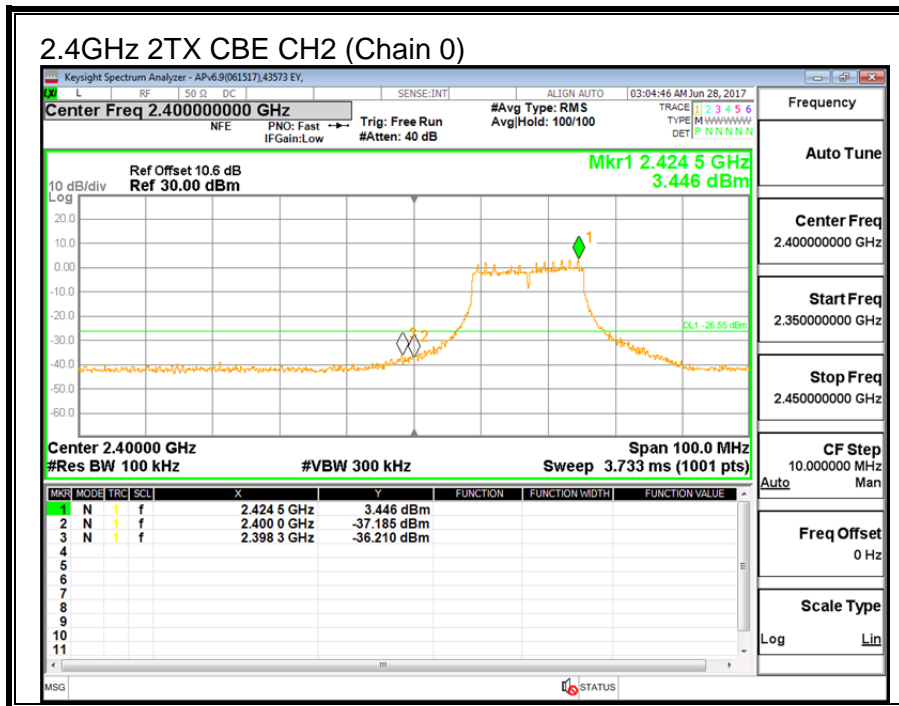




### 9.3.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS


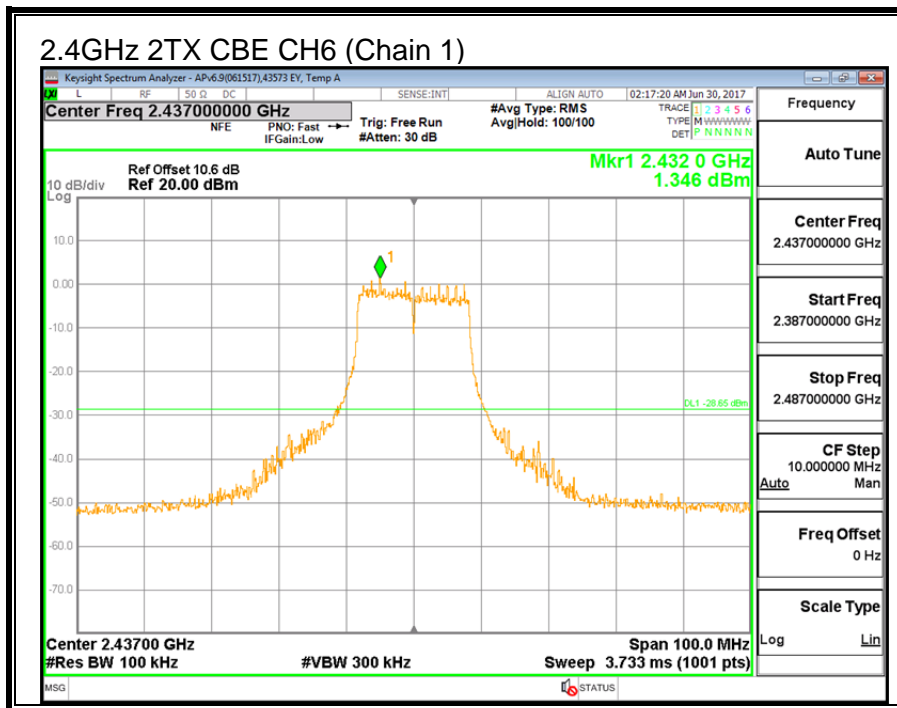



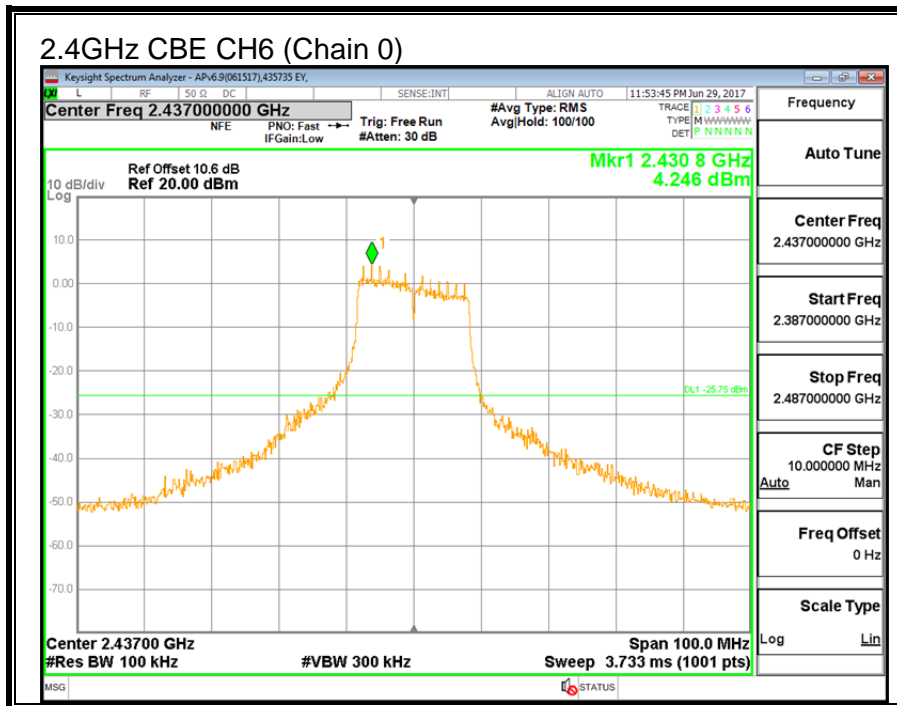


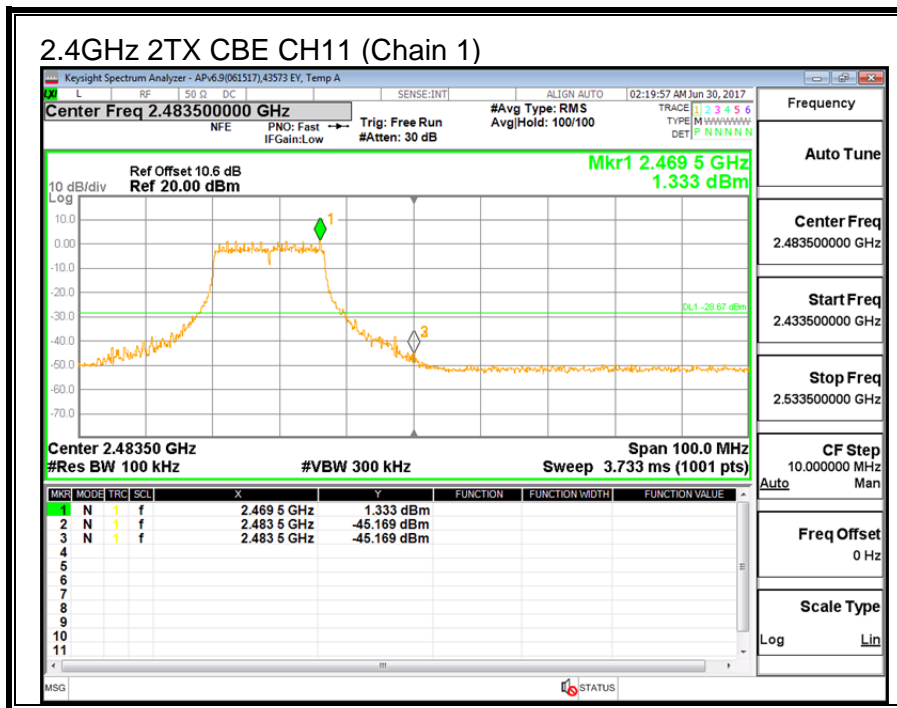


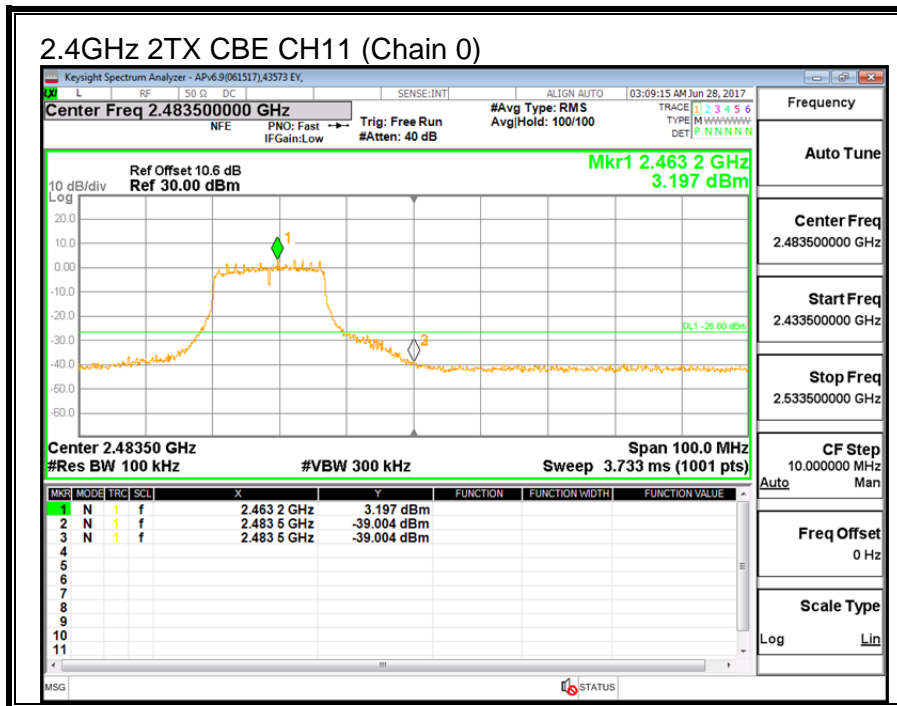


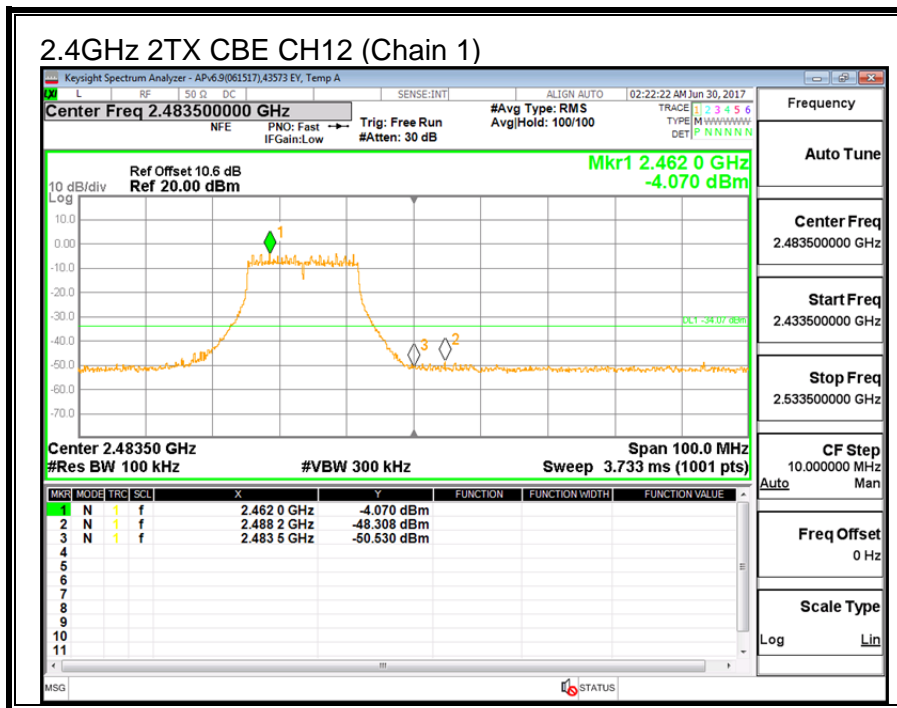
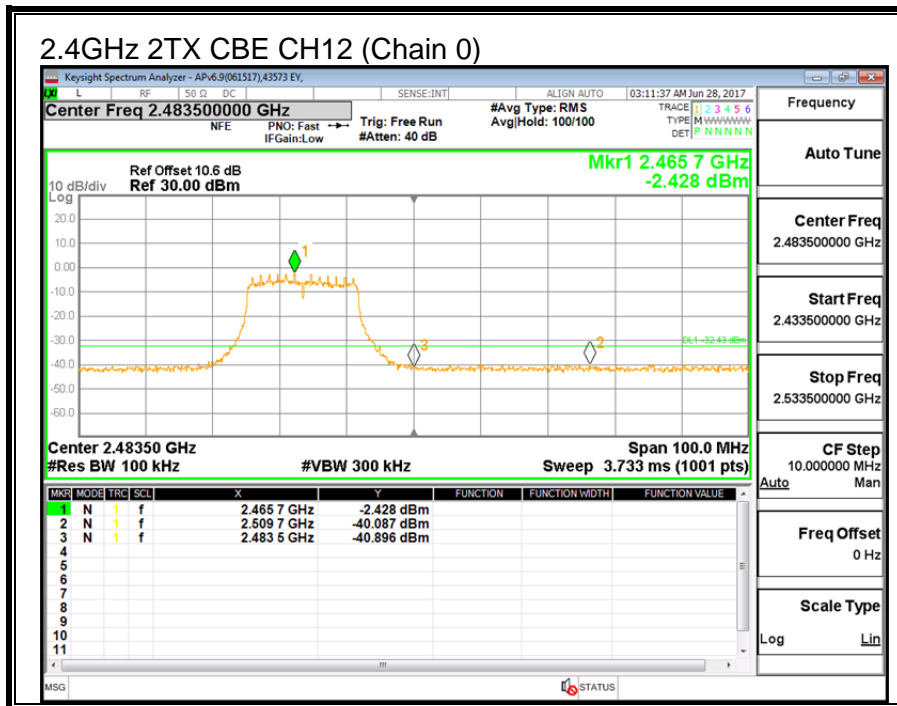


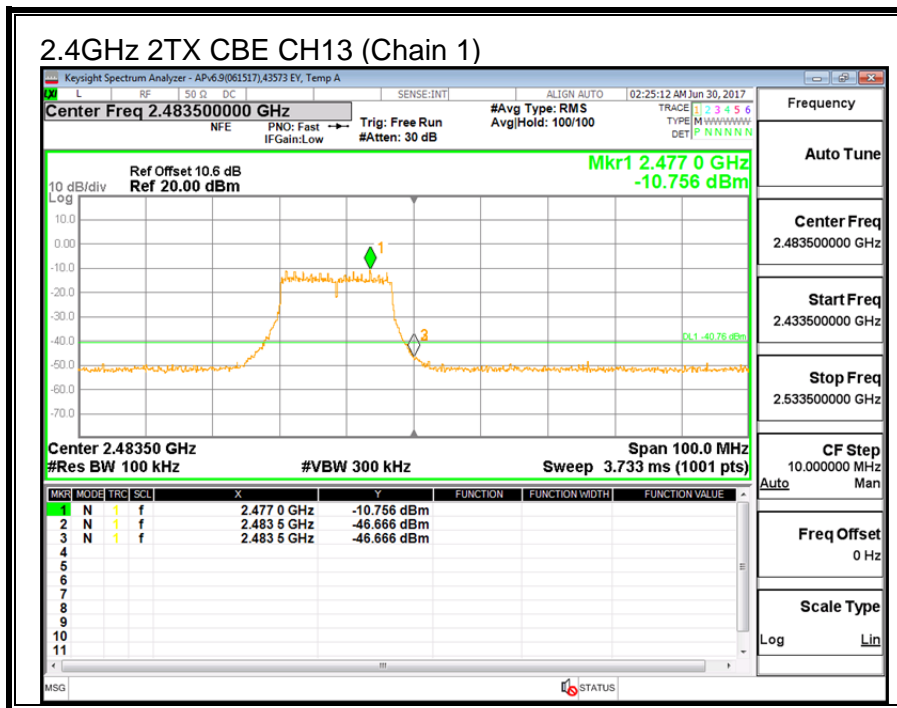
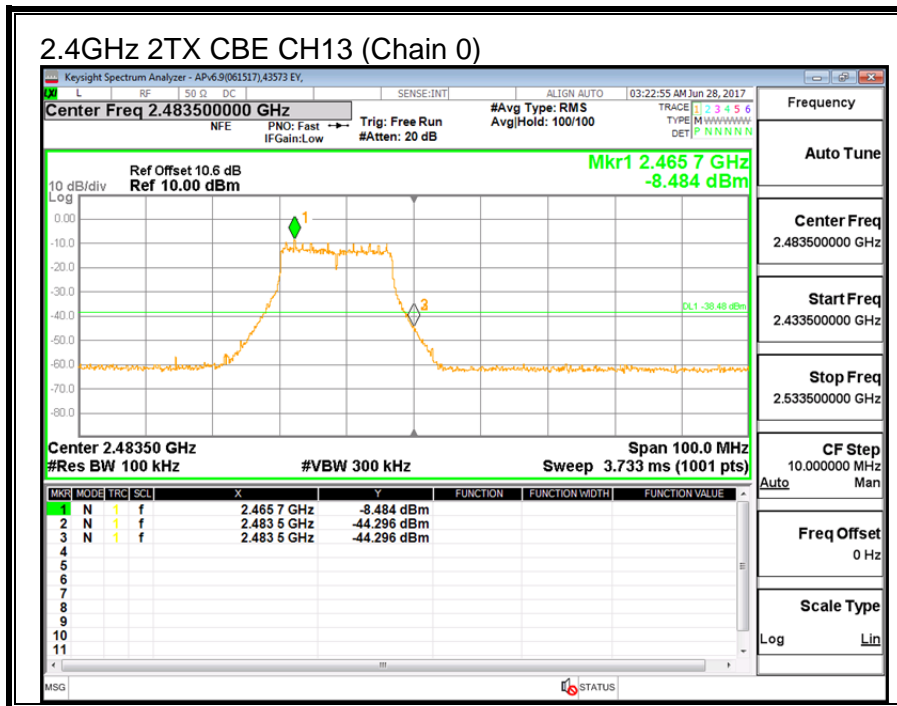


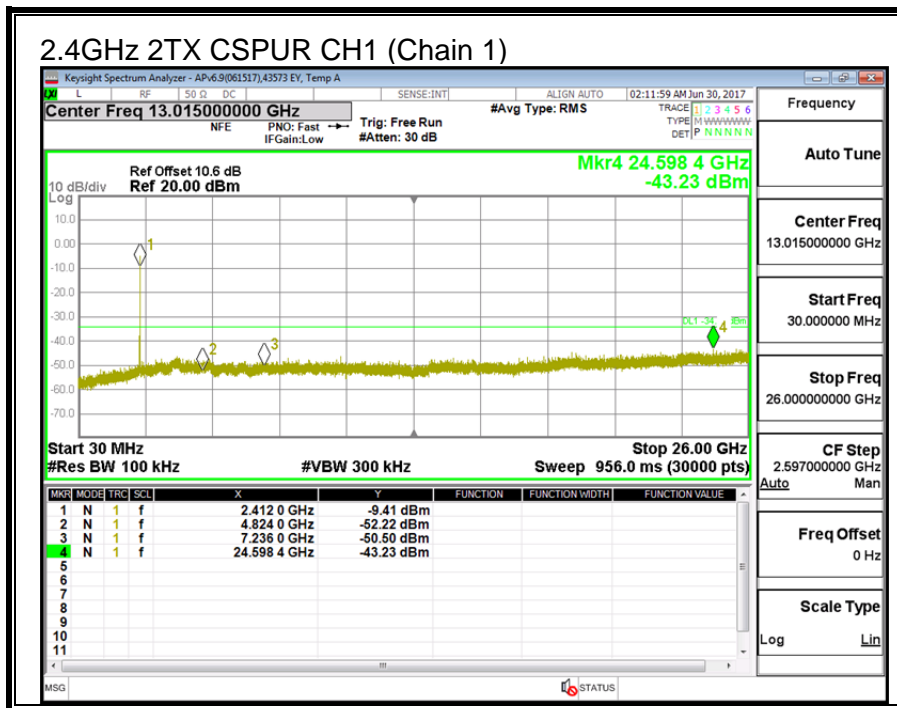
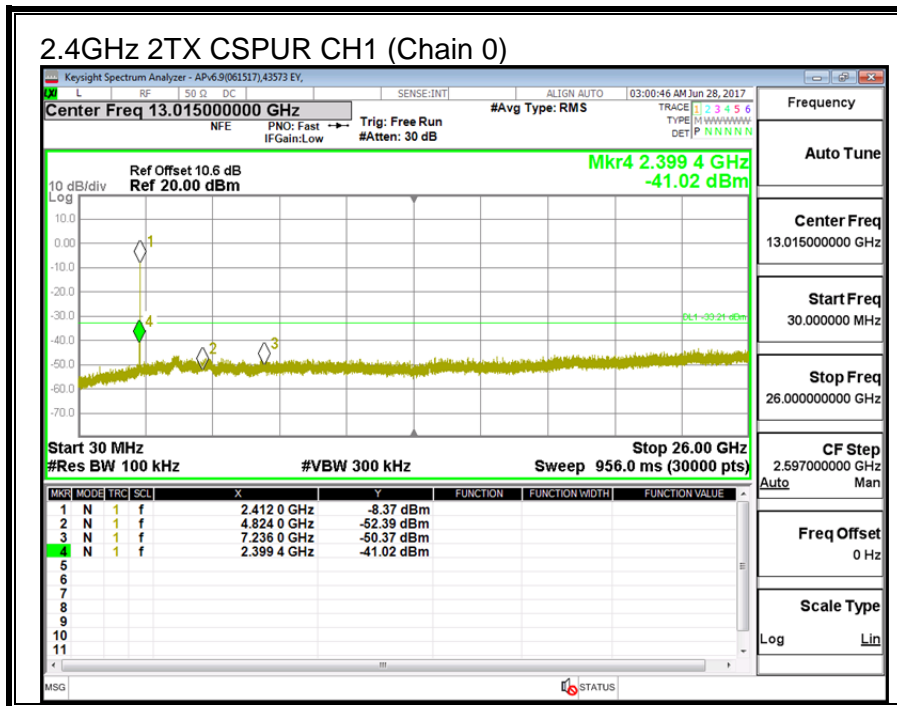






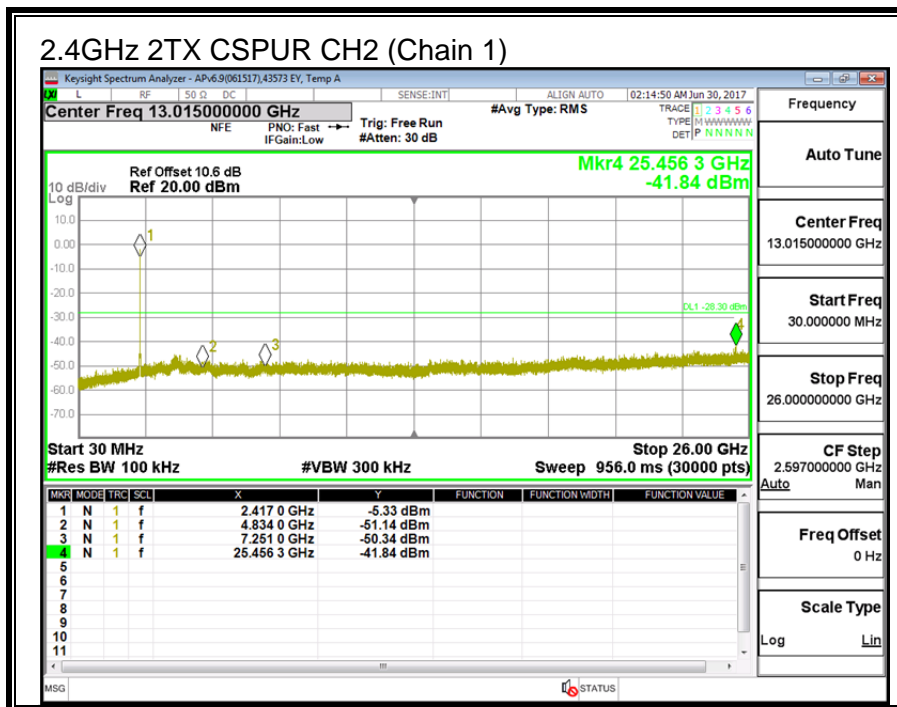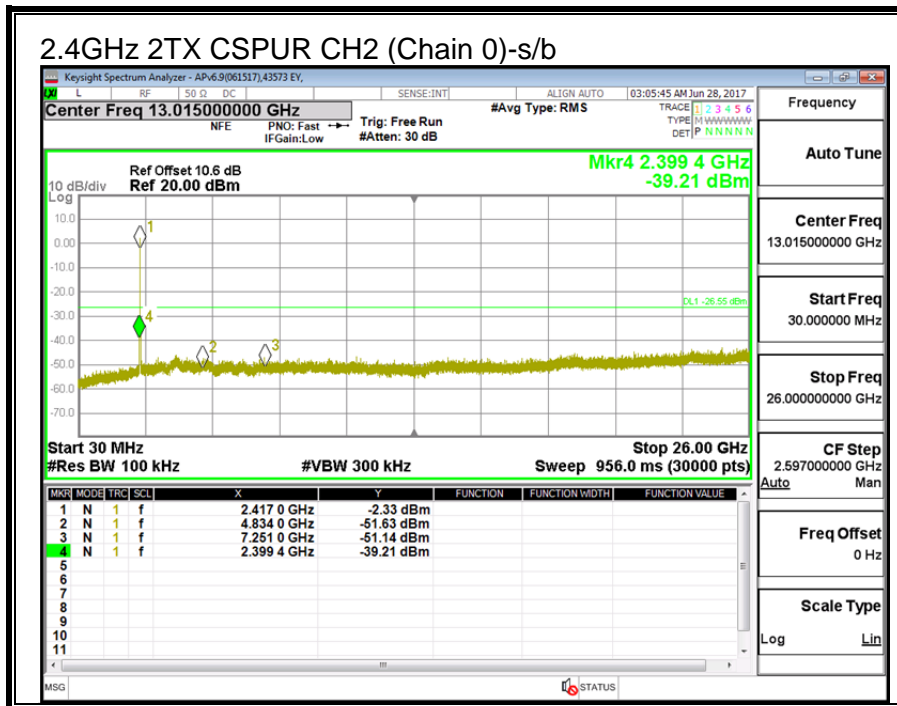

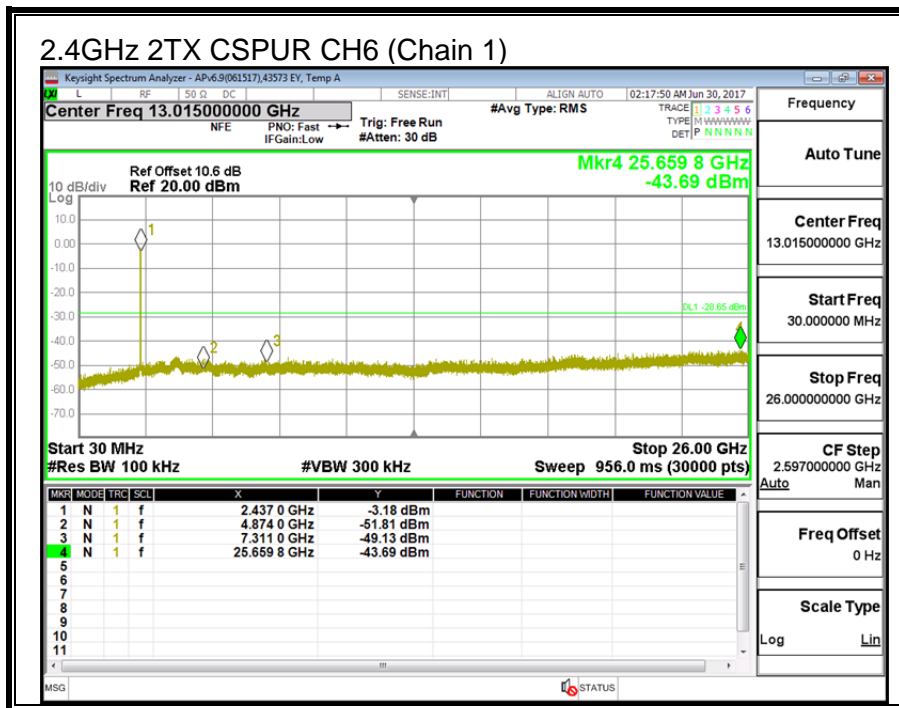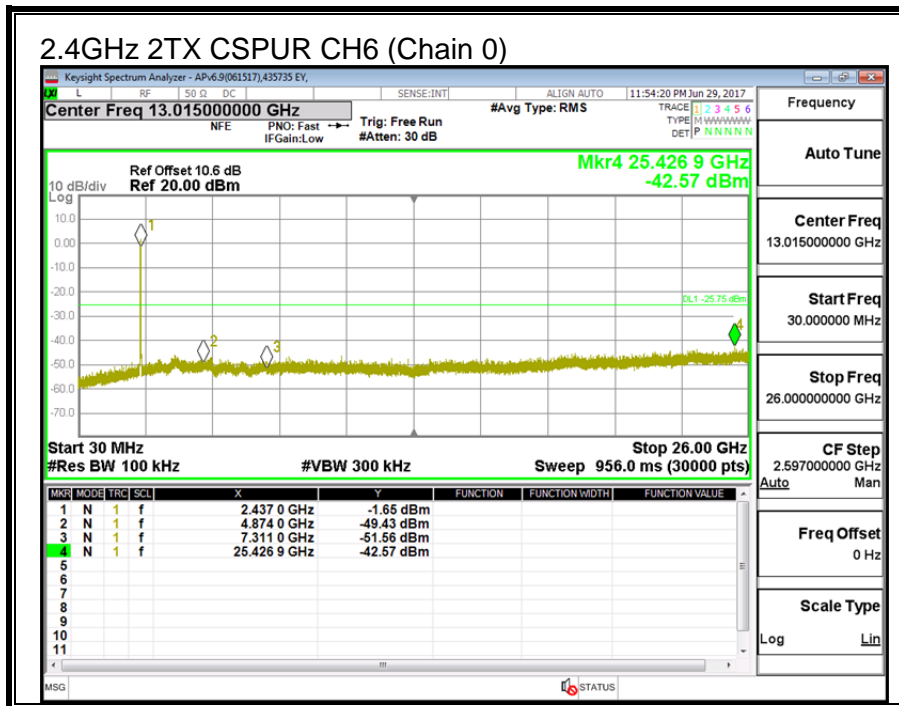

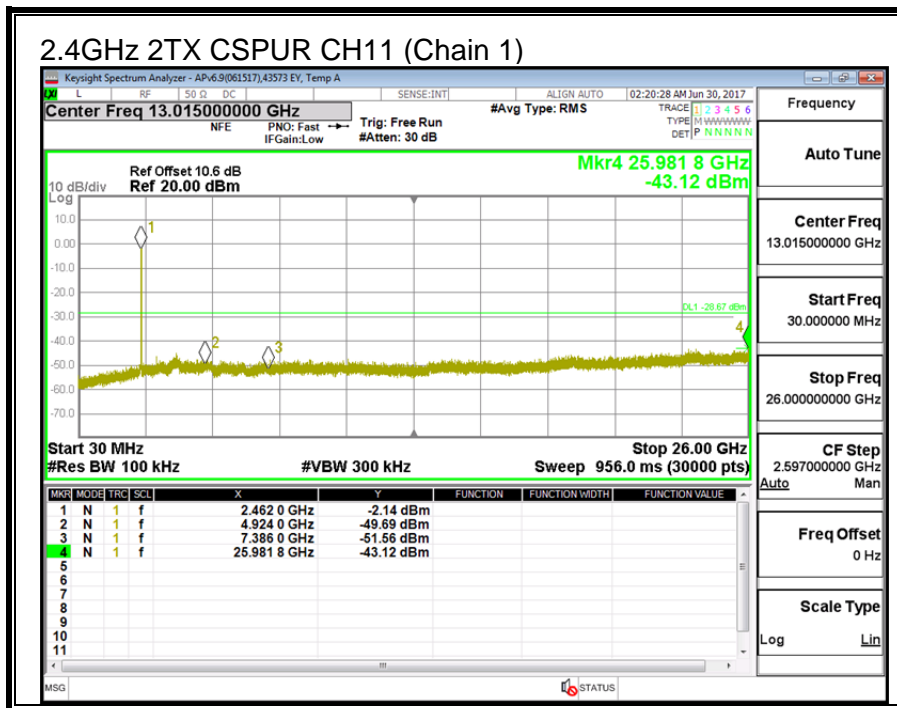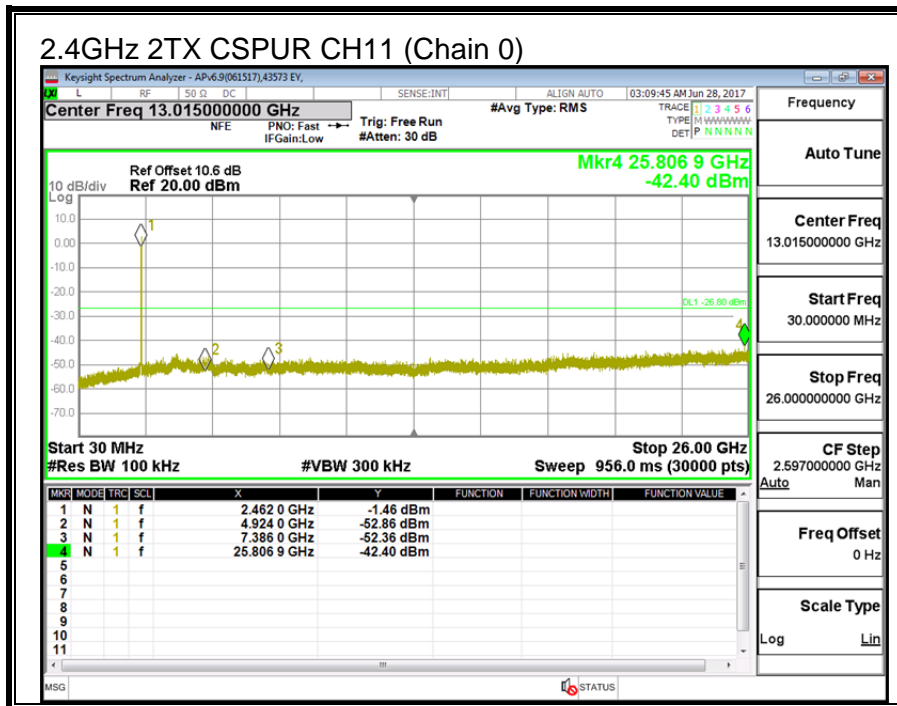

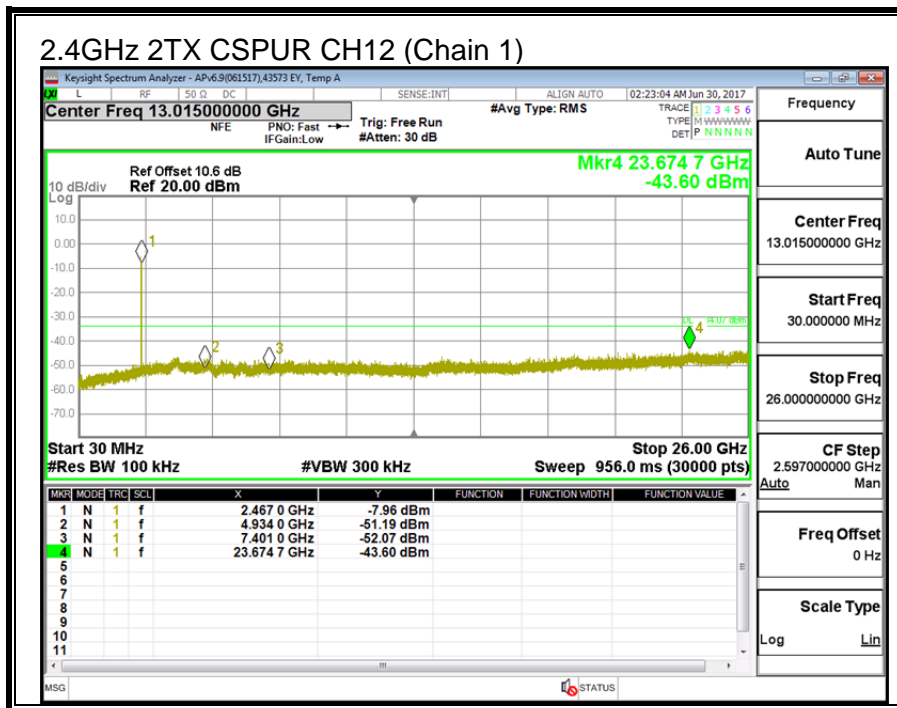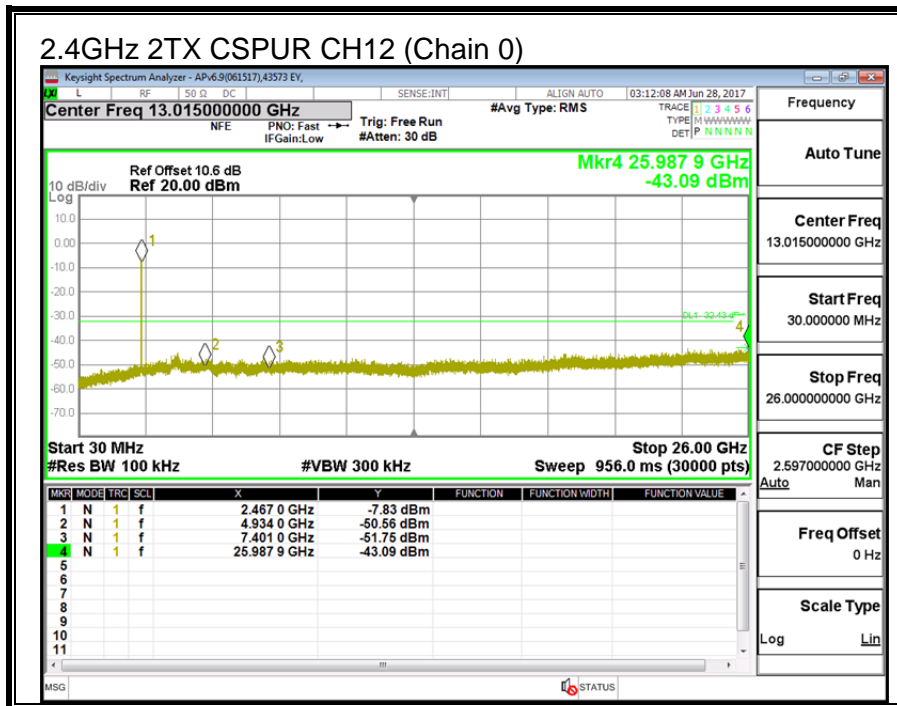

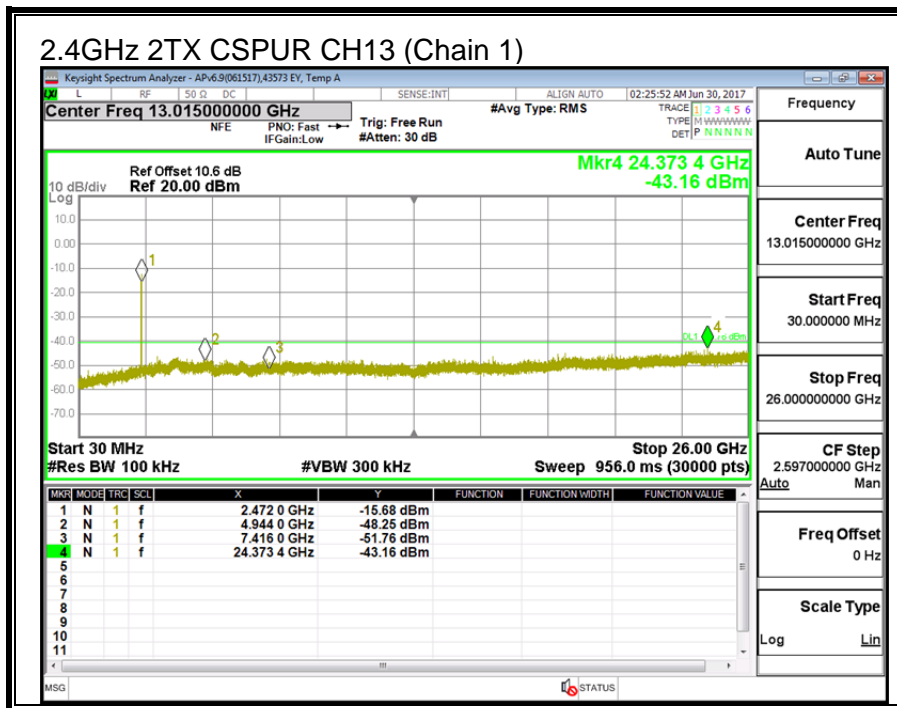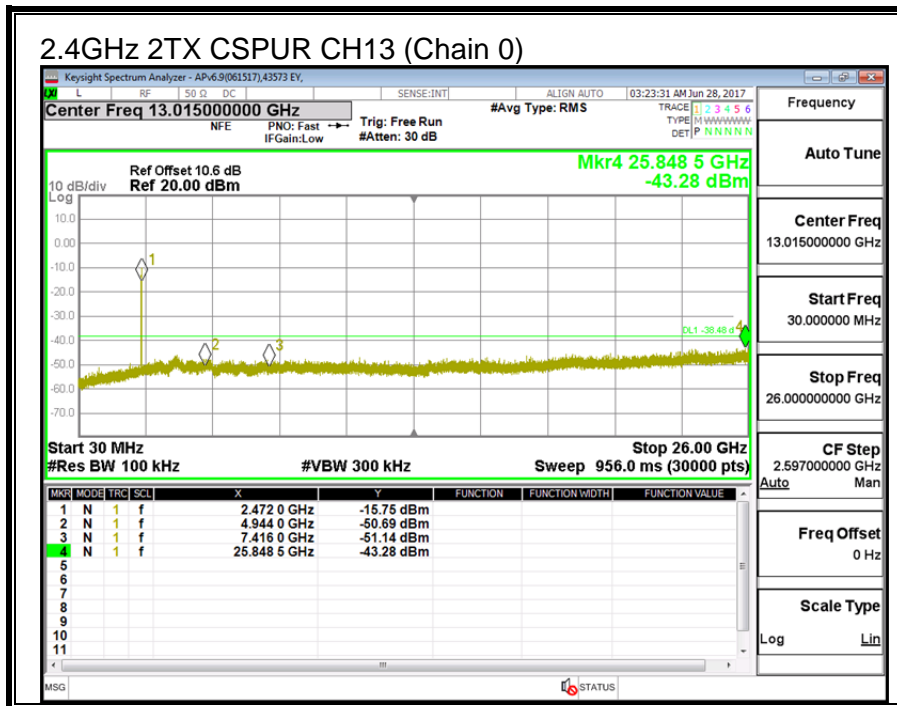

## 9.4. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND

### 9.4.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### RESULTS

| Channel | Frequency | 6 dB BW Chain 0 (MHz) | 6 dB BW Chain 1 (MHz) | Minimum Limit (MHz) |
|---------|-----------|-----------------------|-----------------------|---------------------|
| CH1     | 2412      | 17.68                 | 17.68                 | 0.5                 |
| CH2     | 2417      | 17.80                 | 17.60                 | 0.5                 |
| CH6     | 2437      | 17.68                 | 17.68                 | 0.5                 |
| CH11    | 2462      | 16.40                 | 17.64                 | 0.5                 |
| CH12    | 2467      | 16.32                 | 17.76                 | 0.5                 |
| CH13    | 2472      | 16.52                 | 17.40                 | 0.5                 |

