



TEST REPORT

Report Number: R14311585-E1

Applicant : Sony corporation
1-7-1 Konan Minato-ku
Tokyo, 108-0075, Japan

FCC ID : PY7-93060R

EUT Description : GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC/AX, GPS, WPT & NFC

Test Standard(s) : FCC CFR47 Part 2, Part 22, Part 24, Part 27

Date Of Issue:
2022-08-12

Prepared by:
UL LLC.
12 Laboratory Drive
Research Triangle Park, NC 27709 USA.
TEL: (919) 549-1400



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-08-03	Initial Review	Noah Bennett
V2	2022-08-10	Addressed TCB Feedback: -Added note clarifying CSE test date, 9.3.1, 9.3.2 -Revised LTE 13 section 9.3.7 -Revised LTE 41 section 9.3.8 -Revised LTE 4 and LTE 41 scans with DL markers -Updated section 6.5 -Updated limits in section 10.3 with units -Removed CE Type number references	Noah Bennett
V3	2022-08-11	-Added WB statement to LTE 13 Radiated, 10.1.7 -Revised Section 6.2 -Revised section 9.3.8	Noah Bennett
V4	2022-08-12	-Revised Section 6.2	Noah Bennett

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. SUMMARY OF TEST RESULTS	7
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION	8
5. DECISION RULES AND MEASUREMENT UNCERTAINTY	9
5.1. METROLOGICAL TRACEABILITY	9
5.2. DECISION RULES	9
5.3. MEASUREMENT UNCERTAINTY	9
5.4. SAMPLE CALCULATION	9
6. EQUIPMENT UNDER TEST	10
6.1. DESCRIPTION OF EUT	10
6.2. MAXIMUM OUTPUT POWER	10
6.3. SOFTWARE AND FIRMWARE	14
6.4. MAXIMUM ANTENNA GAIN	14
6.5. WORST-CASE CONFIGURATION AND MODE	14
6.6. DESCRIPTION OF TEST SETUP	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. RF OUTPUT POWER VERIFICATION	20
8.1. GSM	20
8.1.1. GSM GSM850	21
8.1.2. GSM850DTM	22
8.1.3. GSM GSM1900	23
8.1.4. GSM1900DTM	24
8.2. WCDMA	25
8.2.1. WCDMA BAND 5	28
8.3. LTE	30
8.3.1. LTE BAND 4	31
8.3.2. LTE BAND 5	37
8.3.3. LTE BAND 12	41
8.3.4. LTE BAND 13	45

8.3.5. LTE BAND 41..... 47

9. CONDUCTED TEST RESULTS 51

9.1. OCCUPIED BANDWIDTH 51

9.1.1. GSM..... 55

9.1.2. WCDMA 55

9.1.3. LTE BAND 4..... 56

9.1.4. LTE BAND 5..... 58

9.1.5. LTE BAND 12..... 60

9.1.6. LTE BAND 13..... 62

9.1.7. LTE BAND 41..... 63

9.2. BAND EDGE AND EMISSION MASK 65

9.2.1. GSM GSM850..... 66

9.2.2. GSM GSM1900..... 67

9.2.3. WCDMA BAND 5 68

9.2.4. LTE BAND 4..... 69

9.2.5. LTE BAND 5..... 82

9.2.6. LTE BAND 12..... 90

9.2.7. LTE BAND 13..... 99

9.2.8. LTE BAND 41..... 103

9.3. OUT OF BAND EMISSIONS 112

9.3.1. GSM GSM850..... 113

9.3.2. GSM GSM1900..... 115

9.3.3. WCDMA BAND 5 117

9.3.4. LTE BAND 4..... 119

9.3.5. LTE BAND 5..... 126

9.3.6. LTE BAND 12..... 130

9.3.7. LTE BAND 13..... 135

9.3.8. LTE BAND 41..... 137

9.4. FREQUENCY STABILITY 142

9.4.1. GSM..... 142

9.4.2. WCDMA 144

9.4.3. LTE BAND 4..... 145

9.4.4. LTE BAND 5..... 146

9.4.5. LTE BAND 12..... 147

9.4.6.	LTE BAND 13.....	148
9.4.7.	LTE BAND 41.....	149
9.5.	PEAK TO AVERAGE RATIO.....	150
9.5.1.	GSM.....	150
9.5.2.	WCDMA.....	151
9.5.3.	LTE BAND 4.....	152
9.5.4.	LTE BAND 5.....	154
10.	RADIATED TEST RESULTS.....	156
10.1.	FIELD STRENGTH OF SPURIOUS RADIATION ABOVE 1GHz.....	156
10.1.1.	GSM850.....	157
10.1.2.	GSM1900.....	168
10.1.3.	WCDMA5.....	177
10.1.4.	LTE BAND 4.....	184
10.1.5.	LTE BAND 5.....	192
10.1.6.	LTE BAND 12.....	199
10.1.7.	LTE BAND 13.....	206
10.1.8.	LTE BAND 41.....	211
10.2.	WORST CASE EMISSIONS.....	219
10.3.	Simultaneous Transmission.....	241
10.3.1.	Scan 1.....	241
10.3.2.	Scan 2.....	243
10.3.4.	Scan 3.....	245
10.3.5.	Scan 4.....	247
11.	SETUP PHOTOS.....	248




1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SONY CORPORATION 1-7-1 KONAN MINATO-KU TOKYO, 108-0075, JAPAN
FCC ID	PY7-93060R
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC/AX, GPS, WPT & NFC
Serial Number	QV77005UBL, QV77006NBL, QV7700GHD5, QV77004ZD5, QV7700D7D5
Sample Receipt Date	2022-06-07 and 2022-06-09
Date Tested	2022-06-21 TO 2022-08-09
Applicable Standards	FCC CFR47 Part 22, Part 24, Part 27
Test Results	COMPLIES

UL LLC. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC. will constitute fraud and shall nullify the document.

Approved & Released By:	Reviewed By:	Prepared By:
		
Dan Corona Operations Leader UL LLC.	Kiya Kedida Senior Project Engineer UL LLC.	Noah Bennett Electrical Engineer UL LLC.

2. SUMMARY OF TEST RESULTS

This report contains data provided by the customer which can impact the validity of results. UL LLC Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

Requirement Description	Band	Requirement Clause Number (FCC)	Result	Remarks
Effective Radiated Power	LTE 5, GSM 850, WCDMA 5	22.913 (a)(5)	Pass	None
	LTE 12	27.50 (c) (10)		
	LTE 13	27.50 (b) (10)		
Equivalent Isotropic Radiated Power	LTE 4	27.50 (d) (4)		
	LTE 41	27.50 (h) (2)		
	GSM 1900	24.232 (c)		

Requirement Description	Requirement Clause Number (FCC)	Result	Remarks
Occupied Bandwidth	2.1049	Pass	None
Band Edge and Emission Mask	2.1051, 22.917 (a), 24.238 (a), 27.53 (h), 27.53 (m)(4) & (m) (6), 27.53 (g), 27.53 (c) (f), 27.53(a), 27.53(l)	Pass	None
Out of Band Emissions	2.1051, 22.917 (a), 24.238 (a), 27.53 (h), 27.53 (m)(4) & (m) (6), 27.53 (g), 27.53 (c) (f), 27.53(a), 27.53(l)	Pass	None
Frequency Stability	2.1055, 22.355, 24.235, 27.54	Pass	None
Peak-to-Average Ratio	22.913 (d), 24.232 (d), 27.50 (d) (5), 27.50 (j) (4)	Pass	None
Field Strength of Spurious Radiation	2.1053, 22.917 (a), 24.238 (a), 27.53 (h), 27.53 (m)(4) & (m) (6), 27.53 (g), 27.53 (c) (f), 27.53(a), 27.53(l),	Pass	None

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with the following:

- ANSI C63.26:2015
- FCC CFR 47 Part 2, Part 22, Part 24, Part 27.
- [FCC KDB 971168 D01 v03r01](#): Power Meas License Digital Systems
- [FCC KDB 971168 D02 v02r01](#): Misc Rev Approv License Devices
- [FCC KDB 412172 D01 v01r01](#): Determining ERP and EIRP

4. FACILITIES AND ACCREDITATION

UL LLC is accredited by A2LA, Certificate Number 0751.06, for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input checked="" type="checkbox"/>	Building 2800 Suite Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

5. DECISION RULES AND MEASUREMENT UNCERTAINTY

5.1. METROLOGICAL TRACEABILITY

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, with a maximum time between calibrations of one year or the manufacturers' recommendation, whichever is less, and where applicable is traceable to recognized national standards.

5.2. DECISION RULES

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	U _{Lab}
Radio Frequency (Spectrum Analyzer)	141.2 Hz
Occupied Channel Bandwidth	1.22%
RF output power, conducted	1.3 dB (PK) 0.45 dB (AV)
Power Spectral Density, conducted	2.47 dB
Unwanted Emissions, conducted	1.94 dB
All emissions, radiated	6.01 dB
Conducted Emissions (0.150-30MHz) - LISN	3.40 dB
Temperature	0.57°C
Humidity	3.39%
DC Supply voltages	1.70%

Uncertainty figures are valid to a confidence level of 95%.

5.4. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)
36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.
36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT & NFC. This report covers GSM/WCDMA/LTE.

6.2. MAXIMUM OUTPUT POWER

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015
KDB 971168 D01 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
824.2-848.8	GPRS	32.8	-7.00	7.0	23.65	0.232	319.5	320KGXW
	EGPRS	27.3			18.15	0.065	311.9	312KG7W

Part 24 1900MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	EIRP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
1850.2-1909.8	GPRS	27.2	-4.70	2.0	22.50	0.178	320.6	321KGXW
	EGPRS	26.6			21.90	0.155	318.7	319KG7W

WCDMA MODE

Part 22 Band 5

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	Limit (W)	ERP		99% BW (kHz)	Emission Designator
					(dBm)	(W)		
826.4-846.6	REL 99	21.8	-7.00	7.0	12.64	0.018	4170	4M17F9W
	HSDPA	21.1			11.95	0.016	4150	4M15F9W

LTE BAND 4

Part 27								
EIRP Limit (W)		1.00						
Antenna Gain (dBi)		-5.30						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	1710.7	1754.3	18.0	12.70	0.019	1090	1M09G7W
	16QAM			18.3	13.00	0.020	1090	1M09D7W
3.0	QPSK	1711.5	1753.5	18.0	12.70	0.019	2700	2M70G7W
	16QAM			18.3	13.00	0.020	2690	2M69D7W
5.0	QPSK	1712.5	1752.5	18.0	12.70	0.019	4500	4M50G7W
	16QAM			18.3	13.00	0.020	4510	4M51D7W
10.0	QPSK	1715.0	1750.0	18.0	12.70	0.019	8990	8M99G7W
	16QAM			18.4	13.10	0.020	8970	8M97D7W
15.0	QPSK	1717.5	1747.5	17.8	12.50	0.018	13400	13M4G7W
	16QAM			18.1	12.80	0.019	13420	13M4D7W
20.0	QPSK	1720.0	1745.0	18.3	13.00	0.020	17890	17M9G7W
	16QAM			18.7	13.40	0.022	17900	17M9D7W

LTE BAND 5

Part 22H								
ERP Limit (W)		7.00						
Antenna Gain (dBi)		-7.00						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	824.7	848.3	20.9	11.75	0.015	1090	1M09G7W
	16QAM			21.3	12.15	0.016	1090	1M09D7W
3.0	QPSK	825.5	847.5	21.0	11.85	0.015	2700	2M70G7W
	16QAM			21.2	12.05	0.016	2700	2M70D7W
5.0	QPSK	826.5	846.5	21.0	11.85	0.015	4500	4M50G7W
	16QAM			21.3	12.15	0.016	4500	4M50D7W
10.0	QPSK	829.0	844.0	21.1	11.95	0.016	8940	8M94G7W
	16QAM			21.5	12.35	0.017	8950	8M95D7W

LTE BAND 12

Part 27								
ERP Limit (W)		3.00						
Antenna Gain (dBi)		-6.70						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
1.4	QPSK	699.7	715.3	20.8	11.95	0.016	1090	1M09G7W
	16QAM			21.1	12.25	0.017	1090	1M09D7W
3.0	QPSK	700.5	714.5	20.8	11.95	0.016	2680	2M68G7W
	16QAM			21.2	12.35	0.017	2690	2M69D7W
5.0	QPSK	701.5	713.5	20.8	11.95	0.016	4490	4M49G7W
	16QAM			21.1	12.25	0.017	4500	4M50D7W
10.0	QPSK	704.0	711.0	20.8	11.96	0.016	8950	8M95G7W
	16QAM			21.1	12.25	0.017	8950	8M95D7W

LTE BAND 13

Part 27								
ERP Limit (W)		3.00						
Antenna Gain (dBi)		-7.10						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	ERP Average (dBm)	ERP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	779.5	784.5	21.1	11.85	0.015	4510	4M51G7W
	16QAM			21.6	12.35	0.017	4490	4M49D7W
10.0	QPSK	782.0	782.0	21.0	11.76	0.015	8930	8M93G7W
	16QAM			21.4	12.15	0.016	8950	8M95D7W

LTE BAND 41

Part 27								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-2.90						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
5.0	QPSK	2498.5	2687.5	19.2	16.30	0.043	4530	4M53G7W
	16QAM			19.3	16.40	0.044	4500	4M50D7W
10.0	QPSK	2501.0	2685.0	19.2	16.30	0.043	8970	8M97G7W
	16QAM			19.2	16.30	0.043	8980	8M98D7W
15.0	QPSK	2503.5	2682.5	19.0	16.10	0.041	13430	13M4G7W
	16QAM			19.1	16.20	0.042	13400	13M4D7W
20.0	QPSK	2506.0	2680.0	18.9	16.00	0.040	17870	17M9G7W
	16QAM			19.1	16.20	0.042	17880	17M9D7W

6.3. SOFTWARE AND FIRMWARE

The EUT firmware installed during testing was version 0.55.

6.4. MAXIMUM ANTENNA GAIN

The antenna(s) gain and type, as provided by the manufacturer' are as follows:

Antenna	Supported Band(s)	Frequency Range (MHz)	Peak Gain (dBi)
Main Antenna 1	GSM850, WCDMA 5, LTE B5	824-849	-7.0
	LTE B12	699-716	-6.7
	LTE B13	777-787	-7.1
Main Antenna 2	GSM1900	1850-1910	-4.7
	LTE B4	1710-1755	-5.3
	LTE B41	2496-2690	-2.9

6.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:
 Band 4, Band 5, Band 12, Band 13, Band 17, and Band 41.

The EUT supports 2G and 3G Bands of:
 WCDMA Band V, GSM 850 and GSM 1900.

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case. All Radiated testing was done at Max Bandwidth at RB1 to represent the worst case.

The EUT was investigated in three orthogonal orientations X/Y/Z for Low Band and Mid Band frequency ranges. See the below table for WC Orientations:

Antenna	Frequency Band (MHz)	Orientation
Main 1	Low Band (Fc<1000MHz)	Y
Main 2	Mid Band (1000MHz<Fc<3000MHz)	Y

The Worst-Case scenarios for below 1GHz and above 18GHz are as follows:

Technology	Frequency Band	Modulation
GSM	850	GPRS
WCDMA	Band 5	Rel 99
LTE	Band 13	16-QAM

Simultaneous transmission worst-case modes were selected as follows:

- LTE Band 4, 20300, 1745MHz, 20MHz, 1RB and 2442MHz 11ax HE20 26T/8 C0/C1 and 5240MHz C0/C1 HE20 26T/0
- LTE Band 4, 20300, 1745MHz, 20MHz, 1RB and 2442MHz 11ax HE20 106T/R54 C0/C1
- LTE Band 4, 20300, 1745MHz, 20MHz, 1RB and 5240MHz 11ax HE20 26T/0 C0/C1
- LTE Band 12, 23060, 704MHz, 10MHz, 1RB and 11ax HE20 2462MHz 106T/R54 C0/C1

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Sony	XQZ-UC11-010-236-21	1821W34209742	NA

I/O CABLES

I/O Cable List						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB-C	Non-Shielded	<3m	Connected to Power Supply
2	3.5mm	1	3.5mm Audio	Non-Shielded	<1m	Connected to headphones

TEST SETUP

The EUT is connected to the Test support laptop and configured to transmit at each test frequency and mode.

For Conducted Testing the EUT was powered via external DC Power Supply.

For Radiated Testing the EUT was connected to AC Mains via ACDC Adaptor and headphones were

SETUP DIAGRAMS

Please see Photos Exhibit R14311585-EP1 FCC WWAN SETUP PHOTOS EXHIBIT for Setup Diagrams and Photos.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 1)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	0.009-30MHz				
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2021-08-19	2022-08-19
	30-1000 MHz				
AT0066	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB1	2022-03-01	2023-03-01
	1-18 GHz				
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-05-11	2023-05-11
	18-40 GHz				
AT0063	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2021-11-04	2022-11-04
AT0061	Horn Antenna, 26-40GHz	ARA	MWH-2640/B	2021-11-04	2022-11-04
	Gain-Loss Chains				
C1-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2022-05-05	2023-05-05
C1-SAC02	Gain-loss string: 25-1000MHz	Various	Various	2022-05-05	2023-05-05
C1-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-05	2023-05-05
C1-SAC04	Gain-loss string: 18-40GHz	Various	Various	2022-05-05	2023-05-05
	Receiver & Software				
197954	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-04-14	2023-04-14
SA0020	Spectrum Analyzer	Agilent	E4446A	2022-06-08	2023-06-08
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 181474341	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27
	Wideband Radio Communications Tester	Rohde and Schwarz	CMW500		

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 2)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
206211	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-03-21	2023-03-21
	Gain-Loss Chains				
C2-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-10	2023-05-10
	Receiver & Software				
197955	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-03-08	2023-03-08
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
s/n 181474409	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville – Chamber 4)

Equip. ID	Description	Manufacturer/Brand	Model Number	Last Cal.	Next Cal.
	1-18 GHz				
AT0067	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2022-05-24	2023-05-24
	Gain-Loss Chains				
C4-SAC03	Gain-loss string: 1-18GHz	Various	Various	2022-05-20	2023-05-20
	Receiver & Software				
206496	Spectrum Analyzer	Rohde & Schwarz	ESW44	2022-02-15	2023-02-15
SOFTEMI	EMI Software	UL	Version 9.5 (18 Oct 2021)		
	Additional Equipment used				
210642	Environmental Meter	Fisher Scientific	15-077-963	2021-08-16	2023-08-16
207620	Wideband Radio Communications Tester	Anritsu	MT8821C	2022-08-07	2023-08-07

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Common Equipment					
Conducted Room 1					
PWM004 (PRE0137346)	RF Power Meter	Keysight Technologies	N1911A	2021-08-17	2022-08-17
PWS006	Peak and Avg Power Sensor, 50MHz to 18GHz	Keysight Technologies	N1921A	2021-12-17	2022-12-17
s/n 181474341	Environmental Meter	Fisher Scientific	15-077-963	2021-09-27	2022-09-27
s/n MY62176088	DC Regulated Power Supply	Keysight Technologies	E3633A	NA	NA
212967	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500 (SN)	2021-11-15	2022-11-15
MY51100032	Spectrum Analyzer	Agilent Technologies	E4446A	2022-03-04	2024-03-04
SOFTEMI	UL Power Verification	UL	Version 3.1.4	NA	NA
SOFTEMI	CLT Software	UL	Version 30(A) 2020/12/10	NA	NA

NOTES:

- * Testing is completed before equipment expiration date.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

8. RF OUTPUT POWER VERIFICATION

8.1. GSM

Using CMW500 Communication Test Set

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press **Connection control** to choose the different menus

Press **RESET** > choose all to reset all settings

Connection	Press Signal Off to turn off the signal and change settings Network Support > GSM+GPRS or GSM+EGPRS Main Service > Packet Data Service selection > Test Mode A – Auto Slot Config. Off
MS Signal	Press Slot Config bottom on the right twice to select and change the number of time slots and power setting > Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850/900 > 27 dBm for EGPRS 850/900 > 30 dBm for GPRS1800/1900 > 26 dBm for EGPRS1800/1900
BS Signal	Enter the same channel number for TCH channel (test channel) and BCCH channel Frequency Offset > + 0 Hz Mode > BCCH and TCH BCCH Level > -85 dBm (May need to adjust if link is not stable) BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel] Channel Type > Off P0 > 4 dB Slot Config > Unchanged (if already set under MS Signal) TCH > Choose desired test channel Hopping > Off Main Timeslot > 3 (Default)
Network	Coding Scheme > CS 1 (GPRS) and MCS5 (EGPRS) Bit Stream > 2E9-1PSR Bit Pattern
AF/RF	Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection	Press Signal On to turn on the signal and change settings

RESULT

8.1.1. GSM GSM850

Tested By	27129/21193
Test Date	7/8/2022
Sample No.	5029697
Call Box S/N	212967
Cable loss	10.21
Antenna Port	Main 1

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.5	23.5	33.2	24.2
			190	836.6	32.6	23.6		
			251	848.8	32.8	23.7		
		2	128	824.2	29.5	23.4	30.2	24.2
			190	836.6	29.6	23.6		
			251	848.8	29.5	23.5		
		3	128	824.2	27.7	23.5	28.4	24.1
			190	836.6	27.7	23.5		
			251	848.8	27.8	23.5		
		4	128	824.2	26.5	23.4	27.2	24.2
			190	836.6	26.5	23.5		
			251	848.8	26.5	23.5		
EDGE (8PSK)	MCS5	1	128	824.2	27.0	17.9	27.7	18.7
			190	836.6	27.1	18.0		
			251	848.8	27.3	18.2		
		2	128	824.2	24.1	18.1	24.7	18.7
			190	836.6	24.4	18.3		
			251	848.8	23.9	17.9		
		3	128	824.2	22.1	17.9	22.9	18.6
			190	836.6	22.4	18.1		
			251	848.8	22.6	18.3		
		4	128	824.2	20.9	17.9	21.7	18.7
			190	836.6	21.0	17.9		
			251	848.8	21.5	18.5		

8.1.2. GSM850DTM

Tested By	22797/40882
Test Date	7/19/2022
Sample No.	QV77005UBL
Call Box S/N	212967
Cable loss	11.008
Antenna Port	Main1

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.6		23.6		33.2		24.2	
			190	836.6	32.7		23.7					
			251	848.8	32.8		23.8					
		2	128	824.2	29.2	29.3	23.2	23.2	30.2	30.2	24.2	24.2
			190	836.6	29.3	29.3	23.3	23.3				
			251	848.8	29.3	29.4	23.3	23.4				
		3	128	824.2	27.1	27.0	22.9	22.7	28.4	28.4	24.1	24.1
			190	836.6	27.2	27.1	23.0	22.9				
			251	848.8	27.4	27.3	23.1	23.0				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	32.6		23.6		33.2		24.2	
			190	836.6	32.7		23.7					
			251	848.8	32.8		23.8					
		2	128	824.2	29.4	23.1	23.4	17.1	30.2	24.7	24.2	18.7
			190	836.6	29.4	23.3	23.4	17.3				
			251	848.8	29.4	23.3	23.4	17.3				
		3	128	824.2	27.3	21.1	23.1	16.8	28.4	22.9	24.1	18.6
			190	836.6	27.3	21.3	23.1	17.0				
			251	848.8	27.4	21.4	23.1	17.1				

8.1.3. GSM GSM1900

Tested By	27129/21193
Test Date	7/8/2022
Sample No.	5034166
Call Box S/N	212967
Cable loss	10.36
Antenna Port	Main 2

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.1	18.0	27.7	18.7
			661	1880.0	27.2	18.2		
			810	1909.8	27.1	18.1		
		2	512	1850.2	23.9	17.9	24.7	18.7
			661	1880.0	24.1	18.1		
			810	1909.8	24.0	18.0		
		3	512	1850.2	22.0	17.8	22.9	18.6
			661	1880.0	22.4	18.2		
			810	1909.8	22.3	18.1		
		4	512	1850.2	21.1	18.1	21.9	18.9
			661	1880.0	21.3	18.2		
			810	1909.8	21.1	18.1		
EDGE (8PSK)	MCS5	1	512	1850.2	26.2	17.1	26.7	17.7
			661	1880.0	26.6	17.6		
			810	1909.8	26.2	17.2		
		2	512	1850.2	23.2	17.2	23.7	17.7
			661	1880.0	23.2	17.2		
			810	1909.8	23.1	17.1		
		3	512	1850.2	21.5	17.2	21.9	17.6
			661	1880.0	21.8	17.6		
			810	1909.8	21.4	17.2		
		4	512	1850.2	20.0	17.0	20.7	17.7
			661	1880.0	20.4	17.4		
			810	1909.8	20.0	17.0		

8.1.4. GSM1900DTM

Tested By	22797/40882
Test Date	7/19/2022
Sample No.	QV77005UBL
Call Box S/N	212967
Cable loss	12.11
Antenna Port	Main2

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.2		18.2		27.7		18.7	
			661	1880.0	27.4		18.4					
			810	1909.8	27.1		18.1					
		2	512	1850.2	23.3	23.6	17.3	17.5	24.7	24.7	18.7	18.7
			661	1880.0	23.4	23.6	17.3	17.6				
			810	1909.8	23.2	23.4	17.2	17.4				
		3	512	1850.2	21.3	21.3	17.1	17.0	22.9	22.9	18.6	18.6
			661	1880.0	21.4	21.4	17.1	17.1				
			810	1909.8	21.2	21.2	17.0	16.9				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	27.2		18.2		27.7		18.7	
			661	1880.0	27.4		18.4					
			810	1909.8	27.1		18.1					
		2	512	1850.2	23.3	23.2	17.3	17.2	24.7	23.7	18.7	17.7
			661	1880.0	23.4	23.2	17.3	17.2				
			810	1909.8	23.2	23.1	17.2	17.1				
		3	512	1850.2	21.3	21.2	17.1	16.9	22.9	21.9	18.6	17.6
			661	1880.0	21.4	21.3	17.1	17.0				
			810	1909.8	21.2	21.1	17.0	16.8				

8.2. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW \geq RBW \geq 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in table C.10.1.4 of 3GPP TS 34.121-1 A summary of these settings are illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSPA REL 6 (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

DUAL CARRIER HSDPA (DC-HSDPA (REL 8, CAT 24))

The following 4 Sub-tests were for DC-HSDPA were completed according to Release 8 procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of these settings are illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+ REL 7

The following 1 Sub-test was completed according to Release 7 procedures in table C.11.1.4 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ee}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hr} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

RESULT

8.2.1. WCDMA BAND 5

Test Date	6/22/2022
Tested By	40882
Sample no.	5034161
Call Box S/N	212967
Cable loss	10.2
Antenna Port	Main 1

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.74	N/A	22.7
		4183	836.6	21.79		
		4233	846.6	21.78		
HSDPA	Subtest 1	4132	826.4	21.1	0	22.0
		4183	836.6	20.8		
		4233	846.6	20.8		
	Subtest 2	4132	826.4	20.7	0	22.0
		4183	836.6	20.8		
		4233	846.6	20.8		
	Subtest 3	4132	826.4	20.2	0.5	21.5
		4183	836.6	20.3		
		4233	846.6	20.3		
	Subtest 4	4132	826.4	20.2	0.5	21.5
		4183	836.6	20.3		
		4233	846.6	20.3		
HSUPA	Subtest 1	4132	826.4	20.8	0	22.0
		4183	836.6	20.8		
		4233	846.6	20.8		
	Subtest 2	4132	826.4	18.7	2	20.0
		4183	836.6	18.8		
		4233	846.6	18.8		
	Subtest 3	4132	826.4	19.7	1	21.0
		4183	836.6	19.7		
		4233	846.6	19.8		
	Subtest 4	4132	826.4	18.7	2	20.0
		4183	836.6	18.8		
		4233	846.6	18.8		
	Subtest 5	4132	826.4	20.3	0	22.0
		4183	836.6	20.3		
		4233	846.6	20.3		

DC- HSDPA	Subtest 1	4132	826.4	20.7	0	
		4183	836.6	20.8		
		4233	846.6	20.8		
	Subtest 2	4132	826.4	20.7	0	
		4183	836.6	20.8		
		4233	846.6	20.8		
	Subtest 3	4132	826.4	20.2	0.5	
		4183	836.6	20.3		
		4233	846.6	20.3		
	Subtest 4	4132	826.4	20.6	0.5	
		4183	836.6	20.3		
		4233	846.6	20.3		

8.3. LTE

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS136.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS136.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS136.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	20	>10	≤ 1
			5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

8.3.1. LTE BAND 4

Test Date	6/21/2022
Tested By	27465/40882
Sample no.	5034161
Call Box S/N	212967
Cable loss	3.3
Antenna Port	Main 2

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20050	20175	20300	MPR	Tune-up Limit
				1720 MHz	1732.5 MHz	1745 MHz		
20 MHz	QPSK	1	0	18.3	17.78	18.2	0	19
		1	49	18.2	17.73	18.1	0	19
		1	99	18.1	17.66	18.1	0	19
		50	0	18.3	17.78	18.2	0	19
		50	24	18.2	17.77	18.2	0	19
		50	50	18.2	17.74	18.2	0	19
		100	0	18.2	17.76	18.2	0	19
	16QAM	1	0	18.6	18.03	18.4	0	19
		1	49	18.7	18.01	18.5	0	19
		1	99	18.5	17.99	18.4	0	19
		50	0	18.3	17.80	18.2	0	19
		50	24	18.2	17.78	18.2	0	19
		50	50	18.2	17.77	18.2	0	19
		100	0	18.2	17.77	18.2	0	19
	64QAM	1	0	18.7	18.19	18.4	0	19
		1	49	18.7	17.98	18.4	0	19
		1	99	18.6	18.11	18.3	0	19
		50	0	18.4	17.80	18.2	0	19
		50	24	18.3	17.79	18.2	0	19
		50	50	18.3	17.75	18.2	0	19
		100	0	18.3	17.79	18.2	0	19

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20025	20175	20325	MPR	Tune-up Limit
				1717.5 MHz	1732.5 MHz	1747.5 MHz		
15 MHz	QPSK	1	0	17.8	17.7	17.6	0	19
		1	37	17.8	17.7	17.7	0	19
		1	74	17.7	17.7	17.7	0	19
		36	0	17.8	17.8	17.7	0	19
		36	20	17.8	17.8	17.7	0	19
		36	39	17.8	17.7	17.7	0	19
		75	0	17.8	17.7	17.7	0	19
	16QAM	1	0	18.1	18.0	18.0	0	19
		1	37	18.1	17.9	18.0	0	19
		1	74	18.1	17.9	18.0	0	19
		36	0	17.9	17.8	17.7	0	19
		36	20	17.9	17.8	17.7	0	19
		36	39	17.7	17.8	17.8	0	19
		75	0	17.9	17.8	17.7	0	19
	64QAM	1	0	18.1	18.0	18.0	0	19
		1	37	18.1	18.0	18.0	0	19
		1	74	18.1	18.0	18.0	0	19
		36	0	17.9	17.8	17.7	0	19
		36	20	17.8	17.8	17.7	0	19
		36	39	17.8	17.8	17.8	0	19
		75	0	17.9	17.8	17.7	0	19

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20000	20175	20350	MPR	Tune-up Limit
				1715 MHz	1732.5 MHz	1750 MHz		
10 MHz	QPSK	1	0	17.9	17.8	17.8	0	19
		1	25	17.9	17.9	17.9	0	19
		1	49	17.8	17.8	17.8	0	19
		25	0	18.0	17.9	17.8	0	19
		25	12	17.9	17.9	17.8	0	19
		25	25	17.9	17.9	17.9	0	19
		50	0	17.9	17.9	17.8	0	19
	16QAM	1	0	18.4	18.2	18.2	0	19
		1	25	18.2	18.1	18.1	0	19
		1	49	18.2	18.2	18.2	0	19
		25	0	18.0	17.9	17.8	0	19
		25	12	18.0	17.9	17.8	0	19
		25	25	17.9	17.9	17.9	0	19
		50	0	17.9	17.9	17.8	0	19
	64QAM	1	0	18.2	18.1	18.1	0	19
		1	25	18.1	18.1	18.2	0	19
		1	49	18.1	18.0	18.1	0	19
		25	0	18.0	17.9	17.8	0	19
		25	12	18.0	17.9	17.9	0	19
		25	25	17.9	17.9	17.9	0	19
		50	0	17.9	17.9	17.8	0	19

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19975	20175	20375	MPR	Tune-up Limit
				1712.5 MHz	1732.5 MHz	1752.5 MHz		
5 MHz	QPSK	1	0	17.9	17.8	17.7	0	19
		1	12	18.0	17.9	17.9	0	19
		1	24	17.9	17.8	17.8	0	19
		12	0	17.9	17.9	17.9	0	19
		12	7	18.0	17.9	17.9	0	19
		12	13	18.0	17.9	17.9	0	19
		25	0	17.9	17.9	17.9	0	19
	16QAM	1	0	18.3	18.2	18.2	0	19
		1	12	18.3	18.3	18.3	0	19
		1	24	18.3	18.2	18.2	0	19
		12	0	18.0	17.9	17.9	0	19
		12	7	18.0	17.9	18.0	0	19
		12	13	18.0	17.9	17.9	0	19
		25	0	18.0	17.9	17.9	0	19
	64QAM	1	0	18.3	18.1	18.0	0	19
		1	12	18.3	18.1	18.2	0	19
		1	24	18.2	18.1	18.1	0	19
		12	0	18.0	17.9	17.9	0	19
		12	7	18.1	18.0	17.9	0	19
		12	13	18.0	18.0	17.9	0	19
		25	0	18.0	17.9	17.9	0	19

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19965	20175	20385	MPR	Tune-up Limit
				1711.5 MHz	1732.5 MHz	1753.5 MHz		
3 MHz	QPSK	1	0	17.9	17.8	17.8	0	19
		1	8	18.0	17.8	17.9	0	19
		1	14	17.9	17.8	17.8	0	19
		8	0	18.0	17.8	17.8	0	19
		8	4	18.0	17.9	17.9	0	19
		8	7	18.0	17.9	17.9	0	19
		15	0	18.0	17.8	17.8	0	19
	16QAM	1	0	18.3	18.1	18.1	0	19
		1	8	18.3	18.2	18.2	0	19
		1	14	18.2	18.0	18.1	0	19
		8	0	18.1	17.9	17.9	0	19
		8	4	18.1	18.0	17.9	0	19
		8	7	18.1	18.0	17.9	0	19
		15	0	18.0	17.9	17.9	0	19
	64QAM	1	0	18.2	18.0	18.2	0	19
		1	8	18.3	18.1	18.2	0	19
		1	14	18.2	18.1	18.1	0	19
		8	0	18.0	17.9	17.9	0	19
		8	4	18.1	18.0	17.9	0	19
		8	7	18.0	17.9	17.9	0	19
		15	0	18.0	17.9	17.9	0	19

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				19957	20175	20393	MPR	Tune-up Limit
				1710.7 MHz	1732.5 MHz	1754.3 MHz		
1.4 MHz	QPSK	1	0	18.0	17.8	17.8	0	19
		1	3	18.0	17.8	17.8	0	19
		1	5	18.0	17.8	17.8	0	19
		3	0	18.0	17.8	17.8	0	19
		3	1	18.0	17.8	17.8	0	19
		3	3	18.0	17.8	17.8	0	19
		6	0	18.0	17.8	17.8	0	19
	16QAM	1	0	18.3	18.1	18.2	0	19
		1	3	18.3	18.2	18.2	0	19
		1	5	18.3	18.2	18.2	0	19
		3	0	18.1	18.0	18.0	0	19
		3	1	18.2	18.0	18.1	0	19
		3	3	18.2	18.0	18.1	0	19
		6	0	18.0	17.9	17.9	0	19
	64QAM	1	0	18.3	18.2	18.1	0	19
		1	3	18.3	18.2	18.2	0	19
		1	5	18.2	18.2	18.2	0	19
		3	0	18.1	18.0	18.0	0	19
		3	1	18.1	18.0	18.0	0	19
		3	3	18.1	18.0	17.9	0	19
		6	0	18.0	17.9	17.9	0	19

8.3.2. LTE BAND 5

Test Date	6/21/2022
Tested By	27129/21193
Sample no.	5034161
Call Box S/N	212967
Cable loss	10.2
Antenna Port	Main 1

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20450	20525	20600	MPR	Tune-up Limit
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0	21.0	20.87	21.1	0	22
		1	25	21.0	20.89	21.1	0	22
		1	49	21.1	20.85	20.9	0	22
		25	0	21.0	20.88	21.1	0	22
		25	12	21.1	20.88	21.1	0	22
		25	25	21.1	20.87	21.0	0	22
		50	0	21.0	20.81	21.0	0	22
	16QAM	1	0	21.4	21.2	21.5	0	22
		1	25	21.3	21.2	21.4	0	22
		1	49	21.4	21.2	21.3	0	22
		25	0	21.0	20.9	21.1	0	22
		25	12	21.1	20.9	21.1	0	22
		25	25	21.0	20.9	21.1	0	22
		50	0	21.1	20.9	21.0	0	22
	64QAM	1	0	21.3	21.0	21.2	0	22
		1	25	21.2	21.2	21.2	0	22
		1	49	21.4	21.0	21.1	0	22
		25	0	21.0	20.9	20.9	0	22
		25	12	21.1	20.9	20.9	0	22
		25	25	21.0	20.9	20.8	0	22
		50	0	20.9	20.9	20.9	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	20.8	20.9	20.8	0	22
		1	12	20.9	21.0	20.9	0	22
		1	24	20.7	20.8	20.8	0	22
		12	0	20.8	20.9	20.8	0	22
		12	7	20.9	20.8	20.9	0	22
		12	13	20.8	20.9	20.9	0	22
		25	0	20.8	20.8	20.7	0	22
	16QAM	1	0	21.1	21.2	21.2	0	22
		1	12	21.2	21.3	21.3	0	22
		1	24	21.1	21.2	21.2	0	22
		12	0	21.0	20.8	20.8	0	22
		12	7	21.0	20.8	20.8	0	22
		12	13	20.9	21.0	20.8	0	22
		25	0	20.9	20.9	20.8	0	22
	64QAM	1	0	21.1	21.1	21.1	0	22
		1	12	21.1	21.1	21.3	0	22
		1	24	21.1	21.0	21.2	0	22
		12	0	20.8	20.8	20.9	0	22
		12	7	20.8	20.9	21.0	0	22
		12	13	20.8	20.9	20.9	0	22
		25	0	20.9	20.8	20.8	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	20.7	20.7	20.8	0	22
		1	8	20.8	21.0	20.9	0	22
		1	14	20.7	20.8	20.8	0	22
		8	0	20.8	20.8	20.8	0	22
		8	4	20.9	20.8	20.9	0	22
		8	7	20.9	20.9	20.9	0	22
		15	0	20.8	20.8	20.8	0	22
	16QAM	1	0	21.2	21.1	21.1	0	22
		1	8	21.2	21.2	21.2	0	22
		1	14	21.1	21.1	21.1	0	22
		8	0	20.9	20.9	20.9	0	22
		8	4	20.9	21.0	20.9	0	22
		8	7	20.9	21.0	20.9	0	22
		15	0	20.9	20.8	20.9	0	22
	64QAM	1	0	21.1	21.0	21.1	0	22
		1	8	21.1	21.1	21.2	0	22
		1	14	21.0	21.1	21.1	0	22
		8	0	20.9	20.9	20.9	0	22
		8	4	20.9	20.9	21.0	0	22
		8	7	20.9	21.0	21.0	0	22
		15	0	20.8	20.8	20.9	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	20.8	20.8	20.8	0	22
		1	3	20.8	20.9	20.8	0	22
		1	5	20.8	20.9	20.8	0	22
		3	0	20.8	20.8	20.8	0	22
		3	1	20.8	20.8	20.8	0	22
		3	3	20.8	20.9	20.8	0	22
		6	0	20.8	20.8	20.8	0	22
	16QAM	1	0	21.2	21.2	21.0	0	22
		1	3	21.2	21.3	21.0	0	22
		1	5	21.1	21.3	21.0	0	22
		3	0	21.1	21.1	20.9	0	22
		3	1	21.1	21.1	20.9	0	22
		3	3	21.0	21.1	21.0	0	22
		6	0	20.9	20.9	20.9	0	22
	64QAM	1	0	21.1	21.0	21.1	0	22
		1	3	21.2	21.2	21.2	0	22
		1	5	21.1	21.1	21.1	0	22
		3	0	20.9	21.0	21.0	0	22
		3	1	20.9	20.9	21.0	0	22
		3	3	20.9	21.0	20.9	0	22
		6	0	20.9	20.9	20.9	0	22

8.3.3. LTE BAND 12

Test Date	6/21/2022
Tested By	27129/21193
Sample no.	5034161
Call Box S/N	212967
Cable loss	10.19
Antenna Port	Main 1

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0	20.7	20.65	20.7	0	22
		1	25	20.7	20.72	20.7	0	22
		1	49	20.6	20.76	20.7	0	22
		25	0	20.5	20.67	20.8	0	22
		25	12	20.7	20.68	20.8	0	22
		25	25	20.8	20.81	20.8	0	22
		50	0	20.8	20.62	20.7	0	22
	16QAM	1	0	21.0	21.0	21.0	0	22
		1	25	21.0	21.0	21.1	0	22
		1	49	21.1	21.1	21.0	0	22
		25	0	20.6	20.8	20.7	0	22
		25	12	20.7	20.7	20.8	0	22
		25	25	20.7	20.8	20.9	0	22
		50	0	20.7	20.6	20.7	0	22
	64QAM	1	0	21.0	21.0	20.9	0	22
		1	25	21.0	21.0	21.1	0	22
		1	49	21.0	21.0	20.8	0	22
		25	0	20.6	20.7	20.7	0	22
		25	12	20.7	20.7	20.8	0	22
		25	25	20.6	20.7	20.7	0	22
		50	0	20.8	20.6	20.7	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	20.7	20.6	20.8	0	22
		1	12	20.7	20.8	20.8	0	22
		1	24	20.5	20.7	20.7	0	22
		12	0	20.6	20.6	20.7	0	22
		12	7	20.6	20.7	20.7	0	22
		12	13	20.6	20.8	20.8	0	22
		25	0	20.6	20.6	20.7	0	22
	16QAM	1	0	21.0	20.9	21.1	0	22
		1	12	21.1	21.1	21.1	0	22
		1	24	20.9	21.0	21.0	0	22
		12	0	20.7	20.6	20.7	0	22
		12	7	20.8	20.6	20.7	0	22
		12	13	20.7	20.7	20.7	0	22
		25	0	20.7	20.7	20.7	0	22
	64QAM	1	0	20.8	21.0	21.0	0	22
		1	12	20.9	21.1	21.0	0	22
		1	24	20.9	20.9	20.9	0	22
		12	0	20.6	20.7	20.7	0	22
		12	7	20.6	20.7	20.8	0	22
		12	13	20.6	20.8	20.8	0	22
		25	0	20.7	20.6	20.7	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	20.6	20.6	20.7	0	22
		1	8	20.7	20.7	20.8	0	22
		1	14	20.6	20.6	20.7	0	22
		8	0	20.6	20.6	20.7	0	22
		8	4	20.7	20.7	20.8	0	22
		8	7	20.7	20.7	20.8	0	22
		15	0	20.7	20.6	20.7	0	22
	16QAM	1	0	21.0	21.0	21.0	0	22
		1	8	21.1	21.2	21.1	0	22
		1	14	21.0	21.0	21.0	0	22
		8	0	20.8	20.7	20.8	0	22
		8	4	20.7	20.8	20.8	0	22
		8	7	20.8	20.8	20.8	0	22
		15	0	20.7	20.7	20.8	0	22
	64QAM	1	0	20.8	20.8	21.0	0	22
		1	8	20.9	21.0	21.1	0	22
		1	14	20.8	20.9	21.0	0	22
		8	0	20.8	20.7	20.8	0	22
		8	4	20.8	20.8	20.8	0	22
		8	7	20.8	20.8	20.9	0	22
		15	0	20.7	20.6	20.8	0	22

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	20.6	20.6	20.8	0	22
		1	3	20.6	20.7	20.8	0	22
		1	5	20.6	20.7	20.7	0	22
		3	0	20.6	20.7	20.7	0	22
		3	1	20.6	20.6	20.7	0	22
		3	3	20.6	20.7	20.7	0	22
		6	0	20.6	20.7	20.8	0	22
	16QAM	1	0	20.9	21.0	21.1	0	22
		1	3	20.8	21.0	21.1	0	22
		1	5	20.8	21.0	21.1	0	22
		3	0	20.9	20.9	20.9	0	22
		3	1	20.8	20.9	20.9	0	22
		3	3	20.8	20.8	21.0	0	22
		6	0	20.7	20.7	20.8	0	22
	64QAM	1	0	20.9	20.9	21.0	0	22
		1	3	21.0	21.0	21.0	0	22
		1	5	20.9	20.9	21.0	0	22
		3	0	20.8	20.8	20.9	0	22
		3	1	20.8	20.7	20.9	0	22
		3	3	20.8	20.7	20.9	0	22
		6	0	20.7	20.7	20.9	0	22

8.3.4. LTE BAND 13

Test Date	6/21/2022
Tested By	27129/21193
Sample no.	5034161
Call Box S/N	212967
Cable loss	10.21
Antenna Port	Main 1

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)		
				23230	MPR	Tune-up Limit
				782 MHz		
10 MHz	QPSK	1	0	20.95	0	22
		1	25	20.95	0	22
		1	49	20.80	0	22
		25	0	21.01	0	22
		25	12	20.93	0	22
		25	25	20.85	0	22
	16QAM	50	0	20.97	0	22
		1	0	21.4	0	22
		1	25	21.3	0	22
		1	49	21.3	0	22
		25	0	21.0	0	22
		25	12	21.0	0	22
	64QAM	25	25	21.0	0	22
		50	0	21.1	0	22
		1	0	21.2	0	22
		1	25	21.3	0	22
		1	49	21.2	0	22
		25	0	21.0	0	22
		25	12	21.0	0	22
	25	25	21.0	0	22	
	50	0	21.0	0	22	

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23205	23230	23255	MPR	Tune-up Limit
				779.5	782 MHz	784.5		
5 MHz	QPSK	1	0	21.1	21.0	21.1	0	22
		1	12	21.1	21.1	21.1	0	22
		1	24	20.9	20.9	21.1	0	22
		12	0	21.0	21.0	21.1	0	22
		12	7	21.1	21.0	21.1	0	22
		12	13	21.1	21.0	21.1	0	22
		25	0	20.9	20.9	21.1	0	22
	16QAM	1	0	21.4	21.3	21.5	0	22
		1	12	21.6	21.5	21.5	0	22
		1	24	21.3	21.3	21.3	0	22
		12	0	21.1	21.0	21.0	0	22
		12	7	21.1	21.0	21.0	0	22
		12	13	21.1	21.1	20.9	0	22
		25	0	21.1	21.0	21.1	0	22
	64QAM	1	0	21.4	21.2	21.3	0	22
		1	12	21.5	21.4	21.4	0	22
		1	24	21.4	21.3	21.4	0	22
		12	0	21.1	21.0	21.2	0	22
		12	7	21.0	21.0	21.2	0	22
		12	13	21.2	21.0	21.1	0	22
		25	0	21.1	21.0	21.1	0	22

8.3.5. LTE BAND 41

Test Date	6/23/2022 ; 08/03/2022
Tested By	40882; 27465/44389
Sample no.	5034161; 5034162
Call Box S/N	212967
Cable loss	10.38; 10.33
Antenna Port	Main 2

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	18.76	18.77	18.81	18.69	18.73	0	20
		1	49	18.79	18.79	18.74	18.60	18.66	0	20
		1	99	18.76	18.69	18.90	18.70	18.71	0	20
		50	0	18.89	18.87	18.87	18.70	18.68	0	20
		50	24	18.89	18.88	18.87	18.71	18.78	0	20
		50	50	18.85	18.85	18.85	18.71	18.76	0	20
		100	0	18.87	18.87	18.83	18.69	18.76	0	20
	16QAM	1	0	18.9	18.9	18.9	18.8	18.8	0	20
		1	49	19.0	19.0	19.1	18.8	18.9	0	20
		1	99	18.8	18.8	18.8	18.7	18.9	0	20
		50	0	18.9	18.9	18.9	18.7	18.7	0	20
		50	24	18.9	18.9	18.9	18.8	18.8	0	20
		50	50	18.9	18.9	18.9	18.7	18.8	0	20
		100	0	18.9	18.9	18.9	18.7	18.8	0	20
	64QAM	1	0	18.8	18.8	18.9	18.7	18.8	0	20
		1	49	18.9	18.8	19.0	18.6	18.9	0	20
		1	99	18.8	18.7	18.9	18.7	18.9	0	20
		50	0	18.9	18.9	18.9	18.7	18.7	0	20
		50	24	18.9	18.9	18.9	18.8	18.8	0	20
		50	50	18.9	18.9	18.9	18.8	18.8	0	20
		100	0	18.9	18.9	18.9	18.7	18.8	0	20

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39725	40173	40620	41068	41515	MPR	Tune-up Limit
				2503.5 MHz	2548.3 MHz	2593 MHz	2637.8 MHz	2682.5 MHz		
15 MHz	QPSK	1	0	18.9	18.9	18.8	18.8	18.8	0	20
		1	37	18.9	19.0	18.8	18.8	18.8	0	20
		1	74	18.8	19.0	18.8	18.9	18.8	0	20
		36	0	18.9	19.0	18.8	18.8	18.8	0	20
		36	20	19.0	19.0	19.0	18.9	19.0	0	20
		36	39	19.0	19.0	19.0	18.9	19.0	0	20
		75	0	18.9	19.0	18.8	18.9	18.8	0	20
	16QAM	1	0	18.8	18.9	18.8	18.9	18.7	0	20
		1	37	18.8	19.0	18.9	19.0	18.8	0	20
		1	74	18.7	19.0	18.9	18.9	18.9	0	20
		36	0	19.0	19.1	18.9	18.9	18.8	0	20
		36	20	19.0	19.0	19.0	19.0	19.0	0	20
		36	39	18.9	19.0	18.9	18.9	18.9	0	20
		75	0	19.0	19.1	18.8	18.9	18.8	0	20
	64QAM	1	0	18.9	19.0	18.7	18.9	18.8	0	20
		1	37	18.9	19.0	18.8	18.9	18.8	0	20
		1	74	18.7	19.0	18.8	19.0	18.8	0	20
		36	0	19.0	19.0	18.8	18.8	18.8	0	20
		36	20	19.1	19.0	19.0	18.9	19.0	0	20
		36	39	19.0	19.0	19.0	18.9	18.9	0	20
		75	0	19.0	19.0	18.9	18.9	18.8	0	20

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39700	40160	40620	41080	41540	MPR	Tune-up Limit
				2501 MHz	2547 MHz	2593 MHz	2639 MHz	2685 MHz		
10 MHz	QPSK	1	0	19.2	19.0	18.9	19.0	18.9	0	20
		1	25	19.2	19.1	19.1	19.0	19.0	0	20
		1	49	19.1	19.1	18.9	19.0	18.9	0	20
		25	0	19.2	19.2	19.0	19.1	18.9	0	20
		25	12	19.2	19.2	19.0	19.1	19.0	0	20
		25	25	19.1	19.1	19.1	19.1	19.1	0	20
		50	0	19.2	19.2	19.0	19.1	18.9	0	20
	16QAM	1	0	19.1	19.2	19.0	19.1	19.0	0	20
		1	25	19.0	19.1	19.1	19.0	19.0	0	20
		1	49	19.1	19.2	19.0	19.1	19.0	0	20
		25	0	19.1	19.2	19.0	19.1	18.9	0	20
		25	12	19.1	19.2	19.0	19.1	18.9	0	20
		25	25	19.1	19.1	19.1	19.1	19.1	0	20
		50	0	19.1	19.2	19.0	19.1	18.9	0	20
	64QAM	1	0	19.1	19.0	18.9	19.0	19.0	0	20
		1	25	19.2	19.1	19.1	19.1	19.1	0	20
		1	49	19.0	19.1	18.9	19.1	18.9	0	20
		25	0	19.1	19.2	19.0	19.1	18.9	0	20
		25	12	19.1	19.2	19.0	19.1	18.9	0	20
		25	25	19.2	19.1	19.1	19.1	19.1	0	20
		50	0	19.1	19.2	19.0	19.1	18.9	0	20

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						MPR	Tune-up Limit
				39675	40148	40620	41093	41565			
				2498.5 MHz	2545.8 MHz	2593 MHz	2640.3 MHz	2687.5 MHz			
5 MHz	QPSK	1	0	19.1	19.1	18.9	19.0	19.1	0	20	
		1	12	19.2	19.2	19.0	19.2	19.1	0	20	
		1	24	19.1	19.0	18.9	19.0	19.0	0	20	
		12	0	19.1	19.1	18.9	19.1	19.1	0	20	
		12	7	19.2	19.1	19.1	19.1	19.1	0	20	
		12	13	19.2	19.1	19.1	19.1	19.1	0	20	
		25	0	19.1	19.1	18.9	19.0	19.1	0	20	
	16QAM	1	0	19.1	19.1	19.0	19.0	19.1	0	20	
		1	12	19.2	19.3	19.0	19.1	19.1	0	20	
		1	24	19.1	19.1	19.0	19.1	19.1	0	20	
		12	0	19.2	19.1	18.9	19.1	19.1	0	20	
		12	7	19.2	19.1	19.2	19.1	19.1	0	20	
		12	13	19.2	19.0	19.1	19.0	19.1	0	20	
		25	0	19.1	19.1	18.9	19.1	19.1	0	20	
	64QAM	1	0	19.3	19.1	18.9	19.0	19.1	0	20	
		1	12	19.4	19.2	19.0	19.1	19.2	0	20	
		1	24	19.3	19.1	18.9	19.0	19.1	0	20	
		12	0	19.3	19.1	18.9	19.1	19.1	0	20	
		12	7	19.3	19.1	19.2	19.1	19.0	0	20	
		12	13	19.1	19.0	19.1	19.1	19.0	0	20	
		25	0	19.2	19.1	18.9	19.0	19.0	0	20	

9. CONDUCTED TEST RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested. Worst-case plots (highest bandwidth) are reported only.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	190	836.6	239.9	313.4
	EGPRS			242.1	305.8
GSM1900	GPRS	661	1880.0	241.3	320.6
	EGPRS			239.7	315.9

WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND5	REL 99	4408	836.6	4.14	4.71
	HSDPA			4.15	4.71

LTE4

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 4	1.4MHz, QPSK	6/0	1732.5	1.09	1.36
	1.4MHz, 16QAM			1.09	1.35
	3MHz, QPSK	15/0		2.69	3.01
	3MHz, 16QAM			2.7	3.04
	5MHz, QPSK	25/0		4.51	5.06
	5MHz, 16QAM			4.5	5.08
	10MHz, QPSK	50/0		8.97	9.64
	10MHz, 16QAM			8.99	9.97
	15MHz, QPSK	75/0		13.42	14.6
	15MHz, 16QAM			13.4	14.72
	20MHz, QPSK	100/0		17.90	19.39
	20MHz, 16QAM			17.89	19.44

LTE5

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 5	1.4MHz, QPSK	6/0	836.5	1.09	1.31
	1.4MHz, 16QAM			1.09	1.33
	3MHz, QPSK	15/0		2.7	3.01
	3MHz, 16QAM			2.7	3.03
	5MHz, QPSK	25/0		4.5	5.13
	5MHz, 16QAM			4.5	5.09
	10MHz, QPSK	50/0		8.94	9.74
	10MHz, 16QAM			8.95	9.79

LTE12

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 12	1.4MHz, QPSK	6/0	707.5	1.09	1.31
	1.4MHz, 16QAM			1.09	1.33
	3MHz, QPSK	15/0		2.68	3.02
	3MHz, 16QAM			2.69	3.02
	5MHz, QPSK	25/0		4.49	5.12
	5MHz, 16QAM			4.5	5.16
	10MHz, QPSK	50/0		8.95	9.84
	10MHz, 16QAM			8.95	9.88


LTE13

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 13	5MHz, QPSK	25/0	782.0	4.51	5.06
	5MHz, 16QAM			4.49	5.07
	10MHz, QPSK	50/0		8.93	9.88
	10MHz, 16QAM			8.95	9.74


LTE41

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 41	5MHz, QPSK	25/0	2593.0	4.53	5.04
	5MHz, 16QAM			4.5	5.15
	10MHz, QPSK	50/0		8.97	9.76
	10MHz, 16QAM			8.98	9.79
	15MHz, QPSK	75/0		13.43	14.43
	15MHz, 16QAM			13.4	14.82
	20MHz, QPSK	100/0		17.87	19.28
	20MHz, 16QAM			17.88	19.83


9.1.1. GSM

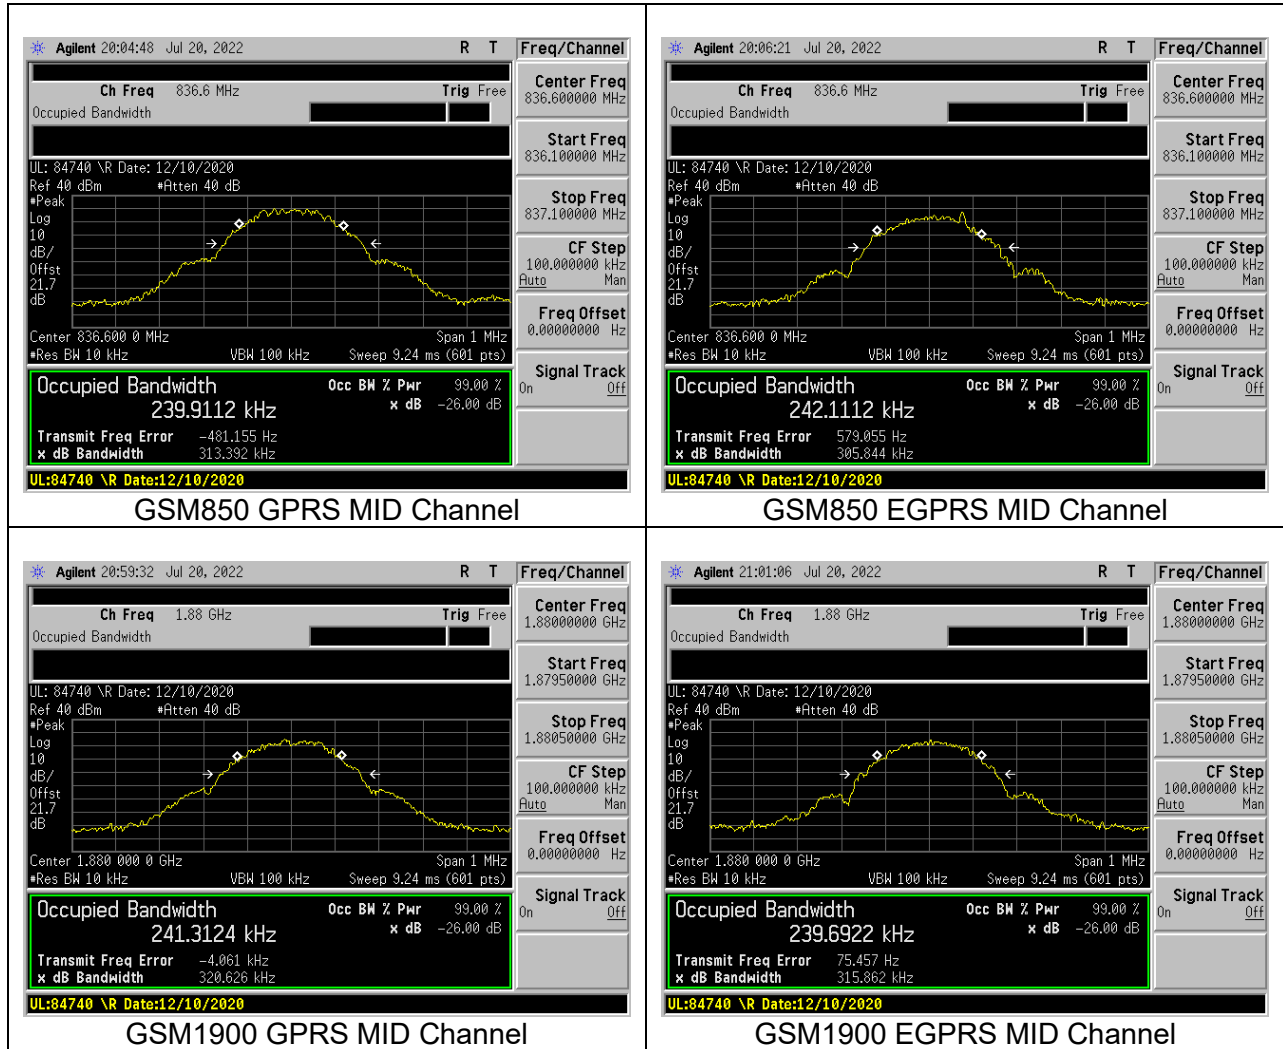


9.1.2. WCDMA

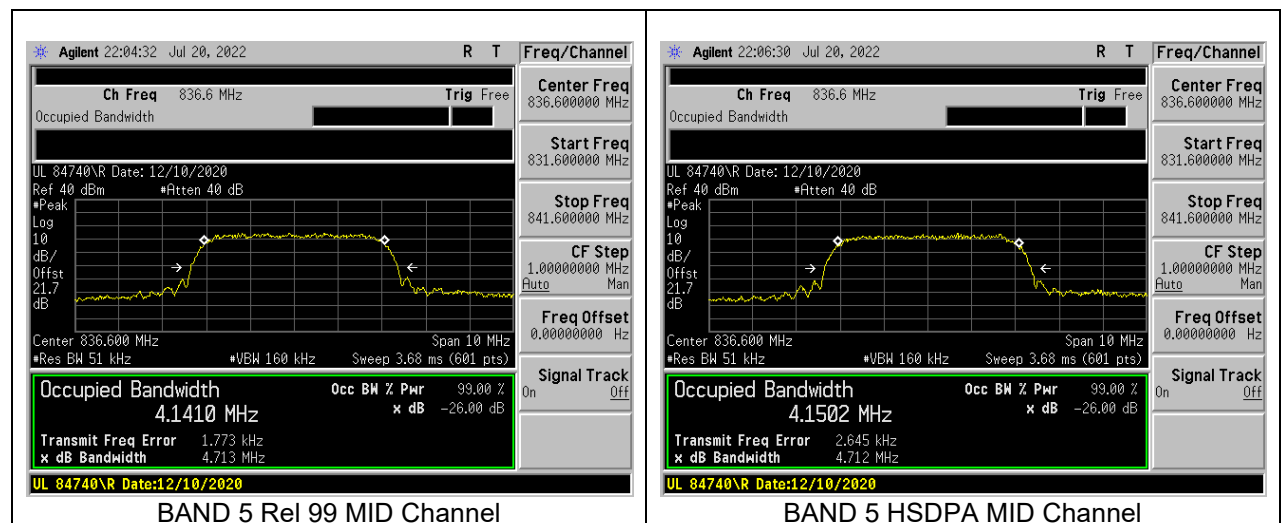


9.1.3. LTE BAND 4

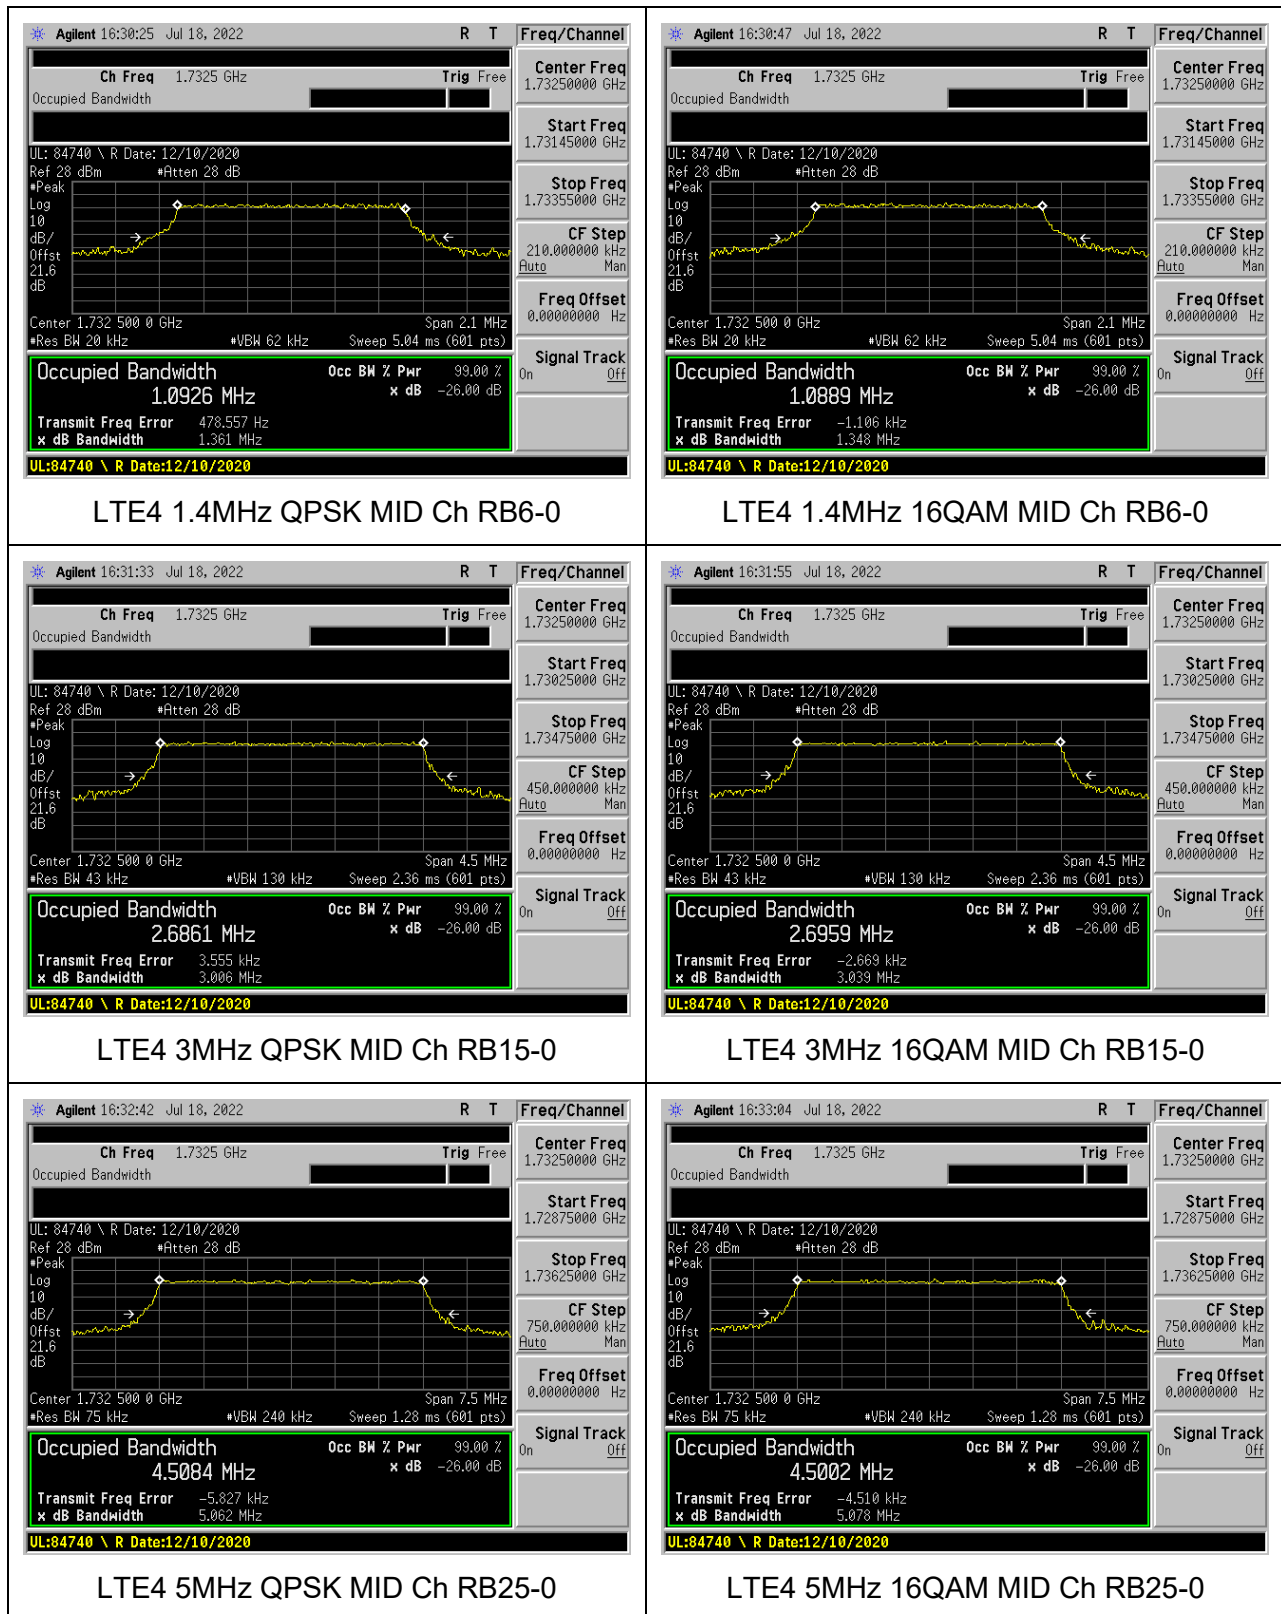


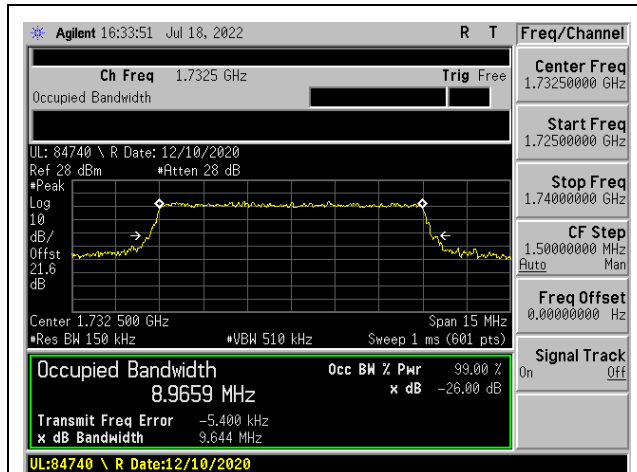


LTE4 10MHz QPSK MID Ch RB50-0

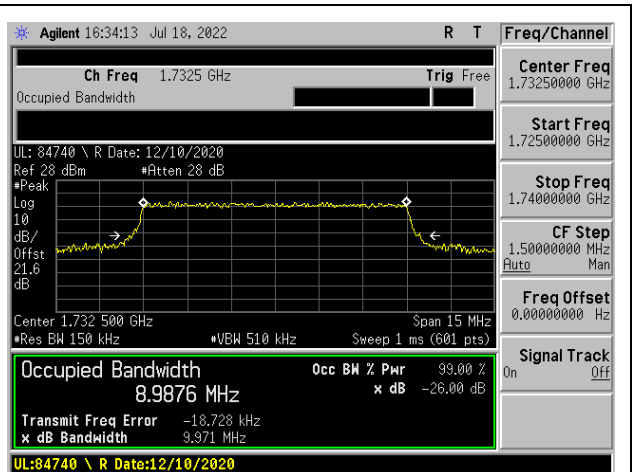


LTE4 10MHz 16QAM MID Ch RB50-0

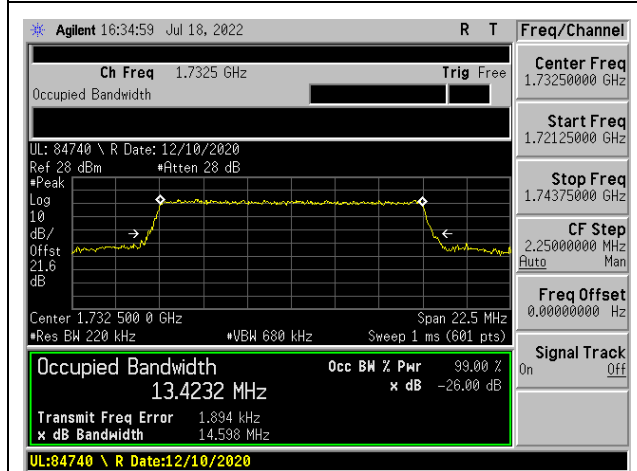


LTE4 15MHz QPSK MID Ch RB75-0

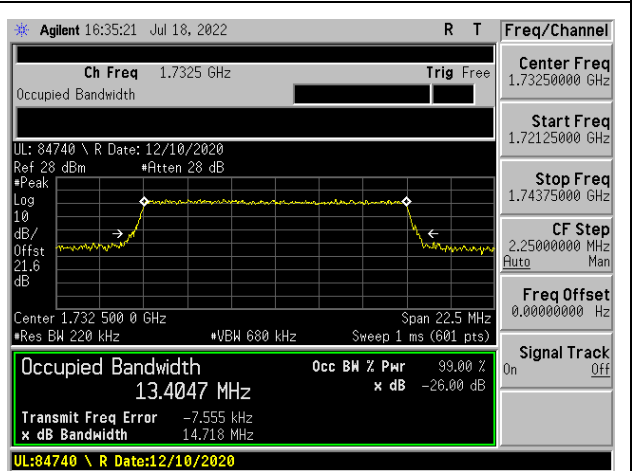

LTE4 15MHz 16QAM MID Ch RB75-0

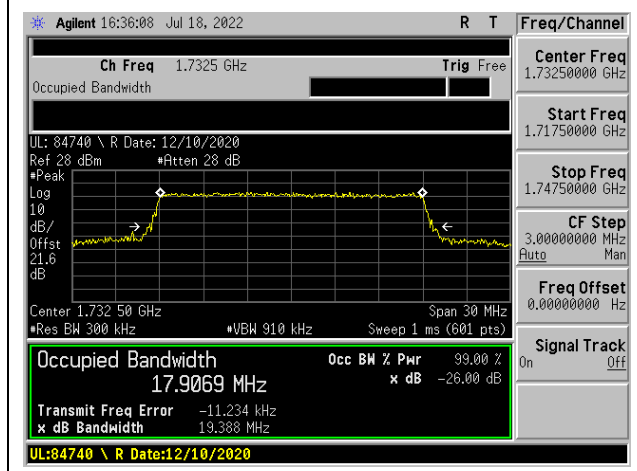



LTE4 20MHz QPSK MID Ch RB100-0

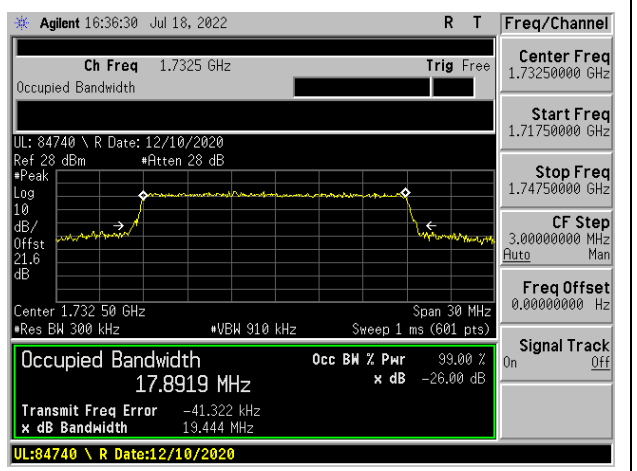


LTE4 20MHz 16QAM MID Ch RB100-0





9.1.4. LTE BAND 5

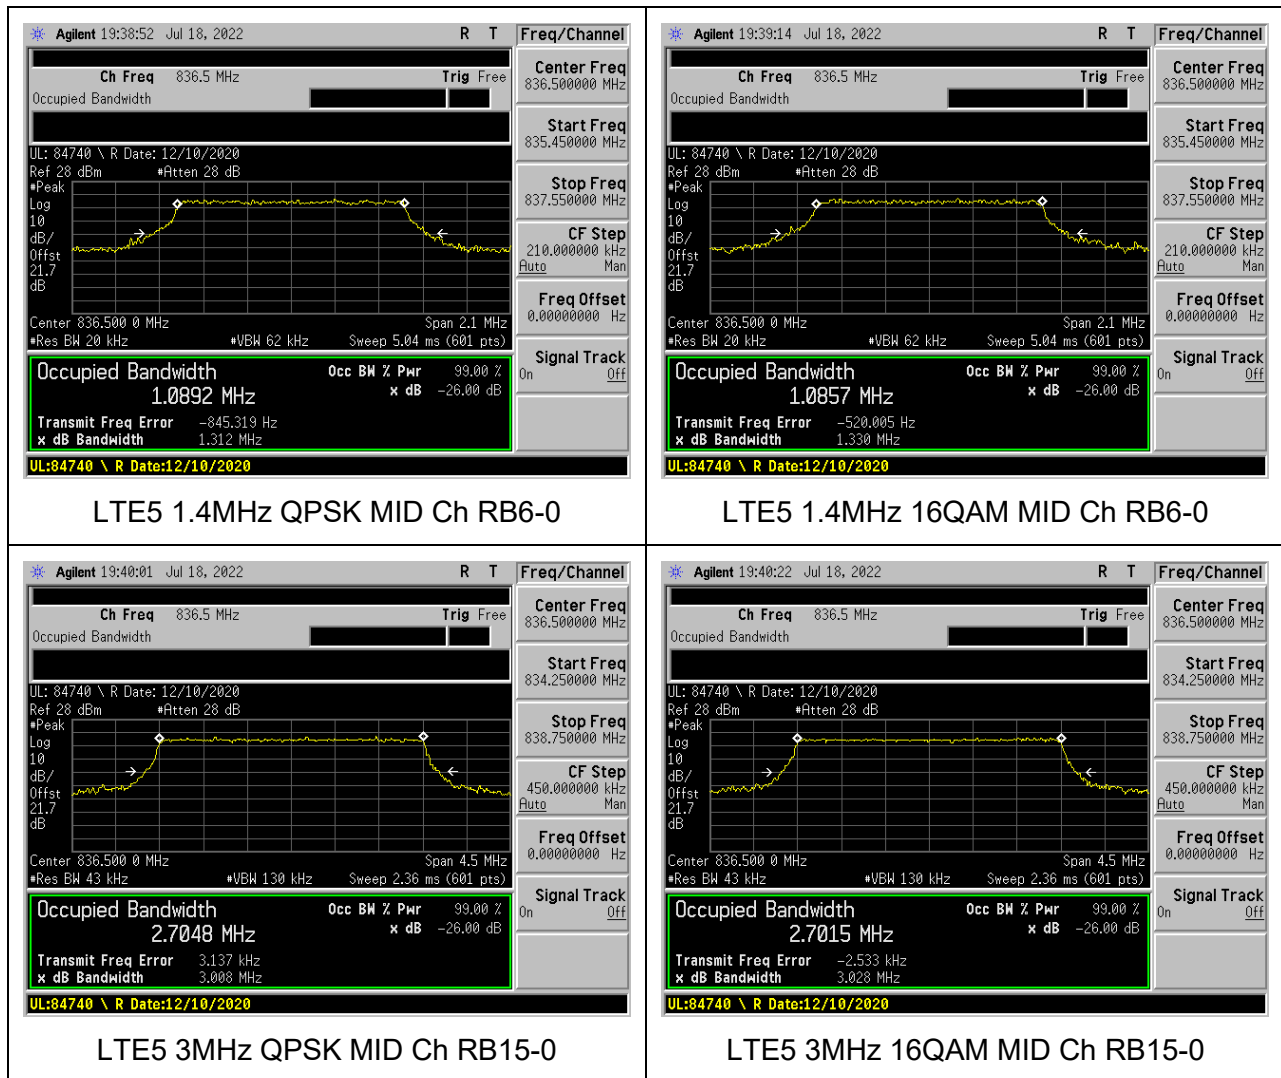

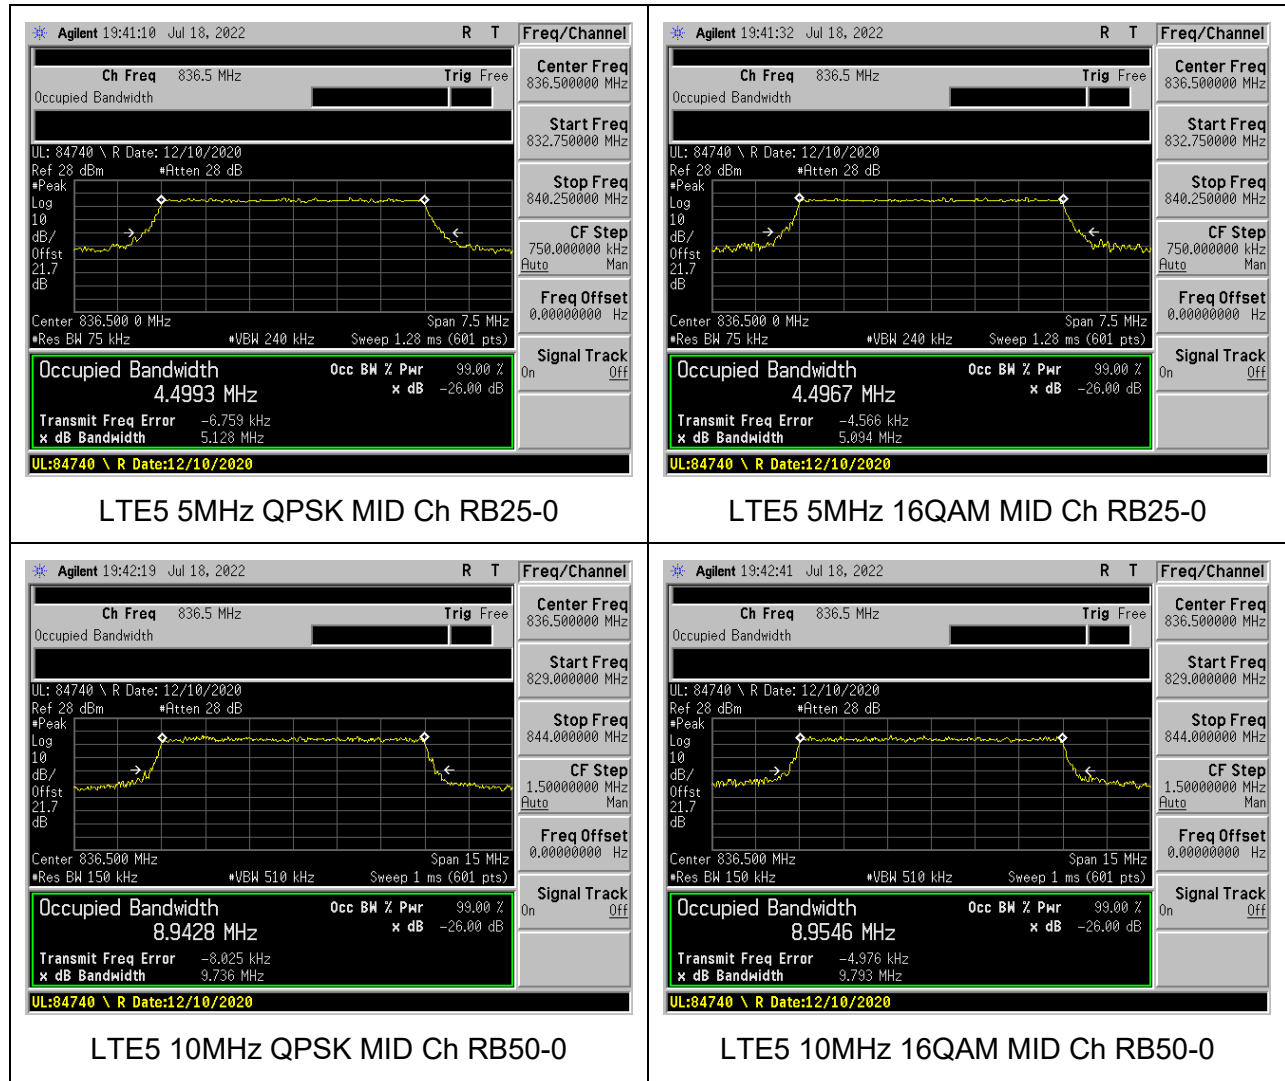


9.1.5. LTE BAND 12

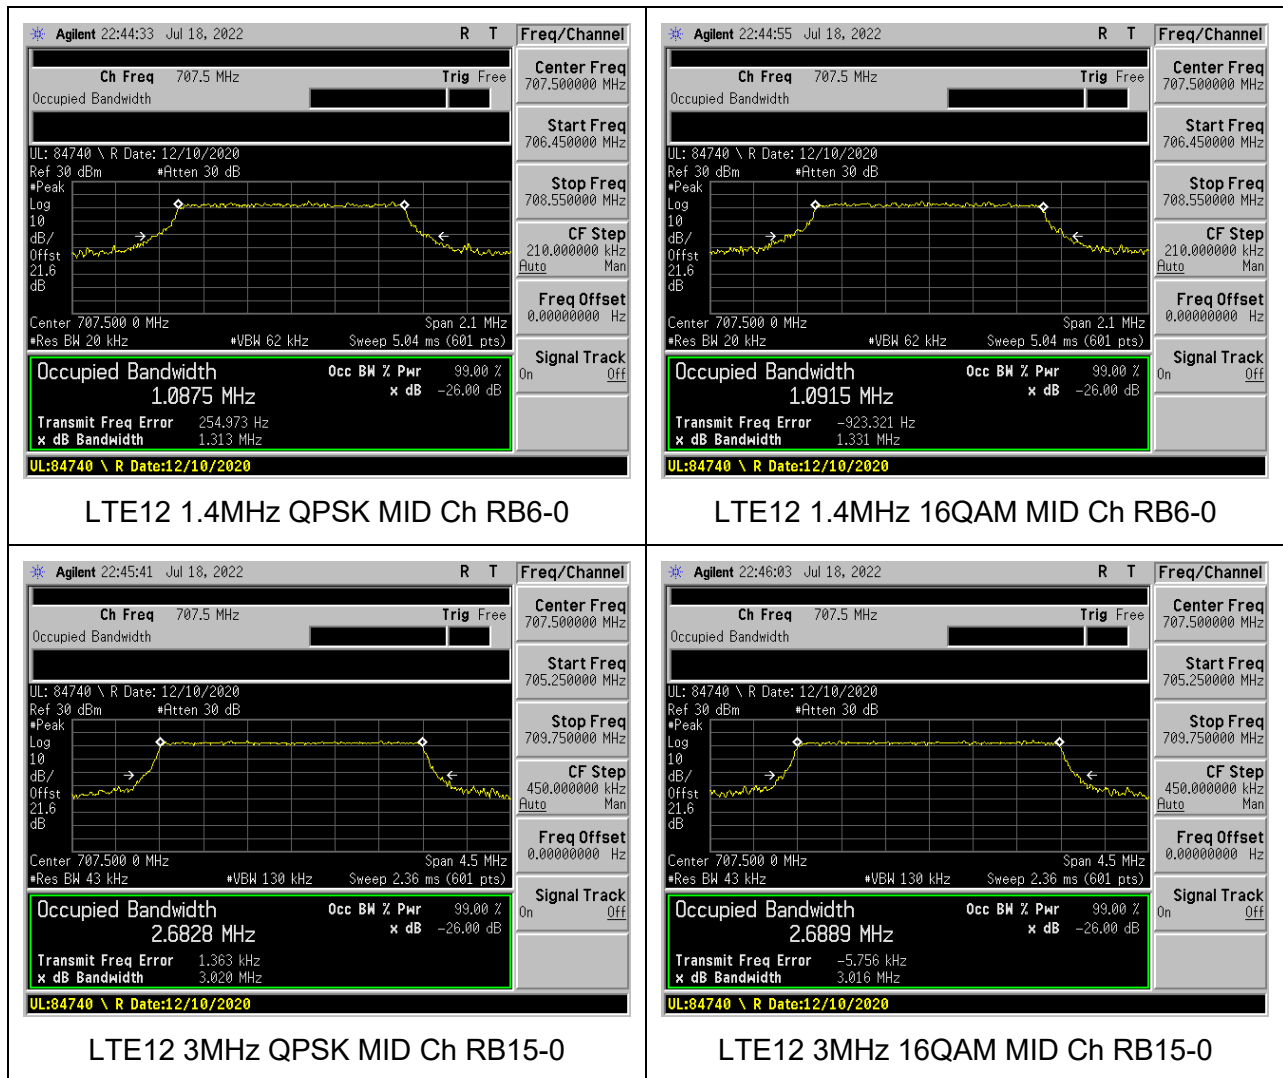


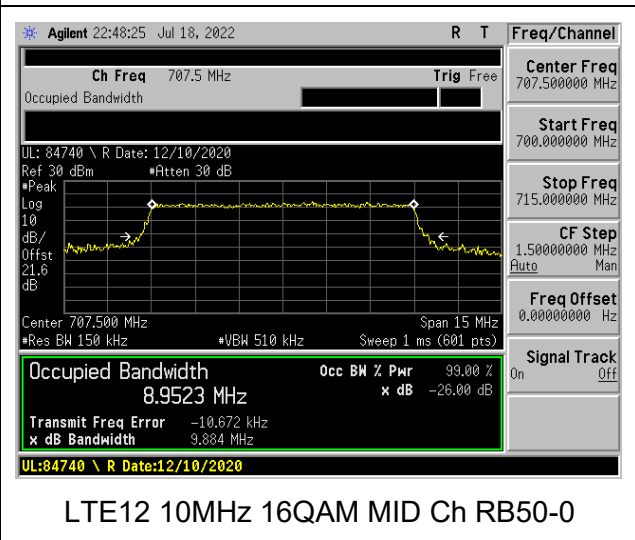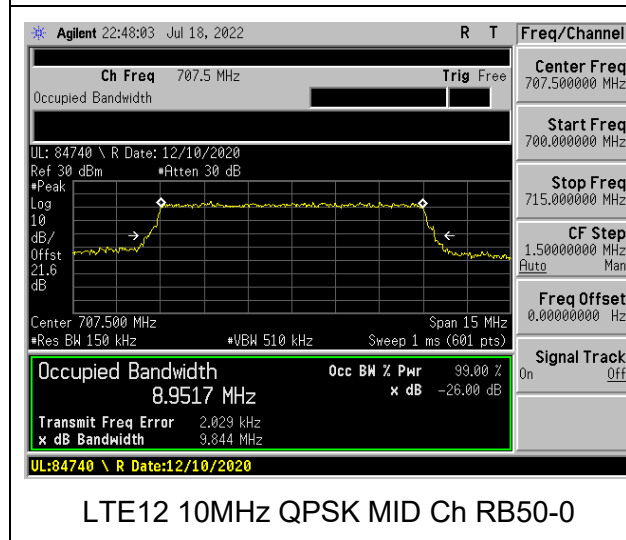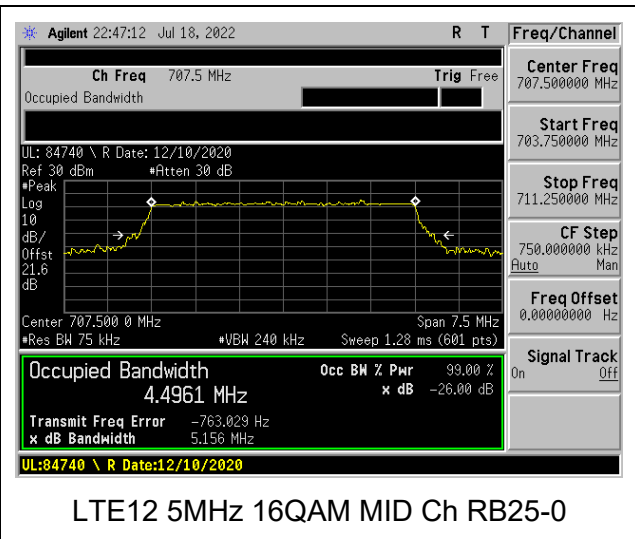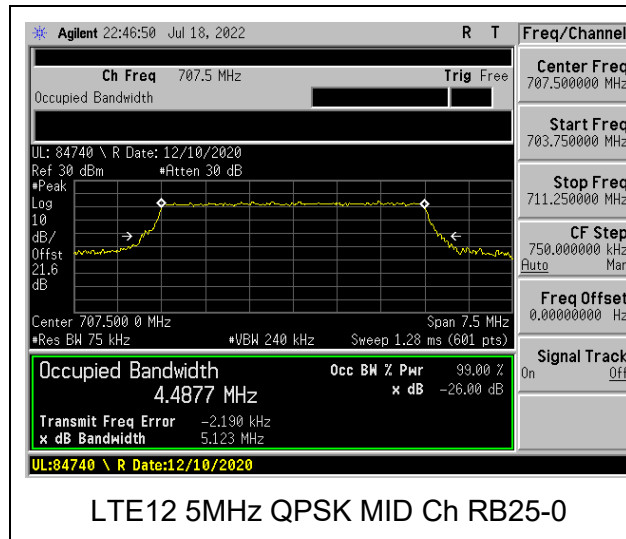


9.1.6. LTE BAND 13

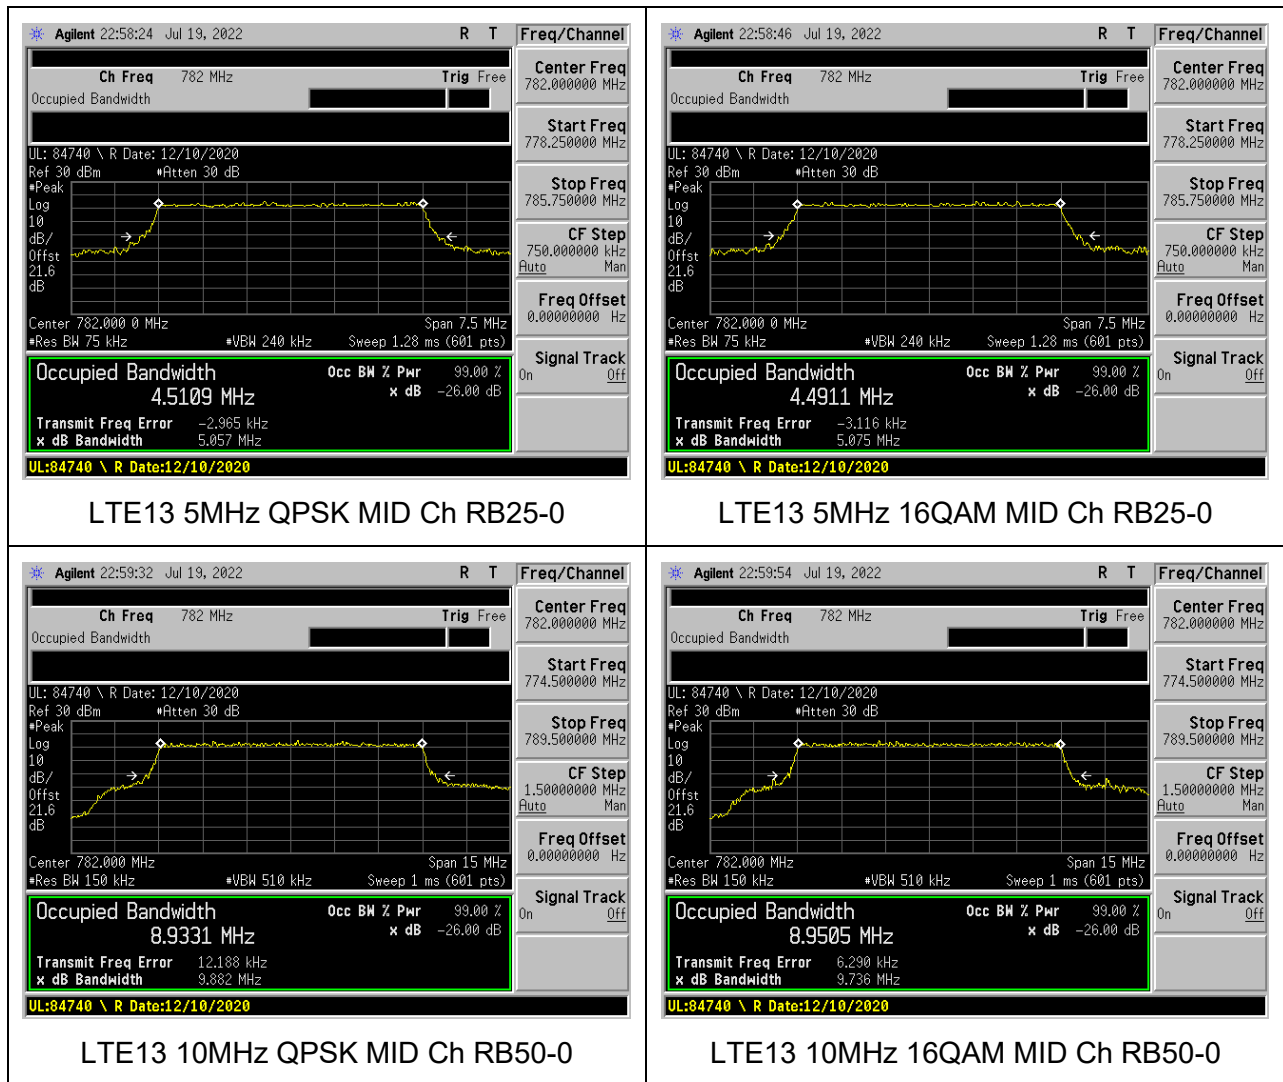

9.1.7. LTE BAND 41

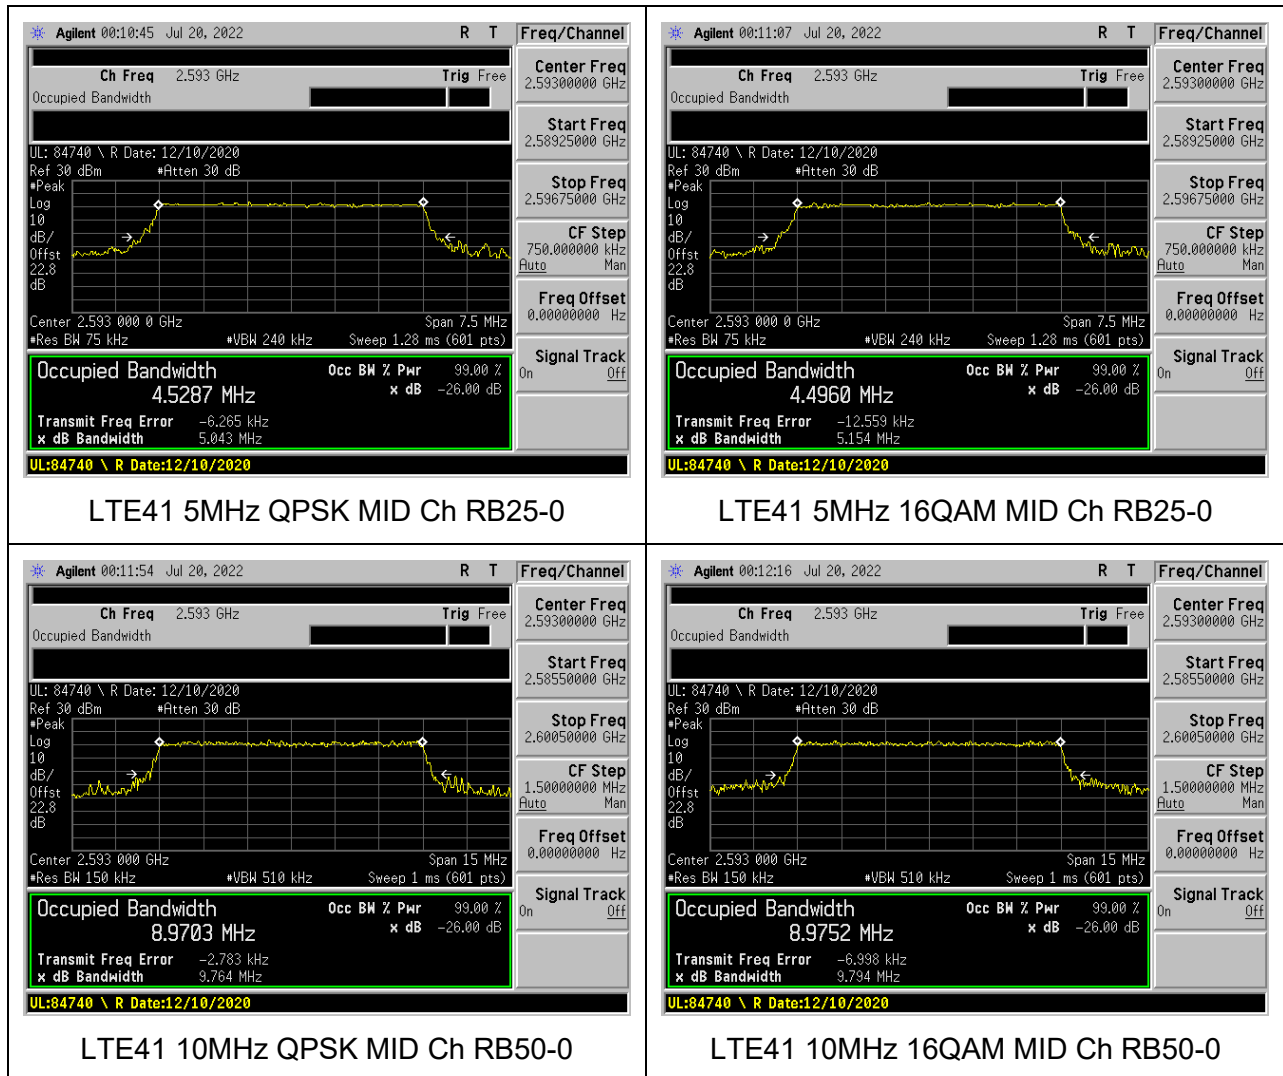

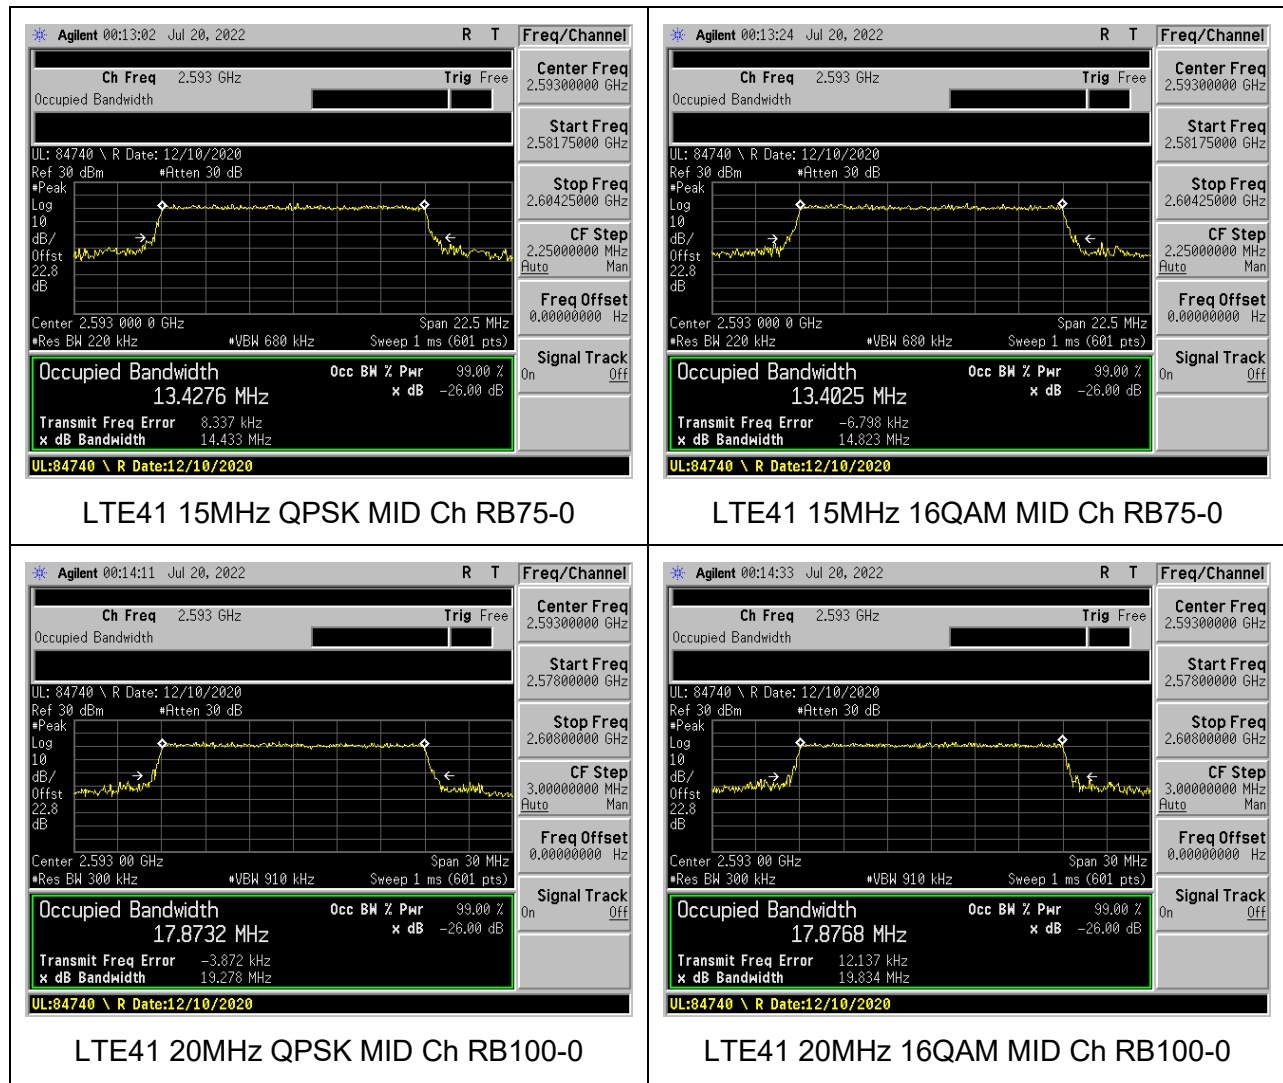

9.2. BAND EDGE AND EMISSION MASK

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- (i) Set the spectrum analyzer span to include the block edge frequency.
- (ii) Set a marker to point the corresponding band edge frequency in each test case.
- (iii) Set display line at -13 dBm
- (iv) Set resolution bandwidth to at least 1% of emission bandwidth.


RESULTS

9.2.1. GSM GSM850

LIMITS

FCC: §22.917

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

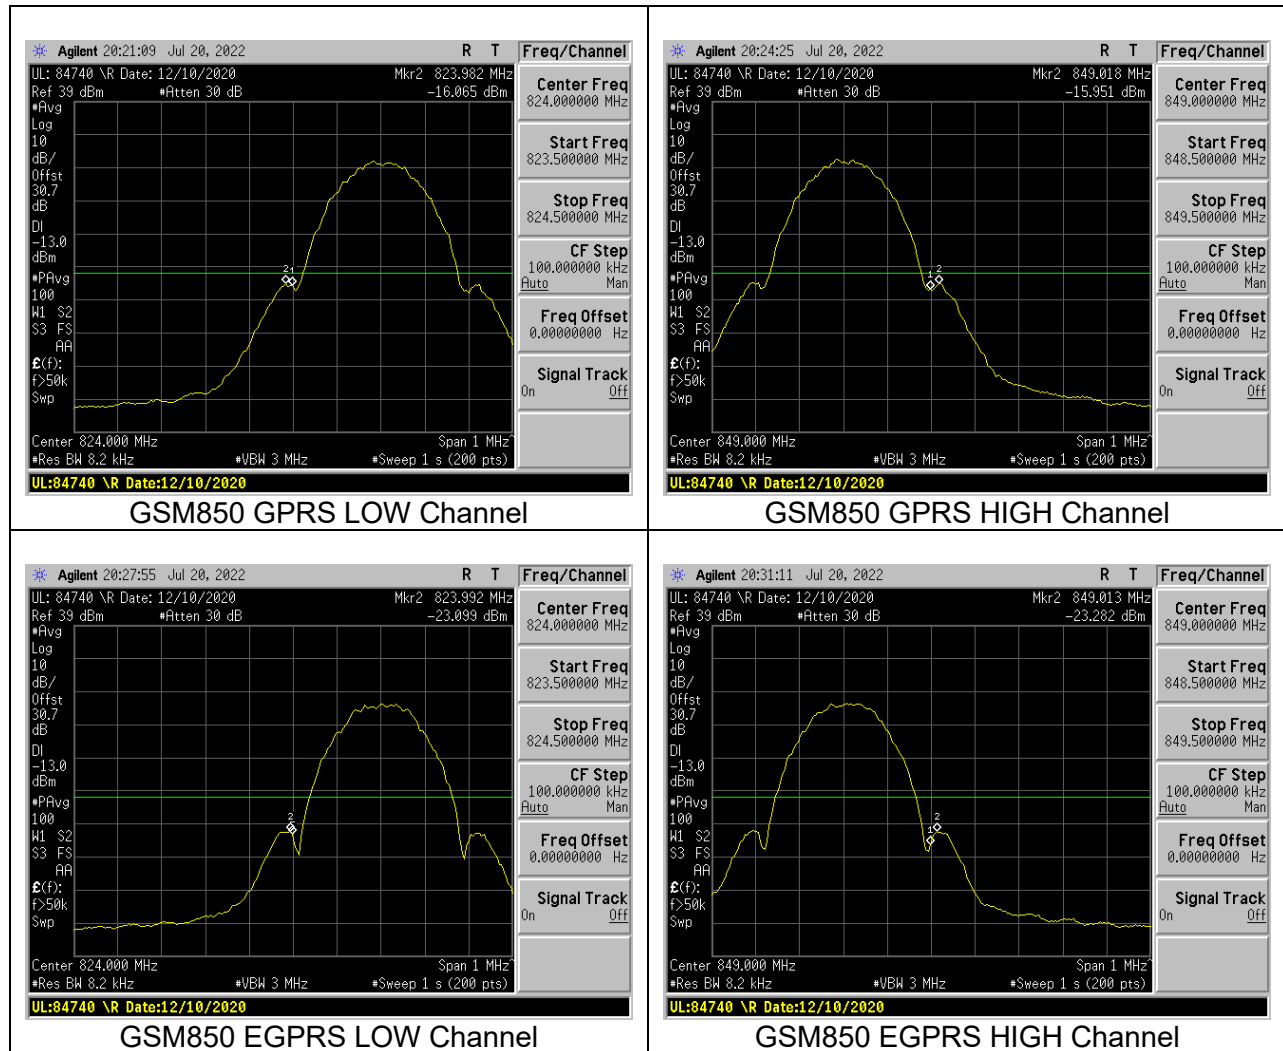


9.2.2. GSM GSM1900

LIMITS

FCC: §24.238 (a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

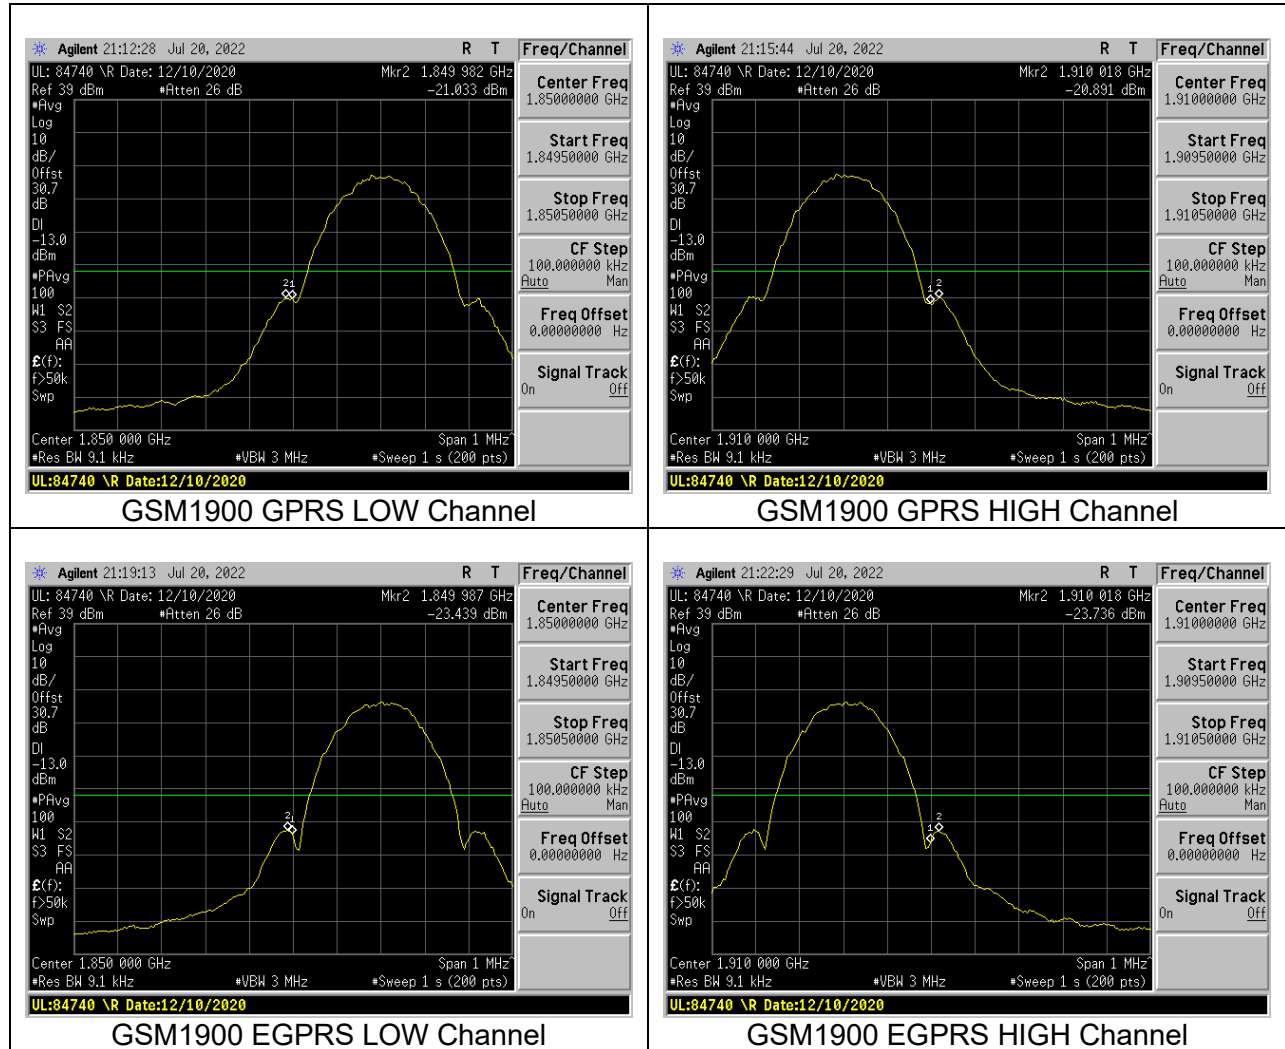


9.2.3. WCDMA BAND 5


LIMITS

FCC: §22.917


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

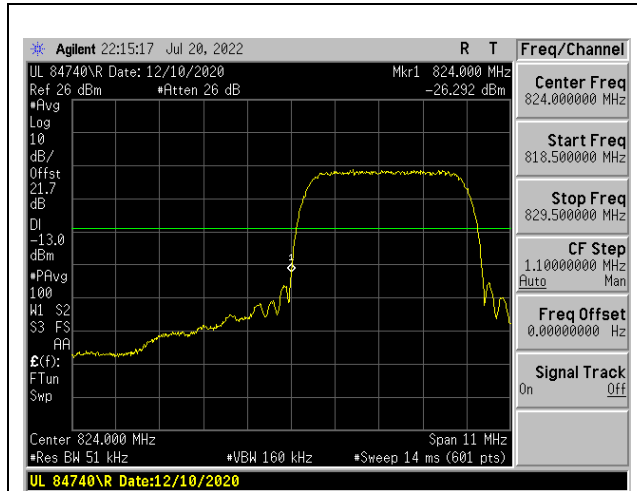


BAND 5 Rel 99 LOW Channel

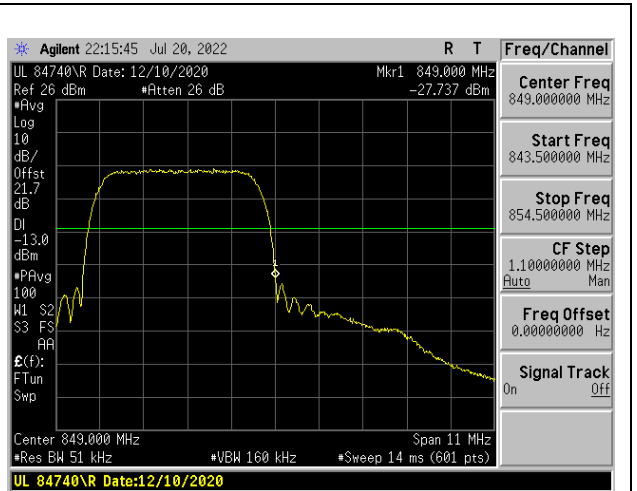

BAND 5 Rel 99 HIGH Channel

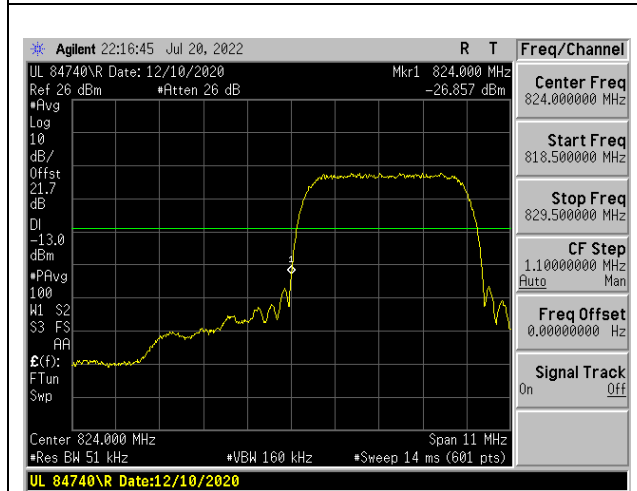

BAND 5 HSDPA LOW Channel

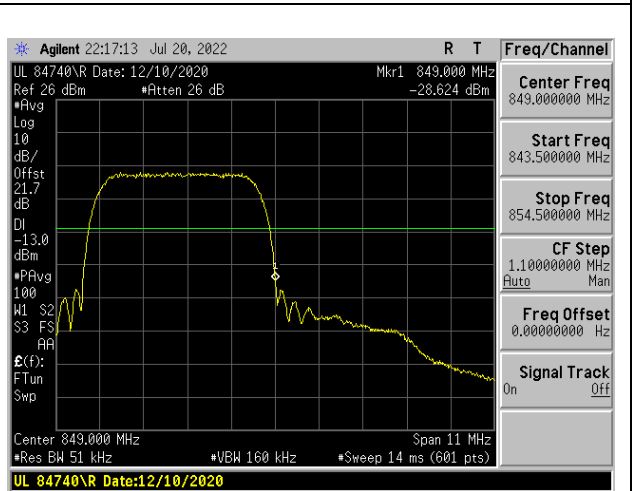


BAND 5 HSDPA HIGH Channel

9.2.4. LTE BAND 4

LIMITS

FCC: §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.


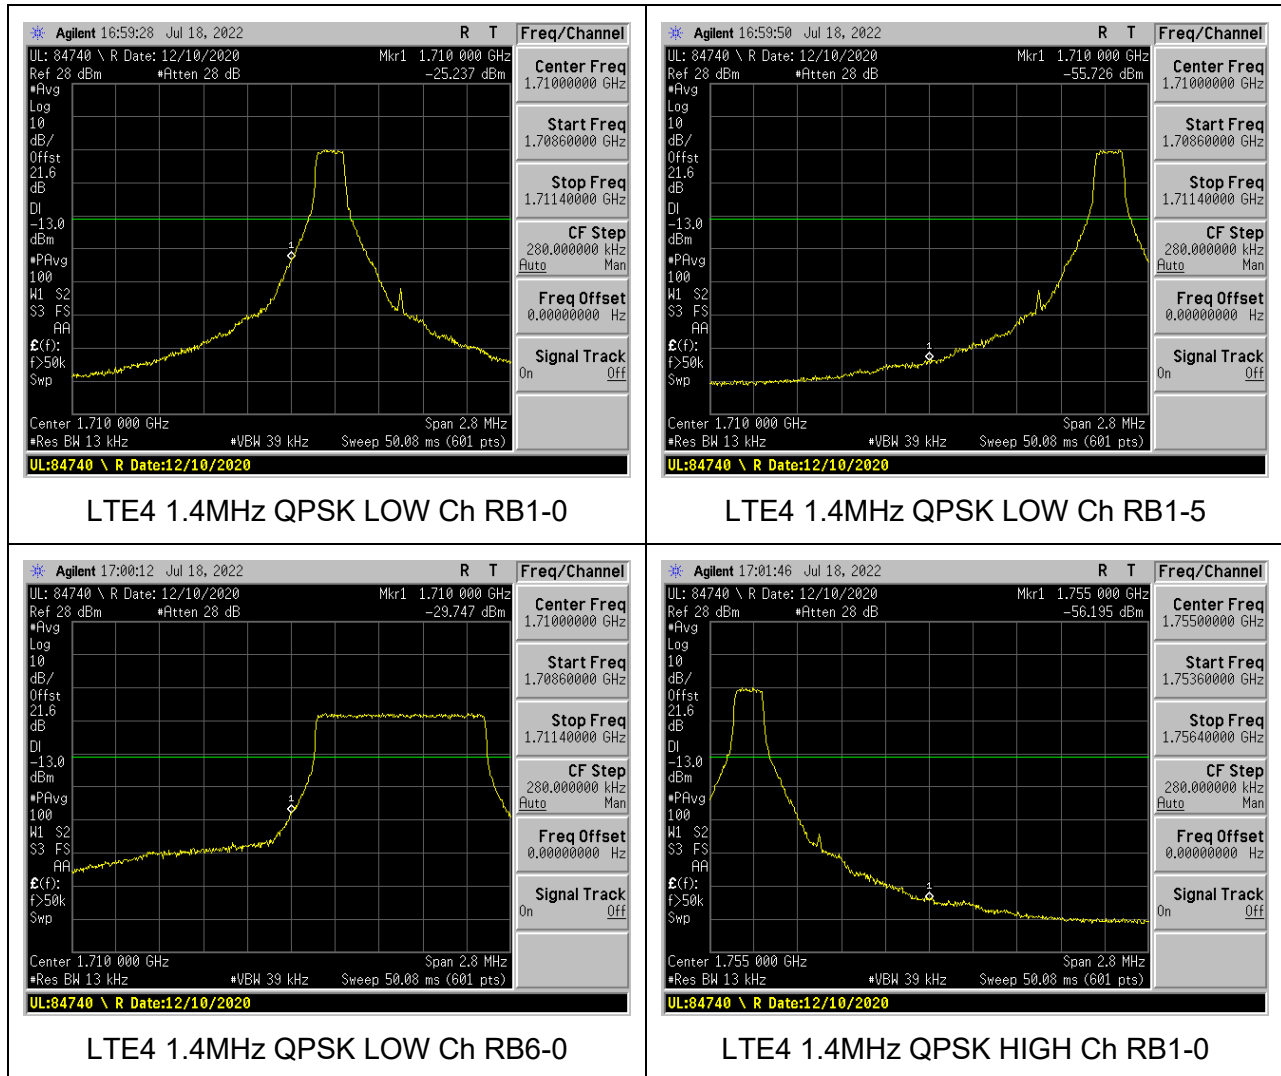



LTE4 1.4MHz QPSK LOW Ch RB1-0

LTE4 1.4MHz QPSK LOW Ch RB1-5


LTE4 1.4MHz QPSK LOW Ch RB6-0

LTE4 1.4MHz QPSK HIGH Ch RB1-0

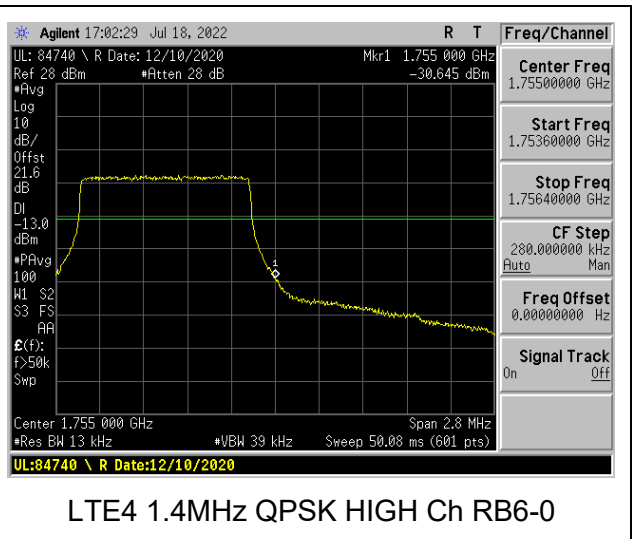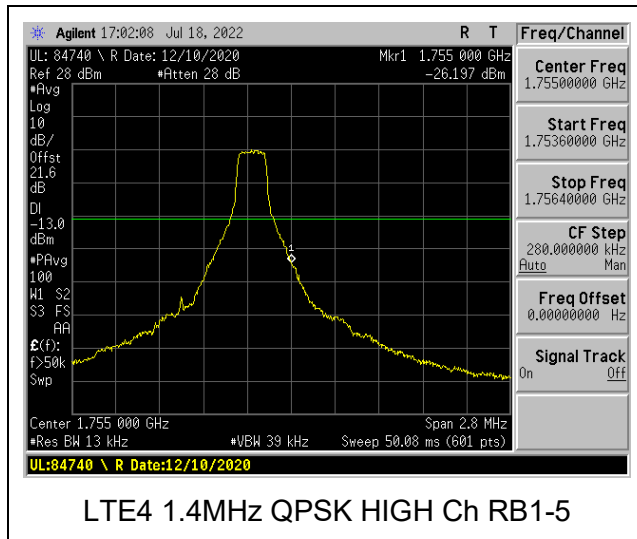


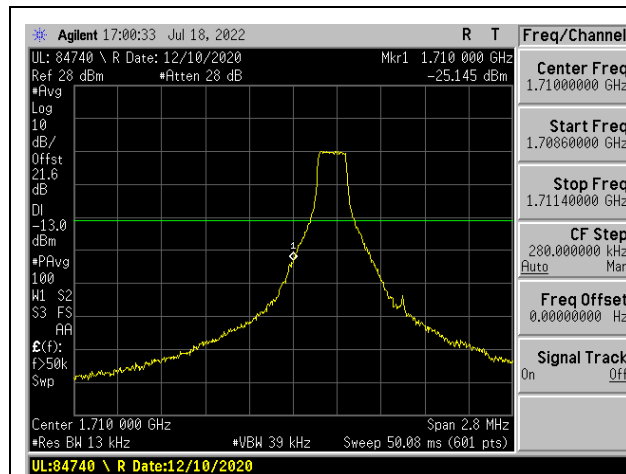


LTE4 1.4MHz 16QAM LOW Ch RB1-0

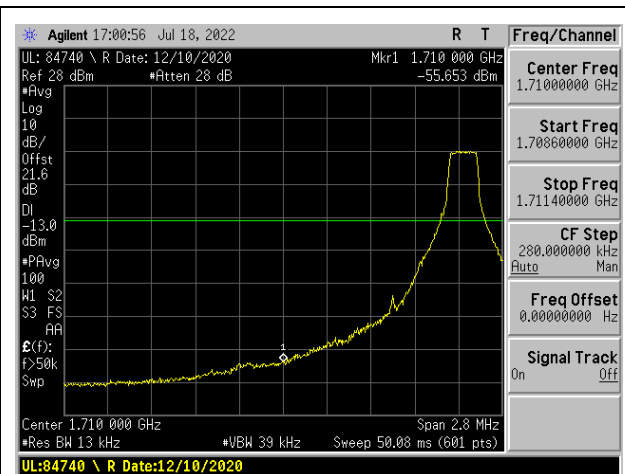


LTE4 1.4MHz 16QAM LOW Ch RB1-5

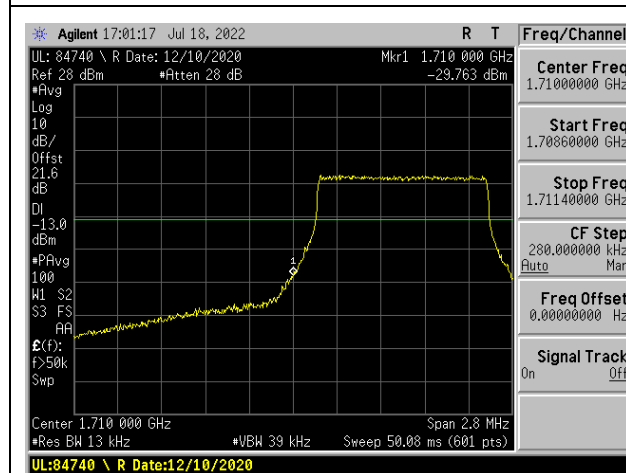


LTE4 1.4MHz 16QAM LOW Ch RB6-0

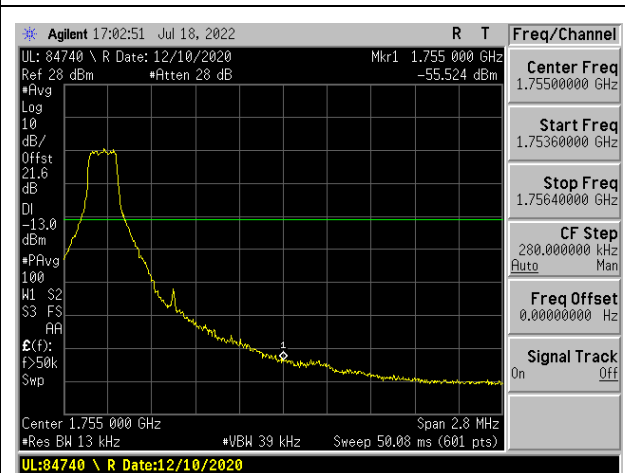


LTE4 1.4MHz 16QAM HIGH Ch RB1-0

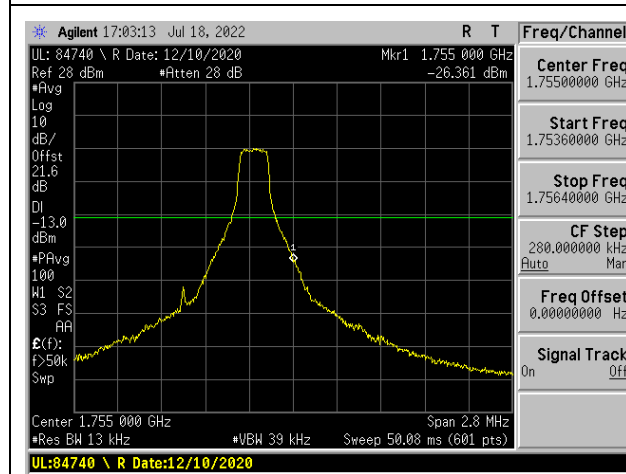


LTE4 1.4MHz 16QAM HIGH Ch RB1-5

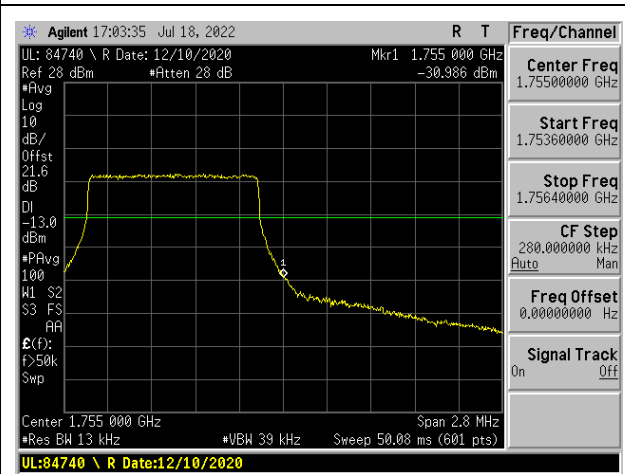


LTE4 1.4MHz 16QAM HIGH Ch RB6-0

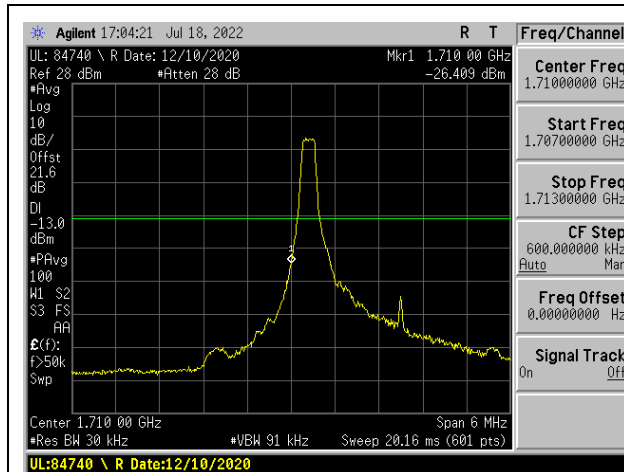


LTE4 3MHz QPSK LOW Ch RB1-0

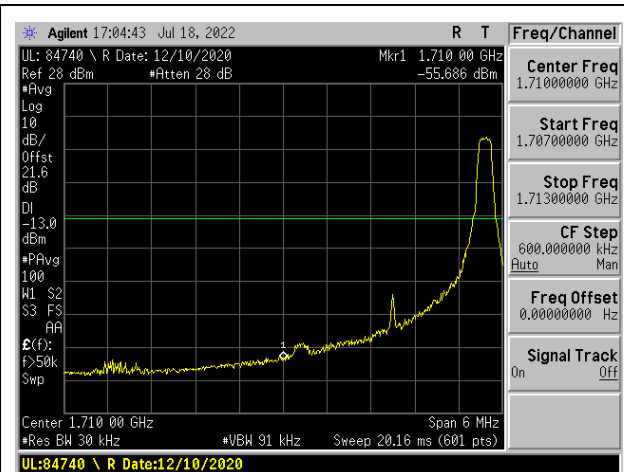


LTE4 3MHz QPSK LOW Ch RB1-14

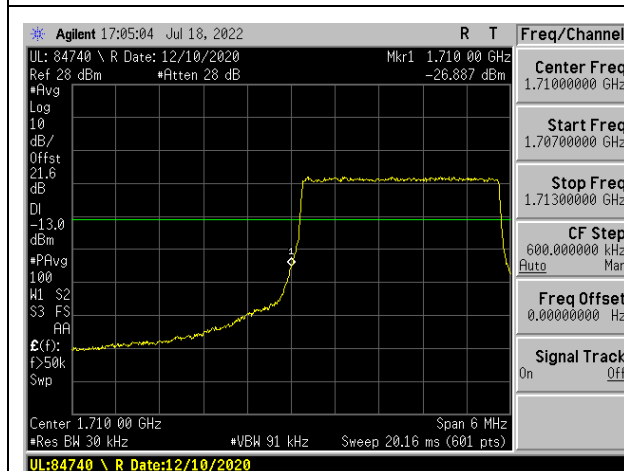


LTE4 3MHz QPSK LOW Ch RB15-0

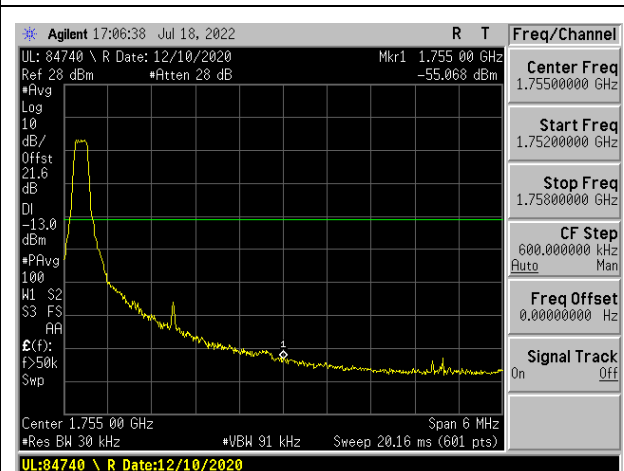


LTE4 3MHz QPSK HIGH Ch RB1-0

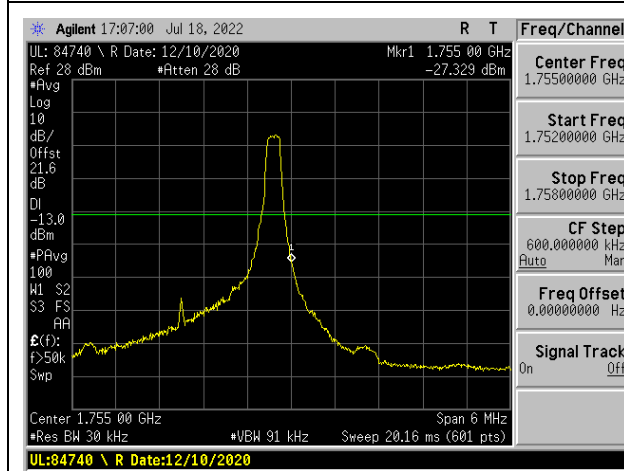


LTE4 3MHz QPSK HIGH Ch RB1-14

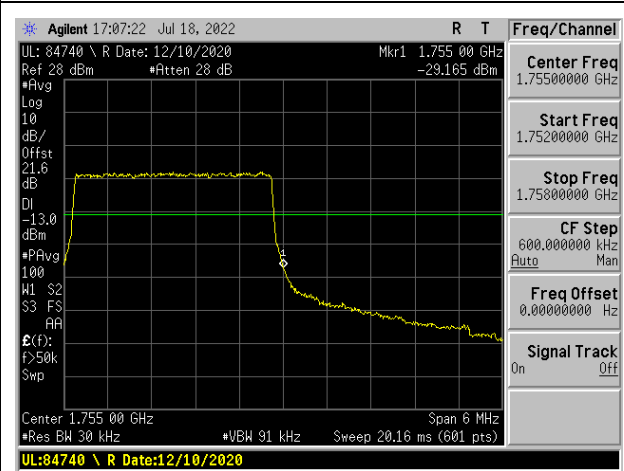


LTE4 3MHz QPSK HIGH Ch RB15-0

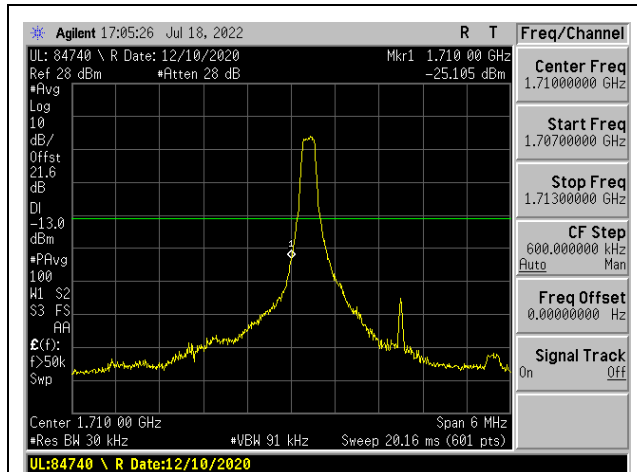


LTE4 3MHz 16QAM LOW Ch RB1-0

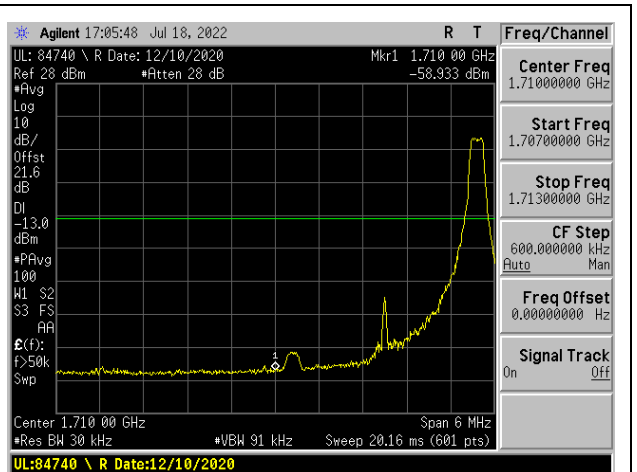


LTE4 3MHz 16QAM LOW Ch RB1-14

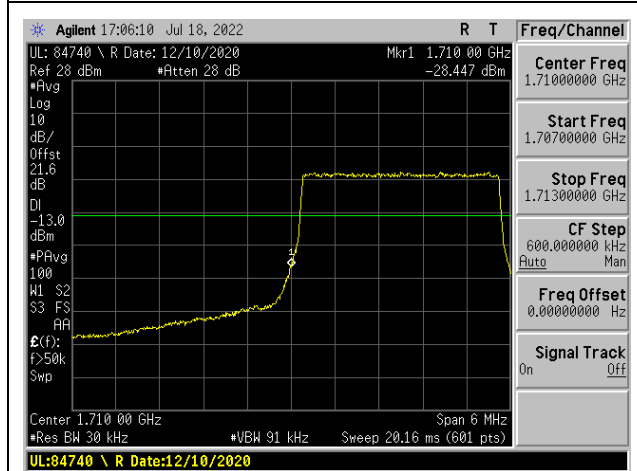


LTE4 3MHz 16QAM LOW Ch RB15-0

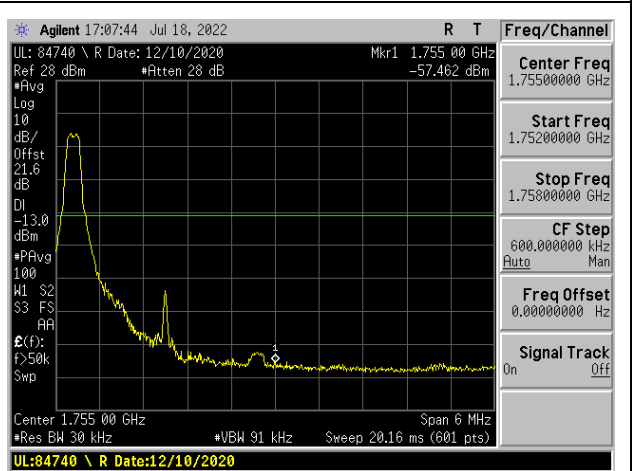


LTE4 3MHz 16QAM HIGH Ch RB1-0

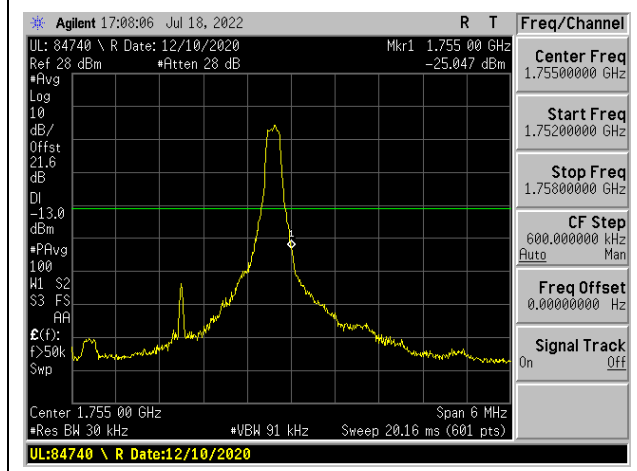


LTE4 3MHz 16QAM HIGH Ch RB1-14

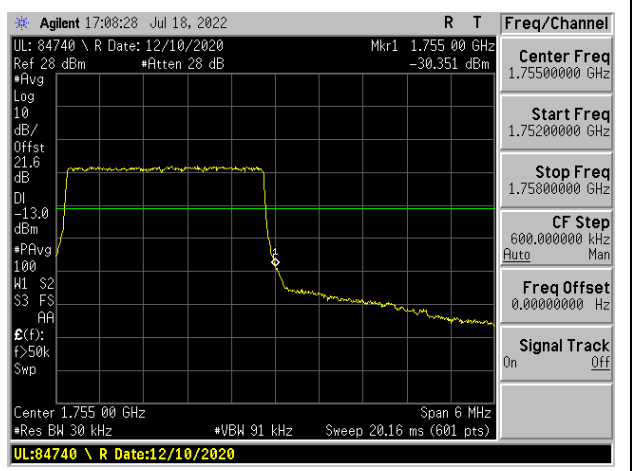


LTE4 3MHz 16QAM HIGH Ch RB15-0

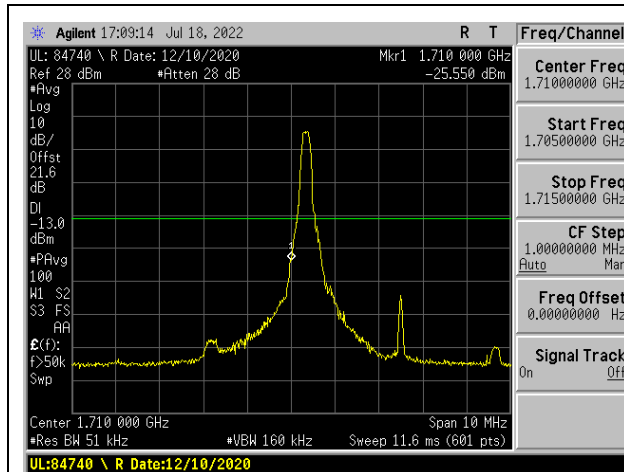


LTE4 5MHz QPSK LOW Ch RB1-0

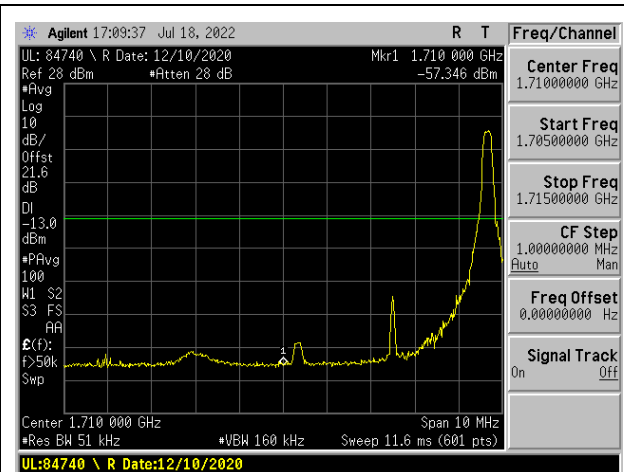


LTE4 5MHz QPSK LOW Ch RB1-24

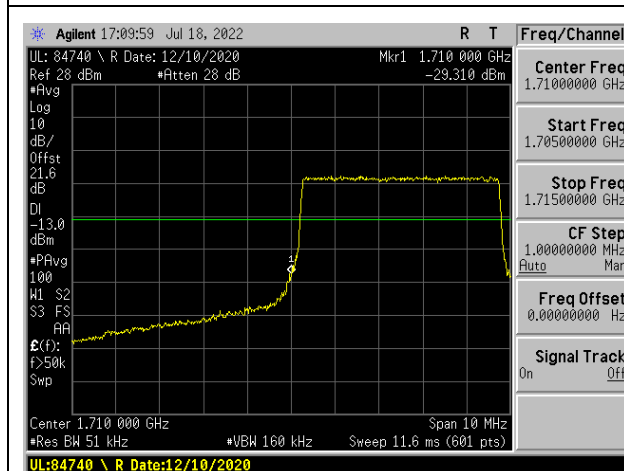


LTE4 5MHz QPSK LOW Ch RB25-0

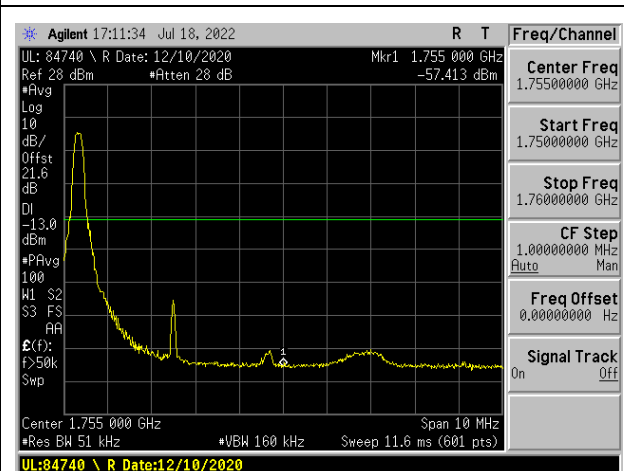


LTE4 5MHz QPSK HIGH Ch RB1-0

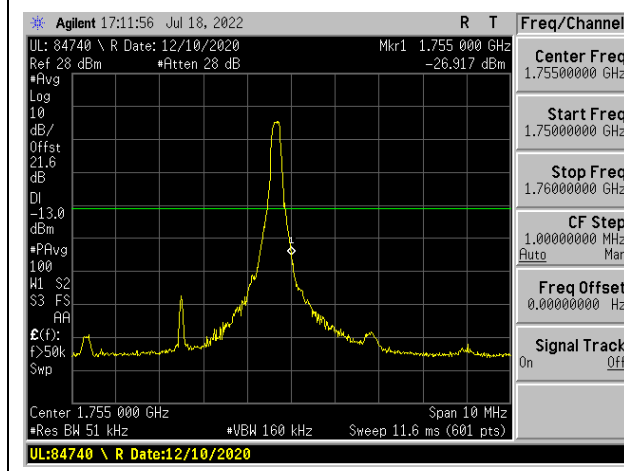


LTE4 5MHz QPSK HIGH Ch RB1-24

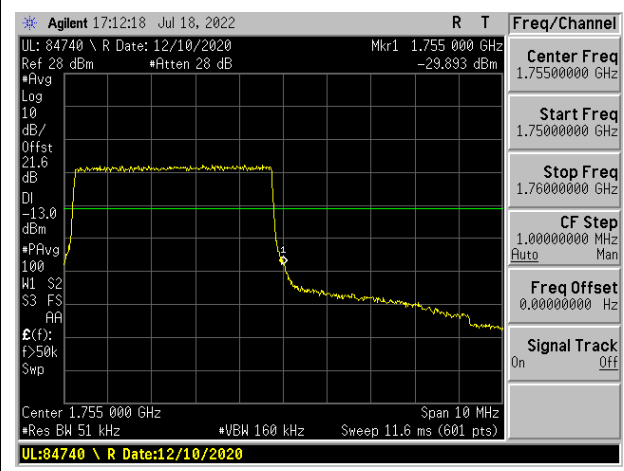


LTE4 5MHz QPSK HIGH Ch RB25-0

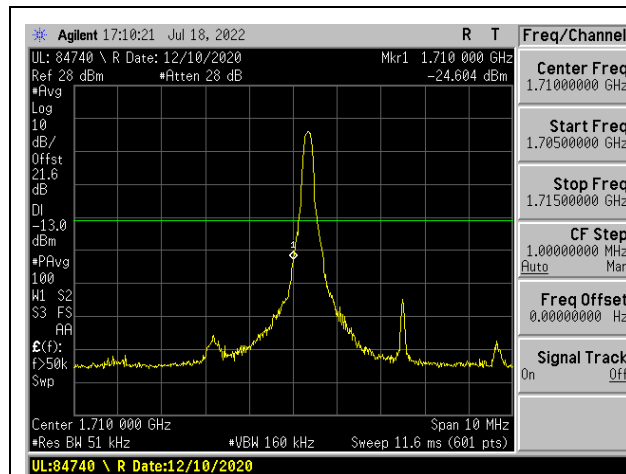


LTE4 5MHz 16QAM LOW Ch RB1-0

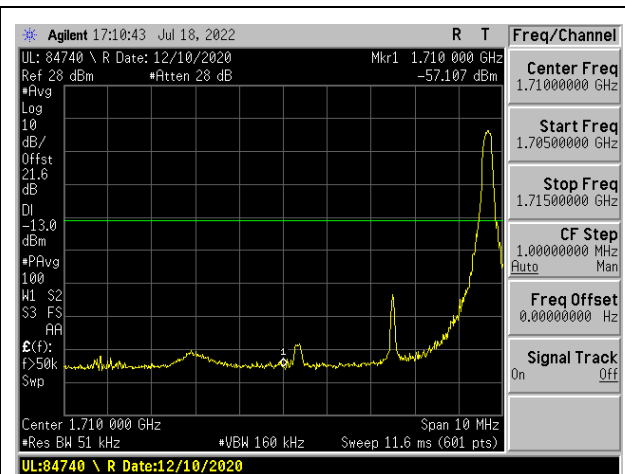


LTE4 5MHz 16QAM LOW Ch RB1-24

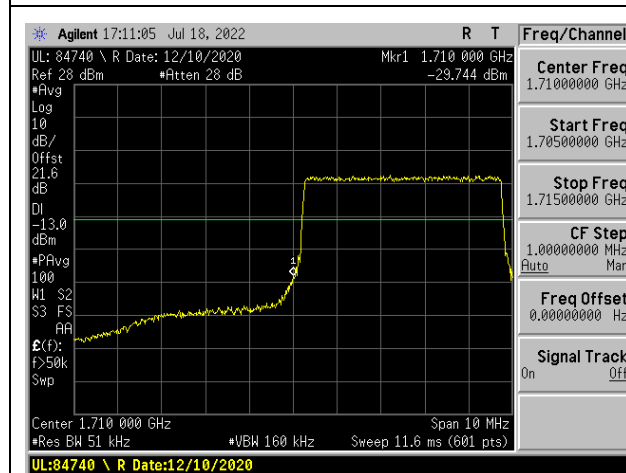


LTE4 5MHz 16QAM LOW Ch RB25-0

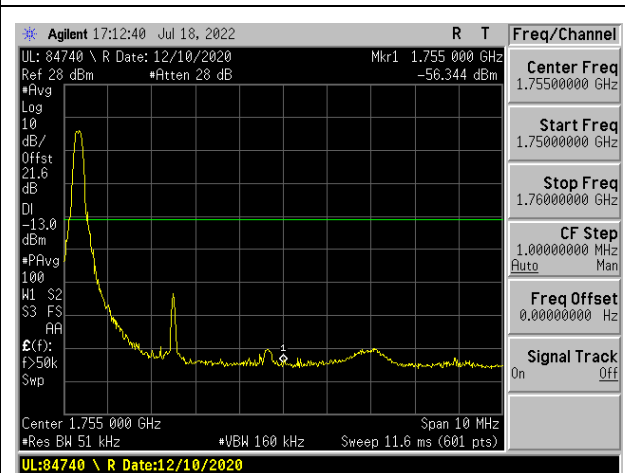


LTE4 5MHz 16QAM HIGH Ch RB1-0

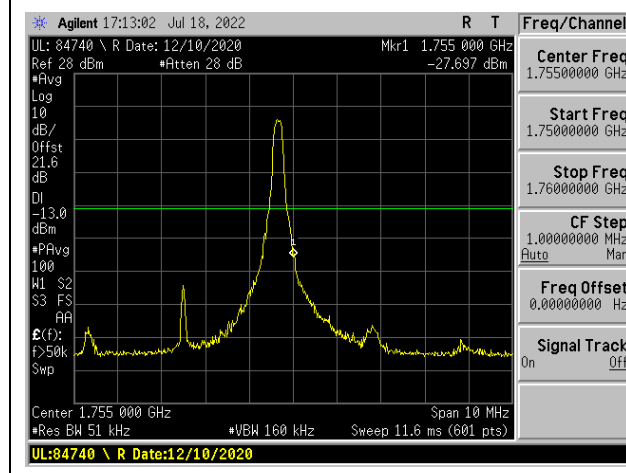


LTE4 5MHz 16QAM HIGH Ch RB1-24

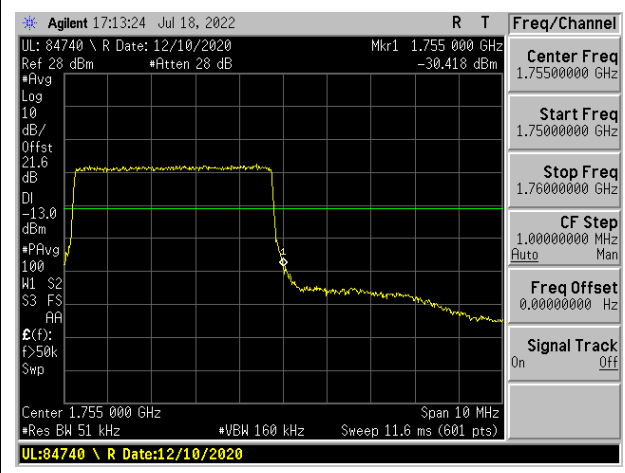


LTE4 5MHz 16QAM HIGH Ch RB25-0

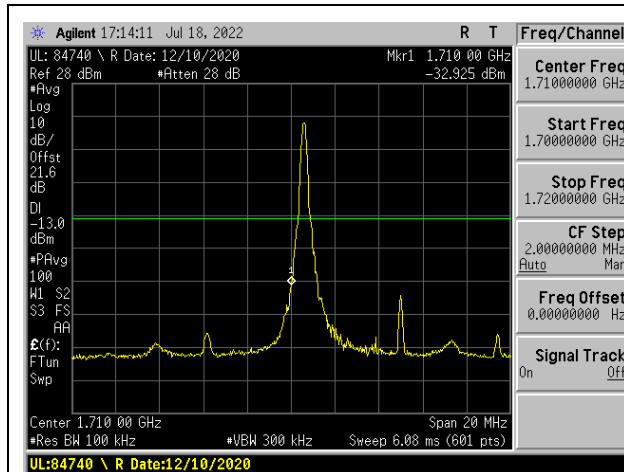


LTE4 10MHz QPSK LOW Ch RB1-0

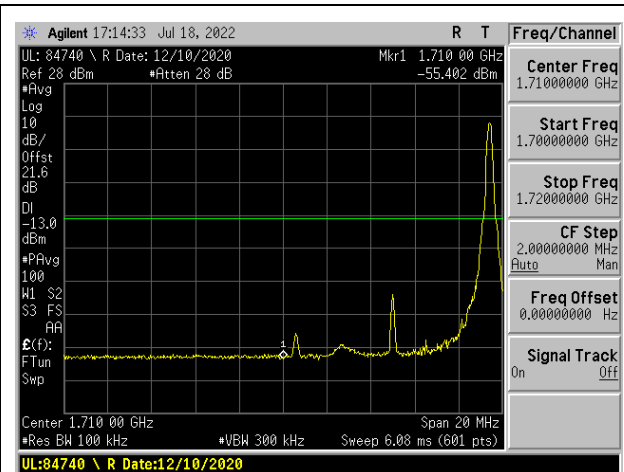


LTE4 10MHz QPSK LOW Ch RB1-49

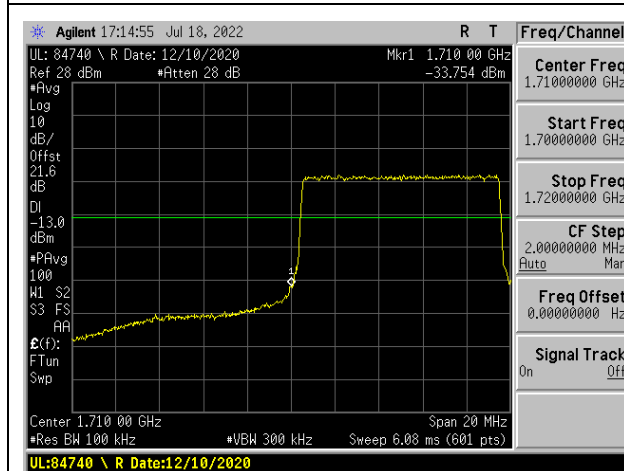


LTE4 10MHz QPSK LOW Ch RB50-0

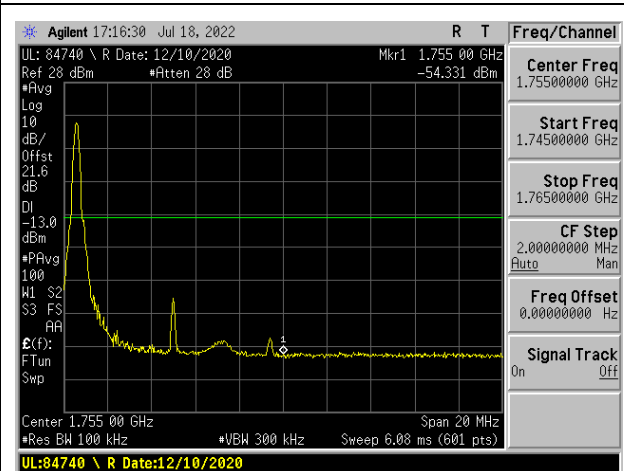


LTE4 10MHz QPSK HIGH Ch RB1-0

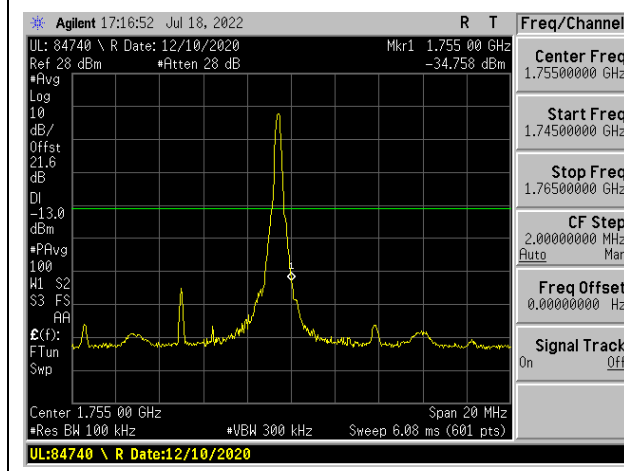


LTE4 10MHz QPSK HIGH Ch RB1-49

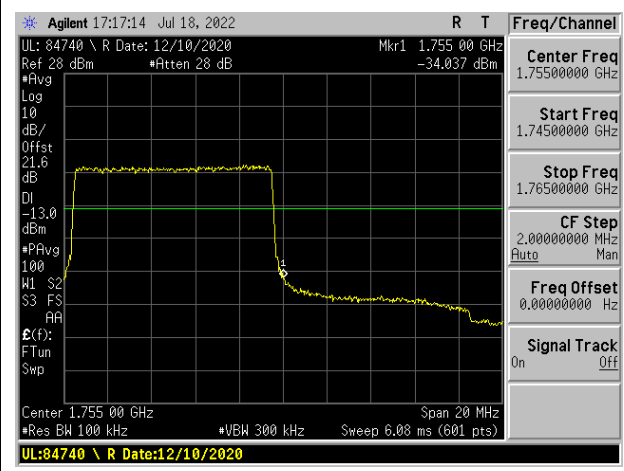


LTE4 10MHz QPSK HIGH Ch RB50-0

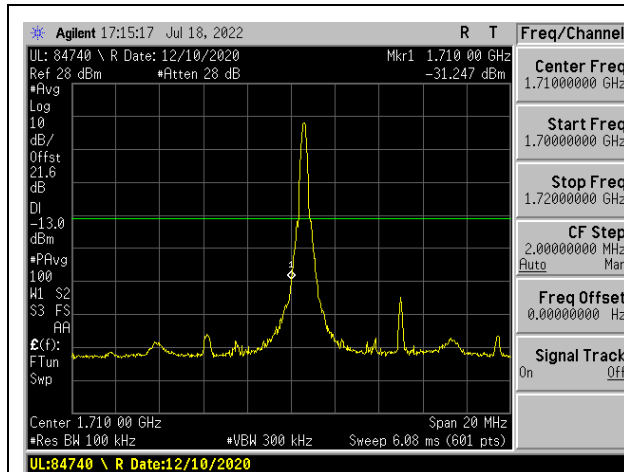


LTE4 10MHz 16QAM LOW Ch RB1-0

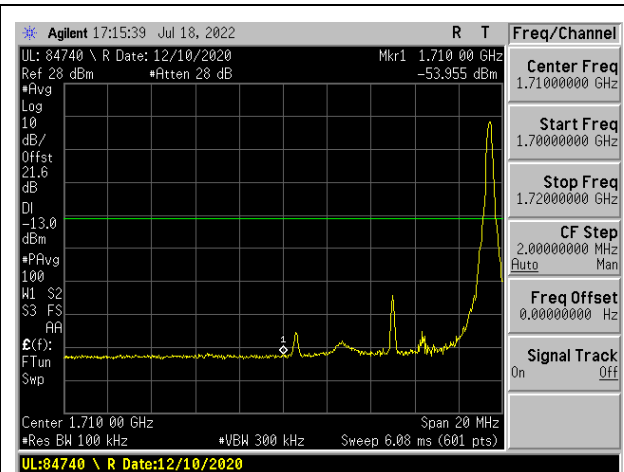


LTE4 10MHz 16QAM LOW Ch RB1-49

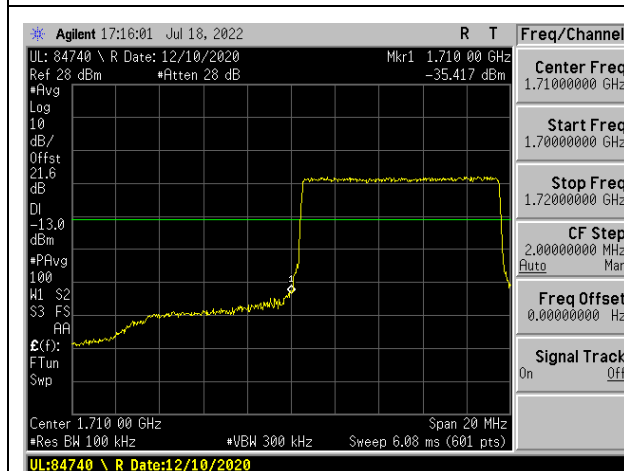


LTE4 10MHz 16QAM LOW Ch RB50-0

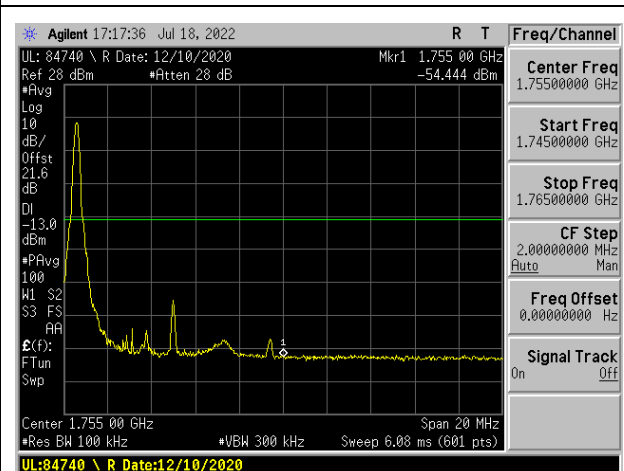


LTE4 10MHz 16QAM HIGH Ch RB1-0

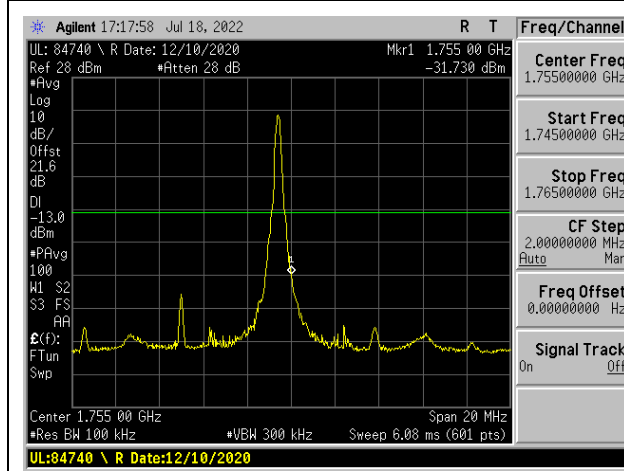


LTE4 10MHz 16QAM HIGH Ch RB1-49

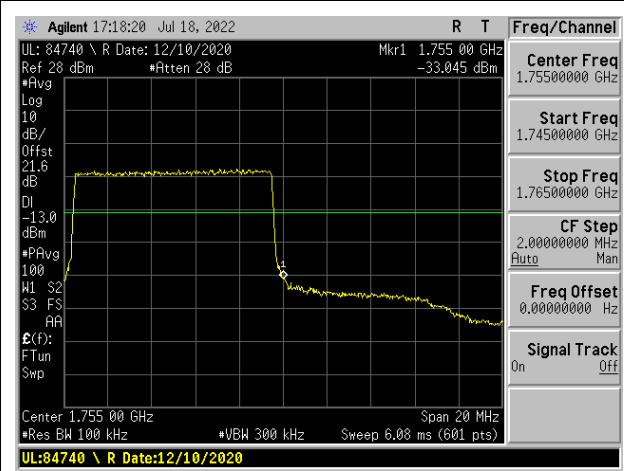


LTE4 10MHz 16QAM HIGH Ch RB50-0

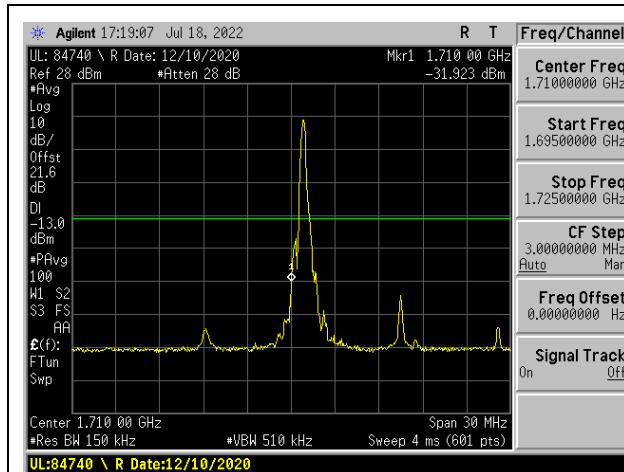


LTE4 15MHz QPSK LOW Ch RB1-0

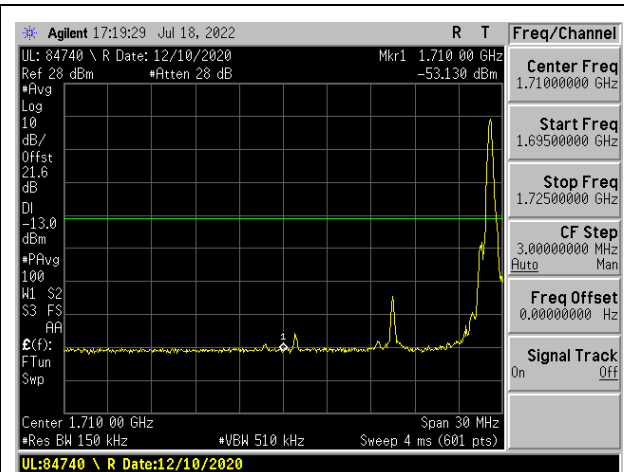


LTE4 15MHz QPSK LOW Ch RB1-74

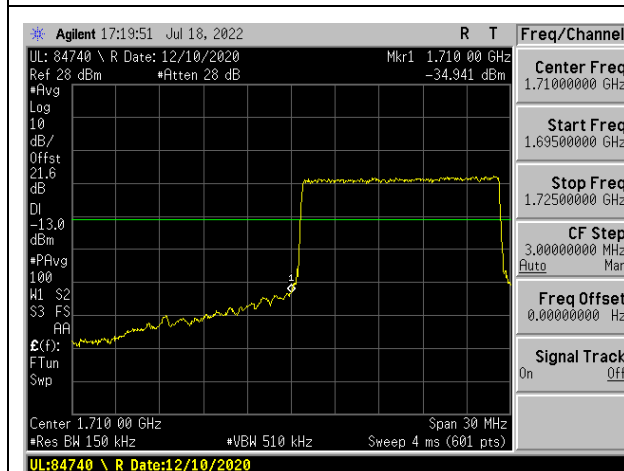


LTE4 15MHz QPSK LOW Ch RB75-0

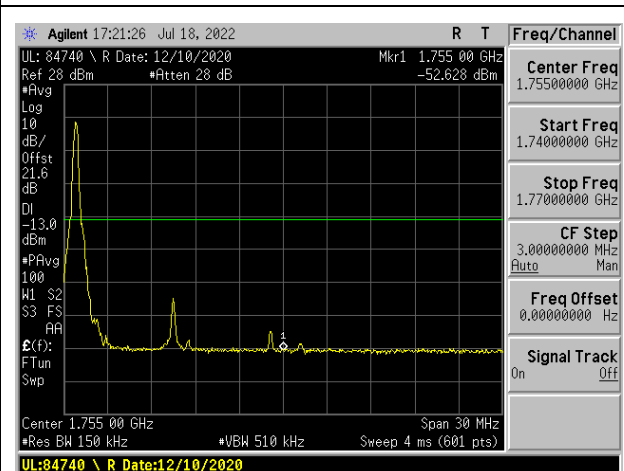


LTE4 15MHz QPSK HIGH Ch RB1-0

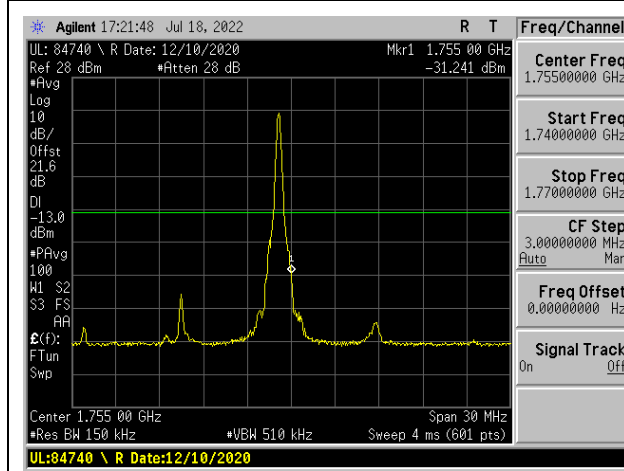


LTE4 15MHz QPSK HIGH Ch RB1-74

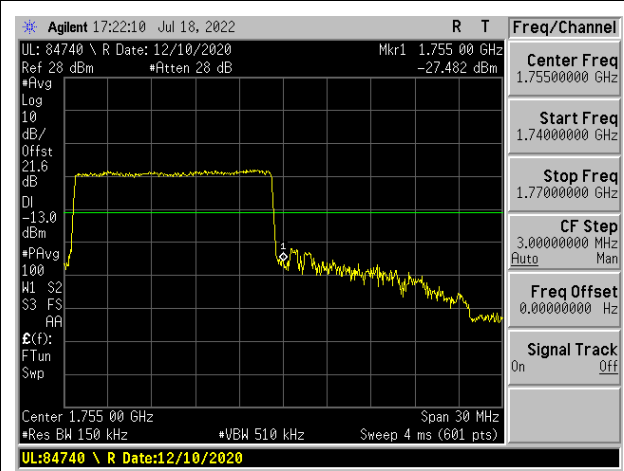


LTE4 15MHz QPSK HIGH Ch RB75-0

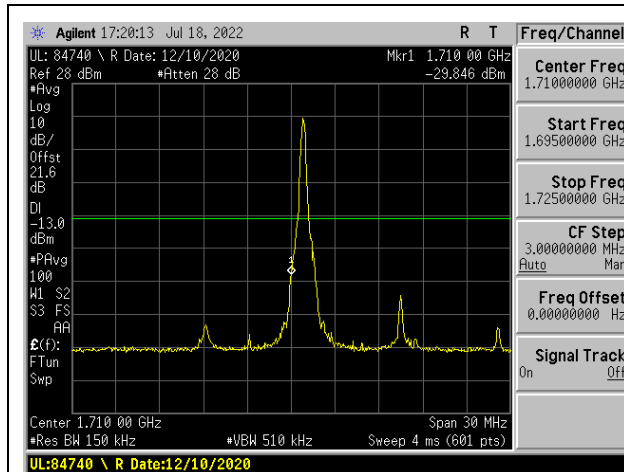


LTE4 15MHz 16QAM LOW Ch RB1-0

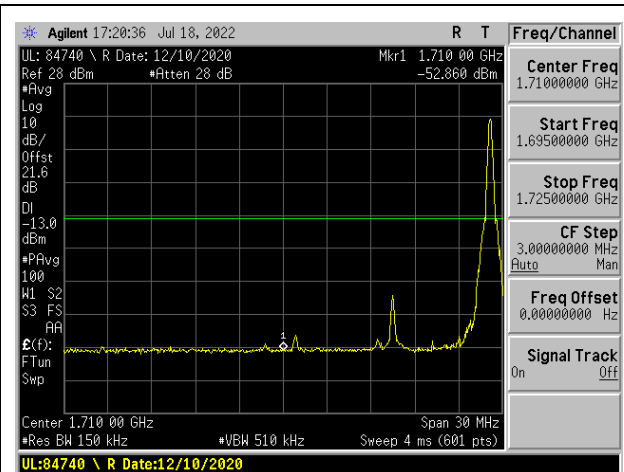


LTE4 15MHz 16QAM LOW Ch RB1-74

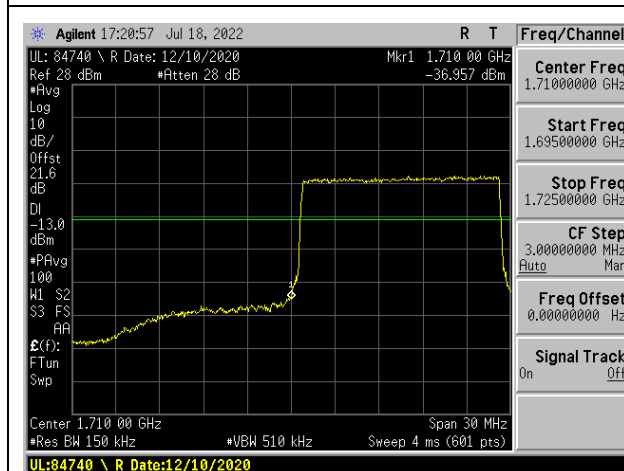


LTE4 15MHz 16QAM LOW Ch RB75-0

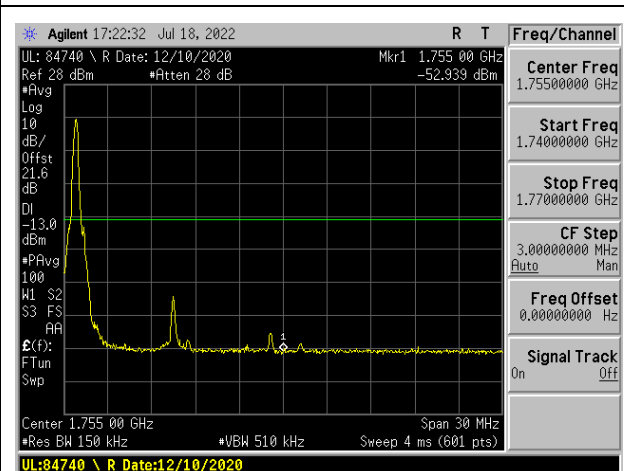


LTE4 15MHz 16QAM HIGH Ch RB1-0

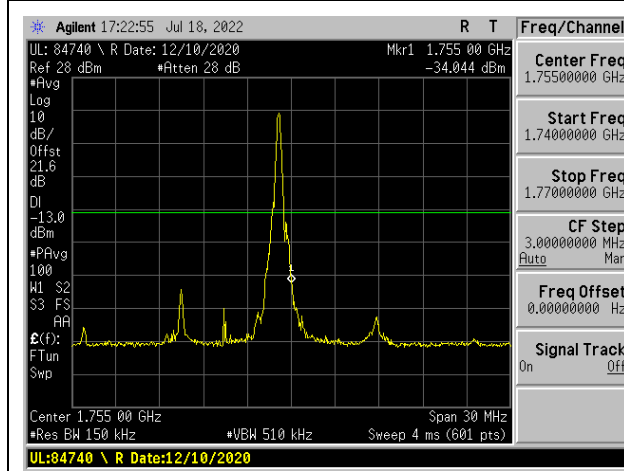


LTE4 15MHz 16QAM HIGH Ch RB1-74

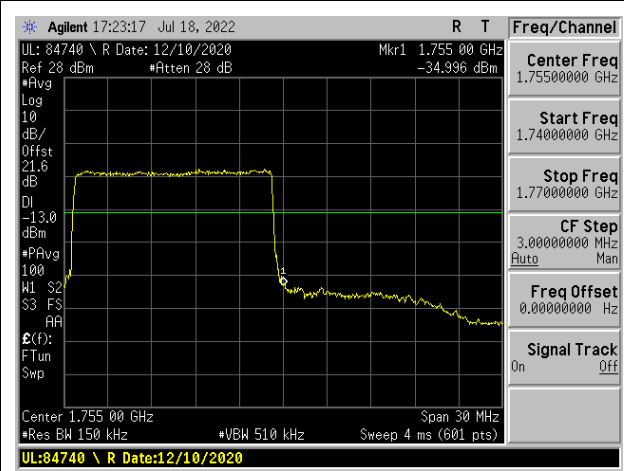


LTE4 15MHz 16QAM HIGH Ch RB75-0

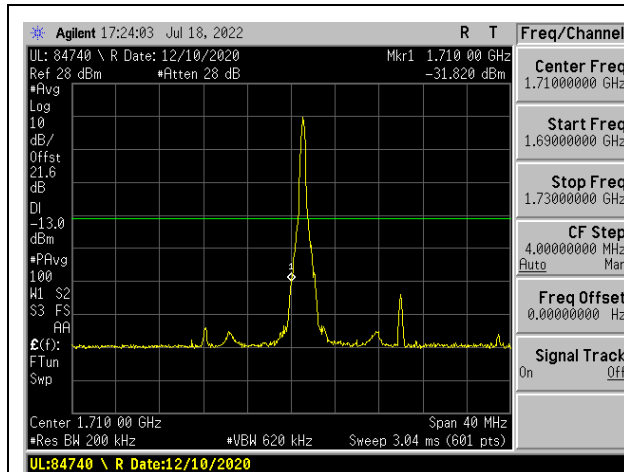


LTE4 20MHz QPSK LOW Ch RB1-0

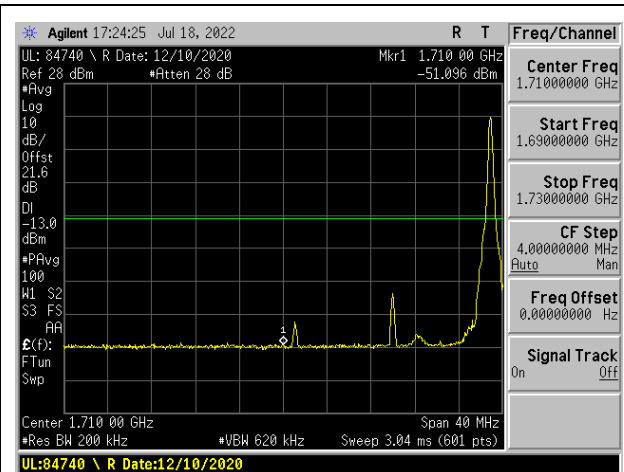


LTE4 20MHz QPSK LOW Ch RB1-99

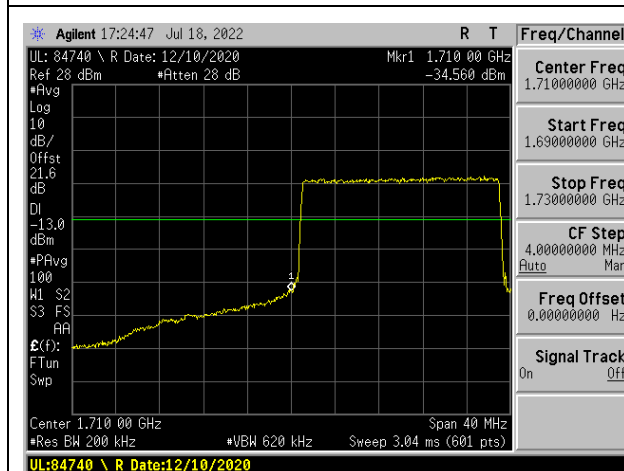


LTE4 20MHz QPSK LOW Ch RB100-0

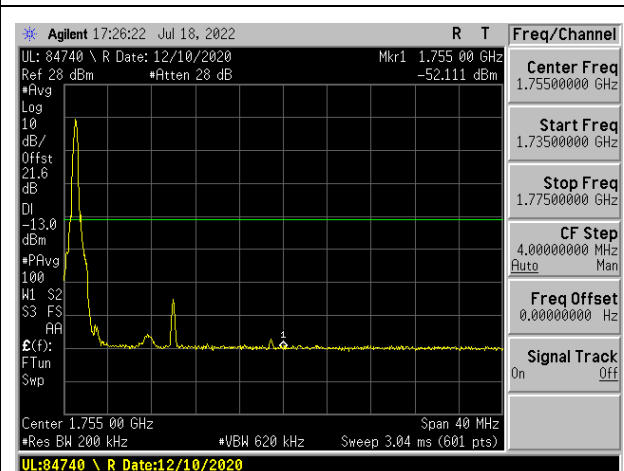


LTE4 20MHz QPSK HIGH Ch RB1-0

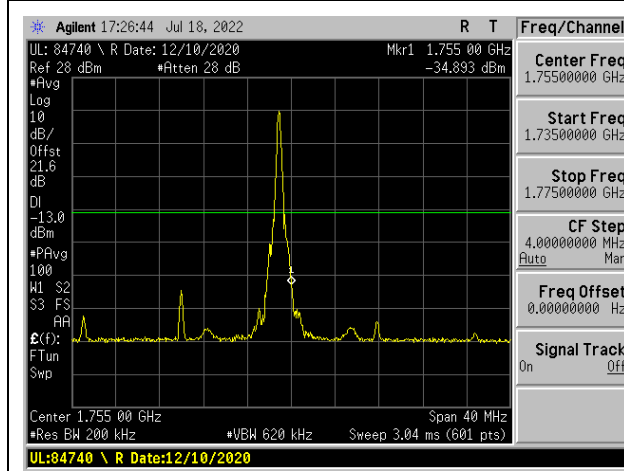


LTE4 20MHz QPSK HIGH Ch RB1-99

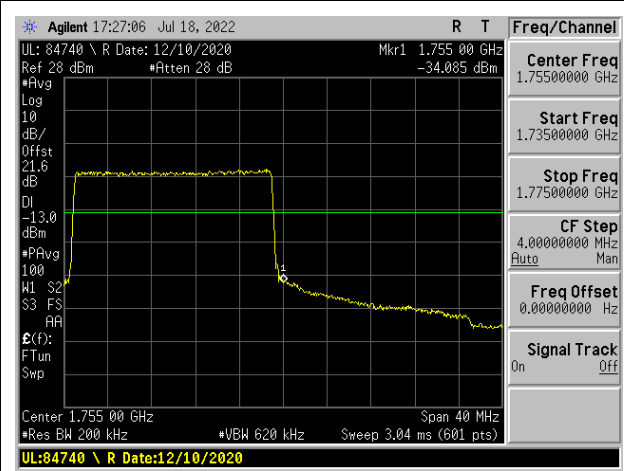


LTE4 20MHz QPSK HIGH Ch RB100-0

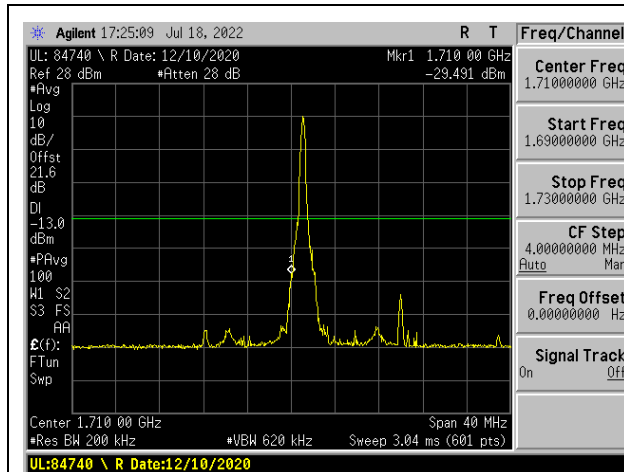


LTE4 20MHz 16QAM LOW Ch RB1-0

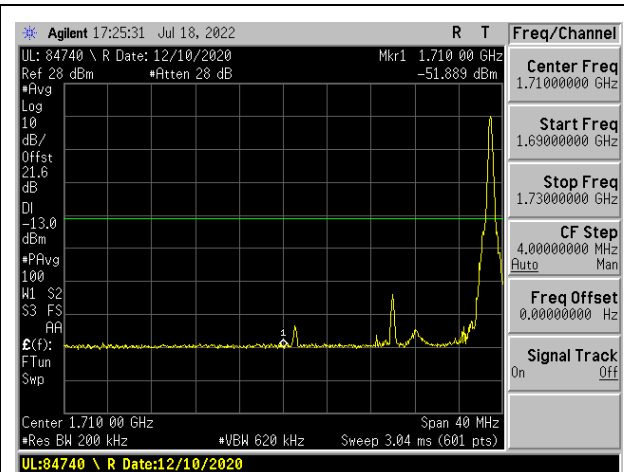


LTE4 20MHz 16QAM LOW Ch RB1-99

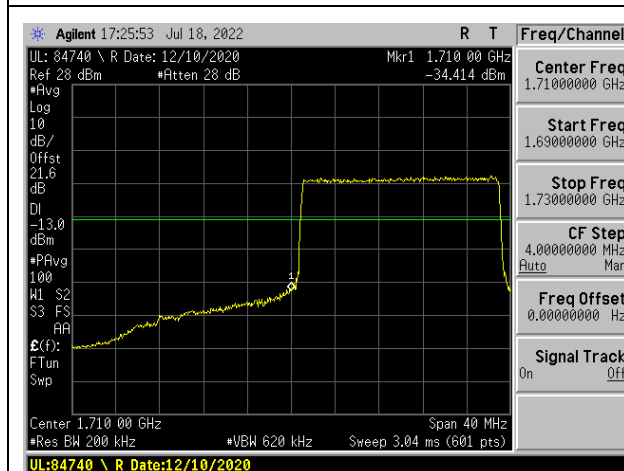

LTE4 20MHz 16QAM LOW Ch RB100-0

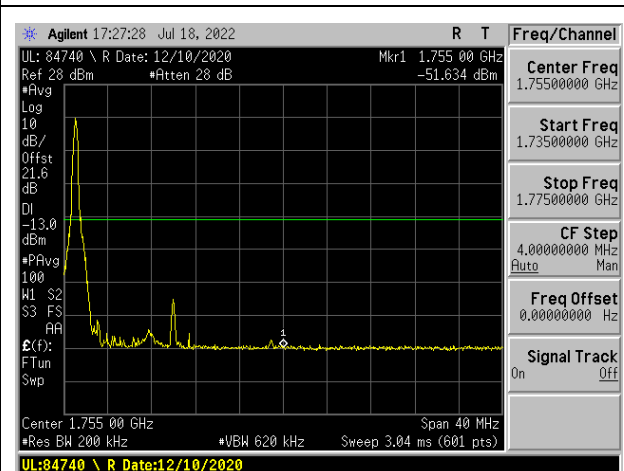

LTE4 20MHz 16QAM HIGH Ch RB1-0

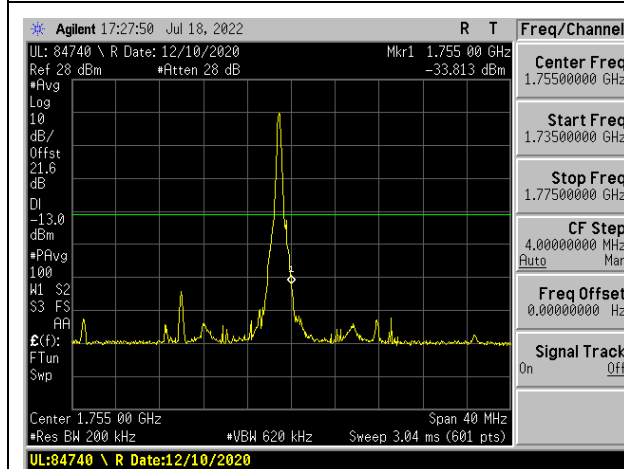

LTE4 20MHz 16QAM HIGH Ch RB1-99




LTE4 20MHz 16QAM HIGH Ch RB100-0


9.2.5. LTE BAND 5


LIMITS

FCC: §22.917


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

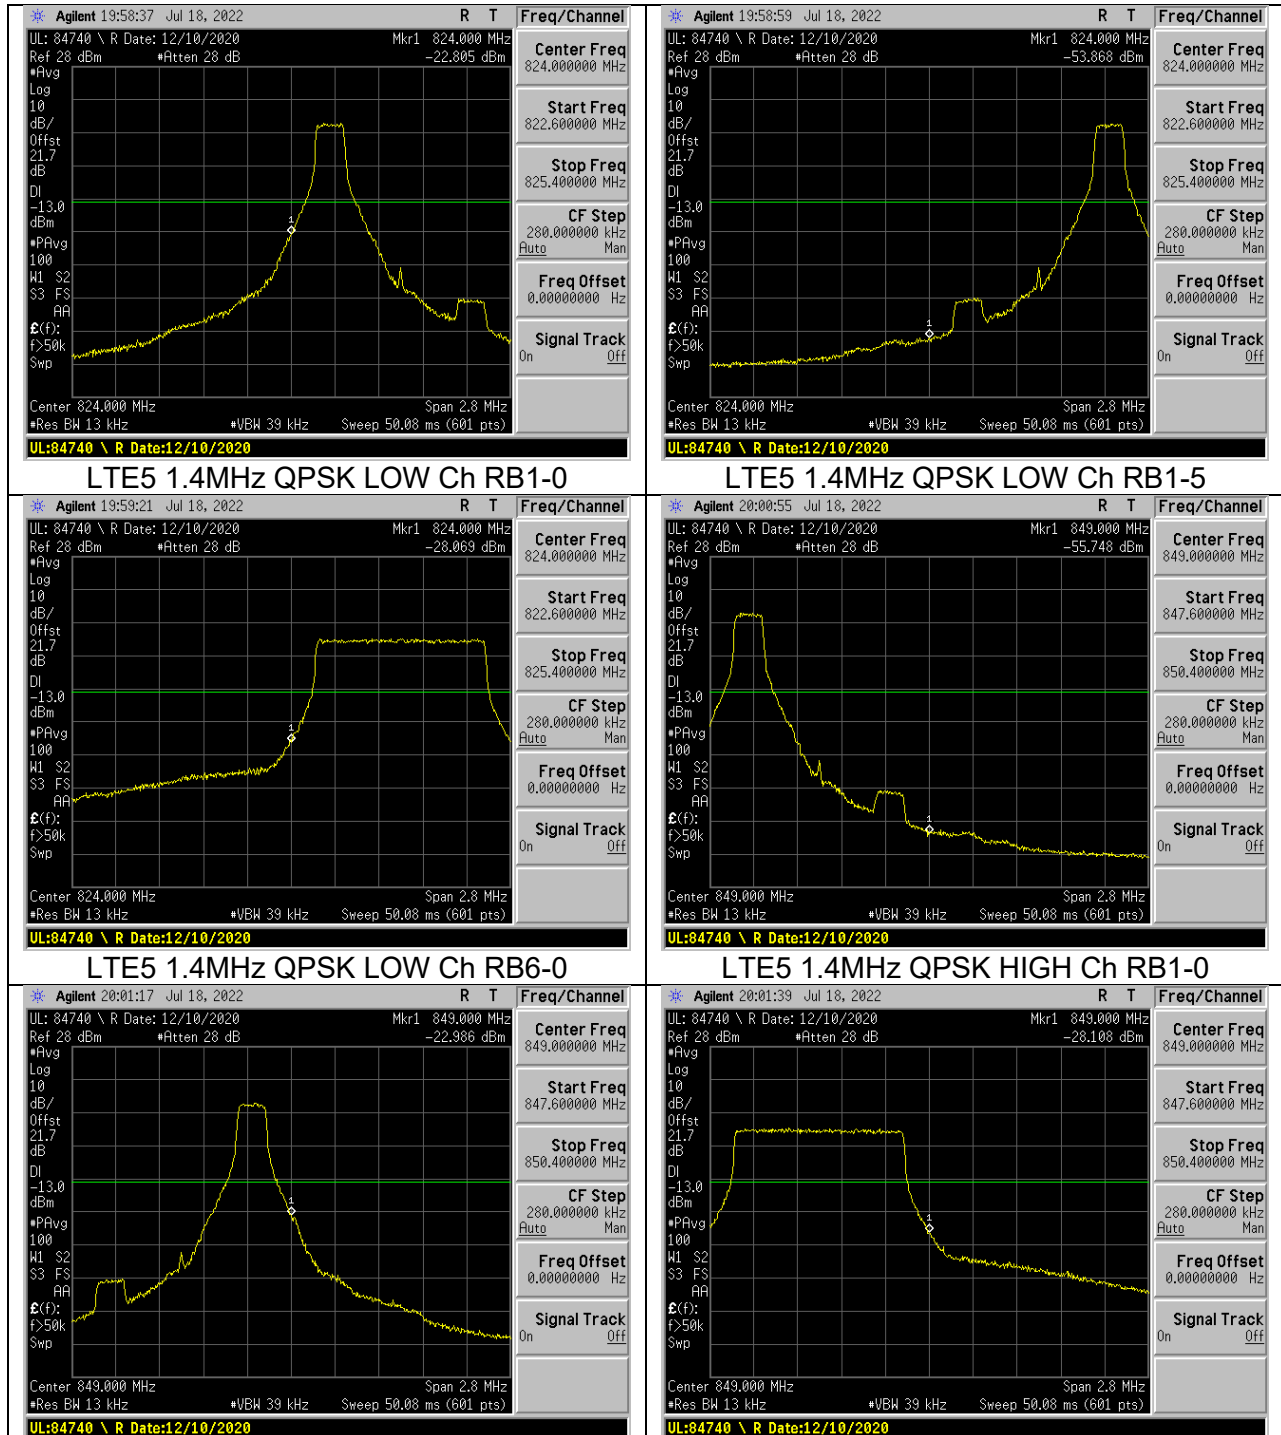

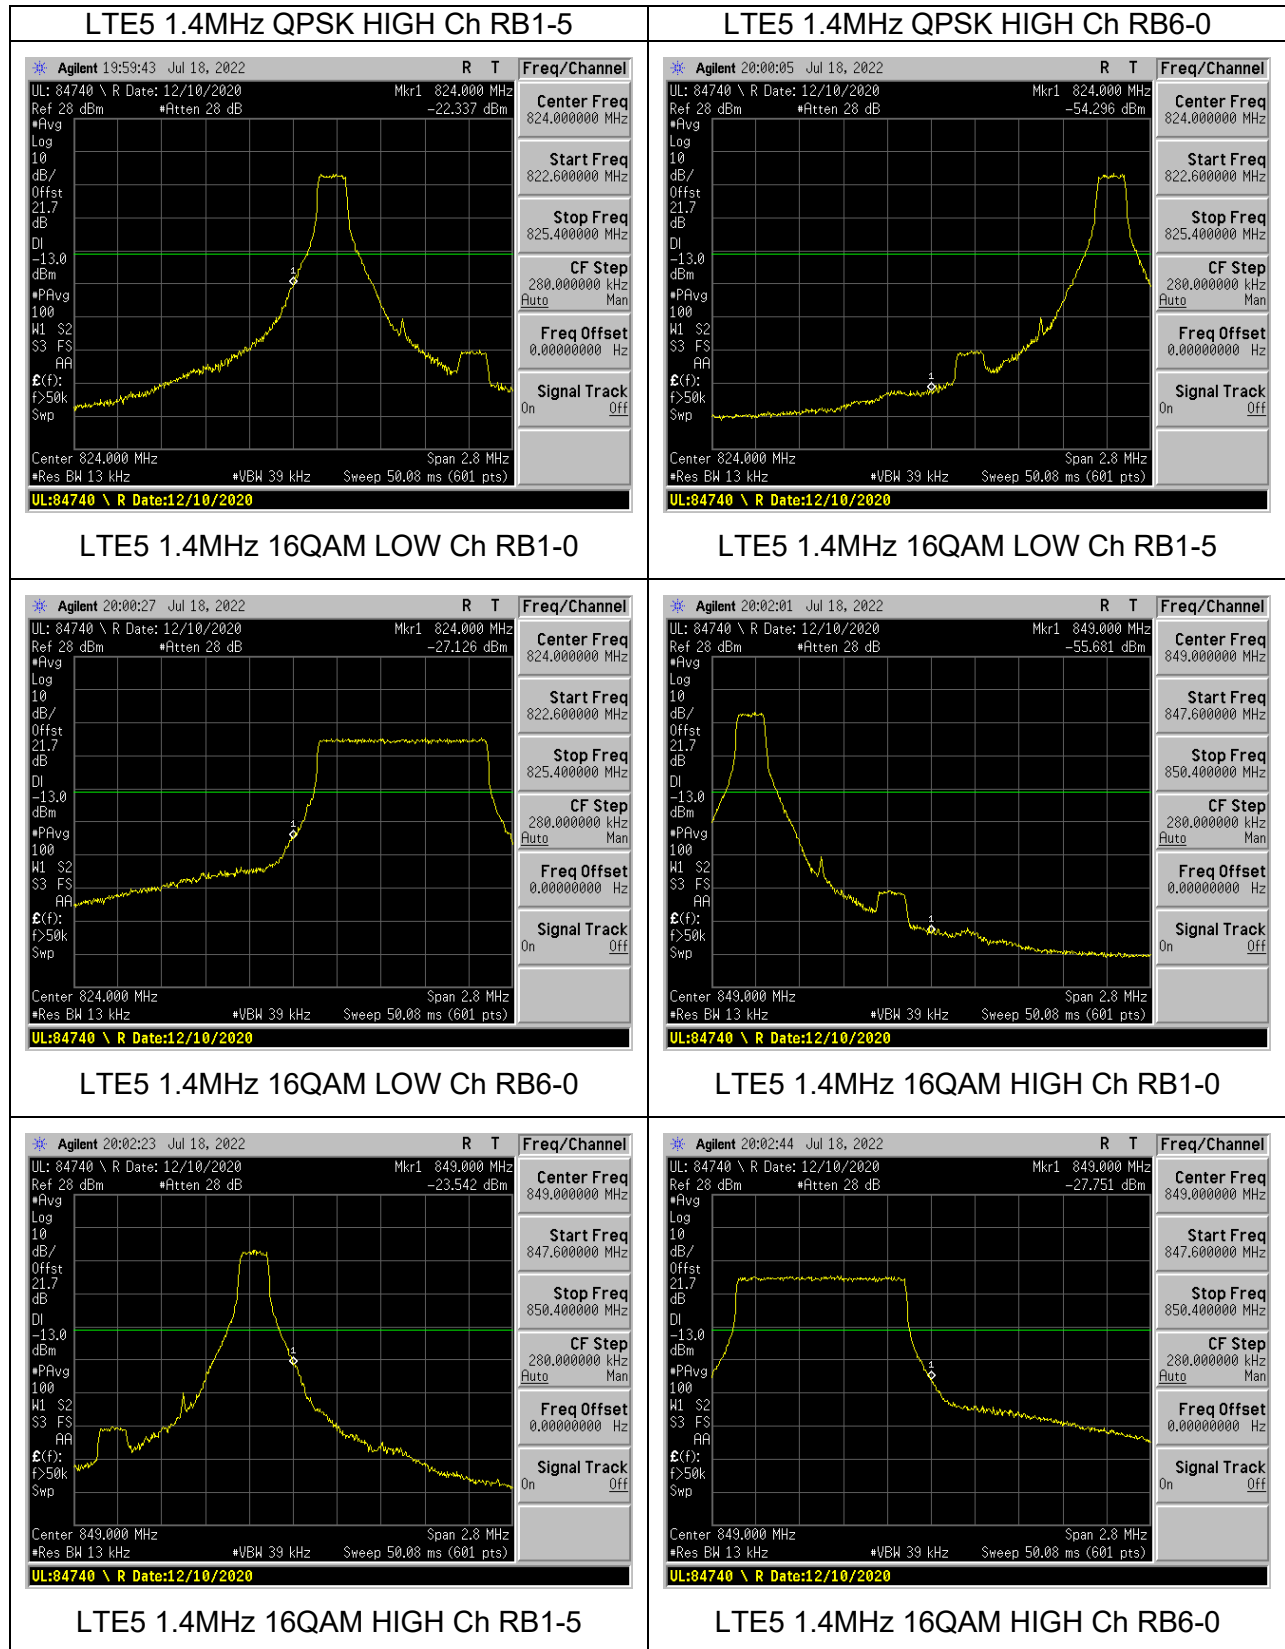


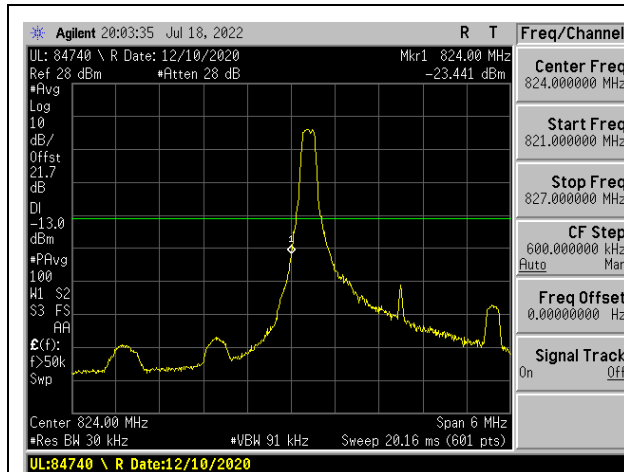


LTE5 3MHz QPSK LOW Ch RB1-0

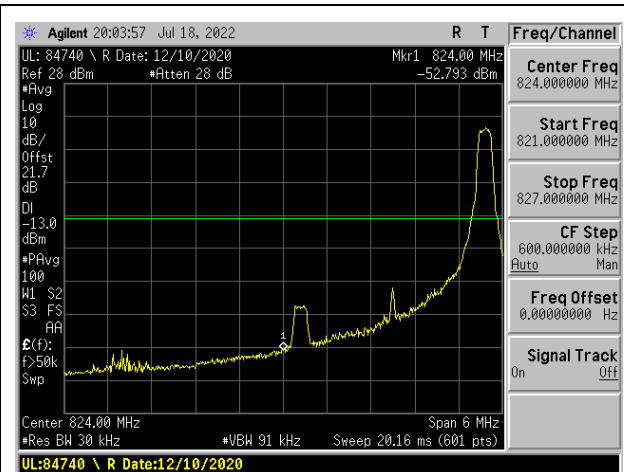


LTE5 3MHz QPSK LOW Ch RB1-14

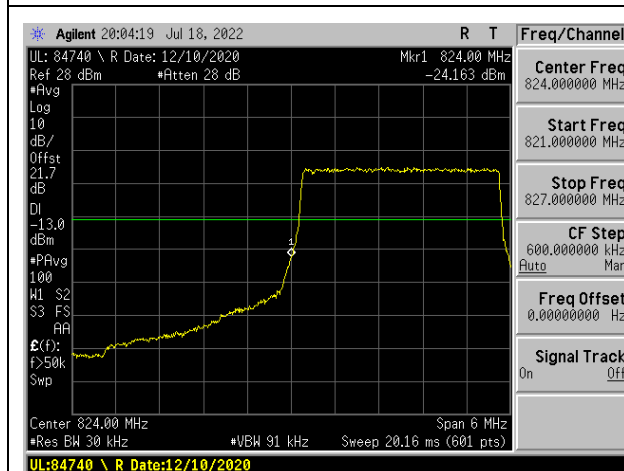


LTE5 3MHz QPSK LOW Ch RB15-0

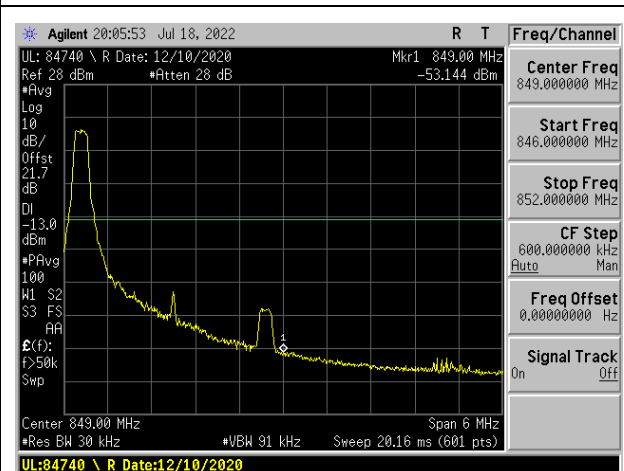


LTE5 3MHz QPSK HIGH Ch RB1-0

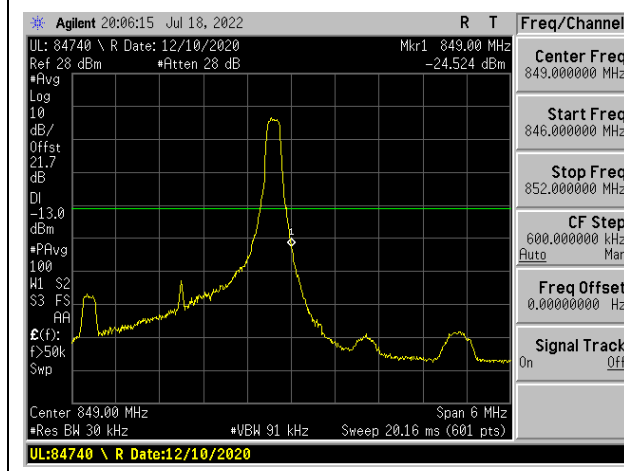


LTE5 3MHz QPSK HIGH Ch RB1-14

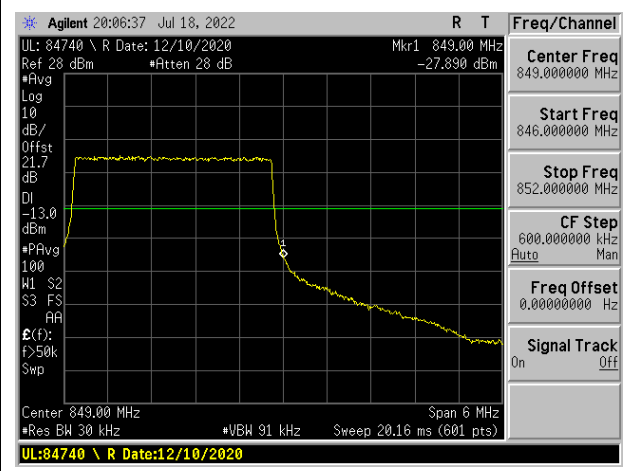


LTE5 3MHz QPSK HIGH Ch RB15-0

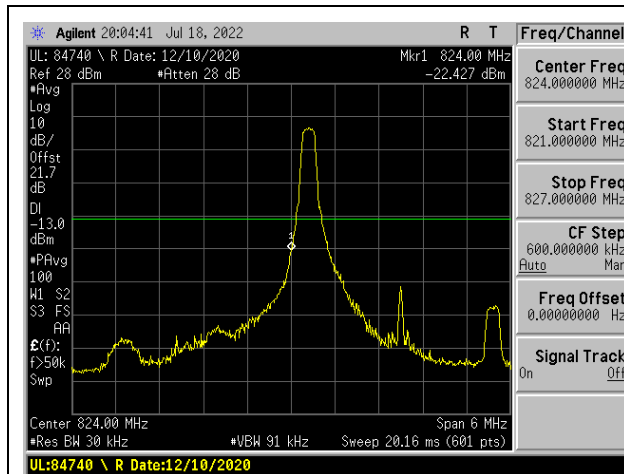


LTE5 3MHz 16QAM LOW Ch RB1-0

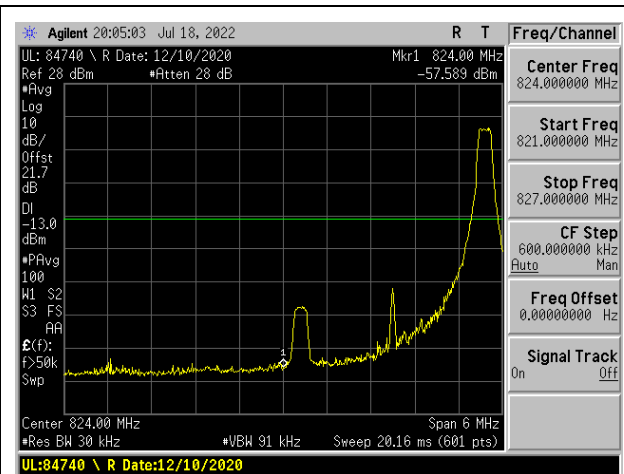


LTE5 3MHz 16QAM LOW Ch RB1-14

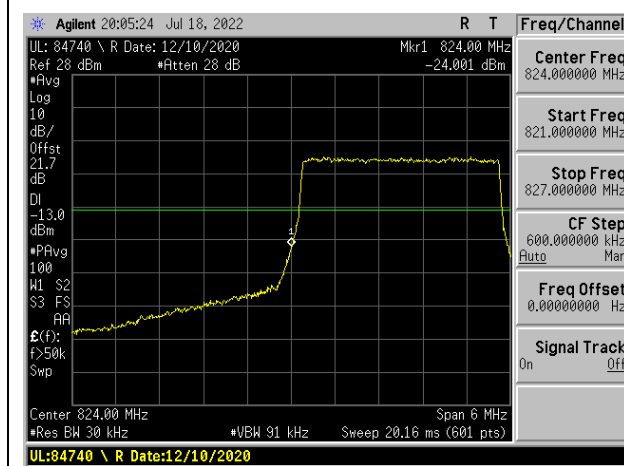


LTE5 3MHz 16QAM LOW Ch RB15-0

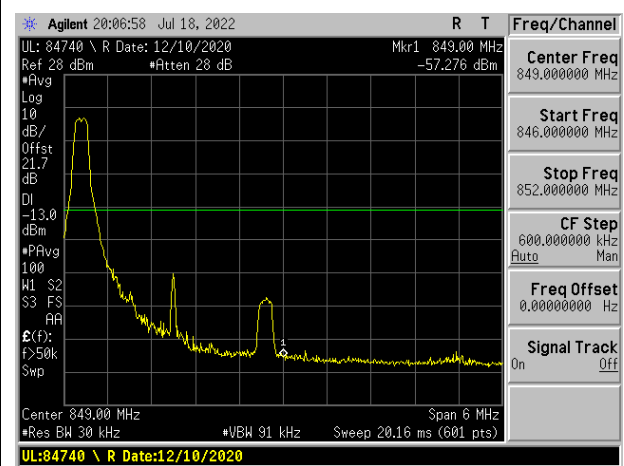


LTE5 3MHz 16QAM HIGH Ch RB1-0

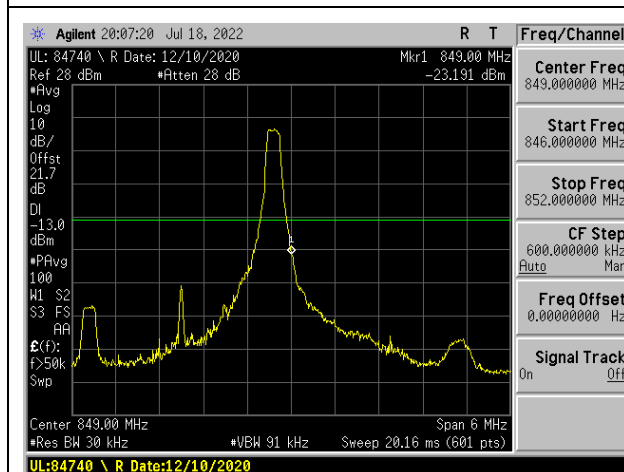


LTE5 3MHz 16QAM HIGH Ch RB1-14

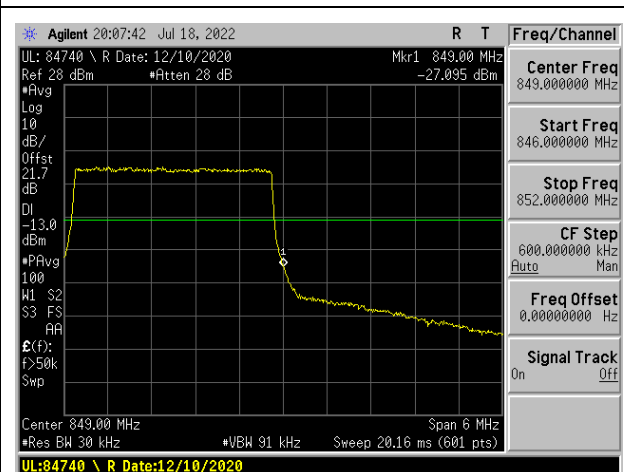


LTE5 3MHz 16QAM HIGH Ch RB15-0

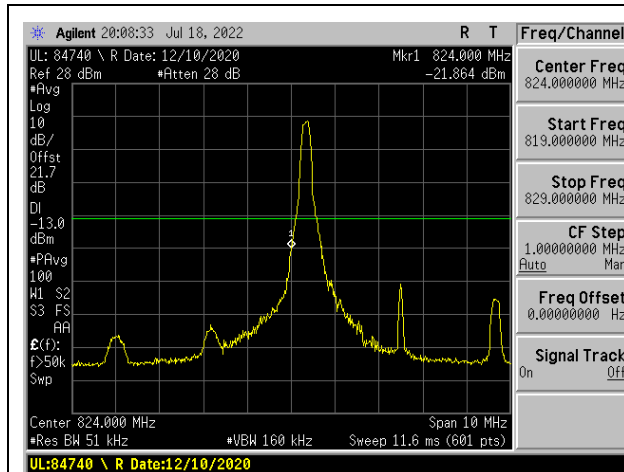


LTE5 5MHz QPSK LOW Ch RB1-0

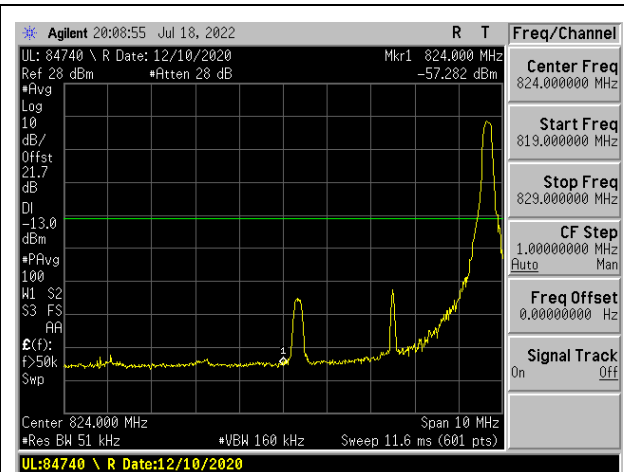


LTE5 5MHz QPSK LOW Ch RB1-24

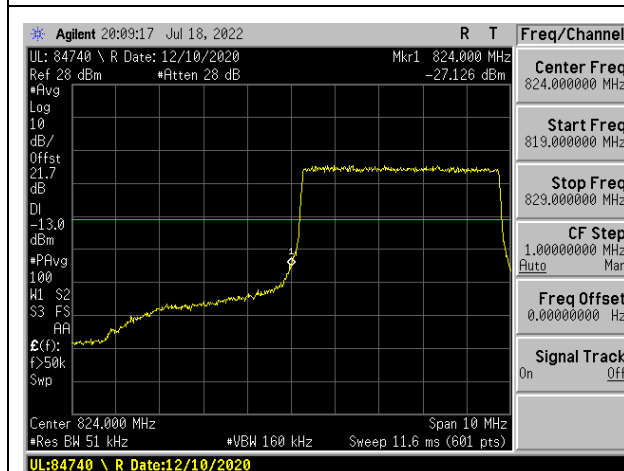


LTE5 5MHz QPSK LOW Ch RB25-0

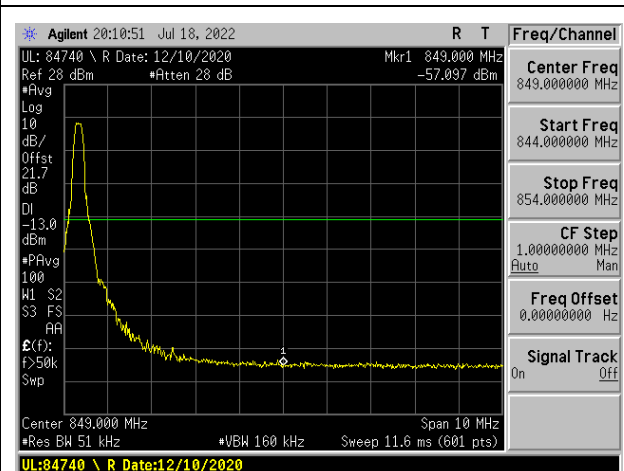


LTE5 5MHz QPSK HIGH Ch RB1-0

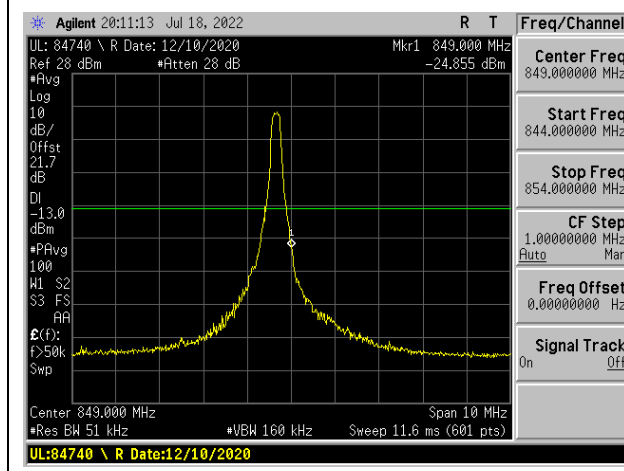


LTE5 5MHz QPSK HIGH Ch RB1-24

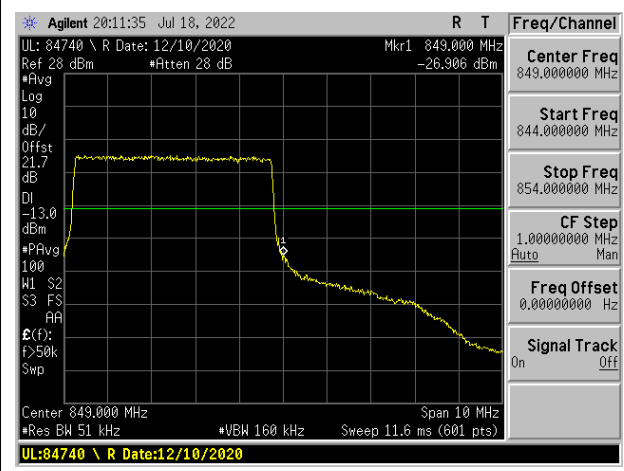


LTE5 5MHz QPSK HIGH Ch RB25-0

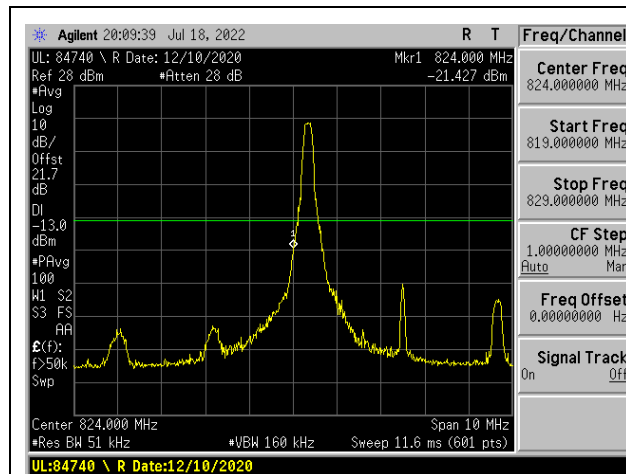


LTE5 5MHz 16QAM LOW Ch RB1-0

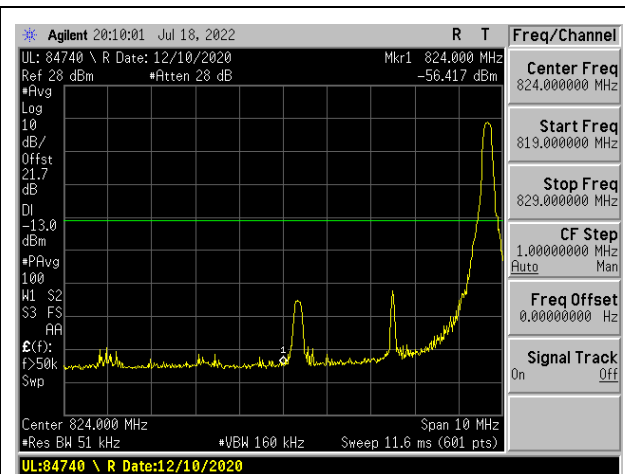


LTE5 5MHz 16QAM LOW Ch RB1-24

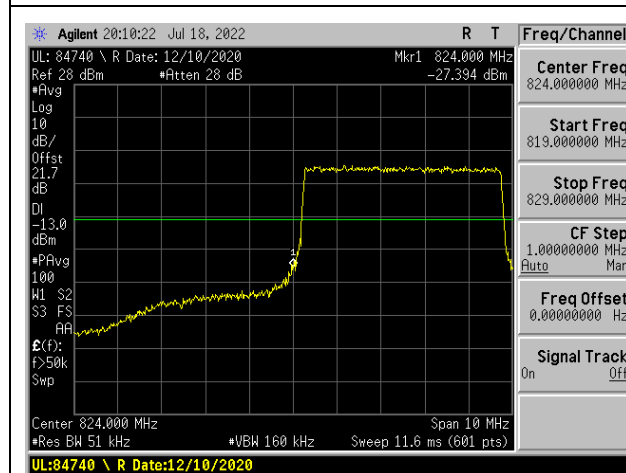


LTE5 5MHz 16QAM LOW Ch RB25-0

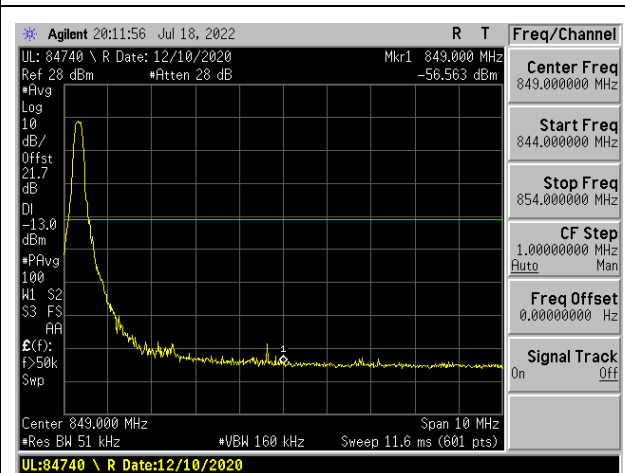


LTE5 5MHz 16QAM HIGH Ch RB1-0

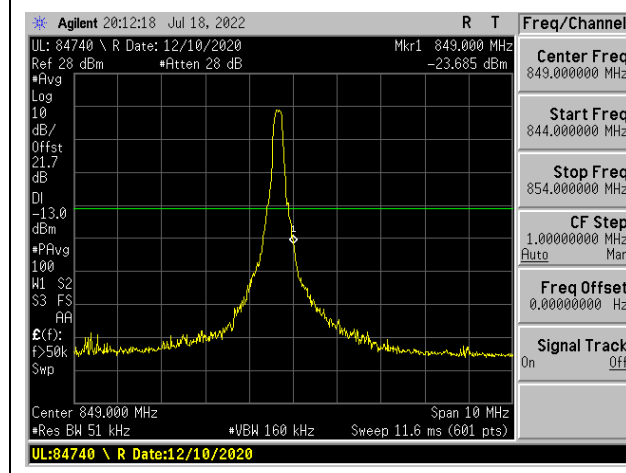


LTE5 5MHz 16QAM HIGH Ch RB1-24

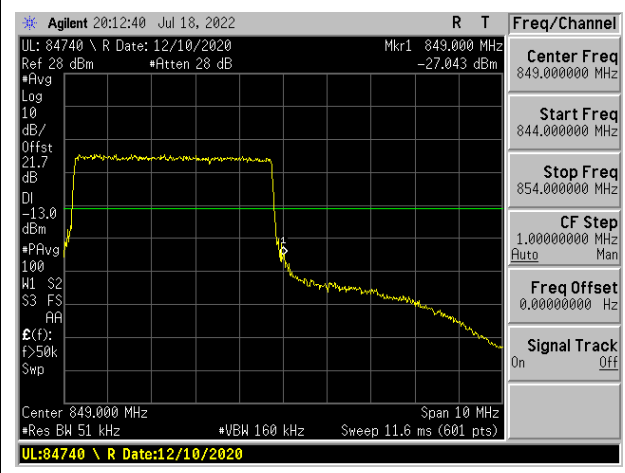


LTE5 5MHz 16QAM HIGH Ch RB25-0

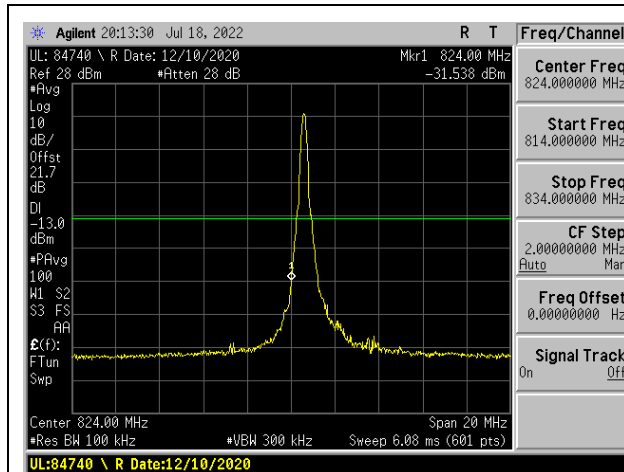


LTE5 10MHz QPSK LOW Ch RB1-0

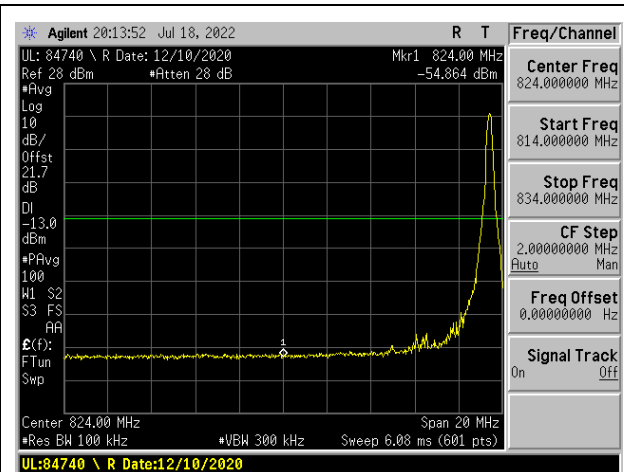


LTE5 10MHz QPSK LOW Ch RB1-49

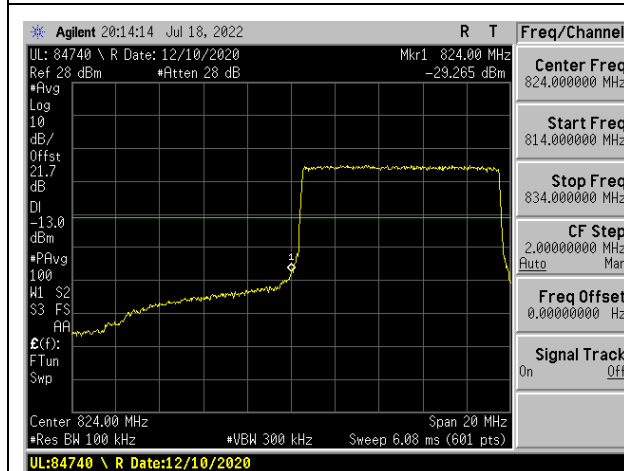


LTE5 10MHz QPSK LOW Ch RB50-0

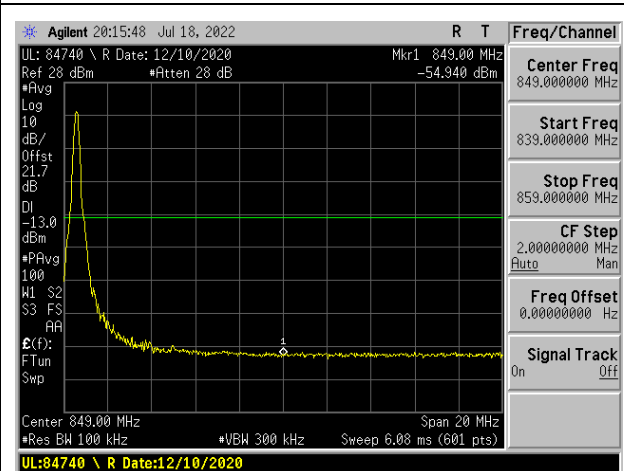


LTE5 10MHz QPSK HIGH Ch RB1-0

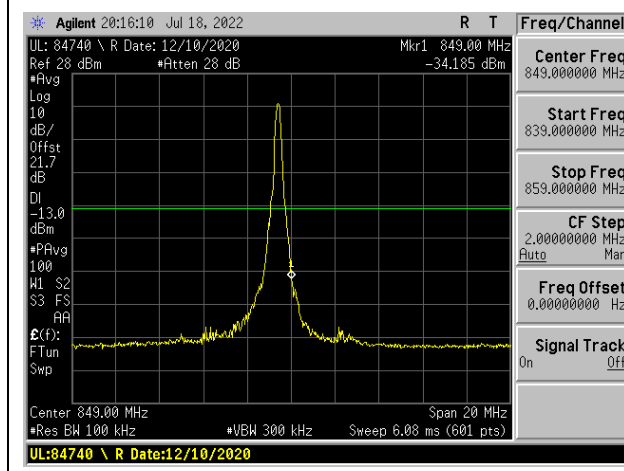


LTE5 10MHz QPSK HIGH Ch RB1-49

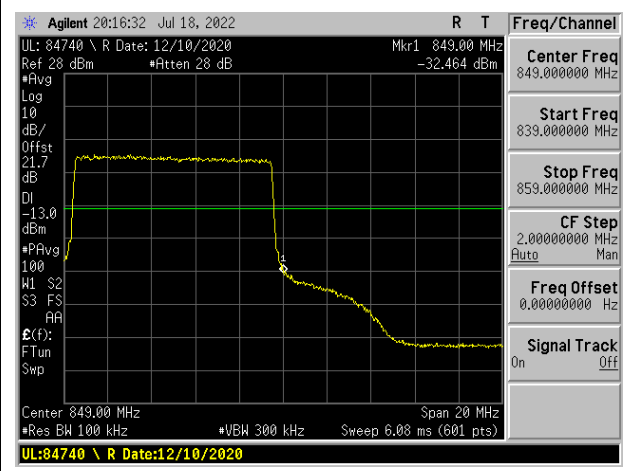


LTE5 10MHz QPSK HIGH Ch RB50-0

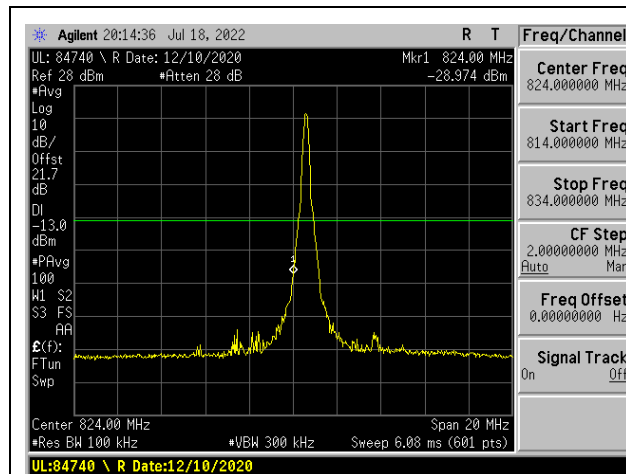


LTE5 10MHz 16QAM LOW Ch RB1-0

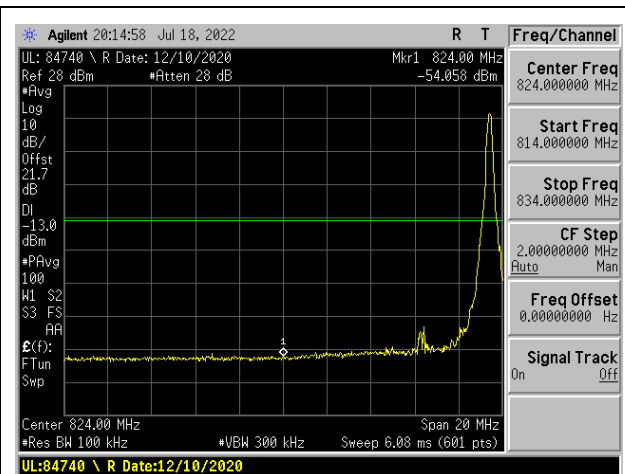


LTE5 10MHz 16QAM LOW Ch RB1-49

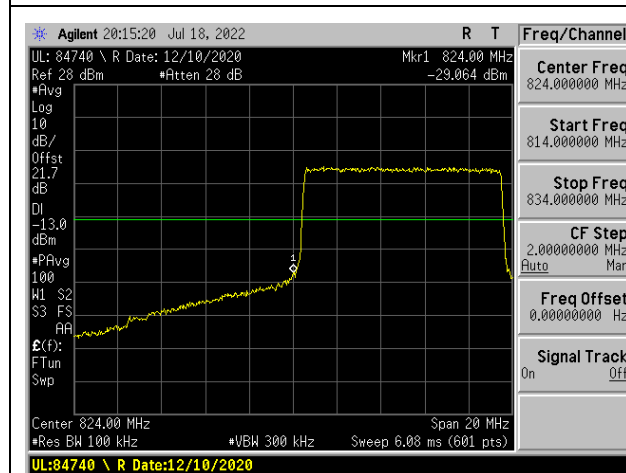


LTE5 10MHz 16QAM LOW Ch RB50-0

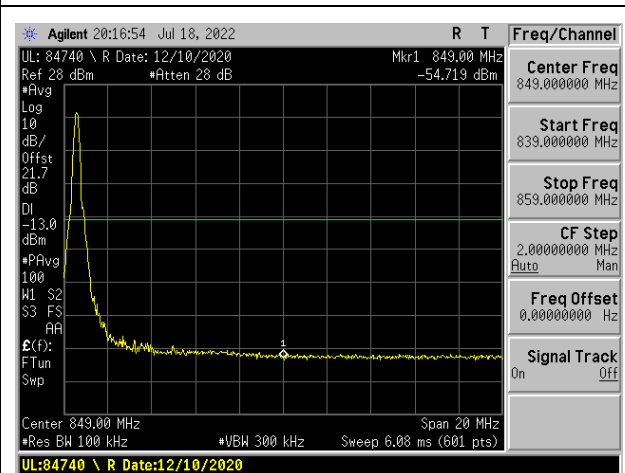

LTE5 10MHz 16QAM HIGH Ch RB1-0

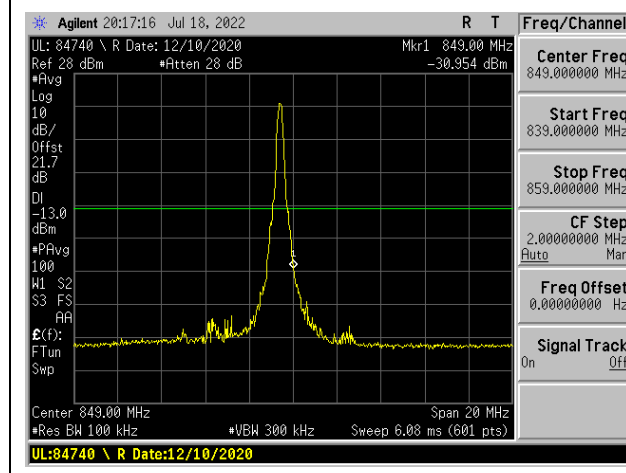

LTE5 10MHz 16QAM HIGH Ch RB1-49

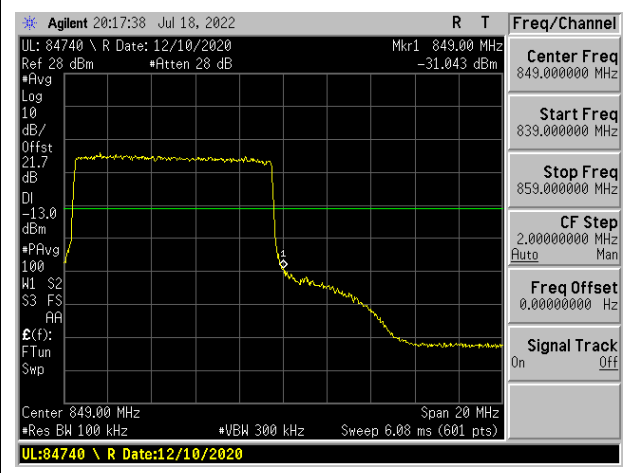


LTE5 10MHz 16QAM HIGH Ch RB50-0



9.2.6. LTE BAND 12


LIMITS

FCC: §27.53


(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

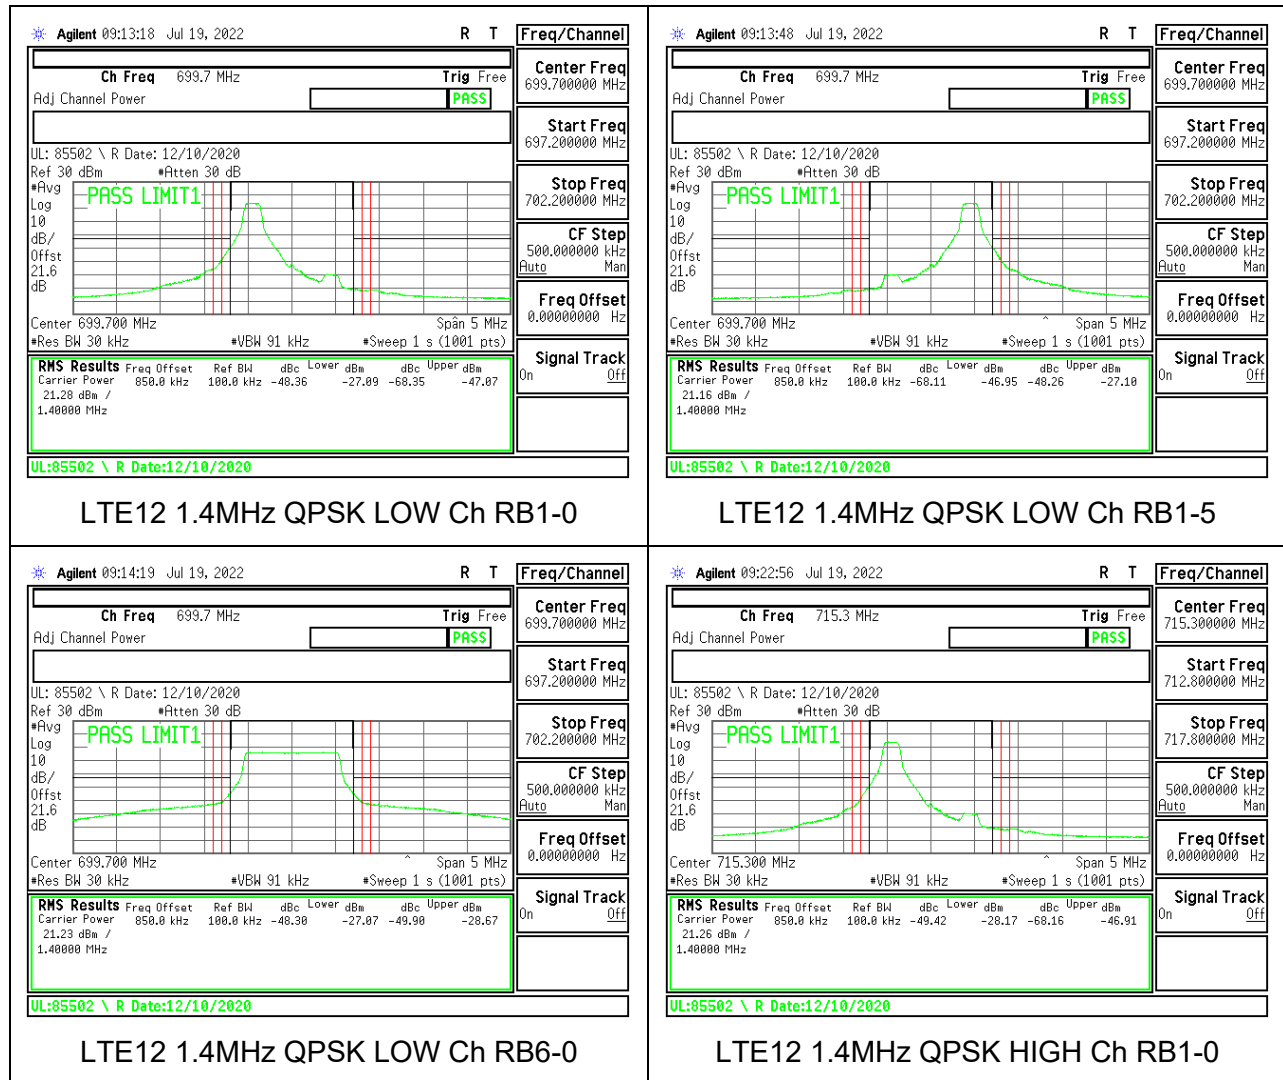

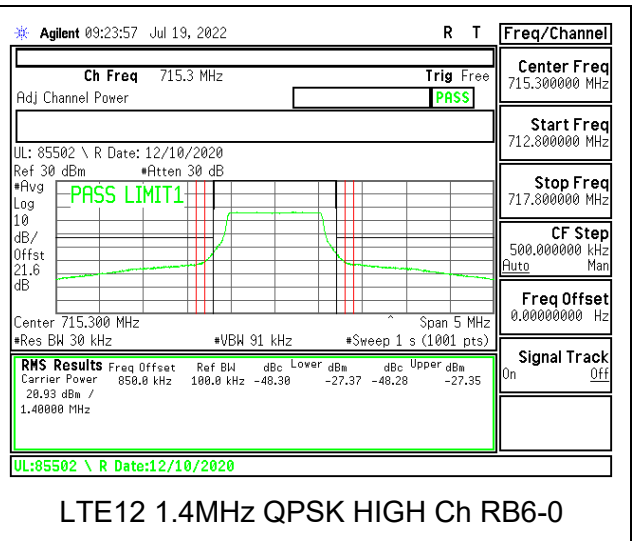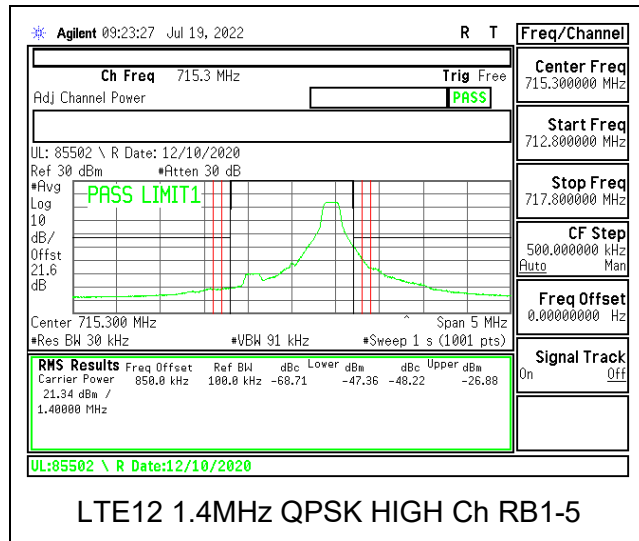


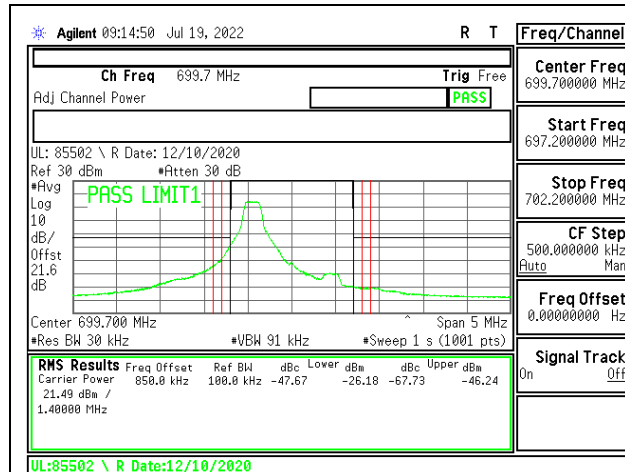


LTE12 1.4MHz 16QAM LOW Ch RB1-0

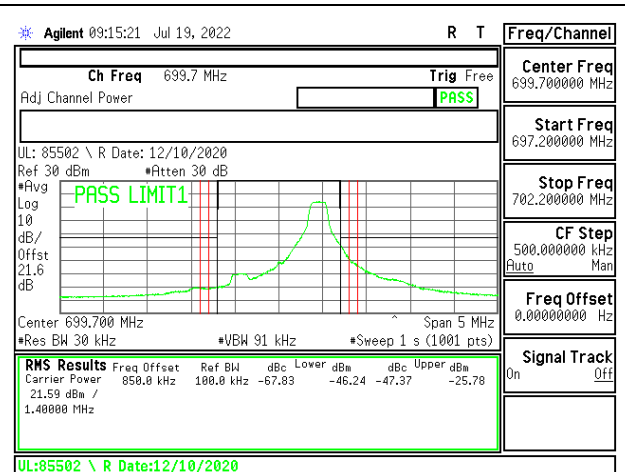


LTE12 1.4MHz 16QAM LOW Ch RB1-5

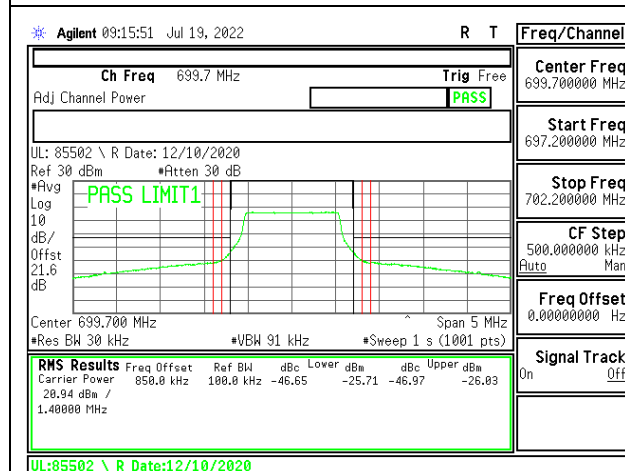


LTE12 1.4MHz 16QAM LOW Ch RB6-0

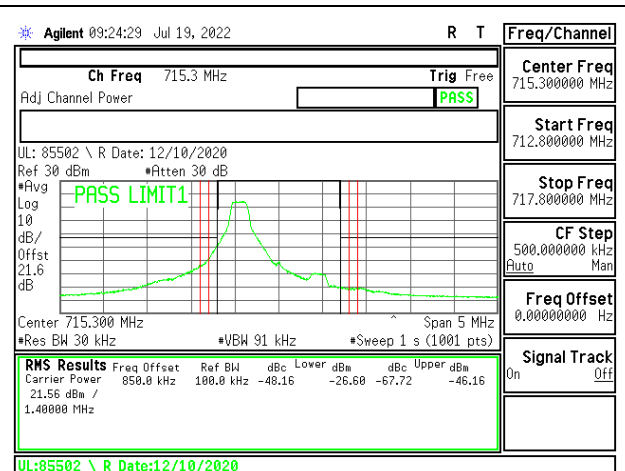


LTE12 1.4MHz 16QAM HIGH Ch RB1-0

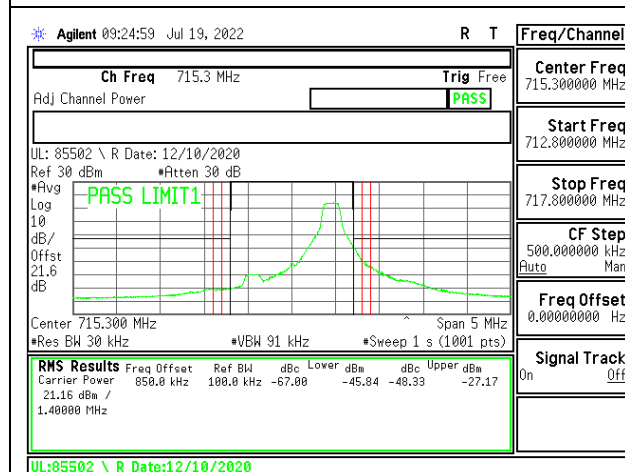


LTE12 1.4MHz 16QAM HIGH Ch RB1-5

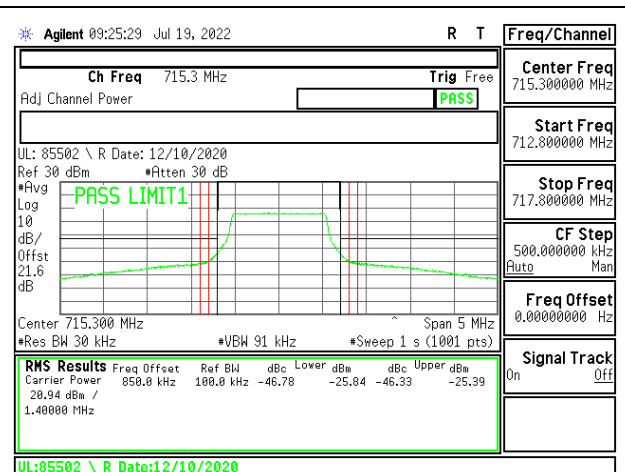


LTE12 1.4MHz 16QAM HIGH Ch RB6-0

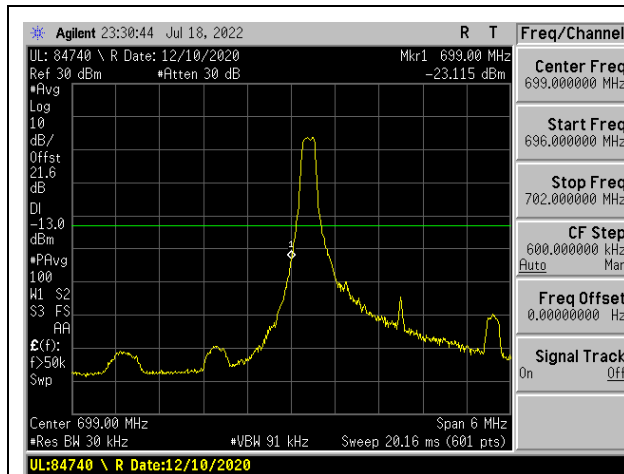


LTE12 3MHz QPSK LOW Ch RB1-0

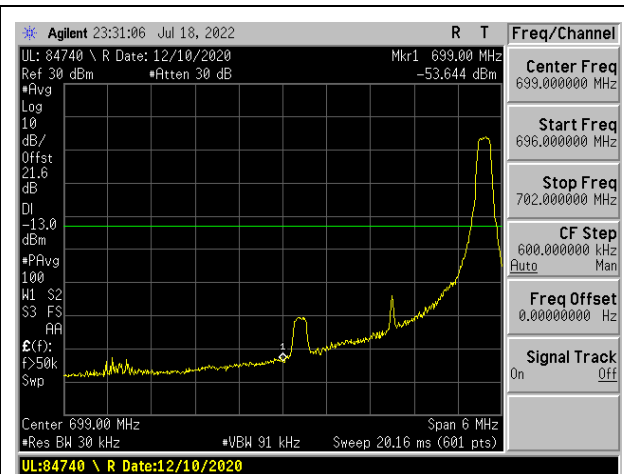


LTE12 3MHz QPSK LOW Ch RB1-14

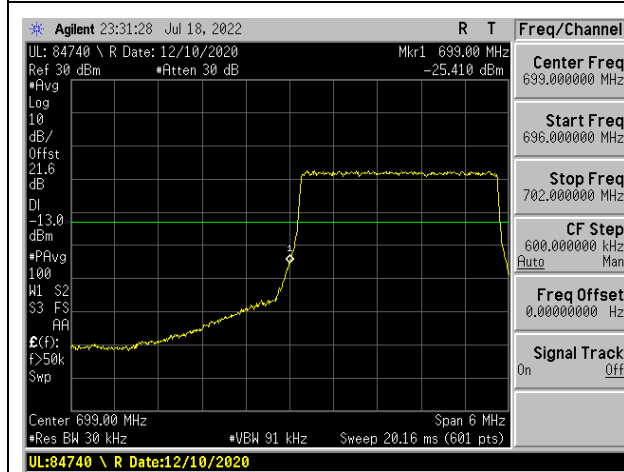


LTE12 3MHz QPSK LOW Ch RB15-0

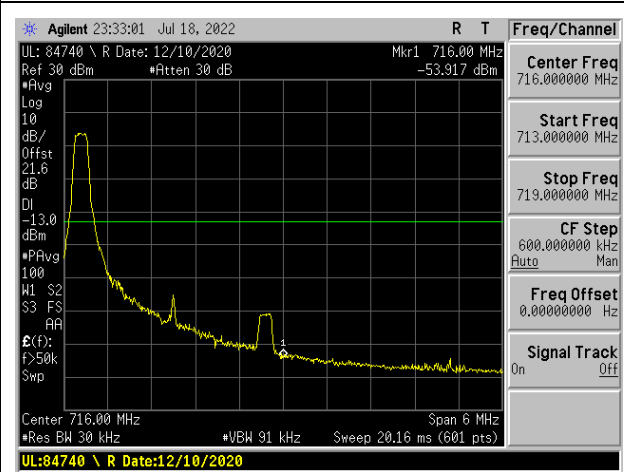


LTE12 3MHz QPSK HIGH Ch RB1-0

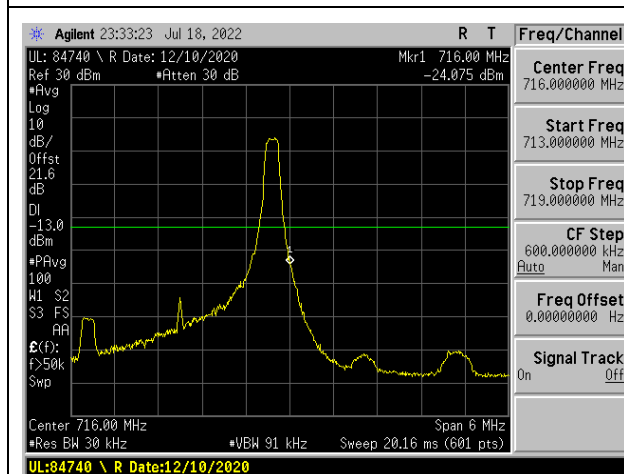


LTE12 3MHz QPSK HIGH Ch RB1-14

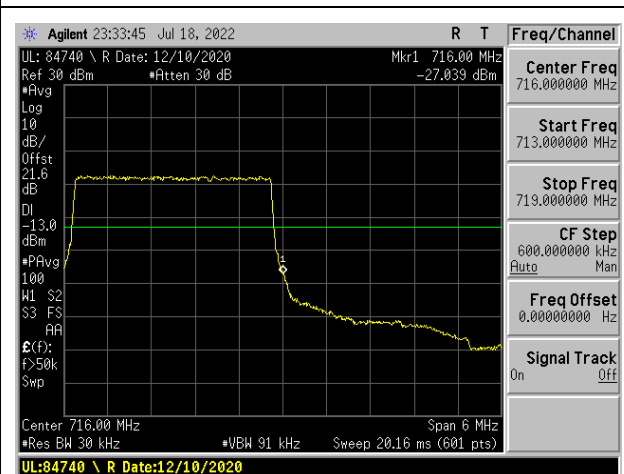


LTE12 3MHz QPSK HIGH Ch RB15-0

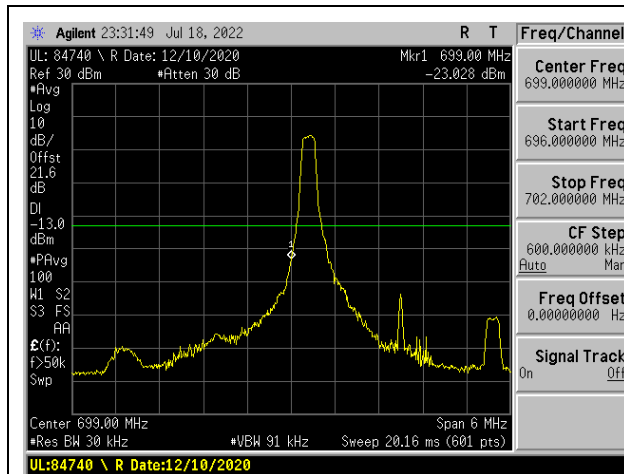


LTE12 3MHz 16QAM LOW Ch RB1-0

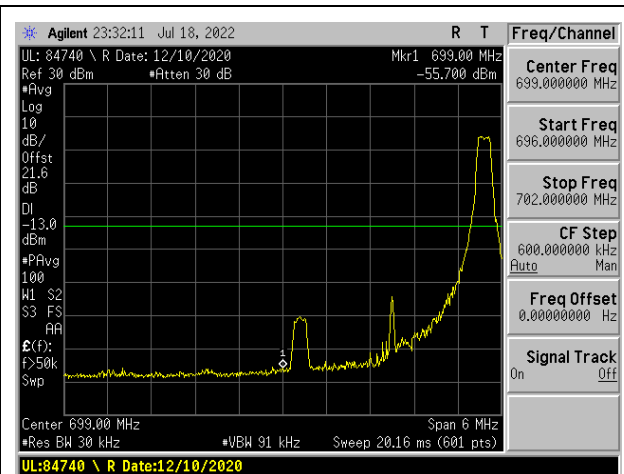


LTE12 3MHz 16QAM LOW Ch RB1-14

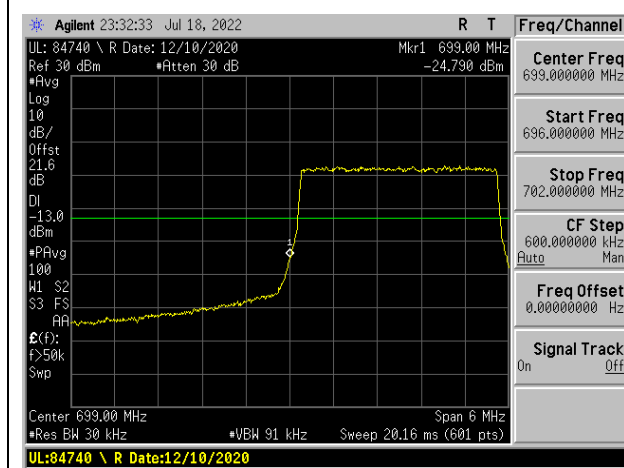


LTE12 3MHz 16QAM LOW Ch RB15-0

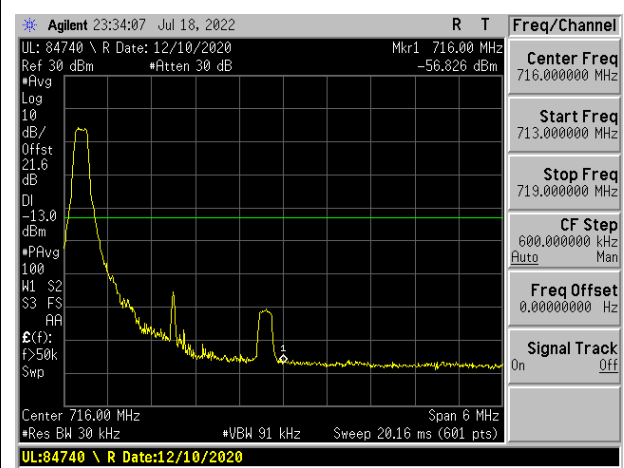


LTE12 3MHz 16QAM HIGH Ch RB1-0

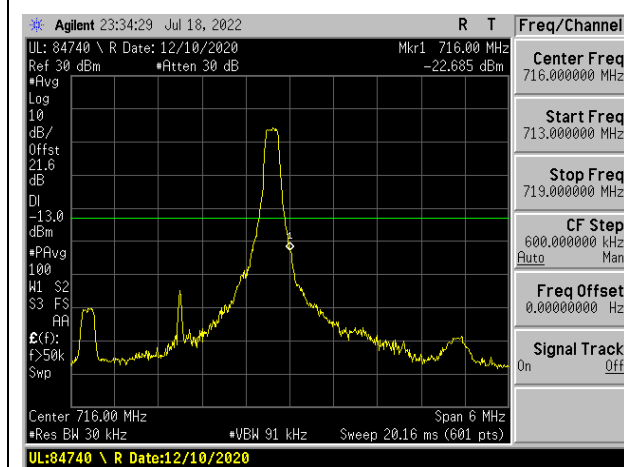


LTE12 3MHz 16QAM HIGH Ch RB1-14

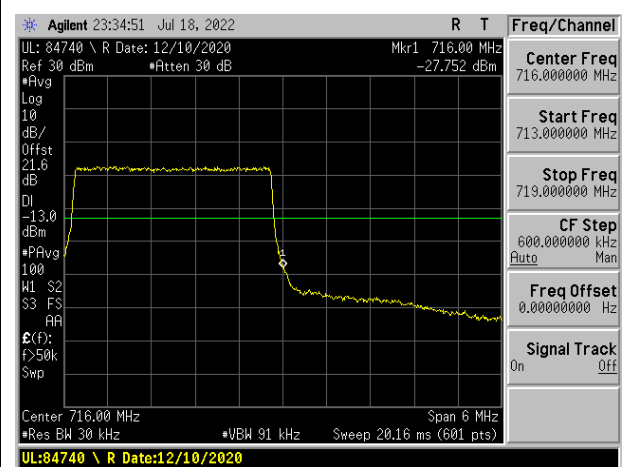


LTE12 3MHz 16QAM HIGH Ch RB15-0

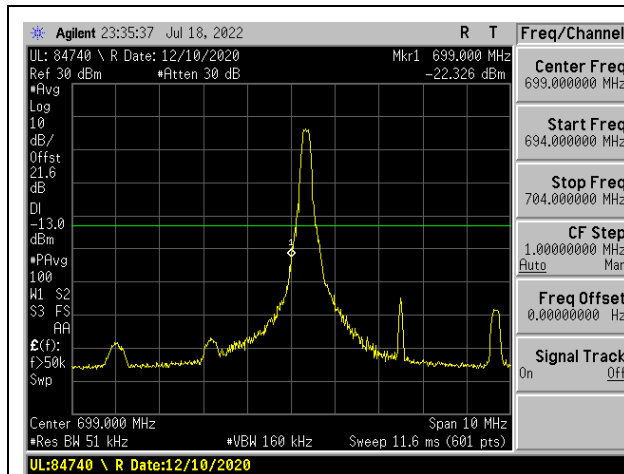


LTE12 5MHz QPSK LOW Ch RB1-0

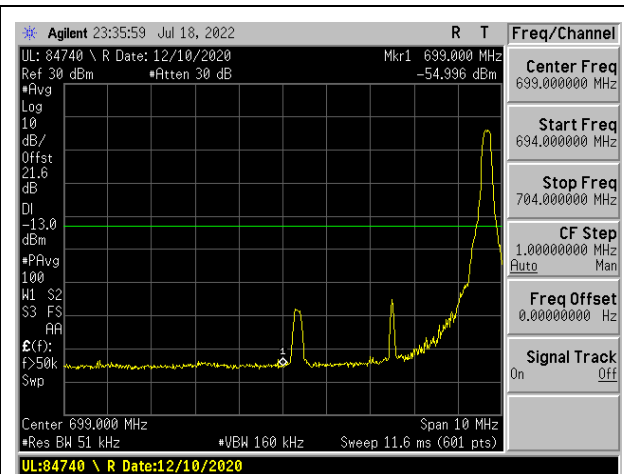


LTE12 5MHz QPSK LOW Ch RB1-24

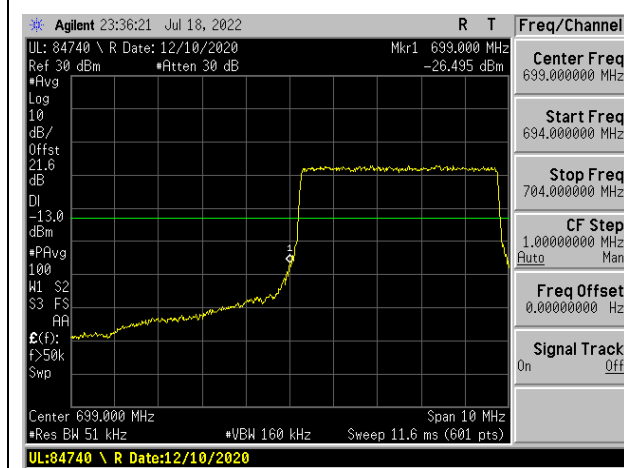


LTE12 5MHz QPSK LOW Ch RB25-0

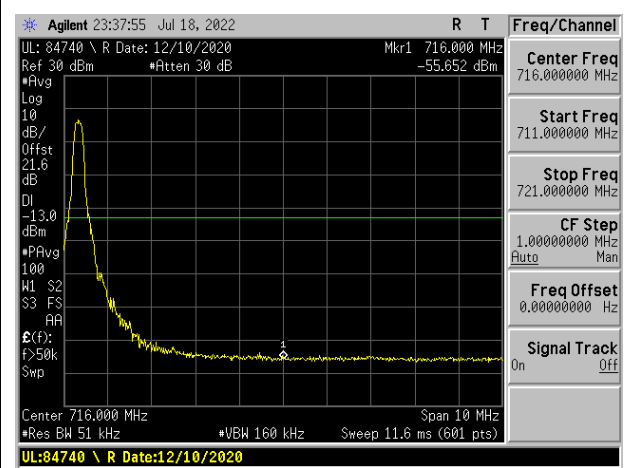


LTE12 5MHz QPSK HIGH Ch RB1-0

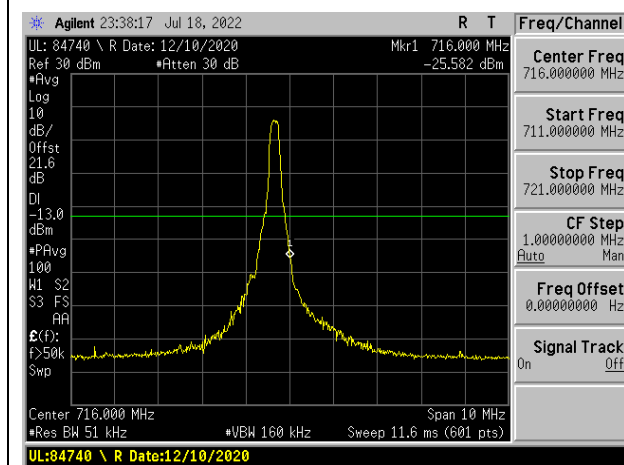


LTE12 5MHz QPSK HIGH Ch RB1-24

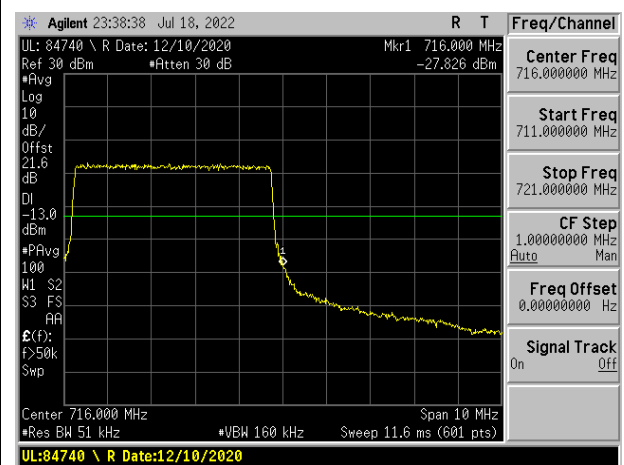


LTE12 5MHz QPSK HIGH Ch RB25-0

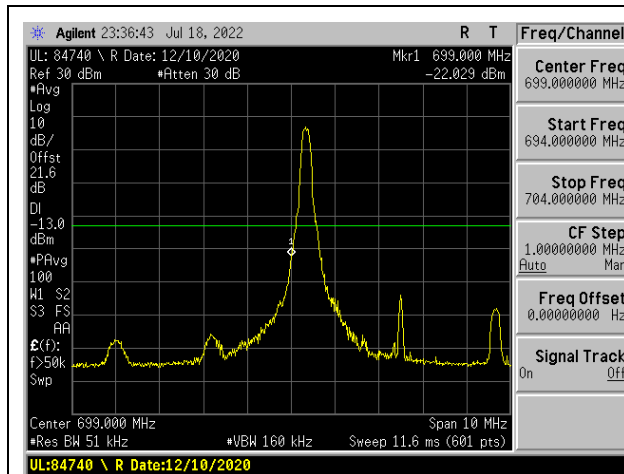


LTE12 5MHz 16QAM LOW Ch RB1-0

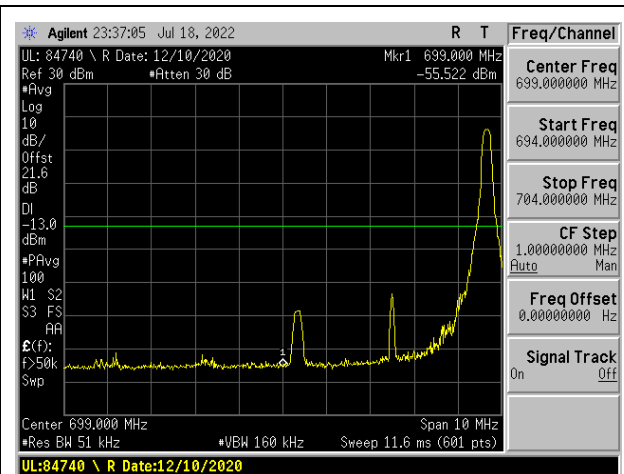


LTE12 5MHz 16QAM LOW Ch RB1-24

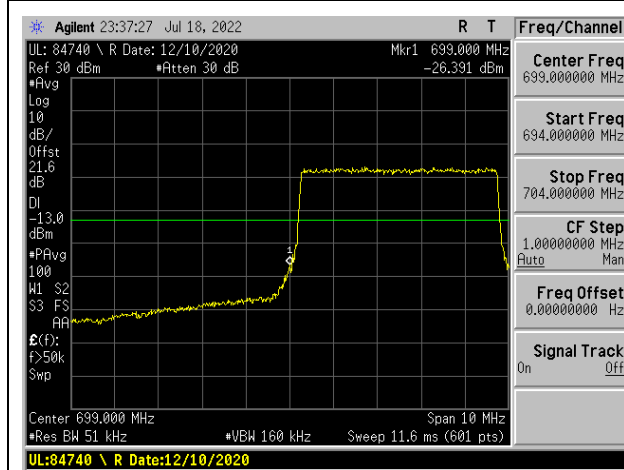


LTE12 5MHz 16QAM LOW Ch RB25-0

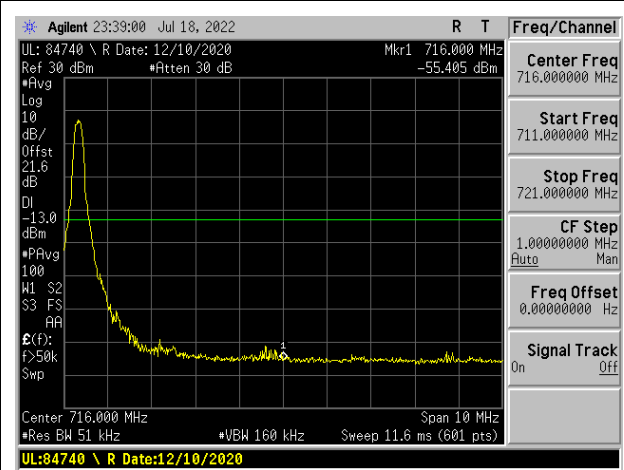


LTE12 5MHz 16QAM HIGH Ch RB1-0

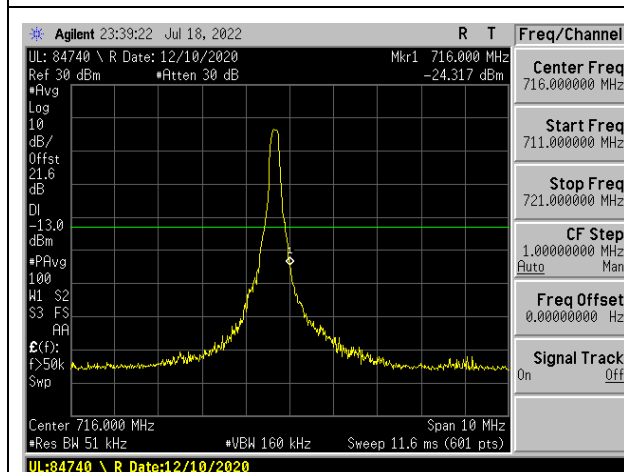


LTE12 5MHz 16QAM HIGH Ch RB1-24

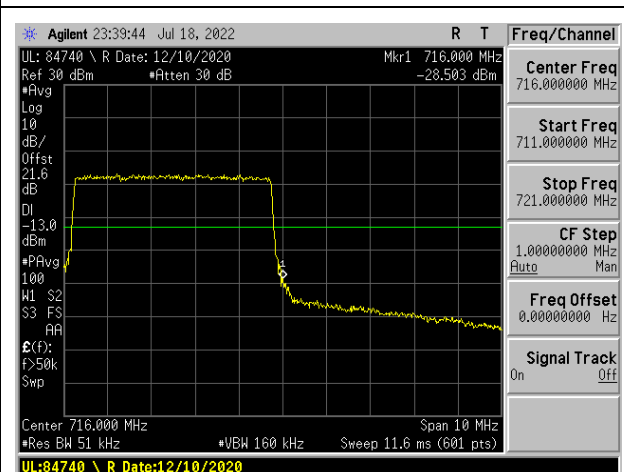


LTE12 5MHz 16QAM HIGH Ch RB25-0

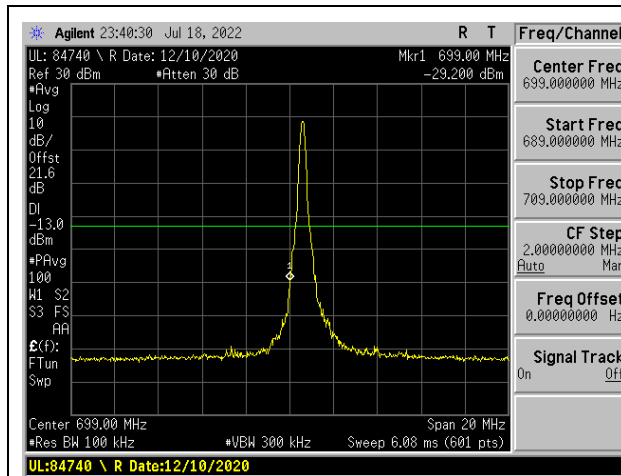


LTE12 10MHz QPSK LOW Ch RB1-0

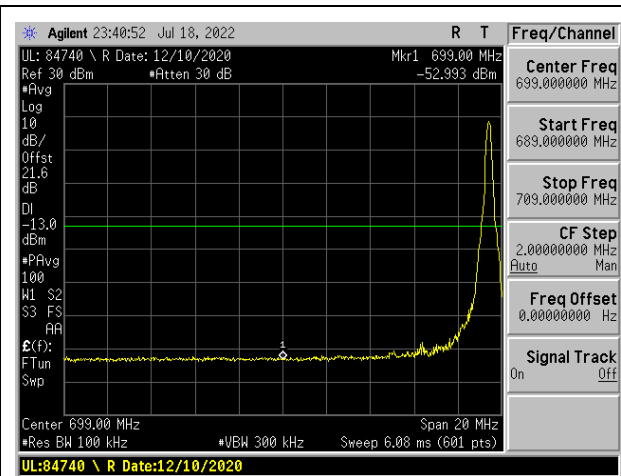


LTE12 10MHz QPSK LOW Ch RB1-49

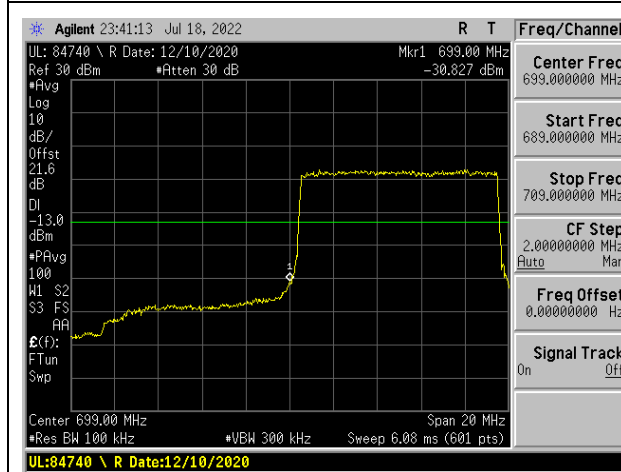


LTE12 10MHz QPSK LOW Ch RB50-0

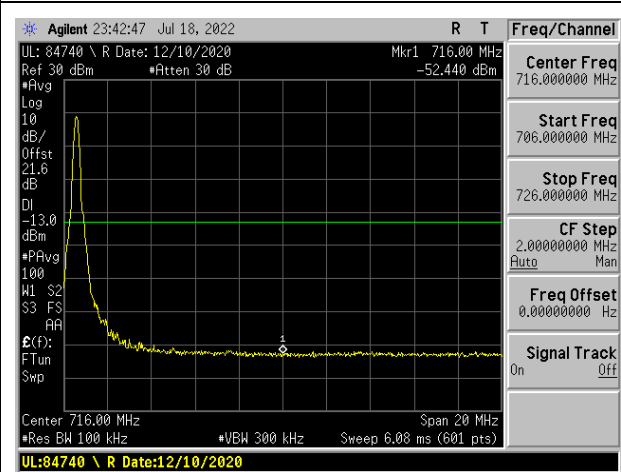


LTE12 10MHz QPSK HIGH Ch RB1-0

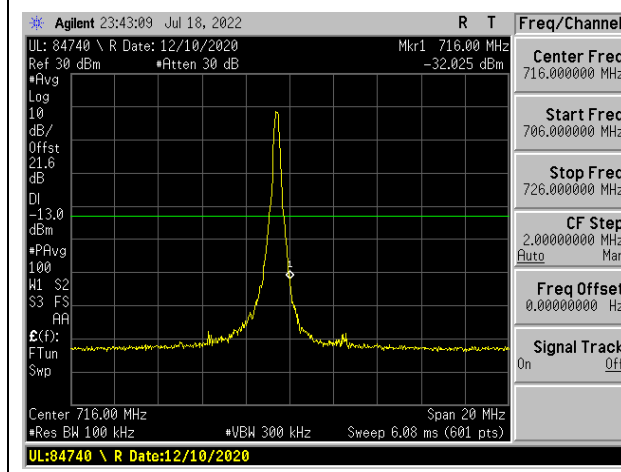


LTE12 10MHz QPSK HIGH Ch RB1-49

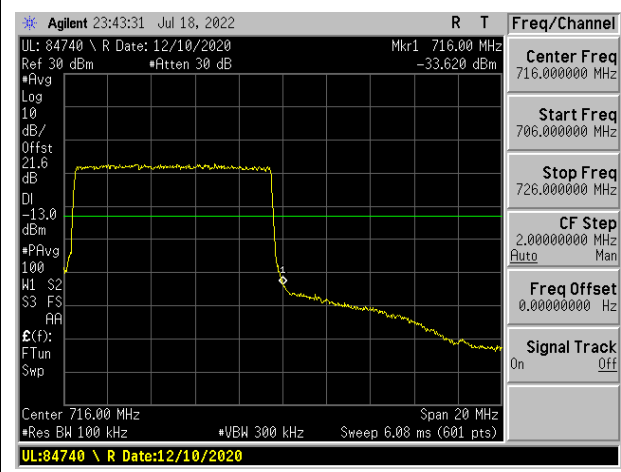


LTE12 10MHz QPSK HIGH Ch RB50-0

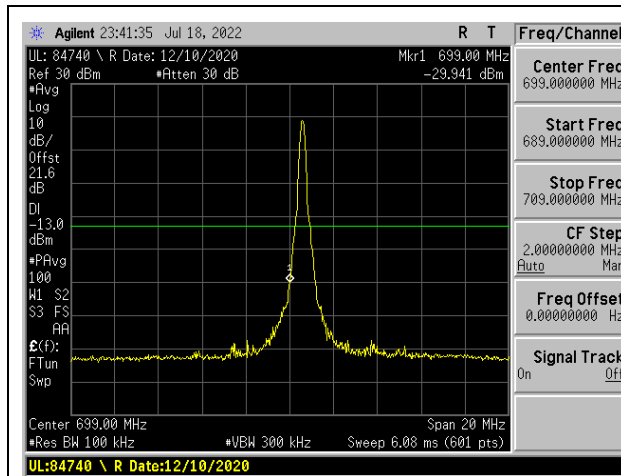


LTE12 10MHz 16QAM LOW Ch RB1-0

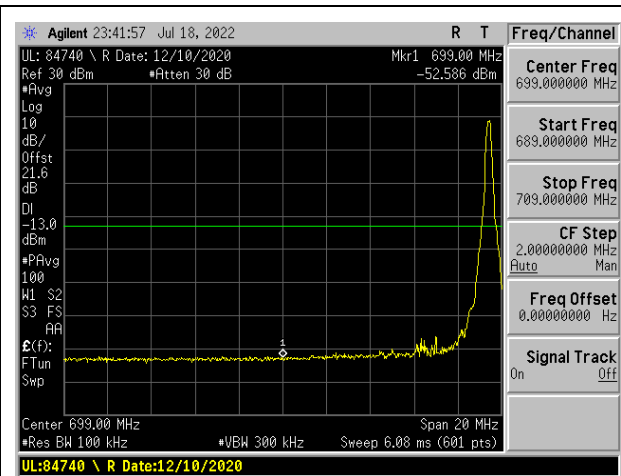


LTE12 10MHz 16QAM LOW Ch RB1-49

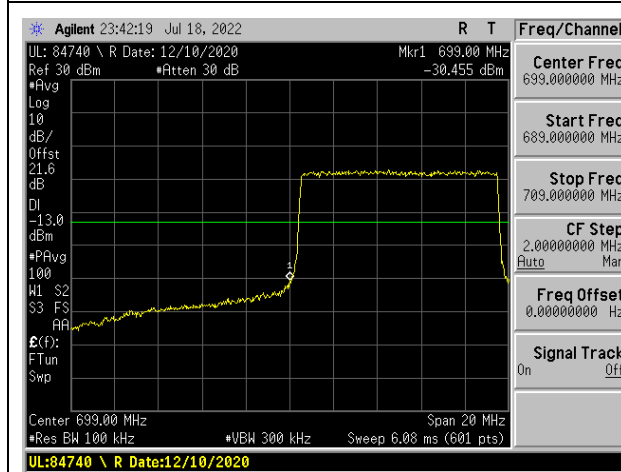


LTE12 10MHz 16QAM LOW Ch RB50-0

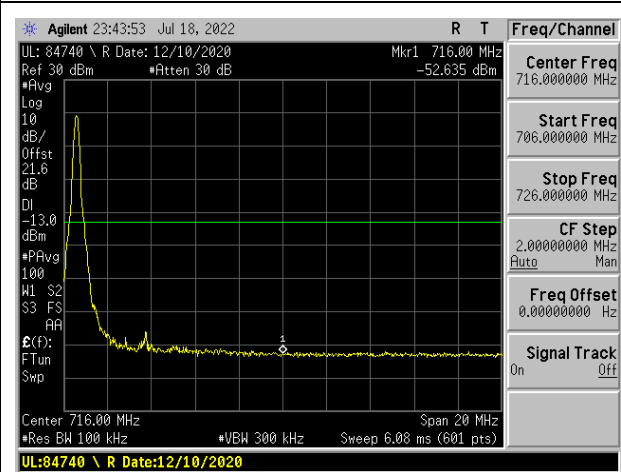

LTE12 10MHz 16QAM HIGH Ch RB1-0

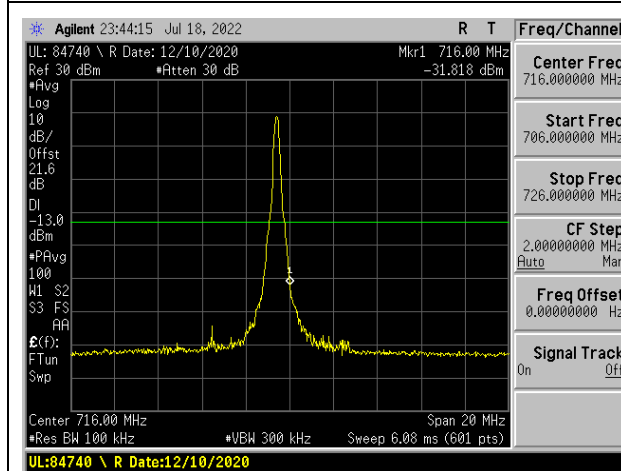

LTE12 10MHz 16QAM HIGH Ch RB1-49

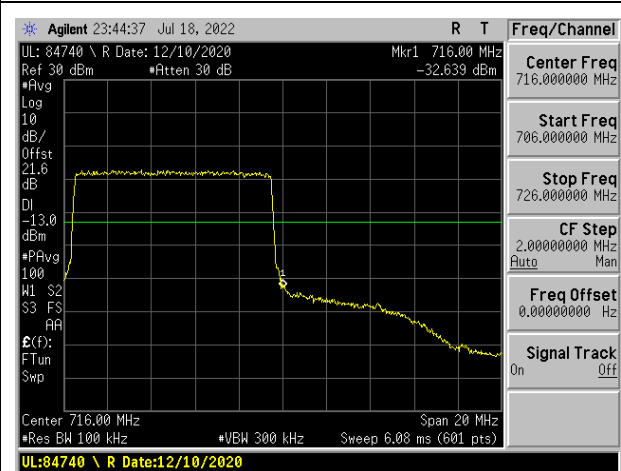

LTE12 10MHz 16QAM HIGH Ch RB50-0

9.2.7. LTE BAND 13

LIMITS

FCC: §27.53

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:


(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;


(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.


(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

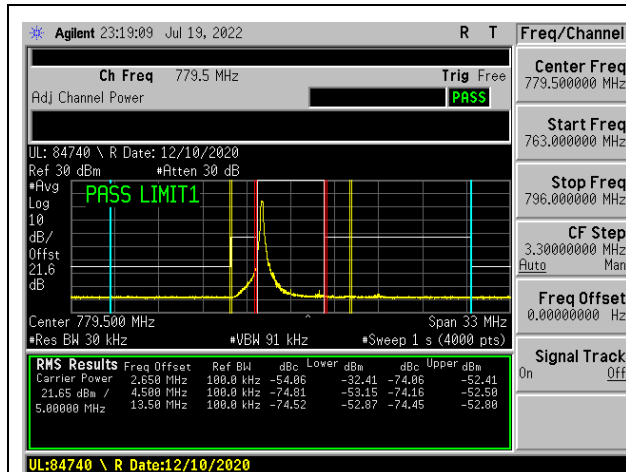


LTE13 5MHz QPSK LOW Ch RB1-0

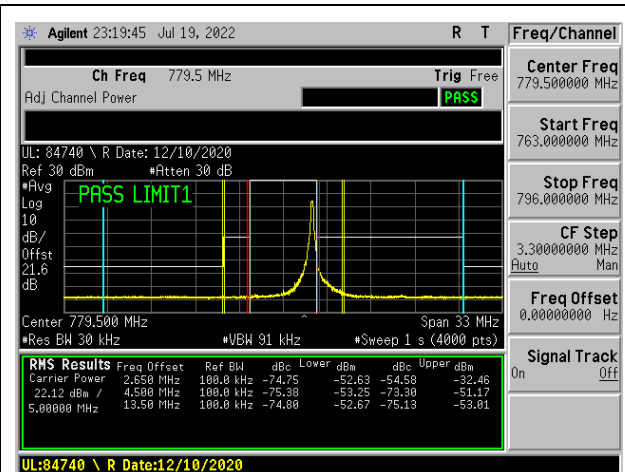


LTE13 5MHz QPSK LOW Ch RB1-24

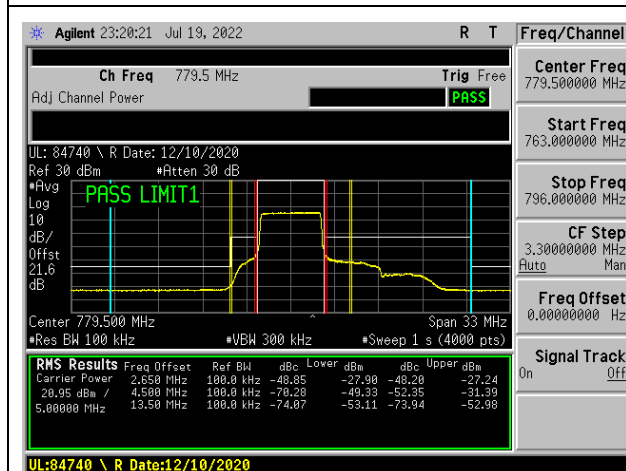


LTE13 5MHz QPSK LOW Ch RB25-0

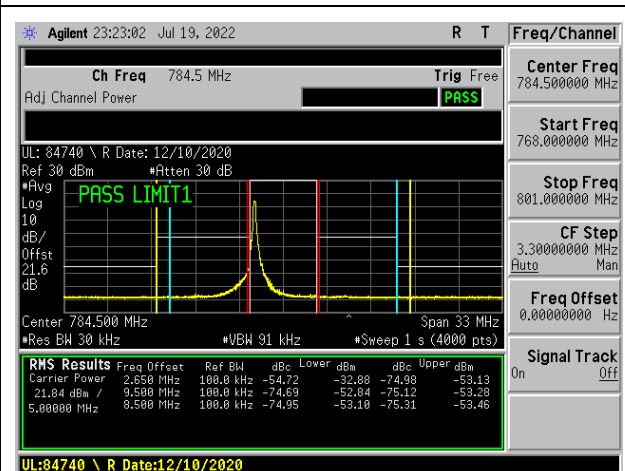

LTE13 5MHz QPSK HIGH Ch RB1-0

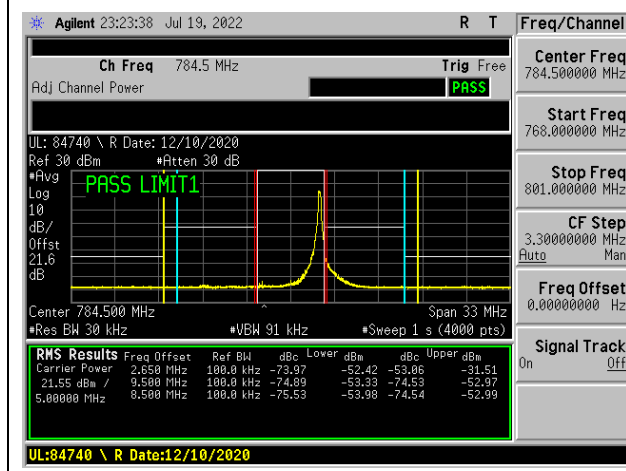

LTE13 5MHz QPSK HIGH Ch RB1-24

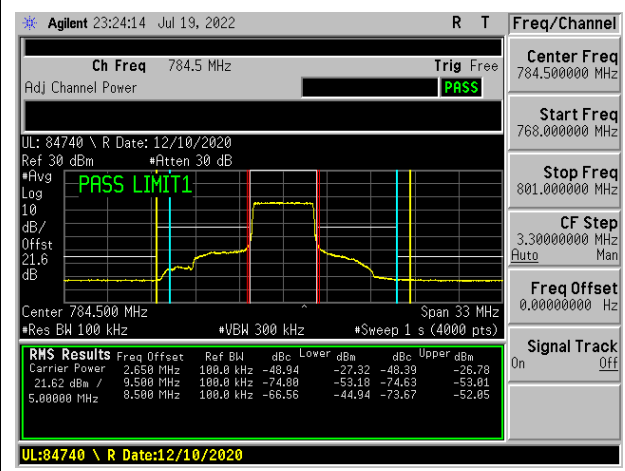

LTE13 5MHz QPSK HIGH Ch RB25-0