



SAR EVALUATION REPORT

IEEE Std 1528-2013

For

GSM/WCDMA/LTE/5G Phone with BT, DTS/UNII a/b/g/n/ac/ax, GPS, WPT, & NFC

FCC ID: PY7-95649X

Report Number: R14777389-S1 v3

Issue Date: 8/10/2023

Prepared for

Sony Corporation

1-7-1 Konan Minato-ku

Tokyo, 108-0075, Japan

Prepared by

UL LLC

12 LABORATORY DR

RTP, NC 27709, U.S.A.

TEL: (919) 549-1400



Revision History

Rev.	Date	Revisions	Revised By
V1	7/28/2023	Initial Issue	--
V2	8/3/2023	Updated §1 to include NFC estimation and Extremity (10g) for Simultaneous TX. Updated §6 and 7 to include NFC exclusion. Updated §12 to include Estimated SAR for NFC and Sum of the SAR for Wi-Fi Normal State and NFC.	Lindsay Ryan
V3	8/10/2023	Updated §6.1 sample notes description.	Lindsay Ryan

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures	7
3.	Facilities and Accreditation	8
4.	SAR Measurement System & Test Equipment	9
4.1.	<i>SAR Measurement System</i>	9
4.2.	<i>SAR Scan Procedures</i>	10
4.3.	<i>Test Equipment</i>	12
5.	Measurement Uncertainty	14
6.	Device Under Test (DUT) Information	15
6.1.	<i>DUT Description</i>	15
6.2.	<i>Wireless Technologies</i>	16
6.3.	<i>General LTE SAR Test and Reporting Considerations</i>	17
6.4.	<i>LTE (TDD) Considerations</i>	19
6.5.	<i>General NR(FR1) SAR Test and Reporting Considerations</i>	20
6.6.	<i>Power Back-off Operation</i>	20
7.	RF Exposure Conditions (Test Configurations)	21
8.	Dielectric Property Measurements & System Check	22
8.1.	<i>Dielectric Property Measurements</i>	22
8.2.	<i>System Check</i>	24
9.	Conducted Output Power Measurements	26
9.1.	<i>GSM</i>	26
9.2.	<i>W-CDMA</i>	29
9.3.	<i>LTE</i>	32
9.4.	<i>5G</i>	45
9.5.	<i>WLAN 2.4GHz & WLAN 5GHz & Bluetooth</i>	48
10.	Measured and Reported (Scaled) SAR Results	49
10.1.	<i>GSM850</i>	51
10.2.	<i>GSM1900</i>	51
10.3.	<i>W-CDMA Band V</i>	51
10.4.	<i>LTE Band 5 (10MHz Bandwidth)</i>	52
10.5.	<i>LTE Band 12 (10MHz Bandwidth)</i>	52
10.6.	<i>LTE Band 13 (10MHz Bandwidth)</i>	52
10.7.	<i>LTE Band 41 (20MHz Bandwidth)</i>	53

10.8. *LTE Band 66 (20MHz Bandwidth)*..... 53

10.9. *NR Band n5 (20MHz Bandwidth)*..... 54

10.10. *NR Band n41 (100MHz Bandwidth)*..... 54

10.11. *NR Band n66 (20MHz Bandwidth)*..... 54

10.12. *WLAN & Bluetooth Spotcheck Verification*..... 55

11. SAR Measurement Variability **56**

12. Simultaneous Transmission Conditions..... **57**

12.1. *Simultaneous transmission SAR test exclusion considerations*..... 57

12.2. *Estimated SAR for Simultaneous Transmission SAR Analysis*..... 58

12.3. *Sum of the SAR for WWAN CELL Main1 & Wi-Fi Normal State & BT*..... 59

12.4. *Sum of the SAR for WWAN CELL Main1 & Wi-Fi Simultaneous 2G_5G State*..... 59

12.5. *Sum of the SAR for WWAN CELL Main2 & Wi-Fi Normal State & BT*..... 59

12.6. *Sum of the SAR for WWAN CELL Main2 & Wi-Fi Simultaneous 2G_5G State*..... 59

12.7. *Sum of the SAR for WWAN DC_66A_n5A & Wi-Fi Normal State & BT*..... 59

12.8. *Sum of the SAR for WWAN DC_66A_n5A & Wi-Fi Simultaneous 2G_5G State*..... 59

12.9. *Sum of the SAR for WWAN DC_66A_n41A & Wi-Fi Normal State & BT*..... 60

12.10. *Sum of the SAR for WWAN DC_66A_n41A & Wi-Fi Simultaneous 2G_5G State*..... 60

12.11. *Sum of the SAR for WWAN DC_13A_n66A & Wi-Fi Normal State & BT*..... 60

12.12. *Sum of the SAR for WWAN DC_13A_n66A & Wi-Fi Simultaneous 2G_5G State*..... 60

12.13. *Sum of the SAR for Wi-Fi Normal State & NFC*..... 60

Appendixes..... **61**

Appendix A: SAR Setup Photos..... 61

Appendix B: SAR System Check Plots..... 61

Appendix C: SAR Highest Test Plots..... 61

Appendix D: SAR Tissue Ingredients..... 61

Appendix E: SAR Probe Certificates..... 61

Appendix F: SAR Dipole Certificates..... 61

1. Attestation of Test Results



Applicant Name		Sony Corporation				
FCC ID		PY7-95649X				
Applicable Standards		Published RF exposure KDB procedures IEEE Std 1528-2013				
Exposure Category		SAR Limits (W/Kg)				
		Peak spatial-average (1g of tissue)			Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure		1.6			4	
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)				
		PCE	DTS	NII	DSS	NFC
Head		0.407	0.408	0.276	0.305	N/A
Body-worn*		0.308	0.169	0.068	0.088	N/A
Hotspot/BT Tethering		0.365	0.169	0.075	0.088	N/A
Extremity (10g)		N/A	N/A	0.476	N/A	0.501
Simultaneous TX	Head/Body- worn/Hotspot/ BT Tethering (1g)	1.147	1.147	1.147	1.118	N/A
	Extremity (10g)	N/A	N/A	1.349	N/A	1.349
Date Tested		6/13/2023 to 7/20/2023				
Test Results		Pass				
<p>*Note: The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.</p>						
<p>Note: Some WWAN conducted output power is referenced from FCC ID: PY7-76732V (UL report #14777340-S1) and is leveraged to cover variant FCC ID: PY7-95649X. WLAN and Bluetooth SAR data is referenced from FCC ID: PY7-76732V (UL report #14777340-S1) and is leveraged to cover variant FCC ID: PY7-95649X. All circuitry and features for WWAN, WLAN, and Bluetooth operations are identical between the two variants. The data reuse test plan was approved via manufacturer, with spot check measurements on worst case conditions. Worst case SAR results for WLAN and Bluetooth from referenced variant FCC ID: PY7-76732V are listed above. WLAN and Bluetooth SAR results from FCC ID: PY7-76732V have been used in this report for Simultaneous Transmission analysis.</p>						
(continued next page)						

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL LLC is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government.

<p>Approved & Released By:</p> 	<p>Prepared By:</p> 
<p>Richard Jankovics Operations Leader UL LLC</p>	<p>Lindsay Ryan Engineer UL LLC</p>

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE Std 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- [TCB Workshop](#) October 2014; RF Exposure Procedures (Other LTE Considerations)
- [TCB Workshop](#) April 2015; RF Exposure Procedures (Overlapping LTE Bands)
- [TCB Workshop](#) October 2015; RF Exposure Procedures (KDB 941225 D05A)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB Workshop](#) October 2016; RF Exposure Procedures (DUT Holder Perturbations)
- [TCB Workshop](#) May 2017; RF Exposure Procedures (Broadband Liquid Above 3 GHz)
- [TCB Workshop](#) April 2019; RF Exposure Procedures (Tissue Simulating Liquids (TSL))
- [TCB Workshop](#) April 2019; RF Exposure Procedures (802.11ax SAR Testing)

3. Facilities and Accreditation

UL LLC is accredited by A2LA, cert. # 0751.06 for all testing performed within the scope of this report. Testing was performed at the locations noted below.

The test sites and measurement facilities used to collect data are located at 2800 Perimeter Park Dr, Morrisville, NC, USA.


- SAR Lab 1A
- SAR Lab 2A
- SAR Lab 2B

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY system used for performing compliance tests consists of the following items:

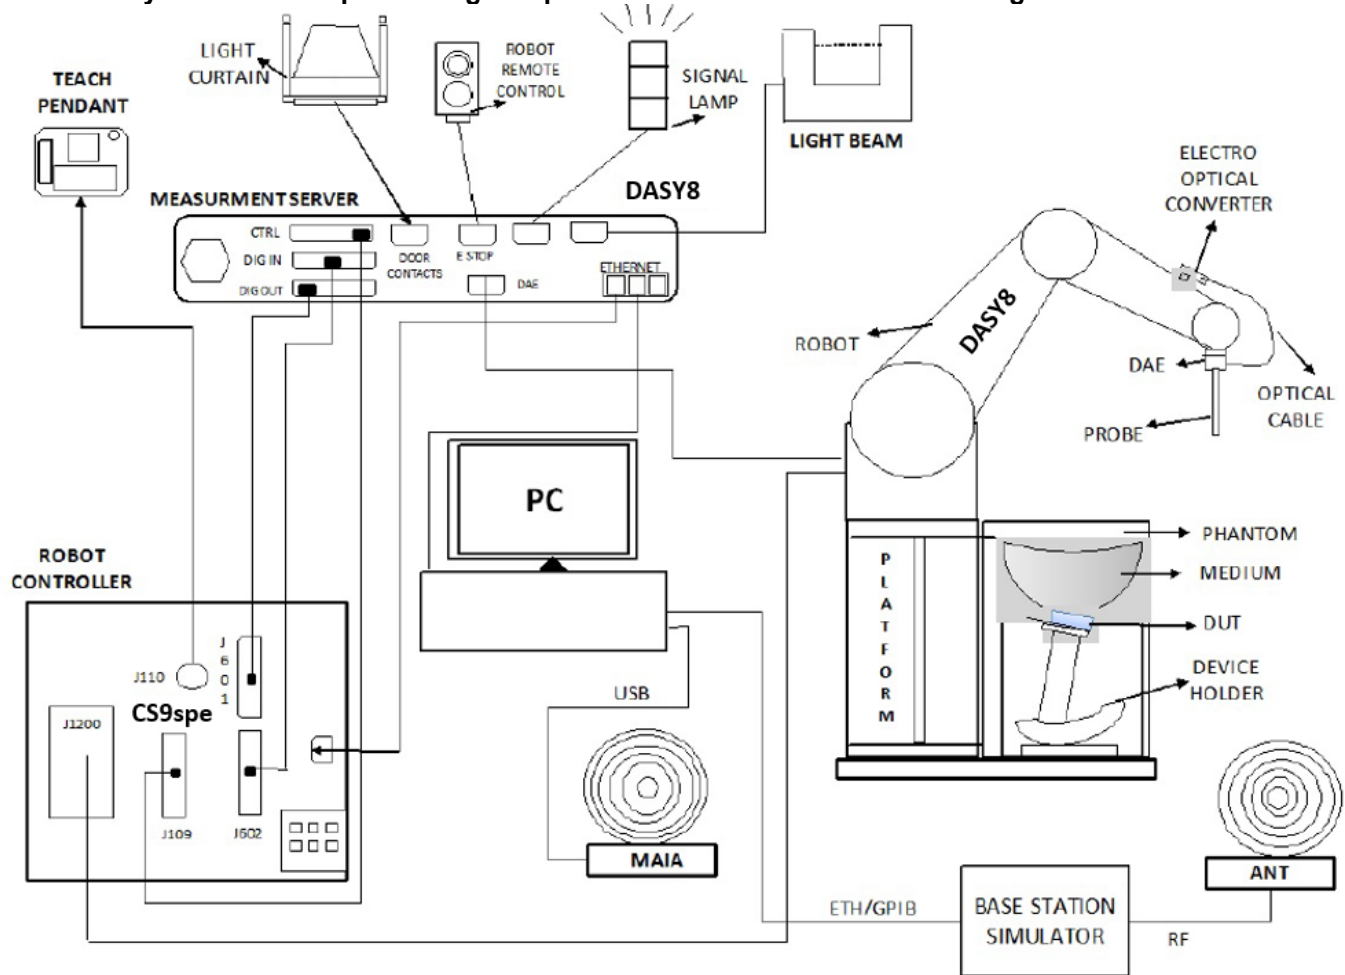

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

¹ DASY8 software used: DASY16.2.2.1588 and older generations.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Keysight	E5063A	MY54100681	9/30/2023
Dielectric Probe	SPEAG	DAKS-3.5	1051	10/17/2023
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 DA	10/17/2023
Thermometer	Fisher Scientific	15-078-181	1817705017	3/30/2024

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Keysight	N5181A	MY50140788	1/31/2024
Power Meter	Keysight	N1912A	MY55116004	9/02/2024
Power Sensor	Keysight	N1921A	MY55090047	2/02/2024
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112236	6/02/2024
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112237	6/02/2024
Amplifier	MITEQ	AMF-4D-00400600-50-30P	N/A	N/A
Directional coupler	Mini-Circuits	ZUDC10-183+	1438	N/A
DC Power Supply	Miteq	PS 15V1	1990186	N/A
RF Power Source	Speag	PowerSource1	4278	6/13/2024

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe	SPEAG	EX3DV4	7709	12/12/2023
E-Field Probe	SPEAG	EX3DV4	7710	2/3/2024
E-Field Probe	SPEAG	EX3DV4	7711	3/29/2024
Data Acquisition Electronics	SPEAG	DAE4	1714	11/23/2023
Data Acquisition Electronics	SPEAG	DAE4	1715	1/23/2024
Data Acquisition Electronics	SPEAG	DAE4	1716	3/16/2024
System Validation Dipole	SPEAG	D750V3	1139	10/12/2023
System Validation Dipole	SPEAG	D900V2	1d180	10/12/2023
System Validation Dipole	SPEAG	D1750V2	1136	10/17/2023
System Validation Dipole	SPEAG	D1900V2	5d202	10/12/2023
System Validation Dipole	SPEAG	D2450V2	963	10/18/2023
System Validation Dipole	SPEAG	D2600V2	1104	10/21/2023
System Validation Dipole	SPEAG	D5GHzV2	1213	10/11/2023
Environmental Indicator	Control Company	06-662-4	200037610	2/24/2024
Environmental Indicator	Control Company	06-662-4	200037635	2/24/2024

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112236	6/2/2024
3-Path Diode Power Sensor	Rohde & Schwarz	NRP8S	112237	6/2/2024
RF Power Meter ¹	Keysight	N1911a	MY55116001	7/07/2023
RF Power Meter	Keysight	N1911a	MY55116002	9/10/2023
RF Power Meter	Keysight	N1912a	MY55116004	9/2/2023
RF Power Sensor	Keysight	N1921a	MY55090025	9/27/2023
Base Station Simulator	R & S	CMW 500	170733	12/14/2023
Base Station Simulator	R & S	CMW 500	170732	12/8/2023
Base Station Simulator	R & S	CMW 500	170193	1/6/2024
Base Station Simulator	R & S	CMW 500	170194	6/6/2024
Base Station Simulator	Anritsu	MT8821C	6262116751	6/5/2024
Base Station Simulator	Anritsu	MT8000A	6272354129	6/9/2024

Note(s):

1. Equipment not used for calibrated measurements past calibration due date.

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A																				
Back Cover	The Back Cover is not removable																				
Battery Options	The rechargeable battery is not user accessible.																				
Accessory	Headset and wireless power charger																				
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.2 GHz and 5.8 GHz)																				
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other Per Manufacturer, the DUT support only as a group client and not support as a group owner.																				
Bluetooth Tethering (Hotspot)	BT Tethering mode permits the device to share its cellular data connection with other devices. <input checked="" type="checkbox"/> BT Tethering (Bluetooth 2.4 GHz)																				
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>QV7700E5G9</td> <td>ENDC SAR Conducted</td> </tr> <tr> <td>QV7700DQHQ</td> <td>FCC SAR 4G/5G #1</td> </tr> <tr> <td>QV7700DPHQ</td> <td>FCC SAR 2G/3G #1</td> </tr> <tr> <td>QV7700DHHQ</td> <td>FCC SAR Cellular Conducted Head #1</td> </tr> <tr> <td>QV77005ZHQ</td> <td>FCC Cellular Conducted #1</td> </tr> <tr> <td>QV77005VHQ</td> <td>FCC Cellular Conducted #2</td> </tr> <tr> <td>QV77001UHQ</td> <td>FCC SAR 2G/3G #1</td> </tr> <tr> <td>QV7700G0HQ</td> <td>FCC SAR 4G/5G #1</td> </tr> <tr> <td>QV7700HEHQ</td> <td>FCC WLAN BT Spotcheck</td> </tr> </tbody> </table>	S/N	Notes	QV7700E5G9	ENDC SAR Conducted	QV7700DQHQ	FCC SAR 4G/5G #1	QV7700DPHQ	FCC SAR 2G/3G #1	QV7700DHHQ	FCC SAR Cellular Conducted Head #1	QV77005ZHQ	FCC Cellular Conducted #1	QV77005VHQ	FCC Cellular Conducted #2	QV77001UHQ	FCC SAR 2G/3G #1	QV7700G0HQ	FCC SAR 4G/5G #1	QV7700HEHQ	FCC WLAN BT Spotcheck
S/N	Notes																				
QV7700E5G9	ENDC SAR Conducted																				
QV7700DQHQ	FCC SAR 4G/5G #1																				
QV7700DPHQ	FCC SAR 2G/3G #1																				
QV7700DHHQ	FCC SAR Cellular Conducted Head #1																				
QV77005ZHQ	FCC Cellular Conducted #1																				
QV77005VHQ	FCC Cellular Conducted #2																				
QV77001UHQ	FCC SAR 2G/3G #1																				
QV7700G0HQ	FCC SAR 4G/5G #1																				
QV7700HEHQ	FCC WLAN BT Spotcheck																				
Hardware Version	A																				
Software Version	2G-4G Conducted: 2.79 WLAN/BT Conducted: 2.79 SAR Measurements: 2.79																				

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	GSM Class : B Multi-Slot Class: Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
		Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)		100%
LTE	FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41 FDD Band 66	QPSK 16QAM 64QAM Rel. 15 Does not support Carrier Aggregation (CA)		100% (FDD) 63.3% (TDD) ^{Power Class 3}
5G NR (FR1)	FDD band n5 TDD band n41 FDD band n66	DFT-S-OFDM: $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM		100% (FDD) 63.3% (TDD)
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20) 802.11ax (HE20)		99.9% ^{(802.11b) 1} 99.1% ^{(802.11g/n 20MHz BW) 1}
		802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80) 802.11ac (VHT160) 802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)		99.6% ^{(802.11n/ac 40MHz BW) 1} 99.0% ^{(802.11ac 80MHz BW) 1} 99.7% ^{(802.11ac 160MHz BW) 1}
	5 GHz	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Does this device support Band gap channel(s)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		
Bluetooth	2.4 GHz	BR, EDR, LE		76.8% ¹
NFC	13.56 MHz	Type A/B/F /V		N/A ²

Notes:

- Duty cycle is referenced from the Section 9.
- Measured Duty Cycle is not required due to SAR test exemption.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz ¹	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz (BW = 17 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			23230/ 782	23230/ 782		
	High				23255/ 784.5		
	Band 17	Frequency range: 704 - 716 MHz (BW = 12 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ¹	5 MHz	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			
Band 41 ²	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	39750 / 2506.0						
Mid- Low	40185 / 2549.5						
Mid	40620 / 2593.0						
Mid-High	41055 / 2636.5						
High	41490 / 2680.0						
Band 66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7	
Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	
High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3	

LTE transmitter and antenna implementation	Refer to Appendix A.																																																														
Maximum power reduction (MPR)	<p style="text-align: center;">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
Power reduction	No																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
- LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle.

6.5. General NR(FR1) SAR Test and Reporting Considerations

Item	Description														
	n5	Frequency range: 824 - 849 MHz (BW = 25 MHz)													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
	Low										166800 /834	166300 /831.5	165800 /829	165300 /826.5	
	Mid										167300 /836.5	167300 /836.5	167300 /836.5	167300 /836.5	
	High										167800 /839	168300 /841.5	168800 /844	169300 /846.5	
	n41	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
	Low	509200 /2546	508200 /2541	507200 /2536	506200 /2531	505200 /2526	504200 /2521	503200 /2516	502200 /2511		501200 /2506	500700 /2503.5	500200 /2501		
	Mid- Low	513900 /2569.5	513400 /2567	512900 /2564.5	512400 /2562	511900 /2559.5	511400 /2557	510900 /2554.5	510400 /2552		509900 /2549.5	509600 /2548.3	509400 /2547		
	Mid	518600 /2593	518600 /2593	518600 /2593	518600 /2593	518600 /2593	518600 /2593	518600 /2593	518600 /2593		518600 /2593	518600 /2593	518600 /2593		
	Mid- High	523300 /2616.5	523800 /2619	524300 /2621.5	524800 /2624	525300 /2626.5	525800 /2629	526300 /2631.5	526800 /2634		527300 /2636.5	527560 /2637.8	527800 /2639		
	High	528000 /2640	529000 /2645	530000 /2650	531000 /2655	532000 /2660	533000 /2665	534000 /2670	535000 /2675		536000 /2680	536500 /2682.5	537000 /2685		
	n66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)													
		Channel Bandwidth (MHz)													
		100	90	80	70	60	50	40	30	25	20	15	10	5	
	Low							346000 /1730	345000 /1725	344500 /1722.5	344000 /1720	343500 /1717.5	343000 /1715	342500 /1712.5	
	Mid							349000 /1745	349000 /1745	349000 /1745	349000 /1745	349000 /1745	349000 /1745	349000 /1745	
	High							352000 /1760	353000 /1765	353500 /1767.5	354000 /1770	354500 /1772.5	355000 /1775	355500 /1777.5	
SCS	15 kHz (n5, n66) 30 kHz (n41)														
NR(FR1) transmitter and antenna implementation	Refer to Appendix A.														
A-MPR(Additional MPR) disabled for SAT testing?	Yes														
EN-DC Carrier Aggregation Possible Combinations	13A_n66, 66A_n5, 66A_n41														

6.6. Power Back-off Operation

The DUT supports power reduction when Simultaneous WLAN transmission is active (i.e. WLAN Chain 0 and Chain 1 transmitting simultaneously).

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Phablet SAR (Extremity 10g)
WLAN Simultaneous Tx	Wi-Fi 2.4GHz Wi-Fi 5GHz	✓	✓	✓	✓

Note(s):
Tune-Up Limits for WLAN (Simultaneous 2G_5G state) is Reduced Average Power. Please refer to §9 for all conducted power measurements.

Phablet SAR (Extremity 10g):

When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Antenna	Band	Head	Rear	Front	Edge 1	Edge 2	Edge 3	Edge 4	Extremity (0 mm)
					(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)	
CELL Main1	GSM 850 W-CDMA BV LTE B5/12/13 n5	Yes	Yes	Yes	No	No	Yes	Yes	No
CELL Main2	GSM 1900 LTE B41/66 n41/66	Yes	Yes	Yes	No	Yes	Yes	No	No
CELL Sub	LTE B66	Yes	Yes	Yes	Yes	Yes	No	No	No
Wi-Fi Main Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	Yes	No	No	Yes	Yes
Wi-Fi Sub Antenna	Wi-Fi 2.4GHz Wi-Fi 5GHz Bluetooth	Yes	Yes	Yes	No	No	Yes	Yes	Yes

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- The Body-worn minimum separation distance is 10 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
- Per KDB 447498 D01 v06, the NFC extremity SAR test exclusion threshold for below 100 MHz is 593 mW. Per the manufacturer, the maximum transmit power for the NFC radio is 403 mW, and therefore meet SAR test exclusion.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1A	6/13/2002	750	Head	750	42.9	42.0	2.26	0.91	0.89	1.83
				660	43.2	42.4	1.74	0.88	0.89	-0.81
				850	42.6	41.5	2.75	0.95	0.92	3.32
1A	6/19/2023	900	Head	900	41.1	41.5	-0.94	0.97	0.97	-0.41
				820	41.3	41.6	-0.73	0.94	0.90	4.30
				915	41.1	41.5	-1.06	0.97	0.98	-0.57
1A	6/19/2023	1750	Head	1750	39.5	40.1	-1.48	1.39	1.37	1.39
				1710	39.5	40.2	-1.53	1.36	1.35	1.16
				1755	39.5	40.1	-1.46	1.39	1.37	1.18
1A	7/6/2023	750	Head	750	41.6	42.0	-0.96	0.92	0.89	2.51
				660	41.8	42.4	-1.37	0.89	0.89	-0.05
				845	41.3	41.5	-0.51	0.95	0.91	4.20
2A	6/23/2023	750	Head	750	40.2	42.0	-4.25	0.89	0.89	0.02
				660	40.4	42.4	-4.67	0.86	0.89	-2.51
				850	39.9	41.5	-3.86	0.93	0.92	1.54
2A	6/23/2023	1750	Head	1750	38.1	40.1	-4.85	1.34	1.37	-1.97
				1710	38.2	40.1	-4.92	1.32	1.35	-2.11
				1780	38.1	40.0	-4.92	1.36	1.39	-2.16
2A	6/27/2023	1750	Head	1750	38.7	40.1	-3.38	1.33	1.37	-2.55
				1710	38.7	40.2	-3.63	1.31	1.35	-2.48
				1780	38.7	40.0	-3.44	1.35	1.39	-2.52
2A	7/3/2023	2600	Head	2600	39.3	39.0	0.64	1.97	1.96	0.35
				2495	39.4	39.1	0.68	1.88	1.85	1.80
				2690	39.1	38.9	0.57	2.05	2.06	-0.60
2A	7/7/2023	1900	Head	1900	38.9	40.0	-2.7	1.43	1.40	2.36
				1850	39.0	40.0	-2.43	1.40	1.40	0.21
				1920	38.9	40.0	-2.73	1.45	1.40	3.21
2A	7/10/2023	2450	Head	2450	38.1	39.2	-2.91	1.81	1.80	0.44
				2400	38.1	39.3	-2.94	1.77	1.75	0.76
				2480	38.0	39.2	-2.89	1.83	1.83	-0.24
2B	7/10/2023	5600	Head	5600	34.1	35.5	-4.12	4.90	5.06	-3.17
				5490	34.2	35.7	-4.04	4.79	4.95	-3.11
				5725	33.9	35.4	-4.27	5.03	5.19	-3.13
2B	7/20/2023	5750	Head	5750	34.8	35.4	-1.70	5.13	5.21	-1.57
				5700	34.8	35.4	-1.67	5.07	5.16	-1.73
				5850	34.6	35.3	-2.01	5.22	5.32	-1.80

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was recorded and the results were normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type_Serial #	Dipole Cal. Due Data	Dipole Power (dBm)	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
						Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
1A	6/13/2023	Head	D750V3 SN: 1139	10/12/2023	17.00	0.419	8.36	8.51	-1.76	0.275	5.49	5.58	-1.67	1
1A	6/19/2023	Head	D900V2 SN: 1d180	10/12/2023	17.00	0.539	10.75	10.90	-1.34	0.348	6.94	6.99	-0.67	2
1A	6/19/2023	Head	D1750V2 SN: 1136	10/17/2023	17.00	1.800	35.91	36.10	-0.51	0.955	19.05	19.10	-0.24	3
1A	7/6/2023	Head	D750V3 SN: 1139	10/12/2023	17.00	0.427	8.52	8.51	0.11	0.280	5.59	5.58	0.12	
2A	6/23/2023	Head	D750V3 SN: 1139	10/12/2023	17.00	0.424	8.46	8.51	-0.59	0.280	5.59	5.58	0.12	4
2A	6/23/2023	Head	D1750V2 SN: 1136	10/17/2023	17.00	1.770	35.32	36.10	-2.17	0.950	18.95	19.10	-0.76	
2A	6/27/2023	Head	D1750V2 SN: 1136	10/17/2023	17.00	1.750	34.92	36.10	-3.28	0.935	18.66	19.10	-2.33	5
2A	7/3/2023	Head	D2600V2 SN: 1104	10/21/2023	17.00	2.610	52.48	56.70	-7.45	1.180	23.74	25.30	-6.15	6
2A	7/7/2023	Head	D1900V2 SN: 5d202	10/12/2023	17.00	2.050	40.90	39.20	4.34	1.070	21.35	20.40	4.65	7
2A	7/10/2023	Head	D2450V2 SN: 963	10/18/2023	17.00	2.580	51.48	52.40	-1.76	1.210	24.14	24.50	-1.46	8
2B	7/10/2023	Head	D5GHzV2 SN: 1213 (5.60 GHz)	10/11/2023	17.00	4.040	80.61	82.40	-2.17	1.100	21.95	23.50	-6.60	9
2B	7/20/2023	Head	D5GHzV2 SN: 1213 (5.75 GHz)	10/11/2023	17.00	3.690	73.63	78.80	-6.57	1.050	20.95	22.40	-6.47	10

9. Conducted Output Power Measurements

Tune-Up Power Limits provided by the manufacturer are used to scale measured SAR values.

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GSMK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

Maximum Output Power (Tune-up Limit) for GSM

SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

RF Air interface	Mode	GSM Burst Power Tune-up Limit (dBm)		GSM DTM CS Burst Power Tune-Up Limit (dBm)		GSM DTM PS Burst Power Tune-Up Limit (dBm)	
		CELL Main1	CELL Main2	CELL Main1	CELL Main2	CELL Main1	CELL Main2
		Normal	Normal	Normal	Normal	Normal	Normal
GSM850	Voice/GPRS (1 slot)	32.9		32.9			
	GPRS 2 slots	29.9		29.9		29.9	
	GPRS 3 slots	28.1		28.1		28.1	
	GPRS 4 slots	26.9					
	EGPRS 1 slot	28.0		32.9			
	EGPRS 2 slot	25.0		29.9		25.0	
	EGPRS 3 slot	23.2		28.1		23.2	
GSM1900	Voice/GPRS (1 slot)		28.0		28.0		
	GPRS 2 slots		25.0		25.0		25.0
	GPRS 3 slots		23.2		23.2		23.2
	GPRS 4 slots		22.0				
	EGPRS 1 slot		27.0		28.0		
	EGPRS 2 slot		24.0		25.0		24.0
	EGPRS 3 slot		22.2		23.2		22.2
EGPRS 4 slots		21.0					

GSM850 Measured Results (Leveraged from FCC ID: PY7-76732V)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	31.6	22.6	32.9	23.9
			190	836.6	31.8	22.8		
			251	848.8	31.9	22.8		
		2	128	824.2	28.5	22.5	29.9	23.9
			190	836.6	28.6	22.5		
			251	848.8	28.6	22.6		
		3	128	824.2	26.1	21.9	28.1	23.8
			190	836.6	26.2	21.9		
			251	848.8	27.0	22.7		
		4	128	824.2	25.6	22.6	26.9	23.9
			190	836.6	25.7	22.7		
			251	848.8	25.7	22.6		
EDGE (8PSK)	MCS5	1	128	824.2	26.6	17.6	28.0	19.0
			190	836.6	26.8	17.8		
			251	848.8	26.8	17.7		
		2	128	824.2	23.8	17.7	25.0	19.0
			190	836.6	23.8	17.8		
			251	848.8	23.9	17.9		
		3	128	824.2	21.9	17.7	23.2	18.9
			190	836.6	21.9	17.7		
			251	848.8	22.0	17.7		
		4	128	824.2	20.8	17.8	22.0	19.0
			190	836.6	20.7	17.7		
			251	848.8	20.7	17.7		

GSM1900 Measured Results (Leveraged from FCC ID: PY7-76732V)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.1	18.1	28.0	19.0
			661	1880.0	27.1	18.1		
			810	1909.8	27.1	18.1		
		2	512	1850.2	24.1	18.1	25.0	19.0
			661	1880.0	23.8	17.8		
			810	1909.8	23.8	17.8		
		3	512	1850.2	22.0	17.7	23.2	18.9
			661	1880.0	21.7	17.5		
			810	1909.8	21.7	17.4		
		4	512	1850.2	20.8	17.8	22.0	19.0
			661	1880.0	20.8	17.8		
			810	1909.8	21.1	18.0		
EDGE (8PSK)	MCS5	1	512	1850.2	25.7	16.7	27.0	18.0
			661	1880.0	26.1	17.1		
			810	1909.8	26.0	16.9		
		2	512	1850.2	22.7	16.7	24.0	18.0
			661	1880.0	22.9	16.9		
			810	1909.8	22.9	16.9		
		3	512	1850.2	21.0	16.7	22.2	17.9
			661	1880.0	21.3	17.0		
			810	1909.8	21.3	17.0		
		4	512	1850.2	19.8	16.7	21.0	18.0
			661	1880.0	19.7	16.7		
			810	1909.8	19.8	16.8		

GSM850 DTM Measured Results (Leveraged from FCC ID: PY7-76732V)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	128	824.2	31.4		22.3		32.9		23.9	
			190	836.6	31.5		22.5					
			251	848.8	31.6		22.6					
		2	128	824.2	28.5	28.6	22.5	22.6	29.9	29.9	23.9	23.9
			190	836.6	28.6	29.2	22.6	23.2				
			251	848.8	28.5	28.6	22.5	22.6				
		3	128	824.2	26.5	26.5	22.2	22.3	28.1	28.1	23.8	23.8
			190	836.6	26.8	26.8	22.6	22.5				
			251	848.8	26.7	26.8	22.4	22.6				
GSM (Voice) + EDGE (8PSK)	MCS5	1	128	824.2	31.4		22.3		32.9		23.9	
			190	836.6	31.5		22.5					
			251	848.8	31.6		22.6					
		2	128	824.2	28.5	23.7	22.5	17.7	29.9	25.0	23.9	19.0
			190	836.6	28.6	23.7	22.6	17.7				
			251	848.8	28.5	23.7	22.5	17.7				
		3	128	824.2	26.5	22.0	22.2	17.7	28.1	23.2	23.8	18.9
			190	836.6	26.8	21.8	22.6	17.6				
			251	848.8	26.7	21.8	22.4	17.6				

GSM1900 DTM Measured Results (Leveraged from FCC ID: PY7-76732V)

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Normal Average Power (dBm)							
					Measured				Tune-up Limit			
					CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr	CS Burst Pwr	PS Burst Pwr	CS Frame Pwr	PS Frame Pwr
GSM (Voice) + GPRS/EDGE (GMSK)	CS1	1	512	1850.2	27.0		18.0		28.0		19.0	
			661	1880.0	27.1		18.1					
			810	1909.8	27.2		18.1					
		2	512	1850.2	23.4	24.2	17.4	18.2	25.0	25.0	19.0	19.0
			661	1880.0	23.5	23.9	17.4	17.9				
			810	1909.8	23.5	23.9	17.5	17.8				
		3	512	1850.2	21.4	22.0	17.1	17.7	23.2	23.2	18.9	18.9
			661	1880.0	21.3	21.8	17.1	17.6				
			810	1909.8	21.4	21.7	17.1	17.5				
GSM (Voice) + EDGE (8PSK)	MCS5	1	512	1850.2	27.0		18.0		28.0		19.0	
			661	1880.0	27.1		18.1					
			810	1909.8	27.2		18.1					
		2	512	1850.2	23.4	22.8	17.4	16.8	25.0	24.0	19.0	18.0
			661	1880.0	23.5	23.0	17.4	17.0				
			810	1909.8	23.5	23.0	17.5	17.0				
		3	512	1850.2	21.4	21.0	17.1	16.8	23.2	22.2	18.9	17.9
			661	1880.0	21.3	21.1	17.1	16.9				
			810	1909.8	21.4	21.4	17.1	17.1				

9.2. W-CDMA

Per KDB 941225 D01 3G SAR Procedures for W-CDMA:

Maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's"

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1. A summary of these settings is illustrated below:

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to procedures in table C.10.1.4 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to procedures in table C.11.1.3 of 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPCCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_o/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPCCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPCCH power scaling at max power which could results in slightly smaller MPR values.

DC-HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests for DC-HSDPA were completed according to procedures in table C08.1.12 of 3GPP TS 34.121-1. A summary of subtest settings is illustrated below:

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+ Setup Procedures used to establish the test signals

The following 1 Sub-test was completed according to procedures in table C.11.1.4 of 3GPP TS34.121. A summary of these settings is illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CGI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

Maximum Output Power (Tune-up Limit) for W-CDMA

SAR measurement is not required for the HSDPA, HSUPA. When primary mode and the adjusted SAR is ≤ 1.2 W/kg and secondary mode is $\leq 1/4$ dB higher than the primary mode

RF Air interface	Mode	Tune-up PowerLimit (dBm)
		CELL Main1
		Normal
W-CDMA Band 5	R99	22.7
	HSDPA	22.0
	HSUPA	22.0
	DC-HSDPA	22.0

W-CDMA Band V Measured Results (Leveraged from FCC ID: PY7-76732V)

Mode		UL Ch No.	Freq. (MHz)	Normal Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.9	N/A	22.7
		4183	836.6	21.9		
		4233	846.6	21.8		
HSDPA	Subtest 1	4132	826.4	20.9	0	22.0
		4183	836.6	20.9		
		4233	846.6	20.8		
	Subtest 2	4132	826.4	20.9	0	22.0
		4183	836.6	20.9		
		4233	846.6	20.8		
	Subtest 3	4132	826.4	20.4	0.5	21.5
		4183	836.6	20.4		
		4233	846.6	20.3		
	Subtest 4	4132	826.4	20.4	0.5	21.5
		4183	836.6	20.4		
		4233	846.6	20.3		
HSUPA	Subtest 1	4132	826.4	21.0	0	22.0
		4183	836.6	21.0		
		4233	846.6	20.9		
	Subtest 2	4132	826.4	19.0	2	20.0
		4183	836.6	18.9		
		4233	846.6	18.9		
	Subtest 3	4132	826.4	19.9	1	21.0
		4183	836.6	19.9		
		4233	846.6	19.9		
	Subtest 4	4132	826.4	19.0	2	20.0
		4183	836.6	19.0		
		4233	846.6	18.9		
	Subtest 5	4132	826.4	21.0	0	22.0
		4183	836.6	21.0		
		4233	846.6	20.9		
DC-HSDPA	Subtest 1	4132	826.4	20.9	0	22.0
		4183	836.6	20.9		
		4233	846.6	20.8		
	Subtest 2	4132	826.4	20.9	0	22.0
		4183	836.6	20.9		
		4233	846.6	20.8		
	Subtest 3	4132	826.4	20.4	0.5	21.5
		4183	836.6	20.4		
		4233	846.6	20.3		
	Subtest 4	4132	826.4	20.4	0.5	21.5
		4183	836.6	20.4		
		4233	846.6	20.3		

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:

- a) The maximum output power, including tolerance, for the smaller band must be \leq the larger band to qualify for the SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.
 - LTE Band 4 (1710-1755 MHz) is covered by LTE Band 66 (1710-1780 MHz)
 - LTE Band 17 (704-716 MHz) is covered by LTE Band 12 (699-716 MHz)

For some LTE Bands, certain channel bandwidths do not support at least three non-overlapping channels. When a device supports overlapping channel assignments in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices. Please refer to section 6.3. for a detailed list of LTE test channels

- LTE Band 5 (824-849 MHz)
- LTE Band 12 (699-716 MHz)

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for the 16QAM and 64QAM. When the highest maximum output power for 16QAM and 64QAM is $\leq \frac{1}{2}$ dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.

RF Air interface	Mode	Tune-up PowerLimit (dBm)		
		CELL Main1	CELL Main2	CELL Sub
		Normal	Normal	Normal
LTE Band 4	QPSK		19.0	
LTE Band 5	QPSK	22.0		
LTE Band 12	QPSK	22.0		
LTE Band 13	QPSK	22.0		
LTE Band 17	QPSK	22.0		
LTE Band 41	QPSK		20.0	
LTE Band 66	QPSK		19.0	17.0

LTE Band 5 CELL Main1 Measured Results (Leveraged from FCC ID: PY7-76732V)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20450	20525	20600	MPR	Tune-up Limit
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0	20.8	20.8	20.9	0	22
		1	25	20.8	20.9	20.9	0	22
		1	49	20.8	20.9	20.8	0	22
		25	0	20.7	20.9	20.8	0	22
		25	12	20.8	20.9	20.8	0	22
		25	25	20.8	20.9	20.9	0	22
		50	0	20.8	20.8	20.8	0	22
	16QAM	1	0	21.0	21.0	21.1	0	22
		1	25	20.9	21.1	21.0	0	22
		1	49	21.0	21.1	21.0	0	22
		25	0	20.8	20.9	20.9	0	22
		25	12	20.9	20.9	20.9	0	22
		25	25	20.8	20.9	20.9	0	22
		50	0	20.8	20.9	20.9	0	22
	64QAM	1	0	21.1	21.1	21.2	0	22
		1	25	21.1	21.2	21.2	0	22
		1	49	21.2	21.1	21.1	0	22
		25	0	20.4	20.5	20.6	0	22
		25	12	20.5	20.5	20.6	0	22
		25	25	20.4	20.6	20.6	0	22
		50	0	20.4	20.5	20.6	0	22
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	20.7	20.8	20.8	0	22
		1	12	20.8	21.0	21.0	0	22
		1	24	20.7	20.9	20.8	0	22
		12	0	20.8	20.8	20.8	0	22
		12	7	20.8	20.9	20.8	0	22
		12	13	20.8	20.9	20.9	0	22
		25	0	20.8	20.9	20.8	0	22
	16QAM	1	0	20.9	21.0	21.0	0	22
		1	12	21.0	21.2	21.2	0	22
		1	24	20.9	21.1	21.1	0	22
		12	0	20.8	20.9	20.7	0	22
		12	7	20.8	21.0	20.8	0	22
		12	13	20.8	21.0	20.8	0	22
		25	0	20.8	20.9	20.8	0	22
	64QAM	1	0	20.9	21.2	21.1	0	22
		1	12	21.0	21.2	21.2	0	22
		1	24	20.9	21.2	21.2	0	22
		12	0	20.4	20.5	20.5	0	22
		12	7	20.5	20.5	20.5	0	22
		12	13	20.4	20.6	20.6	0	22
		25	0	20.4	20.5	20.4	0	22

LTE Band 5 CELL Main1 Measured Results (Leveraged from FCC ID: PY7-76732V) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	20.7	20.9	20.8	0	22
		1	8	20.8	21.0	20.9	0	22
		1	14	20.7	20.9	20.8	0	22
		8	0	20.8	20.9	20.9	0	22
		8	4	20.8	20.9	20.9	0	22
		8	7	20.8	21.0	20.9	0	22
		15	0	20.7	20.9	20.9	0	22
	16QAM	1	0	20.9	21.0	21.0	0	22
		1	8	21.0	21.2	21.1	0	22
		1	14	20.9	21.1	21.0	0	22
		8	0	20.8	20.9	20.9	0	22
		8	4	20.9	20.9	21.0	0	22
		8	7	20.8	21.0	21.0	0	22
		15	0	20.8	20.9	20.9	0	22
	64QAM	1	0	21.0	21.2	21.0	0	22
		1	8	21.2	21.3	21.1	0	22
		1	14	21.0	21.2	21.0	0	22
		8	0	20.4	20.5	20.5	0	22
		8	4	20.5	20.6	20.5	0	22
		8	7	20.5	20.6	20.5	0	22
		15	0	20.4	20.5	20.5	0	22
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	20.7	20.8	20.8	0	22
		1	3	20.7	20.9	20.8	0	22
		1	5	20.7	20.9	20.8	0	22
		3	0	20.7	20.8	20.8	0	22
		3	1	20.7	20.9	20.8	0	22
		3	3	20.7	20.9	20.8	0	22
		6	0	20.7	20.8	20.8	0	22
	16QAM	1	0	20.8	21.1	21.0	0	22
		1	3	20.8	21.1	21.0	0	22
		1	5	20.9	21.0	21.0	0	22
		3	0	20.8	21.0	20.8	0	22
		3	1	20.9	21.0	20.9	0	22
		3	3	20.9	21.0	20.9	0	22
		6	0	20.7	20.8	20.8	0	22
	64QAM	1	0	21.1	21.2	21.0	0	22
		1	3	21.1	21.2	21.0	0	22
		1	5	21.1	21.1	21.0	0	22
		3	0	20.9	21.0	21.0	0	22
		3	1	20.9	21.0	21.0	0	22
		3	3	20.9	21.0	21.0	0	22
		6	0	20.4	20.5	20.5	0	22

LTE Band 12 CELL Main1 Measured Results (Leveraged from FCC ID: PY7-76732V)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0	21.0	20.9	21.0	0	22
		1	25	21.0	21.0	21.0	0	22
		1	49	21.0	21.0	20.9	0	22
		25	0	20.9	21.0	21.0	0	22
		25	12	21.1	21.0	21.1	0	22
		25	25	21.0	21.0	21.0	0	22
		50	0	21.0	21.0	21.0	0	22
	16QAM	1	0	21.1	21.1	21.1	0	22
		1	25	21.1	21.1	21.2	0	22
		1	49	21.2	21.1	21.0	0	22
		25	0	20.9	21.0	21.0	0	22
		25	12	21.0	21.0	21.0	0	22
		25	25	21.0	21.0	21.0	0	22
		50	0	21.0	21.0	21.0	0	22
	64QAM	1	0	21.3	21.3	21.3	0	22
		1	25	21.2	21.3	21.3	0	22
		1	49	21.3	21.3	21.3	0	22
		25	0	20.4	20.5	20.5	0	22
		25	12	20.5	20.5	20.6	0	22
		25	25	20.5	20.5	20.6	0	22
		50	0	20.5	20.5	20.6	0	22
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	20.9	20.9	20.9	0	22
		1	12	21.0	21.1	21.1	0	22
		1	24	20.9	20.9	21.0	0	22
		12	0	20.9	20.9	21.0	0	22
		12	7	21.0	21.0	21.0	0	22
		12	13	21.0	21.0	21.0	0	22
		25	0	21.0	20.9	20.9	0	22
	16QAM	1	0	21.0	21.1	21.1	0	22
		1	12	21.1	21.3	21.3	0	22
		1	24	21.0	21.2	21.2	0	22
		12	0	20.9	21.0	20.9	0	22
		12	7	21.0	21.1	21.0	0	22
		12	13	21.0	21.1	21.0	0	22
		25	0	21.0	20.9	20.9	0	22
	64QAM	1	0	21.3	21.3	21.3	0	22
		1	12	21.2	21.3	21.4	0	22
		1	24	21.2	21.2	21.3	0	22
		12	0	20.4	20.5	20.5	0	22
		12	7	20.5	20.5	20.6	0	22
		12	13	20.5	20.6	20.6	0	22
		25	0	20.5	20.4	20.5	0	22

LTE Band 12 CELL Main1 Measured Results (Leveraged from FCC ID: PY7-76732V) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	20.9	20.9	20.9	0	22
		1	8	20.9	21.1	21.0	0	22
		1	14	20.9	21.0	20.9	0	22
		8	0	20.9	21.0	20.9	0	22
		8	4	20.9	21.0	21.1	0	22
		8	7	21.0	21.1	21.0	0	22
		15	0	20.9	20.9	20.9	0	22
	16QAM	1	0	21.0	21.1	21.1	0	22
		1	8	21.1	21.3	21.2	0	22
		1	14	21.0	21.1	21.1	0	22
		8	0	21.0	21.0	21.0	0	22
		8	4	21.0	21.0	21.1	0	22
		8	7	21.0	21.1	21.1	0	22
		15	0	20.9	21.0	20.9	0	22
	64QAM	1	0	21.3	21.3	21.3	0	22
		1	8	21.3	21.3	21.3	0	22
		1	14	21.3	21.3	21.2	0	22
		8	0	20.5	20.5	20.5	0	22
		8	4	20.5	20.5	20.6	0	22
		8	7	20.5	20.6	20.6	0	22
		15	0	20.5	20.4	20.5	0	22
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	21.0	21.0	21.0	0	22
		1	3	21.0	21.1	21.0	0	22
		1	5	21.0	21.0	21.0	0	22
		3	0	21.0	21.0	20.9	0	22
		3	1	21.0	21.0	21.0	0	22
		3	3	21.0	21.0	21.0	0	22
		6	0	21.0	20.9	21.0	0	22
	16QAM	1	0	21.1	21.1	21.1	0	22
		1	3	21.2	21.2	21.2	0	22
		1	5	21.1	21.1	21.1	0	22
		3	0	21.0	21.0	21.0	0	22
		3	1	21.1	21.0	21.0	0	22
		3	3	21.1	21.1	21.0	0	22
		6	0	21.0	21.0	21.0	0	22
	64QAM	1	0	21.3	21.3	21.3	0	22
		1	3	21.4	21.4	21.3	0	22
		1	5	21.3	21.3	21.3	0	22
		3	0	21.1	21.1	21.0	0	22
		3	1	21.1	21.1	21.0	0	22
		3	3	21.1	21.2	21.0	0	22
		6	0	20.5	20.4	20.5	0	22

LTE Band 13 CELL Main1 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)			
				23230	782 MHz	MPR	Tune-up Limit
10 MHz	QPSK	1	0	21.6	0	22	
		1	25	21.6	0	22	
		1	49	21.5	0	22	
		25	0	21.5	0	22	
		25	12	21.6	0	22	
		25	25	21.6	0	22	
		50	0	21.6	0	22	
	16QAM	1	0	21.9	0	22	
		1	25	21.9	0	22	
		1	49	21.9	0	22	
		25	0	21.1	0	22	
		25	12	21.2	0	22	
		25	25	21.1	0	22	
		50	0	21.1	0	22	
	64QAM	1	0	21.4	0	22	
		1	25	21.3	0	22	
		1	49	21.4	0	22	
		25	0	20.0	0	22	
		25	12	20.1	0	22	
		25	25	20.1	0	22	
		50	0	20.1	0	22	
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)			
				23230	782 MHz	MPR	Tune-up Limit
5 MHz	QPSK	1	0	21.5	0	22	
		1	12	21.6	0	22	
		1	24	21.6	0	22	
		12	0	21.5	0	22	
		12	7	21.5	0	22	
		12	13	21.6	0	22	
		25	0	21.6	0	22	
	16QAM	1	0	22.0	0	22	
		1	12	22.0	0	22	
		1	24	21.9	0	22	
		12	0	21.0	0	22	
		12	7	21.0	0	22	
		12	13	21.1	0	22	
		25	0	21.1	0	22	
	64QAM	1	0	21.4	0	22	
		1	12	21.4	0	22	
		1	24	21.4	0	22	
		12	0	20.0	0	22	
		12	7	20.0	0	22	
		12	13	20.1	0	22	
		25	0	20.1	0	22	

LTE Band 41 CELL Main2 Measured Results (Leveraged from FCC ID: PY7-76732V)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	19.1	19.0	19.0	18.9	19.1	0	20
		1	49	19.2	19.0	19.0	18.9	19.0	0	20
		1	99	19.1	18.9	19.1	19.0	19.1	0	20
		50	0	19.1	19.0	19.1	18.8	19.0	0	20
		50	24	19.2	19.1	19.2	19.0	19.2	0	20
		50	50	19.2	19.0	19.1	19.0	19.1	0	20
		100	0	19.2	19.1	19.1	18.9	19.0	0	20
	16QAM	1	0	19.1	19.0	19.1	19.0	19.1	0	20
		1	49	19.4	19.1	19.1	19.0	19.3	0	20
		1	99	19.1	19.0	19.2	19.2	19.2	0	20
		50	0	19.2	19.0	19.0	18.9	19.1	0	20
		50	24	19.2	19.1	19.1	19.0	19.2	0	20
		50	50	19.2	19.1	19.1	19.0	19.1	0	20
		100	0	19.2	19.1	19.1	19.0	19.1	0	20
	64QAM	1	0	19.1	19.1	19.0	18.9	19.1	0	20
		1	49	19.2	19.1	19.1	18.9	19.1	0	20
		1	99	19.1	19.0	19.1	19.0	19.0	0	20
		50	0	19.1	19.1	19.0	18.8	19.0	0	20
		50	24	19.2	19.1	19.1	18.9	19.1	0	20
		50	50	19.2	19.1	19.1	19.0	19.1	0	20
		100	0	19.2	19.1	19.1	19.0	19.0	0	20
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	19.1	19.1	19.0	18.9	19.0	0	20
		1	37	19.2	19.1	19.0	18.9	19.0	0	20
		1	74	19.1	19.1	19.1	19.0	19.1	0	20
		36	0	19.2	19.0	19.0	18.9	19.0	0	20
		36	20	19.2	19.1	19.1	18.9	19.0	0	20
		36	39	19.2	19.1	19.1	18.9	19.1	0	20
		75	0	19.2	19.1	19.1	18.9	19.1	0	20
	16QAM	1	0	19.1	19.0	18.9	18.9	19.0	0	20
		1	37	19.2	19.1	18.9	18.9	19.1	0	20
		1	74	19.2	19.1	19.0	18.9	19.0	0	20
		36	0	19.2	19.1	19.0	18.8	19.0	0	20
		36	20	19.3	19.1	19.0	18.9	19.0	0	20
		36	39	19.2	19.1	19.1	18.9	19.1	0	20
		75	0	19.2	19.1	19.1	18.9	19.1	0	20
	64QAM	1	0	19.2	19.1	19.0	18.9	19.1	0	20
		1	37	19.2	19.1	19.0	18.9	19.1	0	20
		1	74	19.2	19.1	19.1	19.0	19.2	0	20
		36	0	19.2	19.1	19.0	18.8	19.0	0	20
		36	20	19.3	19.1	19.1	18.9	19.0	0	20
		36	39	19.2	19.1	19.1	18.9	19.1	0	20
		75	0	19.2	19.1	19.1	18.9	19.1	0	20

LTE Band 41 CELL Main2 Measured Results (Leveraged from FCC ID: PY7-76732V) (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	19.3	19.2	19.1	18.9	19.1	0	20
		1	25	19.3	19.2	19.1	19.0	19.2	0	20
		1	49	19.3	19.2	19.1	19.0	19.1	0	20
		25	0	19.4	19.2	19.1	18.9	19.2	0	20
		25	12	19.4	19.3	19.2	19.1	19.3	0	20
		25	25	19.4	19.3	19.2	19.0	19.2	0	20
		50	0	19.4	19.3	19.2	19.1	19.3	0	20
	16QAM	1	0	19.3	19.3	19.1	19.1	19.1	0	20
		1	25	19.3	19.3	19.0	19.1	19.2	0	20
		1	49	19.4	19.3	19.1	19.1	19.1	0	20
		25	0	19.4	19.1	19.1	19.0	19.2	0	20
		25	12	19.4	19.3	19.2	19.1	19.2	0	20
		25	25	19.4	19.3	19.2	19.1	19.2	0	20
		50	0	19.4	19.2	19.2	19.1	19.2	0	20
	64QAM	1	0	19.3	19.2	19.1	19.0	19.1	0	20
		1	25	19.4	19.2	19.2	19.1	19.3	0	20
		1	49	19.3	19.3	19.2	19.0	19.2	0	20
		25	0	19.4	19.2	19.1	19.0	19.1	0	20
		25	12	19.4	19.3	19.2	19.1	19.2	0	20
		25	25	19.4	19.3	19.2	19.1	19.2	0	20
		50	0	19.4	19.2	19.2	19.1	19.2	0	20
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	19.3	19.1	19.1	18.9	19.2	0	20
		1	12	19.5	19.2	19.2	19.0	19.3	0	20
		1	24	19.3	19.1	19.1	19.0	19.2	0	20
		12	0	19.4	19.2	19.1	18.9	19.2	0	20
		12	7	19.4	19.3	19.2	19.1	19.3	0	20
		12	13	19.4	19.2	19.2	19.1	19.2	0	20
		25	0	19.4	19.3	19.2	19.0	19.2	0	20
	16QAM	1	0	19.3	19.2	19.2	19.0	19.2	0	20
		1	12	19.5	19.3	19.4	19.2	19.4	0	20
		1	24	19.3	19.2	19.2	19.1	19.2	0	20
		12	0	19.4	19.1	19.1	18.9	19.2	0	20
		12	7	19.4	19.2	19.2	19.1	19.2	0	20
		12	13	19.3	19.1	19.2	19.1	19.2	0	20
		25	0	19.3	19.2	19.1	19.0	19.2	0	20
	64QAM	1	0	19.3	19.2	19.1	19.0	19.2	0	20
		1	12	19.4	19.3	19.2	19.1	19.2	0	20
		1	24	19.3	19.2	19.1	19.0	19.1	0	20
		12	0	19.3	19.2	19.2	19.0	19.2	0	20
		12	7	19.4	19.2	19.3	19.1	19.3	0	20
		12	13	19.3	19.2	19.3	19.1	19.2	0	20
		25	0	19.3	19.1	19.2	19.0	19.2	0	20

LTE Band 66 CELL Main2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	18.4	18.4	18.3	0	19
		1	49	18.3	18.4	18.4	0	19
		1	99	18.5	18.5	18.4	0	19
		50	0	18.4	18.4	18.4	0	19
		50	24	18.5	18.4	18.5	0	19
		50	50	18.4	18.5	18.4	0	19
		100	0	18.5	18.4	18.4	0	19
	16QAM	1	0	18.6	18.7	18.6	0	19
		1	49	18.8	18.9	18.8	0	19
		1	99	18.7	18.8	18.6	0	19
		50	0	18.4	18.5	18.4	0	19
		50	24	18.5	18.5	18.5	0	19
		50	50	18.5	18.5	18.4	0	19
	64QAM	100	0	18.5	18.5	18.5	0	19
		1	0	18.5	18.6	18.6	0	19
		1	49	18.6	18.7	18.7	0	19
		1	99	18.6	18.7	18.5	0	19
		50	0	18.3	18.4	18.4	0	19
		50	24	18.4	18.4	18.5	0	19
		50	50	18.4	18.5	18.4	0	19
	100	0	18.4	18.4	18.4	0	19	
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132047	132322	132597	MPR	Tune-up Limit
				1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	18.3	18.4	18.4	0	19
		1	37	18.4	18.4	18.4	0	19
		1	74	18.4	18.5	18.4	0	19
		36	0	18.3	18.4	18.4	0	19
		36	20	18.4	18.4	18.5	0	19
		36	39	18.4	18.5	18.4	0	19
		75	0	18.4	18.4	18.4	0	19
	16QAM	1	0	18.6	18.7	18.6	0	19
		1	37	18.7	18.7	18.7	0	19
		1	74	18.7	18.8	18.7	0	19
		36	0	18.4	18.5	18.4	0	19
		36	20	18.5	18.5	18.5	0	19
		36	39	18.4	18.5	18.5	0	19
	64QAM	75	0	18.5	18.5	18.4	0	19
		1	0	18.6	18.7	18.7	0	19
		1	37	18.6	18.8	18.7	0	19
		1	74	18.7	18.7	18.7	0	19
		36	0	18.3	18.4	18.4	0	19
		36	20	18.4	18.5	18.5	0	19
		36	39	18.4	18.5	18.5	0	19
	75	0	18.4	18.4	18.4	0	19	
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	18.4	18.6	18.5	0	19
		1	25	18.5	18.6	18.6	0	19
		1	49	18.5	18.6	18.6	0	19
		25	0	18.5	18.6	18.5	0	19
		25	12	18.5	18.6	18.5	0	19
		25	25	18.5	18.7	18.6	0	19
		50	0	18.5	18.6	18.5	0	19
	16QAM	1	0	18.8	18.9	18.9	0	19
		1	25	18.8	18.9	18.8	0	19
		1	49	18.8	19.0	18.9	0	19
		25	0	18.5	18.6	18.5	0	19
		25	12	18.6	18.6	18.5	0	19
		25	25	18.6	18.7	18.6	0	19
	64QAM	50	0	18.5	18.6	18.5	0	19
		1	0	18.8	18.8	18.8	0	19
		1	25	18.8	18.9	18.8	0	19
		1	49	18.9	18.9	18.8	0	19
		25	0	18.5	18.6	18.5	0	19
		25	12	18.6	18.6	18.5	0	19
		25	25	18.6	18.7	18.6	0	19
	50	0	18.5	18.6	18.5	0	19	

LTE Band 66 CELL Main2 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)					
				131997	132322	132647	MPR	Tune-up Limit	
				1712.5 MHz	1745 MHz	1777.5 MHz			
5 MHz	QPSK	1	0	18.5	18.6	18.5	0	19	
		1	12	18.6	18.7	18.6	0	19	
		1	24	18.5	18.6	18.5	0	19	
		12	0	18.5	18.6	18.6	0	19	
		12	7	18.6	18.6	18.6	0	19	
		12	13	18.5	18.7	18.6	0	19	
	16QAM	25	0	18.6	18.6	18.6	0	19	
		1	0	18.8	18.9	18.9	0	19	
		1	12	19.0	18.7	19.0	0	19	
		1	24	18.9	19.0	18.9	0	19	
		12	0	18.6	18.7	18.6	0	19	
		12	7	18.6	18.7	18.6	0	19	
	64QAM	25	0	18.6	18.6	18.6	0	19	
		1	0	18.7	18.8	18.8	0	19	
		1	12	18.8	18.9	18.9	0	19	
		1	24	18.8	18.8	18.7	0	19	
		12	0	18.5	18.6	18.6	0	19	
		12	7	18.6	18.6	18.6	0	19	
	3 MHz	QPSK	12	13	18.5	18.7	18.6	0	19
			1	0	18.4	18.5	18.5	0	19
			1	8	18.5	18.7	18.6	0	19
1			14	18.4	18.5	18.5	0	19	
8			0	18.5	18.6	18.6	0	19	
8			4	18.5	18.6	18.6	0	19	
16QAM		8	7	18.5	18.7	18.6	0	19	
		15	0	18.5	18.6	18.6	0	19	
		1	0	18.8	18.8	18.8	0	19	
		1	8	18.9	19.0	18.9	0	19	
		1	14	18.8	18.8	18.8	0	19	
		8	0	18.5	18.6	18.6	0	19	
64QAM		8	4	18.6	18.6	18.7	0	19	
		8	7	18.6	18.7	18.7	0	19	
		15	0	18.5	18.6	18.6	0	19	
		1	0	18.8	18.9	18.8	0	19	
		1	8	18.9	18.9	18.9	0	19	
		1	14	18.8	18.9	18.8	0	19	
1.4 MHz		QPSK	8	0	18.6	18.5	18.6	0	19
			8	4	18.6	18.6	18.7	0	19
			8	7	18.6	18.7	18.7	0	19
	15		0	18.5	18.6	18.6	0	19	
	1		0	18.5	18.6	18.5	0	19	
	1		3	18.6	18.6	18.6	0	19	
	16QAM	1	5	18.5	18.6	18.5	0	19	
		3	0	18.5	18.6	18.5	0	19	
		3	1	18.5	18.6	18.5	0	19	
		3	3	18.5	18.6	18.5	0	19	
		6	0	18.5	18.6	18.5	0	19	
		1	0	18.7	18.9	18.9	0	19	
	64QAM	1	3	18.7	18.9	18.9	0	19	
		1	5	18.6	19.0	18.9	0	19	
		3	0	18.6	18.8	18.7	0	19	
		3	1	18.6	18.8	18.7	0	19	
		3	3	18.6	18.8	18.7	0	19	
		6	0	18.5	18.7	18.6	0	19	
	1.4 MHz	QPSK	1	0	18.9	18.9	18.8	0	19
			1	3	18.9	18.9	18.9	0	19
		16QAM	1	5	18.8	18.9	18.8	0	19
3			0	18.6	18.7	18.6	0	19	
3			1	18.6	18.7	18.6	0	19	
3			3	18.6	18.7	18.7	0	19	
6			0	18.6	18.6	18.7	0	19	
1			0	18.9	18.9	18.8	0	19	
1			3	18.9	18.9	18.9	0	19	
1			5	18.8	18.9	18.8	0	19	
3	0	18.6	18.7	18.6	0	19			
3	1	18.6	18.7	18.6	0	19			
3	3	18.6	18.7	18.7	0	19			
6	0	18.6	18.6	18.7	0	19			

LTE Band 66 CELL Sub

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	16.0	15.6	16.8	0	17
		1	49	16.0	16.1	16.5	0	17
		1	99	15.5	15.9	17.0	0	17
		50	0	16.2	15.9	16.6	0	17
		50	24	16.3	16.2	16.6	0	17
		50	50	15.8	16.0	16.4	0	17
		100	0	16.0	16.0	16.5	0	17
	16QAM	1	0	16.4	15.9	17.0	0	17
		1	49	16.6	16.8	16.9	0	17
		1	99	15.9	16.2	16.3	0	17
		50	0	16.3	16.0	16.6	0	17
		50	24	16.3	16.2	16.6	0	17
		50	50	15.9	16.1	16.5	0	17
	64QAM	100	0	16.1	16.1	16.5	0	17
		1	0	16.5	16.0	15.9	0	17
		1	49	16.6	16.7	16.9	0	17
		1	99	16.0	16.3	16.0	0	17
		50	0	16.2	16.0	16.6	0	17
		50	24	16.3	16.2	16.6	0	17
		50	50	15.9	16.1	16.5	0	17
		100	0	16.1	16.0	16.5	0	17
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132047	132322	132597	MPR	Tune-up Limit
				1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	15.8	15.5	16.3	0	17
		1	37	16.2	16.1	16.0	0	17
		1	74	15.6	15.7	16.4	0	17
		36	0	16.3	16.0	16.4	0	17
		36	20	16.4	16.3	16.2	0	17
		36	39	16.1	16.1	16.3	0	17
		75	0	16.2	16.1	16.3	0	17
	16QAM	1	0	16.2	15.8	16.7	0	17
		1	37	16.7	16.5	16.5	0	17
		1	74	15.9	16.1	16.7	0	17
		36	0	16.4	16.1	16.4	0	17
		36	20	16.5	16.3	16.2	0	17
		36	39	16.1	16.1	16.4	0	17
	64QAM	75	0	16.3	16.1	16.3	0	17
		1	0	16.3	16.0	16.8	0	17
		1	37	16.7	16.6	16.5	0	17
		1	74	16.0	16.2	16.8	0	17
		36	0	16.4	16.1	16.4	0	17
		36	20	16.5	16.3	16.2	0	17
		36	39	16.1	16.1	16.4	0	17
		75	0	16.3	16.1	16.3	0	17
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	16.1	15.9	16.3	0	17
		1	25	16.1	15.9	16.0	0	17
		1	49	16.0	15.8	16.6	0	17
		25	0	16.3	16.0	16.3	0	17
		25	12	16.3	16.0	16.2	0	17
		25	25	16.3	16.1	16.6	0	17
		50	0	16.3	16.1	16.4	0	17
	16QAM	1	0	16.6	16.4	16.8	0	17
		1	25	16.6	16.4	16.5	0	17
		1	49	16.5	16.3	16.2	0	17
		25	0	16.4	16.1	16.3	0	17
		25	12	16.4	16.1	16.3	0	17
		25	25	16.3	16.2	16.6	0	17
	64QAM	50	0	16.3	16.1	16.4	0	17
		1	0	16.6	16.4	16.7	0	17
		1	25	16.7	16.4	16.6	0	17
		1	49	16.5	16.4	15.9	0	17
		25	0	16.3	16.1	16.3	0	17
		25	12	16.4	16.1	16.3	0	17
		25	25	16.3	16.1	16.6	0	17
		50	0	16.3	16.1	16.4	0	17

LTE Band 66 CELL Sub (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				131997	132322	132647	MPR	Tune-up Limit
				1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	16.1	16.0	16.5	0	17
		1	12	16.3	16.0	16.7	0	17
		1	24	16.4	16.0	16.9	0	17
		12	0	16.3	16.0	16.7	0	17
		12	7	16.4	16.1	16.8	0	17
		12	13	16.4	16.1	16.9	0	17
		25	0	16.3	16.1	16.8	0	17
	16QAM	1	0	16.6	16.5	17.0	0	17
		1	12	16.8	16.5	16.2	0	17
		1	24	16.9	16.5	16.1	0	17
		12	0	16.3	16.1	16.8	0	17
		12	7	16.4	16.2	16.9	0	17
		12	13	16.6	16.2	17.0	0	17
	64QAM	25	0	16.4	16.1	16.8	0	17
		1	0	16.7	16.5	17.0	0	17
		1	12	16.8	16.5	15.9	0	17
		1	24	17.0	16.5	16.1	0	17
		12	0	16.4	16.1	16.8	0	17
		12	7	16.5	16.2	16.9	0	17
		12	13	16.5	16.2	17.0	0	17
		25	0	16.4	16.1	16.8	0	17
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	16.0	15.9	16.6	0	17
		1	8	16.2	15.9	16.8	0	17
		1	14	16.3	16.0	16.8	0	17
		8	0	16.2	16.0	16.8	0	17
		8	4	16.3	16.0	16.8	0	17
		8	7	16.3	16.0	16.9	0	17
		15	0	16.2	16.0	16.8	0	17
	16QAM	1	0	16.5	16.4	15.8	0	17
		1	8	16.7	16.5	16.2	0	17
		1	14	16.7	16.4	16.1	0	17
		8	0	16.4	16.1	16.9	0	17
		8	4	16.4	16.2	17.0	0	17
		8	7	16.5	16.2	17.0	0	17
	64QAM	15	0	16.3	16.1	16.9	0	17
		1	0	16.6	16.4	15.8	0	17
		1	8	16.8	16.4	16.0	0	17
		1	14	16.8	16.5	16.0	0	17
		8	0	16.3	16.0	16.9	0	17
		8	4	16.4	16.1	16.9	0	17
		8	7	16.4	16.2	17.0	0	17
		15	0	16.3	16.1	16.9	0	17
BW (MHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
				131979	132322	132665	MPR	Tune-up Limit
				1710.7 MHz	1745 MHz	1779.3 MHz		
1.4 MHz	QPSK	1	0	16.1	16.0	16.8	0	17
		1	3	16.2	16.0	16.8	0	17
		1	5	16.2	16.0	16.8	0	17
		3	0	16.1	16.1	16.8	0	17
		3	1	16.2	16.1	16.8	0	17
		3	3	16.2	16.1	16.8	0	17
		6	0	16.2	16.1	16.8	0	17
	16QAM	1	0	16.6	16.5	16.2	0	17
		1	3	16.6	16.5	16.3	0	17
		1	5	16.7	16.5	16.2	0	17
		3	0	16.4	16.3	17.0	0	17
		3	1	16.4	16.3	17.0	0	17
		3	3	16.4	16.3	17.0	0	17
	64QAM	6	0	16.3	16.3	17.0	0	17
		1	0	16.5	16.5	16.0	0	17
		1	3	16.6	16.5	16.1	0	17
		1	5	16.6	16.5	16.0	0	17
		3	0	16.4	16.3	17.0	0	17
		3	1	16.5	16.4	17.0	0	17
		3	3	16.5	16.3	17.0	0	17
		6	0	16.3	16.2	16.9	0	17

9.4. 5G

RF Air interface	Mode	Tune-up PowerLimit (dBm)	
		CELL Main1	CELL Main2
		Normal	Normal
NR Band n5	DFT-s-OFDM	22.0	
NR Band n41	DFT-s-OFDM		20.0
NR Band n66	DFT-s-OFDM		19.0

n5 CELL Main1

ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								166800	167300	167800	MPR	Tune-up Limit
								834 MHz	836.5 MHz	839 MHz		
100	20	20	DFT-s	15	$\pi/2$ BPSK	1	1	21.2	21.3	21.4	0	22
						1	52	21.3	21.5	21.4	0	22
						1	104	21.3	21.2	21.3	0	22
						50	25	21.3	21.5	21.4	0	22
					QPSK	1	1	21.3	21.4	21.5	0	22
						1	52	21.4	21.5	21.5	0	22
						1	104	21.4	21.3	21.3	0	22
						50	25	21.5	21.5	21.5	0	22
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								166300	167300	168300	MPR	Tune-up Limit
								831.5 MHz	836.5 MHz	841.5 MHz		
100	20	15	DFT-s	15	$\pi/2$ BPSK	1	1	21.3	21.4	21.4	0	22
						1	39	21.4	21.5	21.2	0	22
						1	77	21.5	21.4	21.1	0	22
						36	18	21.5	21.4	21.2	0	22
					QPSK	1	1	21.2	21.4	21.4	0	22
						1	39	21.4	21.3	21.3	0	22
						1	77	21.4	21.4	21.3	0	22
						36	18	21.4	21.6	21.3	0	22
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								165800	167300	168800	MPR	Tune-up Limit
								829 MHz	836.5 MHz	844 MHz		
100	20	10	DFT-s	15	$\pi/2$ BPSK	1	1	21.0	21.1	21.1	0	22
						1	25	21.0	21.2	21.1	0	22
						1	50	21.1	21.2	21.0	0	22
						25	12	21.2	21.3	21.1	0	22
					QPSK	1	1	21.2	21.2	21.2	0	22
						1	25	21.1	21.3	21.2	0	22
						1	50	21.3	21.3	21.2	0	22
						25	12	21.2	21.2	21.1	0	22
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								165300	167300	169300	MPR	Tune-up Limit
								826.5 MHz	836.5 MHz	846.5 MHz		
100	20	5	DFT-s	15	$\pi/2$ BPSK	1	1	21.0	21.2	21.3	0	22
						1	12	21.1	21.1	21.1	0	22
						1	23	21.3	21.2	21.1	0	22
						12	6	21.1	21.2	21.1	0	22
					QPSK	1	1	21.4	21.3	21.2	0	22
						1	12	21.3	21.3	21.1	0	22
						1	23	21.4	21.3	21.1	0	22
						12	6	21.2	21.3	21.1	0	22

n41 CELL Main2

ΔF _{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)					MPR	Tune-up Limit
								509196	513900	518598	523296	527994		
								2545.98 MHz	2569.5 MHz	2592.99 MHz	2616.48 MHz	2639.97 MHz		
30	6	100	DFT-s	30	π/2 BPSK	1	1	19.5	19.5	19.3	19.4	19.4	0	20
						1	136	19.4	19.4	19.2	19.3	19.2	0	20
						1	271	19.4	19.4	19.2	19.2	19.1	0	20
						135	67	19.4	19.3	19.3	19.3	19.1	0	20
					QPSK	1	1	19.6	19.4	19.4	19.4	19.4	0	20
						1	136	19.4	19.3	19.4	19.3	19.2	0	20
						1	271	19.4	19.4	19.3	19.2	19.1	0	20
135	67	19.4	19.3	19.3	19.2	19.1	0	20						
30	6	90	DFT-s	30	π/2 BPSK	1	1	19.5	19.4	19.4	19.3	19.3	0	20
						1	122	19.3	19.3	19.4	19.3	19.1	0	20
						1	243	19.3	19.4	19.2	19.2	19.1	0	20
						120	63	19.4	19.3	19.3	19.2	19.1	0	20
					QPSK	1	1	19.6	19.4	19.2	19.2	19.3	0	20
						1	122	19.4	19.4	19.2	19.3	19.1	0	20
						1	243	19.4	19.3	19.2	19.1	19.1	0	20
120	63	19.3	19.3	19.2	19.2	19.1	0	20						
30	6	80	DFT-s	30	π/2 BPSK	1	1	19.6	19.4	19.2	19.3	19.3	0	20
						1	108	19.5	19.3	19.2	19.3	19.5	0	20
						1	215	19.4	19.4	19.1	19.1	19.4	0	20
						108	54	19.5	19.3	19.3	19.2	19.6	0	20
					QPSK	1	1	19.5	19.6	19.3	19.3	19.7	0	20
						1	108	19.4	19.2	19.2	19.3	19.5	0	20
						1	215	19.4	19.9	19.2	19.1	19.5	0	20
108	54	19.4	19.3	19.3	19.2	19.5	0	20						
30	6	60	DFT-s	30	π/2 BPSK	1	1	19.9	19.7	19.5	19.5	19.4	0	20
						1	81	19.7	19.6	19.5	19.4	19.3	0	20
						1	160	19.7	19.6	19.4	19.2	19.2	0	20
						81	40	19.7	19.5	19.4	19.3	19.2	0	20
					QPSK	1	1	19.7	19.7	19.4	19.4	19.4	0	20
						1	81	19.7	19.6	19.5	19.4	19.2	0	20
						1	160	19.6	19.6	19.4	19.2	19.2	0	20
81	40	19.6	19.5	19.5	19.4	19.2	0	20						
30	6	50	DFT-s	30	π/2 BPSK	1	1	19.8	19.7	19.5	19.5	19.3	0	20
						1	66	19.8	19.7	19.4	19.4	19.2	0	20
						1	131	19.7	19.7	19.4	19.3	19.2	0	20
						64	35	19.7	19.5	19.5	19.3	19.2	0	20
					QPSK	1	1	19.8	19.7	19.4	19.5	19.3	0	20
						1	66	19.7	19.6	19.5	19.4	19.2	0	20
						1	131	19.8	19.6	19.5	19.3	19.1	0	20
64	35	19.7	19.6	19.4	19.4	19.1	0	20						
30	6	40	DFT-s	30	π/2 BPSK	1	1	19.7	19.7	19.6	19.7	19.6	0	20
						1	53	19.7	19.6	19.5	19.4	19.4	0	20
						1	104	19.8	19.7	19.6	19.6	19.5	0	20
						50	28	19.8	19.6	19.6	19.4	19.4	0	20
					QPSK	1	1	19.8	19.7	19.6	19.6	19.5	0	20
						1	53	19.8	19.5	19.6	19.4	19.2	0	20
						1	104	19.8	19.7	19.6	19.6	19.4	0	20
50	28	19.7	19.6	19.5	19.4	19.3	0	20						
30	6	30	DFT-s	30	π/2 BPSK	1	1	19.8	19.6	19.6	19.4	19.3	0	20
						1	39	19.8	19.6	19.5	19.4	19.3	0	20
						1	76	19.9	19.7	19.7	19.4	19.4	0	20
						36	21	19.8	19.6	19.5	19.4	19.3	0	20
					QPSK	1	1	19.7	19.8	19.6	19.6	19.4	0	20
						1	39	19.7	19.6	19.5	19.5	19.4	0	20
						1	76	19.7	19.8	19.6	19.5	19.4	0	20
36	21	19.8	19.6	19.6	19.4	19.3	0	20						
30	6	20	DFT-s	30	π/2 BPSK	1	1	19.8	19.6	19.6	19.4	19.3	0	20
						1	25	19.7	19.2	19.6	19.3	19.3	0	20
						1	49	19.7	19.3	19.6	19.3	19.2	0	20
						25	13	19.8	19.3	19.6	19.4	19.3	0	20
					QPSK	1	1	19.9	19.6	19.6	19.5	19.3	0	20
						1	25	19.8	19.1	19.7	19.3	19.4	0	20
						1	49	19.7	19.2	19.6	19.3	19.3	0	20
25	13	19.7	19.2	19.5	19.3	19.1	0	20						

n66 CELL Main2

ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								344000	349000	354000	MPR	Tune-up Limit
								1720 MHz	1745 MHz	1770 MHz		
100	20	20	DFT-s	15	$\pi/2$ BPSK	1	1	17.9	17.8	17.5	0	19
						1	52	17.9	17.8	17.2	0	19
						1	104	17.8	17.5	17.1	0	19
						50	25	17.9	17.8	17.4	0	19
					QPSK	1	1	17.9	17.8	17.5	0	19
						1	52	17.8	17.8	17.3	0	19
						1	104	17.8	17.6	17.2	0	19
						50	25	17.8	17.7	17.2	0	19
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								343500	349000	354500	MPR	Tune-up Limit
								1717.5 MHz	1745 MHz	1772.5 MHz		
100	20	15	DFT-s	15	$\pi/2$ BPSK	1	1	18.1	18.0	17.5	0	19
						1	39	18.0	17.9	17.4	0	19
						1	77	18.0	17.8	17.3	0	19
						36	18	18.0	17.9	17.3	0	19
					QPSK	1	1	18.1	17.9	17.6	0	19
						1	39	18.0	17.8	17.2	0	19
						1	77	18.1	17.9	17.3	0	19
						36	18	18.0	17.9	17.3	0	19
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								343000	349000	355000	MPR	Tune-up Limit
								1715 MHz	1745 MHz	1775 MHz		
100	20	10	DFT-s	15	$\pi/2$ BPSK	1	1	17.8	17.7	17.3	0	19
						1	25	17.8	17.6	17.3	0	19
						1	50	17.8	17.6	17.2	0	19
						25	12	17.7	17.7	17.2	0	19
					QPSK	1	1	18.0	17.8	17.4	0	19
						1	25	18.0	17.8	17.2	0	19
						1	50	17.9	17.7	17.2	0	19
						25	12	17.9	17.8	17.3	0	19
ΔF_{Raster}	N Step Size	BW (MHz)	OFDM Modulation Scheme	SCS (kHz)	Mode	RB Allocation	RB offset	Normal Average Power (dBm)				
								342500	349000	355500	MPR	Tune-up Limit
								1712.5 MHz	1745 MHz	1777.5 MHz		
100	20	5	DFT-s	15	$\pi/2$ BPSK	1	1	17.8	17.5	17.1	0	19
						1	12	17.7	17.5	17.3	0	19
						1	23	17.7	17.5	17.2	0	19
						12	6	17.6	17.6	17.1	0	19
					QPSK	1	1	17.8	17.7	17.2	0	19
						1	12	17.7	17.7	17.3	0	19
						1	23	17.7	17.7	17.1	0	19
						12	6	17.7	17.6	17.1	0	19

9.5. WLAN 2.4GHz & WLAN 5GHz & Bluetooth

Data Reuse Testing Rational

This application is using the data reuse procedure from TCB workshop April 2021; RF Exposure Procedures (Remarks on Test Reductions via Data Referencing for Closely Related Products). WLAN and Bluetooth SAR data is referenced from FCC ID: PY7-76732V and is leveraged to cover variant FCC ID: PY7-95649X. All circuitry and features for WLAN and Bluetooth operations are identical between the two variants. The data reuse test plan was approved via manufacturer KDB inquiry.

Data Reuse SAR Test Approach

Full RF exposure testing was performed for WLAN and Bluetooth on the parent variant (FCC ID: PY7-76732V). The configurations with the highest SAR values for each equipment class were identified. These configurations were then tested on the variant model (FCC ID: PY7-95649X).

The variation in SAR values were well within the uncertainty budget of the SAR test equipment. The variant SAR results and worst case parent SAR values are summarized in section 1.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN and Bluetooth = Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	CELL Main1	0	Left Cheek	190	836.6	26.9	25.7	0.069	0.091	1
				Left Tilt	190	836.6	26.9	25.7	0.037	0.049	
				Right Cheek	190	836.6	26.9	25.7	0.082	0.108	
				Right Tilt	190	836.6	26.9	25.7	0.034	0.045	
Body-Worn and Hotspot	GPRS 4 Slots	CELL Main1	10	Back	190	836.6	26.9	25.7	0.191	0.252	2
				Front	190	836.6	26.9	25.7	0.124	0.163	
Hotspot	GPRS 4 Slots	CELL Main1	10	Edge Left	190	836.6	26.9	25.7	0.080	0.105	
				Edge Bottom	190	836.6	26.9	25.7	0.070	0.092	
Body-Worn and Hotspot	DTM GPRS 2 Slots	CELL Main1	10	Back	190	836.6	29.9	29.2	0.225	0.264	3

10.2. GSM1900

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	CELL Main2	0	Left Cheek	810	1909.8	22.0	21.1	0.024	0.030	4
				Left Tilt	810	1909.8	22.0	21.1	0.012	0.015	
				Right Cheek	810	1909.8	22.0	21.1	0.041	0.050	
				Right Tilt	810	1909.8	22.0	21.1	0.015	0.018	
Body-Worn and Hotspot	GPRS 4 Slots	CELL Main2	10	Back	810	1909.8	22.0	21.1	0.150	0.185	5
				Front	810	1909.8	22.0	21.1	0.129	0.159	
Hotspot	GPRS 4 Slots	CELL Main2	10	Edge Right	810	1909.8	22.0	21.1	0.117	0.144	6
				Edge Bottom	810	1909.8	22.0	21.1	0.176	0.217	
Hotspot	DTM GPRS 2 Slots	CELL Main2	10	Edge Bottom	810	1909.8	25.0	23.9	0.184	0.237	7

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up Limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	CELL Main1	0	Left Cheek	4183	836.6	22.7	21.9	0.081	0.097	8
				Left Tilt	4183	836.6	22.7	21.9	0.072	0.087	
				Right Cheek	4183	836.6	22.7	21.9	0.093	0.112	
				Right Tilt	4183	836.6	22.7	21.9	0.065	0.078	
Body-Worn and Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main1	10	Back	4183	836.6	22.7	21.9	0.184	0.221	9
				Front	4183	836.6	22.7	21.9	0.124	0.149	
Hotspot	Rel. 99 RMC 12.2 kbps	CELL Main1	10	Edge Left	4183	836.6	22.7	21.9	0.111	0.133	
				Edge Bottom	4183	836.6	22.7	21.9	0.086	0.103	

10.4. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main1	0	Left Cheek	20525	836.5	1	25	22.0	20.9	0.062	0.080	10
							25	0	22.0	20.9	0.062	0.080	
				Left Tilt	20525	836.5	1	25	22.0	20.9	0.039	0.050	
							25	0	22.0	20.9	0.037	0.048	
				Right Cheek	20525	836.5	1	25	22.0	20.9	0.066	0.085	
							25	0	22.0	20.9	0.065	0.084	
				Right Tilt	20525	836.5	1	25	22.0	20.9	0.032	0.041	
							25	0	22.0	20.9	0.032	0.041	
Body-Worn and Hotspot	QPSK	CELL Main1	10	Back	20525	836.5	1	25	22.0	20.9	0.147	0.189	11
							25	0	22.0	20.9	0.144	0.186	
				Front	20525	836.5	1	25	22.0	20.9	0.098	0.126	
							25	0	22.0	20.9	0.097	0.125	
				Edge Left	20525	836.5	1	25	22.0	20.9	0.071	0.091	
							25	0	22.0	20.9	0.072	0.093	
Edge Bottom	20525	836.5	1	25	22.0	20.9	0.060	0.077					
			25	0	22.0	20.9	0.059	0.076					

10.5. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main1	0	Left Cheek	23095	707.5	1	25	22.0	21.0	0.056	0.070	12
							25	0	22.0	21.0	0.056	0.070	
				Left Tilt	23095	707.5	1	25	22.0	21.0	0.026	0.033	
							25	0	22.0	21.0	0.024	0.030	
				Right Cheek	23095	707.5	1	25	22.0	21.0	0.054	0.068	
							25	0	22.0	21.0	0.053	0.067	
				Right Tilt	23095	707.5	1	25	22.0	21.0	0.023	0.029	
							25	0	22.0	21.0	0.022	0.028	
Body-Worn and Hotspot	QPSK	CELL Main1	10	Back	23095	707.5	1	25	22.0	21.0	0.102	0.128	13
							25	0	22.0	21.0	0.102	0.128	
				Front	23095	707.5	1	25	22.0	21.0	0.068	0.086	
							25	0	22.0	21.0	0.069	0.087	
				Edge Left	23095	707.5	1	25	22.0	21.0	0.104	0.131	
							25	0	22.0	21.0	0.101	0.127	
Edge Bottom	23095	707.5	1	25	22.0	21.0	0.021	0.026					
			25	0	22.0	21.0	0.021	0.026					

10.6. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	QPSK	CELL Main1	0	Left Cheek	23230	782.0	1	0	22.0	21.6	0.059	0.065	15
							25	12	22.0	21.6	0.059	0.065	
				Left Tilt	23230	782.0	1	0	22.0	21.6	0.027	0.030	
							25	12	22.0	21.6	0.028	0.031	
				Right Cheek	23230	782.0	1	0	22.0	21.6	0.063	0.069	
							25	12	22.0	21.6	0.066	0.072	
				Right Tilt	23230	782.0	1	0	22.0	21.6	0.025	0.027	
							25	12	22.0	21.6	0.028	0.031	
Body-Worn and Hotspot	QPSK	CELL Main1	10	Back	23230	782.0	1	0	22.0	21.6	0.147	0.161	16
							25	12	22.0	21.6	0.153	0.168	
				Front	23230	782.0	1	0	22.0	21.6	0.112	0.123	
							25	12	22.0	21.6	0.108	0.118	
				Edge Left	23230	782.0	1	0	22.0	21.6	0.075	0.082	
							25	12	22.0	21.6	0.076	0.083	
Edge Bottom	23230	782.0	1	0	22.0	21.6	0.035	0.038					
			25	12	22.0	21.6	0.036	0.039					

10.7. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	CELL Main2	0	Left Cheek	39750	2506.0	1	49	20.0	19.2	0.012	0.014	17	
							50	24	20.0	19.2	0.013	0.016		
				Left Tilt	39750	2506.0	1	49	20.0	19.2	0.008	0.010		
							50	24	20.0	19.2	0.008	0.010		
				Right Cheek	39750	2506.0	1	49	20.0	19.2	0.026	0.031		
							50	24	20.0	19.2	0.025	0.030		
				Right Tilt	39750	2506.0	1	49	20.0	19.2	0.006	0.007		
							50	24	20.0	19.2	0.006	0.007		
Body-Worn and Hotspot	QPSK	CELL Main2	10	Back	39750	2506.0	1	49	20.0	19.2	0.135	0.162	18	
							50	24	20.0	19.2	0.138	0.166		
				Front	39750	2506.0	1	49	20.0	19.2	0.119	0.143		
							50	24	20.0	19.2	0.122	0.147		
				Edge Right	39750	2506.0	1	49	20.0	19.2	0.056	0.067		
							50	24	20.0	19.2	0.057	0.069		
Edge Bottom	39750	2506.0	1	49	20.0	19.2	0.196	0.236						
			50	24	20.0	19.2	0.201	0.242						

10.8. LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up Limit	Meas.	Meas.	Scaled		
Head	QPSK	CELL Main2	0	Left Cheek	132322	1745.0	1	99	19.0	18.5	0.034	0.038	20	
							50	50	19.0	18.5	0.033	0.037		
				Left Tilt	132322	1745.0	1	99	19.0	18.5	0.024	0.027		
							50	50	19.0	18.5	0.024	0.027		
				Right Cheek	132322	1745.0	1	99	19.0	18.5	0.061	0.068		
							50	50	19.0	18.5	0.061	0.068		
				Right Tilt	132322	1745.0	1	99	19.0	18.5	0.021	0.024		
							50	50	19.0	18.5	0.018	0.020		
Body-Worn and Hotspot	QPSK	CELL Main2	10	Back	132322	1745.0	1	99	19.0	18.5	0.137	0.154	21	
							50	50	19.0	18.5	0.138	0.155		
				Front	132322	1745.0	1	99	19.0	18.5	0.107	0.120		
							50	50	19.0	18.5	0.116	0.130		
Hotspot	QPSK	CELL Main2	10	Edge Right	132322	1745.0	1	99	19.0	18.5	0.107	0.120	22	
							50	50	19.0	18.5	0.107	0.120		
				Edge Bottom	132322	1745.0	1	99	19.0	18.5	0.180	0.202		
							50	50	19.0	18.5	0.183	0.205		
RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
Head	QPSK	CELL Sub	0	Left Cheek	132572	1770.0	1	99	17.0	17.0	0.352	0.352	23	
							50	0	17.0	16.6	0.357	0.391		
				Left Tilt	132572	1770.0	1	99	17.0	17.0	0.325	0.325		
							50	0	17.0	16.6	0.371	0.407		
				Right Cheek	132572	1770.0	1	99	17.0	17.0	0.182	0.182		
							50	0	17.0	16.6	0.175	0.192		
				Right Tilt	132572	1770.0	1	99	17.0	17.0	0.160	0.160		
							50	0	17.0	16.6	0.159	0.174		
Body-Worn and Hotspot	QPSK	CELL Sub	10	Back	132572	1770.0	1	99	17.0	17.0	0.074	0.074	24	
							50	0	17.0	16.6	0.076	0.083		
				Front	132572	1770.0	1	99	17.0	17.0	0.065	0.065		
							50	0	17.0	16.6	0.062	0.068		
Hotspot	QPSK	CELL Sub	10	Edge Right	132572	1770.0	1	99	17.0	17.0	0.032	0.032		
							50	0	17.0	16.6	0.029	0.032		
				Edge Top	132572	1770.0	1	99	17.0	17.0	0.052	0.052		
							50	0	17.0	16.6	0.054	0.059		

10.9. NR Band n5 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	DFTs-OFDM QPSK	CELL Main1	0	Left Cheek	167300	836.5	1	52	22.0	21.5	0.064	0.072	
							50	25	22.0	21.5	0.065	0.073	
				Left Tilt	167300	836.5	1	52	22.0	21.5	0.060	0.067	
							50	25	22.0	21.5	0.060	0.067	
				Right Cheek	167300	836.5	1	52	22.0	21.5	0.077	0.086	
							50	25	22.0	21.5	0.078	0.088	25
				Right Tilt	167300	836.5	1	52	22.0	21.5	0.060	0.067	
							50	25	22.0	21.5	0.062	0.070	
Body-Worn and Hotspot	DFTs-OFDM QPSK	CELL Main1	10	Back	167300	836.5	1	52	22.0	21.5	0.160	0.180	
							50	25	22.0	21.5	0.162	0.182	26
				Front	167300	836.5	1	52	22.0	21.5	0.105	0.118	
							50	25	22.0	21.5	0.106	0.119	
				Edge Left	167300	836.5	1	52	22.0	21.5	0.139	0.156	
							50	25	22.0	21.5	0.141	0.158	
Edge Bottom	167300	836.5	1	52	22.0	21.5	0.076	0.085					
			50	25	22.0	21.5	0.077	0.086					

10.10. NR Band n41 (100MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	DFTs-OFDM QPSK	CELL Main2	0	Left Cheek	509196	2546.0	1	1	20.0	19.6	0.036	0.039	
							135	67	20.0	19.4	0.028	0.032	
				Left Tilt	509196	2546.0	1	1	20.0	19.6	0.031	0.034	
							135	67	20.0	19.4	0.025	0.029	
				Right Cheek	509196	2546.0	1	1	20.0	19.6	0.051	0.056	
							135	67	20.0	19.4	0.054	0.062	27
				Right Tilt	509196	2546.0	1	1	20.0	19.6	0.013	0.014	
							135	67	20.0	19.4	0.019	0.022	
Body-Worn and Hotspot	DFTs-OFDM QPSK	CELL Main2	10	Back	509196	2546.0	1	1	20.0	19.6	0.244	0.268	
							135	67	20.0	19.4	0.268	0.308	28
				Front	509196	2546.0	1	1	20.0	19.6	0.217	0.238	
							135	67	20.0	19.4	0.237	0.272	
Hotspot	DFTs-OFDM QPSK	CELL Main2	10	Edge Right	509196	2546.0	1	1	20.0	19.6	0.087	0.095	
							135	67	20.0	19.4	0.095	0.109	
				Edge Bottom	509196	2546.0	1	1	20.0	19.6	0.333	0.365	29
							135	67	20.0	19.4	0.300	0.344	

10.11. NR Band n66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	RB Offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up Limit	Meas.	Meas.	Scaled	
Head	DFTs-OFDM QPSK	CELL Main2	0	Left Cheek	344000	1720.0	1	1	19.0	17.9	0.019	0.024	30
							50	25	19.0	17.9	0.019	0.024	
				Left Tilt	344000	1720.0	1	1	19.0	17.9	0.005	0.006	
							50	25	19.0	17.9	0.004	0.005	
				Right Cheek	344000	1720.0	1	1	19.0	17.9	0.019	0.024	
							50	25	19.0	17.9	0.019	0.024	
				Right Tilt	344000	1720.0	1	1	19.0	17.9	0.004	0.005	
							50	25	19.0	17.9	0.005	0.006	
Body-Worn and Hotspot	DFTs-OFDM QPSK	CELL Main2	10	Back	344000	1720.0	1	1	19.0	17.9	0.111	0.143	31
							50	25	19.0	17.9	0.107	0.138	
				Front	344000	1720.0	1	1	19.0	17.9	0.085	0.110	
							50	25	19.0	17.9	0.082	0.106	
Hotspot	DFTs-OFDM QPSK	CELL Main2	10	Edge Right	344000	1720.0	1	1	19.0	17.9	0.075	0.097	
							50	25	19.0	17.9	0.068	0.088	
				Edge Bottom	344000	1720.0	1	1	19.0	17.9	0.134	0.173	32
							50	25	19.0	17.9	0.122	0.157	

10.12. WLAN & Bluetooth Spotcheck Verification

WLAN Spot Check Results for Variant FCC ID: PY7-95649X

Technology	RF Exposure Condition	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	Power (dBm)		FCC ID: PY7-76732V		FCC ID: PY7-95649X		Delta	Plot No.
									Tune-up Limit	Meas.	1-g SAR (W/kg)		1-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
WLAN 2.4 GHz	Head	802.11b	WiFi Main	0	Right Cheek	1	2412	99.9%	14.0	13.8	0.345	0.362	0.389	0.408	13%	33
WLAN 5.5 GHz	Head	802.11ac (VHT160)	WiFi Main	0	Right Cheek	114	5570	99.7%	11.5	10.6	0.224	0.276	0.194	0.239	-13%	

WLAN Spot Check Results for Variant FCC ID: PY7-95649X (Extremity)

Technology	RF Exposure Condition	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	Power (dBm)		FCC ID: PY7-76732V		FCC ID: PY7-95649X		Delta	Plot No.
									Tune-up Limit	Meas.	10-g SAR (W/kg)		10-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
WLAN 5.8 GHz	Extremity	802.11n (HT40)	WiFi Main	0	Edge Left	159	5795	99.6%	11.5	10.6	0.340	0.420	0.385	0.476	13%	34

Bluetooth Spot Check Results for Variant FCC ID: PY7-95649X

Technology	RF Exposure Condition	Mode	Antenna	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	RB Allocation	Power (dBm)		FCC ID: PY7-76732V		FCC ID: PY7-95649X		Delta	Plot No.
									Tune-up Limit	Meas.	1-g SAR (W/kg)		1-g SAR (W/kg)			
											Meas.	Scaled	Meas.	Scaled		
Bluetooth	Head	GFSK	WiFi Main	0	Right Cheek	76	2480	100.0%	14.0	13.5	0.272	0.305	0.271	0.304	0%	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note(s):

Repeated measurement is not required since the original highest measured SAR is < 0.8 W/kg (1-g) or 2 W/kg (10-g) .

12. Simultaneous Transmission Conditions

RF Exposure Condition	Tx Mode	WWAN			WiFi Main			Wi-Fi Sub			NFC
		CELL Main1	CELL Main2	CELL Sub	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	2.4 GHz Wi-Fi	5 GHz Wi-Fi	Bluetooth	
Head, Body-worn, & Hotspot	1	✓			✓			✓			
	2	✓				✓			✓		
	3	✓					✓				
	4	✓								✓	
	5	✓					✓	✓		✓	
	6	✓					✓			✓	✓
	7	✓				✓	✓		✓	✓	
	8			✓		✓			✓		
	9			✓			✓			✓	
	10			✓				✓			
	11			✓							✓
	12			✓			✓	✓		✓	
	13			✓			✓			✓	✓
	14			✓		✓	✓			✓	
	15	✓	✓			✓			✓		
	16	✓	✓				✓			✓	
	17	✓	✓					✓			
	18	✓	✓								✓
	19	✓	✓				✓	✓		✓	
	20	✓	✓				✓			✓	✓
	21	✓	✓			✓	✓		✓	✓	
	22		✓	✓		✓			✓		
	23		✓	✓			✓			✓	
	24		✓	✓				✓			
	25		✓	✓							✓
	26		✓	✓			✓	✓		✓	
	27		✓	✓			✓			✓	✓
	28		✓	✓		✓	✓		✓	✓	
Extremity	29					✓			✓		✓

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Estimated SAR for Simultaneous Transmission SAR Analysis

Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
 - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
 - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
 - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
3. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

Estimated SAR for NFC

Antenna	Tx Interface	Frequency (MHz)	Output Power	Separation Distances (mm)	Estimated 10-g SAR Value (W/kg)
			mW	Back	Back
NFC	NFC	13.56	403	0	0.501

12.3. Sum of the SAR for WWAN CELL Main1 & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)						
	WWAN		WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	CELL Main1 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	WIFI Main ⑥	WIFI Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	① + ⑥	① + ⑦	
Head	0.112	0.408	0.169	0.276	0.068	0.305	0.088	0.689	0.456	0.761	0.544	0.417	0.200	
Body	0.264	0.043	0.169	0.047	0.068	0.052	0.088	0.476	0.379	0.431	0.467	0.316	0.352	
Hotspot	0.264	0.073	0.169	0.075	0.068	0.083	0.088	0.506	0.407	0.490	0.495	0.347	0.352	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.4. Sum of the SAR for WWAN CELL Main1 & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main1 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.112	0.337	0.106	0.184	0.051	0.790
Body	0.264	0.042	0.106	0.025	0.051	0.488
Hotspot	0.264	0.077	0.106	0.044	0.051	0.542

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.5. Sum of the SAR for WWAN CELL Main2 & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)						
	WWAN		WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	CELL Main2 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	WIFI Main ⑥	WIFI Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	① + ⑥	① + ⑦	
Head	0.068	0.408	0.169	0.276	0.068	0.305	0.088	0.645	0.412	0.717	0.500	0.373	0.156	
Body	0.308	0.043	0.169	0.047	0.068	0.052	0.088	0.520	0.423	0.475	0.511	0.360	0.396	
Hotspot	0.365	0.073	0.169	0.075	0.068	0.083	0.088	0.607	0.508	0.591	0.596	0.448	0.453	

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.6. Sum of the SAR for WWAN CELL Main2 & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main2 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.068	0.337	0.106	0.184	0.051	0.746
Body	0.308	0.042	0.106	0.025	0.051	0.532
Hotspot	0.365	0.077	0.106	0.044	0.051	0.643

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

12.7. Sum of the SAR for WWAN DC_66A_n5A & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)						
	WWAN		WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	CELL Main1 + Main2 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	WIFI Main ⑥	WIFI Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	① + ⑥	① + ⑦	
Head	0.156	0.408	0.169	0.276	0.068	0.305	0.088	0.733	0.500	0.805	0.588	0.461	0.244	
Body	0.337	0.043	0.169	0.047	0.068	0.052	0.088	0.549	0.452	0.504	0.540	0.389	0.425	
Hotspot	0.387	0.073	0.169	0.075	0.068	0.083	0.088	0.629	0.530	0.613	0.618	0.470	0.475	

12.8. Sum of the SAR for WWAN DC_66A_n5A & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main1 + Main2 ①	WIFI Main ②	WIFI Sub ③	WIFI Main ④	WIFI Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.156	0.337	0.106	0.184	0.051	0.834
Body	0.337	0.042	0.106	0.025	0.051	0.561
Hotspot	0.387	0.077	0.106	0.044	0.051	0.665

12.9. Sum of the SAR for WWAN DC_66A_n41A & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)					
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	CELL Main2 + CELL Sub ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	WiFi Main ⑥	WiFi Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	① + ⑥	① + ⑦
Head	0.469	0.408	0.169	0.276	0.068	0.305	0.088	1.046	0.813	1.118	0.901	0.774	0.557
Body	0.391	0.043	0.169	0.047	0.068	0.052	0.088	0.603	0.506	0.558	0.594	0.443	0.479
Hotspot	0.448	0.073	0.169	0.075	0.068	0.083	0.088	0.690	0.591	0.674	0.679	0.531	0.536

12.10. Sum of the SAR for WWAN DC_66A_n41A & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main2 + CELL Sub ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.469	0.337	0.106	0.184	0.051	1.147
Body	0.391	0.042	0.106	0.025	0.051	0.615
Hotspot	0.448	0.077	0.106	0.044	0.051	0.726

12.11. Sum of the SAR for WWAN DC_13A_n66A & Wi-Fi Normal State & BT

RF Exposure Conditions	Standalone SAR (W/kg)							Σ 1-g SAR (W/kg)					
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		BT		WWAN + WLAN 2.4 GHz	WWAN + WLAN 5 GHz	WWAN + WLAN 5 GHz + BT	WWAN + WLAN 5 GHz + BT	WWAN + BT	WWAN + BT
	CELL Main1 + Main2 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	WiFi Main ⑥	WiFi Sub ⑦	① + ② + ③	① + ④ + ⑤	① + ④ + ⑤ + ⑥	① + ④ + ⑤ + ⑦	① + ⑥	① + ⑦
Head	0.096	0.408	0.169	0.276	0.068	0.305	0.088	0.673	0.440	0.745	0.528	0.401	0.184
Body	0.311	0.043	0.169	0.047	0.068	0.052	0.088	0.523	0.426	0.478	0.514	0.363	0.399
Hotspot	0.341	0.073	0.169	0.075	0.068	0.083	0.088	0.583	0.484	0.567	0.572	0.424	0.429

12.12. Sum of the SAR for WWAN DC_13A_n66A & Wi-Fi Simultaneous 2G_5G State

RF Exposure Conditions	Standalone SAR (W/kg)					Σ 1-g SAR (W/kg)
	WWAN	WLAN 2.4 GHz		WLAN 5 GHz		WWAN + WLAN 2.4 GHz + WLAN 5 GHz
	CELL Main1 + Main2 ①	WiFi Main ②	WiFi Sub ③	WiFi Main ④	WiFi Sub ⑤	① + ② + ③ + ④ + ⑤
Head	0.096	0.337	0.106	0.184	0.051	0.774
Body	0.311	0.042	0.106	0.025	0.051	0.535
Hotspot	0.341	0.077	0.106	0.044	0.051	0.619

12.13. Sum of the SAR for Wi-Fi Normal State & NFC

RF Exposure Conditions	Standalone SAR (W/kg)			Σ 10-g SAR (W/kg)
	WLAN 5 GHz		NFC	WLAN 5 GHz + NFC
	WiFi Main ①	WiFi Sub ②	NFC ③	① + ② + ③
Extremity	0.476	0.372	0.501	1.349

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 10-g SAR is < 4 W/kg or the SPLSR is < 0.1 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

Appendix A: SAR Setup Photos

Appendix B: SAR System Check Plots

Appendix C: SAR Highest Test Plots

Appendix D: SAR Tissue Ingredients

Appendix E: SAR Probe Certificates

Appendix F: SAR Dipole Certificates

END OF REPORT