



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : Smart phone
BRAND NAME : SONY
TYPE NAME : PM-0633-BV
FCC ID : PY7-PM0633
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Oct. 21, 2014 and testing was completed on Nov. 02, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0633

Page Number : 1 of 45

Report Issued Date : Dec. 24, 2014

Report Version : Rev. 01

Report Template No.: BU5-FR15CWL Version 1.0



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification subjective to this standard 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Output Power Measurement 15

 3.3 Power Spectral Density Measurement 18

 3.4 Conducted Band Edges and Spurious Emission Measurement 21

 3.5 Radiated Band Edges and Spurious Emission Measurement 34

 3.6 AC Conducted Emission Measurement 38

 3.7 Antenna Requirements 42

4 LIST OF MEASURING EQUIPMENT 43

5 UNCERTAINTY OF EVALUATION 45

APPENDIX A. TEST RESULT OF RADIATED EMISSION



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.50 dB at 2390.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.50 dB at 0.446 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Sony Mobile Communications Inc.
Nya Vattentorget, 22188 Lund, Sweden

1.2 Manufacturer

Arima Communications Corp.
6F, No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is smart phone supporting, GSM / WCDMA, Wi-Fi 2.4GHz 802.11b/g/n, Bluetooth with FM Receiver, and GPS features, and below is details of information.

Product Feature	
Equipment	Smart phone
Brand Name	SONY
Type Name	PM-0633-BV
FCC ID	PY7-PM0633
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 12, EGPRS Class 12
WCDMA Operating Band(s)	FDD Band I / II / V
WCDMA Rel. Version	Rel. 7
Wi-Fi Specification	802.11b/g/n (HT20/HT40)
Bluetooth Version	v3.0 + EDR / v4.0 - LE
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 19.52 dBm (0.0895 W) 802.11g : 23.46 dBm (0.2218 W) 802.11n HT20 : 20.62 dBm (0.1153 W) 802.11n HT40 : 21.15 dBm (0.1303 W)
Antenna Type	IFA Antenna type with gain 0.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402147947752 IMEI 2: 004402147947760	A	24.0.B.0.16	FR4A12D59203	RF conducted measurement
IMEI 1: 004402147947893 IMEI 2: 004402147947701			FR4A12D59321	Radiated Spurious Emission
IMEI 1: 004402147947539 IMEI 2: 004402147947547			FR4A12D59194	Conducted Emission

Accessory List	
AC Adapter	Model No. : EP800
	Type No. : AC-0030-US
	S/N : 3113W46622717 (for Radiated Spurious Emission) 3113W46622770 (for Conducted Emission)
Battery	Model No. : Charles
Earphone	Model No. : MH410c
	Type No. : AG-1103
	S/N : 1411204600BC914 (for Radiated Spurious Emission) 1411204B00BC72C (for Conducted Emission)
USB Cable 1	Model No. : EC450
	Type No. : AI-0700
	S/N : 1412D1122420A (for Radiated Spurious Emission) 1412D01471694 (for Conducted Emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	19.52	19.49	19.40	19.45

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	23.46	23.44	23.42	23.31	23.30	23.38	23.36	23.41

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	20.62	20.61	20.52	20.47	20.48	20.53	20.40	20.48

2.4GHz 802.11n HT40 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	21.15	20.25	20.23	20.18	20.16	20.15	20.12	20.03




2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
		802.11n HT40	MCS0	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
		802.11n HT40	MCS0	3/6/9
AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable 1 (Charging from Adapter) + MP3			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

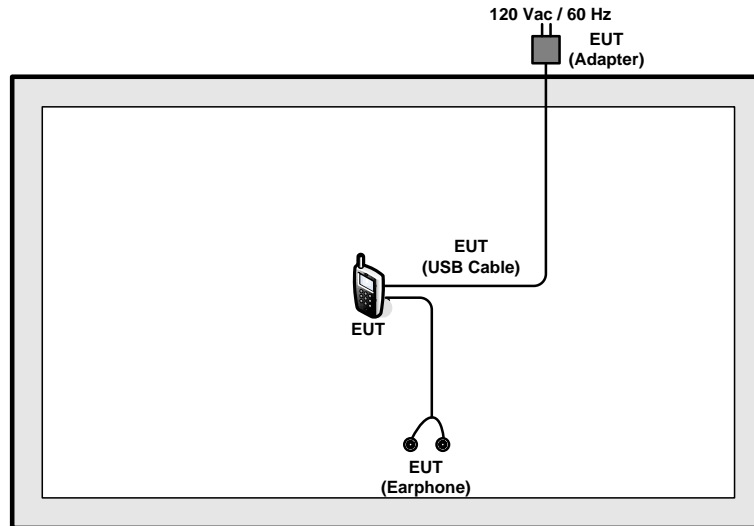

<AC Conducted Emission Mode>

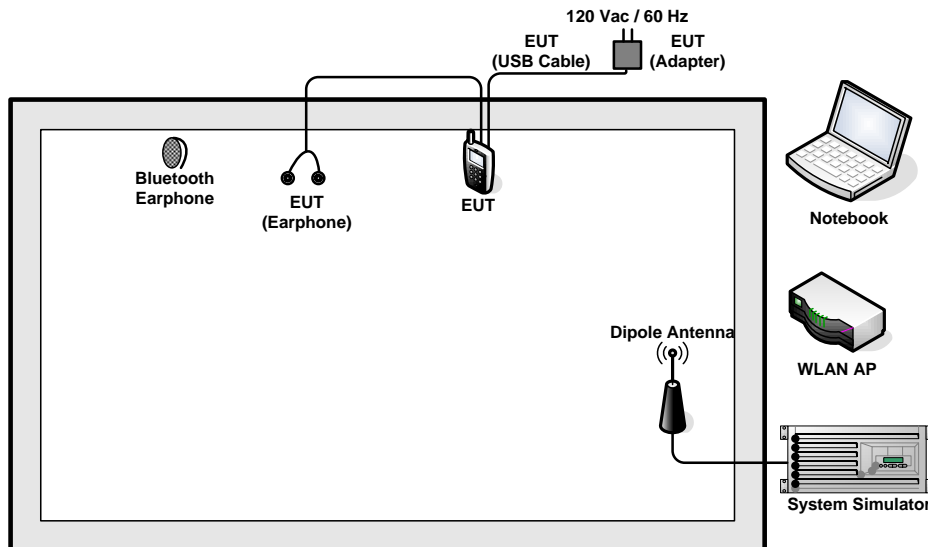



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

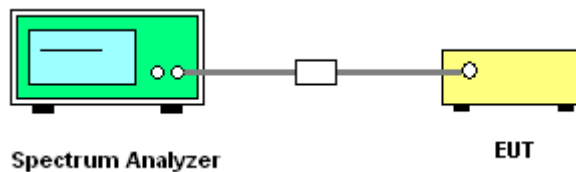




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Stuart Lin and Derek Hsu	Relative Humidity :	45~55%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	9.54	0.5	Pass
11b	1Mbps	1	6	2437	9.54	0.5	Pass
11b	1Mbps	1	11	2462	9.08	0.5	Pass
11g	6Mbps	1	1	2412	16.32	0.5	Pass
11g	6Mbps	1	6	2437	16.36	0.5	Pass
11g	6Mbps	1	11	2462	16.32	0.5	Pass
HT20	MCS0	1	1	2412	17.60	0.5	Pass
HT20	MCS0	1	6	2437	17.60	0.5	Pass
HT20	MCS0	1	11	2462	17.60	0.5	Pass
HT40	MCS0	1	3	2422	36.08	0.5	Pass
HT40	MCS0	1	6	2437	36.08	0.5	Pass
HT40	MCS0	1	9	2452	36.08	0.5	Pass

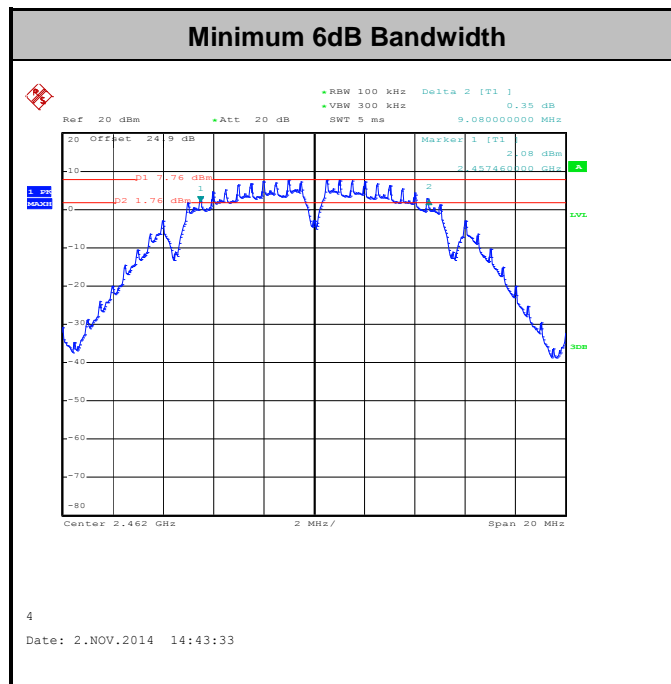

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

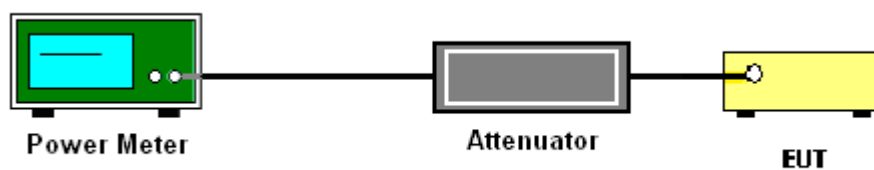



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Stuart Lin and Derek Hsu	Relative Humidity :	45~55%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	19.36	30	0.00	Pass
11b	1Mbps	1	6	2437	19.26	30	0.00	Pass
11b	1Mbps	1	11	2462	19.52	30	0.00	Pass
11g	6Mbps	1	1	2412	23.06	30	0.00	Pass
11g	6Mbps	1	6	2437	22.99	30	0.00	Pass
11g	6Mbps	1	11	2462	23.46	30	0.00	Pass
HT20	MCS0	1	1	2412	20.52	30	0.00	Pass
HT20	MCS0	1	6	2437	20.31	30	0.00	Pass
HT20	MCS0	1	11	2462	20.62	30	0.00	Pass
HT40	MCS0	1	3	2422	21.02	30	0.00	Pass
HT40	MCS0	1	6	2437	21.15	30	0.00	Pass
HT40	MCS0	1	9	2452	21.00	30	0.00	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Stuart Lin and Derek Hsu	Relative Humidity :	45~55%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.08	16.48	30	0.00	Pass
11b	1Mbps	1	6	2437	0.08	16.35	30	0.00	Pass
11b	1Mbps	1	11	2462	0.08	16.49	30	0.00	Pass
11g	6Mbps	1	1	2412	0.53	13.33	30	0.00	Pass
11g	6Mbps	1	6	2437	0.53	13.11	30	0.00	Pass
11g	6Mbps	1	11	2462	0.53	13.38	30	0.00	Pass
HT20	MCS0	1	1	2412	0.53	9.82	30	0.00	Pass
HT20	MCS0	1	6	2437	0.53	9.73	30	0.00	Pass
HT20	MCS0	1	11	2462	0.53	9.94	30	0.00	Pass
HT40	MCS0	1	3	2422	1.02	9.95	30	0.00	Pass
HT40	MCS0	1	6	2437	1.02	9.99	30	0.00	Pass
HT40	MCS0	1	9	2452	1.02	9.74	30	0.00	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

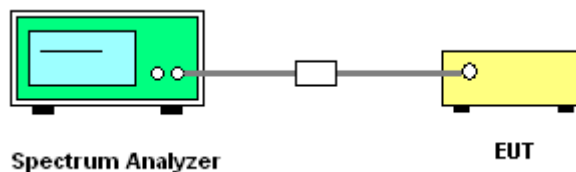




3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	24~26°C
Test Engineer :	Stuart Lin and Derek Hsu	Relative Humidity :	45~55%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-6.36	8	0.00	Pass
11b	1Mbps	1	6	2437	-6.85	8	0.00	Pass
11b	1Mbps	1	11	2462	-6.09	8	0.00	Pass
11g	6Mbps	1	1	2412	-11.74	8	0.00	Pass
11g	6Mbps	1	6	2437	-13.18	8	0.00	Pass
11g	6Mbps	1	11	2462	-12.08	8	0.00	Pass
HT20	MCS0	1	1	2412	-15.48	8	0.00	Pass
HT20	MCS0	1	6	2437	-15.77	8	0.00	Pass
HT20	MCS0	1	11	2462	-14.17	8	0.00	Pass
HT40	MCS0	1	3	2422	-19.30	8	0.00	Pass
HT40	MCS0	1	6	2437	-18.59	8	0.00	Pass
HT40	MCS0	1	9	2452	-19.26	8	0.00	Pass

Note: Measured power density (dBm) has offset with cable loss.

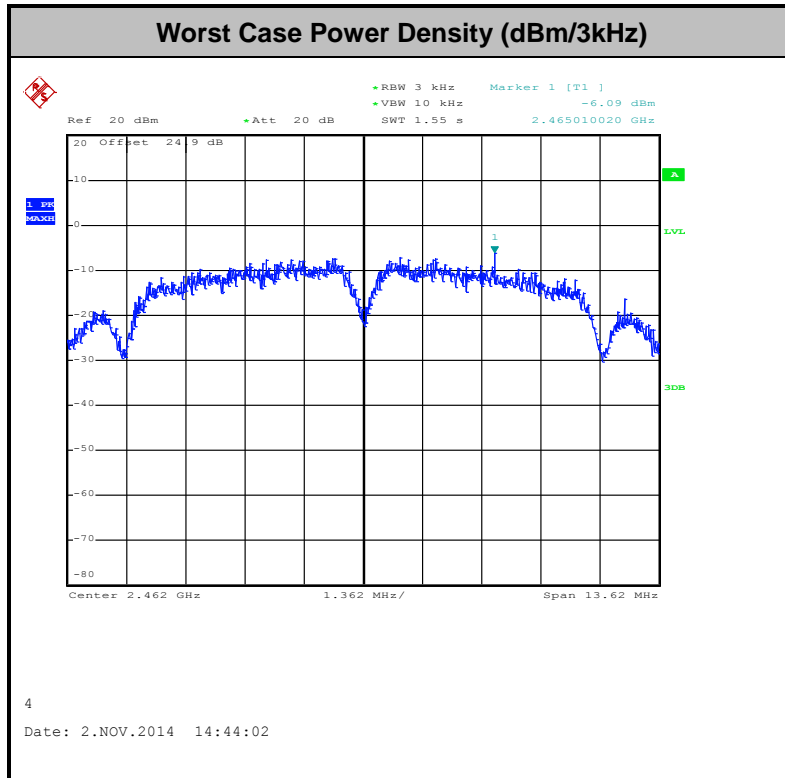

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup


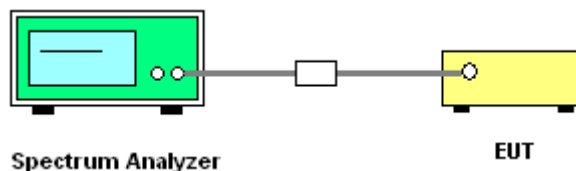




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~55%
Test Channel :	01	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11b Channel 01

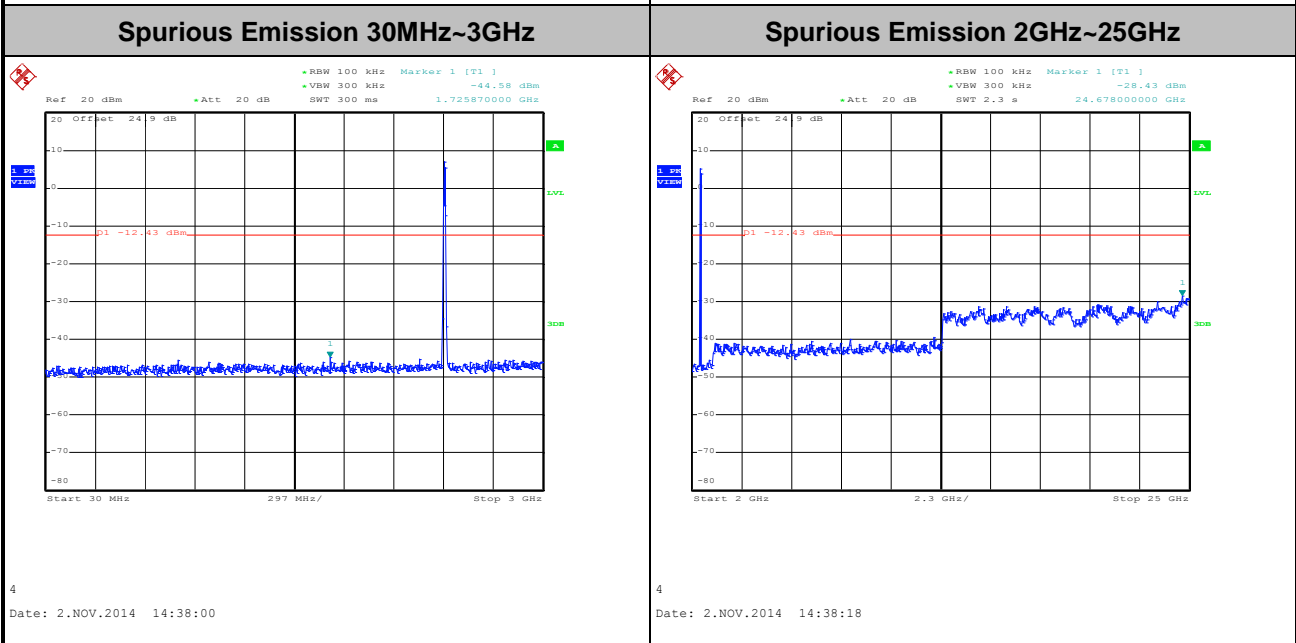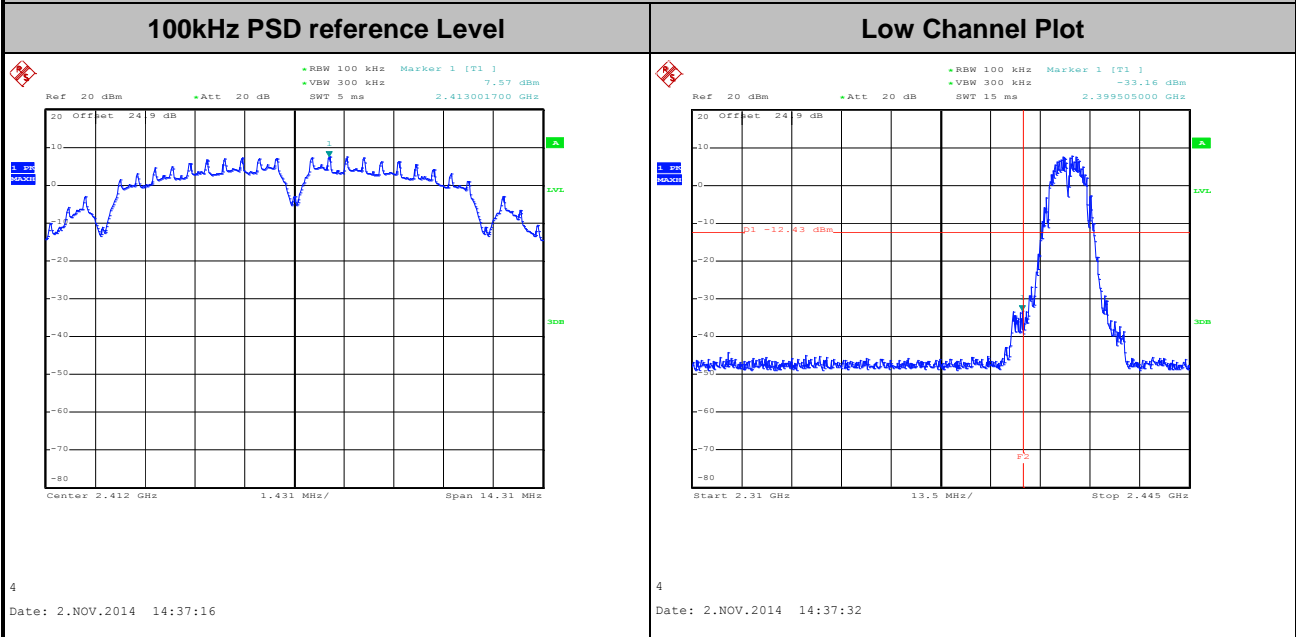





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz Mid.	Relative Humidity :	45~55%
Test Channel :	06	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11b Channel 06


100kHz PSD reference Level

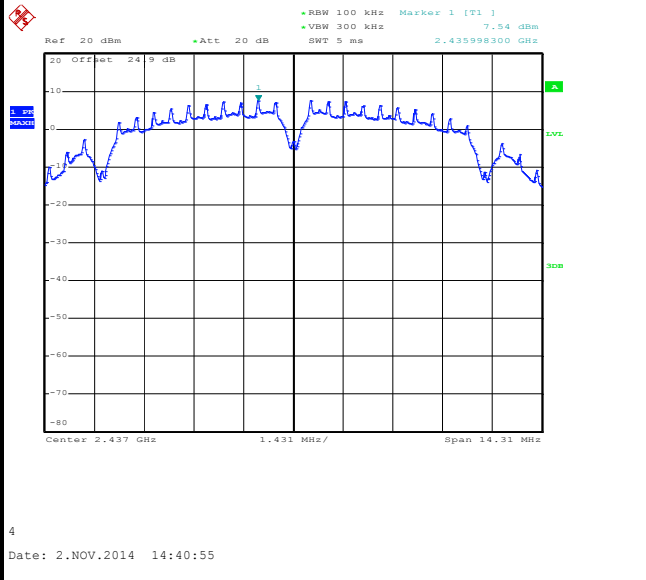

Spurious Emission 30MHz~3GHz

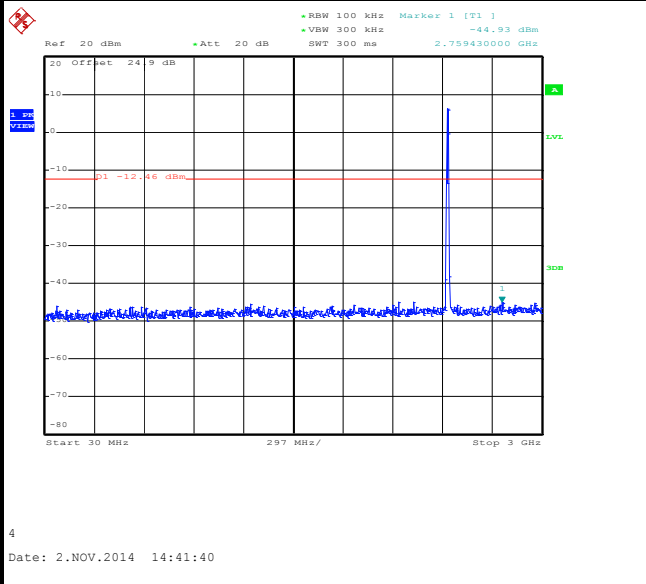

Spurious Emission 2GHz~25GHz

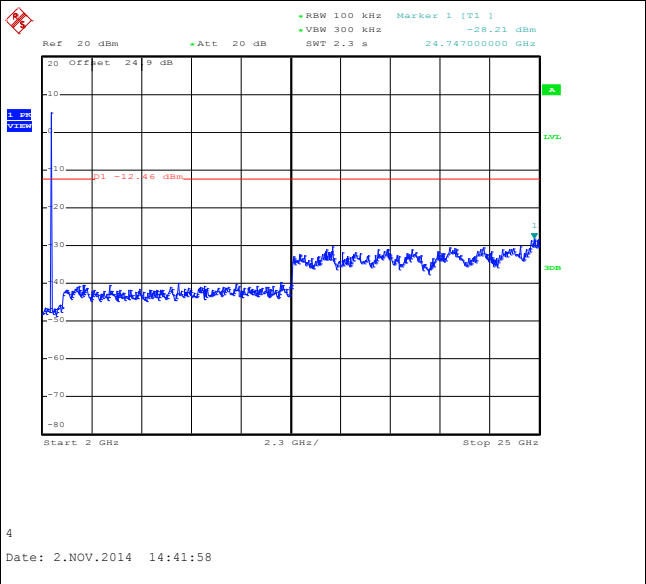





Test Mode :	802.11b	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~55%
Test Channel :	11	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11b Channel 11


100kHz PSD reference Level

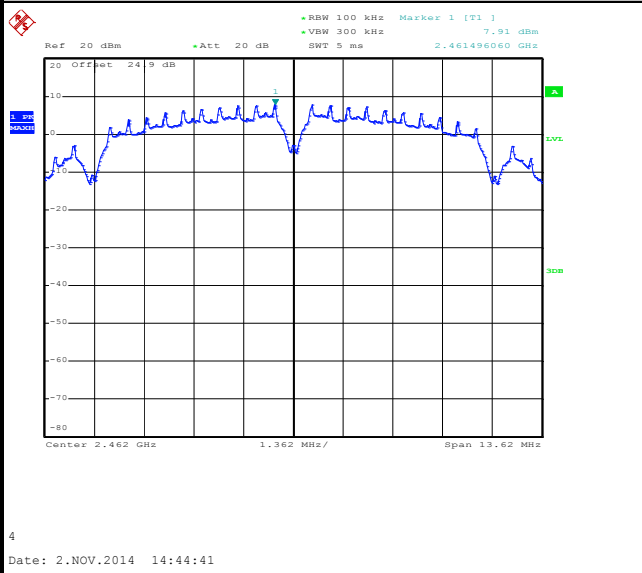


High Channel Plot

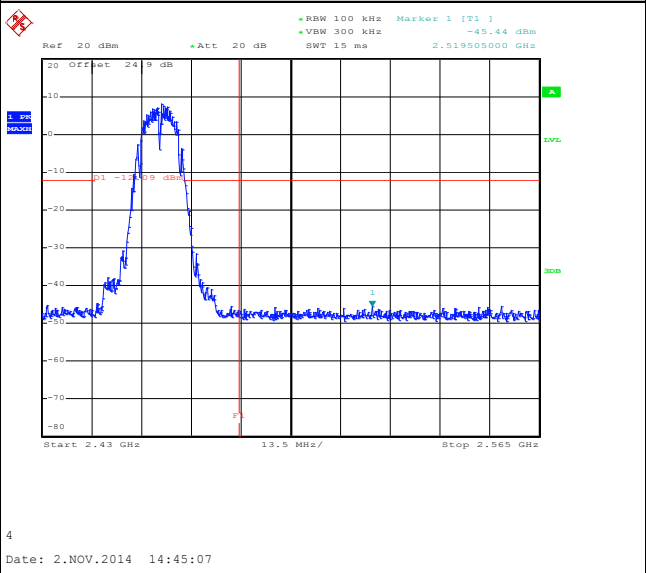

Spurious Emission 30MHz~3GHz

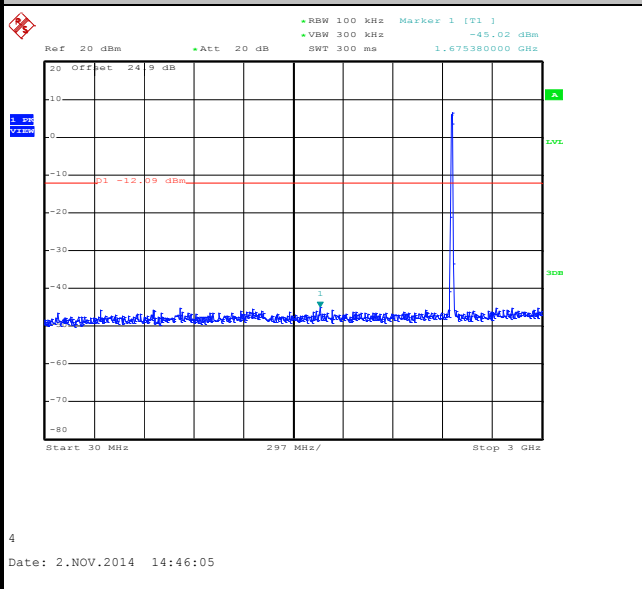

Spurious Emission 2GHz~25GHz

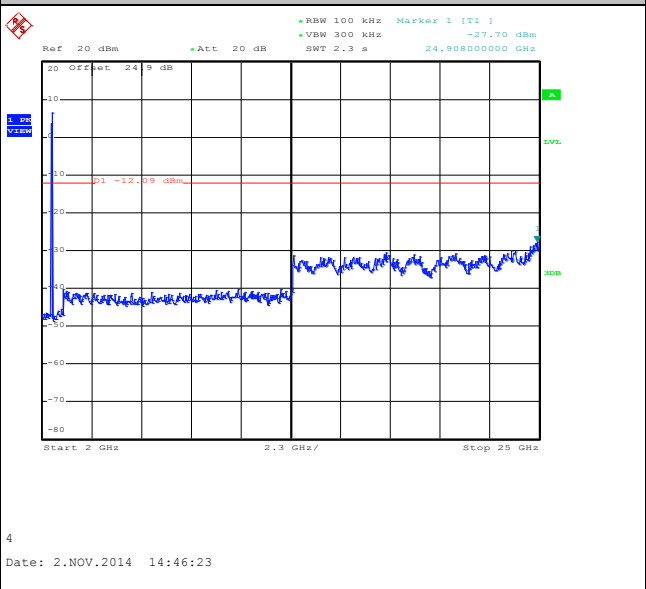





Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~55%
Test Channel :	01	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11g Channel 01


100kHz PSD reference Level

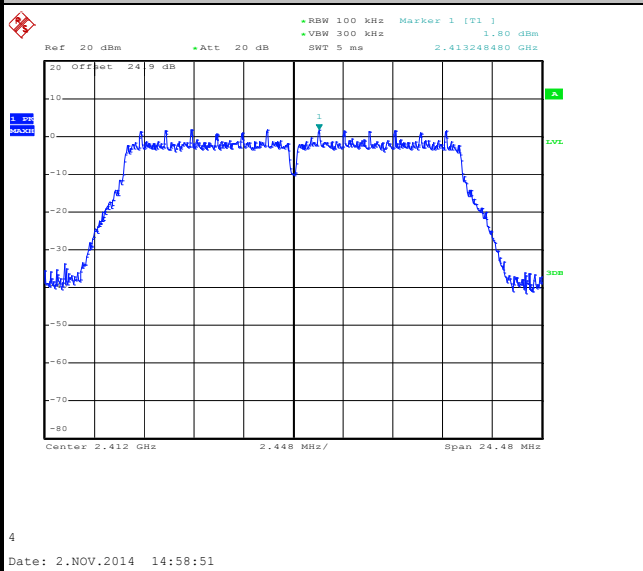


Low Channel Plot

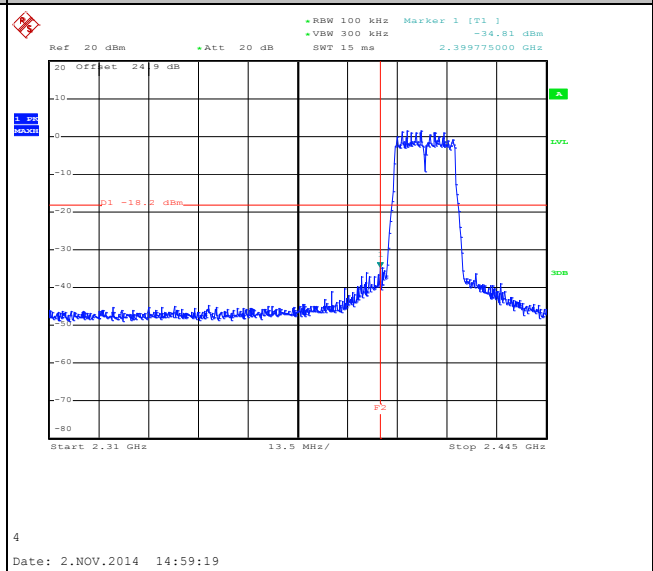

Spurious Emission 30MHz~3GHz

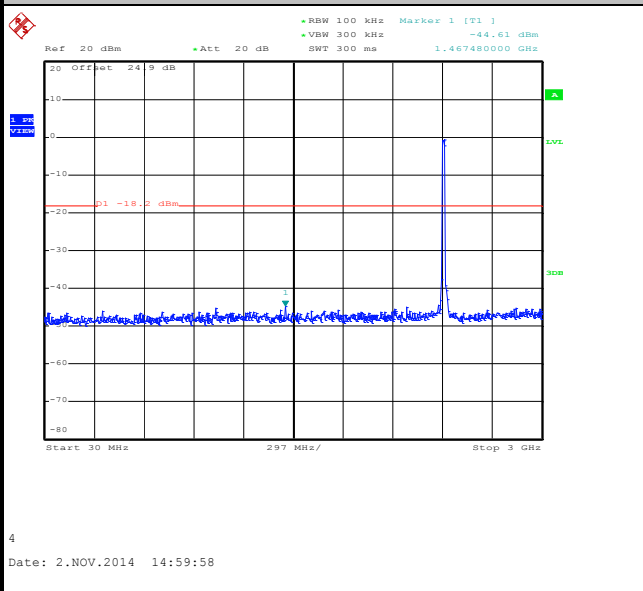

Spurious Emission 2GHz~25GHz

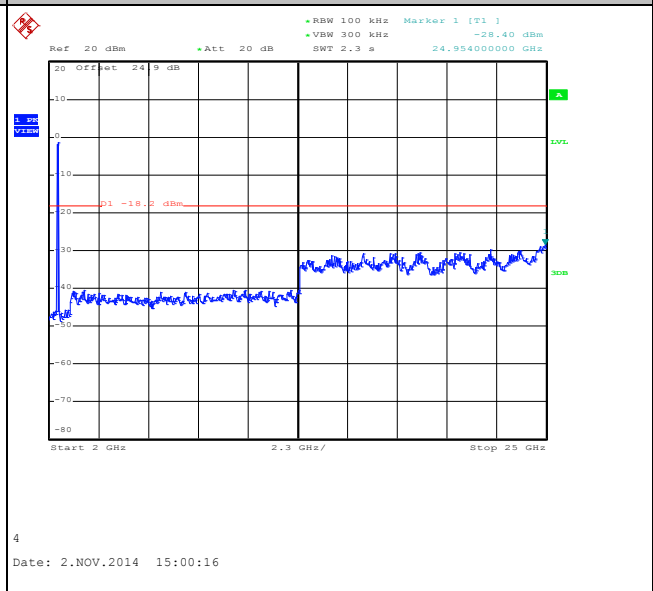





Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz Mid.	Relative Humidity :	45~55%
Test Channel :	06	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11g Channel 06


100kHz PSD reference Level

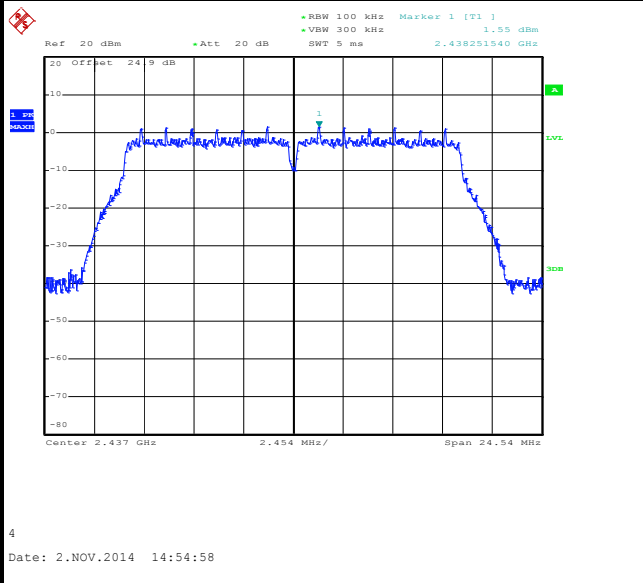

Spurious Emission 30MHz~3GHz

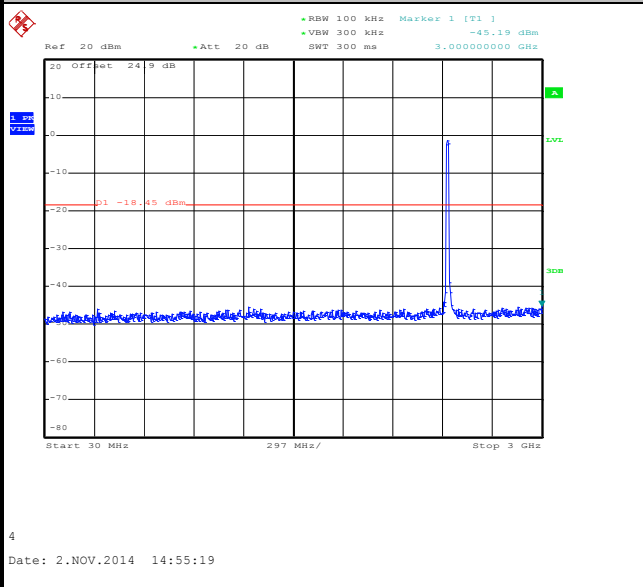

Spurious Emission 2GHz~25GHz

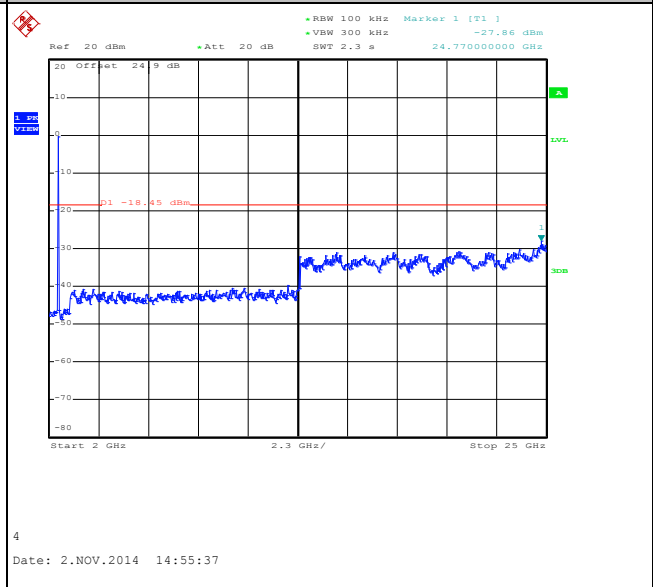





Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~55%
Test Channel :	11	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11g Channel 11


100kHz PSD reference Level

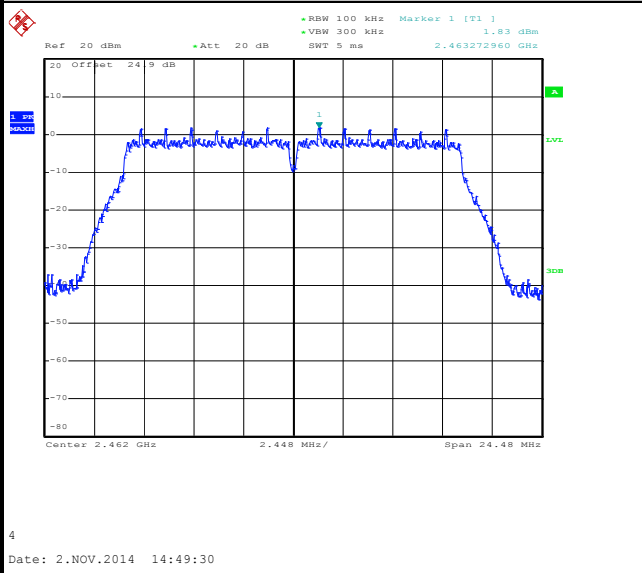


High Channel Plot

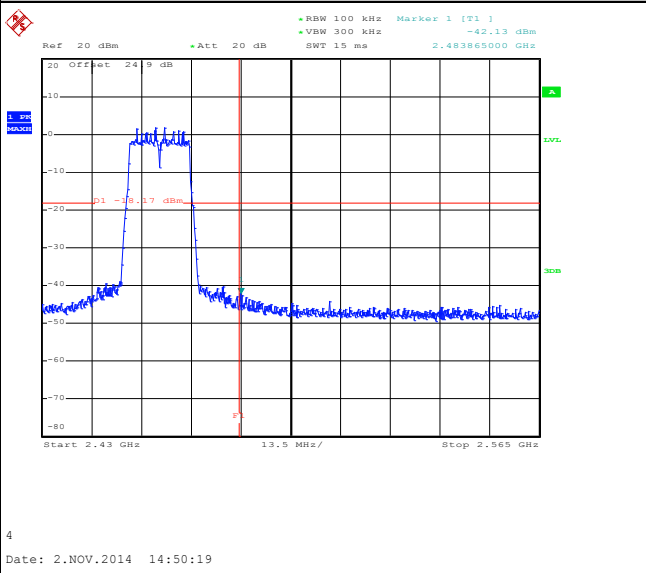

Spurious Emission 30MHz~3GHz

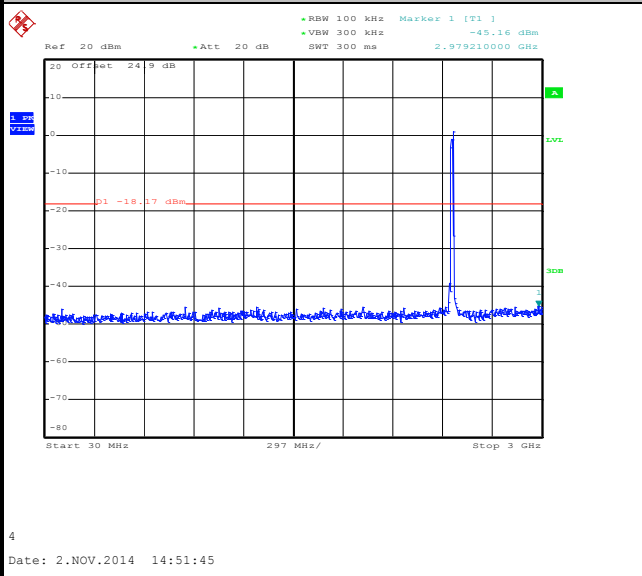

Spurious Emission 2GHz~25GHz

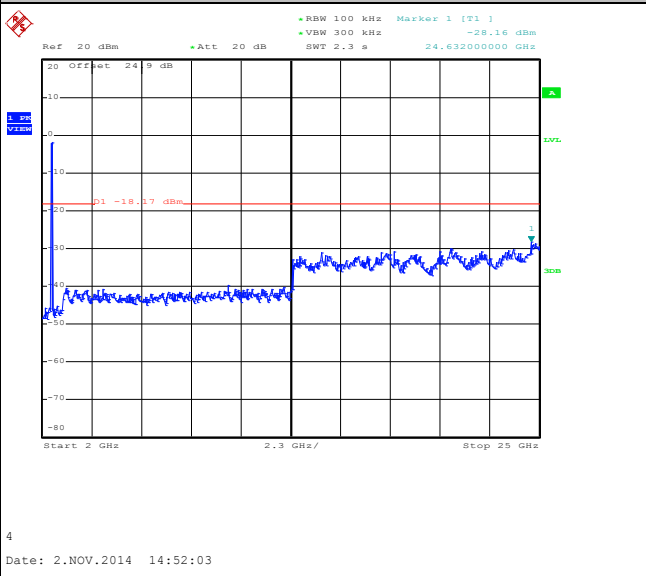





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~55%
Test Channel :	01	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

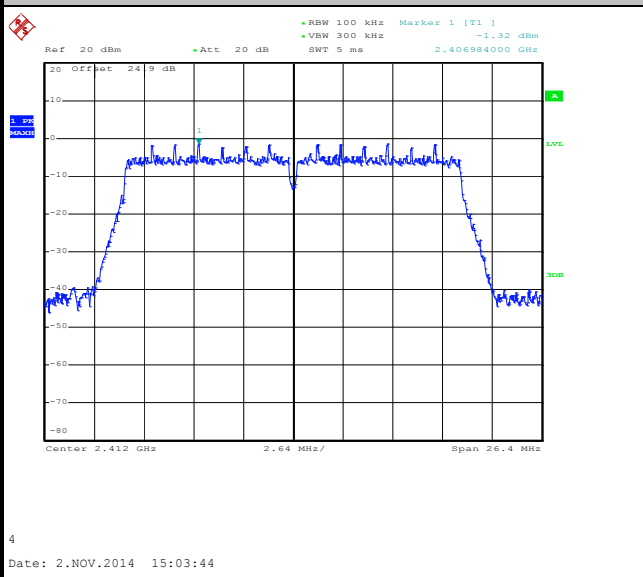


Low Channel Plot

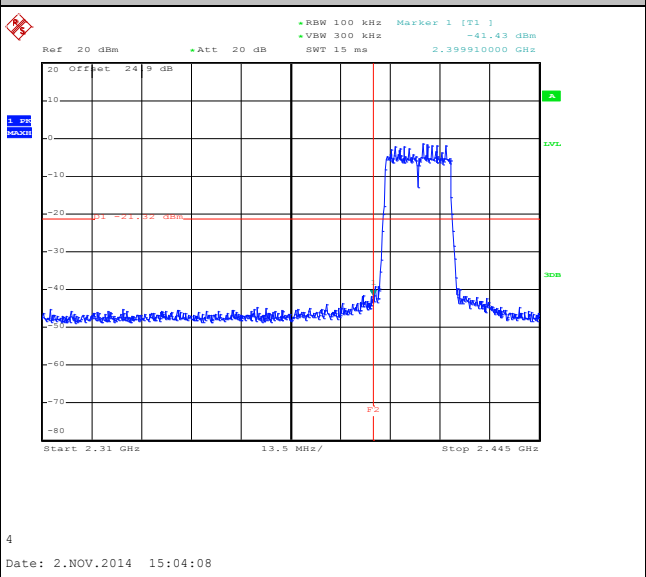

Spurious Emission 30MHz~3GHz

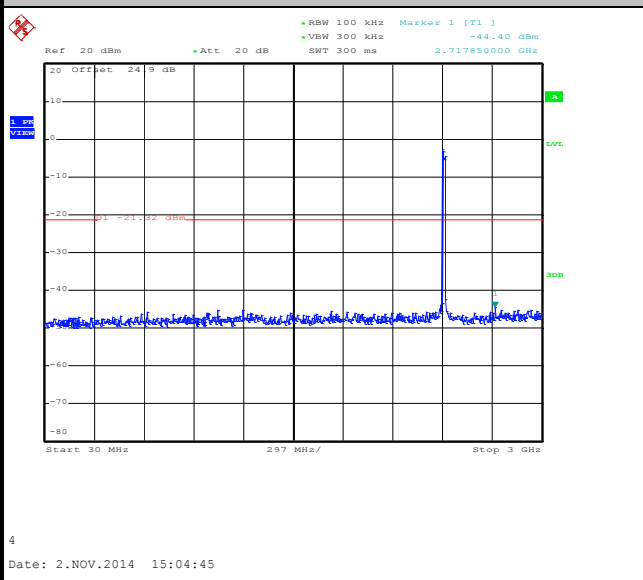

Spurious Emission 2GHz~25GHz

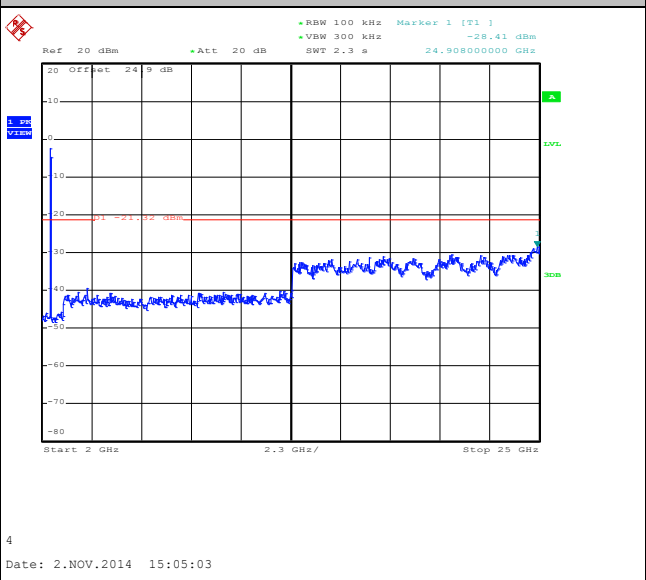





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz Mid.	Relative Humidity :	45~55%
Test Channel :	06	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

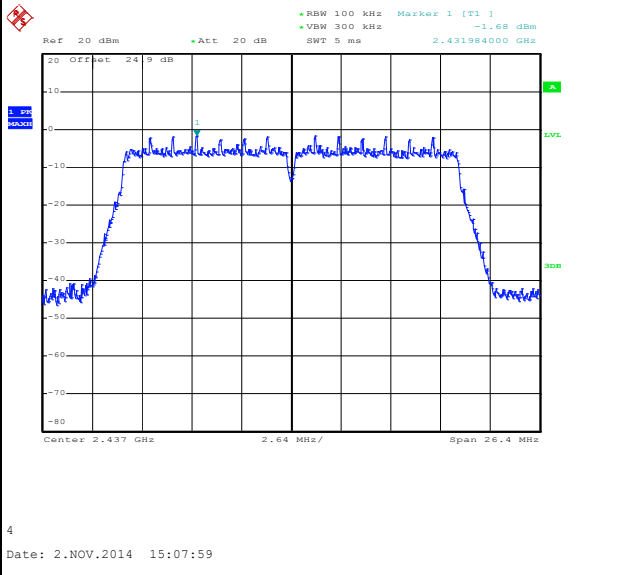

Spurious Emission 30MHz~3GHz

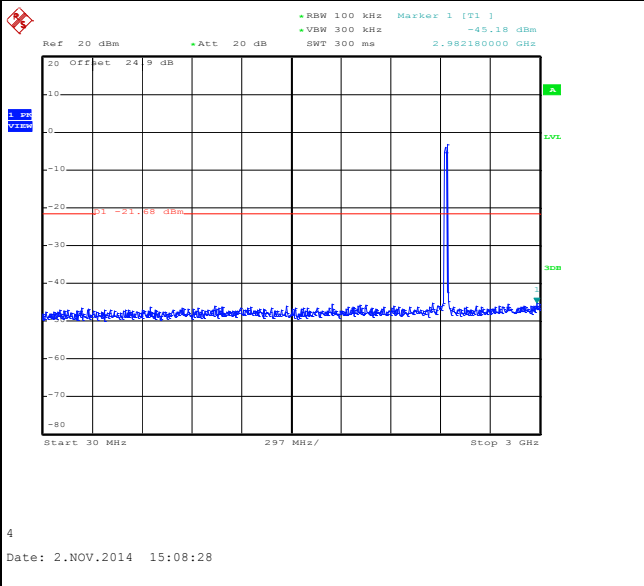

Spurious Emission 2GHz~25GHz

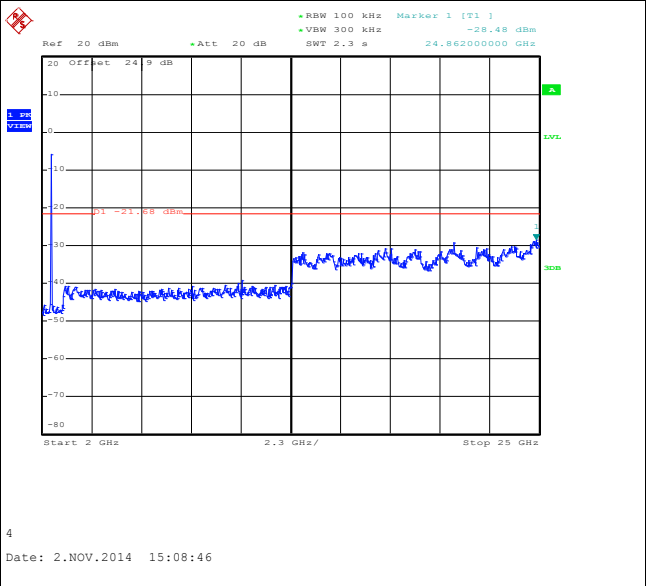





Test Mode :	802.11n HT20	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~55%
Test Channel :	11	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

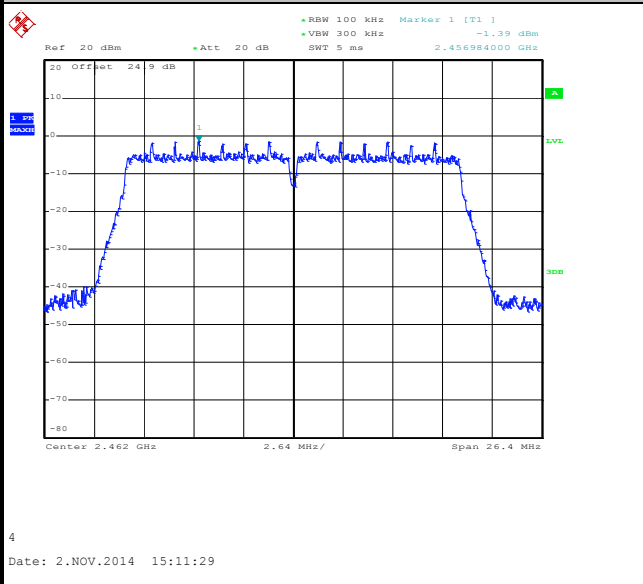


High Channel Plot

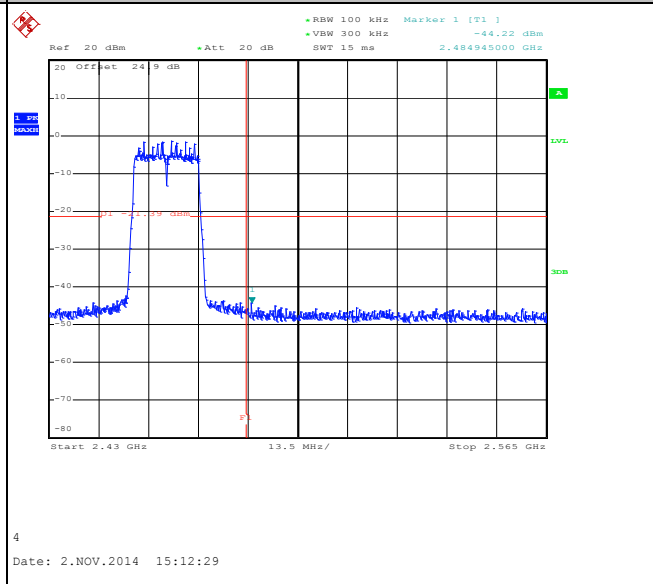

Spurious Emission 30MHz~3GHz

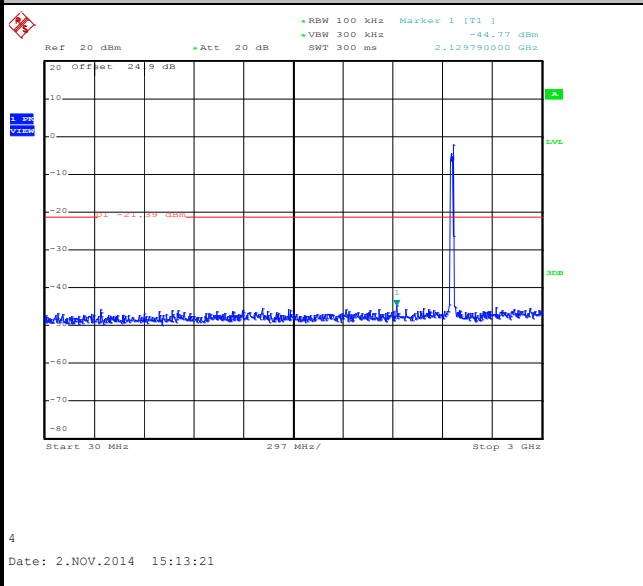

Spurious Emission 2GHz~25GHz

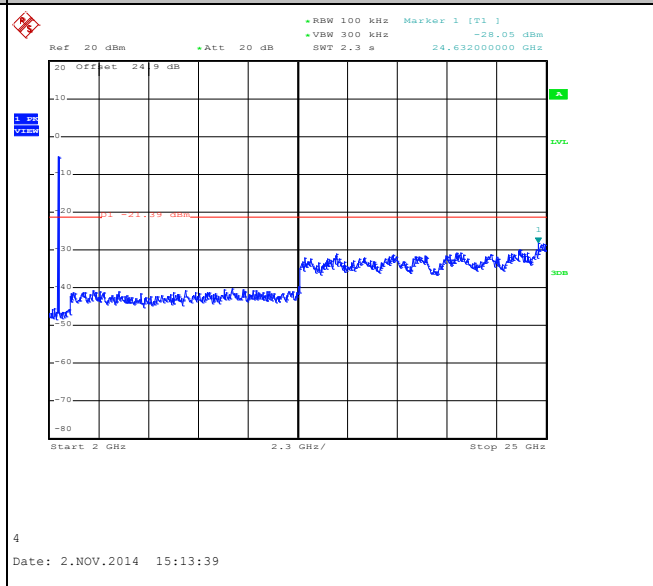





Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Low	Relative Humidity :	45~55%
Test Channel :	03	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT40 Channel 03


100kHz PSD reference Level

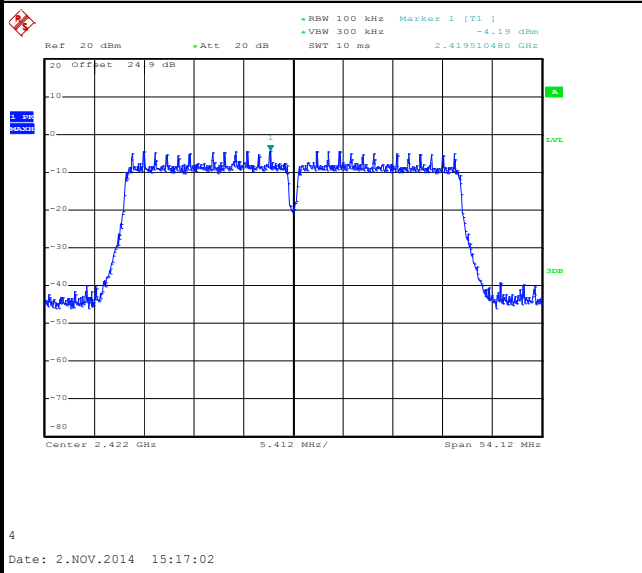


Low Channel Plot

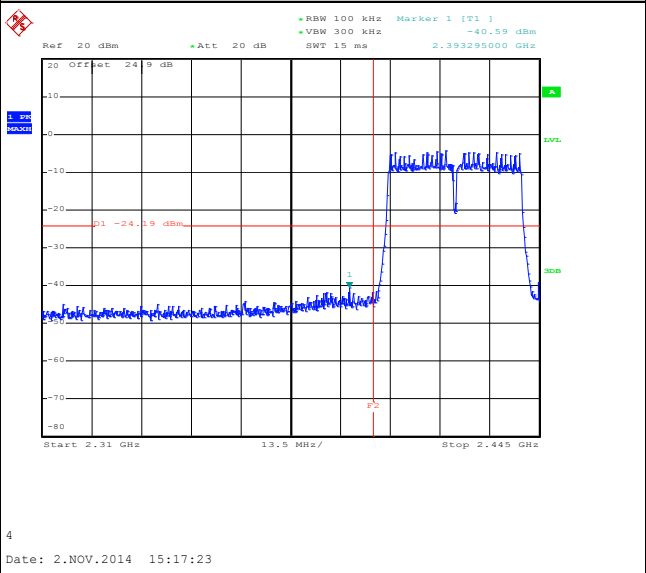

Spurious Emission 30MHz~3GHz

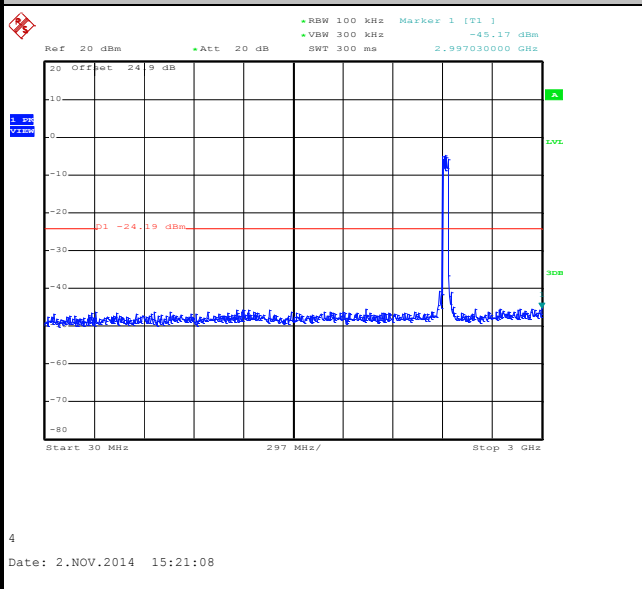

Spurious Emission 2GHz~25GHz

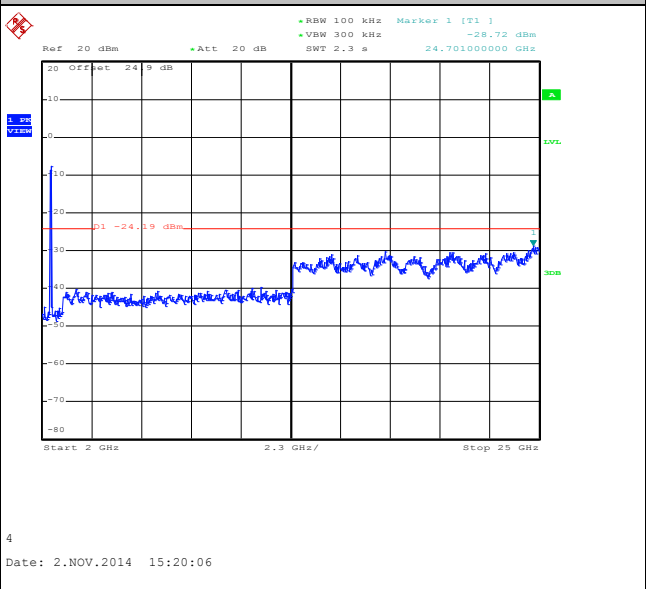





Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz Mid.	Relative Humidity :	45~55%
Test Channel :	06	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

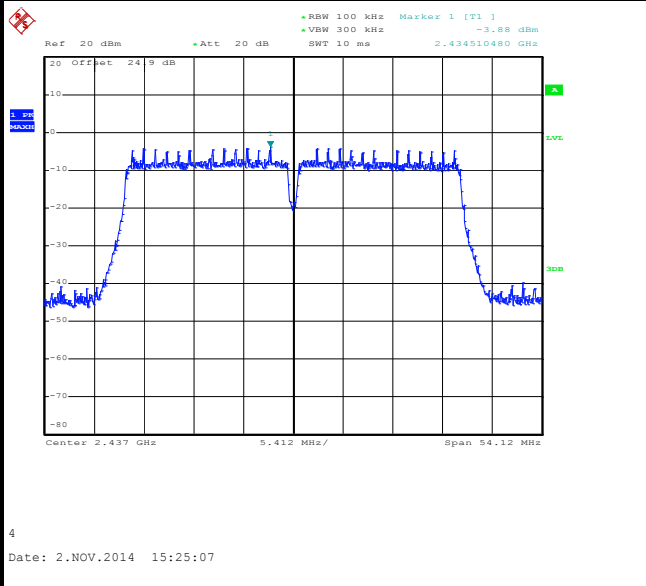

Spurious Emission 30MHz~3GHz

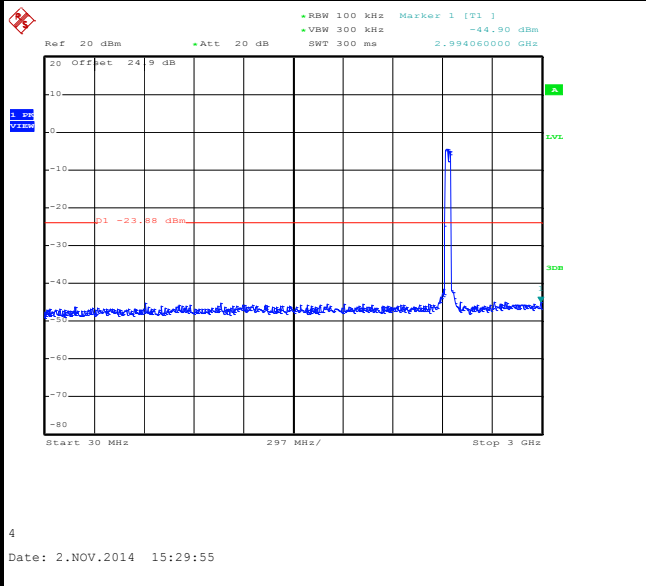

Spurious Emission 2GHz~25GHz

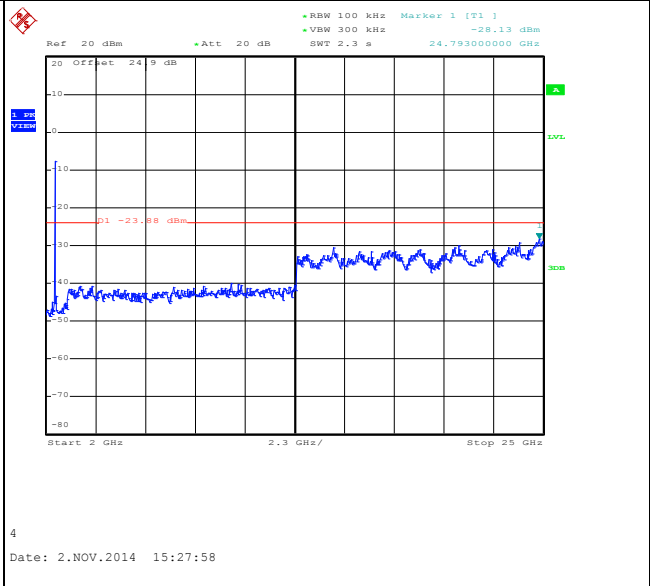





Test Mode :	802.11n HT40	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	45~55%
Test Channel :	09	Test Engineer :	Stuart Lin and Derek Hsu

WLAN 802.11n HT40 Channel 09


100kHz PSD reference Level

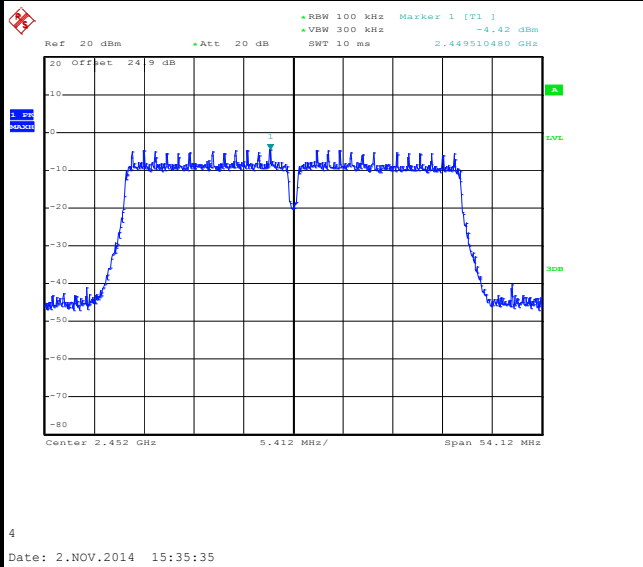


High Channel Plot

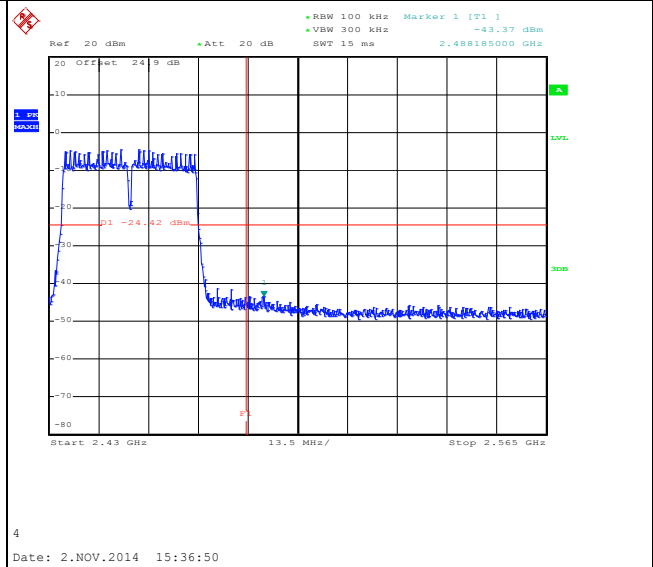

Spurious Emission 30MHz~3GHz

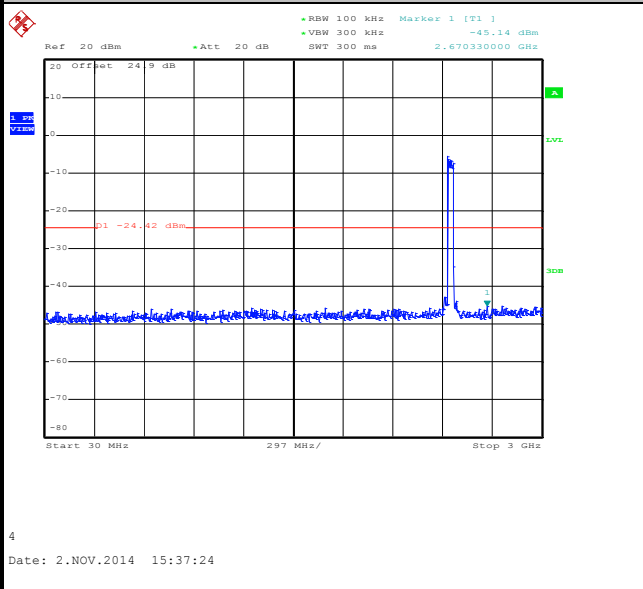

Spurious Emission 2GHz~25GHz

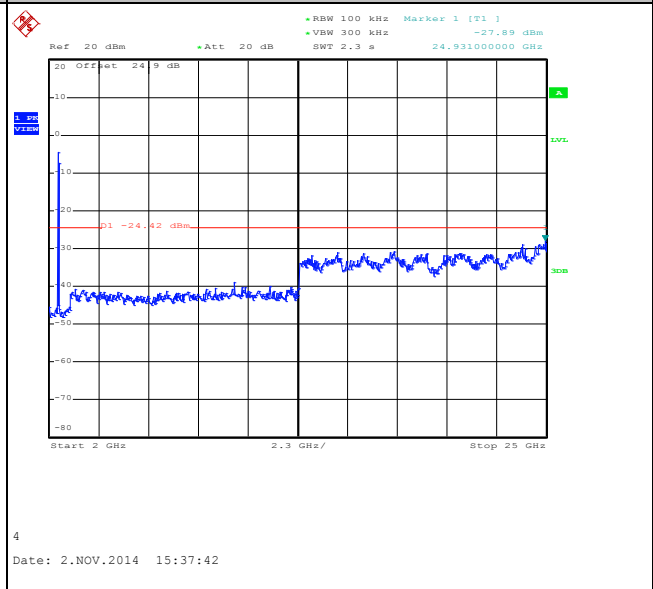



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle (%)	T(μs)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	88.54	1390.00	0.72	1kHz
2.4GHz 802.11n HT20	88.44	1300.00	0.77	1kHz
2.4GHz 802.11n HT40	79.13	652.00	1.53	2kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

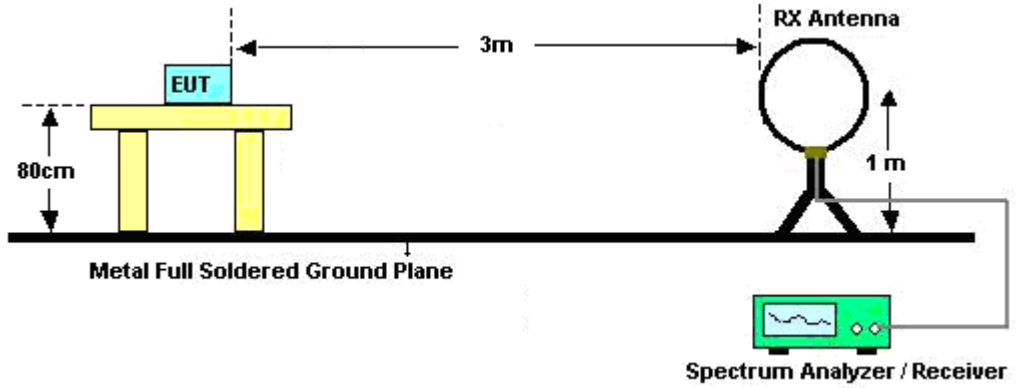

For radiated emissions from 30MHz to 1GHz

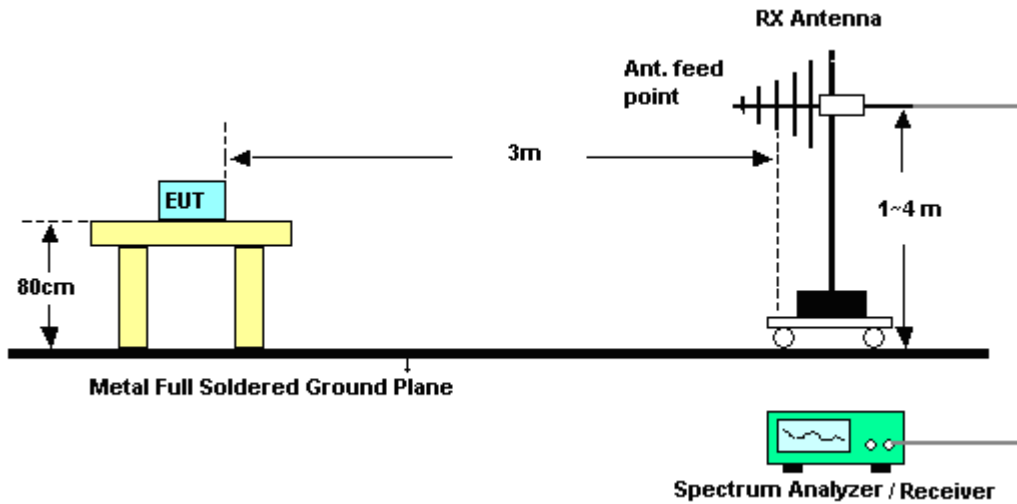

For radiated emissions above 1GHz

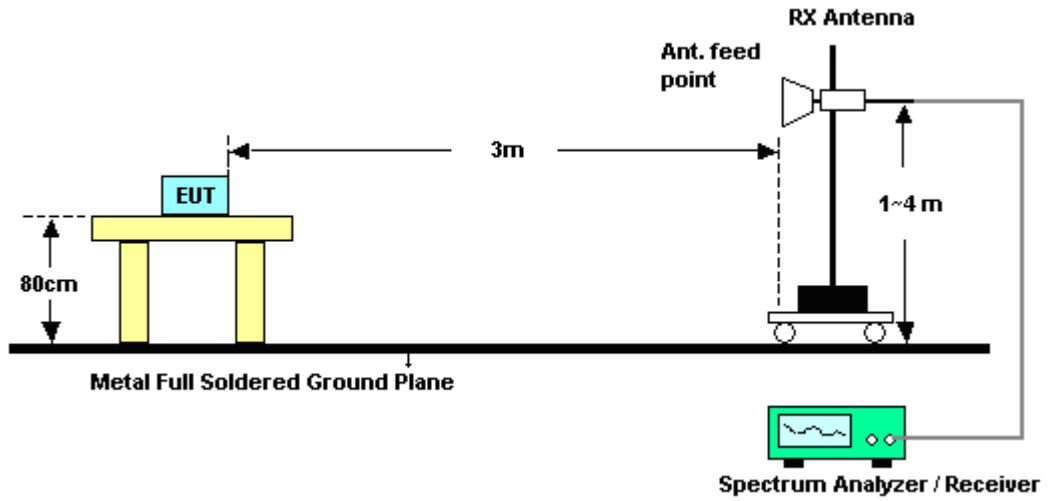

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result

Please refer to appendix A as below.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

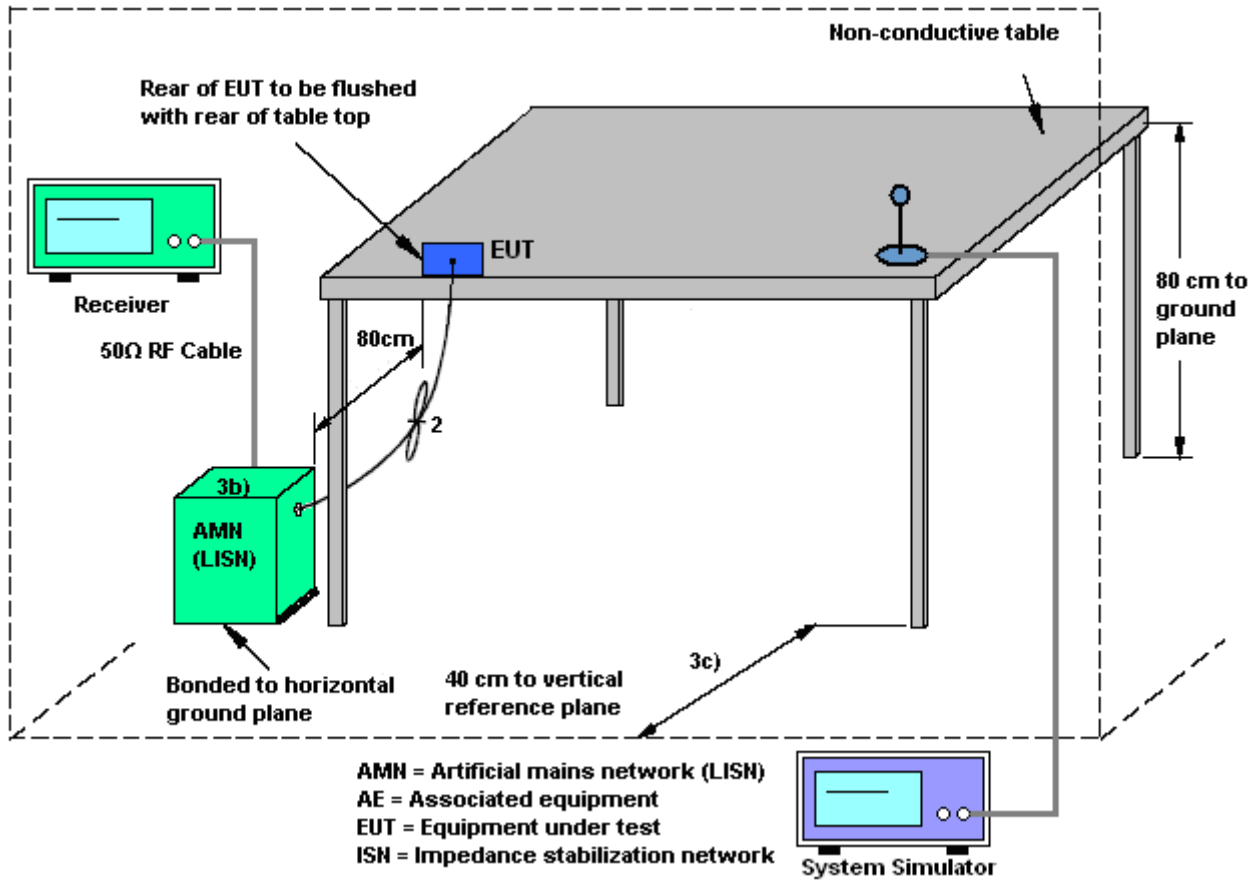



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable 1 (Charging from Adapter) + MP3		

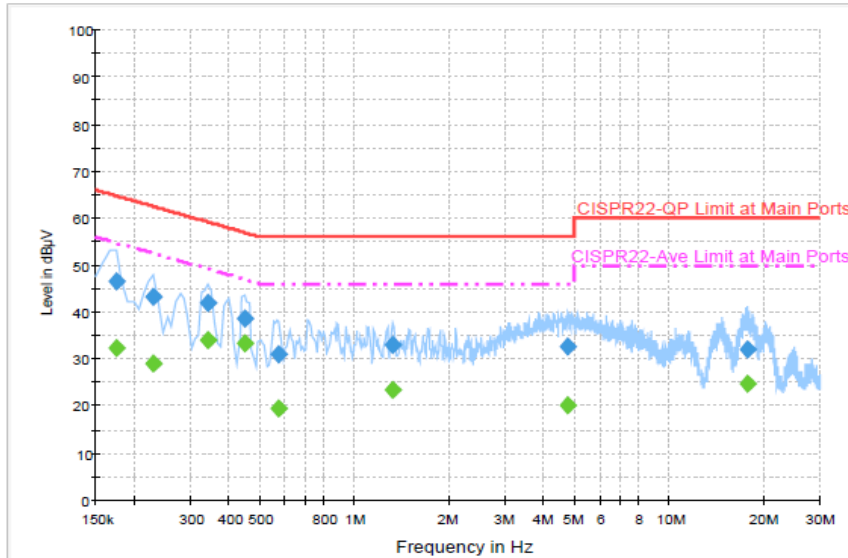

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	46.5	Off	L1	19.4	18.3	64.8
0.230000	43.1	Off	L1	19.5	19.3	62.4
0.342000	42.0	Off	L1	19.5	17.2	59.2
0.446000	38.6	Off	L1	19.5	18.3	56.9
0.574000	30.9	Off	L1	19.5	25.1	56.0
1.318000	32.9	Off	L1	19.5	23.1	56.0
4.766000	32.8	Off	L1	19.6	23.2	56.0
17.694000	32.1	Off	L1	19.9	27.9	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.174000	32.4	Off	L1	19.4	22.4	54.8
0.230000	29.0	Off	L1	19.5	23.4	52.4
0.342000	34.1	Off	L1	19.5	15.1	49.2
0.446000	33.4	Off	L1	19.5	13.5	46.9
0.574000	19.5	Off	L1	19.5	26.5	46.0
1.318000	23.3	Off	L1	19.5	22.7	46.0
4.766000	20.0	Off	L1	19.6	26.0	46.0
17.694000	24.9	Off	L1	19.9	25.1	50.0



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Eric Jeng	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable 1 (Charging from Adapter) + MP3		

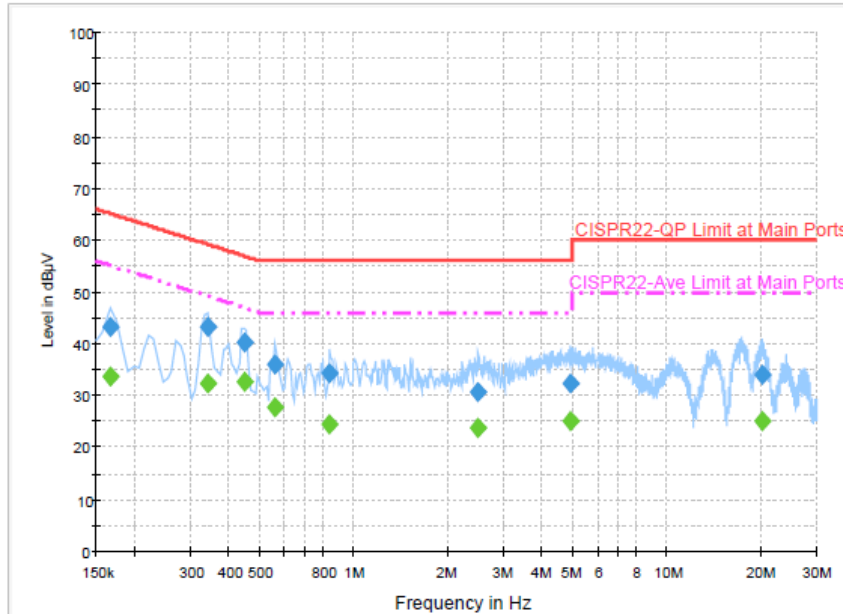

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	43.3	Off	N	19.5	21.9	65.2
0.342000	43.3	Off	N	19.5	15.9	59.2
0.446000	40.2	Off	N	19.5	16.7	56.9
0.558000	35.9	Off	N	19.5	20.1	56.0
0.838000	34.3	Off	N	19.5	21.7	56.0
2.494000	30.9	Off	N	19.5	25.1	56.0
4.902000	32.3	Off	N	19.6	23.7	56.0
20.078000	33.9	Off	N	20.0	26.1	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	33.7	Off	N	19.5	21.5	55.2
0.342000	32.3	Off	N	19.5	16.9	49.2
0.446000	32.5	Off	N	19.5	14.4	46.9
0.558000	27.8	Off	N	19.5	18.2	46.0
0.838000	24.4	Off	N	19.5	21.6	46.0
2.494000	23.7	Off	N	19.5	22.3	46.0
4.902000	25.0	Off	N	19.6	21.0	46.0
20.078000	25.1	Off	N	20.0	24.9	50.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Oct. 27, 2014 ~ Nov. 02, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Aug. 09, 2014	Oct. 27, 2014 ~ Nov. 02, 2014	Aug. 08, 2015	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Aug. 09, 2014	Oct. 27, 2014 ~ Nov. 02, 2014	Aug. 08, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 06, 2014	Oct. 27, 2014 ~ Nov. 02, 2014	May 05, 2015	Conducted (TH02-HY)
RF cable	WOKEN	S05	S05-130708-038	N/A	Jan. 22, 2014	Oct. 27, 2014 ~ Nov. 02, 2014	Jan. 21, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Aug. 29, 2015	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Dec. 02, 2012	Oct. 28, 2014 ~ Oct. 30, 2014	Dec. 01, 2014	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Aug. 18, 2015	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Oct. 02, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Oct. 01, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1 GHz~26.5 GHz	Nov. 29, 2013	Oct. 28, 2014 ~ Oct. 30, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30-10P	1590075	DC~18 GHz	Apr. 21, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Apr. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Oct. 28, 2014 ~ Oct. 30, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Oct. 28, 2014 ~ Oct. 30, 2014	N/A	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 06, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	May 05, 2015	Radiation (03CH07-HY)
LF RF Cable	Warison+HUBER SUHNER	WCBA-WC 04NM.NM2	N/A	30MHz~1GHz	Nov. 28, 2013	Oct. 28, 2014 ~ Oct. 30, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
HF RF Cable	HUBER SUHNER	SUCOFLEX 104	38411/6	1GHz~26.5GHz	Nov. 28, 2013	Oct. 28, 2014 ~ Oct. 30, 2014	Nov. 27, 2014	Radiation (03CH07-HY)
Test Software	Audix	E3 V6.0	N/A	N/A	N/A	Oct. 28, 2014 ~ Oct. 30, 2014	N/A	Radiation (03CH07-HY)
Low Pass Filter	Wainwright Instruments GmbH	WLKS1200-8SS	SN3	1.2G LPF	Oct. 01, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Sep. 30, 2015	Radiation (03CH07-HY)
High Pass Filter	Microwave Circuits	H3G018G1	SN477220	3G HPF	Oct. 01, 2014	Oct. 28, 2014 ~ Oct. 30, 2014	Sep. 30, 2015	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 15, 2013	Nov. 01, 2014	Nov. 14, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Nov. 01, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 04, 2013	Nov. 01, 2014	Dec. 03, 2014	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	Nov. 01, 2014	N/A	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Nov. 01, 2014	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 23, 2014	Nov. 01, 2014	Apr. 22, 2015	Conduction (CO05-HY)
LF Cable	Shuner	RG-402	N/A	N/A	Oct. 07, 2014	Nov. 01, 2014	Oct. 06, 2015	Conduction (CO05-HY)

Note: Test equipment calibration is traceable to the procedure of ISO17025.



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------



Appendix A. Radiated Spurious Emission

Test Engineer :	Nick Yu, Ken Wu, and Derreck Chen	Temperature :	23~25°C
		Relative Humidity :	48~51%

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11b CH 01 2412MHz		2379.57	58.41	-15.59	74	53.65	32.16	6.87	34.27	196	255	P	H	
		2387.22	46.06	-7.94	54	41.24	32.18	6.91	34.27	196	255	A	H	
	*	2410.69	109.07	-	-	104.24	32.2	6.93	34.3	196	255	P	H	
	*	2411.27	105.2	-	-	100.37	32.2	6.93	34.3	196	255	A	H	
													H	
													H	
			2388.84	60.84	-13.16	74	56.02	32.18	6.91	34.27	100	296	P	V
			2387.49	47.43	-6.57	54	42.61	32.18	6.91	34.27	100	296	A	V
	*		2410.69	110.24	-	-	105.41	32.2	6.93	34.3	100	296	P	V
	*		2411.27	106.42	-	-	101.59	32.2	6.93	34.3	100	296	A	V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 06 2437MHz		2363.73	58.85	-15.15	74	54.1	32.13	6.87	34.25	129	246	P	H
		2385.69	45.93	-8.07	54	41.11	32.18	6.91	34.27	129	246	A	H
	*	2435.66	109.97	-	-	105.15	32.22	6.95	34.35	129	246	P	H
	*	2436.24	106.2	-	-	101.38	32.22	6.95	34.35	129	246	A	H
		2494.56	59.31	-14.69	74	54.49	32.3	7	34.48	129	246	P	H
		2498.56	45.93	-8.07	54	41.11	32.3	7	34.48	129	246	A	H
		2378.85	60.59	-13.41	74	55.83	32.16	6.87	34.27	100	295	P	V
		2385.69	47.11	-6.89	54	42.29	32.18	6.91	34.27	100	295	A	V
	*	2438.33	110.17	-	-	105.33	32.24	6.95	34.35	100	295	P	V
	*	2437.74	106.35	-	-	101.51	32.24	6.95	34.35	100	295	A	V
		2490.64	59.53	-14.47	74	54.66	32.3	7	34.43	100	295	P	V
		2488.16	45.8	-8.2	54	40.93	32.3	7	34.43	100	295	A	V
802.11b CH 11 2462MHz	*	2460.71	109.78	-	-	104.93	32.26	6.98	34.39	127	247	P	H
	*	2461.29	105.92	-	-	101.07	32.26	6.98	34.39	127	247	A	H
		2485.12	59.81	-14.19	74	54.96	32.28	7	34.43	127	247	P	H
		2484	46.26	-7.74	54	41.41	32.28	7	34.43	127	247	A	H
													H
													H
	*	2460.71	109.22	-	-	104.37	32.26	6.98	34.39	100	3	P	V
	*	2461.29	105.43	-	-	100.58	32.26	6.98	34.39	100	3	A	V
		2487	58.91	-15.09	74	54.06	32.28	7	34.43	100	3	P	V
		2483.52	46.21	-7.79	54	41.36	32.28	7	34.43	100	3	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	42.53	-31.47	74	58.42	34.26	8.78	58.93	100	0	P	H
		7236	45.87	-43.2	89.07	57.02	35.6	10.91	57.66	100	0	P	H
		9648	43.03	-46.04	89.07	51.39	36.66	13.68	58.7	100	0	P	H
													H
		4824	41.5	-32.5	74	57.39	34.26	8.78	58.93	100	0	P	V
		7236	46.62	-43.62	90.24	57.77	35.6	10.91	57.66	100	0	P	V
		9648	43.47	-46.77	90.24	51.83	36.66	13.68	58.7	100	0	P	V
802.11b CH 06 2437MHz		4872	40.3	-33.7	74	55.95	34.3	8.88	58.83	100	0	P	H
		7308	45.04	-28.96	74	56.18	35.6	10.99	57.73	100	0	P	H
		9747	43.92	-46.06	89.98	52.19	36.76	13.7	58.73	100	0	P	H
													H
		4872	41.19	-32.81	74	56.84	34.3	8.88	58.83	100	0	P	V
		7308	44.77	-29.23	74	55.91	35.6	10.99	57.73	100	0	P	V
		9747	44.28	-45.89	90.17	52.55	36.76	13.7	58.73	100	0	P	V
802.11b CH 11 2462MHz		4924	40.73	-33.27	74	56.08	34.34	9.04	58.73	100	0	P	H
		7386	44.49	-29.51	74	55.62	35.6	11.07	57.8	100	0	P	H
		9848	45.03	-44.75	89.78	53.24	36.84	13.7	58.75	100	0	P	H
													H
		4924	41.96	-32.04	74	57.31	34.34	9.04	58.73	100	0	P	V
		7386	43.66	-30.34	74	54.79	35.6	11.07	57.8	100	0	P	V
		9848	44.82	-44.4	89.22	53.03	36.84	13.7	58.75	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11g CH 01 2412MHz		2387.67	61.15	-12.85	74	56.33	32.18	6.91	34.27	100	297	P	H	
		2390	47.59	-6.41	54	42.8	32.18	6.91	34.3	100	297	A	H	
	*	2410	105.79	-	-	100.96	32.2	6.93	34.3	100	297	P	H	
	*	2410	95.46	-	-	90.63	32.2	6.93	34.3	100	297	A	H	
													H	
													H	
			2389.02	65.89	-8.11	74	61.07	32.18	6.91	34.27	123	353	P	V
			2389.92	50.26	-3.74	54	45.47	32.18	6.91	34.3	123	353	A	V
	*		2408.68	108.38	-	-	103.55	32.2	6.93	34.3	123	353	P	V
	*		2408.77	98.03	-	-	93.2	32.2	6.93	34.3	123	353	A	V
802.11g CH 06 2437MHz		2377.77	59.1	-14.9	74	54.34	32.16	6.87	34.27	156	269	P	H	
		2376.96	46.24	-7.76	54	41.48	32.16	6.87	34.27	156	269	A	H	
	*	2434	105.42	-	-	100.6	32.22	6.95	34.35	156	269	P	H	
	*	2434	94.93	-	-	90.11	32.22	6.95	34.35	156	269	A	H	
			2493.32	58.72	-15.28	74	53.9	32.3	7	34.48	156	269	P	H
			2496.48	45.53	-8.47	54	40.71	32.3	7	34.48	156	269	A	H
			2381.55	59.51	-14.49	74	54.71	32.16	6.91	34.27	122	6	P	V
			2387.58	46.71	-7.29	54	41.89	32.18	6.91	34.27	122	6	A	V
	*		2434	109.08	-	-	104.26	32.22	6.95	34.35	122	6	P	V
	*		2434	98.15	-	-	93.33	32.22	6.95	34.35	122	6	A	V
			2483.96	60.23	-13.77	74	55.38	32.28	7	34.43	122	6	P	V
		2485.12	46.8	-7.2	54	41.95	32.28	7	34.43	122	6	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 11 2462MHz	*	2458	106.72	-	-	101.87	32.26	6.98	34.39	126	257	P	H
	*	2459.37	96.24	-	-	91.39	32.26	6.98	34.39	126	257	A	H
		2484.72	67	-7	74	62.15	32.28	7	34.43	126	257	P	H
		2484.64	47.97	-6.03	54	43.12	32.28	7	34.43	126	257	A	H
													H
													H
	*	2458.87	107.96	-	-	103.11	32.26	6.98	34.39	122	357	P	V
	*	2458.87	97.87	-	-	93.02	32.26	6.98	34.39	122	357	A	V
		2488.6	67.42	-6.58	74	62.55	32.3	7	34.43	122	357	P	V
		2483.68	48.11	-5.89	54	43.26	32.28	7	34.43	122	357	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	38.99	-35.01	74	54.88	34.26	8.78	58.93	100	0	P	H
		7236	43.85	-41.94	85.79	55	35.6	10.91	57.66	100	0	P	H
		9648	42.44	-43.35	85.79	50.8	36.66	13.68	58.7	100	0	P	H
													H
		4824	39.75	-34.25	74	55.64	34.26	8.78	58.93	100	0	P	V
		7236	44.96	-43.42	88.38	56.11	35.6	10.91	57.66	100	0	P	V
		9648	42.25	-46.13	88.38	50.61	36.66	13.68	58.7	100	0	P	V
802.11g CH 06 2437MHz		4872	39.25	-34.75	74	54.9	34.3	8.88	58.83	100	0	P	H
		7311	44.71	-29.29	74	55.85	35.6	10.99	57.73	100	0	P	H
		9747	43.39	-42.03	85.42	51.66	36.76	13.7	58.73	100	0	P	H
													H
		4872	39.34	-34.66	74	54.99	34.3	8.88	58.83	100	0	P	V
		7311	45.47	-28.53	74	56.61	35.6	10.99	57.73	100	0	P	V
		9747	43.85	-45.23	89.08	52.12	36.76	13.7	58.73	100	0	P	V
802.11g CH 11 2462MHz		4923	40.77	-33.23	74	56.17	34.34	8.99	58.73	100	0	P	H
		7386	45.16	-28.84	74	56.29	35.6	11.07	57.8	100	0	P	H
		9849	44.62	-42.1	86.72	52.82	36.86	13.7	58.76	100	0	P	H
													H
		4923	40.11	-33.89	74	55.51	34.34	8.99	58.73	100	0	P	V
		7386	46.96	-27.04	74	58.09	35.6	11.07	57.8	100	0	P	V
		9849	43.62	-44.34	87.96	51.82	36.86	13.7	58.76	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 01 2412MHz		2378.4	58.78	-15.22	74	54.02	32.16	6.87	34.27	102	254	P	H	
		2386.5	45.88	-8.12	54	41.06	32.18	6.91	34.27	102	254	A	H	
	*	2414.86	100.92	-	-	96.09	32.2	6.93	34.3	102	254	P	H	
	*	2414	90.35	-	-	85.52	32.2	6.93	34.3	102	254	A	H	
													H	
														H
			2389.83	63.4	-10.6	74	58.61	32.18	6.91	34.3	100	5	P	V
			2390	48.82	-5.18	54	44.03	32.18	6.91	34.3	100	5	A	V
	*		2414	104.83	-	-	100	32.2	6.93	34.3	100	5	P	V
	*		2412	94.64	-	-	89.81	32.2	6.93	34.3	100	5	A	V
802.11n HT20 CH 06 2437MHz		2382.45	59.09	-14.91	74	54.29	32.16	6.91	34.27	100	227	P	H	
		2388.12	46.16	-7.84	54	41.34	32.18	6.91	34.27	100	227	A	H	
	*	2441.5	105.47	-	-	100.67	32.24	6.95	34.39	100	227	P	H	
	*	2440.08	95.37	-	-	90.53	32.24	6.95	34.35	100	227	A	H	
		2483.96	58.96	-15.04	74	54.11	32.28	7	34.43	100	227	P	H	
		2485.96	45.88	-8.12	54	41.03	32.28	7	34.43	100	227	A	H	
		2389.65	60.77	-13.23	74	55.95	32.18	6.91	34.27	100	4	P	V	
		2389.83	48.19	-5.81	54	43.4	32.18	6.91	34.3	100	4	A	V	
	*	2438.33	108.44	-	-	103.6	32.24	6.95	34.35	100	4	P	V	
	*	2438	97.73	-	-	92.89	32.24	6.95	34.35	100	4	A	V	
	2491.28	58.89	-15.11	74	54.02	32.3	7	34.43	100	4	P	V		
	2486.64	46.22	-7.78	54	41.37	32.28	7	34.43	100	4	A	V		
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 11 2462MHz	*	2463.46	101.93	-	-	97.08	32.26	6.98	34.39	127	245	P	H
	*	2463.54	91.09	-	-	86.24	32.26	6.98	34.39	127	245	A	H
		2483.56	59.61	-14.39	74	54.76	32.28	7	34.43	127	245	P	H
		2484.92	45.84	-8.16	54	40.99	32.28	7	34.43	127	245	A	H
													H
													H
	*	2459.45	105.95	-	-	101.1	32.26	6.98	34.39	121	2	P	V
	*	2459.03	95.39	-	-	90.54	32.26	6.98	34.39	121	2	A	V
		2484.44	60.51	-13.49	74	55.66	32.28	7	34.43	121	2	P	V
		2483.6	47.4	-6.6	54	42.55	32.28	7	34.43	121	2	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	40.21	-33.79	74	56.1	34.26	8.78	58.93	100	0	P	H
		7236	41.52	-39.4	80.92	52.67	35.6	10.91	57.66	100	0	P	H
		9648	43.6	-37.32	80.92	51.96	36.66	13.68	58.7	100	0	P	H
													H
		4824	40.76	-33.24	74	56.65	34.26	8.78	58.93	100	0	P	V
		7236	41.95	-42.88	84.83	53.1	35.6	10.91	57.66	100	0	P	V
		9648	42.32	-42.51	84.83	50.68	36.66	13.68	58.7	100	0	P	V
													V
802.11n HT20 CH 06 2437MHz		4872	39.97	-34.03	74	55.62	34.3	8.88	58.83	100	0	P	H
		7311	41.28	-32.72	74	52.42	35.6	10.99	57.73	100	0	P	H
		9747	43.84	-41.63	85.47	52.11	36.76	13.7	58.73	100	0	P	H
													H
		4872	39.58	-34.42	74	55.23	34.3	8.88	58.83	100	0	P	V
		7311	41.54	-32.46	74	52.68	35.6	10.99	57.73	100	0	P	V
		9747	44.23	-44.21	88.44	52.5	36.76	13.7	58.73	100	0	P	V
													V
802.11n HT20 CH 11 2462MHz		4926	40.07	-33.93	74	55.42	34.34	9.04	58.73	100	0	P	H
		7386	41.41	-32.59	74	52.54	35.6	11.07	57.8	100	0	P	H
		9846	44.24	-37.69	81.93	52.45	36.84	13.7	58.75	100	0	P	H
													H
		4926	40.19	-33.81	74	55.54	34.34	9.04	58.73	100	0	P	V
		7386	41.22	-32.78	74	52.35	35.6	11.07	57.8	100	0	P	V
		9846	44.43	-41.52	85.95	52.64	36.84	13.7	58.75	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2387.94	64.15	-9.85	74	59.33	32.18	6.91	34.27	104	244	P	H
		2389.02	49.63	-4.37	54	44.81	32.18	6.91	34.27	104	244	A	H
	*	2420	100.24	-	-	95.44	32.22	6.93	34.35	104	244	P	H
	*	2420.04	90.24	-	-	85.44	32.22	6.93	34.35	104	244	A	H
		2486.76	58.23	-15.77	74	53.38	32.28	7	34.43	104	244	P	H
		2498.52	45.63	-8.37	54	40.81	32.3	7	34.48	104	244	A	H
		2388.84	66.58	-7.42	74	61.76	32.18	6.91	34.27	100	6	P	V
		2390	50.5	-3.5	54	45.71	32.18	6.91	34.3	100	6	A	V
	*	2420	100.96	-	-	96.16	32.22	6.93	34.35	100	6	P	V
	*	2419.71	90.9	-	-	86.1	32.22	6.93	34.35	100	6	A	V
		2496.8	58.91	-15.09	74	54.09	32.3	7	34.48	100	6	P	V
		2486.24	45.9	-8.1	54	41.05	32.28	7	34.43	100	6	A	V
802.11n HT40 CH 06 2437MHz		2376.78	58.76	-15.24	74	54	32.16	6.87	34.27	102	249	P	H
		2389.11	46.49	-7.51	54	41.67	32.18	6.91	34.27	102	249	A	H
	*	2439	100.8	-	-	95.96	32.24	6.95	34.35	102	249	P	H
	*	2439	90.28	-	-	85.44	32.24	6.95	34.35	102	249	A	H
		2488.8	60.13	-13.87	74	55.26	32.3	7	34.43	102	249	P	H
		2485.24	46.03	-7.97	54	41.18	32.28	7	34.43	102	249	A	H
		2388.3	61.21	-12.79	74	56.39	32.18	6.91	34.27	120	294	P	V
		2386.23	47.72	-6.28	54	42.9	32.18	6.91	34.27	120	294	A	V
	*	2441.75	104	-	-	99.2	32.24	6.95	34.39	120	294	P	V
	*	2441	93.14	-	-	88.34	32.24	6.95	34.39	120	294	A	V
		2489.92	62.66	-11.34	74	57.79	32.3	7	34.43	120	294	P	V
		2483.52	47.52	-6.48	54	42.67	32.28	7	34.43	120	294	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 09 2452MHz		2362.83	58.79	-15.21	74	54.04	32.13	6.87	34.25	128	247	P	H
		2389.83	45.94	-8.06	54	41.15	32.18	6.91	34.3	128	247	A	H
	*	2456.53	101.17	-	-	96.32	32.26	6.98	34.39	128	247	P	H
	*	2449.85	90.84	-	-	86.04	32.24	6.95	34.39	128	247	A	H
		2487.68	61.1	-12.9	74	56.23	32.3	7	34.43	128	247	P	H
		2484.48	47.82	-6.18	54	42.97	32.28	7	34.43	128	247	A	H
		2388.84	58.9	-15.1	74	54.08	32.18	6.91	34.27	100	5	P	V
		2381.28	46.37	-7.63	54	41.57	32.16	6.91	34.27	100	5	A	V
	*	2454	101.04	-	-	96.19	32.26	6.98	34.39	100	5	P	V
	*	2454	90.79	-	-	85.94	32.26	6.98	34.39	100	5	A	V
		2484.4	60.54	-13.46	74	55.69	32.28	7	34.43	100	5	P	V
		2483.52	47.63	-6.37	54	42.78	32.28	7	34.43	100	5	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4842	40.02	-33.98	74	55.8	34.28	8.83	58.89	100	0	P	H
		7266	42.21	-31.79	74	53.36	35.6	10.94	57.69	100	0	P	H
		9688	45.61	-34.63	80.24	53.94	36.69	13.69	58.71	100	0	P	H
													H
		4842	39.51	-34.49	74	55.29	34.28	8.83	58.89	100	0	P	V
		7266	40.88	-33.12	74	52.03	35.6	10.94	57.69	100	0	P	V
		9688	45.03	-35.93	80.96	53.36	36.69	13.69	58.71	100	0	P	V
													V
802.11n HT40 CH 06 2437MHz		4872	40.22	-33.78	74	55.87	34.3	8.88	58.83	200	0	P	H
		7311	41.42	-32.58	74	52.56	35.6	10.99	57.73	200	0	P	H
		9747	44.22	-36.58	80.8	52.49	36.76	13.7	58.73	100	0	P	H
													H
		4872	39.88	-34.12	74	55.53	34.3	8.88	58.83	100	0	P	V
		7311	41.31	-32.69	74	52.45	35.6	10.99	57.73	100	0	P	V
		9747	44.04	-39.96	84	52.31	36.76	13.7	58.73	100	0	P	V
													V
802.11n HT40 CH 09 2452MHz		4904	38.5	-35.5	74	53.94	34.33	8.99	58.76	100	0	P	H
		7356	38.94	-35.06	74	50.06	35.6	11.05	57.77	100	0	P	H
		9808	44.72	-36.45	81.17	52.94	36.81	13.71	58.74	100	0	P	H
													H
		4904	41.28	-32.72	74	56.72	34.33	8.99	58.76	100	0	P	V
		7356	41.02	-32.98	74	52.14	35.6	11.05	57.77	100	0	P	V
		9808	44.16	-36.88	81.04	52.38	36.81	13.71	58.74	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11b LF		47.82	21.13	-18.87	40	42.21	9.45	0.67	31.2	-	-	P	H	
		115.32	13.88	-29.62	43.5	32.81	11.13	1.08	31.14	-	-	P	H	
		265.98	14.43	-31.57	46	30.47	13.34	1.62	31	-	-	P	H	
		562.5	21.1	-24.9	46	29.34	19.92	2.59	30.75	-	-	P	H	
		762.7	25.15	-20.85	46	30.34	22.1	3.08	30.37	-	-	P	H	
		944.7	27.53	-18.47	46	30.12	24.35	3.45	30.39	145	5	P	H	
														H
														H
														H
														H
														H
														H
														H
			41.07	25.63	-14.37	40	42.9	13.3	0.63	31.2	103	64	P	V
			62.13	13.51	-26.49	40	37.99	6	0.78	31.26	-	-	P	V
			106.95	16.65	-26.85	43.5	36.17	10.62	1.03	31.17	-	-	P	V
			701.8	22.86	-23.14	46	29.64	20.68	2.94	30.4	-	-	P	V
			769.7	25.04	-20.96	46	30.21	22.1	3.09	30.36	-	-	P	V
			944.7	26.9	-19.1	46	29.49	24.35	3.45	30.39	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



15C Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11g LF		33.24	20.86	-19.14	40	34.44	17.24	0.56	31.38	-	-	P	H	
		47.82	20.11	-19.89	40	41.19	9.45	0.67	31.2	-	-	P	H	
		257.88	15.12	-30.88	46	30.86	13.68	1.58	31	-	-	P	H	
		477.8	19.1	-26.9	46	29.95	17.58	2.37	30.8	-	-	P	H	
		662.6	23.04	-22.96	46	30.31	20.33	2.87	30.47	-	-	P	H	
		926.5	27.8	-18.2	46	30.57	24.18	3.4	30.35	108	177	P	H	
														H
														H
														H
														H
														H
														H
			40.8	25.33	-14.67	40	42.6	13.3	0.63	31.2	141	31	P	V
			106.95	17.04	-26.46	43.5	36.56	10.62	1.03	31.17	-	-	P	V
			144.75	22.22	-21.28	43.5	40.62	11.5	1.2	31.1	-	-	P	V
			558.3	22.1	-23.9	46	30.32	19.98	2.57	30.77	-	-	P	V
			727	23.56	-22.44	46	29.11	21.84	3.01	30.4	-	-	P	V
			975.5	28.32	-25.68	54	30.21	24.92	3.49	30.3	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**15C Emission below 1GHz
2.4GHz WIFI 802.11n HT20 (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT20 LF		33.78	18.75	-21.25	40	32.8	16.72	0.57	31.34	-	-	P	H	
		116.13	14.82	-28.68	43.5	33.7	11.18	1.08	31.14	-	-	P	H	
		262.47	14.55	-31.45	46	30.27	13.67	1.61	31	-	-	P	H	
		554.1	22.54	-23.46	46	30.88	19.88	2.56	30.78	-	-	P	H	
		835.5	25.48	-20.52	46	29.62	23	3.23	30.37	162	54	P	H	
		992.3	28.17	-25.83	54	30.14	24.76	3.5	30.23	-	-	P	H	
														H
														H
														H
														H
														H
														H
			41.07	25.57	-14.43	40	42.84	13.3	0.63	31.2	133	2	P	V
			106.95	17.3	-26.2	43.5	36.82	10.62	1.03	31.17	-	-	P	V
			139.62	17.49	-26.01	43.5	35.89	11.5	1.2	31.1	-	-	P	V
			544.3	21.01	-24.99	46	30.17	19.08	2.54	30.78	-	-	P	V
			699.7	23.91	-22.09	46	30.78	20.59	2.94	30.4	-	-	P	V
			979	27.93	-26.07	54	29.75	24.98	3.49	30.29	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.