



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc
EQUIPMENT : PDA Phone
BRAND NAME : Sony
TYPE NAME : PM-0780-BV
FCC ID : PY7-PM0780
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Dec. 03, 2014 and testing was completed on Jan. 15, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



Testing Laboratory
1190

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Pre-Scanned RF Power..... 9

 2.3 Test Mode..... 10

 2.4 Connection Diagram of Test System..... 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example..... 12

3 TEST RESULT..... 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement..... 24

 3.6 Frequency Stability Measurement 29

 3.7 Automatically Discontinue Transmission 30

 3.8 Antenna Requirements 31

4 LIST OF MEASURING EQUIPMENT 32

5 UNCERTAINTY OF EVALUATION 34

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS



REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION | ISSUED DATE |
|------------|---------|-------------------------|---------------|
| FR4D0327G | Rev. 01 | Initial issue of report | Mar. 02, 2015 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--------------------|--|--------------------------------|--------|-------------------------------------|
| 3.1 | 15.403(i) | 6dB Bandwidth | > 500kHz | Pass | - |
| 3.2 | 15.407(a) | Maximum Conducted Output Power | ≤ 30 dBm | Pass | - |
| 3.3 | 15.407(a) | Power Spectral Density | ≤ 30 dBm/500kHz | Pass | - |
| 3.4 | 15.407(b) | Unwanted Emissions | ≤ -17, -27 dBm/MHz & 15.209(a) | Pass | Under limit 3.09 dB at 5713.720 MHz |
| 3.5 | 15.207 | AC Conducted Emission | 15.207(a) | Pass | Under limit 15.60 dB at 3.358 MHz |
| 3.6 | 15.407(g) | Frequency Stability | Within Operation Band | Pass | - |
| 3.7 | 15.407(c) | Automatically Discontinue Transmission | Discontinue Transmission | Pass | - |
| 3.8 | 15.203 & 15.407(a) | Antenna Requirement | N/A | Pass | - |



1 General Description

1.1 Applicant

Sony Mobile Communications Inc
Nya Vattentorget 22188 Lund/Sweden

1.2 Manufacturer

Sony Mobile Communications Inc
Nya Vattentorget 22188 Lund/Sweden

1.3 Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is PDA Phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, ANT+, and NFC features, and below is details of information

| Product Feature | |
|--------------------------------------|---|
| Equipment | PDA Phone |
| Brand Name | Sony |
| Type Name | PM-0780-BV |
| FCC ID | PY7-PM0780 |
| GSM Operating Band(s) | GSM 850/900/1800/1900MHz |
| GPRS / EGPRS Multi Slot Class | GPRS Class 33, EGPRS Class 33 |
| WCDMA Operating Band(s) | FDD Band I / II / V / VIII |
| WCDMA Rel. Version | Rel. 8 |
| LTE Operating Band(s) | FDD Band I / II / III / V / VII / VIII / XX |
| LTE Rel. Version | Rel. 10 |
| Wi-Fi Specification | 802.11b/g/n HT20 802.11a/n HT20/HT40 |
| Bluetooth Version | v3.0 + EDR / v4.0 - LE |
| NFC Specification | ISO14443A / ISO14443B / Felica / ISO15693 |
| ANT+ | ANT+ |
| Power Supply | Battery / AC Adapter / Car Charger |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard | |
|---|--|
| Tx/Rx Channel Frequency Range | 5725 MHz ~ 5850 MHz |
| Maximum Output Power | 802.11a : 13.98 dBm / 0.0250 W 802.11n HT20 : 12.42 dBm / 0.0175 W 802.11n HT40 : 10.98 dBm / 0.0125 W |
| 99% Occupied Bandwidth | 802.11a : 16.36 MHz 802.11n HT20 : 17.64 MHz 802.11n HT40 : 35.60 MHz |
| Antenna Type & Gain | PIFA Antenna with gain 0.42 dBi |
| Type of Modulation | OFDM (BPSK / QPSK / 16QAM / 64QAM) |

| EUT Information List | | | | |
|------------------------|------------|-------------|------------|----------------------------|
| IMEI | HW Version | SW Version | S/N | Performed Test Item |
| IMEI : 004402453275632 | AP | 26.1.A.0.79 | YT910ZRWBX | RF conducted measurement |
| IMEI : 004402453275632 | | | YT910ZRWBX | Radiated Spurious Emission |
| IMEI : 004402453306957 | | | YT910ZRWBG | Conducted Emission |

| Accessory List | |
|-------------------|---|
| AC Adapter | Model No. : EP800 |
| | Type No. : CAA-0002016-US |
| | S/N : 3112W49108087 (For Conducted Emission) 3112W49107935 (For Radiated Spurious Emission) |
| Battery | Model No. : Bellis |
| Earphone | Model No. : MH410c |
| | Type No. : AG-1100 |
| | S/N : 12431A1B0011582 (For Conducted Emission) 12431A1E00118A8 (For Radiated Spurious Emission) |
| USB Cable | Model No. : EC450 |
| | Type No. : AI-0700 |
| | S/N : 142412D8250297C (For Conducted Emission) 113912D0171324C (For Radiated Spurious Emission) |

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

| | | |
|---------------------------|--|---------|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | TH02-HY | CO05-HY |

| | | |
|---------------------------|--|--|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0855 | |
| Test Site No. | Sporton Site No. | |
| | 03CH11-HY | |

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

| Frequency Band | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|--------------------------------------|------------|-------------|------------|-------------|
| 5725-5850 MHz Band 4 (U-NII-3) | 149 | 5745 | 157 | 5785 |
| | 151 | 5755 | 159 | 5795 |
| | 153 | 5765 | 161 | 5805 |
| | 155 | 5775 | 165 | 5825 |

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables.

| 5GHz 802.11a mode | | | | | | | | |
|---------------------|--------|--------|---------|---------|---------|---------|---------|---------|
| Data Rate (MHz) | 6M bps | 9M bps | 12M bps | 18M bps | 24M bps | 36M bps | 48M bps | 54M bps |
| Average Power (dBm) | 13.98 | 13.63 | 13.65 | 13.67 | 13.68 | 13.78 | 13.72 | 13.74 |

| 5GHz 802.11n HT20 mode | | | | | | | | |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz) | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| Average Power (dBm) | 12.42 | 12.11 | 12.07 | 12.15 | 12.17 | 12.26 | 12.23 | 12.21 |

| 5GHz 802.11n HT40 mode | | | | | | | | |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Data Rate (MHz) | MCS0 | MCS1 | MCS2 | MCS3 | MCS4 | MCS5 | MCS6 | MCS7 |
| Average Power (dBm) | 10.98 | 10.63 | 10.83 | 10.70 | 10.82 | 10.81 | 10.91 | 10.95 |



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


| Modulation | Data Rate |
|--------------|-----------|
| 802.11a | 6 Mbps |
| 802.11n HT20 | MCS0 |
| 802.11n HT40 | MCS0 |

| | |
|------------------------------|--|
| AC Conducted Emission | Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + Battery + MP3 + USB Cable (Charging from Adapter) |
|------------------------------|--|


| Ch. # | | Band IV : 5725-5850 MHz | | |
|-------|--------|-------------------------|--------------|--------------|
| | | 802.11a | 802.11n HT20 | 802.11n HT40 |
| L | Low | 149 | 149 | 151 |
| M | Middle | 157 | 157 | - |
| H | High | 165 | 165 | 159 |

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

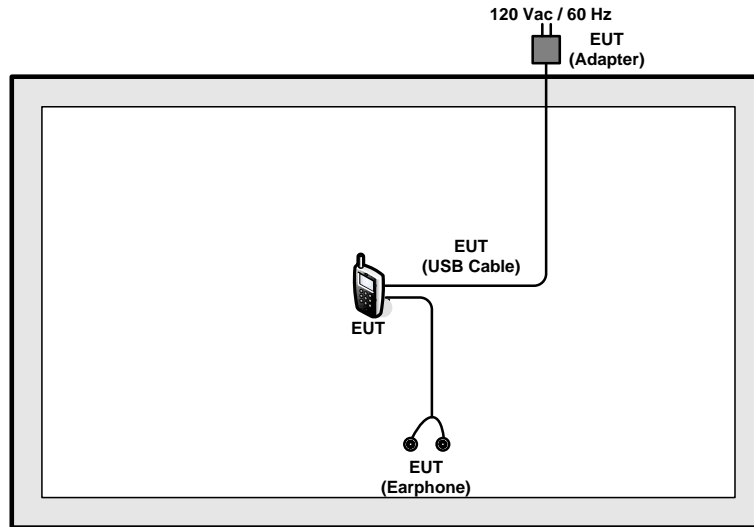

<AC Conducted Emission Mode>

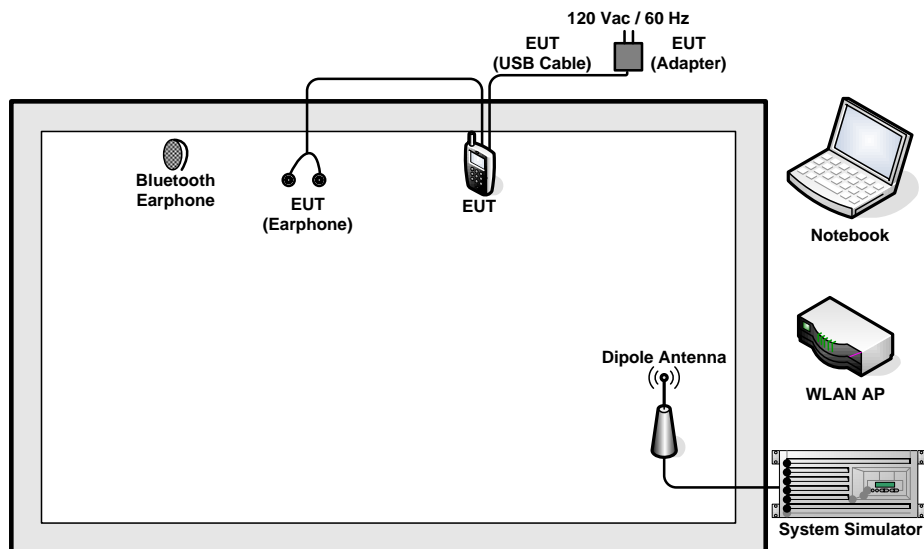



2.5 Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|------------|----------------|--|-------------------|--|
| 1. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| 2. | WLAN AP | D-Link | DIR-865L | KA2IR865LA1 | N/A | Unshielded, 1.8 m |
| 3. | Notebook | DELL | Latitude E6320 | FCC DoC/ Contains FCC ID: QDS-BRCM1054 | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |
| 4. | Bluetooth Earphone | Sony | SBH20 | PY7-RD0010 | Unshielded, 0.75m | N/A |
| 5. | SD Card | SanDisk | MicroSD HC | FCC DoC | N/A | N/A |

2.6 EUT Operation Test Setup

For WLAN function, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Description of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

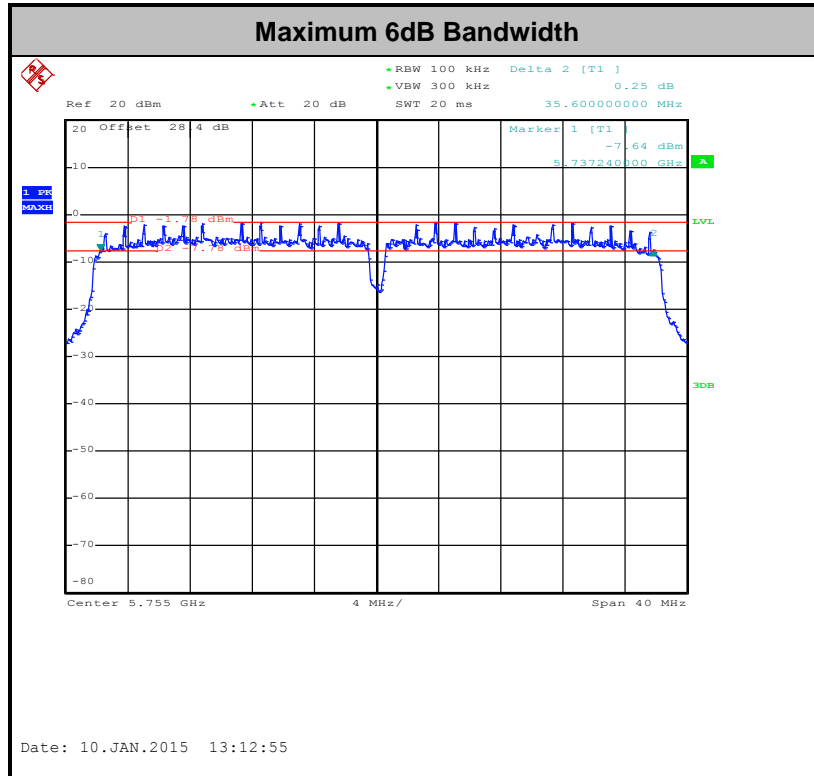

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

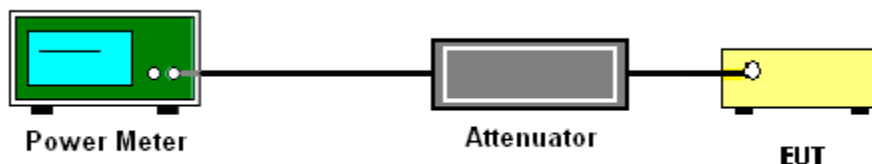

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

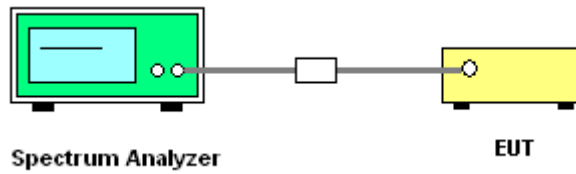



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

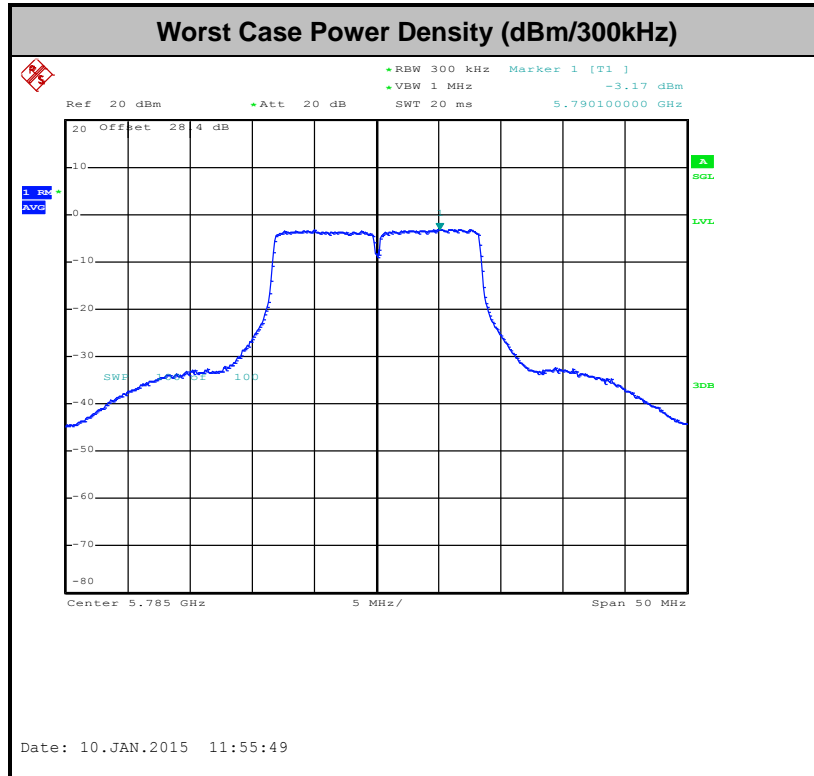



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBµV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBµV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009 – 0.490 | 2400/F(kHz) | 300 |
| 0.490 – 1.705 | 24000/F(kHz) | 30 |
| 1.705 – 30.0 | 30 | 30 |
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

| EIRP (dBm) | Field Strength at 3m (dBµV/m) |
|------------|-------------------------------|
| -17 | 78.3 |
| - 27 | 68.3 |

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Antenna | Band | Duty Cycle(%) | T(us) | 1/T(kHz) | VBW Setting |
|---------|--------------|---------------|---------|----------|-------------|
| 1 | 802.11a | 87.26 | 1370.00 | 0.73 | 1kHz |
| 1 | 802.11n HT20 | 87.07 | 1280.00 | 0.78 | 1kHz |
| 1 | 802.11n HT40 | 76.43 | 642.00 | 1.56 | 3kHz |




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

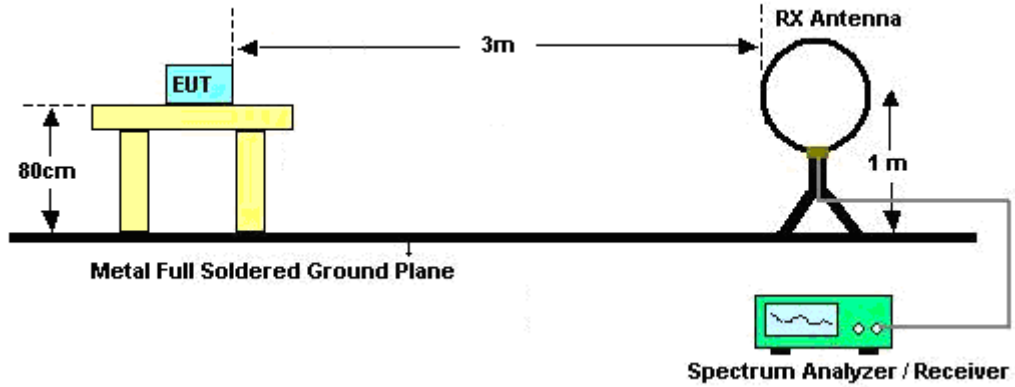

For radiated emissions from 30MHz to 1GHz

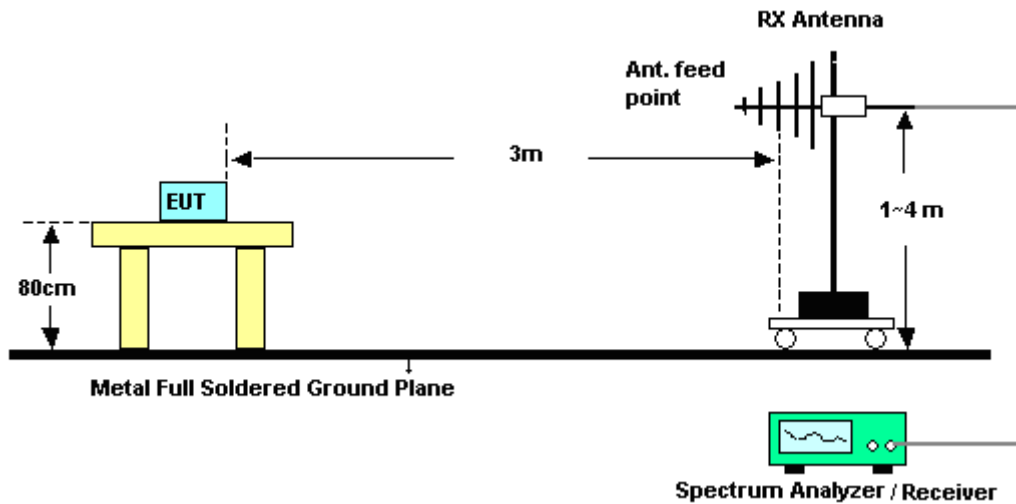

For radiated emissions above 1GHz

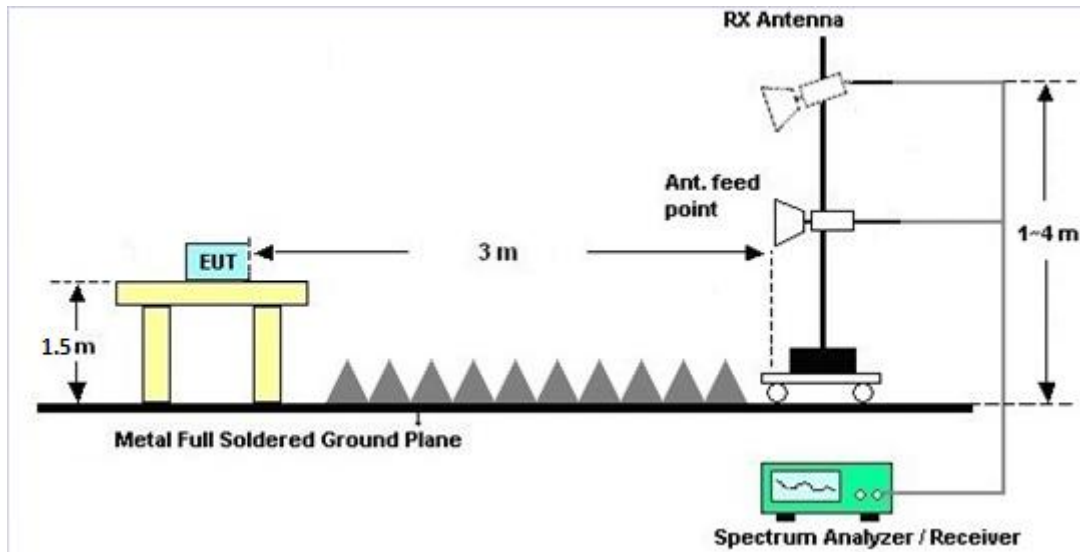

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBµV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

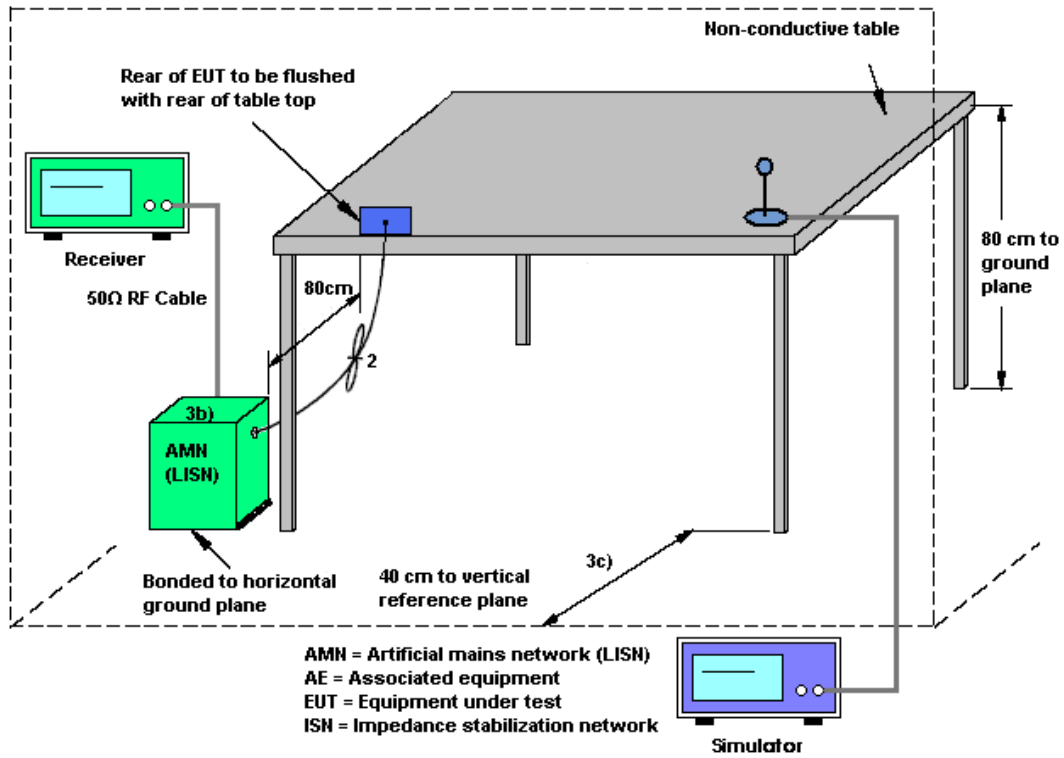

3.5.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|---|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 20~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + Battery + MP3 + USB Cable (Charging from Adapter) | | |

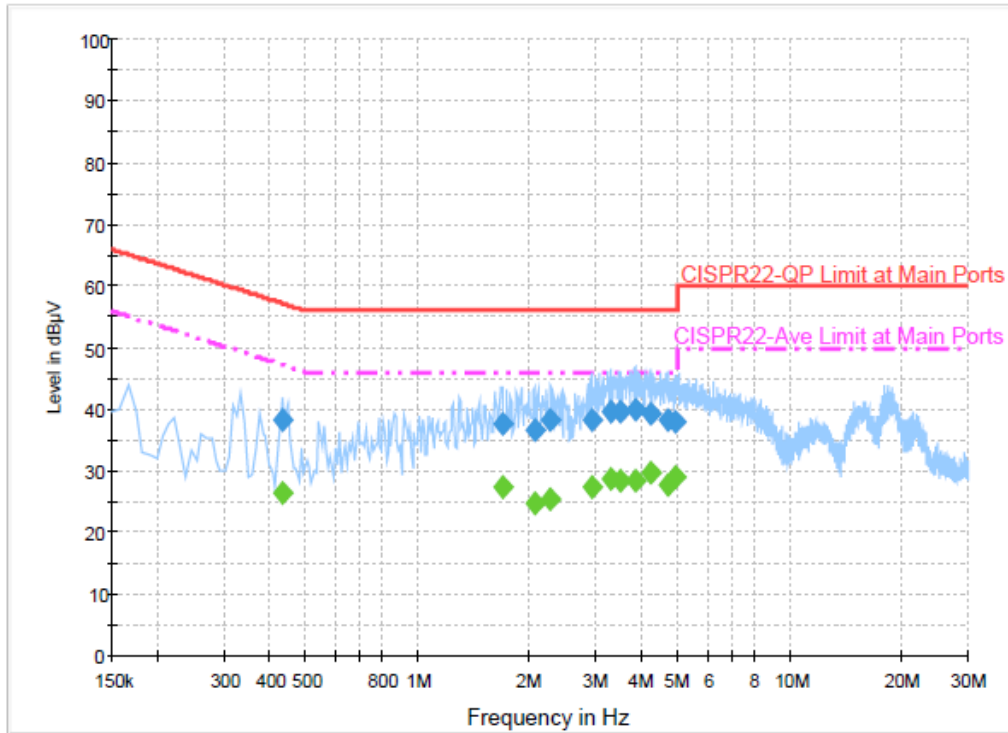


Final Result : QuasiPeak

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.430000 | 38.4 | Off | L1 | 19.5 | 18.9 | 57.3 |
| 1.678000 | 37.5 | Off | L1 | 19.6 | 18.5 | 56.0 |
| 2.054000 | 36.7 | Off | L1 | 19.4 | 19.3 | 56.0 |
| 2.270000 | 38.2 | Off | L1 | 19.4 | 17.8 | 56.0 |
| 2.918000 | 38.4 | Off | L1 | 19.6 | 17.6 | 56.0 |
| 3.278000 | 39.7 | Off | L1 | 19.6 | 16.3 | 56.0 |
| 3.510000 | 39.6 | Off | L1 | 19.6 | 16.4 | 56.0 |
| 3.822000 | 39.9 | Off | L1 | 19.6 | 16.1 | 56.0 |
| 4.198000 | 39.3 | Off | L1 | 19.6 | 16.7 | 56.0 |
| 4.686000 | 38.3 | Off | L1 | 19.7 | 17.7 | 56.0 |
| 4.926000 | 38.1 | Off | L1 | 19.7 | 17.9 | 56.0 |



| | | | |
|-----------------|---|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 20~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + Battery + MP3 + USB Cable (Charging from Adapter) | | |

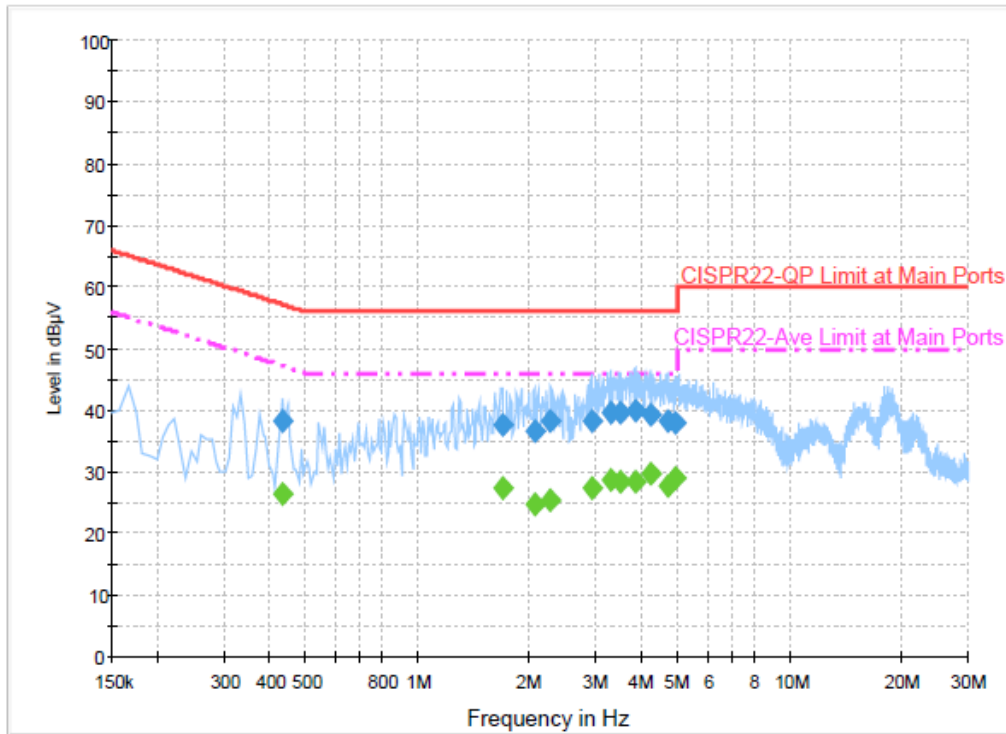


Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.430000 | 26.3 | Off | L1 | 19.5 | 21.0 | 47.3 |
| 1.678000 | 27.3 | Off | L1 | 19.6 | 18.7 | 46.0 |
| 2.054000 | 24.7 | Off | L1 | 19.4 | 21.3 | 46.0 |
| 2.270000 | 25.5 | Off | L1 | 19.4 | 20.5 | 46.0 |
| 2.918000 | 27.5 | Off | L1 | 19.6 | 18.5 | 46.0 |
| 3.278000 | 28.6 | Off | L1 | 19.6 | 17.4 | 46.0 |
| 3.510000 | 28.4 | Off | L1 | 19.6 | 17.6 | 46.0 |
| 3.822000 | 28.3 | Off | L1 | 19.6 | 17.7 | 46.0 |
| 4.198000 | 29.7 | Off | L1 | 19.6 | 16.3 | 46.0 |
| 4.686000 | 27.8 | Off | L1 | 19.7 | 18.2 | 46.0 |



| | | | |
|-----------------|---|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 20~22°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + Battery + MP3 + USB Cable (Charging from Adapter) | | |

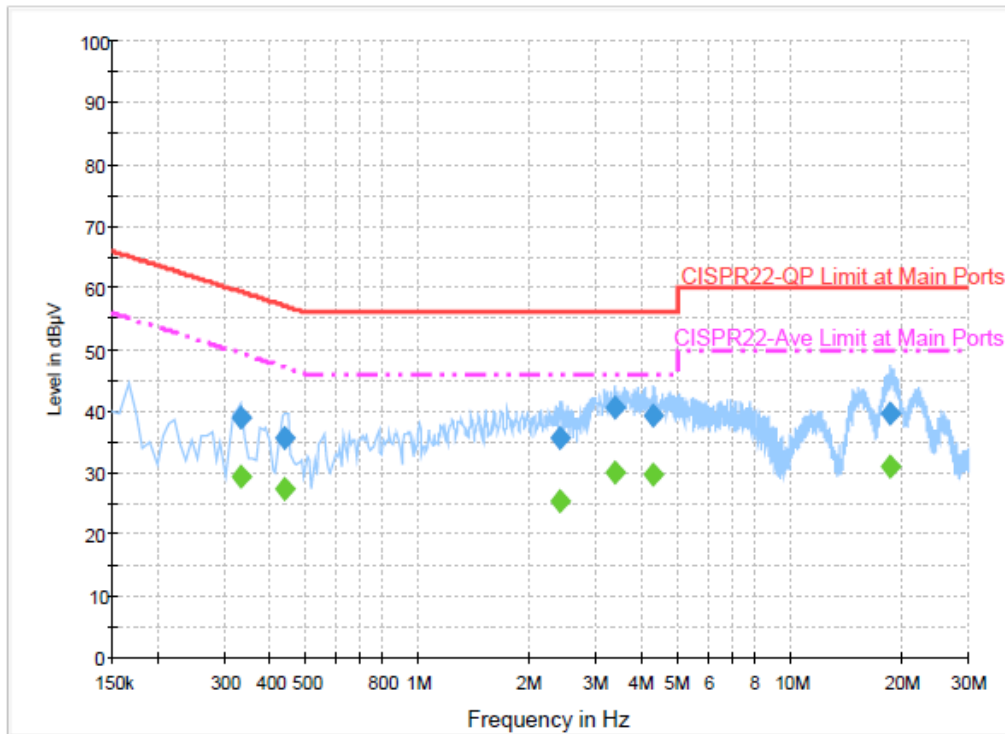

Final Result : QuasiPeak

| Frequency (MHz) | QuasiPeak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.334000 | 38.8 | Off | N | 19.4 | 20.6 | 59.4 |
| 0.438000 | 35.5 | Off | N | 19.5 | 21.6 | 57.1 |
| 2.398000 | 35.5 | Off | N | 19.5 | 20.5 | 56.0 |
| 3.358000 | 40.4 | Off | N | 19.6 | 15.6 | 56.0 |
| 4.254000 | 39.3 | Off | N | 19.6 | 16.7 | 56.0 |
| 18.614000 | 39.5 | Off | N | 20.0 | 20.5 | 60.0 |

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.334000 | 29.3 | Off | N | 19.4 | 20.1 | 49.4 |
| 0.438000 | 27.4 | Off | N | 19.5 | 19.7 | 47.1 |
| 2.398000 | 25.6 | Off | N | 19.5 | 20.4 | 46.0 |
| 3.358000 | 30.2 | Off | N | 19.6 | 15.8 | 46.0 |
| 4.254000 | 29.8 | Off | N | 19.6 | 16.2 | 46.0 |
| 18.614000 | 30.9 | Off | N | 20.0 | 19.1 | 50.0 |

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup



3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|-------------------|-----------------|-----------|----------------|-----------------|------------------|-------------------------------|---------------|----------------------|
| Power Meter | Agilent | E4416A | GB41292344 | 300MHz~40GHz | Jan. 28, 2014 | Dec. 25, 2014 ~ Jan. 15, 2015 | Jan. 27, 2015 | Conducted (TH02-HY) |
| Power Sensor | Agilent | E9327A | US40441548 | 300MHz~40GHz | Jan. 28, 2014 | Dec. 25, 2014 ~ Jan. 15, 2015 | Jan. 27, 2015 | Conducted (TH02-HY) |
| Spectrum Analyzer | Rohde & Schwarz | FSP40 | 100055 | 9kHz~40GHz | Jun. 09, 2014 | Dec. 25, 2014 ~ Jan. 15, 2015 | Jun. 08, 2015 | Conducted (TH02-HY) |
| Hygrometer | Testo | 608-H1 | 34897199 | N/A | May. 06, 2014 | Dec. 25, 2014 ~ Jan. 15, 2015 | May. 05, 2015 | Conducted (TH02-HY) |
| RF cable | WOKEN | S05 | S05-130708-038 | N/A | Jan. 22, 2014 | Dec. 25, 2014 ~ Jan. 15, 2015 | Jan. 21, 2015 | Conducted (TH02-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESCS 30 | 100356 | 9kHz – 2.75GHz | Dec. 01, 2014 | Dec. 09, 2014 | Nov. 30, 2015 | Conduction (CO05-HY) |
| Two-LISN | Rohde & Schwarz | ENV216 | 100080 | 9kHz~30MHz | Dec. 02, 2014 | Dec. 09, 2014 | Dec. 01, 2015 | Conduction (CO05-HY) |
| AC Power Source | ChainTek | APC-1000W | N/A | N/A | N/A | Dec. 09, 2014 | N/A | Conduction (CO05-HY) |
| Hygrometer | Testo | 608-H1 | 34913912 | N/A | Apr. 23, 2014 | Dec. 09, 2014 | Apr. 22, 2015 | Conduction (CO05-HY) |
| LF Cable | Shuner | RG-402 | N/A | N/A | Oct. 07, 2014 | Dec. 09, 2014 | Oct. 06, 2015 | Conduction (CO05-HY) |
| Test Software | N/A | EMC32 | 8.40.0 | N/A | N/A | Dec. 09, 2014 | N/A | Conduction (CO05-HY) |



| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|----------------------------------|--------------------|------------------------|-----------------------------------|-----------------|------------------|-------------------------------|---------------|-----------------------|
| EMI Test Receiver | Keysight | N9038A | MY54130085 | 20Hz ~ 26.5GHz | Nov. 05, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 04, 2015 | Radiation (03CH11-HY) |
| Spectrum Analyzer | Keysight | N9010A | MY54200486 | 10Hz ~ 44GHZ | Sep. 24, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Sep. 23, 2015 | Radiation (03CH11-HY) |
| Loop Antenna | R&S | HFH2-Z2 | 100315 | 9 kHz~30 MHz | Jul. 28, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Jul. 27, 2015 | Radiation (03CH11-HY) |
| Bilog Antenna | TESEQ | CBL 6111D | 35414 | 30MHz~1GHz | Oct. 24, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Oct. 23, 2015 | Radiation (03CH11-HY) |
| Double Ridged Guide Horn Antenna | SCHWARZBECK | BBHA 9120 D | 9120D-1326 | 1GHz ~ 18GHz | Oct. 03, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Oct. 02, 2015 | Radiation (03CH11-HY) |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170584 | 18GHz- 40GHz | Nov. 03, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 02, 2015 | Radiation (03CH11-HY) |
| Amplifier | SONOMA | 310N | 187312 | 0.1MHz~1000M Hz | Nov. 24, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 23, 2015 | Radiation (03CH11-HY) |
| Preamplifier | Keysight | 83017A | MY53270080 | 1GHz~26.5GHz | Nov. 20, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 19, 2015 | Radiation (03CH11-HY) |
| Preamplifier | MITEQ | AMF-7D-00101800-30-10P | 1902247 | 1GHz~18GHz | Nov. 25, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 24, 2015 | Radiation (03CH11-HY) |
| Preamplifier | MITEQ | JS44-18004000-33-8P | 1840917 | 18GHz ~ 40GHz | Jun. 09, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Jun. 08, 2015 | Radiation (03CH11-HY) |
| Antenna Mast | EMEC | AM-BS-4500-B | N/A | N/A | N/A | Jan. 07, 2015 ~ Jan. 09, 2015 | N/A | Radiation (03CH11-HY) |
| Turn Table | EMEC | TT 2000 | N/A | 0-360 degree | N/A | Jan. 07, 2015 ~ Jan. 09, 2015 | N/A | Radiation (03CH11-HY) |
| Controller | EMEC | EM 1000 | N/A | 1m-4m | N/A | Jan. 07, 2015 ~ Jan. 09, 2015 | N/A | Radiation (03CH11-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY84209521 | 9KHz~1GHz | Dec. 04, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Dec. 03, 2015 | Radiation (03CH11-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY44614PE MY249674M Y249714 | 30MHz~1GHz | Nov. 06, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 05, 2015 | Radiation (03CH11-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY44614PE MY249674M Y249714 | 1GHz~25GHz | Nov. 06, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 05, 2015 | Radiation (03CH11-HY) |
| RF Cable | HUBER + SUHNER | SUCOFLEX 104 | MY44614PE MY249674 MY249714 | 25GHz~40GHz | Nov. 06, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 05, 2015 | Radiation (03CH11-HY) |
| Hygrometer | TECPEL | DTN-303B | TP140325 | N/A | Nov. 19, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Nov. 05, 2015 | Radiation (03CH11-HY) |
| Filter | Wainwright | WLKS4500-8SS | SN19 | 4.5G Low Pass | Oct. 01, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Sep. 30, 2015 | Radiation (03CH11-HY) |
| Filter | Microwave Circuits | H07G18G3 | 282388 | 7G High Pass | Oct. 01, 2014 | Jan. 07, 2015 ~ Jan. 09, 2015 | Sep. 30, 2015 | Radiation (03CH11-HY) |
| Test Software | Audix | E3 | Version 6.2009-8-24 | N/A | N/A | Jan. 07, 2015 ~ Jan. 09, 2015 | N/A | Radiation (03CH11-HY) |



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.26 |
|---|------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.90 |
|---|------|



Appendix A. Conducted test results

| | | | | |
|----------------|-------------------------|--------------------|-------|----|
| Test Engineer: | Bill Kuo | Temperature: | 21~25 | °C |
| Test Date: | 2014/12/25 ~ 2015/01/15 | Relative Humidity: | 51~54 | % |

TEST RESULTS DATA
6dB and 99% OBW

| Band IV | | | | | | | |
|---------|-----------|-----|-----|-------------|----------------------|-------------------------------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | 6 dB Bandwidth (MHz) | FCC 6dB Bandwidth Limit (MHz) | Pass/Fail |
| 11a | 6Mbps | 1 | 149 | 5745 | 16.36 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 16.36 | 0.5 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 16.36 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 17.6 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 17.64 | 0.5 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 17.6 | 0.5 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 35.6 | 0.5 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 35.36 | 0.5 | Pass |

TEST RESULTS DATA
Average Power Table

| FCC Band IV | | | | | | | | | | |
|-------------|-----------|-----|-----|-------------|------------------|-------------------------------|---------------------------------|----------|--|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) | FCC Conducted Power Limit (dBm) | DG (dBi) | | Pass/Fail |
| 11a | 6Mbps | 1 | 149 | 5745 | 0.59 | 13.98 | 30.00 | 0.42 | | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 0.59 | 13.80 | 30.00 | 0.42 | | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 0.59 | 13.93 | 30.00 | 0.42 | | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 0.60 | 12.42 | 30.00 | 0.42 | | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 0.60 | 12.17 | 30.00 | 0.42 | | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 0.60 | 12.35 | 30.00 | 0.42 | | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 1.17 | 10.98 | 30.00 | 0.42 | | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 1.17 | 10.97 | 30.00 | 0.42 | | Pass |

TEST RESULTS DATA
Power Spectral Density

| Band IV | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|------------------|---------------------------------|------------------------------------|--------------------------------|----------|-----------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Duty Factor (dB) | 10log (500kHz /RBW) Factor (dB) | Average Power Density (dBm/500kHz) | Average PSD Limit (dBm/500kHz) | DG (dBi) | Pass/Fail |
| 11a | 6Mbps | 1 | 149 | 5745 | 0.59 | 2.22 | -0.46 | 30.00 | 0.42 | Pass |
| 11a | 6Mbps | 1 | 157 | 5785 | 0.59 | 2.22 | -0.36 | 30.00 | 0.42 | Pass |
| 11a | 6Mbps | 1 | 165 | 5825 | 0.59 | 2.22 | -0.37 | 30.00 | 0.42 | Pass |
| HT20 | MCS0 | 1 | 149 | 5745 | 0.60 | 2.22 | -2.55 | 30.00 | 0.42 | Pass |
| HT20 | MCS0 | 1 | 157 | 5785 | 0.60 | 2.22 | -2.45 | 30.00 | 0.42 | Pass |
| HT20 | MCS0 | 1 | 165 | 5825 | 0.60 | 2.22 | -1.98 | 30.00 | 0.42 | Pass |
| HT40 | MCS0 | 1 | 151 | 5755 | 1.17 | 2.22 | -4.74 | 30.00 | 0.42 | Pass |
| HT40 | MCS0 | 1 | 159 | 5795 | 1.17 | 2.22 | -5.11 | 30.00 | 0.42 | Pass |

TEST RESULTS DATA
Frequency Stability

| Band IV | | | | | | | | | | |
|---------|-----------|-----|-----|-------------|------------------------|---------------------------|---------------------------|------------------|-------------|------|
| Mod. | Data Rate | NTX | CH. | Freq. (MHz) | Center Frequency (MHz) | Frequency Deviation (MHz) | Frequency Stability (ppm) | Temperature (°C) | Voltage (V) | Note |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.100 | 0.100 | 17.41 | 20 | 3.2 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.100 | 0.100 | 17.41 | 20 | 4.2 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.100 | 0.100 | 17.41 | 20 | 3.7 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.100 | 0.100 | 17.41 | -30 | 3.7 | |
| 11a | 6Mbps | 1 | 149 | 5745 | 5745.100 | 0.100 | 17.41 | 50 | 3.7 | |



Appendix B. Radiated Spurious Emission

15E Band 4 - 5725-5850MHz

WIFI 802.11a (Band Edge @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|------------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 802.11a CH 149 5745MHz | | 5715 | 52.24 | -21.76 | 74 | 44.2 | 32.29 | 9.39 | 33.64 | 145 | 69 | P | H | |
| | | 5723.48 | 63.1 | -15.2 | 78.3 | 54.99 | 32.31 | 9.44 | 33.64 | 145 | 69 | P | H | |
| | | 5714.92 | 43.37 | -10.63 | 54 | 35.33 | 32.29 | 9.39 | 33.64 | 145 | 69 | A | H | |
| | * | 5745 | 99 | - | - | 90.87 | 32.34 | 9.44 | 33.65 | 145 | 69 | P | H | |
| | * | 5745 | 92.14 | - | - | 84.01 | 32.34 | 9.44 | 33.65 | 145 | 69 | A | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 5692.36 | 50.2 | -23.8 | 74 | 42.17 | 32.27 | 9.39 | 33.63 | 148 | 257 | P | V |
| | | | 5723.4 | 57.11 | -21.19 | 78.3 | 49 | 32.31 | 9.44 | 33.64 | 148 | 257 | P | V |
| | | | 5714.84 | 41.47 | -12.53 | 54 | 33.43 | 32.29 | 9.39 | 33.64 | 148 | 257 | A | V |
| | * | | 5745 | 94.74 | - | - | 86.61 | 32.34 | 9.44 | 33.65 | 148 | 257 | P | V |
| | * | | 5745 | 88.2 | - | - | 80.07 | 32.34 | 9.44 | 33.65 | 148 | 257 | A | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |



| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|------------------------------|---------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBµV/m) | (dB) | (dBµV/m) | (dBµV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11a CH 157 5785MHz | | 5690.12 | 48.69 | -25.31 | 74 | 40.66 | 32.27 | 9.39 | 33.63 | 143 | 69 | P | H |
| | | 5716.6 | 48.7 | -29.6 | 78.3 | 40.66 | 32.29 | 9.39 | 33.64 | 143 | 69 | P | H |
| | | 5694.2 | 40.27 | -13.73 | 54 | 32.24 | 32.27 | 9.39 | 33.63 | 143 | 69 | A | H |
| | * | 5785 | 99.25 | - | - | 91.03 | 32.39 | 9.49 | 33.66 | 143 | 69 | P | H |
| | * | 5785 | 92.35 | - | - | 84.13 | 32.39 | 9.49 | 33.66 | 143 | 69 | A | H |
| | | 5856.32 | 48.99 | -29.31 | 78.3 | 40.62 | 32.51 | 9.54 | 33.68 | 143 | 69 | P | H |
| | | 5870.72 | 49.46 | -24.54 | 74 | 41.08 | 32.53 | 9.54 | 33.69 | 143 | 69 | P | H |
| | | 5874.16 | 40.53 | -13.47 | 54 | 32.15 | 32.53 | 9.54 | 33.69 | 143 | 69 | A | H |
| | | 5707.4 | 48.57 | -25.43 | 74 | 40.53 | 32.29 | 9.39 | 33.64 | 117 | 93 | P | V |
| | | 5718.44 | 47.82 | -30.48 | 78.3 | 39.76 | 32.31 | 9.39 | 33.64 | 117 | 93 | P | V |
| | | 5688.36 | 40.1 | -13.9 | 54 | 32.07 | 32.27 | 9.39 | 33.63 | 117 | 93 | A | V |
| | * | 5785 | 95.47 | - | - | 87.25 | 32.39 | 9.49 | 33.66 | 117 | 93 | P | V |
| | * | 5785 | 88.05 | - | - | 79.83 | 32.39 | 9.49 | 33.66 | 117 | 93 | A | V |
| | | 5859.44 | 48.67 | -29.63 | 78.3 | 40.31 | 32.51 | 9.54 | 33.69 | 117 | 93 | P | V |
| | | 5873.52 | 49.56 | -24.44 | 74 | 41.18 | 32.53 | 9.54 | 33.69 | 117 | 93 | P | V |
| | 5873.12 | 40.51 | -13.49 | 54 | 32.13 | 32.53 | 9.54 | 33.69 | 117 | 93 | A | V | |



| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 802.11a CH 165 5825MHz | * | 5825 | 99.69 | - | - | 91.38 | 32.46 | 9.52 | 33.67 | 145 | 0 | P | H | |
| | * | 5825 | 92.48 | - | - | 84.17 | 32.46 | 9.52 | 33.67 | 145 | 0 | A | H | |
| | | 5852.64 | 56.59 | -21.71 | 78.3 | 48.25 | 32.48 | 9.54 | 33.68 | 145 | 0 | P | H | |
| | | 5860.96 | 51.34 | -22.66 | 74 | 42.98 | 32.51 | 9.54 | 33.69 | 145 | 0 | P | H | |
| | | 5878.16 | 42.87 | -11.13 | 54 | 34.49 | 32.53 | 9.54 | 33.69 | 145 | 0 | A | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | * | 5825 | 94.6 | - | - | 86.29 | 32.46 | 9.52 | 33.67 | 120 | 94 | P | V | |
| | * | 5825 | 87.16 | - | - | 78.85 | 32.46 | 9.52 | 33.67 | 120 | 94 | A | V | |
| | | 5850.64 | 51.7 | -26.6 | 78.3 | 43.36 | 32.48 | 9.54 | 33.68 | 120 | 94 | P | V | |
| | | 5872 | 49.81 | -24.19 | 74 | 41.43 | 32.53 | 9.54 | 33.69 | 120 | 94 | P | V | |
| | | 5877.44 | 41.19 | -12.81 | 54 | 32.81 | 32.53 | 9.54 | 33.69 | 120 | 94 | A | V | |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | | |



15E Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBµV/m) | (dB) | (dBµV/m) | (dBµV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11a CH 149 5745MHz | | 11490 | 45.67 | -28.33 | 74 | 26.42 | 40.01 | 13.95 | 34.71 | 100 | 0 | P | H |
| | | 17235 | 50.11 | -23.89 | 74 | 27.73 | 41.41 | 16.95 | 35.98 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11490 | 45.06 | -28.94 | 74 | 25.81 | 40.01 | 13.95 | 34.71 | 100 | 0 | P | V |
| | | 17235 | 50.87 | -23.13 | 74 | 28.49 | 41.41 | 16.95 | 35.98 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| 802.11a CH 157 5785MHz | | 11570 | 45.06 | -28.94 | 74 | 25.94 | 39.89 | 14 | 34.77 | 100 | 0 | P | H |
| | | 17355 | 50.73 | -23.27 | 74 | 28.01 | 41.67 | 17.03 | 35.98 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11570 | 45.02 | -28.98 | 74 | 25.9 | 39.89 | 14 | 34.77 | 100 | 0 | P | V |
| | | 17355 | 50.11 | -23.89 | 74 | 27.39 | 41.67 | 17.03 | 35.98 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| 802.11a CH 165 5825MHz | | 11650 | 45.28 | -28.72 | 74 | 26.26 | 39.78 | 14.05 | 34.81 | 100 | 0 | P | H |
| | | 17475 | 50.5 | -23.5 | 74 | 27.46 | 41.93 | 17.1 | 35.99 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11650 | 45.63 | -28.37 | 74 | 26.61 | 39.78 | 14.05 | 34.81 | 100 | 0 | P | V |
| | | 17475 | 50.41 | -23.59 | 74 | 27.37 | 41.93 | 17.1 | 35.99 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



15E Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|--------------------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 802.11n HT20 CH 149 5745MHz | | 5715 | 51.8 | -22.2 | 74 | 43.76 | 32.29 | 9.39 | 33.64 | 147 | 14 | P | H | |
| | | 5724.6 | 63.69 | -14.61 | 78.3 | 55.58 | 32.31 | 9.44 | 33.64 | 147 | 14 | P | H | |
| | | 5714.04 | 42.82 | -11.18 | 54 | 34.78 | 32.29 | 9.39 | 33.64 | 147 | 14 | A | H | |
| | * | 5745 | 98.11 | - | - | 89.98 | 32.34 | 9.44 | 33.65 | 147 | 14 | P | H | |
| | * | 5745 | 91.44 | - | - | 83.31 | 32.34 | 9.44 | 33.65 | 147 | 14 | A | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | |
| | | | 5692.04 | 49.39 | -24.61 | 74 | 41.36 | 32.27 | 9.39 | 33.63 | 114 | 92 | P | V |
| | | | 5723.64 | 61.93 | -16.37 | 78.3 | 53.82 | 32.31 | 9.44 | 33.64 | 114 | 92 | P | V |
| | | | 5693.24 | 41.18 | -12.82 | 54 | 33.15 | 32.27 | 9.39 | 33.63 | 114 | 92 | A | V |
| | * | | 5745 | 93.01 | - | - | 84.88 | 32.34 | 9.44 | 33.65 | 114 | 92 | P | V |
| | * | | 5745 | 85.6 | - | - | 77.47 | 32.34 | 9.44 | 33.65 | 114 | 92 | A | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |



| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|--------------------------------------|---------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT20 CH 157 5785MHz | | 5706.84 | 49.22 | -24.78 | 74 | 41.18 | 32.29 | 9.39 | 33.64 | 146 | 67 | P | H |
| | | 5716.28 | 48.63 | -29.67 | 78.3 | 40.59 | 32.29 | 9.39 | 33.64 | 146 | 67 | P | H |
| | | 5696.28 | 40.35 | -13.65 | 54 | 32.32 | 32.27 | 9.39 | 33.63 | 146 | 67 | A | H |
| | * | 5785 | 99.01 | - | - | 90.79 | 32.39 | 9.49 | 33.66 | 146 | 67 | P | H |
| | * | 5785 | 91.32 | - | - | 83.1 | 32.39 | 9.49 | 33.66 | 146 | 67 | A | H |
| | | 5856.8 | 49.59 | -28.71 | 78.3 | 41.22 | 32.51 | 9.54 | 33.68 | 146 | 67 | P | H |
| | | 5881.2 | 49.45 | -24.55 | 74 | 41.07 | 32.53 | 9.54 | 33.69 | 146 | 67 | P | H |
| | | 5863.12 | 40.55 | -13.45 | 54 | 32.19 | 32.51 | 9.54 | 33.69 | 146 | 67 | A | H |
| | | 5693.96 | 48.78 | -25.22 | 74 | 40.75 | 32.27 | 9.39 | 33.63 | 146 | 322 | P | V |
| | | 5724.12 | 47.74 | -30.56 | 78.3 | 39.63 | 32.31 | 9.44 | 33.64 | 146 | 322 | P | V |
| | | 5688.92 | 40.13 | -13.87 | 54 | 32.1 | 32.27 | 9.39 | 33.63 | 146 | 322 | A | V |
| | * | 5785 | 90.02 | - | - | 81.8 | 32.39 | 9.49 | 33.66 | 146 | 322 | P | V |
| | * | 5785 | 84.97 | - | - | 76.75 | 32.39 | 9.49 | 33.66 | 146 | 322 | A | V |
| | | 5859.6 | 49.36 | -28.94 | 78.3 | 41 | 32.51 | 9.54 | 33.69 | 146 | 322 | P | V |
| | | 5871.28 | 48.77 | -25.23 | 74 | 40.39 | 32.53 | 9.54 | 33.69 | 146 | 322 | P | V |
| | 5881.12 | 40.5 | -13.5 | 54 | 32.12 | 32.53 | 9.54 | 33.69 | 146 | 322 | A | V | |



| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|--------------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 802.11n HT20 CH 165 5825MHz | * | 5827 | 98.15 | - | - | 89.84 | 32.46 | 9.52 | 33.67 | 136 | 68 | P | H | |
| | * | 5827 | 91.37 | - | - | 83.06 | 32.46 | 9.52 | 33.67 | 136 | 68 | A | H | |
| | | 5850.64 | 52.9 | -25.4 | 78.3 | 44.56 | 32.48 | 9.54 | 33.68 | 136 | 68 | P | H | |
| | | 5860.8 | 53.96 | -20.04 | 74 | 45.6 | 32.51 | 9.54 | 33.69 | 136 | 68 | P | H | |
| | | 5877.2 | 42.51 | -11.49 | 54 | 34.13 | 32.53 | 9.54 | 33.69 | 136 | 68 | A | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | * | 5827 | 93.27 | - | - | 84.96 | 32.46 | 9.52 | 33.67 | 101 | 103 | P | V | |
| | * | 5827 | 86.41 | - | - | 78.1 | 32.46 | 9.52 | 33.67 | 101 | 103 | A | V | |
| | | 5851.28 | 53 | -25.3 | 78.3 | 44.66 | 32.48 | 9.54 | 33.68 | 101 | 103 | P | V | |
| | | 5877.92 | 49.52 | -24.48 | 74 | 41.14 | 32.53 | 9.54 | 33.69 | 101 | 103 | P | V | |
| | | 5876.8 | 41.08 | -12.92 | 54 | 32.7 | 32.53 | 9.54 | 33.69 | 101 | 103 | A | V | |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | | |



15E Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|--------------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT20 CH 149 5745MHz | | 11490 | 46.4 | -27.6 | 74 | 27.15 | 40.01 | 13.95 | 34.71 | 100 | 0 | P | H |
| | | 17235 | 50.42 | -23.58 | 74 | 28.04 | 41.41 | 16.95 | 35.98 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11490 | 45.84 | -28.16 | 74 | 26.59 | 40.01 | 13.95 | 34.71 | 100 | 0 | P | V |
| | | 17235 | 49.94 | -24.06 | 74 | 27.56 | 41.41 | 16.95 | 35.98 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| 802.11n HT20 CH 157 5785MHz | | 11570 | 45.65 | -28.35 | 74 | 26.53 | 39.89 | 14 | 34.77 | 100 | 0 | P | H |
| | | 17355 | 49.82 | -24.18 | 74 | 27.1 | 41.67 | 17.03 | 35.98 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11570 | 45.19 | -28.81 | 74 | 26.07 | 39.89 | 14 | 34.77 | 100 | 0 | P | V |
| | | 17355 | 49.74 | -24.26 | 74 | 27.02 | 41.67 | 17.03 | 35.98 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| 802.11n HT20 CH 165 5825MHz | | 11650 | 45.39 | -28.61 | 74 | 26.37 | 39.78 | 14.05 | 34.81 | 100 | 0 | P | H |
| | | 17475 | 50.74 | -23.26 | 74 | 27.7 | 41.93 | 17.1 | 35.99 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11650 | 45.65 | -28.35 | 74 | 26.63 | 39.78 | 14.05 | 34.81 | 100 | 0 | P | V |
| | | 17475 | 50.97 | -23.03 | 74 | 27.93 | 41.93 | 17.1 | 35.99 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



15E Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|--------------------------------------|---------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT40 CH 151 5755MHz | | 5711.4 | 61.24 | -12.76 | 74 | 53.2 | 32.29 | 9.39 | 33.64 | 145 | 62 | P | H |
| | | 5723.88 | 62.31 | -15.99 | 78.3 | 54.2 | 32.31 | 9.44 | 33.64 | 145 | 62 | P | H |
| | | 5713.72 | 50.91 | -3.09 | 54 | 42.87 | 32.29 | 9.39 | 33.64 | 145 | 62 | A | H |
| | * | 5757 | 95.45 | - | - | 87.3 | 32.36 | 9.44 | 33.65 | 145 | 62 | P | H |
| | * | 5757 | 89.34 | - | - | 81.19 | 32.36 | 9.44 | 33.65 | 145 | 62 | A | H |
| | | 5850.8 | 49.14 | -29.16 | 78.3 | 40.8 | 32.48 | 9.54 | 33.68 | 145 | 62 | P | H |
| | | 5862.96 | 48.36 | -25.64 | 74 | 40 | 32.51 | 9.54 | 33.69 | 145 | 62 | P | H |
| | | 5863.36 | 40.97 | -13.03 | 54 | 32.61 | 32.51 | 9.54 | 33.69 | 145 | 62 | A | H |
| | | 5712.28 | 54.98 | -19.02 | 74 | 46.94 | 32.29 | 9.39 | 33.64 | 118 | 105 | P | V |
| | | 5722.2 | 59.12 | -19.18 | 78.3 | 51.01 | 32.31 | 9.44 | 33.64 | 118 | 105 | P | V |
| | | 5714.92 | 45.67 | -8.33 | 54 | 37.63 | 32.29 | 9.39 | 33.64 | 118 | 105 | A | V |
| | * | 5757 | 90.71 | - | - | 82.56 | 32.36 | 9.44 | 33.65 | 118 | 105 | P | V |
| | * | 5757 | 84.14 | - | - | 75.99 | 32.36 | 9.44 | 33.65 | 118 | 105 | A | V |
| | | 5853.76 | 48.16 | -30.14 | 78.3 | 39.79 | 32.51 | 9.54 | 33.68 | 118 | 105 | P | V |
| | | 5866.08 | 48.75 | -25.25 | 74 | 40.39 | 32.51 | 9.54 | 33.69 | 118 | 105 | P | V |
| | 5880.24 | 40.99 | -13.01 | 54 | 32.61 | 32.53 | 9.54 | 33.69 | 118 | 105 | A | V | |



| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|--------------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBµV/m) | (dB) | (dBµV/m) | (dBµV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT40 CH 159 5795MHz | | 5696.2 | 49.96 | -24.04 | 74 | 41.93 | 32.27 | 9.39 | 33.63 | 148 | 62 | P | H |
| | | 5721.64 | 47.92 | -30.38 | 78.3 | 39.81 | 32.31 | 9.44 | 33.64 | 148 | 62 | P | H |
| | | 5690.84 | 41.12 | -12.88 | 54 | 33.09 | 32.27 | 9.39 | 33.63 | 148 | 62 | A | H |
| | * | 5793 | 95.54 | - | - | 87.3 | 32.41 | 9.49 | 33.66 | 148 | 62 | P | H |
| | * | 5793 | 88.52 | - | - | 80.28 | 32.41 | 9.49 | 33.66 | 148 | 62 | A | H |
| | | 5852.56 | 50.82 | -27.48 | 78.3 | 42.48 | 32.48 | 9.54 | 33.68 | 148 | 62 | P | H |
| | | 5869.68 | 49.88 | -24.12 | 74 | 41.52 | 32.51 | 9.54 | 33.69 | 148 | 62 | P | H |
| | | 5864.16 | 41.36 | -12.64 | 54 | 33 | 32.51 | 9.54 | 33.69 | 148 | 62 | A | H |
| | | 5695.56 | 49.14 | -24.86 | 74 | 41.11 | 32.27 | 9.39 | 33.63 | 100 | 116 | P | V |
| | | 5724.6 | 48.43 | -29.87 | 78.3 | 40.32 | 32.31 | 9.44 | 33.64 | 100 | 116 | P | V |
| | | 5691.48 | 40.58 | -13.42 | 54 | 32.55 | 32.27 | 9.39 | 33.63 | 100 | 116 | A | V |
| | * | 5793 | 90.57 | - | - | 82.33 | 32.41 | 9.49 | 33.66 | 100 | 116 | P | V |
| | * | 5793 | 84.25 | - | - | 76.01 | 32.41 | 9.49 | 33.66 | 100 | 116 | A | V |
| | | 5859.36 | 49.21 | -29.09 | 78.3 | 40.85 | 32.51 | 9.54 | 33.69 | 100 | 116 | P | V |
| | | 5884.88 | 48.97 | -25.03 | 74 | 40.57 | 32.53 | 9.57 | 33.7 | 100 | 116 | P | V |
| | 5874.24 | 40.85 | -13.15 | 54 | 32.47 | 32.53 | 9.54 | 33.69 | 100 | 116 | A | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



15E Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|--------------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11n HT40 CH 151 5755MHz | | 11510 | 45.2 | -28.8 | 74 | 25.98 | 40 | 13.95 | 34.73 | 100 | 0 | P | H |
| | | 17265 | 50.55 | -23.45 | 74 | 28.09 | 41.49 | 16.95 | 35.98 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11510 | 47.84 | -26.16 | 74 | 28.62 | 40 | 13.95 | 34.73 | 100 | 0 | P | V |
| | | 17265 | 50.15 | -23.85 | 74 | 27.69 | 41.49 | 16.95 | 35.98 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| 802.11n HT40 CH 159 5795MHz | | 11590 | 45.61 | -28.39 | 74 | 26.52 | 39.86 | 14 | 34.77 | 100 | 0 | P | H |
| | | 17385 | 50.26 | -23.74 | 74 | 27.48 | 41.74 | 17.03 | 35.99 | 100 | 0 | P | H |
| | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | H |
| | | 11590 | 46.91 | -27.09 | 74 | 27.82 | 39.86 | 14 | 34.77 | 100 | 0 | P | V |
| | | 17385 | 50.67 | -23.33 | 74 | 27.89 | 41.74 | 17.03 | 35.99 | 100 | 0 | P | V |
| | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V |
| Remark | 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. | | | | | | | | | | | | |



15E Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|-----------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 5GHz 802.11a LF | | 56.46 | 19.02 | -20.98 | 40 | 43.97 | 5.81 | 1.04 | 31.8 | 149 | 20 | P | H | |
| | | 233.31 | 14.71 | -31.29 | 46 | 34.79 | 9.9 | 1.79 | 31.77 | | | P | H | |
| | | 266.25 | 14.81 | -31.19 | 46 | 31.94 | 12.7 | 1.94 | 31.77 | | | P | H | |
| | | 347.6 | 15.8 | -30.2 | 46 | 31.31 | 14.1 | 2.17 | 31.78 | | | P | H | |
| | | 716.5 | 21.31 | -24.69 | 46 | 30.83 | 19.36 | 3.14 | 32.02 | | | P | H | |
| | | 841.1 | 22.32 | -23.68 | 46 | 30.44 | 20.2 | 3.4 | 31.72 | | | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 31.08 | 17.46 | -22.54 | 40 | 31.16 | 17.46 | 0.67 | 31.83 | | | P | V |
| | | | 54.84 | 18.87 | -21.13 | 40 | 43.5 | 6.13 | 1.04 | 31.8 | 158 | 13 | P | V |
| | | | 235.2 | 13.76 | -32.24 | 46 | 33.62 | 10.12 | 1.79 | 31.77 | | | P | V |
| | | | 608.7 | 20.48 | -25.52 | 46 | 30.81 | 18.75 | 2.96 | 32.04 | | | P | V |
| | | | 804.7 | 22.59 | -23.41 | 46 | 31.3 | 19.79 | 3.4 | 31.9 | | | P | V |
| | | | 874.7 | 22.92 | -23.08 | 46 | 30.98 | 20.05 | 3.44 | 31.55 | | | P | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | | |



15E Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|-------------------------------|--|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 5GHz 802.11n HT20 LF | | 153.12 | 12.63 | -30.87 | 43.5 | 33.07 | 9.88 | 1.46 | 31.78 | | | P | H | |
| | | 175.53 | 19.92 | -23.58 | 43.5 | 41.57 | 8.49 | 1.64 | 31.78 | 114 | 320 | P | H | |
| | | 199.83 | 19.58 | -23.92 | 43.5 | 41.12 | 8.6 | 1.64 | 31.78 | | | P | H | |
| | | 400.1 | 22.26 | -23.74 | 46 | 36.03 | 15.71 | 2.32 | 31.8 | | | P | H | |
| | | 480.6 | 17.81 | -28.19 | 46 | 29.9 | 17.21 | 2.57 | 31.87 | | | P | H | |
| | | 715.1 | 21.55 | -24.45 | 46 | 31.13 | 19.3 | 3.14 | 32.02 | | | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 113.16 | 16.2 | -27.3 | 43.5 | 35.4 | 11.3 | 1.28 | 31.78 | | | P | V |
| | | | 130.17 | 14.7 | -28.8 | 43.5 | 33.43 | 11.59 | 1.46 | 31.78 | | | P | V |
| | | | 269.76 | 15.07 | -30.93 | 46 | 32.48 | 12.42 | 1.94 | 31.77 | | | P | V |
| | | | 570.9 | 19.3 | -26.7 | 46 | 29.91 | 18.5 | 2.89 | 32 | | | P | V |
| | | | 675.2 | 20.75 | -25.25 | 46 | 30.87 | 18.9 | 3.02 | 32.04 | | | P | V |
| | | | 867 | 22.25 | -23.75 | 46 | 30.3 | 20.1 | 3.44 | 31.59 | 100 | 88 | P | V |
| | | | | | | | | | | | | | | V |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | 1. No other spurious found. 2. All results are PASS against limit line. | | | | | | | | | | | | | |



15E Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. | |
|-------------------------------|---|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|-------|-------|---|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) | |
| 5GHz 802.11n HT40 LF | | 142.86 | 15.5 | -28 | 43.5 | 35.39 | 10.43 | 1.46 | 31.78 | | | P | H | |
| | | 227.37 | 19.75 | -26.25 | 46 | 40.65 | 9.08 | 1.79 | 31.77 | | | P | H | |
| | | 229.53 | 16.88 | -29.12 | 46 | 37.44 | 9.42 | 1.79 | 31.77 | | | P | H | |
| | | 370 | 14.99 | -31.01 | 46 | 29.66 | 14.8 | 2.32 | 31.79 | | | P | H | |
| | | 564.6 | 19.9 | -26.1 | 46 | 30.62 | 18.5 | 2.77 | 31.99 | | | P | H | |
| | | 838.3 | 22.13 | -23.87 | 46 | 30.28 | 20.18 | 3.4 | 31.73 | 101 | 22 | P | H | |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | | | | | | | | | | | | H |
| | | | 49.17 | 20.84 | -19.16 | 40 | 43.61 | 7.99 | 1.04 | 31.8 | 133 | 163 | P | V |
| | | | 53.76 | 20.62 | -19.38 | 40 | 45 | 6.38 | 1.04 | 31.8 | | | P | V |
| | | | 113.97 | 16.12 | -27.38 | 43.5 | 35.32 | 11.3 | 1.28 | 31.78 | | | P | V |
| | | | 514.9 | 18.29 | -27.71 | 46 | 30.06 | 17.5 | 2.64 | 31.91 | | | P | V |
| | | | 606.6 | 19.94 | -26.06 | 46 | 30.36 | 18.66 | 2.96 | 32.04 | | | P | V |
| | | 848.1 | 22.09 | -23.91 | 46 | 30.13 | 20.2 | 3.44 | 31.68 | | | P | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| | | | | | | | | | | | | | V | |
| Remark | <p>1. No other spurious found.</p> <p>2. All results are PASS against limit line.</p> | | | | | | | | | | | | | |



Note symbol

| | |
|-----|--|
| * | Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c). |
| ! | Test result is over limit line. |
| P/A | Peak or Average |
| H/V | Horizontal or Vertical |



A calculation example for radiated spurious emission is shown as below:

| WIFI | Note | Frequency | Level | Over | Limit | Read | Antenna | Cable | Preamp | Ant | Table | Peak | Pol. |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant. | | | | Limit | Line | Level | Factor | Loss | Factor | Pos | Pos | Avg. | |
| 1 | | (MHz) | (dBμV/m) | (dB) | (dBμV/m) | (dBμV) | (dB/m) | (dB) | (dB) | (cm) | (deg) | (P/A) | (H/V) |
| 802.11b | | 2390 | 55.45 | -18.55 | 74 | 54.51 | 32.22 | 4.58 | 35.86 | 103 | 308 | P | H |
| CH 01 | | | | | | | | | | | | | |
| 2412MHz | | 2390 | 43.54 | -10.46 | 54 | 42.6 | 32.22 | 4.58 | 35.86 | 103 | 308 | A | H |

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.