


FCC SAR Test Report

APPLICANT : Sony Mobile Communications Inc
EQUIPMENT : PDA Phone
BRAND NAME : Sony
TYPE NAME : PM-0785-BV
FCC ID : PY7-PM0785
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

- 1. Statement of Compliance 4
- 2. Administration Data 5
- 3. Guidance Standard 5
- 4. Equipment Under Test (EUT) 6
 - 4.1 General Information 6
 - 4.2 Device Serial Number 7
 - 4.3 Maximum Tune-up Limit 7
 - 4.4 General LTE SAR Test and Reporting Considerations 9
- 5. RF Exposure Limits 11
 - 5.1 Uncontrolled Environment 11
 - 5.2 Controlled Environment 11
- 6. Specific Absorption Rate (SAR) 12
 - 6.1 Introduction 12
 - 6.2 SAR Definition 12
- 7. System Description and Setup 13
- 8. Measurement Procedures 14
 - 8.1 Spatial Peak SAR Evaluation 14
 - 8.2 Power Reference Measurement 15
 - 8.3 Area Scan 15
 - 8.4 Zoom Scan 16
 - 8.5 Volume Scan Procedures 16
 - 8.6 Power Drift Monitoring 16
- 9. Test Equipment List 17
- 10. System Verification 18
 - 10.1 Tissue Verification 18
 - 10.2 System Performance Check Results 20
- 11. RF Exposure Positions 21
 - 11.1 Ear and handset reference point 21
 - 11.2 Definition of the cheek position 22
 - 11.3 Definition of the tilt position 23
 - 11.4 Body Worn Accessory 24
 - 11.5 Wireless Router 24
- 12. Conducted RF Output Power (Unit: dBm) 25
- 13. Antenna Location 48
- 14. SAR Test Results 49
 - 14.1 Head SAR 50
 - 14.2 Hotspot SAR 54
 - 14.3 Body Worn Accessory SAR 58
 - 14.4 Repeated SAR Measurement 60
- 15. Simultaneous Transmission Analysis 61
 - 15.1 Head Exposure Conditions 62
 - 15.2 Hotspot Exposure Conditions 66
 - 15.3 Body-Worn Accessory Exposure Conditions 74
 - 15.4 SPLSR Evaluation and Analysis 78
- 16. Uncertainty Assessment 83
- 17. References 86
- Appendix A. Plots of System Performance Check
- Appendix B. Plots of High SAR Measurement
- Appendix C. DASy Calibration Certificate
- Appendix D. Test Setup Photos



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA4D0462	Rev. 01	Initial issue of report	Mar. 23, 2015



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Sony Mobile Communications Inc, PDA Phone**, are as follows.

Equipment Class	Frequency Band	Highest 1g SAR Summary						Highest Simultaneous Transmission 1g SAR (W/kg)
		Head (Separation 0mm)		Body-worn (Separation 15mm)		Wireless Router (Separation 10mm)		
		Maximum output power (dBm)	1g SAR (W/kg)	Maximum output power (dBm)	1g SAR (W/kg)	Maximum output power (dBm)	1g SAR (W/kg)	
PCE	GSM850(4Tx Slots)	28.00	0.78	28.00	0.71	28.00	0.81	1.50
	GSM1900(4Tx Slots)	28.00	0.96	28.00	0.74	28.00	1.18	
	WCDMA Band V	25.00	0.62	25.00	0.82	25.00	0.88	
	WCDMA Band IV	24.00	0.62	24.00	0.57	24.00	0.95	
	WCDMA Band II	24.00	0.83	24.00	0.67	24.00	1.19	
	LTE Band 12	25.00	0.19	25.00	0.26	25.00	0.30	
	LTE Band 17	25.00	0.20	25.00	0.28	25.00	0.36	
	LTE Band 13	25.00	0.55	25.00	0.71	25.00	0.76	
	LTE Band 5	25.00	0.65	25.00	0.73	25.00	0.78	
	LTE Band 4	24.00	0.60	24.00	0.57	24.00	1.02	
	LTE Band 2	24.00	0.83	24.00	0.77	24.00	1.19	
LTE Band 7	23.00	1.19	23.00	0.58	23.00	1.08		
DTS	2.4GHz WLAN	18.00	0.51	18.00	0.34	18.00	0.87	1.50
NII	5.2GHz WLAN	14.00	0.25	14.00	0.08	14.00	0.16	1.33
	5.3GHz WLAN	14.00	0.25	14.00	0.07			
	5.5GHz WLAN	14.00	0.24	14.00	0.06			
	5.8GHz WLAN	14.00	0.38	14.00	0.05	14.00	0.08	
DSS	Bluetooth	10.00	0.02					1.46
Date of Testing:		2014/12/23~2015/03/16						

Frequency Band		Highest 10g SAR Summary						Highest Simultaneous Transmission 10g SAR (W/kg)
		Head (Separation 0mm)		Body-worn (Separation 15mm)		Wireless Router (Separation 10mm)		
		Maximum output power (dBm)	10g SAR (W/kg)	Maximum output power (dBm)	10g SAR (W/kg)	Maximum output power (dBm)	10g SAR (W/kg)	
GSM	GSM850(4Tx Slots)	28.00	0.56	28.00	0.54	28.00	0.62	1.16
	GSM1900(4Tx Slots)	28.00	0.59	28.00	0.46	28.00	0.77	
WCDMA	Band V	25.00	0.48	25.00	0.62	25.00	0.67	
	Band IV	24.00	0.41	24.00	0.38	24.00	0.59	
	Band II	24.00	0.51	24.00	0.41	24.00	0.72	
LTE	Band 12	25.00	0.15	25.00	0.20	25.00	0.23	
	Band 17	25.00	0.16	25.00	0.21	25.00	0.24	
	Band 13	25.00	0.42	25.00	0.55	25.00	0.59	
	Band 5	25.00	0.48	25.00	0.57	25.00	0.61	
	LTE Band 4	24.00	0.39	24.00	0.38	24.00	0.65	
WLAN	LTE Band 2	24.00	0.51	24.00	0.48	24.00	0.77	
	LTE Band 7	23.00	0.65	23.00	0.32	23.00	0.58	
	2.4GHz WLAN	18.00	0.23	18.00	0.17	18.00	0.38	
	5.2GHz WLAN	14.00	0.07	14.00	0.03	14.00	0.05	
WLAN	5.3GHz WLAN	14.00	0.08	14.00	0.03			0.80
	5.5GHz WLAN	14.00	0.07	14.00	0.02			
	5.8GHz WLAN	14.00	0.12	14.00	0.02	14.00	0.02	
Bluetooth	2.4GHz Band	10.00	< 0.01					0.88
Date of Testing:		2014/12/23~2015/03/16						

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.



2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	Sony Mobile Communications Inc
Address	Nya Vattentornet 22188 Lund/Sweden

Manufacturer	
Company Name	Sony Mobile Communications Inc
Address	Nya Vattentornet 22188 Lund/Sweden

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v02



4. Equipment Under Test (EUT)

4.1 General Information

The equipment under test is a smart phone supporting, GSM850/900/1800/1900, UMTS I / II / IV / V / VIII, LTE Band 2 / 4 / 5 / 7 / 12 / 13 / 17 / 28, 802.11 a/b/g/n, Bluetooth, FM Receiver, NFC, ANT+ and GPS features, and below is details of information. For FCC only wireless modes in US frequency bands are tested.

Product Feature & Specification	
Equipment Name	PDA Phone
Brand Name	Sony
Type Name	PM-0785-BV
FCC ID	PY7-PM0785
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	<ul style="list-style-type: none"> • GSM/GPRS/EGPRS • RMC/AMR 12.2Kbps • HSDPA • HSUPA • DC-HSDPA • LTE: QPSK, 16QAM • 802.11a/b/g/n HT20/HT40 • Bluetooth v3.0+EDR , Bluetooth v4.0-LE • NFC: ASK • ANT+
HW Version	AP
SW Version	26.1.A.0.66
GSM / (E)GPRS Dual Transfer mode	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Identical Prototype
Remark: <ol style="list-style-type: none"> 1. This device 2.4GHz supports Hotspot and 5.2GHz / 5.8GHz WLAN supports WiFi Direct (GC/GO) operation, and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (GC only). 2. This device supported VoIP in EGPRS, WCDMA, LTE (e.g. 3rd party VoIP) and 802.11n-HT40 is not supported in 2.4GHz WLAN. 3. WLAN operation in 5600 MHz ~ 5650 MHz is notched. 	



4.2 Device Serial Number

Sample	Serial Number	IMEI Code
GSM SAR measurements	YT9110K9G9	004402454111299
UMTS SAR measurements	YT9110K9A8	004402454111273
LTE SAR measurements	YT9110K9AC	004402454111265
BT SAR measurements	YT910ZRWBX	004402453307021
WLAN SAR measurements	YT910ZRWDA	004402453307252
GSM Conducted measurements	YT9110K9G9	004402454111299
UMTS Conducted measurements	YT9110K9A8	004402454111273
LTE Conducted measurements	YT9110K9AC	004402454111265
WLAN Conducted measurements	YT910ZRWBX	004402453275632
BT Conducted measurements	YT910ZR3D	004402453307021

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

4.3 Maximum Tune-up Limit

Mode		Burst average power(dBm)	
		GSM 850	GSM 1900
GSM (GMSK, 1 Tx slot)		34.00	31.00
GPRS (GMSK, 1 Tx slot)		34.00	31.00
GPRS (GMSK, 2 Tx slots)		30.00	30.00
GPRS (GMSK, 3 Tx slots)		29.00	29.00
GPRS (GMSK, 4 Tx slots)		28.00	28.00
EDGE (8PSK, 1 Tx slot)		27.00	26.00
EDGE (8PSK, 2 Tx slots)		26.00	26.00
EDGE (8PSK, 3 Tx slots)		26.00	26.00
EDGE (8PSK, 4 Tx slots)		25.00	25.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.00	30.00
	GPRS (GMSK, 1 Tx slot)	30.00	30.00
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.00	30.00
	GPRS (GMSK, 1 Tx slot)	30.00	30.00
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.00	29.00
	GPRS (GMSK, 2 Tx slots)	29.00	29.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.00	30.00
	EDGE (8PSK, 1 Tx slot)	26.00	26.00
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.00	30.00
	EDGE (8PSK, 1 Tx slot)	26.00	26.00
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	29.00	29.00
	EDGE (8PSK, 2 Tx slots)	26.00	26.00



Mode		Average Power (dBm)	
WCDMA	Band V	25.00	
	Band IV	24.00	
	Band II	24.00	
LTE	Band 12	25.00	
	Band 17	25.00	
	Band 13	25.00	
	Band 5	25.00	
	Band 4	24.00	
	Band 2	24.00	
	Band 7	23.00	
2.4GHz WLAN	802.11b	18.00	
	802.11g	15.00	
	802.11n-HT20	13.00	
5GHz WLAN	802.11a	14.00	
	802.11n-HT20	12.50	
	802.11n-HT40	5.2GHz	12.00
		5.3GHz	12.00
		5.5GHz	11.00
		5.8GHz	11.00
	Bluetooth v3.0+EDR	Low	10.00
Middle		11.00	
High		10.00	
Bluetooth v4.0+LE		3.00	



4.4 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r03																																														
FCC ID	PY7-PM0785																																													
Equipment Name	PDA Phone																																													
Operating Frequency Range of each LTE transmission band	LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz																																													
Channel Bandwidth	LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz																																													
Release and Category	Rel10, Cat4																																													
uplink modulations used	QPSK, and 16QAM																																													
LTE Voice / Data requirements	Data only																																													
LTE MPR permanently built-in by design	<table border="1"> <caption>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</caption> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table>								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																							
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																								
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																							
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																							
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																							
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																													
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																													
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																														
LTE Band 12																																														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																						
L	23017	699.7	23025	700.5	23035	701.5	23060	704																																						
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5																																						
H	23173	715.3	23165	714.5	23155	713.5	23130	711																																						
LTE Band 17																																														
	Bandwidth 5 MHz			Bandwidth 10 MHz																																										
	Channel #		Freq.(MHz)	Channel #		Freq. (MHz)																																								
L	23755		706.5	23780		709																																								
M	23790		710	23790		710																																								
H	23825		713.5	23800		711																																								
LTE Band 13																																														
	Bandwidth 5 MHz			Bandwidth 10 MHz																																										
	Channel #		Freq.(MHz)	Channel #		Freq.(MHz)																																								
L	23205		779.5																																											
M	23230		782	23230		782																																								
H	23255		784.5																																											



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				



5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

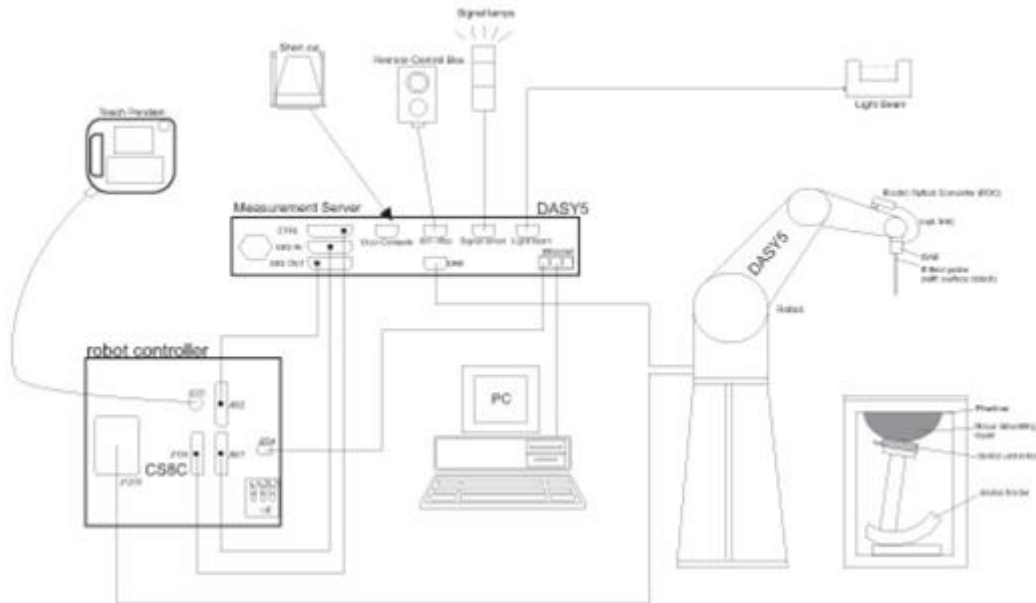

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.



8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 19, 2014	Nov. 18, 2015
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 19, 2014	Nov. 18, 2015
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 14, 2014	Nov. 13, 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 14, 2014	Nov. 13, 2015
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 19, 2014	Nov. 18, 2015
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2014	Aug. 20, 2015
SPEAG	Data Acquisition Electronics	DAE4	1388	Sep. 24, 2014	Sep. 23, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE4	1279	Jul. 23, 2014	Jul. 22, 2015
SPEAG	Data Acquisition Electronics	DAE3	495	May. 19, 2014	May. 18, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 14, 2014	Nov. 13, 2015
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 26, 2014	Sep. 25, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Sep. 29, 2014	Sep. 28, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 22, 2014	May. 21, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 18, 2014	Nov. 17, 2015
Wisewind	Thermometer	ETP-101	TM560	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	ETP-101	TM685	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM642	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM281	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	HTC-1	TM324	Oct. 21, 2014	Oct. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
WonDer	Thermometer	WD-5015	TM225	Oct. 21, 2014	Oct. 20, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Feb. 11, 2014	Feb. 10, 2015
Anritsu	Radio Communication Analyzer	MT8820C	6201381760	May. 28, 2014	May. 27, 2015
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 27, 2014	May. 26, 2015
Anritsu	BT Base Station	MT8852B	1350002	Dec. 12, 2014	Dec. 11, 2015
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMU200A	102502	Jul. 07, 2014	Jul. 06, 2015
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Agilent	ENA Network Analyzer	E5071C	MY46101588	May. 31, 2014	May. 30, 2015
Anritsu	Power Meter	ML2495A	1036004	Aug. 09, 2014	Aug. 08, 2015
Anritsu	Power Sensor	MA2411B	1027253	Aug. 11, 2014	Aug. 10, 2015
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015
Agilent	Dual Directional Coupler	778D	50422		Note1
Woken	Attenuator 1	WK0602-XX	N/A		Note1
PE	Attenuator 2	PE7005-10	N/A		Note1
PE	Attenuator 3	PE7005- 3	N/A		Note1
AR	Power Amplifier	5S1G4M2	0328767		Note1
Mini-Circuits	Power Amplifier	ZVE-3W	162601250		Note1
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344		Note1

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.



10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
750	HSL	22.1	0.892	40.376	0.89	41.90	0.22	-3.64	±5	2015/2/12
750	MSL	22.7	0.964	54.284	0.96	55.50	0.42	-2.19	±5	2015/1/30
835	HSL	22.3	0.903	43.122	0.90	41.50	0.33	3.91	±5	2015/1/26
835	HSL	22.4	0.873	41.054	0.90	41.50	-3.00	-1.07	±5	2015/1/28
835	HSL	22.2	0.869	42.106	0.90	41.50	-3.44	1.46	±5	2015/2/10
835	MSL	22.6	0.954	52.753	0.97	55.20	-1.65	-4.43	±5	2015/1/28
835	MSL	22.7	0.979	55.297	0.97	55.20	0.93	0.18	±5	2015/1/31
1750	HSL	22.3	1.349	40.400	1.37	40.10	-1.53	0.75	±5	2015/1/26
1750	HSL	22.3	1.382	40.049	1.37	40.10	0.88	-0.13	±5	2015/2/9
1750	MSL	22.6	1.473	54.506	1.49	53.40	-1.14	2.07	±5	2015/1/26
1750	MSL	22.3	1.455	54.501	1.49	53.40	-2.35	2.06	±5	2015/1/29
1900	HSL	22.5	1.438	39.210	1.40	40.00	2.71	-1.98	±5	2015/1/25
1900	HSL	22.3	1.425	38.264	1.40	40.00	1.79	-4.34	±5	2015/2/9
1900	MSL	22.4	1.553	51.068	1.52	53.30	2.17	-4.19	±5	2015/1/25
1900	MSL	22.4	1.569	51.586	1.52	53.30	3.22	-3.22	±5	2015/1/29
2450	HSL	22.4	1.840	38.700	1.80	39.20	2.22	-1.28	±5	2014/12/23
2450	HSL	22.4	1.840	38.600	1.80	39.20	2.22	-1.53	±5	2014/12/31
2450	HSL	22.4	1.840	38.651	1.80	39.20	2.22	-1.40	±5	2015/3/13
2450	MSL	22.4	1.984	51.263	1.95	52.70	1.74	-2.73	±5	2015/2/16
2450	MSL	22.3	2.020	53.849	1.95	52.70	3.59	2.18	±5	2015/3/13
2600	HSL	22.4	2.018	37.679	1.96	39.00	2.96	-3.39	±5	2015/2/4
2600	MSL	22.7	2.209	51.123	2.16	52.50	2.27	-2.62	±5	2015/1/31
5200	HSL	22.4	4.812	35.445	4.66	36.00	3.26	-1.54	±5	2015/2/16
5200	HSL	22.4	4.529	37.014	4.66	36.00	-2.81	2.82	±5	2015/3/13
5200	MSL	22.4	5.240	47.500	5.30	49.00	-1.13	-3.06	±5	2014/12/26
5200	MSL	22.4	5.432	47.957	5.30	49.00	2.49	-2.13	±5	2015/3/5
5200	MSL	22.2	5.439	47.870	5.30	49.00	2.62	-2.31	±5	2015/3/14
5300	HSL	22.4	4.920	35.315	4.76	35.90	3.36	-1.63	±5	2015/2/16
5300	HSL	22.4	4.648	36.875	4.76	35.90	-2.35	2.72	±5	2015/3/13
5300	MSL	22.4	5.380	47.200	5.42	48.90	-0.74	-3.48	±5	2014/12/26
5300	MSL	22.2	5.578	47.661	5.42	48.90	2.92	-2.53	±5	2015/3/14
5600	HSL	22.4	5.231	34.710	5.07	35.50	3.18	-2.23	±5	2015/2/16
5600	HSL	22.4	4.928	36.365	5.07	35.50	-2.80	2.44	±5	2015/3/13
5600	MSL	22.4	5.770	46.800	5.77	48.50	0.00	-3.51	±5	2014/12/26
5600	MSL	22.2	5.944	47.222	5.77	48.50	3.02	-2.64	±5	2015/3/14
5800	HSL	22.5	5.390	34.400	5.27	35.30	2.28	-2.55	±5	2014/12/25
5800	HSL	22.4	5.107	36.213	5.27	35.30	-3.09	2.59	±5	2015/3/13
5800	MSL	22.4	6.130	46.500	6.00	48.20	2.17	-3.53	±5	2014/12/26
5800	MSL	22.4	6.251	46.901	6.00	48.20	4.18	-2.70	±5	2015/3/5
5800	MSL	22.2	6.228	47.484	6.00	48.20	3.80	-1.49	±5	2015/3/16



10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/2/12	750	HSL	250	D750V3-1099	EX3DV4 - SN3935	DAE4 Sn1338	2.00	8.06	8.00	-0.74
2015/1/30	750	MSL	250	D750V3-1099	EX3DV4 - SN3697	DAE4 Sn1388	2.05	8.56	8.20	-4.21
2015/1/26	835	HSL	250	D835V2-4d162	EX3DV4 - SN3931	DAE3 Sn577	2.34	9.15	9.36	2.30
2015/1/28	835	HSL	250	D835V2-4d162	EX3DV4 - SN3697	DAE4 Sn1388	2.29	9.15	9.16	0.11
2015/2/10	835	HSL	250	D835V2-4d162	EX3DV4 - SN3935	DAE4 Sn1338	2.26	9.15	9.04	-1.20
2015/1/28	835	MSL	250	D835V2-4d162	EX3DV4 - SN3697	DAE4 Sn1388	2.31	9.56	9.24	-3.35
2015/1/31	835	MSL	250	D835V2-4d162	EX3DV4 - SN3697	DAE4 Sn1388	2.44	9.56	9.76	2.09
2015/1/26	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3931	DAE3 Sn577	9.25	36.80	37.00	0.54
2015/2/9	1750	HSL	250	D1750V2-1068	EX3DV4 - SN3935	DAE4 Sn1338	9.22	36.80	36.88	0.22
2015/1/26	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3931	DAE3 Sn577	9.40	38.00	37.60	-1.05
2015/1/29	1750	MSL	250	D1750V2-1068	EX3DV4 - SN3697	DAE4 Sn1388	9.13	38.00	36.52	-3.89
2015/1/25	1900	HSL	250	D1900V2-5d182	EX3DV4 - SN3931	DAE3 Sn577	9.60	39.80	38.40	-3.52
2015/2/9	1900	HSL	250	D1900V2-5d182	EX3DV4 - SN3935	DAE4 Sn1338	9.75	39.80	39.00	-2.01
2015/1/25	1900	MSL	250	D1900V2-5d182	EX3DV4 - SN3931	DAE3 Sn577	10.10	40.00	40.40	1.00
2015/1/29	1900	MSL	250	D1900V2-5d182	EX3DV4 - SN3697	DAE4 Sn1388	9.86	40.00	39.44	-1.40
2014/12/23	2450	HSL	250	D2450V2-924	ES3DV3 - SN3270	DAE4 Sn778	13.90	51.90	55.60	7.13
2014/12/31	2450	HSL	250	D2450V2-924	ES3DV3 - SN3270	DAE4 Sn778	13.20	51.90	52.80	1.73
2015/3/13	2450	HSL	250	D2450V2-924	EX3DV4 - SN3931	DAE3 Sn577	13.00	51.90	52.00	0.19
2015/2/16	2450	MSL	250	D2450V2-924	EX3DV4 - SN3955	DAE4 Sn1399	12.10	51.40	48.40	-5.84
2015/3/13	2450	MSL	250	D2450V2-924	EX3DV4 - SN3931	DAE3 Sn577	12.60	51.40	50.40	-1.95
2015/2/4	2600	HSL	250	D2600V2-1070	EX3DV4 - SN3925	DAE3 Sn495	13.40	56.90	53.60	-5.80
2015/1/31	2600	MSL	250	D2600V2-1070	EX3DV4 - SN3954	DAE4 Sn1279	13.10	55.30	52.40	-5.24
2015/2/16	5200	HSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.32	81.10	83.20	2.59
2015/3/13	5200	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.50	81.10	75.00	-7.52
2014/12/26	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.79	77.50	77.90	0.52
2015/3/5	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.83	77.50	78.30	1.03
2015/3/14	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.84	77.50	78.40	1.16
2015/2/16	5300	HSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.87	86.60	88.70	2.42
2015/3/13	5300	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.09	86.60	80.90	-6.58
2014/12/26	5300	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.97	80.00	79.70	-0.37
2015/3/14	5300	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.21	80.00	82.10	2.63
2015/2/16	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	9.21	85.80	92.10	7.34
2015/3/13	5600	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.31	85.80	83.10	-3.15
2014/12/26	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.32	85.20	83.20	-2.35
2015/3/14	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.55	85.20	85.50	0.35
2014/12/25	5800	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.75	82.90	87.50	5.55
2015/3/13	5800	HSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.77	82.90	77.70	-6.27
2014/12/26	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.40	78.40	84.00	7.14
2015/3/5	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	7.77	78.40	77.70	-0.89
2015/3/16	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3925	DAE3 Sn495	8.23	78.40	82.30	4.97

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

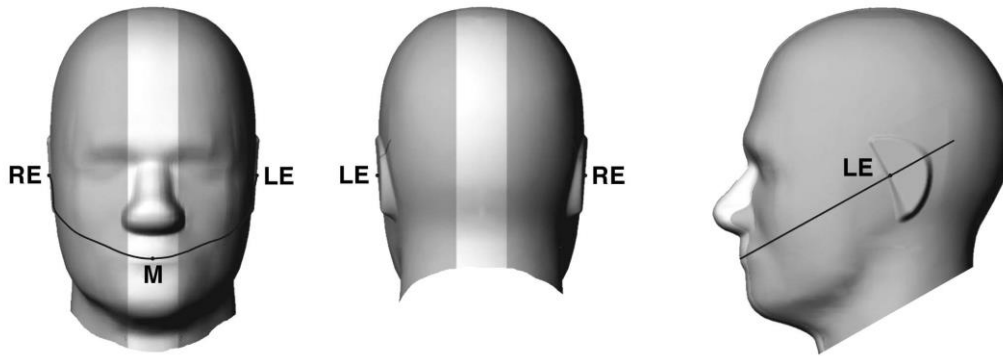


Fig 9.1.1 Front, back, and side views of SAM twin phantom

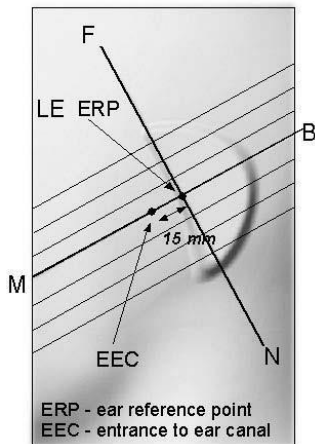


Fig 9.1.2 Close-up side view of phantom showing the ear region.

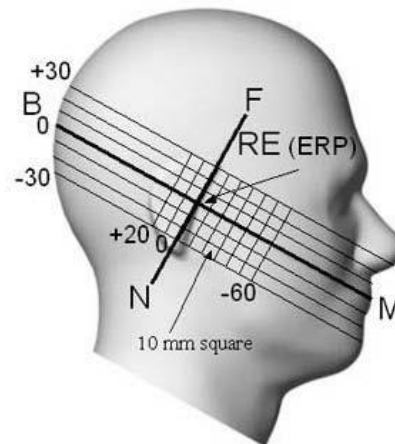


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

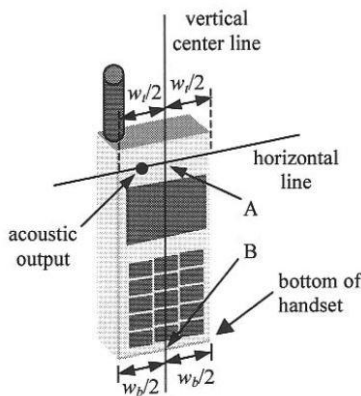


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

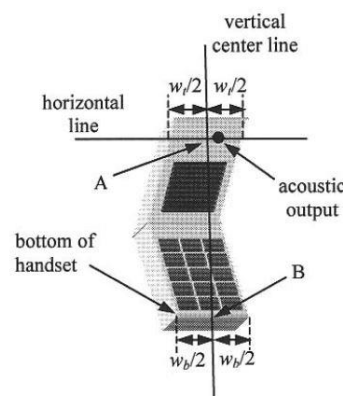


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

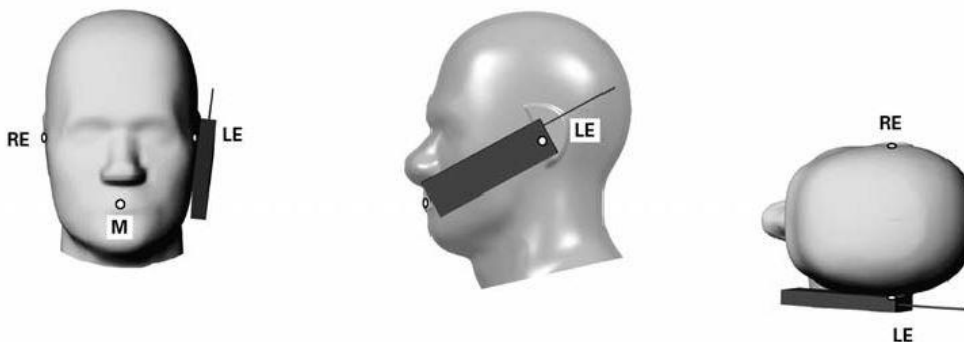


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

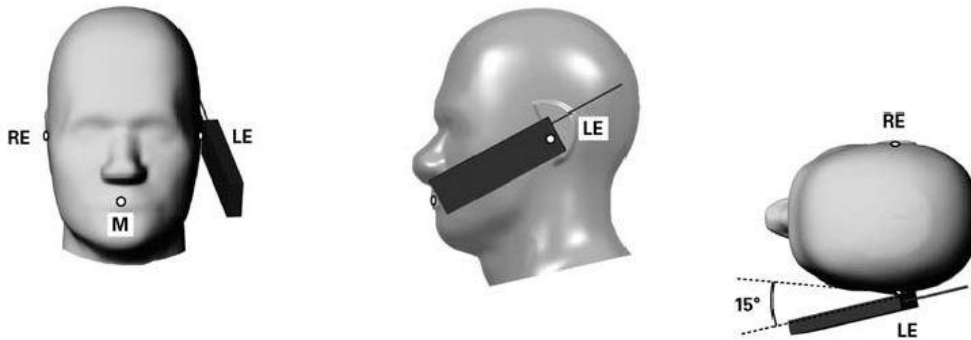


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

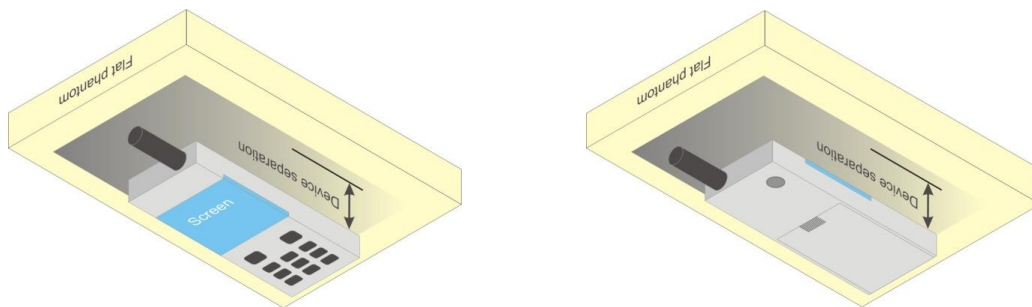


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06 v02 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$
- Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
- Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.

Band GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)		33.15	33.29	33.41	34.00	24.15	24.29	24.41	25.00
GPRS (GMSK, 1 Tx slot)		33.17	33.31	33.44	34.00	24.17	24.31	24.44	25.00
GPRS (GMSK, 2 Tx slots)		28.84	28.96	29.00	30.00	22.84	22.96	23.00	24.00
GPRS (GMSK, 3 Tx slots)		27.69	27.81	27.59	29.00	23.43	23.55	23.33	24.74
GPRS (GMSK, 4 Tx slots)		27.88	27.67	27.85	28.00	24.88	24.67	24.85	25.00
EDGE (8PSK, 1 Tx slot)		26.99	26.85	26.86	27.00	17.99	17.85	17.86	18.00
EDGE (8PSK, 2 Tx slots)		26.00	25.95	26.00	26.00	20.00	19.95	20.00	20.00
EDGE (8PSK, 3 Tx slots)		25.86	25.79	25.74	26.00	21.60	21.53	21.48	21.74
EDGE (8PSK, 4 Tx slots)		24.73	24.66	24.64	25.00	21.73	21.66	21.64	22.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	28.81	28.91	28.96	30.00	22.74	22.83	22.87	23.98
	GPRS (GMSK, 1 Tx slot)	28.71	28.80	28.83	30.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	28.79	28.86	28.91	30.00	22.69	22.76	22.83	23.98
	GPRS (GMSK, 1 Tx slot)	28.63	28.69	28.79	30.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.61	27.76	27.52	29.00	23.30	23.43	23.23	24.74
	GPRS (GMSK, 2 Tx slots)	27.53	27.65	27.47	29.00				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	28.71	28.83	28.91	30.00	21.53	21.58	21.66	22.42
	EDGE (8PSK, 1 Tx slot)	25.96	25.87	25.95	26.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	28.65	28.76	28.84	30.00	21.48	21.52	21.60	22.42
	EDGE (8PSK, 1 Tx slot)	25.93	25.84	25.91	26.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.61	27.74	27.53	29.00	22.24	22.25	22.15	22.98
	EDGE (8PSK, 2 Tx slots)	25.81	25.73	25.71	26.00				



Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		30.77	30.85	30.96	31.00	21.77	21.85	21.96	22.00
GPRS (GMSK, 1 Tx slot)		30.80	30.88	31.00	31.00	21.80	21.88	22.00	22.00
GPRS (GMSK, 2 Tx slots)		29.15	29.32	29.44	30.00	23.15	23.32	23.44	24.00
GPRS (GMSK, 3 Tx slots)		27.26	27.37	27.37	29.00	23.00	23.11	23.11	24.74
GPRS (GMSK, 4 Tx slots)		27.39	27.44	27.50	28.00	24.39	24.44	24.50	25.00
EDGE (8PSK, 1 Tx slot)		25.65	25.71	25.75	26.00	16.65	16.71	16.75	17.00
EDGE (8PSK, 2 Tx slots)		25.78	25.86	25.94	26.00	19.78	19.86	19.94	20.00
EDGE (8PSK, 3 Tx slots)		25.69	25.72	25.74	26.00	21.43	21.46	21.48	21.74
EDGE (8PSK, 4 Tx slots)		24.71	24.83	24.85	25.00	21.71	21.83	21.85	22.00
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.10	29.25	29.36	30.00	23.03	23.19	23.31	23.98
	GPRS (GMSK, 1 Tx slot)	29.01	29.18	29.31	30.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.07	29.21	29.32	30.00	22.99	23.16	23.27	23.98
	GPRS (GMSK, 1 Tx slot)	28.96	29.16	29.27	30.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.21	27.31	27.31	29.00	22.89	23.00	23.01	24.74
	GPRS (GMSK, 2 Tx slots)	27.12	27.24	27.25	29.00				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.13	29.21	29.31	30.00	21.74	21.81	21.92	22.42
	EDGE (8PSK, 1 Tx slot)	25.76	25.81	25.92	26.00				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	29.10	29.21	29.28	30.00	21.71	21.81	21.89	22.42
	EDGE (8PSK, 1 Tx slot)	25.73	25.81	25.91	26.00				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	27.21	27.31	27.31	29.00	21.95	22.02	22.03	22.98
	EDGE (8PSK, 2 Tx slots)	25.61	25.66	25.67	26.00				

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

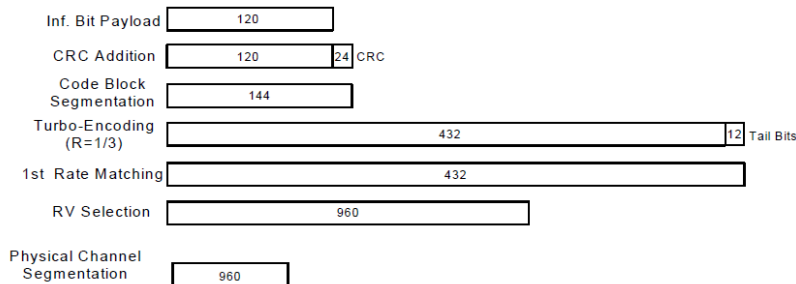


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel			4357	4407	4458	9662	9800	9938	1537	1638	1738
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
3GPP MPR (dB)	3GPP Rel 99	AMR 12.2Kbps	24.77	24.80	24.85	23.71	23.71	23.91	23.99	23.76	23.81
	3GPP Rel 99	RMC 12.2Kbps	24.79	24.81	24.87	23.75	23.73	23.92	24.00	23.79	23.85
0	3GPP Rel 6	HSDPA Subtest-1	23.79	23.70	23.86	23.08	22.92	23.08	23.00	22.87	23.00
0	3GPP Rel 6	HSDPA Subtest-2	23.71	23.78	23.86	22.81	22.86	23.01	22.99	22.78	22.85
0.5	3GPP Rel 6	HSDPA Subtest-3	23.34	23.29	23.36	22.27	22.30	22.39	22.33	22.31	22.41
0.5	3GPP Rel 6	HSDPA Subtest-4	23.29	23.27	23.33	22.35	22.35	22.36	22.33	22.28	22.35
0	3GPP Rel 8	DC-HSDPA Subtest-1	23.74	23.68	23.87	23.06	22.91	23.01	22.90	22.81	22.91
0	3GPP Rel 8	DC-HSDPA Subtest-2	23.72	23.72	23.84	22.79	22.84	23.00	22.87	22.70	22.81
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	23.31	23.25	23.31	22.21	22.25	22.27	22.31	22.28	22.35
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	23.32	23.25	23.30	22.30	22.30	22.31	22.30	22.25	22.31
0	3GPP Rel 6	HSUPA Subtest-1	23.30	23.85	23.50	22.25	22.50	22.82	22.99	22.86	22.59
2	3GPP Rel 6	HSUPA Subtest-2	22.01	22.26	22.03	21.75	21.74	21.81	21.60	21.52	21.44
1	3GPP Rel 6	HSUPA Subtest-3	22.24	22.37	22.27	21.46	21.68	21.36	21.81	21.69	21.76
2	3GPP Rel 6	HSUPA Subtest-4	22.54	22.80	22.90	22.41	21.77	22.35	22.53	22.24	22.09
0	3GPP Rel 6	HSUPA Subtest-5	23.91	23.71	23.96	22.92	22.94	23.06	22.97	22.87	22.77



<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	24.01	24.36	24.21	25	0
10	QPSK	1	24	24.00	24.10	24.14		
10	QPSK	1	49	23.89	23.88	23.96		
10	QPSK	25	0	23.06	23.21	23.08	24	1
10	QPSK	25	12	23.05	23.07	23.04		
10	QPSK	25	24	23.04	22.97	23.11		
10	QPSK	50	0	23.07	23.21	23.20		
10	16QAM	1	0	23.17	23.08	23.49	24	1
10	16QAM	1	24	23.93	23.38	23.78		
10	16QAM	1	49	23.85	23.24	23.65		
10	16QAM	25	0	21.90	22.07	22.28	23	2
10	16QAM	25	12	22.07	22.29	22.13		
10	16QAM	25	24	22.11	22.31	22.21		
10	16QAM	50	0	22.02	21.89	22.08		
Channel				23035	23095	23155	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	24.01	24.22	24.16	25	0
5	QPSK	1	12	24.00	24.21	24.15		
5	QPSK	1	24	23.89	24.03	23.90		
5	QPSK	12	0	23.09	23.03	23.12	24	1
5	QPSK	12	6	23.08	23.02	23.04		
5	QPSK	12	11	22.98	22.97	23.21		
5	QPSK	25	0	22.99	23.04	23.07		
5	16QAM	1	0	23.20	23.62	23.19	24	1
5	16QAM	1	12	23.10	23.73	23.72		
5	16QAM	1	24	23.22	23.35	23.78		
5	16QAM	12	0	21.91	22.28	22.36	23	2
5	16QAM	12	6	21.89	22.27	22.27		
5	16QAM	12	11	21.88	22.21	21.91		
5	16QAM	25	0	22.11	21.93	22.03		
Channel				23025	23095	23165	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	24.11	24.30	24.18	25	0
3	QPSK	1	7	24.06	24.20	24.17		
3	QPSK	1	14	24.10	23.76	23.77		
3	QPSK	8	0	23.15	23.21	22.93	24	1
3	QPSK	8	4	23.10	23.11	23.22		
3	QPSK	8	7	23.08	23.07	23.20		
3	QPSK	15	0	23.11	23.00	23.22		
3	16QAM	1	0	23.13	23.75	23.81	24	1
3	16QAM	1	7	23.12	23.10	23.86		
3	16QAM	1	14	23.36	23.00	23.60		
3	16QAM	8	0	21.89	22.18	22.00	23	2
3	16QAM	8	4	22.08	22.19	22.30		
3	16QAM	8	7	22.04	22.16	22.31		
3	16QAM	15	0	21.89	22.00	22.11		



Channel				23017	23095	23173	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	24.19	24.28	23.94	25	0
1.4	QPSK	1	2	24.15	23.98	24.06		
1.4	QPSK	1	5	23.95	23.96	23.83		
1.4	QPSK	3	0	24.05	24.26	24.01		
1.4	QPSK	3	1	24.18	24.06	24.05		
1.4	QPSK	3	2	24.13	24.04	24.04		
1.4	QPSK	6	0	23.13	23.01	23.05	24	1
1.4	16QAM	1	0	23.71	23.48	23.98	24	1
1.4	16QAM	1	2	23.00	23.55	23.68		
1.4	16QAM	1	5	23.21	23.44	23.58		
1.4	16QAM	3	0	23.48	23.21	22.88		
1.4	16QAM	3	1	23.70	23.01	23.15		
1.4	16QAM	3	2	23.62	22.99	23.13		
1.4	16QAM	6	0	22.26	21.70	21.44	23	2



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	24.71	24.77	24.54	25	0
10	QPSK	1	24	24.70	24.76	24.44		
10	QPSK	1	49	24.55	24.69	24.49		
10	QPSK	25	0	23.64	23.74	23.64	24	1
10	QPSK	25	12	23.62	23.54	23.50		
10	QPSK	25	24	23.64	23.53	23.67		
10	QPSK	50	0	23.62	23.71	23.52		
10	16QAM	1	0	23.70	23.95	23.40	24	1
10	16QAM	1	24	23.71	23.81	23.49		
10	16QAM	1	49	23.70	23.93	23.41		
10	16QAM	25	0	22.76	22.88	22.85	23	2
10	16QAM	25	12	22.72	22.80	22.80		
10	16QAM	25	24	22.85	22.59	22.92		
10	16QAM	50	0	22.65	22.68	22.64		
Channel				23755	23790	23825	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	24.58	24.71	24.47	25	0
5	QPSK	1	12	24.57	24.62	24.36		
5	QPSK	1	24	24.47	24.47	24.46		
5	QPSK	12	0	23.49	23.49	23.49	24	1
5	QPSK	12	6	23.58	23.58	23.55		
5	QPSK	12	11	23.57	23.62	23.45		
5	QPSK	25	0	23.62	23.59	23.64		
5	16QAM	1	0	23.88	23.96	23.40	24	1
5	16QAM	1	12	23.89	23.87	23.24		
5	16QAM	1	24	23.92	23.91	23.33		
5	16QAM	12	0	22.58	22.66	22.53	23	2
5	16QAM	12	6	22.69	22.50	22.29		
5	16QAM	12	11	22.67	22.64	22.19		
5	16QAM	12	11	22.67	22.64	22.19		
5	16QAM	25	0	22.89	22.48	22.42		



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel					23230			
Frequency (MHz)					782			
10	QPSK	1	0		24.78		25	0
10	QPSK	1	24		24.38			
10	QPSK	1	49		24.31			
10	QPSK	25	0		23.44		24	1
10	QPSK	25	12		23.38			
10	QPSK	25	24		23.41			
10	QPSK	50	0		23.40			
10	16QAM	1	0		23.40		24	1
10	16QAM	1	24		23.30			
10	16QAM	1	49		23.30			
10	16QAM	25	0		22.44		23	2
10	16QAM	25	12		22.45			
10	16QAM	25	24		22.54			
10	16QAM	50	0		22.46			
Channel				23205	23230	23255	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	24.54	24.68	24.75	25	0
5	QPSK	1	12	24.53	24.66	24.74		
5	QPSK	1	24	24.41	24.48	24.43		
5	QPSK	12	0	23.63	23.47	23.49	24	1
5	QPSK	12	6	23.46	23.39	23.41		
5	QPSK	12	11	23.37	23.38	23.53		
5	QPSK	25	0	23.36	23.42	23.23		
5	16QAM	1	0	23.77	23.55	23.64	24	1
5	16QAM	1	12	23.65	23.57	23.77		
5	16QAM	1	24	23.45	23.54	23.47		
5	16QAM	12	0	22.54	22.56	22.53	23	2
5	16QAM	12	6	22.44	22.51	22.31		
5	16QAM	12	11	22.43	22.53	22.59		
5	16QAM	25	0	22.73	22.50	22.82		



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	24.83	24.45	24.47	25	0
10	QPSK	1	24	24.33	24.31	24.44		
10	QPSK	1	49	24.22	24.28	24.12		
10	QPSK	25	0	23.45	23.37	23.43	24	1
10	QPSK	25	12	23.41	23.36	23.40		
10	QPSK	25	24	23.37	23.29	23.31		
10	QPSK	50	0	23.39	23.35	23.35		
10	16QAM	1	0	23.92	23.96	23.88	24	1
10	16QAM	1	24	23.41	23.92	23.89		
10	16QAM	1	49	23.20	23.91	23.96		
10	16QAM	25	0	22.74	22.79	22.68	23	2
10	16QAM	25	12	22.67	22.73	22.69		
10	16QAM	25	24	22.25	22.71	22.66		
10	16QAM	50	0	22.51	22.33	22.28		
Channel				20425	20525	20625	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	24.68	24.42	24.36	25	0
5	QPSK	1	12	24.55	24.41	24.35		
5	QPSK	1	24	24.17	24.22	24.02		
5	QPSK	12	0	23.41	23.38	23.34	24	1
5	QPSK	12	6	23.32	23.37	23.21		
5	QPSK	12	11	23.30	23.31	23.13		
5	QPSK	25	0	23.36	23.37	23.32		
5	16QAM	1	0	23.14	23.49	23.60	24	1
5	16QAM	1	12	23.29	23.40	23.91		
5	16QAM	1	24	23.64	23.43	23.77		
5	16QAM	12	0	22.44	22.38	22.37	23	2
5	16QAM	12	6	22.42	22.34	22.23		
5	16QAM	12	11	22.44	22.31	22.51		
5	16QAM	25	0	22.42	22.33	22.23		
Channel				20415	20525	20635	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	24.68	24.52	24.26	25	0
3	QPSK	1	7	24.67	24.42	24.25		
3	QPSK	1	14	24.55	24.41	24.15		
3	QPSK	8	0	23.54	23.44	23.34	24	1
3	QPSK	8	4	23.47	23.25	23.15		
3	QPSK	8	7	23.49	23.29	23.11		
3	QPSK	15	0	23.47	23.37	23.20		
3	16QAM	1	0	23.61	23.54	23.82	24	1
3	16QAM	1	7	23.66	23.68	23.18		
3	16QAM	1	14	23.51	23.63	22.82		
3	16QAM	8	0	22.70	22.47	22.51	23	2
3	16QAM	8	4	22.81	22.39	22.39		
3	16QAM	8	7	22.37	22.54	22.50		
3	16QAM	15	0	22.31	22.44	22.23		



Channel				20407	20525	20643	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	24.81	24.50	24.39	25	0
1.4	QPSK	1	2	24.72	24.38	24.28		
1.4	QPSK	1	5	24.41	24.30	24.04		
1.4	QPSK	3	0	24.79	24.47	24.31		
1.4	QPSK	3	1	24.80	24.49	24.38		
1.4	QPSK	3	2	24.66	24.34	24.31		
1.4	QPSK	6	0	23.49	23.25	23.22	24	1
1.4	16QAM	1	0	23.65	23.44	23.32	24	1
1.4	16QAM	1	2	23.53	23.74	23.40		
1.4	16QAM	1	5	23.30	23.43	23.37		
1.4	16QAM	3	0	23.85	23.21	23.39		
1.4	16QAM	3	1	23.81	23.32	23.35		
1.4	16QAM	3	2	23.56	23.52	23.37		
1.4	16QAM	6	0	22.46	21.96	21.99	23	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.28	23.13	23.16	24	0
20	QPSK	1	49	23.21	22.97	22.96		
20	QPSK	1	99	22.93	22.65	22.71		
20	QPSK	50	0	21.98	21.96	21.81	23	1
20	QPSK	50	24	21.89	21.86	21.74		
20	QPSK	50	49	21.78	21.70	21.77		
20	QPSK	100	0	21.91	21.82	21.83		
20	16QAM	1	0	21.60	22.36	21.73	23	1
20	16QAM	1	49	21.70	22.21	21.71		
20	16QAM	1	99	21.72	21.99	21.63		
20	16QAM	50	0	20.85	20.98	20.94	22	2
20	16QAM	50	24	20.80	20.80	20.91		
20	16QAM	50	49	20.65	20.77	20.85		
20	16QAM	100	0	20.82	20.93	20.76		
Channel				20025	20175	20325	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.88	23.05	22.85	24	0
15	QPSK	1	37	22.81	22.80	22.70		
15	QPSK	1	74	22.74	22.87	22.71		
15	QPSK	36	0	21.78	21.88	21.81	23	1
15	QPSK	36	18	21.75	21.80	21.78		
15	QPSK	36	37	21.73	21.65	21.70		
15	QPSK	75	0	21.83	21.85	21.76		
15	16QAM	1	0	22.03	22.14	21.52	23	1
15	16QAM	1	37	21.88	21.90	21.35		
15	16QAM	1	74	21.94	21.96	21.29		
15	16QAM	36	0	20.54	20.77	20.79	22	2
15	16QAM	36	18	20.54	20.59	20.76		
15	16QAM	36	37	20.53	20.44	20.73		
15	16QAM	75	0	20.74	20.75	20.82		
Channel				20000	20175	20350	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.89	22.84	22.93	24	0
10	QPSK	1	24	22.88	22.72	22.80		
10	QPSK	1	49	22.63	22.54	22.62		
10	QPSK	25	0	21.78	21.79	21.73	23	1
10	QPSK	25	12	21.69	21.77	21.63		
10	QPSK	25	24	21.77	21.58	21.66		
10	QPSK	50	0	21.80	21.74	21.74		
10	16QAM	1	0	22.89	22.37	22.43	23	1
10	16QAM	1	24	22.84	22.17	22.13		
10	16QAM	1	49	22.79	22.20	21.88		
10	16QAM	25	0	21.20	20.87	20.99	22	2
10	16QAM	25	12	21.13	20.77	21.00		
10	16QAM	25	24	20.84	20.72	20.93		
10	16QAM	50	0	20.64	20.75	20.58		



Channel				19975	20175	20375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.78	22.86	23.01	24	0
5	QPSK	1	12	22.74	22.85	23.00		
5	QPSK	1	24	22.75	22.71	22.98		
5	QPSK	12	0	21.70	21.84	21.73	23	1
5	QPSK	12	6	21.61	21.79	21.75		
5	QPSK	12	11	21.61	21.69	21.70		
5	QPSK	25	0	21.66	21.78	21.70		
5	16QAM	1	0	21.84	21.45	22.16	23	1
5	16QAM	1	12	21.93	21.56	22.40		
5	16QAM	1	24	21.72	21.30	22.20		
5	16QAM	12	0	20.73	20.69	20.66	22	2
5	16QAM	12	6	20.76	20.50	20.68		
5	16QAM	12	11	20.77	20.50	20.64		
5	16QAM	25	0	20.63	20.52	20.73		
5	16QAM	25	0	20.63	20.52	20.73		
Channel				19965	20175	20385	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.89	22.89	23.02	24	0
3	QPSK	1	7	22.88	22.82	22.80		
3	QPSK	1	14	22.60	22.64	22.70		
3	QPSK	8	0	21.69	21.84	21.87	23	1
3	QPSK	8	4	21.68	21.75	21.80		
3	QPSK	8	7	21.69	21.79	21.75		
3	QPSK	15	0	21.69	21.76	21.64		
3	16QAM	1	0	22.37	21.90	21.82	23	1
3	16QAM	1	7	22.55	21.97	21.74		
3	16QAM	1	14	22.28	21.81	21.75		
3	16QAM	8	0	20.92	20.88	20.80	22	2
3	16QAM	8	4	20.85	20.89	20.80		
3	16QAM	8	7	20.84	20.92	20.86		
3	16QAM	15	0	21.15	21.00	20.65		
3	16QAM	15	0	21.15	21.00	20.65		
Channel				19957	20175	20393	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.14	23.02	23.12	24	0
1.4	QPSK	1	2	23.09	23.01	23.11		
1.4	QPSK	1	5	22.91	22.86	22.92		
1.4	QPSK	3	0	23.12	23.01	23.00		
1.4	QPSK	3	1	23.01	23.00	23.10		
1.4	QPSK	3	2	23.13	22.98	23.07		
1.4	QPSK	6	0	22.13	22.07	21.94	23	1
1.4	16QAM	1	0	22.16	22.60	21.91	23	1
1.4	16QAM	1	2	22.51	22.73	21.99		
1.4	16QAM	1	5	22.17	22.51	21.95		
1.4	16QAM	3	0	22.04	22.30	21.88		
1.4	16QAM	3	1	22.10	22.15	21.90		
1.4	16QAM	3	2	22.20	22.28	21.87		
1.4	16QAM	6	0	21.19	20.80	20.72		



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.29	23.46	23.30	24	0
20	QPSK	1	49	22.99	23.34	23.23		
20	QPSK	1	99	22.97	23.20	23.15		
20	QPSK	50	0	22.28	22.35	22.30	23	1
20	QPSK	50	24	22.20	22.19	22.22		
20	QPSK	50	49	22.15	22.25	22.11		
20	QPSK	100	0	22.31	22.32	22.26		
20	16QAM	1	0	22.69	22.18	22.52	23	1
20	16QAM	1	49	22.61	22.15	22.42		
20	16QAM	1	99	22.42	22.01	22.46		
20	16QAM	50	0	21.34	21.33	21.31	22	2
20	16QAM	50	24	21.10	21.26	21.30		
20	16QAM	50	49	21.13	21.22	21.18		
20	16QAM	100	0	21.23	21.18	21.24		
Channel				18675	18900	19125	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.25	23.23	23.27	24	0
15	QPSK	1	37	23.20	23.05	23.02		
15	QPSK	1	74	23.07	22.99	23.09		
15	QPSK	36	0	22.33	22.12	22.24	23	1
15	QPSK	36	18	22.30	22.15	22.20		
15	QPSK	36	37	22.18	22.19	22.18		
15	QPSK	75	0	22.32	22.20	22.19	23	1
15	16QAM	1	0	22.67	22.62	21.99		
15	16QAM	1	37	22.53	22.44	21.71		
15	16QAM	1	74	22.50	22.48	21.83		
15	16QAM	36	0	21.29	21.18	21.22	22	2
15	16QAM	36	18	21.27	21.21	21.15		
15	16QAM	36	37	21.13	21.17	21.14		
15	16QAM	75	0	21.27	21.16	21.16		
Channel				18650	18900	19150	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.41	23.45	23.44	24	0
10	QPSK	1	24	23.40	23.43	23.43		
10	QPSK	1	49	23.10	23.04	23.24		
10	QPSK	25	0	22.23	22.13	22.17	23	1
10	QPSK	25	12	22.30	22.17	22.14		
10	QPSK	25	24	22.30	22.13	22.17		
10	QPSK	50	0	22.25	22.11	22.24	23	1
10	16QAM	1	0	22.31	22.46	22.45		
10	16QAM	1	24	22.03	22.10	22.26		
10	16QAM	1	49	22.36	22.30	21.96		
10	16QAM	25	0	21.23	21.37	21.28	22	2
10	16QAM	25	12	21.29	21.25	21.13		
10	16QAM	25	24	21.29	21.30	21.07		
10	16QAM	50	0	21.33	21.18	21.14		



Channel				18625	18900	19175	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.40	23.40	23.21	24	0
5	QPSK	1	12	23.39	23.20	23.13		
5	QPSK	1	24	23.07	22.99	22.97		
5	QPSK	12	0	22.23	22.10	22.14	23	1
5	QPSK	12	6	22.29	22.19	22.22		
5	QPSK	12	11	22.28	22.19	22.17		
5	QPSK	25	0	22.29	22.13	22.22		
5	16QAM	1	0	22.89	22.94	22.29	23	1
5	16QAM	1	12	22.47	22.28	22.98		
5	16QAM	1	24	22.52	22.31	22.60		
5	16QAM	12	0	21.23	21.16	21.34	22	2
5	16QAM	12	6	21.18	21.16	21.45		
5	16QAM	12	11	21.17	21.09	21.52		
5	16QAM	25	0	21.28	21.36	21.11		
Channel				18615	18900	19185	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.28	23.20	23.26	24	0
3	QPSK	1	7	23.24	23.14	23.25		
3	QPSK	1	14	23.02	23.14	23.04		
3	QPSK	8	0	22.20	22.19	22.24	23	1
3	QPSK	8	4	22.21	22.17	22.24		
3	QPSK	8	7	22.13	22.20	22.19		
3	QPSK	15	0	22.14	22.07	22.23		
3	16QAM	1	0	22.53	22.37	22.33	23	1
3	16QAM	1	7	22.52	22.50	22.33		
3	16QAM	1	14	22.45	22.32	22.47		
3	16QAM	8	0	21.41	21.10	21.27	22	2
3	16QAM	8	4	21.43	21.17	21.34		
3	16QAM	8	7	21.43	21.23	21.29		
3	16QAM	15	0	21.20	21.21	21.32		
Channel				18607	18900	19193	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.30	23.21	23.25	24	0
1.4	QPSK	1	2	23.12	22.95	23.19		
1.4	QPSK	1	5	22.98	23.08	23.12		
1.4	QPSK	3	0	23.20	22.97	23.18		
1.4	QPSK	3	1	23.29	23.19	23.24		
1.4	QPSK	3	2	23.26	23.18	23.05		
1.4	QPSK	6	0	22.19	22.17	22.19	23	1
1.4	16QAM	1	0	22.52	22.12	22.65	23	1
1.4	16QAM	1	2	22.47	22.03	22.61		
1.4	16QAM	1	5	22.06	22.25	22.51		
1.4	16QAM	3	0	22.00	22.49	22.52		
1.4	16QAM	3	1	22.22	22.54	22.38		
1.4	16QAM	3	2	22.06	22.65	22.21		
1.4	16QAM	6	0	20.79	21.00	20.57	22	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.27	22.30	22.25	23	0
20	QPSK	1	49	22.20	22.14	22.21		
20	QPSK	1	99	22.11	22.11	22.19		
20	QPSK	50	0	20.90	21.09	21.02	22	1
20	QPSK	50	24	20.80	20.95	21.00		
20	QPSK	50	49	20.86	20.88	20.92		
20	QPSK	100	0	20.87	21.04	21.01		
20	16QAM	1	0	21.67	21.84	21.20	22	1
20	16QAM	1	49	21.56	21.24	21.05		
20	16QAM	1	99	21.54	20.68	21.01		
20	16QAM	50	0	19.92	19.81	19.92	21	2
20	16QAM	50	24	19.82	19.85	19.87		
20	16QAM	50	49	19.75	19.84	19.79		
20	16QAM	100	0	19.88	19.87	19.92		
Channel				20825	21100	21375	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.26	22.18	22.22	23	0
15	QPSK	1	37	22.15	22.09	22.18		
15	QPSK	1	74	22.25	22.15	22.17		
15	QPSK	36	0	20.95	20.94	20.84	22	1
15	QPSK	36	18	20.83	20.85	20.96		
15	QPSK	36	37	20.80	20.88	20.85		
15	QPSK	75	0	20.86	20.91	20.92		
15	16QAM	1	0	21.91	21.31	21.85	22	1
15	16QAM	1	37	21.84	21.23	21.87		
15	16QAM	1	74	21.71	21.19	21.60		
15	16QAM	36	0	19.96	19.96	19.84	21	2
15	16QAM	36	18	19.84	19.89	19.85		
15	16QAM	36	37	19.83	19.82	19.89		
15	16QAM	75	0	19.87	19.86	19.81		
Channel				20800	21100	21400	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.19	22.15	22.19	23	0
10	QPSK	1	24	22.05	22.11	22.13		
10	QPSK	1	49	22.15	22.14	22.15		
10	QPSK	25	0	20.89	20.91	20.87	22	1
10	QPSK	25	12	20.95	20.88	20.83		
10	QPSK	25	24	20.84	20.82	20.84		
10	QPSK	50	0	20.85	20.91	20.85		
10	16QAM	1	0	21.69	21.25	21.43	22	1
10	16QAM	1	24	21.69	21.61	21.20		
10	16QAM	1	49	21.63	21.38	21.22		
10	16QAM	25	0	20.20	20.22	19.97	21	2
10	16QAM	25	12	20.18	20.19	19.81		
10	16QAM	25	24	20.12	20.14	19.94		
10	16QAM	50	0	19.87	19.84	19.83		



Channel				20775	21100	21425	Tune up Limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.17	22.14	22.18	23	0
5	QPSK	1	12	21.91	22.11	22.15		
5	QPSK	1	24	21.65	22.09	22.17		
5	QPSK	12	0	20.96	20.83	20.91	22	1
5	QPSK	12	6	20.98	20.81	21.01		
5	QPSK	12	11	20.87	20.90	20.91		
5	QPSK	25	0	20.83	20.94	20.93		
5	16QAM	1	0	21.27	21.02	21.27	22	1
5	16QAM	1	12	21.60	21.69	21.15		
5	16QAM	1	24	21.50	21.56	21.11		
5	16QAM	12	0	19.77	19.92	19.87	21	2
5	16QAM	12	6	19.79	19.86	19.94		
5	16QAM	12	11	19.86	19.86	19.82		
5	16QAM	25	0	19.96	19.85	19.93		



<WLAN Conducted Power>

General Note:

1. For IEEE802.11a/b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11a/b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11a/b mode.
2. For IEEE802.11n, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
3. For IEEE802.11n with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
4. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHZ WLAN>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	17.91	17.96	17.92	17.95
CH 6	2437	17.98			
CH 11	2462	17.97			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	14.89	14.89	14.90	14.92	14.92	14.89	14.87	14.91
CH 6	2437	14.72							
CH 11	2462	14.93							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	12.97	12.96	12.95	12.95	12.94	12.96	12.95	12.97
CH 6	2437	13.00							
CH 11	2462	12.86							



<5GHz WLAN>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 36	5180	13.90	13.52	13.48	13.58	13.61	13.76	13.71	13.76
CH 40	5200	13.78							
CH 44	5220	13.87							
CH 48	5240	13.85							
CH 52	5260	13.73	13.82	13.81	13.82	13.84	13.89	13.87	13.88
CH 56	5280	13.71							
CH 60	5300	13.89							
CH 64	5320	13.63							
CH 100	5500	13.65	13.06	13.11	13.13	13.18	13.29	13.13	13.29
CH 104	5520	13.61							
CH 108	5540	13.59							
CH 112	5560	13.52							
CH 116	5580	13.60							
CH 132	5660	13.46							
CH 136	5680	13.42							
CH 140	5700	13.70	13.63	13.65	13.67	13.68	13.78	13.72	13.74
CH 149	5745	13.98							
CH 153	5765	13.74							
CH 157	5785	13.80							
CH 161	5805	13.77							
CH 165	5825	13.93							



WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 36	5180	12.47	12.40	12.34	12.32	12.44	12.47	12.41	12.42
CH 40	5200	12.29							
CH 44	5220	12.31							
CH 48	5240	12.22							
CH 52	5260	12.33	12.35	12.31	12.28	12.44	12.43	12.25	12.37
CH 56	5280	12.31							
CH 60	5300	12.43							
CH 64	5320	12.46							
CH 100	5500	12.44							
CH 104	5520	12.34	12.32	12.30	12.27	12.35	12.38	12.31	12.39
CH 108	5540	12.31							
CH 112	5560	12.29							
CH 116	5580	12.39							
CH 132	5660	12.18							
CH 136	5680	12.21							
CH 140	5700	12.29							
CH 149	5745	12.42	12.11	12.07	12.15	12.17	12.26	12.23	12.21
CH 153	5765	12.23							
CH 157	5785	12.17							
CH 161	5805	12.14							
CH 165	5825	12.35							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 38	5190	11.56	11.57	11.84	11.79	11.85	11.84	11.81	11.82
CH 46	5230	11.87							
CH 54	5270	11.94							
CH 62	5310	11.85	11.81	11.91	11.88	11.90	11.93	11.92	11.93
CH 102	5510	10.95	10.65	10.78	10.68	10.89	10.75	10.95	10.91
CH 110	5550	10.78							
CH 134	5670	10.99							
CH 151	5755	10.98	10.63	10.83	10.70	10.82	10.81	10.91	10.95
CH 159	5795	10.97							



<2.4GHz Bluetooth>

General Note:


1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The duty factor is selected theoretical 83.3% perform Bluetooth SAR testing.
3. Base on the maximum tune-up limit of Bluetooth (rounded to the nearest mW) and the minimum separation distance, the Hotspot and Body-worn Bluetooth SAR were not required; $[(13/10)*\sqrt{2.480}]=2.05 < 3$, $[(13/15)*\sqrt{2.480}]=1.36 < 3$, Per KDB 447498 D01v05r02.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
v3.0 with EDR	CH 00	2402	9.90	7.82	7.74
	CH 39	2441	10.86	8.83	8.81
	CH 78	2480	8.88	6.79	6.78

Mode	Channel	Frequency (MHz)	Average power (dBm)
			GFSK
v4.0 with LE	CH 00	2402	1.74
	CH 19	2440	2.79
	CH 39	2480	1.32

13. Antenna Location

<Mobile Phone>

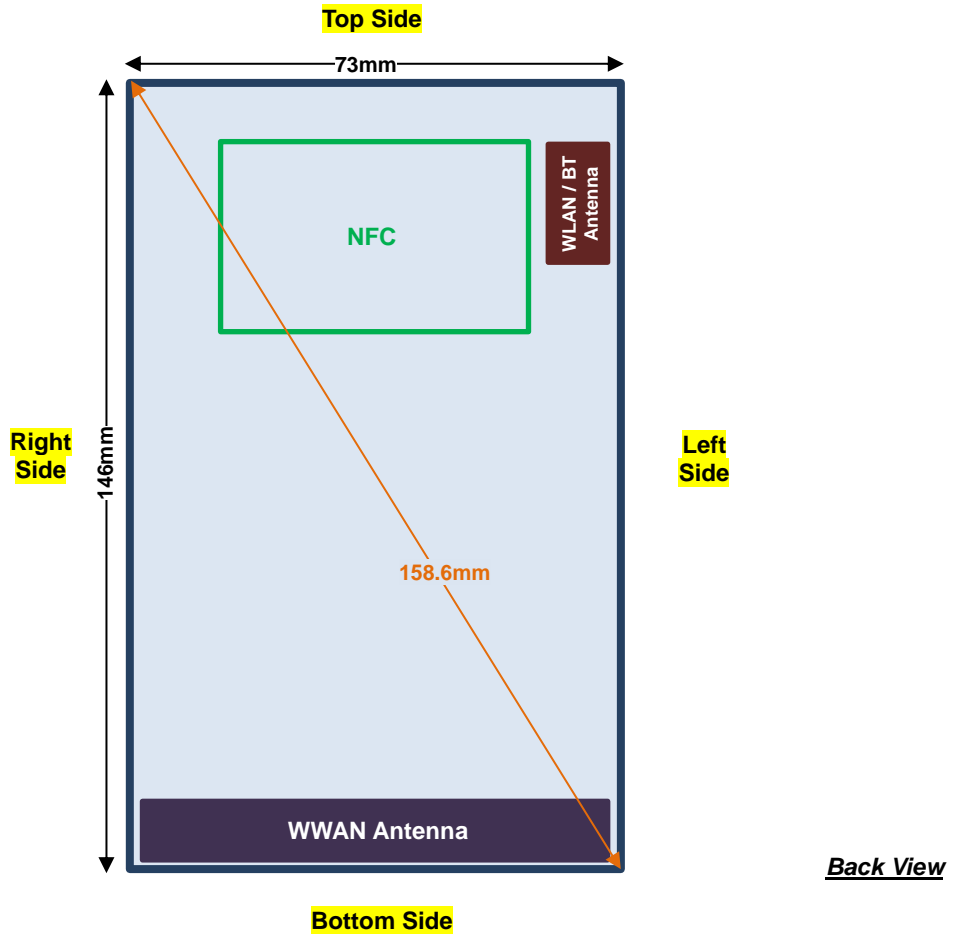

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	> 25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



14. SAR Test Results

General Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor.
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 941225 D01v03, considering the possibility of e.g. 3rd party VoIP operation for Head and body-worn SAR test reduction for GSM and GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
4. Per KDB 941225 D01v03, for Hotspot SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance, for modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested, therefore, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900.
5. Per KDB 941225 D01v03, SAR for Head / Hotspot / Body-worn exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
6. Per KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.
7. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
8. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
9. Per KDB 941225 D05v02r03, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
10. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
11. Per KDB 941225 D05v02r03, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
12. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
13. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Head SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Right Cheek	128	824.2	27.88	28.00	1.028	-0.06	0.481	0.494	0.371	0.381
	GSM850	GMSK	GPRS (4 Tx slots)	Right Cheek	189	836.4	27.67	28.00	1.079	-0.04	0.593	0.640	0.459	0.495
01	GSM850	GMSK	GPRS (4 Tx slots)	Right Cheek	251	848.8	27.85	28.00	1.035	-0.06	0.750	0.776	0.540	0.559
	GSM850	GMSK	GPRS (4 Tx slots)	Right Tilted	128	824.2	27.88	28.00	1.028	-0.07	0.234	0.241	0.185	0.190
	GSM850	GMSK	GPRS (4 Tx slots)	Left Cheek	128	824.2	27.88	28.00	1.028	-0.01	0.451	0.464	0.347	0.357
	GSM850	GMSK	GPRS (4 Tx slots)	Left Tilted	128	824.2	27.88	28.00	1.028	-0.04	0.232	0.238	0.185	0.190
	GSM1900	GMSK	GPRS (4 Tx slots)	Right Cheek	810	1909.8	27.50	28.00	1.122	-0.1	0.451	0.506	0.287	0.322
	GSM1900	GMSK	GPRS (4 Tx slots)	Right Tilted	810	1909.8	27.50	28.00	1.122	-0.01	0.225	0.252	0.132	0.148
	GSM1900	GMSK	GPRS (4 Tx slots)	Left Cheek	810	1909.8	27.50	28.00	1.122	-0.02	0.829	0.930	0.503	0.564
	GSM1900	GMSK	GPRS (4 Tx slots)	Left Cheek	512	1850.2	27.39	28.00	1.151	-0.01	0.814	0.937	0.508	0.585
02	GSM1900	GMSK	GPRS (4 Tx slots)	Left Cheek	661	1880	27.44	28.00	1.138	0	0.841	0.957	0.517	0.588
	GSM1900	GMSK	GPRS (4 Tx slots)	Left Tilted	810	1909.8	27.50	28.00	1.122	-0.06	0.170	0.191	0.103	0.116

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
03	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4233	846.6	24.87	25.00	1.030	0.04	0.606	0.624	0.466	0.480
	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4132	826.4	24.79	25.00	1.050	-0.03	0.580	0.609	0.449	0.471
	WCDMA V	QPSK	RMC 12.2Kbps	Right Cheek	4182	836.4	24.81	25.00	1.045	-0.02	0.594	0.621	0.457	0.477
	WCDMA V	QPSK	RMC 12.2Kbps	Right Tilted	4233	846.6	24.87	25.00	1.030	0.09	0.329	0.339	0.259	0.267
	WCDMA V	QPSK	RMC 12.2Kbps	Left Cheek	4233	846.6	24.87	25.00	1.030	0.02	0.567	0.584	0.438	0.451
	WCDMA V	QPSK	RMC 12.2Kbps	Left Tilted	4233	846.6	24.87	25.00	1.030	-0.02	0.321	0.331	0.248	0.256
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Cheek	1312	1712.4	24.00	24.00	1.000	-0.06	0.235	0.235	0.157	0.157
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Tilted	1312	1712.4	24.00	24.00	1.000	0	0.190	0.190	0.127	0.127
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	1312	1712.4	24.00	24.00	1.000	0.02	0.504	0.504	0.331	0.331
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	1413	1732.6	23.79	24.00	1.050	-0.02	0.539	0.566	0.355	0.373
04	WCDMA IV	QPSK	RMC 12.2Kbps	Left Cheek	1513	1752.6	23.85	24.00	1.035	-0.02	0.600	0.621	0.392	0.406
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Tilted	1312	1712.4	24.00	24.00	1.000	-0.02	0.241	0.241	0.158	0.158
	WCDMA II	QPSK	RMC 12.2Kbps	Right Cheek	9538	1907.6	23.92	24.00	1.019	-0.09	0.390	0.397	0.249	0.254
	WCDMA II	QPSK	RMC 12.2Kbps	Right Tilted	9538	1907.6	23.92	24.00	1.019	-0.04	0.225	0.229	0.132	0.134
05	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9538	1907.6	23.92	24.00	1.019	0.01	0.817	0.832	0.499	0.508
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9262	1852.4	23.75	24.00	1.059	0	0.777	0.823	0.471	0.499
	WCDMA II	QPSK	RMC 12.2Kbps	Left Cheek	9400	1880	23.73	24.00	1.064	0.09	0.779	0.829	0.475	0.505
	WCDMA II	QPSK	RMC 12.2Kbps	Left Tilted	9538	1907.6	23.92	24.00	1.019	-0.01	0.163	0.166	0.103	0.105



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0offset	Right Cheek	23095	707.5	24.36	25.00	1.159	0.04	0.164	0.190	0.128	0.148
	LTE Band 12	10M	QPSK	25RB	0offset	Right Cheek	23095	707.5	23.21	24.00	1.199	-0.06	0.135	0.162	0.105	0.126
	LTE Band 12	10M	QPSK	1RB	0offset	Right Tilted	23095	707.5	24.36	25.00	1.159	0.05	0.071	0.082	0.055	0.064
	LTE Band 12	10M	QPSK	25RB	0offset	Right Tilted	23095	707.5	23.21	24.00	1.199	0.03	0.054	0.065	0.042	0.050
06	LTE Band 12	10M	QPSK	1RB	0offset	Left Cheek	23095	707.5	24.36	25.00	1.159	0.09	0.165	0.191	0.129	0.149
	LTE Band 12	10M	QPSK	25RB	0offset	Left Cheek	23095	707.5	23.21	24.00	1.199	0.12	0.135	0.162	0.105	0.126
	LTE Band 12	10M	QPSK	1RB	0offset	Left Tilted	23095	707.5	24.36	25.00	1.159	0.06	0.069	0.080	0.055	0.064
	LTE Band 12	10M	QPSK	25RB	0offset	Left Tilted	23095	707.5	23.21	24.00	1.199	0.03	0.052	0.062	0.042	0.050
07	LTE Band 17	10M	QPSK	1RB	0offset	Right Cheek	23790	710	24.77	25.00	1.054	0.14	0.186	0.196	0.147	0.155
	LTE Band 17	10M	QPSK	25RB	0offset	Right Cheek	23790	710	23.74	24.00	1.062	0.05	0.155	0.165	0.121	0.128
	LTE Band 17	10M	QPSK	1RB	0offset	Right Tilted	23790	710	24.77	25.00	1.054	0.14	0.081	0.085	0.063	0.066
	LTE Band 17	10M	QPSK	25RB	0offset	Right Tilted	23790	710	23.74	24.00	1.062	-0.02	0.064	0.068	0.051	0.054
	LTE Band 17	10M	QPSK	1RB	0offset	Left Cheek	23790	710	24.77	25.00	1.054	-0.09	0.178	0.188	0.138	0.146
	LTE Band 17	10M	QPSK	25RB	0offset	Left Cheek	23790	710	23.74	24.00	1.062	-0.01	0.131	0.139	0.103	0.109
	LTE Band 17	10M	QPSK	1RB	0offset	Left Tilted	23790	710	24.77	25.00	1.054	0.13	0.070	0.074	0.054	0.057
	LTE Band 17	10M	QPSK	25RB	0offset	Left Tilted	23790	710	23.74	24.00	1.062	0.12	0.051	0.054	0.042	0.045
08	LTE Band 13	10M	QPSK	1RB	0offset	Right Cheek	23230	782	24.78	25.00	1.052	-0.09	0.520	0.547	0.398	0.419
	LTE Band 13	10M	QPSK	25RB	0offset	Right Cheek	23230	782	23.44	24.00	1.138	0.05	0.426	0.485	0.325	0.370
	LTE Band 13	10M	QPSK	1RB	0offset	Right Tilted	23230	782	24.78	25.00	1.052	-0.13	0.265	0.279	0.208	0.219
	LTE Band 13	10M	QPSK	25RB	0offset	Right Tilted	23230	782	23.44	24.00	1.138	0.05	0.227	0.258	0.177	0.201
	LTE Band 13	10M	QPSK	1RB	0offset	Left Cheek	23230	782	24.78	25.00	1.052	-0.14	0.498	0.524	0.364	0.383
	LTE Band 13	10M	QPSK	25RB	0offset	Left Cheek	23230	782	23.44	24.00	1.138	-0.04	0.391	0.445	0.300	0.341
	LTE Band 13	10M	QPSK	1RB	0offset	Left Tilted	23230	782	24.78	25.00	1.052	-0.19	0.256	0.269	0.202	0.212
	LTE Band 13	10M	QPSK	25RB	0offset	Left Tilted	23230	782	23.44	24.00	1.138	0.07	0.193	0.220	0.152	0.173
	LTE Band 5	10M	QPSK	1RB	0offset	Right Cheek	20450	829	24.83	25.00	1.040	-0.14	0.604	0.628	0.455	0.473
	LTE Band 5	10M	QPSK	1RB	0offset	Right Cheek	20525	836.5	24.45	25.00	1.135	-0.01	0.566	0.642	0.424	0.481
09	LTE Band 5	10M	QPSK	1RB	0offset	Right Cheek	20600	844	24.47	25.00	1.130	0.05	0.573	0.647	0.427	0.482
	LTE Band 5	10M	QPSK	25RB	0offset	Right Cheek	20450	829	23.45	24.00	1.135	-0.08	0.444	0.504	0.334	0.379
	LTE Band 5	10M	QPSK	1RB	0offset	Right Tilted	20450	829	24.83	25.00	1.040	0.04	0.329	0.342	0.248	0.258
	LTE Band 5	10M	QPSK	25RB	0offset	Right Tilted	20450	829	23.45	24.00	1.135	0.01	0.246	0.279	0.185	0.210
	LTE Band 5	10M	QPSK	1RB	0offset	Left Cheek	20450	829	24.83	25.00	1.040	-0.19	0.565	0.588	0.441	0.459
	LTE Band 5	10M	QPSK	25RB	0offset	Left Cheek	20450	829	23.45	24.00	1.135	-0.06	0.423	0.480	0.326	0.370
	LTE Band 5	10M	QPSK	1RB	0offset	Left Tilted	20450	829	24.83	25.00	1.040	0.01	0.354	0.368	0.266	0.277
	LTE Band 5	10M	QPSK	25RB	0offset	Left Tilted	20450	829	23.45	24.00	1.135	-0.04	0.262	0.297	0.199	0.226
	LTE Band 4	20M	QPSK	1RB	0offset	Right Cheek	20050	1720	23.28	24.00	1.180	0	0.227	0.268	0.153	0.181
	LTE Band 4	20M	QPSK	50RB	0offset	Right Cheek	20050	1720	21.98	23.00	1.265	-0.07	0.182	0.230	0.123	0.156
	LTE Band 4	20M	QPSK	1RB	0offset	Right Tilted	20050	1720	23.28	24.00	1.180	0.03	0.142	0.168	0.094	0.111
	LTE Band 4	20M	QPSK	50RB	0offset	Right Tilted	20050	1720	21.98	23.00	1.265	0.06	0.110	0.139	0.074	0.094
	LTE Band 4	20M	QPSK	1RB	0offset	Left Cheek	20050	1720	23.28	24.00	1.180	0	0.421	0.497	0.274	0.323
	LTE Band 4	20M	QPSK	1RB	0offset	Left Cheek	20175	1732.5	23.13	24.00	1.222	-0.05	0.467	0.571	0.301	0.368
10	LTE Band 4	20M	QPSK	1RB	0offset	Left Cheek	20300	1745	23.16	24.00	1.213	-0.19	0.495	0.601	0.319	0.387
	LTE Band 4	20M	QPSK	50RB	0offset	Left Cheek	20050	1720	21.98	23.00	1.265	-0.08	0.334	0.422	0.218	0.276
	LTE Band 4	20M	QPSK	1RB	0offset	Left Tilted	20050	1720	23.28	24.00	1.180	0.14	0.193	0.228	0.125	0.148
	LTE Band 4	20M	QPSK	50RB	0offset	Left Tilted	20050	1720	21.98	23.00	1.265	0.04	0.156	0.197	0.101	0.128



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1RB	0offset	Right Cheek	18900	1880	23.46	24.00	1.132	-0.14	0.427	0.484	0.269	0.305
	LTE Band 2	20M	QPSK	50RB	0offset	Right Cheek	18900	1880	22.35	23.00	1.161	-0.07	0.322	0.374	0.203	0.236
	LTE Band 2	20M	QPSK	1RB	0offset	Right Tilted	18900	1880	23.46	24.00	1.132	0.15	0.230	0.260	0.130	0.147
	LTE Band 2	20M	QPSK	50RB	0offset	Right Tilted	18900	1880	22.35	23.00	1.161	-0.02	0.162	0.188	0.096	0.111
	LTE Band 2	20M	QPSK	1RB	0offset	Left Cheek	18900	1880	23.46	24.00	1.132	0.06	0.717	0.812	0.441	0.499
11	LTE Band 2	20M	QPSK	1RB	0offset	Left Cheek	18700	1860	23.29	24.00	1.178	-0.12	0.701	0.826	0.431	0.508
	LTE Band 2	20M	QPSK	1RB	0offset	Left Cheek	19100	1900	23.30	24.00	1.175	-0.08	0.677	0.795	0.412	0.484
	LTE Band 2	20M	QPSK	50RB	0offset	Left Cheek	18900	1880	22.35	23.00	1.161	0	0.525	0.610	0.324	0.376
	LTE Band 2	20M	QPSK	100RB	0offset	Left Cheek	18900	1880	22.32	23.00	1.169	-0.06	0.518	0.606	0.319	0.373
	LTE Band 2	20M	QPSK	1RB	0offset	Left Tilted	18900	1880	23.46	24.00	1.132	-0.05	0.189	0.214	0.120	0.136
	LTE Band 2	20M	QPSK	50RB	0offset	Left Tilted	18900	1880	22.35	23.00	1.161	0.06	0.146	0.170	0.093	0.108
	LTE Band 7	20M	QPSK	1RB	0offset	Right Cheek	21100	2535	22.30	23.00	1.175	0.01	0.444	0.522	0.239	0.281
	LTE Band 7	20M	QPSK	50RB	0offset	Right Cheek	21100	2535	21.09	22.00	1.233	-0.04	0.337	0.416	0.185	0.228
	LTE Band 7	20M	QPSK	1RB	0offset	Right Tilted	21100	2535	22.30	23.00	1.175	-0.05	0.300	0.352	0.136	0.160
	LTE Band 7	20M	QPSK	50RB	0offset	Right Tilted	21100	2535	21.09	22.00	1.233	0	0.237	0.292	0.107	0.132
	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	21100	2535	22.30	23.00	1.175	-0.01	0.981	1.153	0.532	0.625
	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	20850	2510	22.27	23.00	1.183	-0.09	0.931	1.101	0.496	0.587
12	LTE Band 7	20M	QPSK	1RB	0offset	Left Cheek	21350	2560	22.25	23.00	1.189	-0.04	0.997	1.185	0.544	0.647
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	21100	2535	21.09	22.00	1.233	-0.06	0.814	1.004	0.418	0.515
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	20850	2510	20.90	22.00	1.288	0.08	0.757	0.975	0.394	0.508
	LTE Band 7	20M	QPSK	50RB	0offset	Left Cheek	21350	2560	21.02	22.00	1.253	-0.02	0.806	1.010	0.410	0.514
	LTE Band 7	20M	QPSK	100RB	0offset	Left Cheek	21100	2535	21.04	22.00	1.247	-0.04	0.799	0.997	0.408	0.509
	LTE Band 7	20M	QPSK	1RB	0offset	Left Tilted	21100	2535	22.30	23.00	1.175	0.07	0.156	0.183	0.078	0.092
	LTE Band 7	20M	QPSK	50RB	0offset	Left Tilted	21100	2535	21.09	22.00	1.233	0.16	0.123	0.152	0.061	0.075

<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
13	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	6	2437	17.98	18.00	1.005	97.63	1.024	0.05	0.498	0.512	0.226	0.232
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	1	2412	17.91	18.00	1.020	97.63	1.024	-0.04	0.169	0.177	0.078	0.081
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Cheek	11	2462	17.97	18.00	1.006	97.63	1.024	-0.19	0.335	0.345	0.154	0.159
	WLAN2.4GHz	OFDM	802.11n-HT20 MCS0	Right Cheek	6	2437	13.00	13.00	1.000	86.49	1.156	-0.01	0.148	0.171	0.067	0.077
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Right Tilted	6	2437	17.98	18.00	1.005	97.63	1.024	0.041	0.250	0.257	0.116	0.119
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Cheek	6	2437	17.98	18.00	1.005	97.63	1.024	0.166	0.167	0.172	0.079	0.081
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Tilted	6	2437	17.98	18.00	1.005	97.63	1.024	0.125	0.123	0.127	0.060	0.062
14	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	36	5180	13.90	14.00	1.023	87.26	1.146	-0.03	0.209	0.245	0.061	0.072
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	44	5220	13.87	14.00	1.030	87.26	1.146	0.02	0.184	0.217	0.056	0.066
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Right Cheek	36	5180	12.47	12.50	1.007	87.07	1.149	0.11	0.116	0.134	0.031	0.036
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	46	5230	11.87	12.00	1.030	76.43	1.308	0.09	0.081	0.109	0.022	0.030
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	36	5180	13.90	14.00	1.023	87.26	1.146	-0.02	0.097	0.114	0.030	0.035
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	36	5180	13.90	14.00	1.023	87.26	1.146	-0.06	0.056	0.066	0.019	0.022
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	36	5180	13.90	14.00	1.023	87.26	1.146	0.09	0.034	0.040	0.009	0.010
15	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	60	5300	13.89	14.00	1.025	87.26	1.146	-0.16	0.216	0.254	0.067	0.079
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	52	5260	13.73	14.00	1.064	87.26	1.146	0.05	0.170	0.207	0.052	0.063
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Right Cheek	64	5320	12.46	12.50	1.009	87.07	1.149	0.11	0.097	0.112	0.027	0.031
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	54	5270	11.94	12.00	1.014	76.43	1.308	0.02	0.064	0.085	0.017	0.023
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	60	5300	13.89	14.00	1.025	87.26	1.146	-0.16	0.102	0.120	0.033	0.039
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	60	5300	13.89	14.00	1.025	87.26	1.146	0.03	0.091	0.107	0.031	0.036
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	60	5300	13.89	14.00	1.025	87.26	1.146	0.09	0.055	0.065	0.019	0.022



Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
16	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	140	5700	13.70	14.00	1.072	87.26	1.146	0.04	0.196	0.241	0.055	0.068
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	100	5500	13.65	14.00	1.083	87.26	1.146	-0.05	0.162	0.201	0.049	0.061
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	116	5580	13.60	14.00	1.096	87.26	1.146	0.03	0.189	0.237	0.057	0.072
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Right Cheek	100	5500	12.44	12.50	1.014	87.07	1.149	0.15	0.117	0.136	0.032	0.037
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	134	5670	10.99	11.00	1.002	76.43	1.308	0.09	0.100	0.131	0.027	0.035
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	140	5700	13.70	14.00	1.072	87.26	1.146	0.06	0.144	0.177	0.050	0.061
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	140	5700	13.70	14.00	1.072	87.26	1.146	0.05	0.120	0.147	0.042	0.052
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	140	5700	13.70	14.00	1.072	87.26	1.146	0.1	0.062	0.076	0.022	0.027
17	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	149	5745	13.98	14.00	1.004	87.26	1.146	0.092	0.332	0.382	0.100	0.115
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	157	5785	13.80	14.00	1.047	87.26	1.146	0.09	0.173	0.208	0.053	0.064
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Cheek	165	5825	13.93	14.00	1.016	87.26	1.146	0.11	0.230	0.268	0.070	0.081
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Right Cheek	149	5745	12.42	12.50	1.018	87.07	1.149	0.07	0.182	0.213	0.056	0.066
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Right Cheek	151	5755	10.98	11.00	1.005	76.43	1.308	0.12	0.075	0.099	0.020	0.026
	WLAN5GHz	OFDM	802.11a 6Mbps	Right Tilted	149	5745	13.98	14.00	1.004	87.26	1.146	0.163	0.093	0.107	0.034	0.039
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Cheek	149	5745	13.98	14.00	1.004	87.26	1.146	0.096	0.070	0.081	0.024	0.028
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Tilted	149	5745	13.98	14.00	1.004	87.26	1.146	0.162	0.042	0.048	0.014	0.016

<Bluetooth SAR>

Plot No.	Band	Modulation	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	Bluetooth	GFSK	1Mbps	Right Cheek	39	2441	10.86	11.00	1.033	-0.055	0.011	0.011	0.003	0.003
	Bluetooth	GFSK	1Mbps	Right Cheek	0	2402	9.90	10.00	1.023	-0.06	0.010	0.010	0.003	0.003
18	Bluetooth	GFSK	1Mbps	Right Cheek	78	2480	8.88	10.00	1.294	-0.06	0.017	0.022	0.003	0.004
	Bluetooth	GFSK	1Mbps	Right Tilted	39	2441	10.86	11.00	1.033	0.01	0.004	0.004	0.001	0.001
	Bluetooth	GFSK	1Mbps	Left Cheek	39	2441	10.86	11.00	1.033	0.029	0.004	0.004	0.001	0.001
	Bluetooth	GFSK	1Mbps	Left Tilted	39	2441	10.86	11.00	1.033	0.07	0.002	0.002	0.001	0.001



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	128	824.2	27.88	28.00	1.028	-0.01	0.628	0.646	0.489	0.503
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	189	836.4	27.67	28.00	1.079	0.02	0.695	0.750	0.542	0.585
19	GSM850	GMSK	GPRS (4 Tx slots)	Front	1cm	251	848.8	27.85	28.00	1.035	0.03	0.780	0.807	0.602	0.623
	GSM850	GMSK	GPRS (4 Tx slots)	Back	1cm	128	824.2	27.88	28.00	1.028	0	0.617	0.634	0.483	0.497
	GSM850	GMSK	GPRS (4 Tx slots)	Left Side	1cm	128	824.2	27.88	28.00	1.028	-0.02	0.508	0.522	0.356	0.366
	GSM850	GMSK	GPRS (4 Tx slots)	Right Side	1cm	128	824.2	27.88	28.00	1.028	-0.07	0.512	0.526	0.357	0.367
	GSM850	GMSK	GPRS (4 Tx slots)	Bottom Side	1cm	128	824.2	27.88	28.00	1.028	0.1	0.091	0.094	0.054	0.056
	GSM1900	GMSK	GPRS (4 Tx slots)	Front	1cm	810	1909.8	27.50	28.00	1.122	-0.03	0.771	0.865	0.456	0.512
	GSM1900	GMSK	GPRS (4 Tx slots)	Front	1cm	512	1850.2	27.39	28.00	1.151	0.1	0.842	0.969	0.523	0.602
	GSM1900	GMSK	GPRS (4 Tx slots)	Front	1cm	661	1880	27.44	28.00	1.138	0.01	0.793	0.902	0.473	0.538
	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1cm	810	1909.8	27.50	28.00	1.122	-0.08	1.050	1.178	0.656	0.736
	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1cm	512	1850.2	27.39	28.00	1.151	-0.02	1.010	1.162	0.648	0.746
20	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1cm	661	1880	27.44	28.00	1.138	-0.03	1.040	1.183	0.678	0.771
	GSM1900	GMSK	GPRS (4 Tx slots)	Left Side	1cm	810	1909.8	27.50	28.00	1.122	0.03	0.479	0.537	0.286	0.321
	GSM1900	GMSK	GPRS (4 Tx slots)	Right Side	1cm	810	1909.8	27.50	28.00	1.122	0.1	0.105	0.118	0.062	0.070
	GSM1900	GMSK	GPRS (4 Tx slots)	Bottom Side	1cm	810	1909.8	27.50	28.00	1.122	0.09	0.335	0.376	0.198	0.222

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	QPSK	RMC 12.2Kbps	Front	1cm	4233	846.6	24.87	25.00	1.030	-0.04	0.766	0.789	0.587	0.605
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4233	846.6	24.87	25.00	1.030	0.05	0.768	0.791	0.584	0.602
21	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4132	826.4	24.79	25.00	1.050	0.02	0.836	0.877	0.639	0.671
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1cm	4182	836.4	24.81	25.00	1.045	0.02	0.810	0.846	0.620	0.648
	WCDMA V	QPSK	RMC 12.2Kbps	Left Side	1cm	4233	846.6	24.87	25.00	1.030	0.01	0.562	0.579	0.391	0.403
	WCDMA V	QPSK	RMC 12.2Kbps	Right Side	1cm	4233	846.6	24.87	25.00	1.030	-0.05	0.637	0.656	0.440	0.453
	WCDMA V	QPSK	RMC 12.2Kbps	Bottom Side	1cm	4233	846.6	24.87	25.00	1.030	-0.03	0.172	0.177	0.100	0.103
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	1cm	1312	1712.4	24.00	24.00	1.000	-0.05	0.603	0.603	0.404	0.404
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1cm	1312	1712.4	24.00	24.00	1.000	0.03	0.877	0.877	0.548	0.548
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1cm	1413	1732.6	23.79	24.00	1.050	0.07	0.878	0.921	0.546	0.573
22	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1cm	1513	1752.6	23.85	24.00	1.035	-0.01	0.913	0.945	0.565	0.585
	WCDMA IV	QPSK	RMC 12.2Kbps	Left Side	1cm	1312	1712.4	24.00	24.00	1.000	-0.01	0.351	0.351	0.220	0.220
	WCDMA IV	QPSK	RMC 12.2Kbps	Right Side	1cm	1312	1712.4	24.00	24.00	1.000	0.04	0.112	0.112	0.070	0.070
	WCDMA IV	QPSK	RMC 12.2Kbps	Bottom Side	1cm	1312	1712.4	24.00	24.00	1.000	0.04	0.119	0.119	0.073	0.073
	WCDMA II	QPSK	RMC 12.2Kbps	Front	1cm	9538	1907.6	23.92	24.00	1.019	-0.07	0.733	0.747	0.439	0.447
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1cm	9538	1907.6	23.92	24.00	1.019	0.07	1.110	1.131	0.673	0.686
23	WCDMA II	QPSK	RMC 12.2Kbps	Back	1cm	9262	1852.4	23.75	24.00	1.059	-0.02	1.120	1.186	0.677	0.717
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1cm	9400	1880	23.73	24.00	1.064	-0.01	1.090	1.160	0.655	0.697
	WCDMA II	QPSK	RMC 12.2Kbps	Left Side	1cm	9538	1907.6	23.92	24.00	1.019	-0.1	0.469	0.478	0.282	0.287
	WCDMA II	QPSK	RMC 12.2Kbps	Right Side	1cm	9538	1907.6	23.92	24.00	1.019	-0.05	0.081	0.083	0.048	0.049
	WCDMA II	QPSK	RMC 12.2Kbps	Bottom Side	1cm	9538	1907.6	23.92	24.00	1.019	0.13	0.290	0.295	0.175	0.178



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0offset	Front	1cm	23095	707.5	24.36	25.00	1.159	0.13	0.245	0.284	0.188	0.218
	LTE Band 12	10M	QPSK	25RB	0offset	Front	1cm	23095	707.5	23.21	24.00	1.199	0.07	0.212	0.254	0.164	0.197
24	LTE Band 12	10M	QPSK	1RB	0offset	Back	1cm	23095	707.5	24.36	25.00	1.159	-0.03	0.259	0.300	0.194	0.225
	LTE Band 12	10M	QPSK	25RB	0offset	Back	1cm	23095	707.5	23.21	24.00	1.199	-0.04	0.221	0.265	0.145	0.174
	LTE Band 12	10M	QPSK	1RB	0offset	Left Side	1cm	23095	707.5	24.36	25.00	1.159	-0.01	0.190	0.220	0.133	0.154
	LTE Band 12	10M	QPSK	25RB	0offset	Left Side	1cm	23095	707.5	23.21	24.00	1.199	-0.01	0.164	0.197	0.115	0.138
	LTE Band 12	10M	QPSK	1RB	0offset	Right Side	1cm	23095	707.5	24.36	25.00	1.159	0.04	0.158	0.183	0.110	0.127
	LTE Band 12	10M	QPSK	25RB	0offset	Right Side	1cm	23095	707.5	23.21	24.00	1.199	0.05	0.132	0.158	0.093	0.112
	LTE Band 12	10M	QPSK	1RB	0offset	Bottom Side	1cm	23095	707.5	24.36	25.00	1.159	-0.05	0.031	0.036	0.018	0.021
	LTE Band 12	10M	QPSK	25RB	0offset	Bottom Side	1cm	23095	707.5	23.21	24.00	1.199	0.01	0.029	0.035	0.017	0.020
	LTE Band 17	10M	QPSK	1RB	0offset	Front	1cm	23790	710	24.77	25.00	1.054	-0.15	0.289	0.305	0.213	0.225
	LTE Band 17	10M	QPSK	25RB	0offset	Front	1cm	23790	710	23.74	24.00	1.062	0	0.252	0.268	0.194	0.206
25	LTE Band 17	10M	QPSK	1RB	0offset	Back	1cm	23790	710	24.77	25.00	1.054	-0.02	0.343	0.362	0.225	0.237
	LTE Band 17	10M	QPSK	25RB	0offset	Back	1cm	23790	710	23.74	24.00	1.062	-0.11	0.265	0.281	0.176	0.187
	LTE Band 17	10M	QPSK	1RB	0offset	Left Side	1cm	23790	710	24.77	25.00	1.054	0	0.232	0.245	0.164	0.173
	LTE Band 17	10M	QPSK	25RB	0offset	Left Side	1cm	23790	710	23.74	24.00	1.062	0.1	0.191	0.203	0.135	0.143
	LTE Band 17	10M	QPSK	1RB	0offset	Right Side	1cm	23790	710	24.77	25.00	1.054	0	0.197	0.208	0.140	0.148
	LTE Band 17	10M	QPSK	25RB	0offset	Right Side	1cm	23790	710	23.74	24.00	1.062	-0.1	0.150	0.159	0.105	0.111
	LTE Band 17	10M	QPSK	1RB	0offset	Bottom Side	1cm	23790	710	24.77	25.00	1.054	0.07	0.042	0.044	0.025	0.026
	LTE Band 17	10M	QPSK	25RB	0offset	Bottom Side	1cm	23790	710	23.74	24.00	1.062	0.04	0.035	0.037	0.021	0.022
	LTE Band 13	10M	QPSK	1RB	0offset	Front	1cm	23230	782	24.78	25.00	1.052	0.08	0.703	0.740	0.551	0.580
	LTE Band 13	10M	QPSK	25RB	0offset	Front	1cm	23230	782	23.44	24.00	1.138	-0.17	0.602	0.685	0.465	0.529
26	LTE Band 13	10M	QPSK	1RB	0offset	Back	1cm	23230	782	24.78	25.00	1.052	0.01	0.722	0.760	0.563	0.592
	LTE Band 13	10M	QPSK	25RB	0offset	Back	1cm	23230	782	23.44	24.00	1.138	-0.19	0.608	0.692	0.470	0.535
	LTE Band 13	10M	QPSK	1RB	0offset	Left Side	1cm	23230	782	24.78	25.00	1.052	-0.1	0.706	0.743	0.498	0.524
	LTE Band 13	10M	QPSK	25RB	0offset	Left Side	1cm	23230	782	23.44	24.00	1.138	0.06	0.617	0.702	0.431	0.490
	LTE Band 13	10M	QPSK	1RB	0offset	Right Side	1cm	23230	782	24.78	25.00	1.052	0	0.609	0.641	0.422	0.444
	LTE Band 13	10M	QPSK	25RB	0offset	Right Side	1cm	23230	782	23.44	24.00	1.138	0.04	0.537	0.611	0.373	0.424
	LTE Band 13	10M	QPSK	1RB	0offset	Bottom Side	1cm	23230	782	24.78	25.00	1.052	0.02	0.085	0.089	0.049	0.052
	LTE Band 13	10M	QPSK	25RB	0offset	Bottom Side	1cm	23230	782	23.44	24.00	1.138	0.08	0.073	0.083	0.042	0.048
27	LTE Band 5	10M	QPSK	1RB	0offset	Front	1cm	20450	829	24.83	25.00	1.040	0.08	0.754	0.784	0.588	0.611
	LTE Band 5	10M	QPSK	1RB	0offset	Front	1cm	20525	836.5	24.45	25.00	1.135	-0.15	0.668	0.758	0.521	0.591
	LTE Band 5	10M	QPSK	1RB	0offset	Front	1cm	20600	844	24.47	25.00	1.130	0.03	0.644	0.728	0.501	0.566
	LTE Band 5	10M	QPSK	25RB	0offset	Front	1cm	20450	829	23.45	24.00	1.135	0	0.567	0.644	0.441	0.501
	LTE Band 5	10M	QPSK	1RB	0offset	Back	1cm	20450	829	24.83	25.00	1.040	-0.09	0.718	0.747	0.552	0.574
	LTE Band 5	10M	QPSK	25RB	0offset	Back	1cm	20450	829	23.45	24.00	1.135	0.02	0.557	0.632	0.432	0.490
	LTE Band 5	10M	QPSK	1RB	0offset	Left Side	1cm	20450	829	24.83	25.00	1.040	-0.02	0.614	0.639	0.434	0.451
	LTE Band 5	10M	QPSK	25RB	0offset	Left Side	1cm	20450	829	23.45	24.00	1.135	0.06	0.474	0.538	0.333	0.378
	LTE Band 5	10M	QPSK	1RB	0offset	Right Side	1cm	20450	829	24.83	25.00	1.040	-0.13	0.611	0.635	0.428	0.445
	LTE Band 5	10M	QPSK	25RB	0offset	Right Side	1cm	20450	829	23.45	24.00	1.135	-0.06	0.478	0.543	0.334	0.379
	LTE Band 5	10M	QPSK	1RB	0offset	Bottom Side	1cm	20450	829	24.83	25.00	1.040	0.05	0.130	0.135	0.078	0.081
	LTE Band 5	10M	QPSK	25RB	0offset	Bottom Side	1cm	20450	829	23.45	24.00	1.135	-0.05	0.098	0.111	0.058	0.066



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 4	20M	QPSK	1RB	0offset	Front	1cm	20050	1720	23.28	24.00	1.180	0.1	0.611	0.721	0.391	0.462
	LTE Band 4	20M	QPSK	50RB	0offset	Front	1cm	20050	1720	21.98	23.00	1.265	-0.04	0.488	0.617	0.311	0.393
	LTE Band 4	20M	QPSK	1RB	0offset	Back	1cm	20050	1720	23.28	24.00	1.180	0.14	0.767	0.905	0.490	0.578
28	LTE Band 4	20M	QPSK	1RB	0offset	Back	1cm	20175	1732.5	23.13	24.00	1.222	-0.05	0.834	1.019	0.529	0.646
	LTE Band 4	20M	QPSK	1RB	0offset	Back	1cm	20300	1745	23.16	24.00	1.213	0.09	0.836	1.014	0.517	0.627
	LTE Band 4	20M	QPSK	50RB	0offset	Back	1cm	20050	1720	21.98	23.00	1.265	-0.03	0.635	0.803	0.404	0.511
	LTE Band 4	20M	QPSK	50RB	0offset	Back	1cm	20175	1732.5	21.96	23.00	1.271	-0.01	0.658	0.836	0.417	0.530
	LTE Band 4	20M	QPSK	50RB	0offset	Back	1cm	20300	1745	21.81	23.00	1.315	-0.01	0.638	0.839	0.403	0.530
	LTE Band 4	20M	QPSK	100RB	0offset	Back	1cm	20050	1720	21.91	23.00	1.285	-0.01	0.613	0.788	0.391	0.503
	LTE Band 4	20M	QPSK	1RB	0offset	Left Side	1cm	20050	1720	23.28	24.00	1.180	-0.05	0.304	0.359	0.193	0.228
	LTE Band 4	20M	QPSK	50RB	0offset	Left Side	1cm	20050	1720	21.98	23.00	1.265	-0.04	0.254	0.321	0.160	0.202
	LTE Band 4	20M	QPSK	1RB	0offset	Right Side	1cm	20050	1720	23.28	24.00	1.180	-0.07	0.088	0.104	0.055	0.065
	LTE Band 4	20M	QPSK	50RB	0offset	Right Side	1cm	20050	1720	21.98	23.00	1.265	0.09	0.073	0.092	0.045	0.057
	LTE Band 4	20M	QPSK	1RB	0offset	Bottom Side	1cm	20050	1720	23.28	24.00	1.180	0.02	0.119	0.140	0.073	0.086
	LTE Band 4	20M	QPSK	50RB	0offset	Bottom Side	1cm	20050	1720	21.98	23.00	1.265	0.09	0.096	0.121	0.059	0.075
	LTE Band 2	20M	QPSK	1RB	0offset	Front	1cm	18900	1880	23.46	24.00	1.132	-0.11	0.841	0.952	0.500	0.566
	LTE Band 2	20M	QPSK	1RB	0offset	Front	1cm	18700	1860	23.29	24.00	1.178	0.03	0.883	1.040	0.530	0.624
	LTE Band 2	20M	QPSK	1RB	0offset	Front	1cm	19100	1900	23.30	24.00	1.175	0.14	0.742	0.872	0.432	0.508
	LTE Band 2	20M	QPSK	50RB	0offset	Front	1cm	18900	1880	22.35	23.00	1.161	0.01	0.640	0.743	0.378	0.439
	LTE Band 2	20M	QPSK	100RB	0offset	Front	1cm	18900	1880	22.32	23.00	1.169	0.05	0.620	0.725	0.365	0.427
	LTE Band 2	20M	QPSK	1RB	0offset	Back	1cm	18900	1880	23.46	24.00	1.132	-0.13	1.020	1.155	0.642	0.727
29	LTE Band 2	20M	QPSK	1RB	0offset	Back	1cm	18700	1860	23.29	24.00	1.178	-0.03	1.010	1.189	0.650	0.765
	LTE Band 2	20M	QPSK	1RB	0offset	Back	1cm	19100	1900	23.30	24.00	1.175	0.07	1.010	1.187	0.599	0.704
	LTE Band 2	20M	QPSK	50RB	0offset	Back	1cm	18900	1880	22.35	23.00	1.161	0.05	0.888	1.031	0.522	0.606
	LTE Band 2	20M	QPSK	50RB	0offset	Back	1cm	18700	1860	22.28	23.00	1.180	-0.09	0.904	1.067	0.543	0.641
	LTE Band 2	20M	QPSK	50RB	0offset	Back	1cm	19100	1900	22.30	23.00	1.175	0.05	0.892	1.048	0.513	0.603
	LTE Band 2	20M	QPSK	100RB	0offset	Back	1cm	18900	1880	22.32	23.00	1.169	0.11	0.906	1.060	0.530	0.620
	LTE Band 2	20M	QPSK	1RB	0offset	Left Side	1cm	18900	1880	23.46	24.00	1.132	0.13	0.487	0.551	0.300	0.340
	LTE Band 2	20M	QPSK	50RB	0offset	Left Side	1cm	18900	1880	22.35	23.00	1.161	-0.05	0.362	0.420	0.220	0.256
	LTE Band 2	20M	QPSK	1RB	0offset	Right Side	1cm	18900	1880	23.46	24.00	1.132	-0.01	0.135	0.153	0.082	0.093
	LTE Band 2	20M	QPSK	50RB	0offset	Right Side	1cm	18900	1880	22.35	23.00	1.161	0.07	0.095	0.110	0.056	0.065
	LTE Band 2	20M	QPSK	1RB	0offset	Bottom Side	1cm	18900	1880	23.46	24.00	1.132	0	0.289	0.327	0.174	0.197
	LTE Band 2	20M	QPSK	50RB	0offset	Bottom Side	1cm	18900	1880	22.35	23.00	1.161	-0.04	0.226	0.262	0.136	0.158



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1RB	0offset	Front	1cm	21100	2535	22.30	23.00	1.175	0.13	0.797	0.936	0.442	0.519
	LTE Band 7	20M	QPSK	1RB	0offset	Front	1cm	20850	2510	22.27	23.00	1.183	-0.12	0.756	0.894	0.424	0.502
	LTE Band 7	20M	QPSK	1RB	0offset	Front	1cm	21350	2560	22.25	23.00	1.189	0.09	0.790	0.939	0.440	0.523
	LTE Band 7	20M	QPSK	50RB	0offset	Front	1cm	21100	2535	21.09	22.00	1.233	-0.02	0.647	0.798	0.361	0.445
	LTE Band 7	20M	QPSK	100RB	0offset	Front	1cm	21100	2535	21.04	22.00	1.247	-0.07	0.631	0.787	0.351	0.438
	LTE Band 7	20M	QPSK	1RB	0offset	Back	1cm	21100	2535	22.30	23.00	1.175	-0.09	0.868	1.020	0.467	0.549
30	LTE Band 7	20M	QPSK	1RB	0offset	Back	1cm	20850	2535	22.27	23.00	1.183	-0.17	0.915	1.082	0.488	0.577
	LTE Band 7	20M	QPSK	1RB	0offset	Back	1cm	21350	2560	22.25	23.00	1.189	0.1	0.858	1.020	0.463	0.550
	LTE Band 7	20M	QPSK	50RB	0offset	Back	1cm	21100	2535	21.09	22.00	1.233	-0.07	0.693	0.855	0.372	0.459
	LTE Band 7	20M	QPSK	50RB	0offset	Back	1cm	20850	2510	20.90	22.00	1.288	-0.03	0.775	0.998	0.413	0.532
	LTE Band 7	20M	QPSK	50RB	0offset	Back	1cm	21350	2560	21.02	22.00	1.253	-0.04	0.764	0.957	0.404	0.506
	LTE Band 7	20M	QPSK	100RB	0offset	Back	1cm	21100	2535	21.04	22.00	1.247	-0.03	0.772	0.963	0.410	0.511
	LTE Band 7	20M	QPSK	1RB	0offset	Left Side	1cm	21100	2535	22.30	23.00	1.175	0.1	0.671	0.788	0.349	0.410
	LTE Band 7	20M	QPSK	50RB	0offset	Left Side	1cm	21100	2535	21.09	22.00	1.233	-0.02	0.518	0.639	0.271	0.334
	LTE Band 7	20M	QPSK	1RB	0offset	Right Side	1cm	21100	2535	22.30	23.00	1.175	-0.1	0.054	0.063	0.031	0.036
	LTE Band 7	20M	QPSK	50RB	0offset	Right Side	1cm	21100	2535	21.09	22.00	1.233	-0.19	0.043	0.053	0.025	0.031
	LTE Band 7	20M	QPSK	1RB	0offset	Bottom Side	1cm	21100	2535	22.30	23.00	1.175	-0.11	0.627	0.737	0.298	0.350
	LTE Band 7	20M	QPSK	50RB	0offset	Bottom Side	1cm	21100	2535	21.09	22.00	1.233	-0.1	0.488	0.602	0.229	0.282

<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Front	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	0.04	0.133	0.137	0.066	0.068
31	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	-0.01	0.841	0.865	0.373	0.384
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	1	2412	17.91	18.00	1.020	97.63	1.024	-0.02	0.460	0.480	0.203	0.212
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	11	2462	17.97	18.00	1.006	97.63	1.024	-0.02	0.700	0.721	0.305	0.314
	WLAN2.4GHz	OFDM	802.11n-HT20 MCS0	Back	1cm	6	2437	13.00	13.00	1.000	86.49	1.156	-0.03	0.399	0.461	0.190	0.220
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Left Side	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	-0.02	0.535	0.550	0.250	0.257
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Top Side	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	0.04	0.050	0.051	0.025	0.026
32	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1cm	36	5180	13.90	14.00	1.023	87.26	1.146	0.08	0.140	0.164	0.041	0.048
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1cm	44	5220	13.87	14.00	1.030	87.26	1.146	-0.11	0.097	0.114	0.037	0.044
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Front	1cm	36	5180	12.47	12.50	1.007	87.07	1.149	-0.17	0.118	0.136	0.038	0.044
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Front	1cm	46	5230	11.87	12.00	1.030	76.43	1.308	-0.06	0.062	0.083	0.023	0.031
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	36	5180	13.90	14.00	1.023	87.26	1.146	0.04	0.070	0.082	0.020	0.023
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Side	1cm	36	5180	13.90	14.00	1.023	87.26	1.146	-0.04	0.030	0.035	0.009	0.010
	WLAN5GHz	OFDM	802.11a 6Mbps	Top Side	1cm	36	5180	13.90	14.00	1.023	87.26	1.146	-0.06	0.001	0.001	0.001	0.001
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1cm	149	5745	13.98	14.00	1.004	87.26	1.146	-0.07	0.024	0.028	0.004	0.005
33	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	149	5745	13.98	14.00	1.004	87.26	1.146	0.07	0.072	0.083	0.021	0.024
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	157	5785	13.80	14.00	1.047	87.26	1.146	-0.1	0.051	0.061	0.018	0.022
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1cm	165	5825	13.93	14.00	1.016	87.26	1.146	0.18	0.063	0.073	0.019	0.022
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Back	1cm	149	5745	12.42	12.50	1.018	87.07	1.149	0.16	0.052	0.061	0.017	0.020
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1cm	151	5755	10.98	11.00	1.005	76.43	1.308	0.14	0.022	0.029	0.006	0.007
	WLAN5GHz	OFDM	802.11a 6Mbps	Left Side	1cm	149	5745	13.98	14.00	1.004	87.26	1.146	-0.08	0.013	0.015	0.003	0.003
	WLAN5GHz	OFDM	802.11a 6Mbps	Top Side	1cm	149	5745	13.98	14.00	1.004	87.26	1.146	-0.01	0.006	0.007	0.001	0.002



14.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1.5cm	128	824.2	27.88	28.00	1.028	-0.04	0.570	0.586	0.441	0.453
	GSM850	GMSK	GPRS (4 Tx slots)	Front	1.5cm	189	836.4	27.67	28.00	1.079	-0.02	0.621	0.670	0.477	0.515
34	GSM850	GMSK	GPRS (4 Tx slots)	Front	1.5cm	251	848.8	27.85	28.00	1.035	0.02	0.687	0.711	0.526	0.544
	GSM850	GMSK	GPRS (4 Tx slots)	Back	1.5cm	128	824.2	27.88	28.00	1.028	-0.02	0.570	0.586	0.438	0.450
	GSM1900	GMSK	GPRS (4 Tx slots)	Front	1.5cm	810	1909.8	27.50	28.00	1.122	-0.03	0.408	0.458	0.258	0.289
	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1.5cm	810	1909.8	27.50	28.00	1.122	-0.04	0.632	0.709	0.371	0.416
	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1.5cm	512	1850.2	27.39	28.00	1.151	0	0.639	0.735	0.396	0.456
35	GSM1900	GMSK	GPRS (4 Tx slots)	Back	1.5cm	661	1880	27.44	28.00	1.138	0	0.649	0.738	0.401	0.456

<WCDMA SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	QPSK	RMC 12.2Kbps	Front	1.5cm	4233	846.6	24.87	25.00	1.030	0.06	0.701	0.722	0.532	0.548
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4233	846.6	24.87	25.00	1.030	0.01	0.732	0.754	0.555	0.572
36	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4132	826.4	24.79	25.00	1.050	-0.01	0.785	0.824	0.595	0.624
	WCDMA V	QPSK	RMC 12.2Kbps	Back	1.5cm	4182	836.4	24.81	25.00	1.045	0.05	0.771	0.805	0.581	0.607
	WCDMA IV	QPSK	RMC 12.2Kbps	Front	1.5cm	1312	1712.4	24.00	24.00	1.000	-0.05	0.405	0.405	0.274	0.274
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1312	1712.4	24.00	24.00	1.000	-0.06	0.524	0.524	0.351	0.351
	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1413	1732.6	23.79	24.00	1.050	-0.02	0.516	0.542	0.345	0.362
37	WCDMA IV	QPSK	RMC 12.2Kbps	Back	1.5cm	1513	1752.6	23.85	24.00	1.035	-0.04	0.550	0.569	0.365	0.378
	WCDMA II	QPSK	RMC 12.2Kbps	Front	1.5cm	9538	1907.6	23.92	24.00	1.019	-0.03	0.383	0.390	0.246	0.251
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9538	1907.6	23.92	24.00	1.019	-0.02	0.615	0.626	0.373	0.380
38	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9262	1852.4	23.75	24.00	1.059	-0.01	0.635	0.673	0.387	0.410
	WCDMA II	QPSK	RMC 12.2Kbps	Back	1.5cm	9400	1880	23.73	24.00	1.064	-0.03	0.614	0.653	0.376	0.400

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	0offset	Front	1.5cm	23095	707.5	24.36	25.00	1.159	0.08	0.195	0.226	0.152	0.176
	LTE Band 12	10M	QPSK	25RB	0offset	Front	1.5cm	23095	707.5	23.21	24.00	1.199	0.08	0.171	0.205	0.133	0.160
39	LTE Band 12	10M	QPSK	1RB	0offset	Back	1.5cm	23095	707.5	24.36	25.00	1.159	0.12	0.227	0.263	0.175	0.203
	LTE Band 12	10M	QPSK	25RB	0offset	Back	1.5cm	23095	707.5	23.21	24.00	1.199	0.1	0.188	0.226	0.146	0.175
	LTE Band 17	10M	QPSK	1RB	0offset	Front	1.5cm	23790	710	24.77	25.00	1.054	-0.07	0.238	0.251	0.185	0.195
	LTE Band 17	10M	QPSK	25RB	0offset	Front	1.5cm	23790	710	23.74	24.00	1.062	0.03	0.183	0.194	0.142	0.151
40	LTE Band 17	10M	QPSK	1RB	0offset	Back	1.5cm	23790	710	24.77	25.00	1.054	-0.09	0.269	0.284	0.196	0.207
	LTE Band 17	10M	QPSK	25RB	0offset	Back	1.5cm	23790	710	23.74	24.00	1.062	0.11	0.211	0.224	0.162	0.172
	LTE Band 13	10M	QPSK	1RB	0offset	Front	1.5cm	23230	782	24.78	25.00	1.052	0.19	0.636	0.669	0.487	0.512
	LTE Band 13	10M	QPSK	25RB	0offset	Front	1.5cm	23230	782	23.44	24.00	1.138	-0.01	0.538	0.612	0.410	0.466
41	LTE Band 13	10M	QPSK	1RB	0offset	Back	1.5cm	23230	782	24.78	25.00	1.052	0.17	0.675	0.710	0.522	0.549
	LTE Band 13	10M	QPSK	25RB	0offset	Back	1.5cm	23230	782	23.44	24.00	1.138	-0.16	0.574	0.653	0.443	0.504
42	LTE Band 5	10M	QPSK	1RB	0offset	Front	1.5cm	20450	829	24.83	25.00	1.040	-0.1	0.706	0.734	0.546	0.568
	LTE Band 5	10M	QPSK	1RB	0offset	Front	1.5cm	20525	836.5	24.45	25.00	1.135	-0.13	0.611	0.693	0.470	0.533
	LTE Band 5	10M	QPSK	1RB	0offset	Front	1.5cm	20600	844	24.47	25.00	1.130	-0.11	0.604	0.682	0.462	0.522
	LTE Band 5	10M	QPSK	25RB	0offset	Front	1.5cm	20450	829	23.45	24.00	1.135	0.02	0.542	0.615	0.420	0.477
	LTE Band 5	10M	QPSK	1RB	0offset	Back	1.5cm	20450	829	24.83	25.00	1.040	0	0.668	0.695	0.510	0.530
	LTE Band 5	10M	QPSK	25RB	0offset	Back	1.5cm	20450	829	23.45	24.00	1.135	0.02	0.513	0.582	0.391	0.444



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 4	20M	QPSK	1RB	0offset	Front	1.5cm	20050	1720	23.28	24.00	1.180	-0.14	0.360	0.425	0.241	0.284
	LTE Band 4	20M	QPSK	50RB	0offset	Front	1.5cm	20050	1720	21.98	23.00	1.265	-0.03	0.286	0.362	0.192	0.243
	LTE Band 4	20M	QPSK	1RB	0offset	Back	1.5cm	20050	1720	23.28	24.00	1.180	0.17	0.459	0.542	0.305	0.360
43	LTE Band 4	20M	QPSK	1RB	0offset	Back	1.5cm	20175	1732.5	23.13	24.00	1.222	0.12	0.463	0.566	0.310	0.379
	LTE Band 4	20M	QPSK	1RB	0offset	Back	1.5cm	20300	1745	23.16	24.00	1.213	-0.07	0.454	0.551	0.305	0.370
	LTE Band 4	20M	QPSK	50RB	0offset	Back	1.5cm	20050	1720	21.98	23.00	1.265	0.05	0.347	0.439	0.233	0.295
	LTE Band 2	20M	QPSK	1RB	0offset	Front	1.5cm	18900	1880	23.46	24.00	1.132	0.05	0.464	0.525	0.288	0.326
	LTE Band 2	20M	QPSK	50RB	0offset	Front	1.5cm	18900	1880	22.35	23.00	1.161	0.09	0.325	0.377	0.200	0.232
	LTE Band 2	20M	QPSK	1RB	0offset	Back	1.5cm	18900	1880	23.46	24.00	1.132	-0.09	0.641	0.726	0.400	0.453
44	LTE Band 2	20M	QPSK	1RB	0offset	Back	1.5cm	18700	1860	23.29	24.00	1.178	0.09	0.657	0.774	0.409	0.482
	LTE Band 2	20M	QPSK	1RB	0offset	Back	1.5cm	19100	1900	23.30	24.00	1.175	-0.01	0.626	0.735	0.384	0.451
	LTE Band 2	20M	QPSK	50RB	0offset	Back	1.5cm	18900	1880	22.35	23.00	1.161	0.02	0.480	0.557	0.297	0.345
	LTE Band 7	20M	QPSK	1RB	0offset	Front	1.5cm	21100	2535	22.30	23.00	1.175	-0.15	0.480	0.564	0.274	0.322
	LTE Band 7	20M	QPSK	50RB	0offset	Front	1.5cm	21100	2535	21.09	22.00	1.233	-0.04	0.376	0.464	0.214	0.264
	LTE Band 7	20M	QPSK	1RB	0offset	Back	1.5cm	21100	2535	22.30	23.00	1.175	-0.12	0.485	0.570	0.269	0.316
	LTE Band 7	20M	QPSK	1RB	0offset	Back	1.5cm	20850	2510	22.27	23.00	1.183	-0.17	0.475	0.562	0.260	0.308
45	LTE Band 7	20M	QPSK	1RB	0offset	Back	1.5cm	21350	2560	22.25	23.00	1.189	0.17	0.488	0.580	0.272	0.323
	LTE Band 7	20M	QPSK	50RB	0offset	Back	1.5cm	21100	2535	21.09	22.00	1.233	0.01	0.383	0.472	0.211	0.260

<WLAN SAR>

Plot No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Front	1.5cm	6	2437	17.98	18.00	1.005	97.63	1.024	0.05	0.072	0.074	0.037	0.038
46	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	6	2437	17.98	18.00	1.005	97.63	1.024	-0.03	0.333	0.343	0.162	0.167
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	1	2412	17.91	18.00	1.020	97.63	1.024	-0.03	0.195	0.204	0.093	0.097
	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1.5cm	11	2462	17.97	18.00	1.006	97.63	1.024	-0.04	0.294	0.303	0.139	0.143
	WLAN2.4GHz	OFDM	802.11n-HT20 MCS0	Back	1.5cm	6	2437	13.00	13.00	1.000	86.49	1.156	-0.05	0.143	0.165	0.075	0.087
47	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	36	5180	13.90	14.00	1.023	87.26	1.146	0.047	0.071	0.083	0.025	0.029
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	44	5220	13.87	14.00	1.030	87.26	1.146	0.08	0.068	0.080	0.024	0.028
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Front	1.5cm	36	5180	12.47	12.50	1.007	87.07	1.149	-0.11	0.052	0.060	0.020	0.023
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Front	1.5cm	46	5230	11.87	12.00	1.030	76.43	1.308	0.11	0.032	0.043	0.012	0.016
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	36	5180	13.90	14.00	1.023	87.26	1.146	-0.013	0.045	0.053	0.016	0.019
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	60	5300	13.89	14.00	1.025	87.26	1.146	0.04	0.060	0.070	0.022	0.026
48	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	52	5260	13.73	14.00	1.064	87.26	1.146	0.08	0.058	0.071	0.022	0.027
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Front	1.5cm	64	5320	12.46	12.50	1.009	87.07	1.149	0.013	0.043	0.050	0.018	0.021
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Front	1.5cm	54	5270	11.94	12.00	1.014	76.43	1.308	0.04	0.036	0.048	0.012	0.016
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	60	5300	13.89	14.00	1.025	87.26	1.146	-0.078	0.050	0.059	0.016	0.019
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	140	5700	13.70	14.00	1.072	87.26	1.146	0.184	0.024	0.029	0.009	0.011
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	140	5700	13.70	14.00	1.072	87.26	1.146	0.028	0.035	0.043	0.014	0.017
49	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	100	5500	13.65	14.00	1.083	87.26	1.146	-0.04	0.050	0.062	0.016	0.020
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	116	5580	13.60	14.00	1.096	87.26	1.146	-0.01	0.037	0.046	0.013	0.016
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Back	1.5cm	100	5500	12.44	12.50	1.014	87.07	1.149	-0.02	0.033	0.038	0.010	0.012
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	134	5670	10.99	11.00	1.002	76.43	1.308	-0.16	0.026	0.034	0.007	0.009
	WLAN5GHz	OFDM	802.11a 6Mbps	Front	1.5cm	149	5745	13.98	14.00	1.004	87.26	1.146	0.031	0.013	0.015	0.002	0.002
50	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	149	5745	13.98	14.00	1.004	87.26	1.146	-0.098	0.041	0.047	0.014	0.016
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	157	5785	13.80	14.00	1.047	87.26	1.146	-0.12	0.026	0.031	0.009	0.010
	WLAN5GHz	OFDM	802.11a 6Mbps	Back	1.5cm	165	5825	13.93	14.00	1.016	87.26	1.146	0.16	0.032	0.037	0.012	0.014
	WLAN5GHz	OFDM	802.11n-HT20 MCS0	Back	1.5cm	149	5745	12.42	12.50	1.018	87.07	1.149	-0.07	0.024	0.028	0.009	0.010
	WLAN5GHz	OFDM	802.11n-HT40 MCS0	Back	1.5cm	151	5755	10.98	11.00	1.005	76.43	1.308	0.13	0.012	0.016	0.004	0.005

14.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA V	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	4132	826.4	24.79	25.00	1.050	0.02	0.836	-	0.877
2nd	WCDMA V	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	4132	826.4	24.79	25.00	1.050	0.04	0.796	1.05	0.835
1st	WCDMA IV	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	1513	1752.6	23.85	24.00	1.035	-0.01	0.913	-	0.945
2nd	WCDMA IV	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	1513	1752.6	23.85	24.00	1.035	0.09	0.866	1.05	0.896
1st	WCDMA II	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	9262	1852.4	23.75	24.00	1.059	-0.02	1.120	-	1.186
2nd	WCDMA II	-	QPSK	-	-	RMC 12.2Kbps	Back	1cm	9262	1852.4	23.75	24.00	1.059	0.07	1.100	1.02	1.165
1st	LTE Band 7	20M	QPSK	1RB	0offset	-	Left Cheek	-	21350	2560	22.25	23.00	1.189	-0.04	0.997	-	1.185
2nd	LTE Band 7	20M	QPSK	1RB	0offset	-	Left Cheek	-	21350	2560	22.25	23.00	1.189	-0.04	0.991	1.01	1.178

No.	Band	Modulation	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	-0.01	0.841	-	0.865
2nd	WLAN2.4GHz	DBPSK	802.11b 1Mbps	Back	1cm	6	2437	17.98	18.00	1.005	97.63	1.024	0.01	0.825	1.02	0.849

General Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
6.	WCDMA((Voice) + WLAN5GHz(data)	Yes	Yes		
7.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
8.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
9.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
10.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
11.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
12.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
13.	GPRS/EDGE(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
14.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct
15.	LTE(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct

General Note:

- This device supported VoIP in EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
- This device 2.4GHz supports Hotspot and 5.2GHz / 5.8GHz WLAN supports WiFi Direct (GC/GO) operation, and 5.3GHz / 5.5GHz WLAN supports WiFi Direct (GC only).
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The worst case 5 GHz WLAN reported SAR for each configuration was used for SAR summation. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with 5 GHz WLAN.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
 - The SPLSR calculated results please refer to section 15.4.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Hotspot	Body-worn
	Test separation	10 mm	15 mm
11 dBm	Estimated 1g SAR (W/kg)	0.273 W/kg	0.182 W/kg
	Estimated 10g SAR (W/kg)	0.109 W/kg	0.073 W/kg



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	2.4GHz Bluetooth 1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.776	0.512	0.022	1.29	0.80		
		Right Tilted	0.241	0.257	0.004	0.50	0.25		
		Left Cheek	0.464	0.172	0.004	0.64	0.47		
		Left Tilted	0.238	0.127	0.002	0.37	0.24		
	GSM1900	Right Cheek	0.506	0.512	0.022	1.02	0.53		
		Right Tilted	0.252	0.257	0.004	0.51	0.26		
		Left Cheek	0.957	0.172	0.004	1.13	0.96		
		Left Tilted	0.191	0.127	0.002	0.32	0.19		
WCDMA	Band V	Right Cheek	0.624	0.512	0.022	1.14	0.65		
		Right Tilted	0.339	0.257	0.004	0.60	0.34		
		Left Cheek	0.584	0.172	0.004	0.76	0.59		
		Left Tilted	0.331	0.127	0.002	0.46	0.33		
	Band IV	Right Cheek	0.235	0.512	0.022	0.75	0.26		
		Right Tilted	0.190	0.257	0.004	0.45	0.19		
		Left Cheek	0.621	0.172	0.004	0.79	0.63		
		Left Tilted	0.241	0.127	0.002	0.37	0.24		
	Band II	Right Cheek	0.397	0.512	0.022	0.91	0.42		
		Right Tilted	0.229	0.257	0.004	0.49	0.23		
		Left Cheek	0.832	0.172	0.004	1.00	0.84		
		Left Tilted	0.166	0.127	0.002	0.29	0.17		
LTE	Band 12	Right Cheek	0.190	0.512	0.022	0.70	0.21		
		Right Tilted	0.082	0.257	0.004	0.34	0.09		
		Left Cheek	0.191	0.172	0.004	0.36	0.20		
		Left Tilted	0.080	0.127	0.002	0.21	0.08		
	Band 17	Right Cheek	0.196	0.512	0.022	0.71	0.22		
		Right Tilted	0.085	0.257	0.004	0.34	0.09		
		Left Cheek	0.188	0.172	0.004	0.36	0.19		
		Left Tilted	0.074	0.127	0.002	0.20	0.08		
	Band 13	Right Cheek	0.547	0.512	0.022	1.06	0.57		
		Right Tilted	0.279	0.257	0.004	0.54	0.28		
		Left Cheek	0.524	0.172	0.004	0.70	0.53		
		Left Tilted	0.269	0.127	0.002	0.40	0.27		
	Band 5	Right Cheek	0.647	0.512	0.022	1.16	0.67		
		Right Tilted	0.342	0.257	0.004	0.60	0.35		
		Left Cheek	0.588	0.172	0.004	0.76	0.59		
		Left Tilted	0.368	0.127	0.002	0.50	0.37		
	Band 4	Right Cheek	0.268	0.512	0.022	0.78	0.29		
		Right Tilted	0.168	0.257	0.004	0.43	0.17		
		Left Cheek	0.601	0.172	0.004	0.77	0.61		
		Left Tilted	0.228	0.127	0.002	0.36	0.23		
	Band 2	Right Cheek	0.484	0.512	0.022	1.00	0.51		
		Right Tilted	0.260	0.257	0.004	0.52	0.26		
		Left Cheek	0.826	0.172	0.004	1.00	0.83		
		Left Tilted	0.214	0.127	0.002	0.34	0.22		
Band 7	Right Cheek	0.522	0.512	0.022	1.03	0.54			
	Right Tilted	0.352	0.257	0.004	0.61	0.36			
	Left Cheek	1.185	0.172	0.004	1.36	1.19			
	Left Tilted	0.183	0.127	0.002	0.31	0.19			



WWAN Band		Exposure Position	1	2		1+2 Summed SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			SAR (W/kg)	Band	SAR (W/kg)			
GSM	GSM850	Right Cheek	0.776	5.8GHz WLAN	0.382	1.16		
		Right Tilted	0.241	5.5GHz WLAN	0.177	0.42		
		Left Cheek	0.464	5.5GHz WLAN	0.147	0.61		
		Left Tilted	0.238	5.5GHz WLAN	0.076	0.31		
	GSM1900	Right Cheek	0.506	5.8GHz WLAN	0.382	0.89		
		Right Tilted	0.252	5.5GHz WLAN	0.177	0.43		
		Left Cheek	0.957	5.5GHz WLAN	0.147	1.10		
		Left Tilted	0.191	5.5GHz WLAN	0.076	0.27		
WCDMA	Band V	Right Cheek	0.624	5.8GHz WLAN	0.382	1.01		
		Right Tilted	0.339	5.5GHz WLAN	0.177	0.52		
		Left Cheek	0.584	5.5GHz WLAN	0.147	0.73		
		Left Tilted	0.331	5.5GHz WLAN	0.076	0.41		
	Band IV	Right Cheek	0.235	5.8GHz WLAN	0.382	0.62		
		Right Tilted	0.190	5.5GHz WLAN	0.177	0.37		
		Left Cheek	0.621	5.5GHz WLAN	0.147	0.77		
		Left Tilted	0.241	5.5GHz WLAN	0.076	0.32		
	Band II	Right Cheek	0.397	5.8GHz WLAN	0.382	0.78		
		Right Tilted	0.229	5.5GHz WLAN	0.177	0.41		
		Left Cheek	0.832	5.5GHz WLAN	0.147	0.98		
		Left Tilted	0.166	5.5GHz WLAN	0.076	0.24		
LTE	Band 12	Right Cheek	0.190	5.8GHz WLAN	0.382	0.57		
		Right Tilted	0.082	5.5GHz WLAN	0.177	0.26		
		Left Cheek	0.191	5.5GHz WLAN	0.147	0.34		
		Left Tilted	0.080	5.5GHz WLAN	0.076	0.16		
	Band 17	Right Cheek	0.196	5.8GHz WLAN	0.382	0.58		
		Right Tilted	0.085	5.5GHz WLAN	0.177	0.26		
		Left Cheek	0.188	5.5GHz WLAN	0.147	0.34		
		Left Tilted	0.074	5.5GHz WLAN	0.076	0.15		
	Band 13	Right Cheek	0.547	5.8GHz WLAN	0.382	0.93		
		Right Tilted	0.279	5.5GHz WLAN	0.177	0.46		
		Left Cheek	0.524	5.5GHz WLAN	0.147	0.67		
		Left Tilted	0.269	5.5GHz WLAN	0.076	0.35		
	Band 5	Right Cheek	0.647	5.8GHz WLAN	0.382	1.03		
		Right Tilted	0.342	5.5GHz WLAN	0.177	0.52		
		Left Cheek	0.588	5.5GHz WLAN	0.147	0.74		
		Left Tilted	0.368	5.5GHz WLAN	0.076	0.44		
	Band 4	Right Cheek	0.268	5.8GHz WLAN	0.382	0.65		
		Right Tilted	0.168	5.5GHz WLAN	0.177	0.35		
		Left Cheek	0.601	5.5GHz WLAN	0.147	0.75		
		Left Tilted	0.228	5.5GHz WLAN	0.076	0.30		
	Band 2	Right Cheek	0.484	5.8GHz WLAN	0.382	0.87		
		Right Tilted	0.260	5.5GHz WLAN	0.177	0.44		
		Left Cheek	0.826	5.5GHz WLAN	0.147	0.97		
		Left Tilted	0.214	5.5GHz WLAN	0.076	0.29		
Band 7	Right Cheek	0.522	5.8GHz WLAN	0.382	0.90			
	Right Tilted	0.352	5.5GHz WLAN	0.177	0.53			
	Left Cheek	1.185	5.5GHz WLAN	0.147	1.33			
	Left Tilted	0.183	5.5GHz WLAN	0.076	0.26			



WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.559	0.232	0.004	0.79	0.56		
		Right Tilted	0.190	0.119	0.001	0.31	0.19		
		Left Cheek	0.357	0.081	0.001	0.44	0.36		
		Left Tilted	0.190	0.062	0.001	0.25	0.19		
	GSM1900	Right Cheek	0.322	0.232	0.004	0.55	0.33		
		Right Tilted	0.148	0.119	0.001	0.27	0.15		
		Left Cheek	0.588	0.081	0.001	0.67	0.59		
		Left Tilted	0.116	0.062	0.001	0.18	0.12		
WCDMA	Band V	Right Cheek	0.480	0.232	0.004	0.71	0.48		
		Right Tilted	0.267	0.119	0.001	0.39	0.27		
		Left Cheek	0.451	0.081	0.001	0.53	0.45		
		Left Tilted	0.256	0.062	0.001	0.32	0.26		
	Band IV	Right Cheek	0.157	0.232	0.004	0.39	0.16		
		Right Tilted	0.127	0.119	0.001	0.25	0.13		
		Left Cheek	0.406	0.081	0.001	0.49	0.41		
		Left Tilted	0.158	0.062	0.001	0.22	0.16		
	Band II	Right Cheek	0.254	0.232	0.004	0.49	0.26		
		Right Tilted	0.134	0.119	0.001	0.25	0.14		
		Left Cheek	0.508	0.081	0.001	0.59	0.51		
		Left Tilted	0.105	0.062	0.001	0.17	0.11		
LTE	Band 12	Right Cheek	0.148	0.232	0.004	0.38	0.15		
		Right Tilted	0.064	0.119	0.001	0.18	0.07		
		Left Cheek	0.149	0.081	0.001	0.23	0.15		
		Left Tilted	0.064	0.062	0.001	0.13	0.07		
	Band 17	Right Cheek	0.155	0.232	0.004	0.39	0.16		
		Right Tilted	0.066	0.119	0.001	0.19	0.07		
		Left Cheek	0.146	0.081	0.001	0.23	0.15		
		Left Tilted	0.057	0.062	0.001	0.12	0.06		
	Band 13	Right Cheek	0.419	0.232	0.004	0.65	0.42		
		Right Tilted	0.219	0.119	0.001	0.34	0.22		
		Left Cheek	0.383	0.081	0.001	0.46	0.38		
		Left Tilted	0.212	0.062	0.001	0.27	0.21		
	Band 5	Right Cheek	0.482	0.232	0.004	0.71	0.49		
		Right Tilted	0.258	0.119	0.001	0.38	0.26		
		Left Cheek	0.459	0.081	0.001	0.54	0.46		
		Left Tilted	0.277	0.062	0.001	0.34	0.28		
	Band 24	Right Cheek	0.181	0.232	0.004	0.41	0.19		
		Right Tilted	0.111	0.119	0.001	0.23	0.11		
		Left Cheek	0.387	0.081	0.001	0.47	0.39		
		Left Tilted	0.148	0.062	0.001	0.21	0.15		
	Band 2	Right Cheek	0.305	0.232	0.004	0.54	0.31		
		Right Tilted	0.147	0.119	0.001	0.27	0.15		
		Left Cheek	0.508	0.081	0.001	0.59	0.51		
		Left Tilted	0.136	0.062	0.001	0.20	0.14		
Band 7	Right Cheek	0.281	0.232	0.004	0.51	0.29			
	Right Tilted	0.160	0.119	0.001	0.28	0.16			
	Left Cheek	0.647	0.081	0.001	0.73	0.65			
	Left Tilted	0.092	0.062	0.001	0.15	0.09			



WWAN Band		Exposure Position	1	2		1+2 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Right Cheek	0.559	5.8GHz WLAN	0.115	0.67		
		Right Tilted	0.190	5.5GHz WLAN	0.061	0.25		
		Left Cheek	0.357	5.5GHz WLAN	0.052	0.41		
		Left Tilted	0.190	5.5GHz WLAN	0.027	0.22		
	GSM1900	Right Cheek	0.322	5.8GHz WLAN	0.115	0.44		
		Right Tilted	0.148	5.5GHz WLAN	0.061	0.21		
		Left Cheek	0.588	5.5GHz WLAN	0.052	0.64		
		Left Tilted	0.116	5.5GHz WLAN	0.027	0.14		
WCDMA	Band V	Right Cheek	0.480	5.8GHz WLAN	0.115	0.60		
		Right Tilted	0.267	5.5GHz WLAN	0.061	0.33		
		Left Cheek	0.451	5.5GHz WLAN	0.052	0.50		
		Left Tilted	0.256	5.5GHz WLAN	0.027	0.28		
	Band IV	Right Cheek	0.157	5.8GHz WLAN	0.115	0.27		
		Right Tilted	0.127	5.5GHz WLAN	0.061	0.19		
		Left Cheek	0.406	5.5GHz WLAN	0.052	0.46		
		Left Tilted	0.158	5.5GHz WLAN	0.027	0.19		
	Band II	Right Cheek	0.254	5.8GHz WLAN	0.115	0.37		
		Right Tilted	0.134	5.5GHz WLAN	0.061	0.20		
		Left Cheek	0.508	5.5GHz WLAN	0.052	0.56		
		Left Tilted	0.105	5.5GHz WLAN	0.027	0.13		
LTE	Band 12	Right Cheek	0.148	5.8GHz WLAN	0.115	0.26		
		Right Tilted	0.064	5.5GHz WLAN	0.061	0.13		
		Left Cheek	0.149	5.5GHz WLAN	0.052	0.20		
		Left Tilted	0.064	5.5GHz WLAN	0.027	0.09		
	Band 17	Right Cheek	0.155	5.8GHz WLAN	0.115	0.27		
		Right Tilted	0.066	5.5GHz WLAN	0.061	0.13		
		Left Cheek	0.146	5.5GHz WLAN	0.052	0.20		
		Left Tilted	0.057	5.5GHz WLAN	0.027	0.08		
	Band 13	Right Cheek	0.419	5.8GHz WLAN	0.115	0.53		
		Right Tilted	0.219	5.5GHz WLAN	0.061	0.28		
		Left Cheek	0.383	5.5GHz WLAN	0.052	0.44		
		Left Tilted	0.212	5.5GHz WLAN	0.027	0.24		
	Band 5	Right Cheek	0.482	5.8GHz WLAN	0.115	0.60		
		Right Tilted	0.258	5.5GHz WLAN	0.061	0.32		
		Left Cheek	0.459	5.5GHz WLAN	0.052	0.51		
		Left Tilted	0.277	5.5GHz WLAN	0.027	0.30		
	Band 24	Right Cheek	0.181	5.8GHz WLAN	0.115	0.30		
		Right Tilted	0.111	5.5GHz WLAN	0.061	0.17		
		Left Cheek	0.387	5.5GHz WLAN	0.052	0.44		
		Left Tilted	0.148	5.5GHz WLAN	0.027	0.18		
	Band 2	Right Cheek	0.305	5.8GHz WLAN	0.115	0.42		
		Right Tilted	0.147	5.5GHz WLAN	0.061	0.21		
		Left Cheek	0.508	5.5GHz WLAN	0.052	0.56		
		Left Tilted	0.136	5.5GHz WLAN	0.027	0.16		
	Band 7	Right Cheek	0.281	5.8GHz WLAN	0.115	0.40		
		Right Tilted	0.160	5.5GHz WLAN	0.061	0.22		
		Left Cheek	0.647	5.5GHz WLAN	0.052	0.70		
		Left Tilted	0.092	5.5GHz WLAN	0.027	0.12		



15.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	2.4GHz Bluetooth					
		1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
GSM	GSM850	Front	0.807	0.137	0.273	0.94	1.08		
		Back	0.634	0.865	0.273	1.50	0.91		
		Left side	0.522	0.550	0.273	1.07	0.80		
		Right side	0.526			0.53	0.53		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.094			0.09	0.09		
	GSM1900	Front	0.969	0.137	0.273	1.11	1.24		
		Back	1.183	0.865	0.273	2.05	1.46	0.03	Case 1
		Left side	0.537	0.550	0.273	1.09	0.81		
		Right side	0.118			0.12	0.12		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.376			0.38	0.38		
WCDMA	Band V	Front	0.789	0.137	0.273	0.93	1.06		
		Back	0.877	0.865	0.273	1.74	1.15	0.03	Case 2
		Left side	0.579	0.550	0.273	1.13	0.85		
		Right side	0.656			0.66	0.66		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.177			0.18	0.18		
	Band IV	Front	0.603	0.137	0.273	0.74	0.88		
		Back	0.945	0.865	0.273	1.81	1.22	0.02	Case 3
		Left side	0.351	0.550	0.273	0.90	0.62		
		Right side	0.112			0.11	0.11		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.119			0.12	0.12		
	Band II	Front	0.747	0.137	0.273	0.88	1.02		
		Back	1.186	0.865	0.273	2.05	1.46	0.03	Case 4
		Left side	0.478	0.550	0.273	1.03	0.75		
		Right side	0.083			0.08	0.08		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.295			0.30	0.30		



WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	2.4GHz Bluetooth					
		1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)					
LTE	Band 12	Front	0.284	0.137	0.273	0.42	0.56		
		Back	0.300	0.865	0.273	1.17	0.57		
		Left side	0.220	0.550	0.273	0.77	0.49		
		Right side	0.183			0.18	0.18		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.036			0.04	0.04		
	Band 17	Front	0.305	0.137	0.273	0.44	0.58		
		Back	0.362	0.865	0.273	1.23	0.64		
		Left side	0.245	0.550	0.273	0.80	0.52		
		Right side	0.208			0.21	0.21		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.044			0.04	0.04		
	Band 13	Front	0.740	0.137	0.273	0.88	1.01		
		Back	0.760	0.865	0.273	1.63	1.03	0.03	Case 5
		Left side	0.743	0.550	0.273	1.29	1.02		
		Right side	0.641			0.64	0.64		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.089			0.09	0.09		
	Band 5	Front	0.784	0.137	0.273	0.92	1.06		
		Back	0.747	0.865	0.273	1.61	1.02	0.04	Case 6
		Left side	0.639	0.550	0.273	1.19	0.91		
		Right side	0.635			0.64	0.64		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.135			0.14	0.14		
	Band 4	Front	0.721	0.137	0.273	0.86	0.99		
		Back	1.019	0.865	0.273	1.88	1.29	0.02	Case 7
		Left side	0.359	0.550	0.273	0.91	0.63		
		Right side	0.104			0.10	0.10		
		Top side		0.051	0.273	0.05	0.27		
		Bottom side	0.140			0.14	0.14		
Band 2	Front	1.040	0.137	0.273	1.18	1.31			
	Back	1.189	0.865	0.273	2.05	1.46	0.03	Case 8	
	Left side	0.551	0.550	0.273	1.10	0.82			
	Right side	0.153			0.15	0.15			
	Top side		0.051	0.273	0.05	0.27			
	Bottom side	0.327			0.33	0.33			
Band 7	Front	0.939	0.137	0.273	1.08	1.21			
	Back	1.082	0.865	0.273	1.95	1.36	0.03	Case 9	
	Left side	0.788	0.550	0.273	1.34	1.06			
	Right side	0.063			0.06	0.06			
	Top side		0.051	0.273	0.05	0.27			
	Bottom side	0.737			0.74	0.74			



WWAN Band		Exposure Position	1	2		1+2 Summed SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			SAR (W/kg)	Band	SAR (W/kg)			
GSM	GSM850	Front	0.807	5.2GHz WLAN	0.164	0.97		
		Back	0.634	5.8GHz WLAN	0.083	0.72		
		Left side	0.522	5.2GHz WLAN	0.035	0.56		
		Right side	0.526			0.53		
		Top side		5.8GHz WLAN	0.007	0.01		
		Bottom side	0.094			0.09		
	GSM1900	Front	0.865	5.2GHz WLAN	0.164	1.03		
		Back	1.183	5.8GHz WLAN	0.083	1.27		
		Left side	0.537	5.2GHz WLAN	0.035	0.57		
		Right side	0.118			0.12		
		Top side		5.8GHz WLAN	0.007	0.01		
		Bottom side	0.376			0.38		
WCDMA	Band V	Front	0.789	5.2GHz WLAN	0.164	0.95		
		Back	0.877	5.8GHz WLAN	0.083	0.96		
		Left side	0.579	5.2GHz WLAN	0.035	0.61		
		Right side	0.656			0.66		
		Top side		5.8GHz WLAN	0.007	0.01		
		Bottom side	0.177			0.18		
	Band IV	Front	0.603	5.2GHz WLAN	0.164	0.77		
		Back	0.945	5.8GHz WLAN	0.083	1.03		
		Left side	0.351	5.2GHz WLAN	0.035	0.39		
		Right side	0.112			0.11		
		Top side		5.8GHz WLAN	0.007	0.01		
		Bottom side	0.119			0.12		
	Band II	Front	0.747	5.2GHz WLAN	0.164	0.91		
		Back	1.186	5.8GHz WLAN	0.083	1.27		
		Left side	0.478	5.2GHz WLAN	0.035	0.51		
		Right side	0.083			0.08		
		Top side		5.8GHz WLAN	0.007	0.01		
		Bottom side	0.295			0.30		



WWAN Band	Exposure Position	1	2		1+2 Summed SAR (W/kg)	SPLSR	Case No
		WWAN	5GHz WLAN				
		SAR (W/kg)	Band	SAR (W/kg)			
LTE	Band 12	Front	0.284	5.2GHz WLAN	0.164	0.45	
		Back	0.300	5.8GHz WLAN	0.083	0.38	
		Left side	0.220	5.2GHz WLAN	0.035	0.26	
		Right side	0.183			0.18	
		Top side		5.8GHz WLAN	0.007	0.01	
		Bottom side	0.036			0.04	
	Band 17	Front	0.305	5.2GHz WLAN	0.164	0.47	
		Back	0.362	5.8GHz WLAN	0.083	0.45	
		Left side	0.245	5.2GHz WLAN	0.035	0.28	
		Right side	0.208			0.21	
		Top side		5.8GHz WLAN	0.007	0.01	
		Bottom side	0.044			0.04	
	Band 13	Front	0.740	5.2GHz WLAN	0.164	0.90	
		Back	0.760	5.8GHz WLAN	0.083	0.84	
		Left side	0.743	5.2GHz WLAN	0.035	0.78	
		Right side	0.641			0.64	
		Top side		5.8GHz WLAN	0.007	0.01	
		Bottom side	0.089			0.09	
	Band 5	Front	0.784	5.2GHz WLAN	0.164	0.95	
		Back	0.747	5.8GHz WLAN	0.083	0.83	
		Left side	0.639	5.2GHz WLAN	0.035	0.67	
		Right side	0.635			0.64	
		Top side		5.8GHz WLAN	0.007	0.01	
		Bottom side	0.135			0.14	
	Band 4	Front	0.721	5.2GHz WLAN	0.164	0.89	
		Back	1.019	5.8GHz WLAN	0.083	1.10	
		Left side	0.359	5.2GHz WLAN	0.035	0.39	
		Right side	0.104			0.10	
		Top side		5.8GHz WLAN	0.007	0.01	
		Bottom side	0.140			0.14	
Band 2	Front	1.040	5.2GHz WLAN	0.164	1.20		
	Back	1.189	5.8GHz WLAN	0.083	1.27		
	Left side	0.551	5.2GHz WLAN	0.035	0.59		
	Right side	0.153			0.15		
	Top side		5.8GHz WLAN	0.007	0.01		
	Bottom side	0.327			0.33		
Band 7	Front	0.939	5.2GHz WLAN	0.164	1.10		
	Back	1.082	5.8GHz WLAN	0.083	1.17		
	Left side	0.788	5.2GHz WLAN	0.035	0.82		
	Right side	0.063			0.06		
	Top side		5.8GHz WLAN	0.007	0.01		
	Bottom side	0.737			0.74		



WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)				
GSM	GSM850	Front	0.623	0.068	0.109	0.69	0.73		
		Back	0.497	0.384	0.109	0.88	0.61		
		Left side	0.366	0.257	0.109	0.62	0.48		
		Right side	0.367			0.37	0.37		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.056			0.06	0.06		
	GSM1900	Front	0.602	0.068	0.109	0.67	0.71		
		Back	0.771	0.384	0.109	1.16	0.88		
		Left side	0.321	0.257	0.109	0.58	0.43		
		Right side	0.070			0.07	0.07		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.222			0.22	0.22		
WCDMA	Band V	Front	0.605	0.068	0.109	0.67	0.71		
		Back	0.671	0.384	0.109	1.06	0.78		
		Left side	0.403	0.257	0.109	0.66	0.51		
		Right side	0.453			0.45	0.45		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.103			0.10	0.10		
	Band IV	Front	0.404	0.068	0.109	0.47	0.51		
		Back	0.585	0.384	0.109	0.97	0.69		
		Left side	0.220	0.257	0.109	0.48	0.33		
		Right side	0.070			0.07	0.07		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.073			0.07	0.07		
	Band II	Front	0.447	0.068	0.109	0.52	0.56		
		Back	0.717	0.384	0.109	1.10	0.83		
		Left side	0.287	0.257	0.109	0.54	0.40		
		Right side	0.049			0.05	0.05		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.178			0.18	0.18		



WWAN Band	Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No	
		WWAN	2.4GHz WLAN	2.4GHz Bluetooth					
		10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)					
LTE	Band 12	Front	0.218	0.068	0.109	0.29	0.33		
		Back	0.225	0.384	0.109	0.61	0.33		
		Left side	0.154	0.257	0.109	0.41	0.26		
		Right side	0.127			0.13	0.13		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.021			0.02	0.02		
	Band 17	Front	0.225	0.068	0.109	0.29	0.33		
		Back	0.237	0.384	0.109	0.62	0.35		
		Left side	0.173	0.257	0.109	0.43	0.28		
		Right side	0.148			0.15	0.15		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.026			0.03	0.03		
	Band 13	Front	0.580	0.068	0.109	0.65	0.69		
		Back	0.592	0.384	0.109	0.98	0.70		
		Left side	0.524	0.257	0.109	0.78	0.63		
		Right side	0.444			0.44	0.44		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.052			0.05	0.05		
	Band 5	Front	0.611	0.068	0.109	0.68	0.72		
		Back	0.574	0.384	0.109	0.96	0.68		
		Left side	0.451	0.257	0.109	0.71	0.56		
		Right side	0.445			0.45	0.45		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.081			0.08	0.08		
	Band 4	Front	0.462	0.068	0.109	0.53	0.57		
		Back	0.646	0.384	0.109	1.03	0.76		
		Left side	0.228	0.257	0.109	0.49	0.34		
		Right side	0.065			0.07	0.07		
		Top side		0.026	0.109	0.03	0.11		
		Bottom side	0.086			0.09	0.09		
Band 2	Front	0.624	0.068	0.109	0.69	0.73			
	Back	0.765	0.384	0.109	1.15	0.87			
	Left side	0.340	0.257	0.109	0.60	0.45			
	Right side	0.093			0.09	0.09			
	Top side		0.026	0.109	0.03	0.11			
	Bottom side	0.197			0.20	0.20			
Band 7	Front	0.523	0.068	0.109	0.59	0.63			
	Back	0.577	0.384	0.109	0.96	0.69			
	Left side	0.410	0.257	0.109	0.67	0.52			
	Right side	0.036			0.04	0.04			
	Top side		0.026	0.109	0.03	0.11			
	Bottom side	0.350			0.35	0.35			

WWAN Band		Exposure Position	1	2		1+2 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Front	0.623	5.2GHz WLAN	0.048	0.67		
		Back	0.497	5.8GHz WLAN	0.024	0.52		
		Left side	0.366	5.2GHz WLAN	0.010	0.38		
		Right side	0.367			0.37		
		Top side		5.8GHz WLAN	0.002	0.01		
		Bottom side	0.056			0.06		
	GSM1900	Front	0.512	5.2GHz WLAN	0.048	0.56		
		Back	0.771	5.8GHz WLAN	0.024	0.80		
		Left side	0.321	5.2GHz WLAN	0.010	0.33		
		Right side	0.070			0.07		
		Top side		5.8GHz WLAN	0.002	0.01		
		Bottom side	0.222			0.22		
WCDMA	Band V	Front	0.605	5.2GHz WLAN	0.048	0.65		
		Back	0.671	5.8GHz WLAN	0.024	0.70		
		Left side	0.403	5.2GHz WLAN	0.010	0.41		
		Right side	0.453			0.45		
		Top side		5.8GHz WLAN	0.002	0.01		
		Bottom side	0.103			0.10		
	Band IV	Front	0.404	5.2GHz WLAN	0.048	0.45		
		Back	0.585	5.8GHz WLAN	0.024	0.61		
		Left side	0.220	5.2GHz WLAN	0.010	0.23		
		Right side	0.070			0.07		
		Top side		5.8GHz WLAN	0.002	0.01		
		Bottom side	0.073			0.07		
	Band II	Front	0.447	5.2GHz WLAN	0.048	0.50		
		Back	0.717	5.8GHz WLAN	0.024	0.74		
		Left side	0.287	5.2GHz WLAN	0.010	0.30		
		Right side	0.049			0.05		
		Top side		5.8GHz WLAN	0.002	0.01		
		Bottom side	0.178			0.18		



WWAN Band	Exposure Position	1	2		1+2 Summed 10g SAR (W/kg)	SPLSR	Case No
		WWAN	5GHz WLAN				
		10g SAR (W/kg)	Band	10g SAR (W/kg)			
LTE	Band 12	Front	0.218	5.2GHz WLAN	0.048	0.27	
		Back	0.225	5.8GHz WLAN	0.024	0.25	
		Left side	0.154	5.2GHz WLAN	0.010	0.16	
		Right side	0.127			0.13	
		Top side		5.8GHz WLAN	0.002	0.01	
		Bottom side	0.021			0.02	
	Band 17	Front	0.225	5.2GHz WLAN	0.048	0.27	
		Back	0.237	5.8GHz WLAN	0.024	0.26	
		Left side	0.173	5.2GHz WLAN	0.010	0.18	
		Right side	0.148			0.15	
		Top side		5.8GHz WLAN	0.002	0.01	
		Bottom side	0.026			0.03	
	Band 13	Front	0.580	5.2GHz WLAN	0.048	0.63	
		Back	0.592	5.8GHz WLAN	0.024	0.62	
		Left side	0.524	5.2GHz WLAN	0.010	0.53	
		Right side	0.444			0.44	
		Top side		5.8GHz WLAN	0.002	0.01	
		Bottom side	0.052			0.05	
	Band 5	Front	0.611	5.2GHz WLAN	0.048	0.66	
		Back	0.574	5.8GHz WLAN	0.024	0.60	
		Left side	0.451	5.2GHz WLAN	0.010	0.46	
		Right side	0.445			0.45	
		Top side		5.8GHz WLAN	0.002	0.01	
		Bottom side	0.081			0.08	
	Band 4	Front	0.462	5.2GHz WLAN	0.048	0.51	
		Back	0.646	5.8GHz WLAN	0.024	0.67	
		Left side	0.228	5.2GHz WLAN	0.010	0.24	
		Right side	0.065			0.07	
		Top side		5.8GHz WLAN	0.002	0.01	
		Bottom side	0.086			0.09	
Band 2	Front	0.624	5.2GHz WLAN	0.048	0.67		
	Back	0.765	5.8GHz WLAN	0.024	0.79		
	Left side	0.340	5.2GHz WLAN	0.010	0.35		
	Right side	0.093			0.09		
	Top side		5.8GHz WLAN	0.002	0.01		
	Bottom side	0.197			0.20		
Band 7	Front	0.523	5.2GHz WLAN	0.048	0.57		
	Back	0.577	5.8GHz WLAN	0.024	0.60		
	Left side	0.410	5.2GHz WLAN	0.010	0.42		
	Right side	0.036			0.04		
	Top side		5.8GHz WLAN	0.002	0.01		
	Bottom side	0.350			0.35		



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
		WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
		1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)				
GSM	GSM850	Front	0.711	0.074	0.182	0.79	0.89	
		Back	0.586	0.343	0.182	0.93	0.77	
	GSM1900	Front	0.458	0.074	0.182	0.53	0.64	
		Back	0.738	0.343	0.182	1.08	0.92	
WCDMA	Band V	Front	0.722	0.074	0.182	0.80	0.90	
		Back	0.824	0.343	0.182	1.17	1.01	
	Band IV	Front	0.405	0.074	0.182	0.48	0.59	
		Back	0.569	0.343	0.182	0.91	0.75	
	Band II	Front	0.390	0.074	0.182	0.46	0.57	
		Back	0.673	0.343	0.182	1.02	0.86	
LTE	Band 12	Front	0.226	0.074	0.182	0.30	0.41	
		Back	0.263	0.343	0.182	0.61	0.45	
	Band 17	Front	0.251	0.074	0.182	0.33	0.43	
		Back	0.284	0.343	0.182	0.63	0.47	
	Band 13	Front	0.669	0.074	0.182	0.74	0.85	
		Back	0.710	0.343	0.182	1.05	0.89	
	Band 5	Front	0.734	0.074	0.182	0.81	0.92	
		Back	0.695	0.343	0.182	1.04	0.88	
	Band 4	Front	0.425	0.074	0.182	0.50	0.61	
		Back	0.566	0.343	0.182	0.91	0.75	
	Band 2	Front	0.525	0.074	0.182	0.60	0.71	
		Back	0.774	0.343	0.182	1.12	0.96	
	Band 7	Front	0.564	0.074	0.182	0.64	0.75	
		Back	0.580	0.343	0.182	0.92	0.76	



WWAN Band		Exposure Position	1	2		1+2 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			SAR (W/kg)	Band	1g SAR (W/kg)			
GSM	GSM850	Front	0.711	5.2GHz WLAN	0.083	0.79		
		Back	0.586	5.5GHz WLAN	0.062	0.65		
	GSM1900	Front	0.458	5.2GHz WLAN	0.083	0.54		
		Back	0.738	5.5GHz WLAN	0.062	0.80		
WCDMA	Band V	Front	0.722	5.2GHz WLAN	0.083	0.81		
		Back	0.824	5.5GHz WLAN	0.062	0.89		
	Band IV	Front	0.405	5.2GHz WLAN	0.083	0.49		
		Back	0.569	5.5GHz WLAN	0.062	0.63		
	Band II	Front	0.390	5.2GHz WLAN	0.083	0.47		
		Back	0.673	5.5GHz WLAN	0.062	0.74		
LTE	Band 12	Front	0.226	5.2GHz WLAN	0.083	0.31		
		Back	0.263	5.5GHz WLAN	0.062	0.33		
	Band 17	Front	0.251	5.2GHz WLAN	0.083	0.33		
		Back	0.284	5.5GHz WLAN	0.062	0.35		
	Band 13	Front	0.669	5.2GHz WLAN	0.083	0.75		
		Back	0.710	5.5GHz WLAN	0.062	0.77		
	Band 5	Front	0.734	5.2GHz WLAN	0.083	0.82		
		Back	0.695	5.5GHz WLAN	0.062	0.76		
	Band 4	Front	0.425	5.2GHz WLAN	0.083	0.51		
		Back	0.566	5.5GHz WLAN	0.062	0.63		
	Band 2	Front	0.525	5.2GHz WLAN	0.083	0.61		
		Back	0.774	5.5GHz WLAN	0.062	0.84		
	Band 7	Front	0.564	5.2GHz WLAN	0.083	0.65		
		Back	0.580	5.5GHz WLAN	0.062	0.64		



WWAN Band		Exposure Position	1	2	3	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	2.4GHz Bluetooth				
			10g SAR (W/kg)	10g SAR (W/kg)	Estimated 10g SAR (W/kg)				
GSM	GSM850	Front	0.544	0.038	0.073	0.58	0.62		
		Back	0.450	0.167	0.073	0.62	0.52		
	GSM1900	Front	0.289	0.038	0.073	0.33	0.36		
		Back	0.456	0.167	0.073	0.62	0.53		
WCDMA	Band V	Front	0.548	0.038	0.073	0.59	0.62		
		Back	0.624	0.167	0.073	0.79	0.70		
	Band IV	Front	0.274	0.038	0.073	0.31	0.35		
		Back	0.378	0.167	0.073	0.55	0.45		
	Band II	Front	0.251	0.038	0.073	0.29	0.32		
		Back	0.410	0.167	0.073	0.58	0.48		
LTE	Band 12	Front	0.176	0.038	0.073	0.21	0.25		
		Back	0.203	0.167	0.073	0.37	0.28		
	Band 17	Front	0.195	0.038	0.073	0.23	0.27		
		Back	0.207	0.167	0.073	0.37	0.28		
	Band 13	Front	0.512	0.038	0.073	0.55	0.59		
		Back	0.549	0.167	0.073	0.72	0.62		
	Band 5	Front	0.568	0.038	0.073	0.61	0.64		
		Back	0.530	0.167	0.073	0.70	0.60		
	Band 4	Front	0.284	0.038	0.073	0.32	0.36		
		Back	0.379	0.167	0.073	0.55	0.45		
	Band 2	Front	0.326	0.038	0.073	0.36	0.40		
		Back	0.482	0.167	0.073	0.65	0.56		
	Band 7	Front	0.322	0.038	0.073	0.36	0.40		
		Back	0.323	0.167	0.073	0.49	0.40		




WWAN Band		Exposure Position	1	2		1+2 Summed 10g SAR (W/kg)	SPLSR	Case No
			WWAN	5GHz WLAN				
			10g SAR (W/kg)	Band	10g SAR (W/kg)			
GSM	GSM850	Front	0.544	5.2GHz WLAN	0.029	0.57		
		Back	0.450	5.5GHz WLAN	0.020	0.47		
	GSM1900	Front	0.289	5.2GHz WLAN	0.029	0.32		
		Back	0.456	5.5GHz WLAN	0.020	0.48		
WCDMA	Band V	Front	0.548	5.2GHz WLAN	0.029	0.58		
		Back	0.624	5.5GHz WLAN	0.020	0.64		
	Band IV	Front	0.274	5.2GHz WLAN	0.029	0.30		
		Back	0.378	5.5GHz WLAN	0.020	0.40		
	Band II	Front	0.251	5.2GHz WLAN	0.029	0.28		
		Back	0.410	5.5GHz WLAN	0.020	0.43		
LTE	Band 12	Front	0.176	5.2GHz WLAN	0.029	0.21		
		Back	0.203	5.5GHz WLAN	0.020	0.22		
	Band 17	Front	0.195	5.2GHz WLAN	0.029	0.22		
		Back	0.207	5.5GHz WLAN	0.020	0.23		
	Band 13	Front	0.512	5.2GHz WLAN	0.029	0.54		
		Back	0.549	5.5GHz WLAN	0.020	0.57		
	Band 5	Front	0.568	5.2GHz WLAN	0.029	0.60		
		Back	0.530	5.5GHz WLAN	0.020	0.55		
	Band 4	Front	0.284	5.2GHz WLAN	0.029	0.31		
		Back	0.379	5.5GHz WLAN	0.020	0.40		
	Band 2	Front	0.326	5.2GHz WLAN	0.029	0.36		
		Back	0.482	5.5GHz WLAN	0.020	0.50		
	Band 7	Front	0.322	5.2GHz WLAN	0.029	0.35		
		Back	0.323	5.5GHz WLAN	0.020	0.34		

15.4 SPLSR Evaluation and Analysis


General Note:

- SPLSR = $(SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary


Case 1	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM1900				X	Y	Z				
	2.4GHz WLAN	Back	1.183	1cm	-0.003	-0.062	-0.204	112.6	2.05	0.03	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

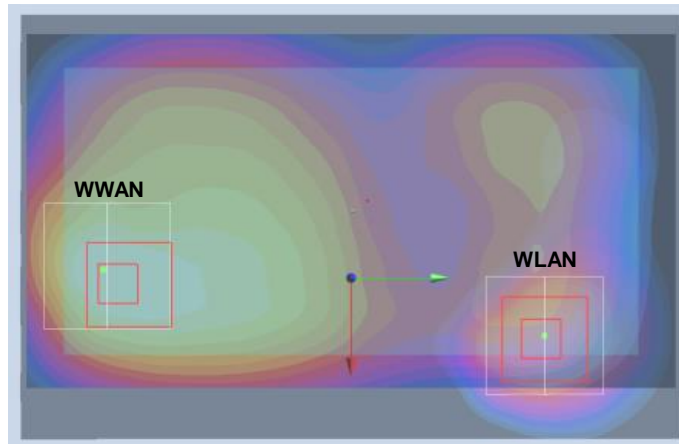


Case 2	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA V				X	Y	Z				
	2.4GHz WLAN	Back	0.877	1cm	-0.019	-0.0145	-0.205	72.0	1.74	0.03	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

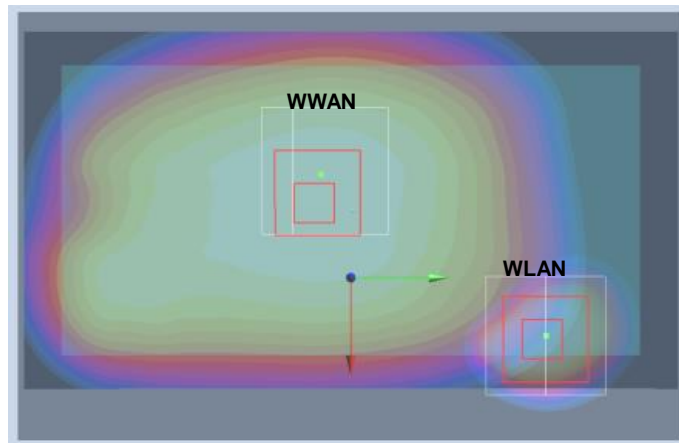


Case 3	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA IV				X	Y	Z				
	2.4GHz WLAN	Back	0.945	1cm	0.00503	-0.0525	-0.204	102.1	1.81	0.02	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

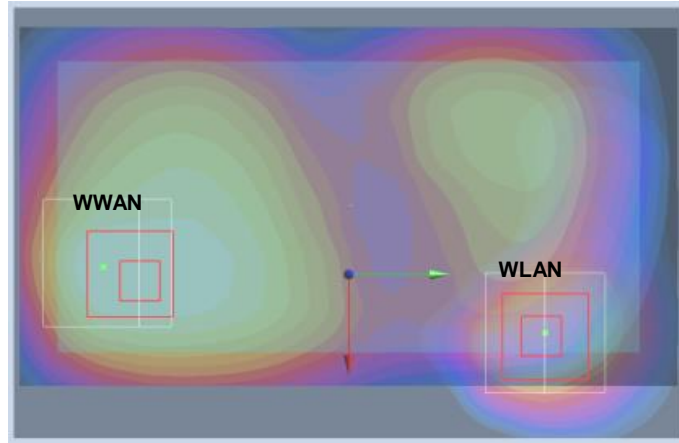


Case 4	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	WCDMA II				X	Y	Z				
	2.4GHz WLAN	Back	1.186	1cm	-0.00295	-0.062	-0.204	112.6	2.05	0.03	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

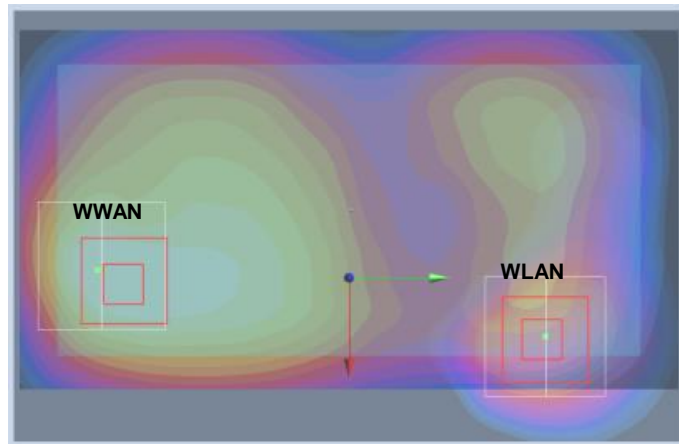


Case 5	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 13				X	Y	Z				
	2.4GHz WLAN	Back	0.76	1cm	-0.00894	-0.019	-0.205	72.2	1.63	0.03	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

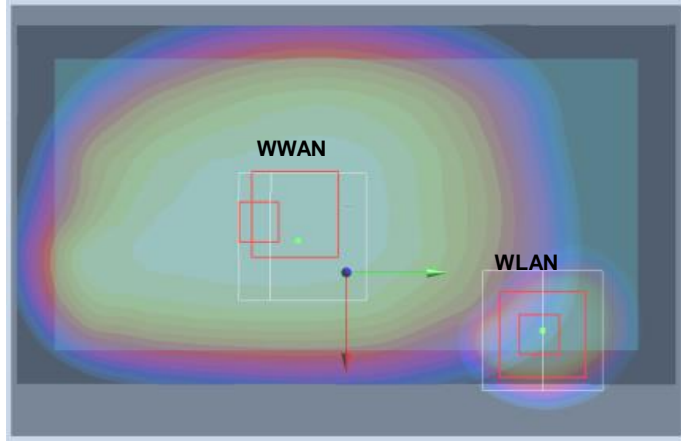


Case 6	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				X	Y	Z				
	2.4GHz WLAN	Back	0.747	1cm	-0.0204	0.00403	-0.205	57.2	1.61	0.04	Not required
			0.865	1cm	0.0146	0.0492	-0.204				

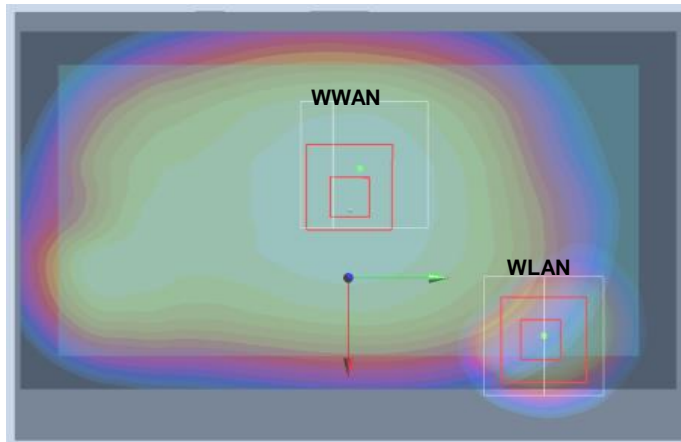


Case 7	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 4				X	Y	Z				
	2.4GHz WLAN	Back	0.865	1cm	0.0146	0.0492	-0.204	110.7	1.88	0.02	Not required

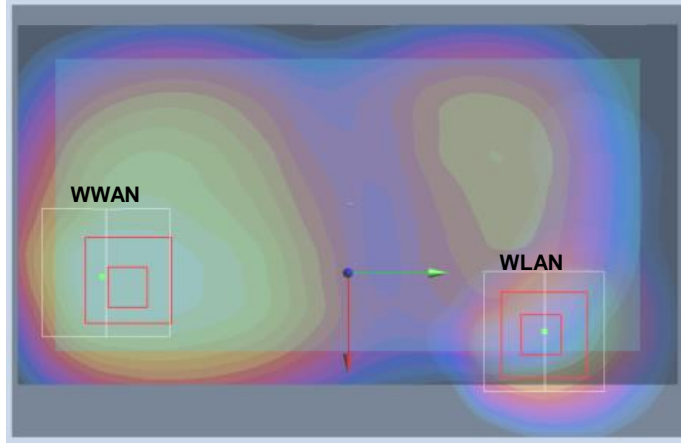

Case 8	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 2				X	Y	Z				
	2.4GHz WLAN	Back	0.865	1cm	0.0146	0.0492	-0.204	103.7	2.05	0.03	Not required

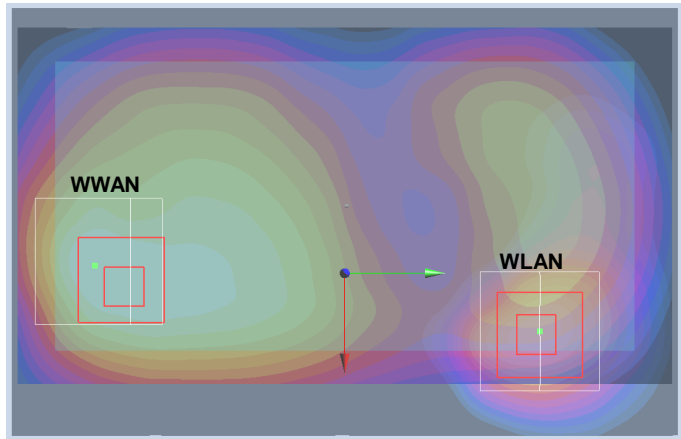

Case 9	Band	Position	SAR (W/kg)	Gap (cm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band7				X	Y	Z				
	2.4GHz WLAN	Back	0.865	1cm	0.0146	0.0492	-0.204	100.4	1.95	0.03	Not required

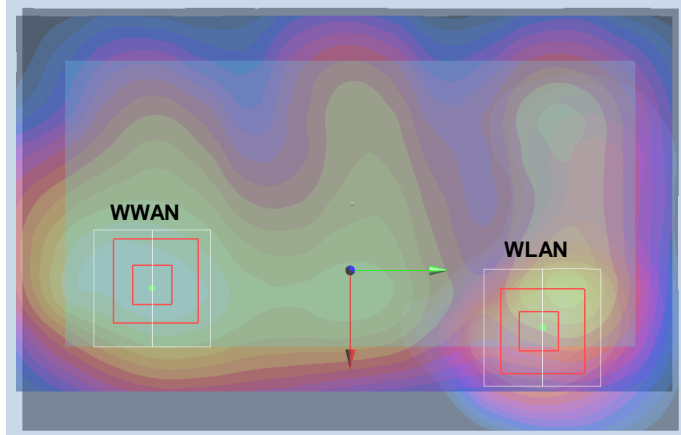

Test Engineer : Frank Wu, Tommy Chen, Steven Chang, Domo Hsiao, Jerry Hu and Vic Yang
 San Lin and Lawrence Chen

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v03, "3G SAR MEAUREMENT PROCEDURES", Oct 2014
- [9] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [10] FCC KDB 941225 D06 v02, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2014.
- [11] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [12] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.



Appendix C. DAS Y Calibration Certificate

The DAS Y calibration certificates are shown as follows.