



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc
EQUIPMENT : PDA Phone
BRAND NAME : Sony
TYPE NAME : PM-0780-BV
FCC ID : PY7-PM0780
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Dec. 03, 2014 and testing was completed on Jan. 10, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification subjective to this standard 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Output Power Measurement 15

 3.3 Power Spectral Density Measurement 16

 3.4 Conducted Band Edges and Spurious Emission Measurement 18

 3.5 Radiated Band Edges and Spurious Emission Measurement 28

 3.6 AC Conducted Emission Measurement 32

 3.7 Antenna Requirements 36

4 LIST OF MEASURING EQUIPMENT 37

5 UNCERTAINTY OF EVALUATION 39

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.25 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.80 dB at 3.446 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Sony Mobile Communications Inc
Nya Vattentorget, 22188 Lund, Sweden

1.2 Manufacturer

Sony Mobile Communications Inc
Nya Vattentorget, 22188 Lund, Sweden

1.3 Product Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is PDA Phone supporting, GSM / WCDMA / LTE, Wi-Fi 2.4GHz 802.11b/g/n, 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, ANT+, and NFC features, and below is details of information.

Product Feature	
Equipment	PDA Phone
Brand Name	Sony
Type Name	PM-0780-BV
FCC ID	PY7-PM0780
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I / II / V / VIII
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band I / II / III / V / VII / VIII / XX
LTE Rel. Version	Rel. 10
Wi-Fi Specification	802.11b/g/n HT20 802.11a/n HT20/HT40
Bluetooth Version	v3.0 + EDR / v4.0 - LE
NFC Specification	ISO14443A / ISO14443B / Felica / ISO15693
ANT+	ANT+
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 20.36 dBm (0.1086 W) 802.11g : 22.31 dBm (0.1702 W) 802.11n HT20 : 21.13 dBm (0.1297 W)
Antenna Type	PIFA Antenna type with gain 0.06 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI : 004402453275632	AP	26.1.A.0.79	YT910ZRWBX	RF conducted measurement
IMEI : 004402453275632			YT910ZRWBX	Radiated Spurious Emission
IMEI : 004402453306957			YT910ZRWBG	Conducted Emission

Accessory List	
AC Adapter	Model No. : EP800
	Type No. : CAA-0002016-US
	S/N : 3112W49108087 (For Conducted Emission) 3112W49107935 (For Radiated Spurious Emission)
Battery	Model No. : Bellis
Earphone	Model No. : MH410c
	Type No. : AG-1100
	S/N : 12431A1B0011582 (For Conducted Emission) 12431A1E00118A8 (For Radiated Spurious Emission)
USB Cable	Model No. : EC450
	Type No. : AI-0700
	S/N : 142412D8250297C (For Conducted Emission) 113912D0171324C (For Radiated Spurious Emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH07-HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	20.36	20.35	20.34	20.34

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	22.31	22.30	22.30	22.29	22.29	22.28	22.29	22.28

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	21.13	21.11	21.09	21.01	21.00	21.10	21.12	21.10



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1: GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

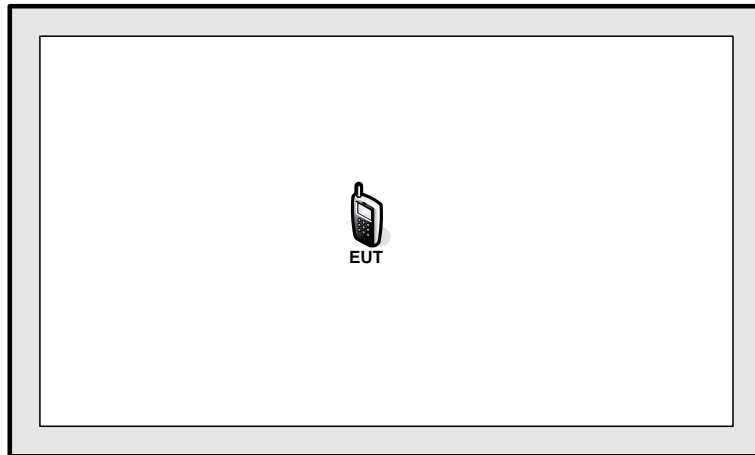

<AC Conducted Emission Mode>

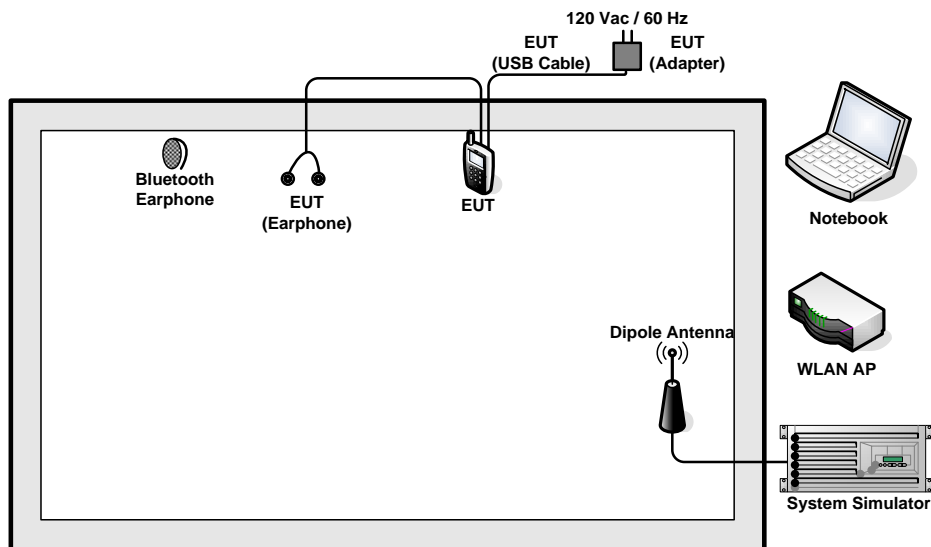



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

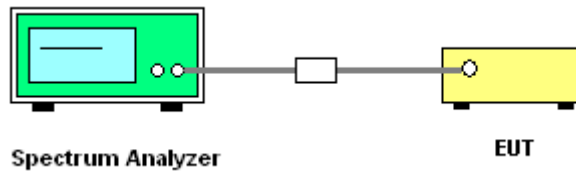



3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A of this test report.

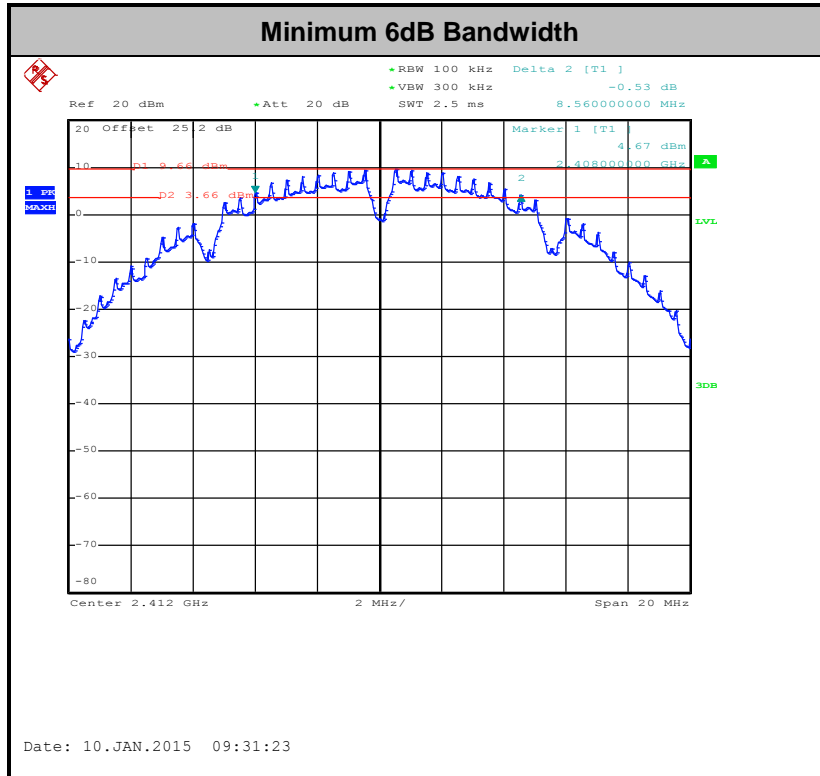

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

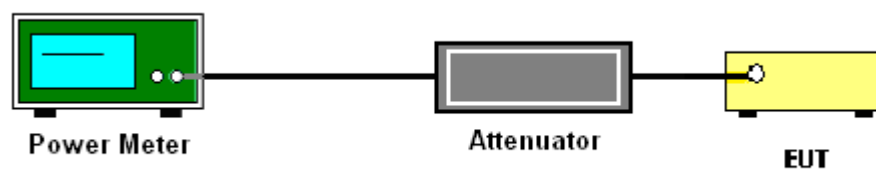

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

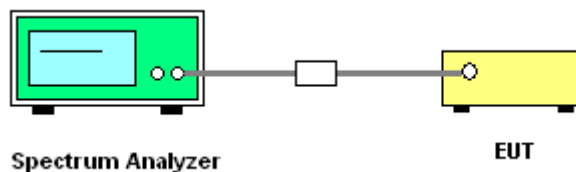



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

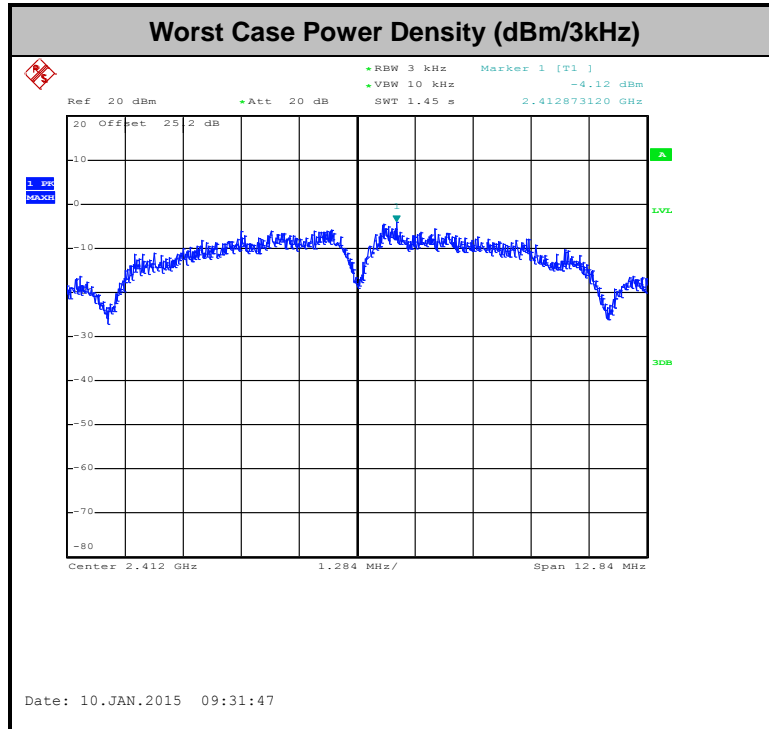

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup




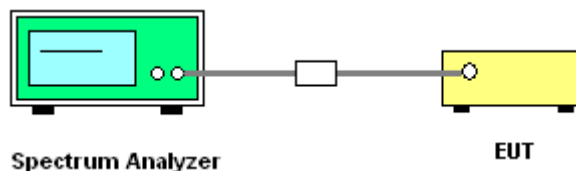




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo

WLAN 802.11b Channel 01

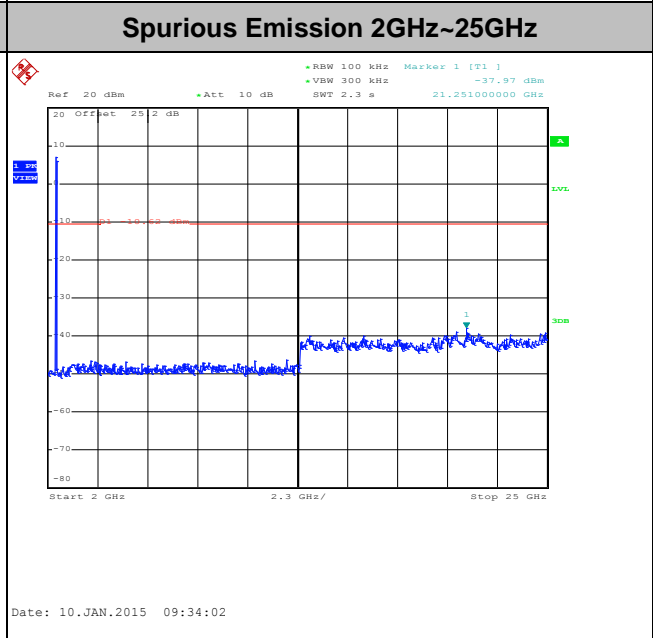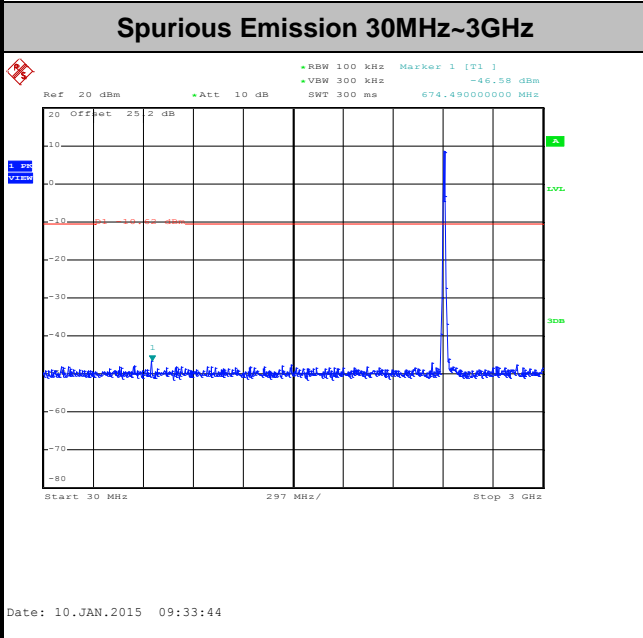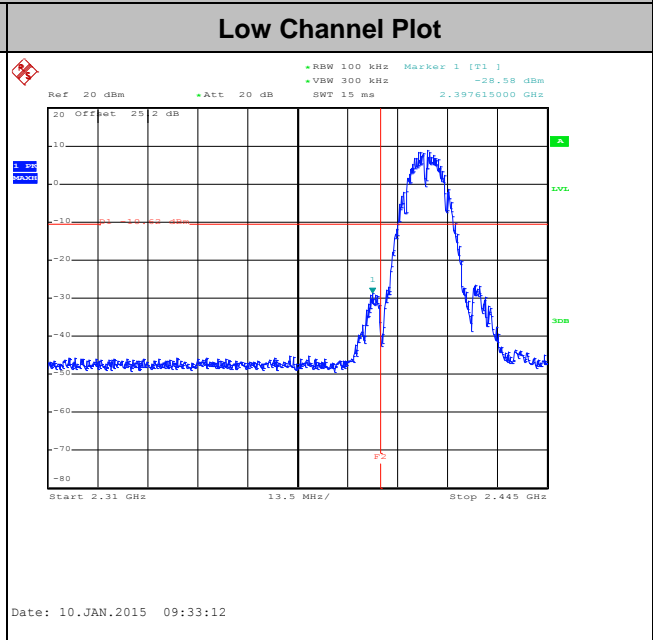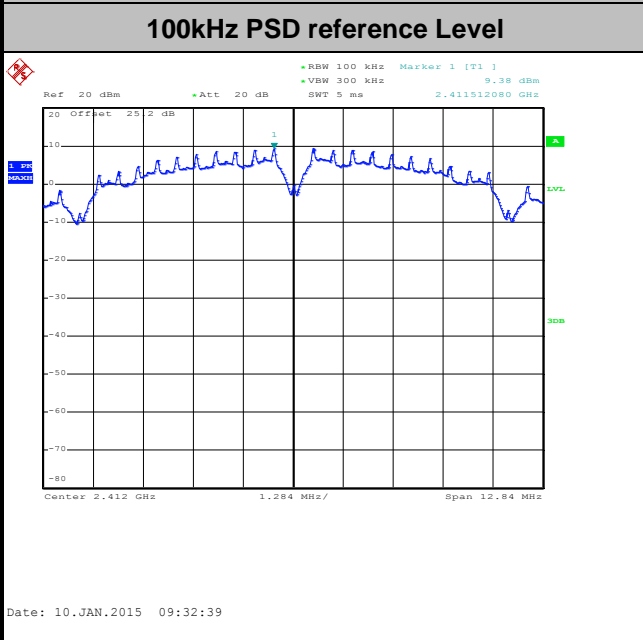




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid.	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo


WLAN 802.11b Channel 06

100kHz PSD reference Level

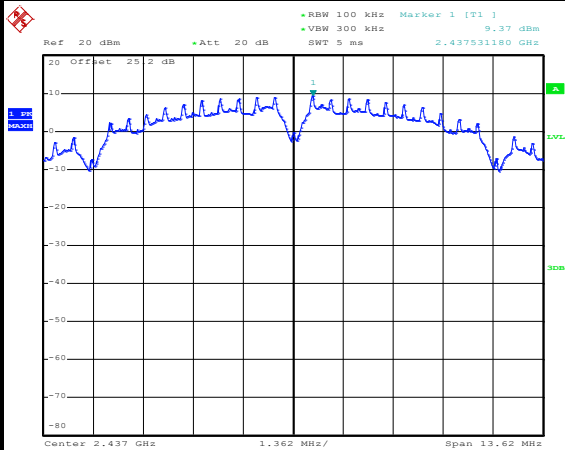


Date: 10.JAN.2015 09:27:03

Spurious Emission 30MHz~3GHz

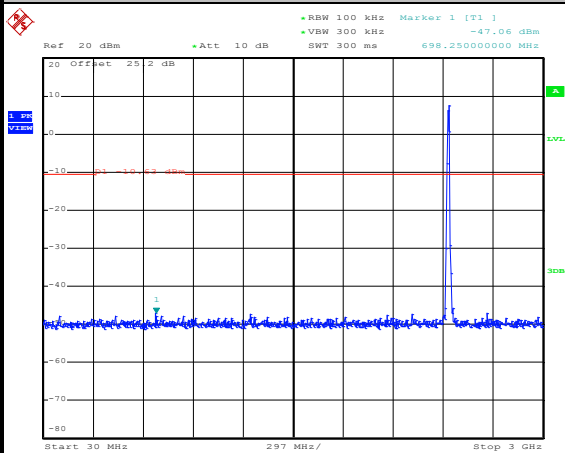

Date: 10.JAN.2015 09:28:27

Spurious Emission 2GHz~25GHz

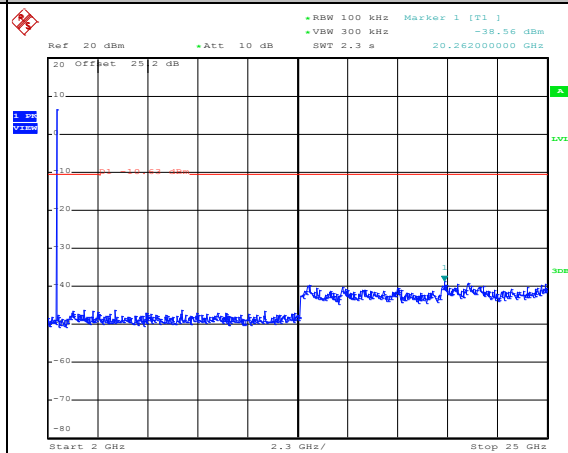


Date: 10.JAN.2015 09:28:45



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo


WLAN 802.11b Channel 11

100kHz PSD reference Level

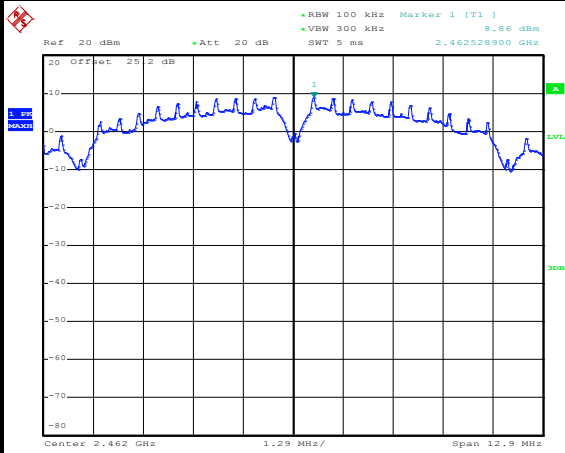


Date: 10.JAN.2015 09:36:59

High Channel Plot

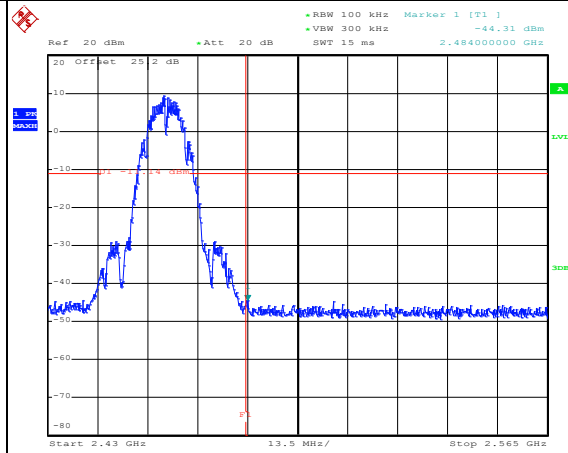


Date: 10.JAN.2015 09:37:17

Spurious Emission 30MHz~3GHz

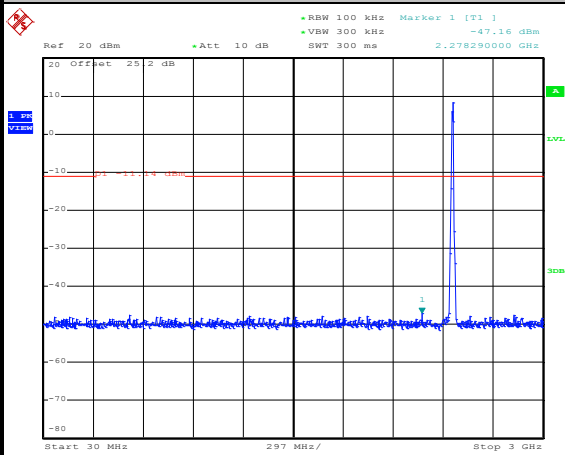

Date: 10.JAN.2015 09:37:52

Spurious Emission 2GHz~25GHz

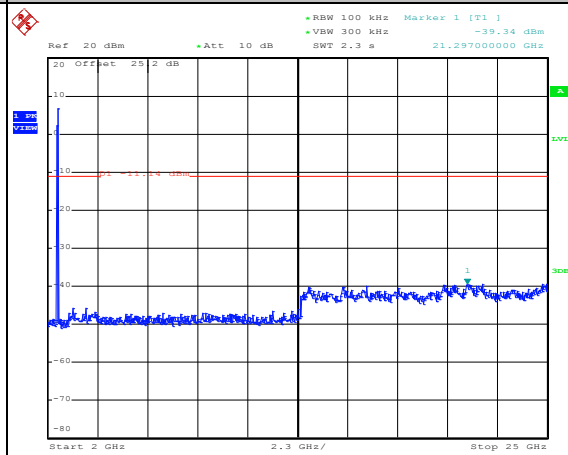


Date: 10.JAN.2015 09:38:11



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 01

100kHz PSD reference Level

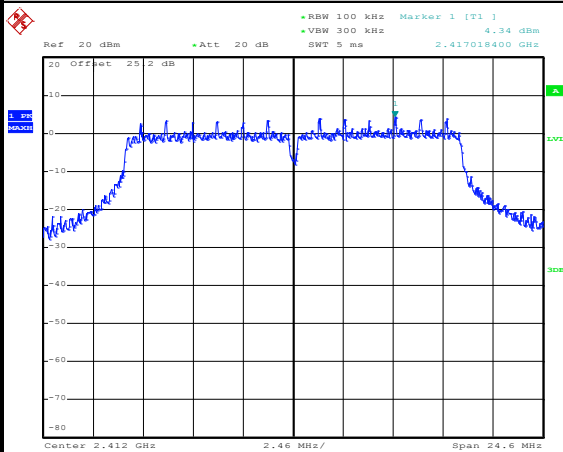


Date: 10.JAN.2015 09:54:39

Low Channel Plot

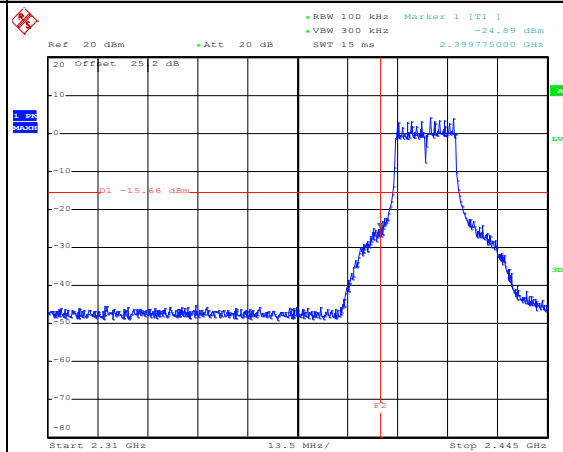


Date: 10.JAN.2015 09:54:56

Spurious Emission 30MHz~3GHz

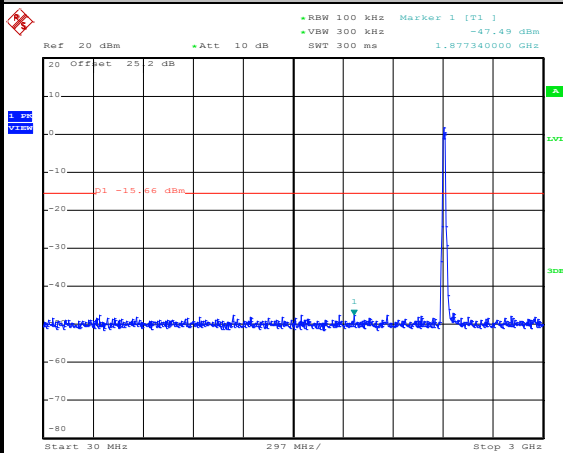

Date: 10.JAN.2015 09:56:21

Spurious Emission 2GHz~25GHz

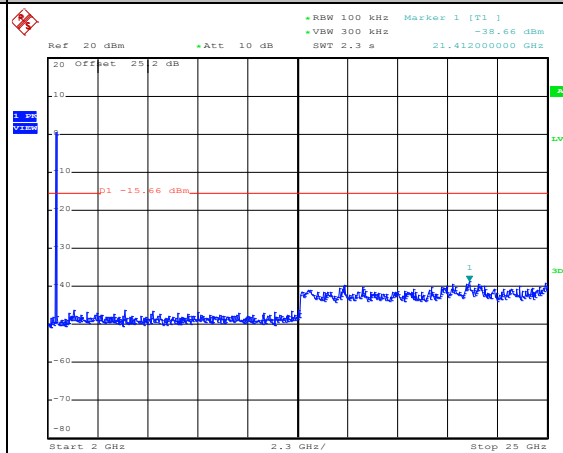


Date: 10.JAN.2015 09:56:39



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid.	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 06

100kHz PSD reference Level

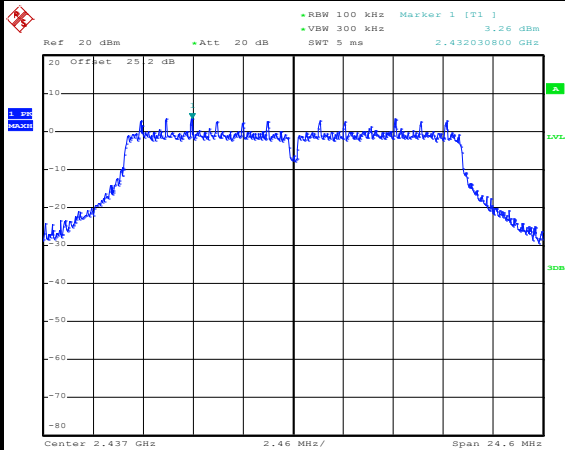


Date: 10.JAN.2015 09:51:10

Spurious Emission 30MHz~3GHz

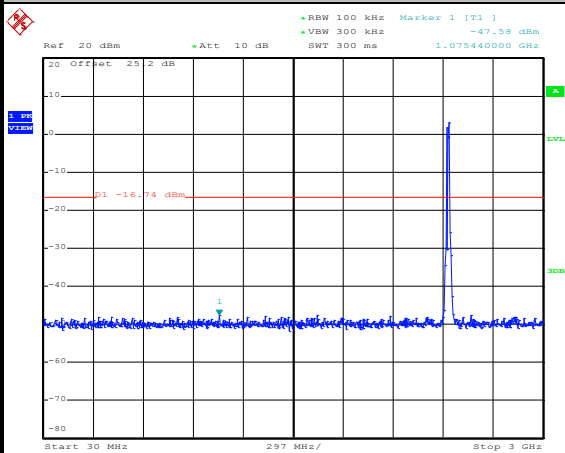

Date: 10.JAN.2015 09:51:35

Spurious Emission 2GHz~25GHz

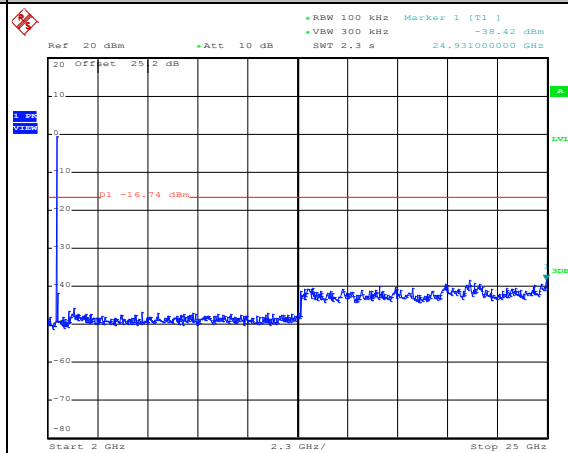


Date: 10.JAN.2015 09:51:53



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 11

100kHz PSD reference Level

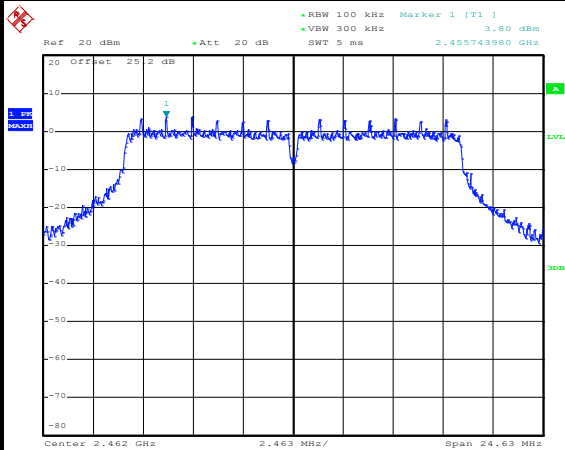


Date: 10.JAN.2015 09:42:49

High Channel Plot

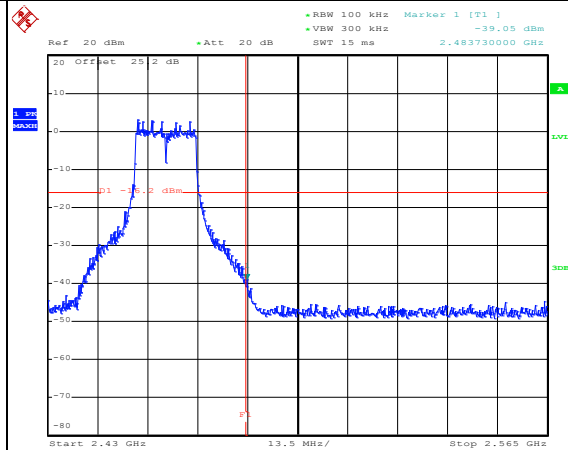


Date: 10.JAN.2015 09:43:24

Spurious Emission 30MHz~3GHz

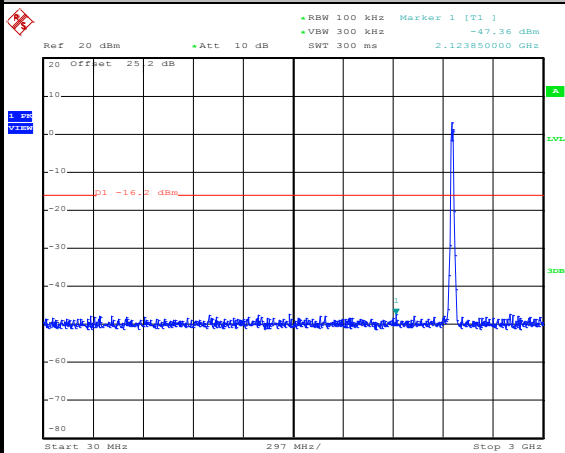

Date: 10.JAN.2015 09:48:07

Spurious Emission 2GHz~25GHz

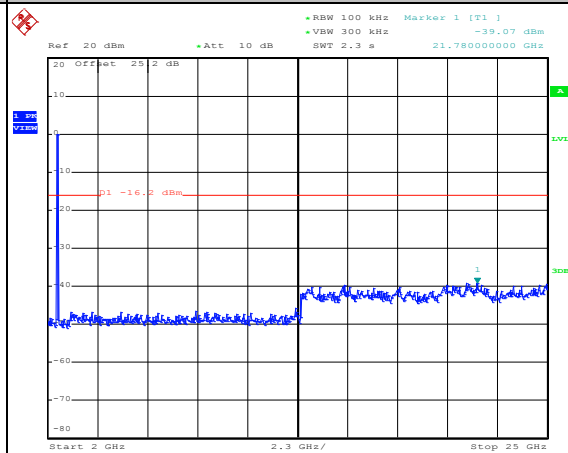


Date: 10.JAN.2015 09:48:25




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

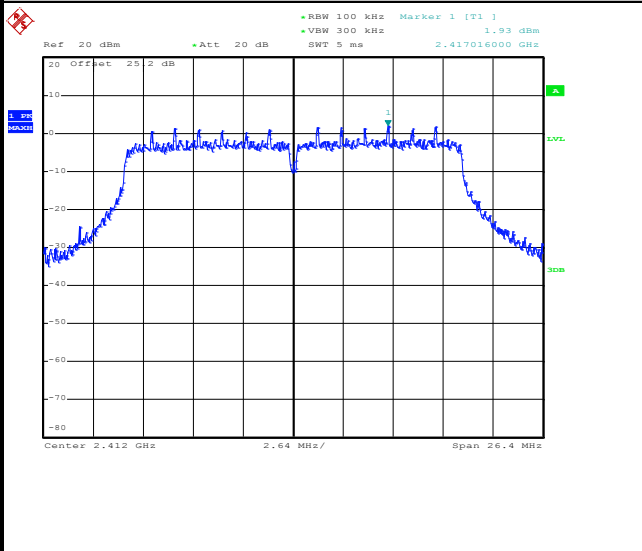


Low Channel Plot

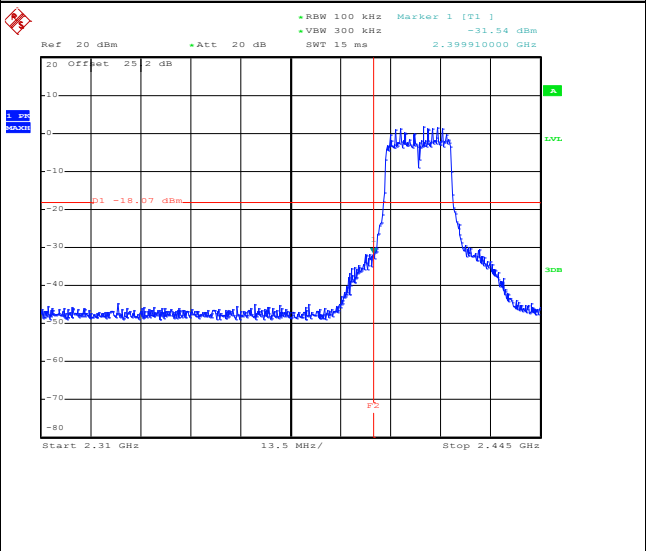

Spurious Emission 30MHz~3GHz

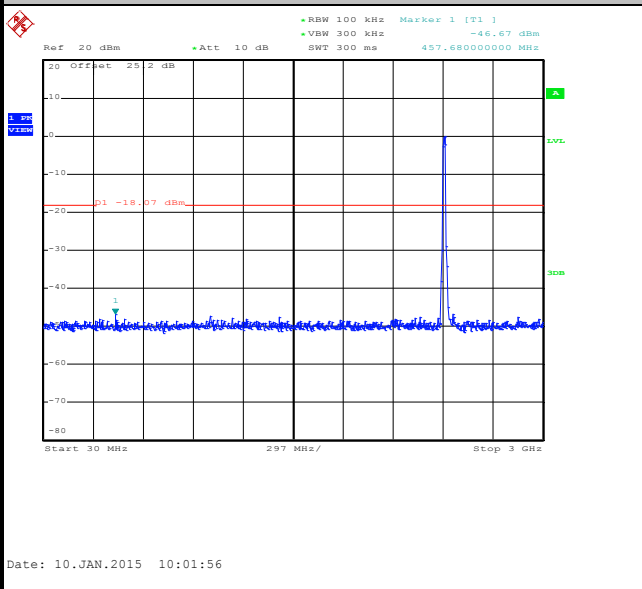

Spurious Emission 2GHz~25GHz

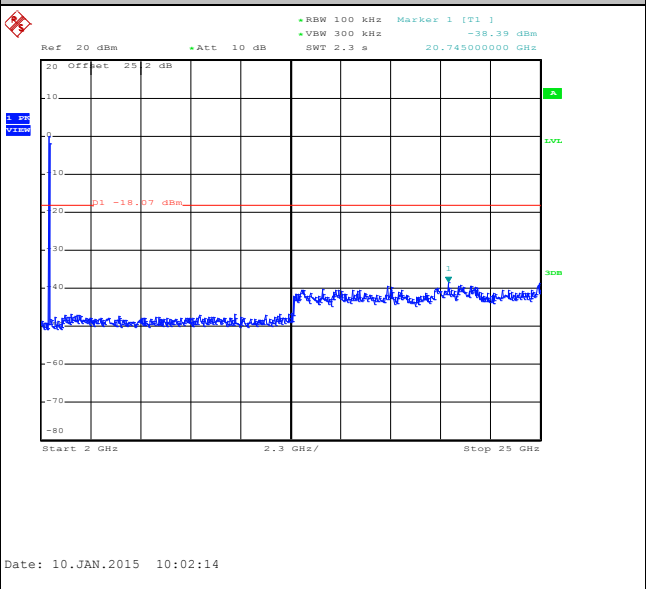





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid.	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

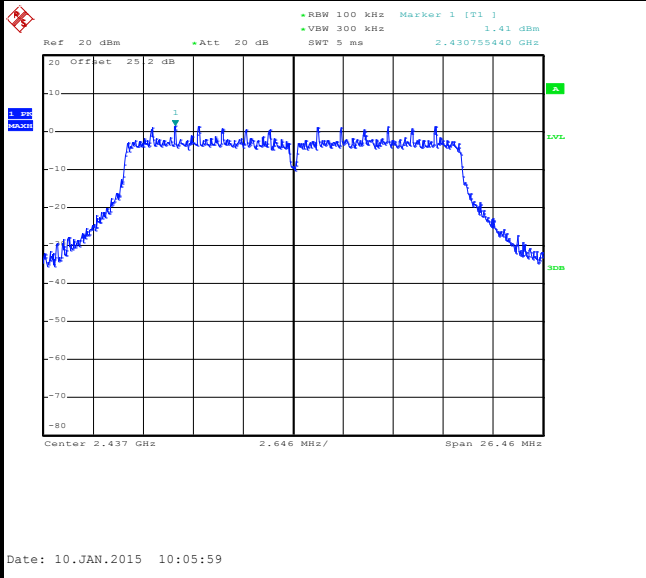

Spurious Emission 30MHz~3GHz

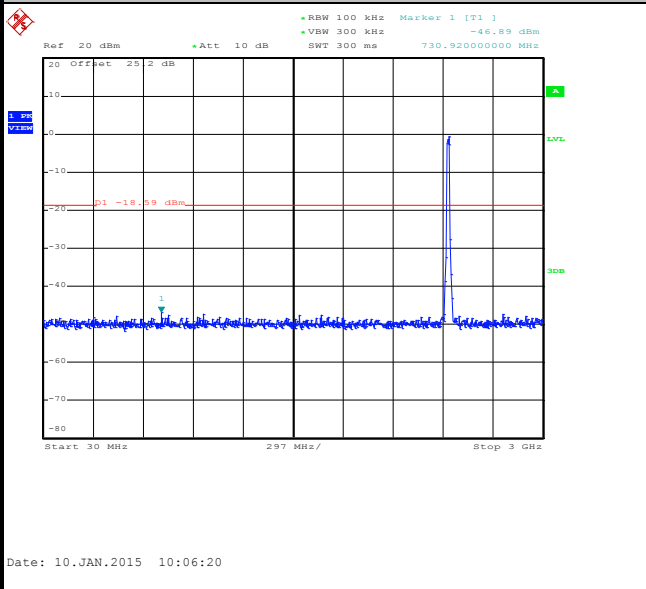

Spurious Emission 2GHz~25GHz

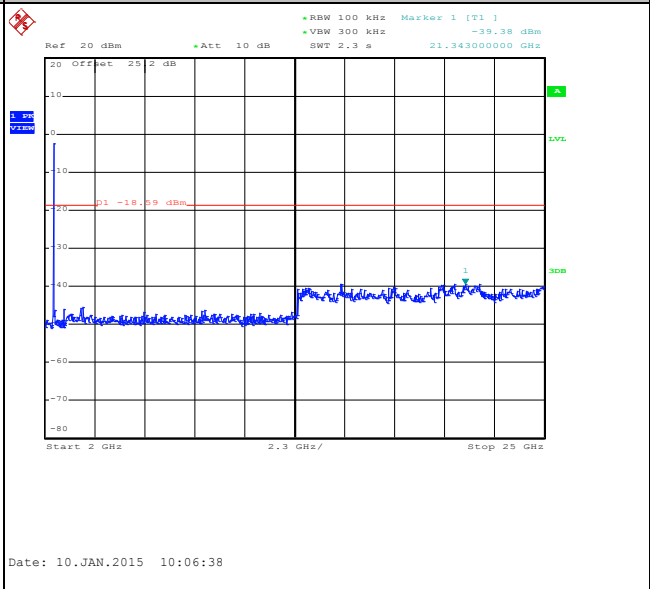




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

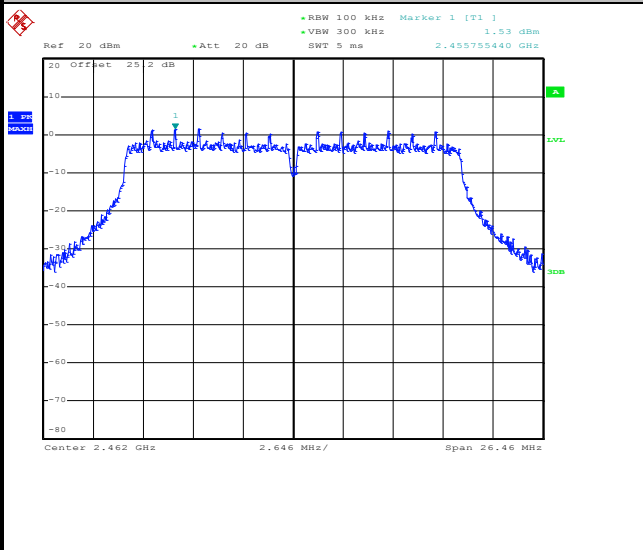


Date: 10.JAN.2015 10:09:40

High Channel Plot

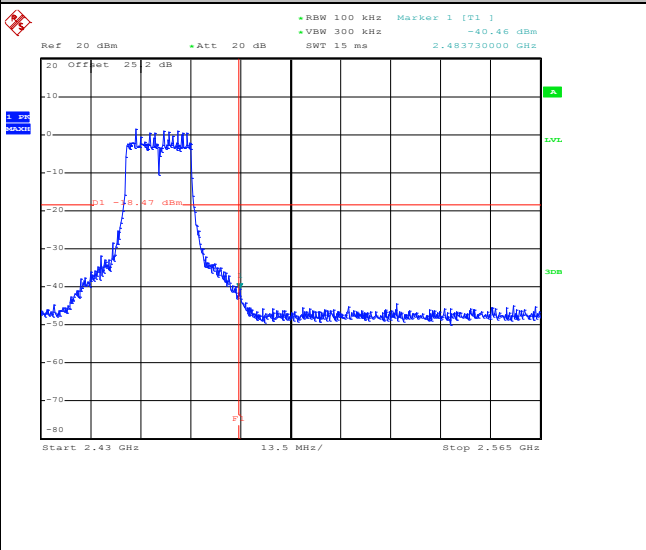


Date: 10.JAN.2015 10:09:59

Spurious Emission 30MHz~3GHz

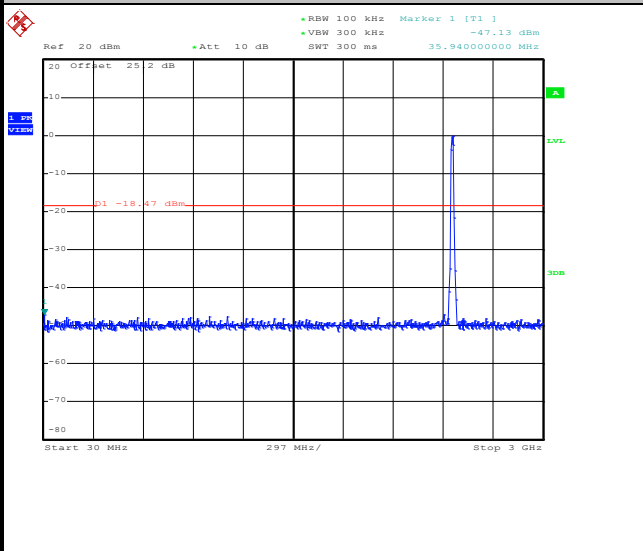

Date: 10.JAN.2015 10:10:26

Spurious Emission 2GHz~25GHz

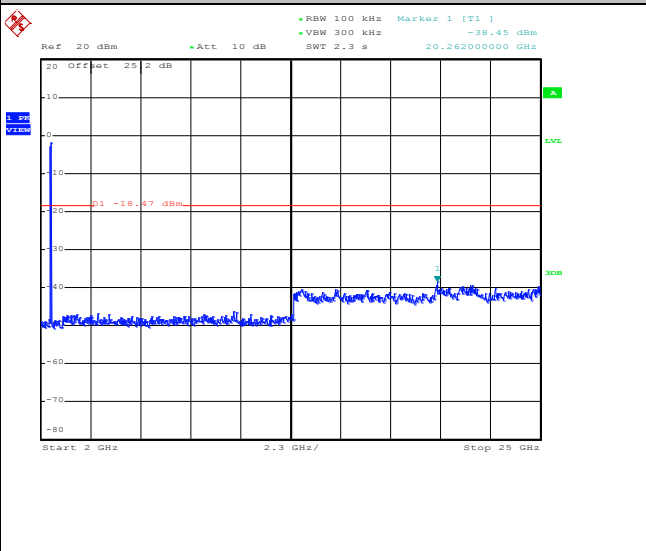

Date: 10.JAN.2015 10:10:44



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.


For average measurement:

 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle (%)	T(μs)	1/T(kHz)	VBW Setting
802.11b	97.63	8250	0.12	300Hz
802.11g	87.26	1370	0.73	1kHz
2.4GHz 802.11n HT20	86.49	1280	0.78	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

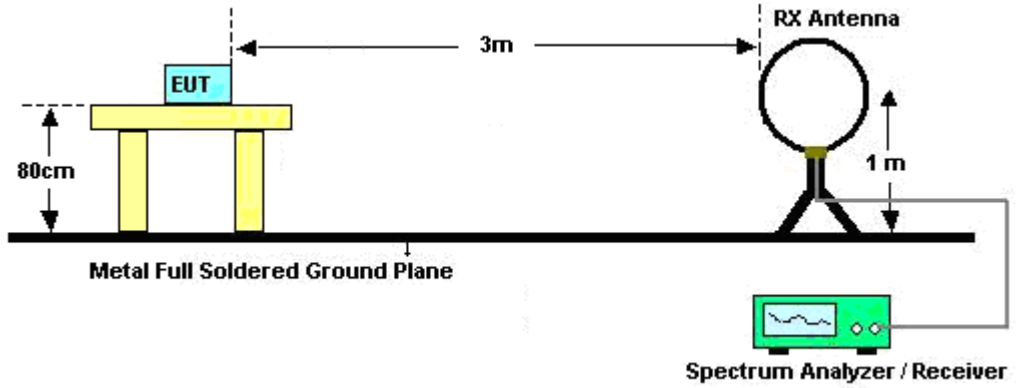

For radiated emissions from 30MHz to 1GHz

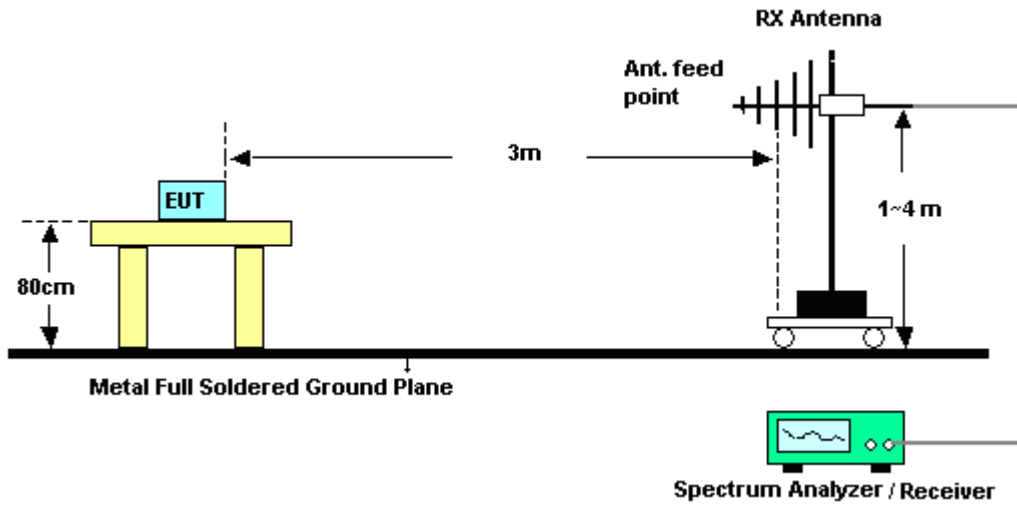

For radiated emissions above 1GHz

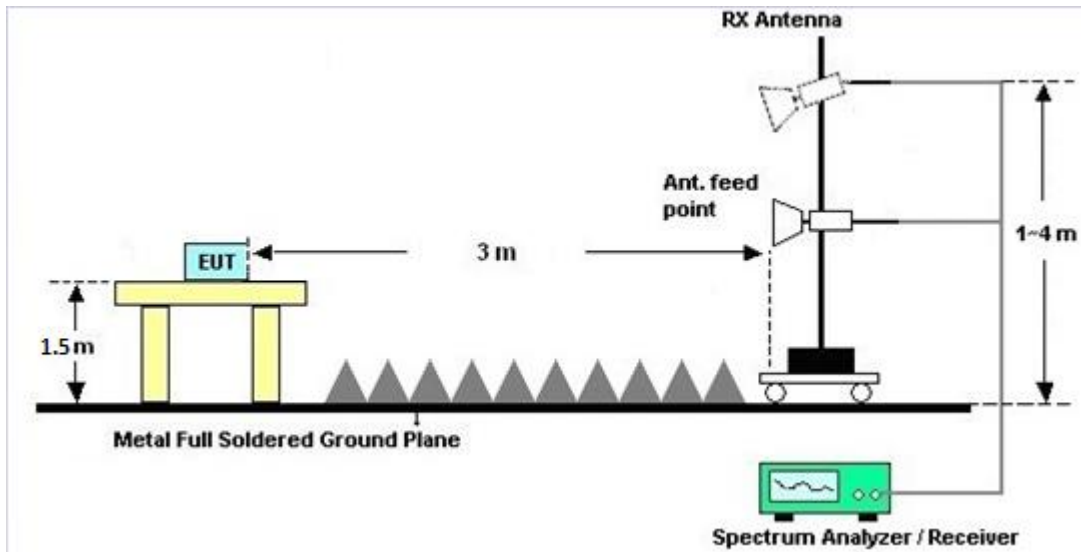

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

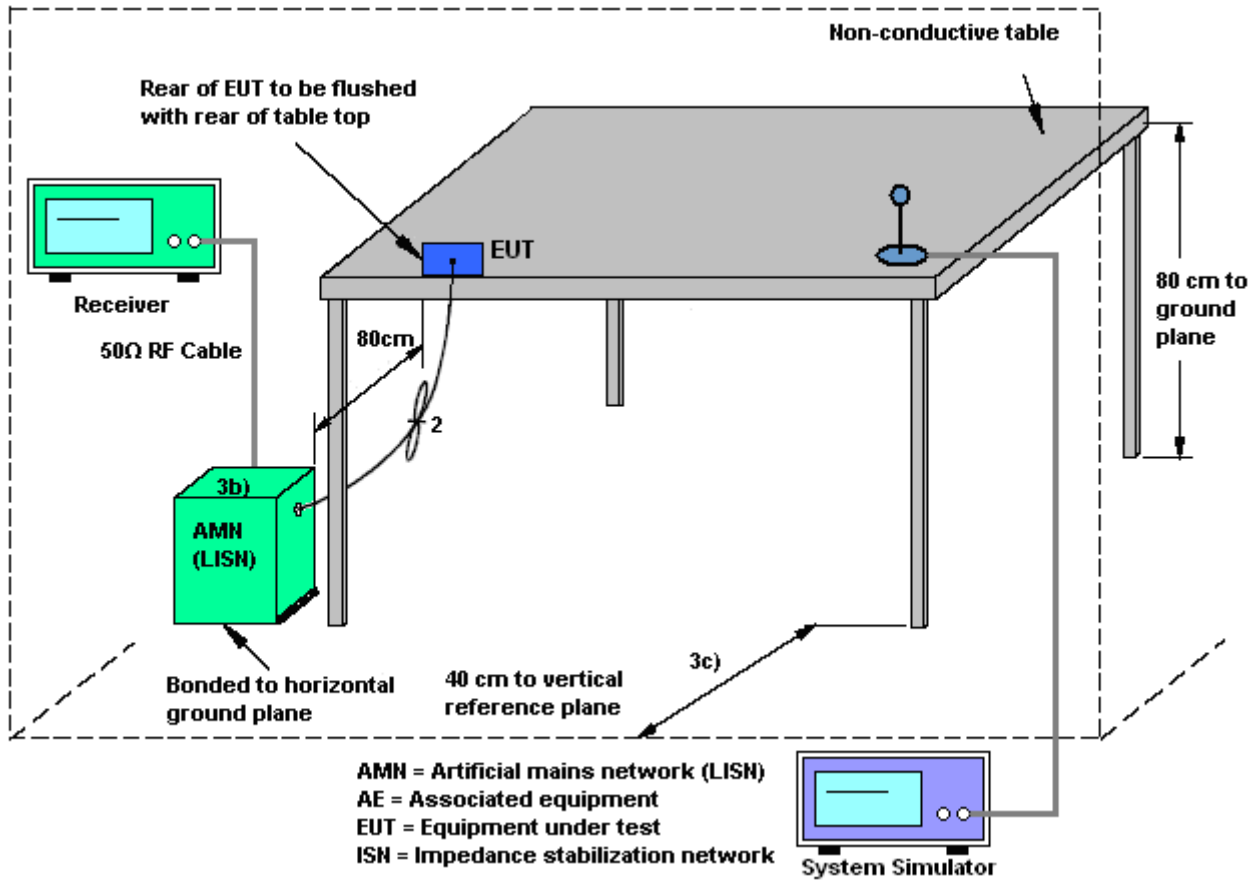



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

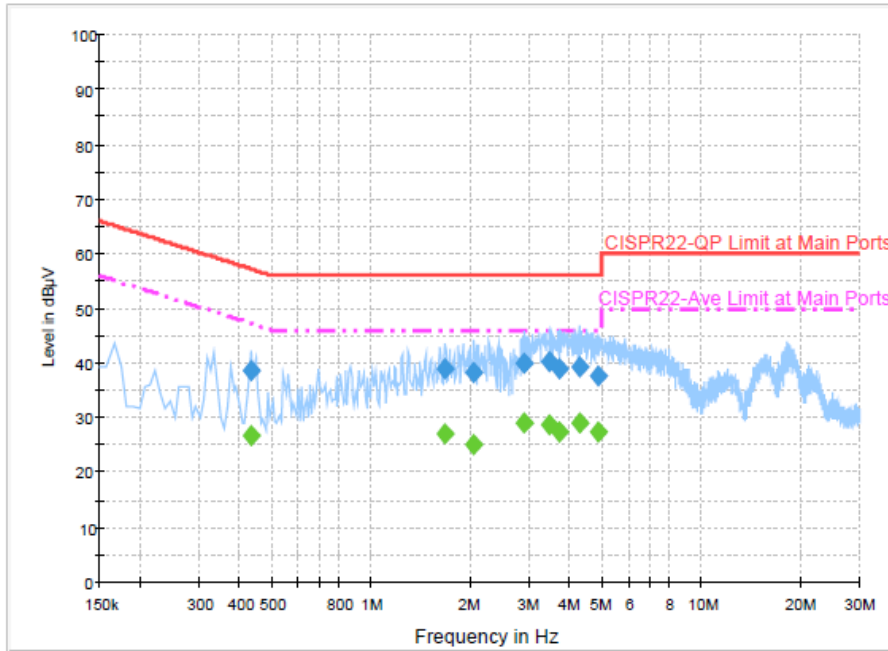

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	38.6	Off	L1	19.5	18.7	57.3
1.670000	39.1	Off	L1	19.6	16.9	56.0
2.046000	38.4	Off	L1	19.4	17.6	56.0
2.910000	39.8	Off	L1	19.6	16.2	56.0
3.446000	40.2	Off	L1	19.6	15.8	56.0
3.718000	39.1	Off	L1	19.7	16.9	56.0
4.246000	39.3	Off	L1	19.6	16.7	56.0
4.846000	37.6	Off	L1	19.7	18.4	56.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	26.8	Off	L1	19.5	20.5	47.3
1.670000	27.2	Off	L1	19.6	18.8	46.0
2.046000	25.1	Off	L1	19.4	20.9	46.0
2.910000	29.0	Off	L1	19.6	17.0	46.0
3.446000	28.6	Off	L1	19.6	17.4	46.0
3.718000	27.5	Off	L1	19.7	18.5	46.0
4.246000	29.1	Off	L1	19.6	16.9	46.0
4.846000	27.3	Off	L1	19.7	18.7	46.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + Battery + USB Cable (Charging from Adapter) + MP3		

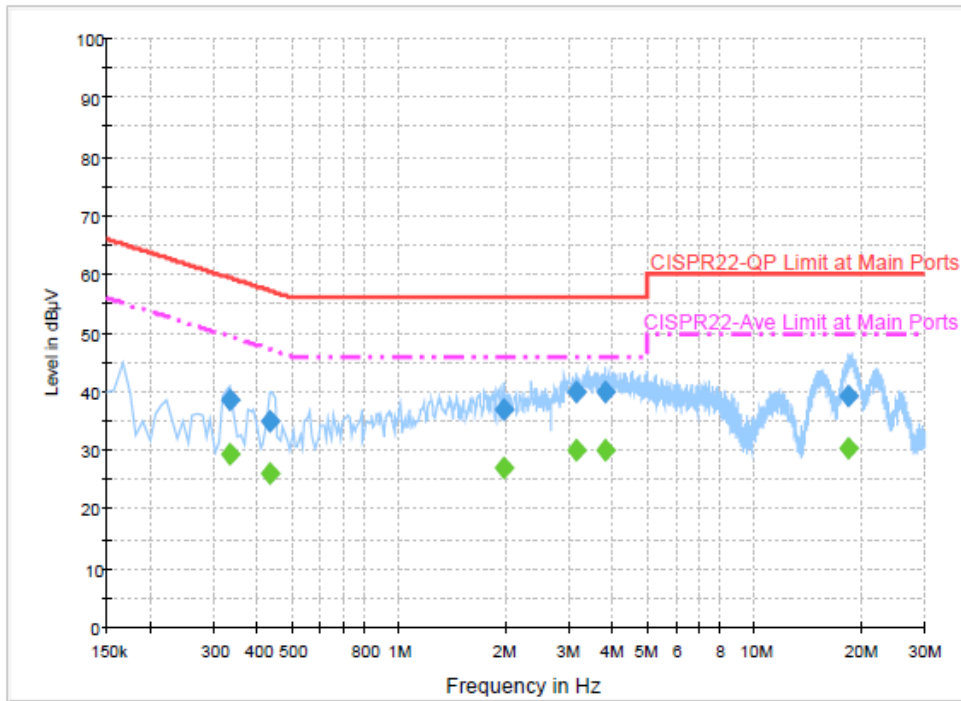

Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	38.6	Off	N	19.4	20.8	59.4
0.430000	35.0	Off	N	19.5	22.3	57.3
1.958000	36.9	Off	N	19.6	19.1	56.0
3.134000	40.0	Off	N	19.6	16.0	56.0
3.806000	40.0	Off	N	19.6	16.0	56.0
18.382000	39.3	Off	N	20.0	20.7	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.334000	29.3	Off	N	19.4	20.1	49.4
0.430000	26.2	Off	N	19.5	21.1	47.3
1.958000	27.1	Off	N	19.6	18.9	46.0
3.134000	30.1	Off	N	19.6	15.9	46.0
3.806000	30.1	Off	N	19.6	15.9	46.0
18.382000	30.5	Off	N	20.0	19.5	50.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 28, 2014	Dec. 26, 2014~ Jan. 10, 2015	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 28, 2014	Dec. 26, 2014~ Jan. 10, 2015	Jan. 27, 2015	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Dec. 26, 2014~ Jan. 10, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May. 06, 2014	Dec. 26, 2014~ Jan. 10, 2015	May. 05, 2015	Conducted (TH02-HY)
RF cable	WOKEN	S05	S05-130708-038	N/A	Jan. 22, 2014	Dec. 26, 2014~ Jan. 10, 2015	Jan. 21, 2015	Conducted (TH02-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 17, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 21, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00 101800-30- 10P	159075	1GHz ~ 18GHz	Apr. 21, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Apr. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Jun. 08, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 19, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Aug. 18, 2015	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Jul. 27, 2015	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Nov. 02, 2015	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Feb. 10, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Feb. 09, 2015	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Dec. 31, 2014 ~ Jan. 07, 2015	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Dec. 31, 2014 ~ Jan. 07, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Dec. 31, 2014 ~ Jan. 07, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Dec. 31, 2014 ~ Jan. 07, 2015	N/A	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May. 06, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	May. 05, 2015	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~40GHz	Dec. 04, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Dec. 03, 2015	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9KHz~1GHz	Dec. 04, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Dec. 03, 2015	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Notch Filter	Wainwright	WRCGV2400/2483-2390/2493-35/10SS	SN4	2.4G	Oct. 01, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Sep. 30, 2015	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Oct. 01, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Sep. 30, 2015	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2014	Dec. 31, 2014 ~ Jan. 07, 2015	Sep. 30, 2015	Radiation (03CH07-HY)
Test Software	Audix	E3	Version 6.2009-8-24	N/A	N/A	Dec. 31, 2014 ~ Jan. 07, 2015	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz – 2.75GHz	Dec. 01, 2014	Dec. 09, 2014	Nov. 30, 2015	Conduction (CO05-HY)
Two-LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Dec. 09, 2014	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000 W	N/A	N/A	N/A	Dec. 09, 2014	N/A	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 23, 2014	Dec. 09, 2014	Apr. 22, 2015	Conduction (CO05-HY)
LF Cable	Shuner	RG-402	N/A	N/A	Oct. 07, 2014	Dec. 09, 2014	Oct. 06, 2015	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Dec. 09, 2014	N/A	Conduction (CO05-HY)

Note: Test equipment calibration is traceable to the procedure of ISO17025.



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------

Test Engineer:	Bill Kuo	Temperature:	21~25	°C
Test Date:	2015/1/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.05	8.56	0.50	Pass
11b	1Mbps	1	6	2437	14.00	9.08	0.50	Pass
11b	1Mbps	1	11	2462	13.95	8.60	0.50	Pass
11g	6Mbps	1	1	2412	18.50	16.40	0.50	Pass
11g	6Mbps	1	6	2437	18.40	16.40	0.50	Pass
11g	6Mbps	1	11	2462	18.45	16.42	0.50	Pass
HT20	MCS0	1	1	2412	19.05	17.60	0.50	Pass
HT20	MCS0	1	6	2437	19.00	17.64	0.50	Pass
HT20	MCS0	1	11	2462	19.00	17.64	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.28	30.00	0.06	20.34	36.00	Pass
11b	1Mbps	1	6	2437	20.36	30.00	0.06	20.42	36.00	Pass
11b	1Mbps	1	11	2462	20.32	30.00	0.06	20.38	36.00	Pass
11g	6Mbps	1	1	2412	22.04	30.00	0.06	22.10	36.00	Pass
11g	6Mbps	1	6	2437	21.88	30.00	0.06	21.94	36.00	Pass
11g	6Mbps	1	11	2462	22.31	30.00	0.06	22.37	36.00	Pass
HT20	MCS0	1	1	2412	20.84	30.00	0.06	20.90	36.00	Pass
HT20	MCS0	1	6	2437	21.13	30.00	0.06	21.19	36.00	Pass
HT20	MCS0	1	11	2462	21.02	30.00	0.06	21.08	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	17.91
11b	1Mbps	1	6	2437	0.10	17.98
11b	1Mbps	1	11	2462	0.10	17.97
11g	6Mbps	1	1	2412	0.59	14.89
11g	6Mbps	1	6	2437	0.59	14.72
11g	6Mbps	1	11	2462	0.59	14.93
HT20	MCS0	1	1	2412	0.63	12.97
HT20	MCS0	1	6	2437	0.63	13.00
HT20	MCS0	1	11	2462	0.63	12.86

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-4.12	0.06	8.00	Pass
11b	1Mbps	1	6	2437	-4.89	0.06	8.00	Pass
11b	1Mbps	1	11	2462	-5.07	0.06	8.00	Pass
11g	6Mbps	1	1	2412	-10.32	0.06	8.00	Pass
11g	6Mbps	1	6	2437	-11.43	0.06	8.00	Pass
11g	6Mbps	1	11	2462	-10.66	0.06	8.00	Pass
HT20	MCS0	1	1	2412	-13.16	0.06	8.00	Pass
HT20	MCS0	1	6	2437	-13.58	0.06	8.00	Pass
HT20	MCS0	1	11	2462	-12.99	0.06	8.00	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Donny Tang	Temperature :	22~25°C
		Relative Humidity :	42~45%

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11b CH 01 2412MHz		2352.75	53.45	-20.55	74	54.41	27.14	5.95	34.05	154	172	P	H	
		2378.22	42.69	-11.31	54	43.53	27.19	6.01	34.04	154	172	A	H	
	*	2410.69	99.19	-	-	99.91	27.28	6.04	34.04	154	172	P	H	
	*	2410.94	96.54	-	-	97.26	27.28	6.04	34.04	154	172	A	H	
													H	
														H
			2333.76	52.15	-21.85	74	53.21	27.05	5.95	34.06	129	40	P	V
			2376.69	42.37	-11.63	54	43.21	27.19	6.01	34.04	129	40	A	V
	*		2410.86	95.97	-	-	96.69	27.28	6.04	34.04	129	40	P	V
	*		2410.94	93.63	-	-	94.35	27.28	6.04	34.04	129	40	A	V
														V
														V
802.11b CH 06 2437MHz		2323.68	52.49	-21.51	74	53.55	27.05	5.95	34.06	128	171	P	H	
		2366.79	42.21	-11.79	54	43.1	27.14	6.01	34.04	128	171	A	H	
	*	2435.99	102.51	-	-	103.18	27.32	6.04	34.03	128	171	P	H	
	*	2435.82	99.66	-	-	100.33	27.32	6.04	34.03	128	171	A	H	
			2489.48	52.76	-21.24	74	53.18	27.5	6.09	34.01	128	171	P	H
			2483.76	42.78	-11.22	54	43.24	27.46	6.09	34.01	128	171	A	H
			2387.58	52.92	-21.08	74	53.72	27.23	6.01	34.04	138	99	P	V
			2375.88	42.11	-11.89	54	42.95	27.19	6.01	34.04	138	99	A	V
	*		2435.82	100.02	-	-	100.69	27.32	6.04	34.03	138	99	P	V
	*		2435.82	97.38	-	-	98.05	27.32	6.04	34.03	138	99	A	V
			2492.68	52.7	-21.3	74	53.11	27.5	6.09	34	138	99	P	V
			2490.72	42.59	-11.41	54	43.01	27.5	6.09	34.01	138	99	A	V



802.11b CH 11 2462MHz	*	2460.79	102.14	-	-	102.68	27.41	6.07	34.02	150	180	P	H
	*	2460.96	99.68	-	-	100.22	27.41	6.07	34.02	150	180	A	H
		2483.8	56.37	-17.63	74	56.83	27.46	6.09	34.01	150	180	P	H
		2483.52	49.42	-4.58	54	49.88	27.46	6.09	34.01	150	180	A	H
													H
													H
	*	2460.87	99.42	-	-	99.96	27.41	6.07	34.02	113	91	P	V
	*	2460.87	96.8	-	-	97.34	27.41	6.07	34.02	113	91	A	V
		2483.64	54.85	-19.15	74	55.31	27.46	6.09	34.01	113	91	P	V
		2483.52	47.68	-6.32	54	48.14	27.46	6.09	34.01	113	91	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	35.59	-38.41	74	54.23	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	32.85	-41.15	74	51.49	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4872	33.46	-40.54	74	51.88	31.41	8.69	58.52	100	0	P	H
		7308	37.01	-36.99	74	48.5	36.28	10.39	58.16	100	0	P	H
													H
													H
		4872	32.72	-41.28	74	51.14	31.41	8.69	58.52	100	0	P	V
		7308	37.76	-36.24	74	49.25	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4926	32.33	-41.67	74	50.47	31.49	8.79	58.42	100	0	P	H
		7386	38.36	-35.64	74	49.72	36.47	10.48	58.31	100	0	P	H
													H
													H
		4926	32.64	-41.36	74	50.78	31.49	8.79	58.42	100	0	P	V
		7386	37.91	-36.09	74	49.27	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11g CH 01 2412MHz		2389.38	55.68	-18.32	74	56.48	27.23	6.01	34.04	132	353	P	H	
		2390	44.87	-9.13	54	45.67	27.23	6.01	34.04	132	353	A	H	
	*	2412	100.36	-	-	101.08	27.28	6.04	34.04	132	353	P	H	
	*	2412	93.55	-	-	94.27	27.28	6.04	34.04	132	353	A	H	
													H	
														H
			2389.92	53.44	-20.56	74	54.24	27.23	6.01	34.04	128	49	P	V
			2390	43.57	-10.43	54	44.37	27.23	6.01	34.04	128	49	A	V
	*		2412	98.1	-	-	98.82	27.28	6.04	34.04	128	49	P	V
	*		2412	89.71	-	-	90.43	27.28	6.04	34.04	128	49	A	V
														V
														V
802.11g CH 06 2437MHz		2363.64	52.44	-21.56	74	53.34	27.14	6.01	34.05	132	2	P	H	
		2372.82	42.33	-11.67	54	43.17	27.19	6.01	34.04	132	2	A	H	
	*	2437	100.58	-	-	101.2	27.37	6.04	34.03	132	2	P	H	
	*	2437	93.04	-	-	93.66	27.37	6.04	34.03	132	2	A	H	
			2492.2	53.44	-20.56	74	53.85	27.5	6.09	34	132	2	P	H
			2485.96	42.92	-11.08	54	43.38	27.46	6.09	34.01	132	2	A	H
			2383.08	53.32	-20.68	74	54.16	27.19	6.01	34.04	121	116	P	V
			2365.35	42.57	-11.43	54	43.46	27.14	6.01	34.04	121	116	A	V
	*		2437	96.55	-	-	97.17	27.37	6.04	34.03	121	116	P	V
	*		2437	88.52	-	-	89.14	27.37	6.04	34.03	121	116	A	V
			2487.68	52.87	-21.13	74	53.29	27.5	6.09	34.01	121	116	P	V
			2492.92	42.84	-11.16	54	43.25	27.5	6.09	34	121	116	A	V



802.11g CH 11 2462MHz	*	2462	100.53	-	-	101.07	27.41	6.07	34.02	128	11	P	H
	*	2462	92.63	-	-	93.17	27.41	6.07	34.02	128	11	A	H
		2483.72	65.91	-8.09	74	66.37	27.46	6.09	34.01	128	11	P	H
		2483.52	50.75	-3.25	54	51.21	27.46	6.09	34.01	128	11	A	H
													H
													H
	*	2462	95.04	-	-	95.58	27.41	6.07	34.02	100	131	P	V
	*	2462	87.38	-	-	87.92	27.41	6.07	34.02	100	131	A	V
		2483.96	61.15	-12.85	74	61.61	27.46	6.09	34.01	100	131	P	V
		2483.52	47.11	-6.89	54	47.57	27.46	6.09	34.01	100	131	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	32.85	-41.15	74	51.49	31.32	8.65	58.61	100	0	P	H
													H
													H
													H
		4824	32.9	-41.1	74	51.54	31.32	8.65	58.61	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4872	32.53	-41.47	74	50.95	31.41	8.69	58.52	100	0	P	H
		7311	36.90	-37.1	74	48.39	36.28	10.39	58.16	100	0	P	H
													H
													H
		4872	32.91	-41.09	74	51.33	31.41	8.69	58.52	100	0	P	V
		7311	37.19	-36.81	74	48.68	36.28	10.39	58.16	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4926	32.69	-41.31	74	50.83	31.49	8.79	58.42	100	0	P	H
		7386	38.4	-35.60	74	49.76	36.47	10.48	58.31	100	0	P	H
													H
													H
		4926	32.25	-41.75	74	50.39	31.49	8.79	58.42	100	0	P	V
		7386	36.91	-37.09	74	48.27	36.47	10.48	58.31	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 01 2412MHz		2390	59.36	-14.64	74	60.16	27.23	6.01	34.04	132	166	P	H	
		2390	44.41	-9.59	54	45.21	27.23	6.01	34.04	132	166	A	H	
	*	2412	95.78	-	-	96.5	27.28	6.04	34.04	132	166	P	H	
	*	2412	88.06	-	-	88.78	27.28	6.04	34.04	132	166	A	H	
													H	
													H	
			2386.86	52.77	-21.23	74	53.57	27.23	6.01	34.04	142	121	P	V
			2389.74	42.71	-11.29	54	43.51	27.23	6.01	34.04	142	121	A	V
		*	2412	90.85	-	-	91.57	27.28	6.04	34.04	142	121	P	V
		*	2412	83.54	-	-	84.26	27.28	6.04	34.04	142	121	A	V
													V	
													V	
802.11n HT20 CH 06 2437MHz		2389.11	53.87	-20.13	74	54.67	27.23	6.01	34.04	127	78	P	H	
		2389.83	42.9	-11.1	54	43.7	27.23	6.01	34.04	127	78	A	H	
	*	2437	104.18	-	-	104.8	27.37	6.04	34.03	127	78	P	H	
	*	2437	95.45	-	-	96.07	27.37	6.04	34.03	127	78	A	H	
			2483.84	55.67	-18.33	74	56.13	27.46	6.09	34.01	127	78	P	H
			2483.88	43.92	-10.08	54	44.38	27.46	6.09	34.01	127	78	A	H
			2385.24	52.44	-21.56	74	53.28	27.19	6.01	34.04	120	65	P	V
			2390	42.29	-11.71	54	43.09	27.23	6.01	34.04	120	65	A	V
		*	2437	100.69	-	-	101.31	27.37	6.04	34.03	120	65	P	V
		*	2437	92.23	-	-	92.85	27.37	6.04	34.03	120	65	A	V
		2491.36	52.75	-21.25	74	53.17	27.5	6.09	34.01	120	65	P	V	
		2484	43.01	-10.99	54	43.47	27.46	6.09	34.01	120	65	A	V	



802.11n HT20 CH 11 2462MHz	*	2459.45	96.72	-	-	97.26	27.41	6.07	34.02	122	82	P	H
	*	2458.20	88.92	-	-	89.46	27.41	6.07	34.02	122	82	A	H
		2484	61.48	-12.52	74	61.94	27.46	6.09	34.01	122	82	P	H
		2483.56	47.46	-6.54	54	47.92	27.46	6.09	34.01	122	82	A	H
													H
													H
	*	2463.54	92.88	-	-	93.42	27.41	6.07	34.02	115	66	P	V
	*	2463.71	85.62	-	-	86.16	27.41	6.07	34.02	115	66	A	V
		2484.28	55.74	-18.26	74	56.2	27.46	6.09	34.01	115	66	P	V
		2483.56	45.28	-8.72	54	45.74	27.46	6.09	34.01	115	66	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBµV/m)	(dB)	(dBµV/m)	(dBµV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 01 2412MHz		4824	32.35	-41.65	74	50.99	31.32	8.65	58.61	100	0	P	H	
													H	
													H	
													H	
		4824	32.27	-41.73	74	50.91	31.32	8.65	58.61	100	0	P	V	
														V
														V
802.11n HT20 CH 06 2437MHz		4874	32.34	-41.66	74	50.76	31.41	8.69	58.52	100	0	P	H	
		7311	37.23	-36.77	74	48.72	36.28	10.39	58.16	100	0	P	H	
													H	
													H	
		4872	33	-41	74	51.42	31.41	8.69	58.52	100	0	P	V	
		7308	37.21	-36.79	74	48.7	36.28	10.39	58.16	100	0	P	V	
														V
802.11n HT20 CH 11 2462MHz		4926	33.57	-40.43	74	51.71	31.49	8.79	58.42	100	0	P	H	
		7386	37.7	-36.3	74	49.06	36.47	10.48	58.31	100	0	P	H	
													H	
													H	
		4926	32.78	-41.22	74	50.92	31.49	8.79	58.42	100	0	P	V	
		7386	37.7	-36.3	74	49.06	36.47	10.48	58.31	100	0	P	V	
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



15C Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11b LF		50.52	22.35	-17.65	40	45.59	7.52	1.04	31.8	132	225	P	H	
		111.81	16.82	-26.68	43.5	36.02	11.3	1.28	31.78			P	H	
		238.17	14.05	-31.95	46	33.55	10.48	1.79	31.77			P	H	
		400.1	22.26	-23.74	46	36.03	15.71	2.32	31.8			P	H	
		524	18.95	-27.05	46	30.56	17.68	2.64	31.93			P	H	
		707.4	21.37	-24.63	46	31.21	19.05	3.14	32.03			P	H	
														H
														H
														H
														H
														H
														H
														H
			57.27	18.14	-21.86	40	43.25	5.65	1.04	31.8	100	57	P	V
			113.97	15.77	-27.73	43.5	34.97	11.3	1.28	31.78			P	V
			171.75	15.81	-27.69	43.5	37.26	8.69	1.64	31.78			P	V
			300	16.04	-29.96	46	32.69	13	2.11	31.76			P	V
			473.6	20.97	-25.03	46	33.26	17.01	2.57	31.87			P	V
			613.6	20.38	-25.62	46	30.59	18.87	2.96	32.04			P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



15C Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11g LF		49.98	20.41	-19.59	40	43.46	7.71	1.04	31.8	119	324	P	H	
		115.32	15.63	-27.87	43.5	34.82	11.31	1.28	31.78			P	H	
		272.73	14.86	-31.14	46	32.29	12.4	1.94	31.77			P	H	
		350.4	14.89	-31.11	46	30.28	14.22	2.17	31.78			P	H	
		644.4	19.6	-26.4	46	29.58	19.1	2.96	32.04			P	H	
		910.4	23.98	-22.02	46	31.68	20.1	3.55	31.35			P	H	
														H
														H
														H
														H
														H
														H
														H
			51.06	22.04	-17.96	40	45.47	7.33	1.04	31.8	105	99	P	V
			112.62	17.58	-25.92	43.5	36.78	11.3	1.28	31.78			P	V
			229.26	17.15	-28.85	46	37.75	9.38	1.79	31.77			P	V
			544.3	20.07	-25.93	46	30.67	18.59	2.77	31.96			P	V
			680.8	20.23	-25.77	46	30.35	18.9	3.02	32.04			P	V
			734	22.05	-23.95	46	31	19.8	3.25	32			P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.