



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

For

GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC

FCC ID: PY7-PM0793

**REPORT NUMBER: 15J20116-E3
ISSUE DATE: APRIL 1, 2015**

**Prepared for
SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU
TOKYO, 108-0075 JAPAN**

**Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
-	04/01/15	Initial Issue	CHOON OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 6 dB BANDWIDTH.....	13
8.2. 99% BANDWIDTH.....	17
8.3. OUTPUT POWER.....	21
8.4. AVERAGE POWER.....	25
8.5. POWER SPECTRAL DENSITY	26
8.6. CONDUCTED SPURIOUS EMISSIONS.....	30
9. RADIATED TEST RESULTS.....	37
9.1. LIMITS AND PROCEDURE	37
9.2. TRANSMITTER ABOVE 1 GHz	38
9.3. WORST-CASE BELOW 1 GHz.....	51
10. AC POWER LINE CONDUCTED EMISSIONS	54
11. SETUP PHOTOS	57
END OF REPORT	59

ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac , ANT+ and NFC
SERIAL NUMBER: 159243-6 (Conducted), 153033-5 (Radiated)
DATE TESTED: MARCH 9-27, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



CHOON OOI
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL Verification Services Inc.

1. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

2. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☒ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☒ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

3. CALIBRATION AND UNCERTAINTY

3.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

3.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

3.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

4. EQUIPMENT UNDER TEST

4.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac & ANT+.

4.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	6.41	4.38

4.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -4.9dBi.

4.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

4.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	SONY	MH410C	N/A	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

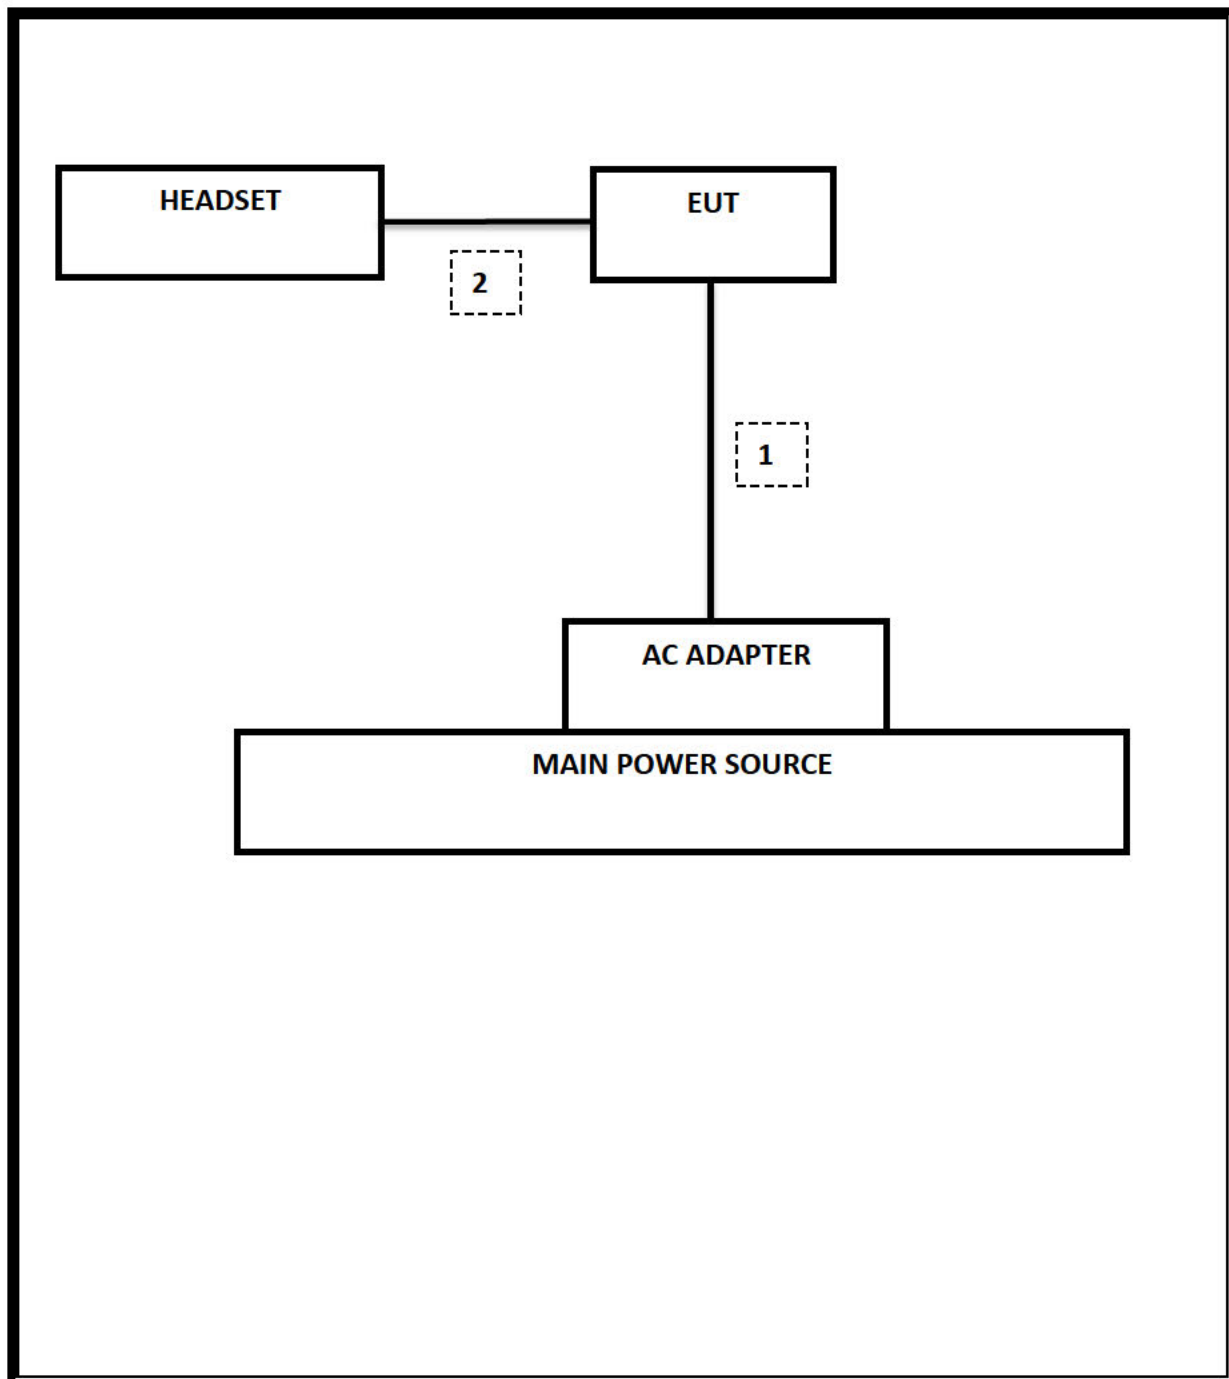

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	100773	08/15/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	12/08/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	09/03/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 18GHz	Miteq	AFS42-00101800-25-S-42	1818466	05/09/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

6. SUMMARY

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	0.729 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-53.3 dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	6.4 dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-7.9 dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	33.8 dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	32.08 dBuV/m

7. ANTENNA PORT TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.729	0.5
Middle	2440	0.720	0.5
High	2480	0.729	0.5

6 dB BANDWIDTH PLOTS


LOW CHANNEL

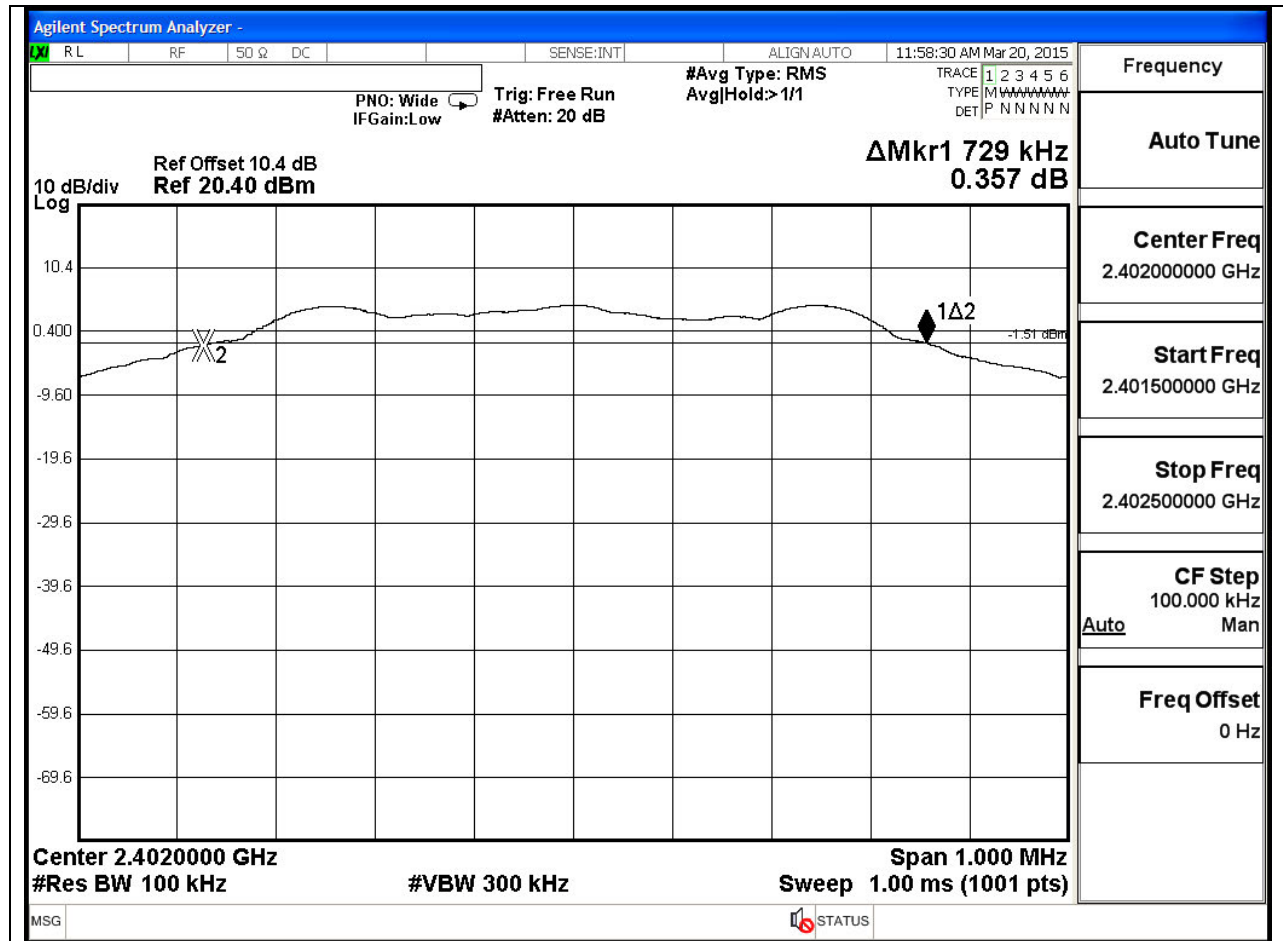

MID CHANNEL

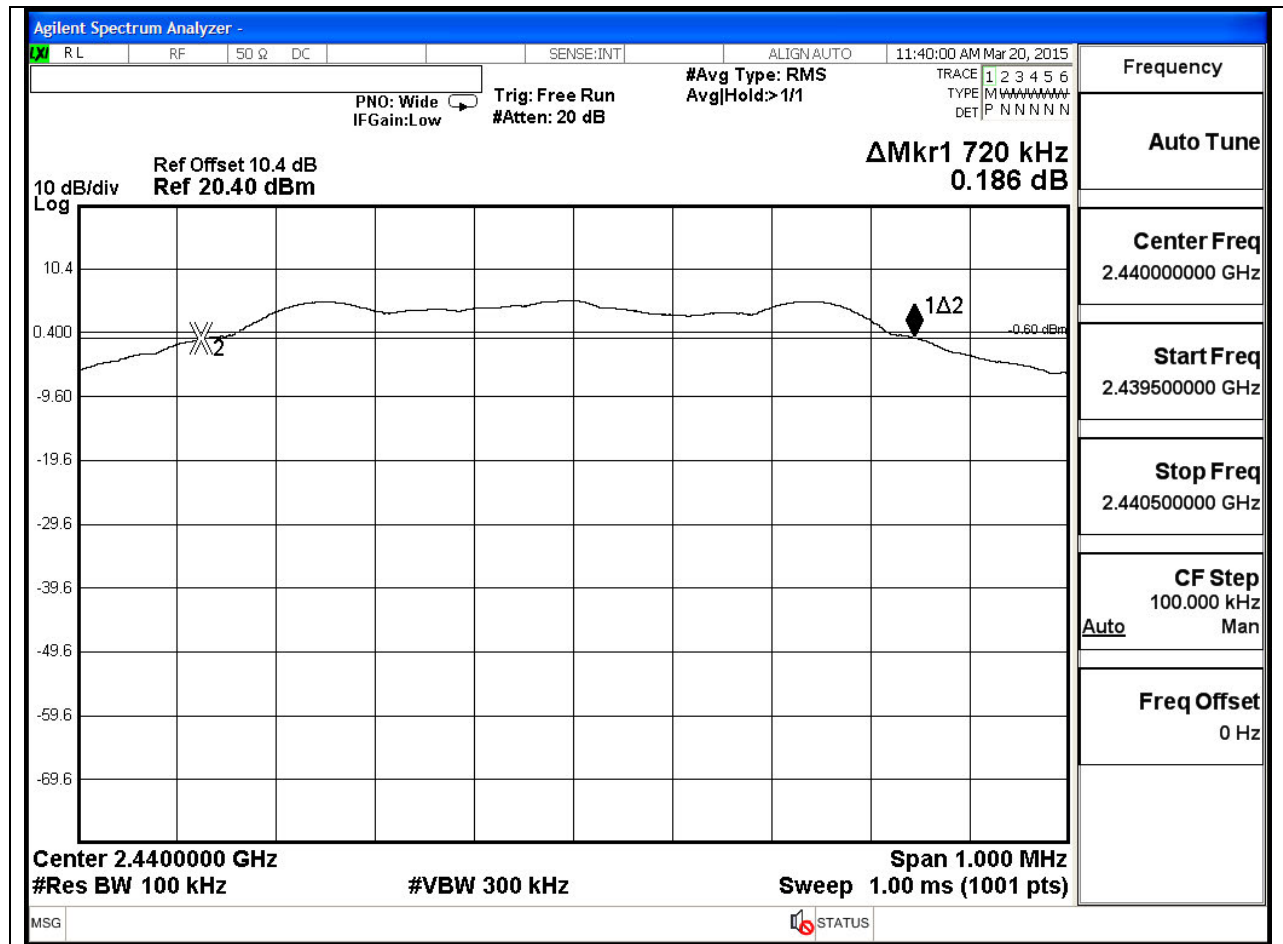

HIGH CHANNEL

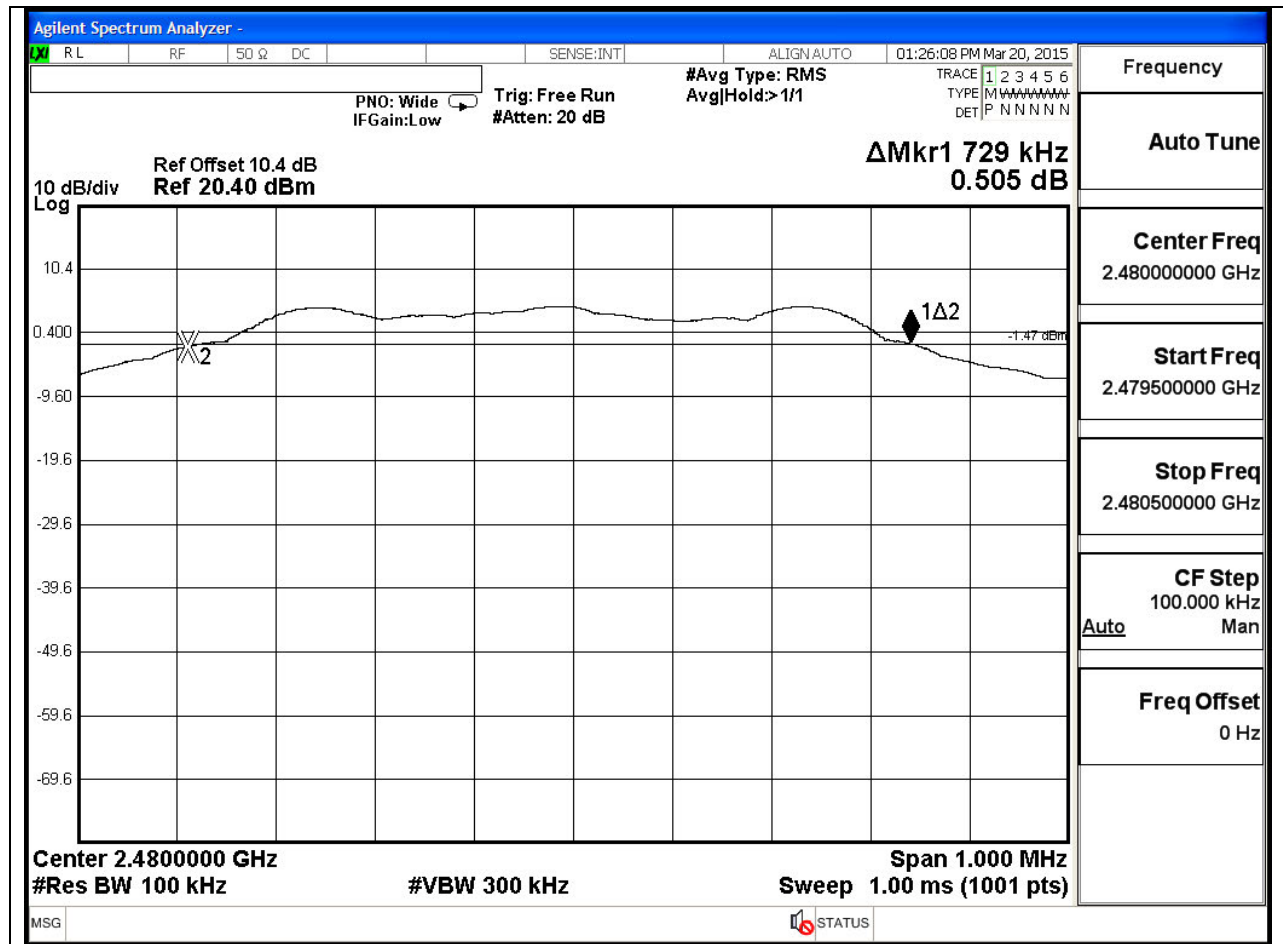

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0399
Middle	2440	1.0477
High	2480	1.0805

99% BANDWIDTH PLOTS


LOW CHANNEL

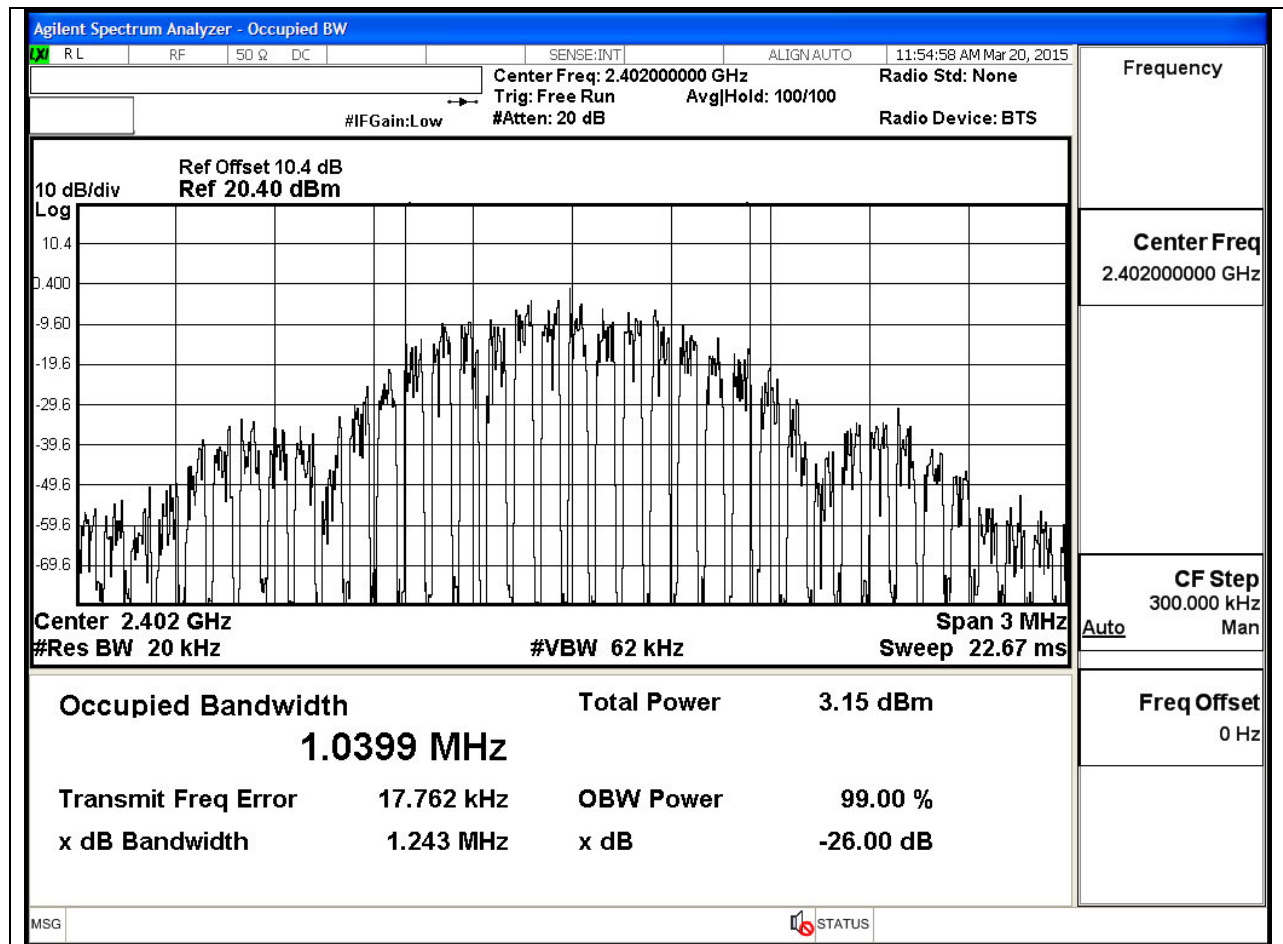

MID CHANNEL

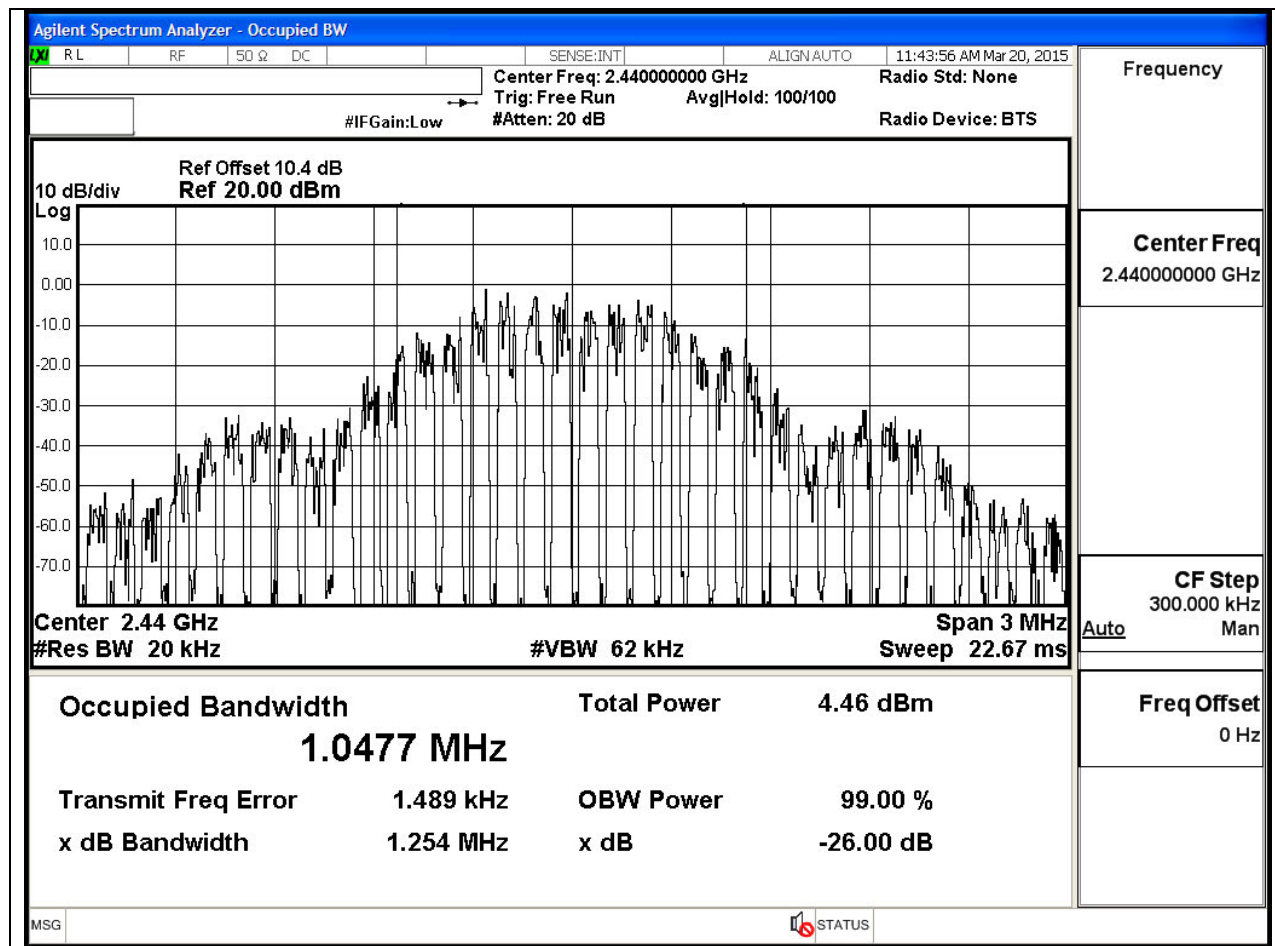

HIGH CHANNEL

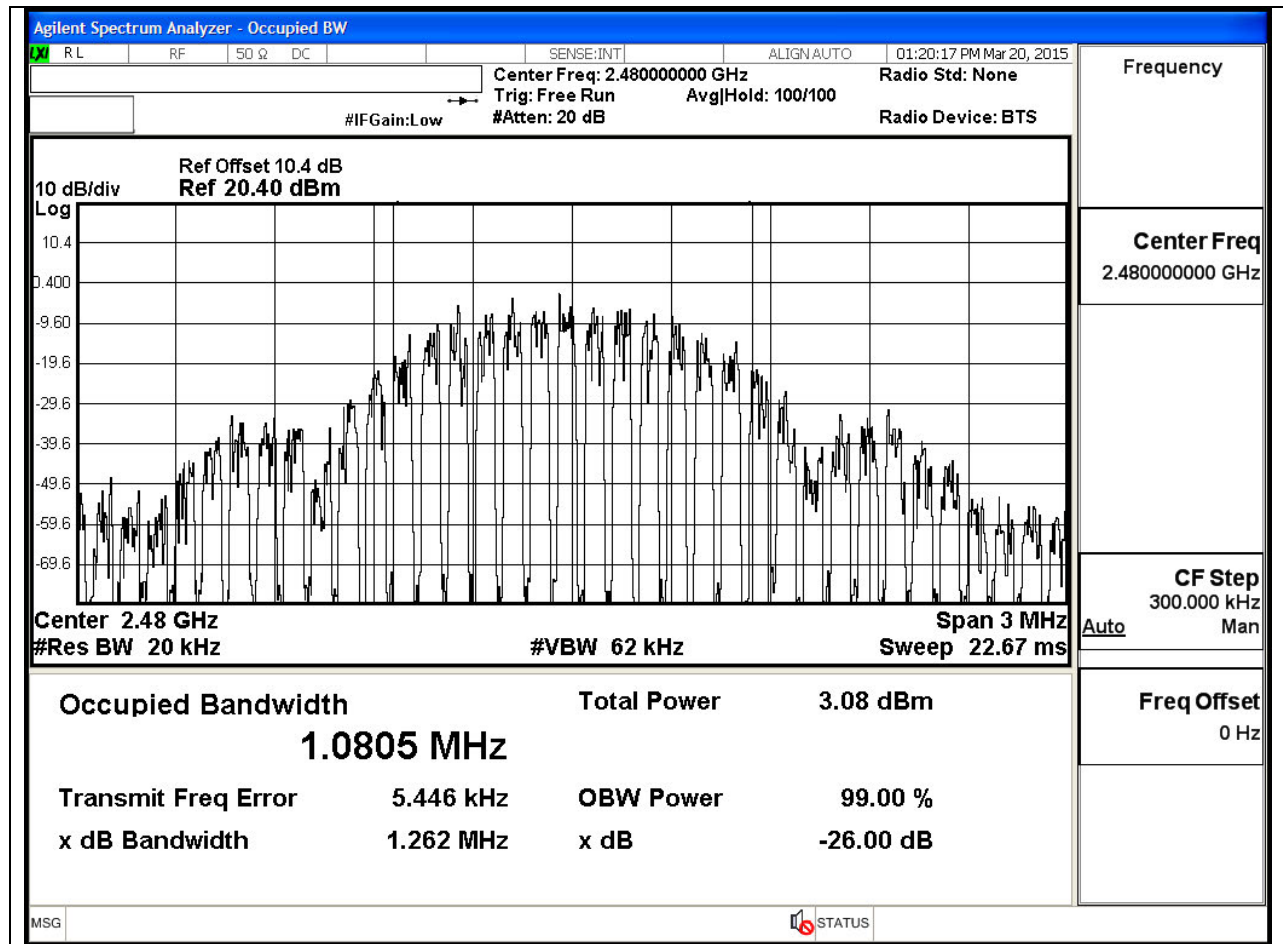

7.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.

RESULTS


Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	5.44	30	-24.562
Middle	2440	6.41	30	-23.592
High	2480	5.46	30	-24.538

OUTPUT POWER PLOTS

LOW CHANNEL

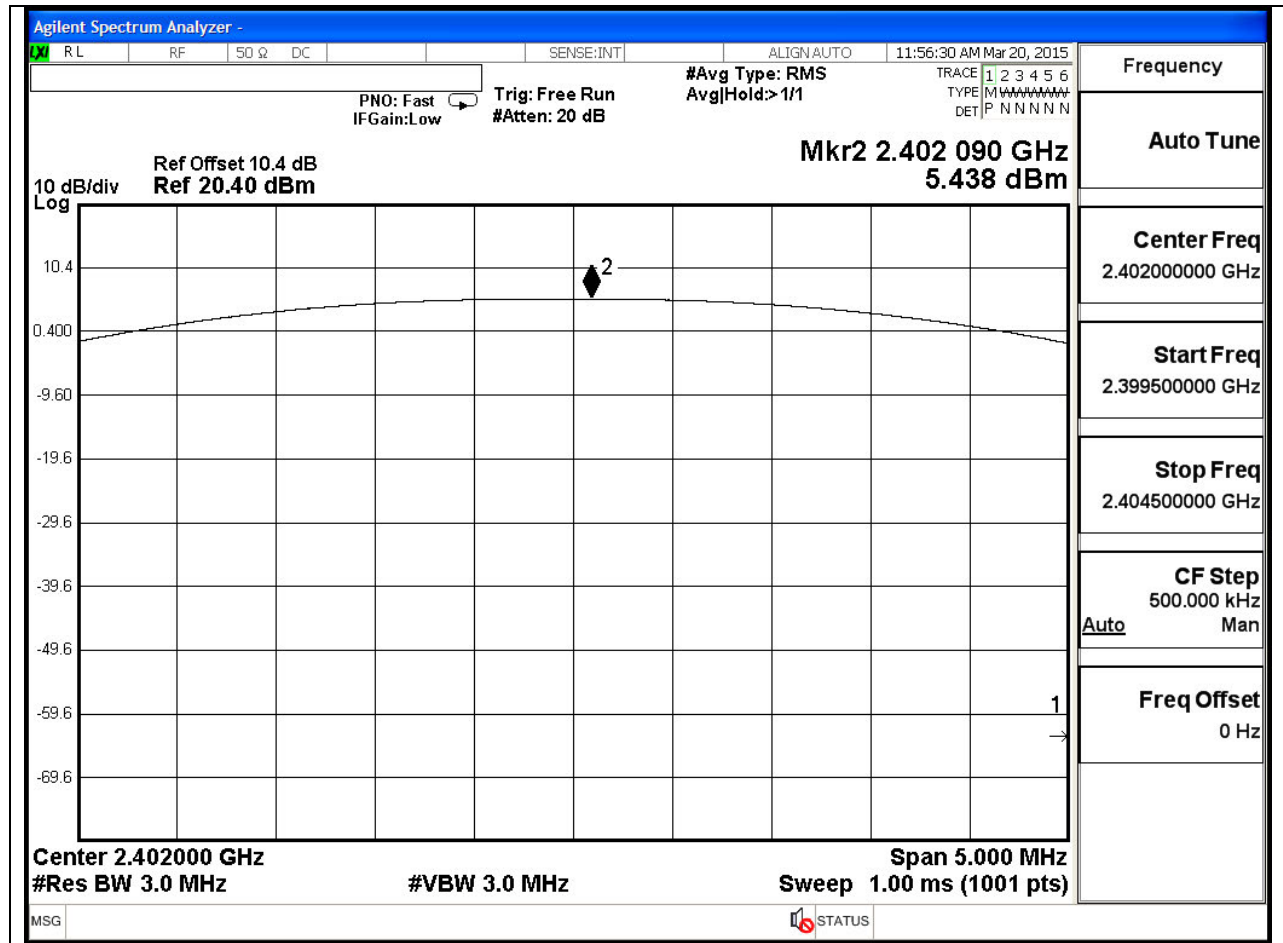

MID CHANNEL

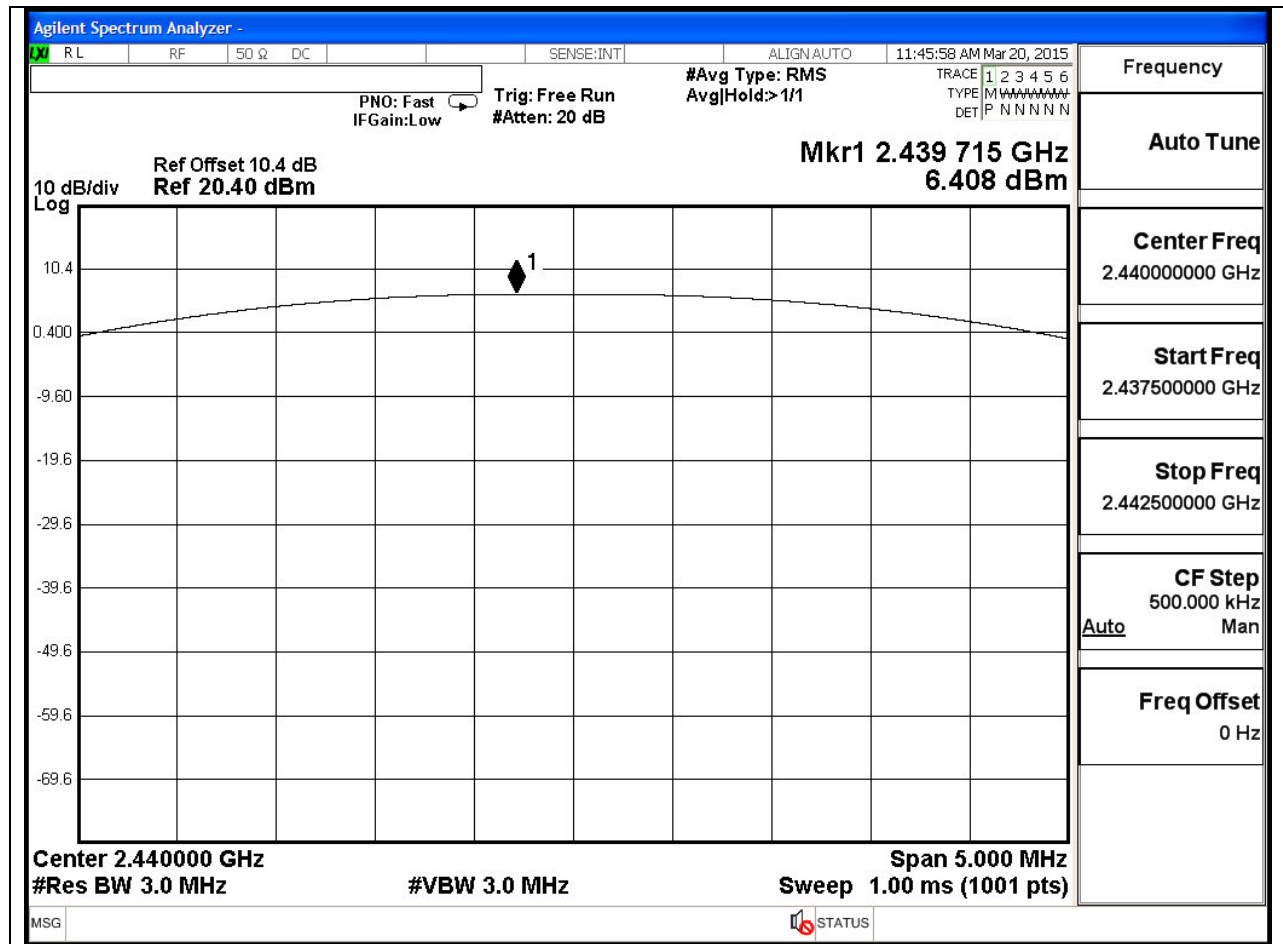

Agilent Spectrum Analyzer -

RL RF 50 Ω DC SENSE:INT ALIGN: AUTO 01:28:21 PM Mar 20, 2015

PNO: Fast Trig: Free Run #Avg Type: RMS Avg|Hold:>1/1 TRACE 1 2 3 4 5 6
IFGain:Low #Atten: 20 dB TYPE [M] [W] [W] [W] [W] [W]
DET [P] [N] [N] [N] [N] [N]

Ref Offset 10.4 dB Mkr1 2.480 075 GHz
Ref 20.40 dBm 5.462 dBm

10 dB/div Log

Center 2.480000 GHz Span 5.000 MHz
#Res BW 3.0 MHz #VBW 3.0 MHz Sweep 1.00 ms (1001 pts)

MSG STATUS

Frequency

Auto Tune

Center Freq
2.48000000 GHz

Start Freq
2.47750000 GHz

Stop Freq
2.48250000 GHz

CF Step
500.000 kHz
Auto Man

Freq Offset
0 Hz

7.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	4.9
Middle	2440	5.4
High	2480	5

7.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013

RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-8.95	8	-16.95
Middle	2440	-7.93	8	-15.93
High	2480	-8.89	8	-16.89

LOW CHANNEL

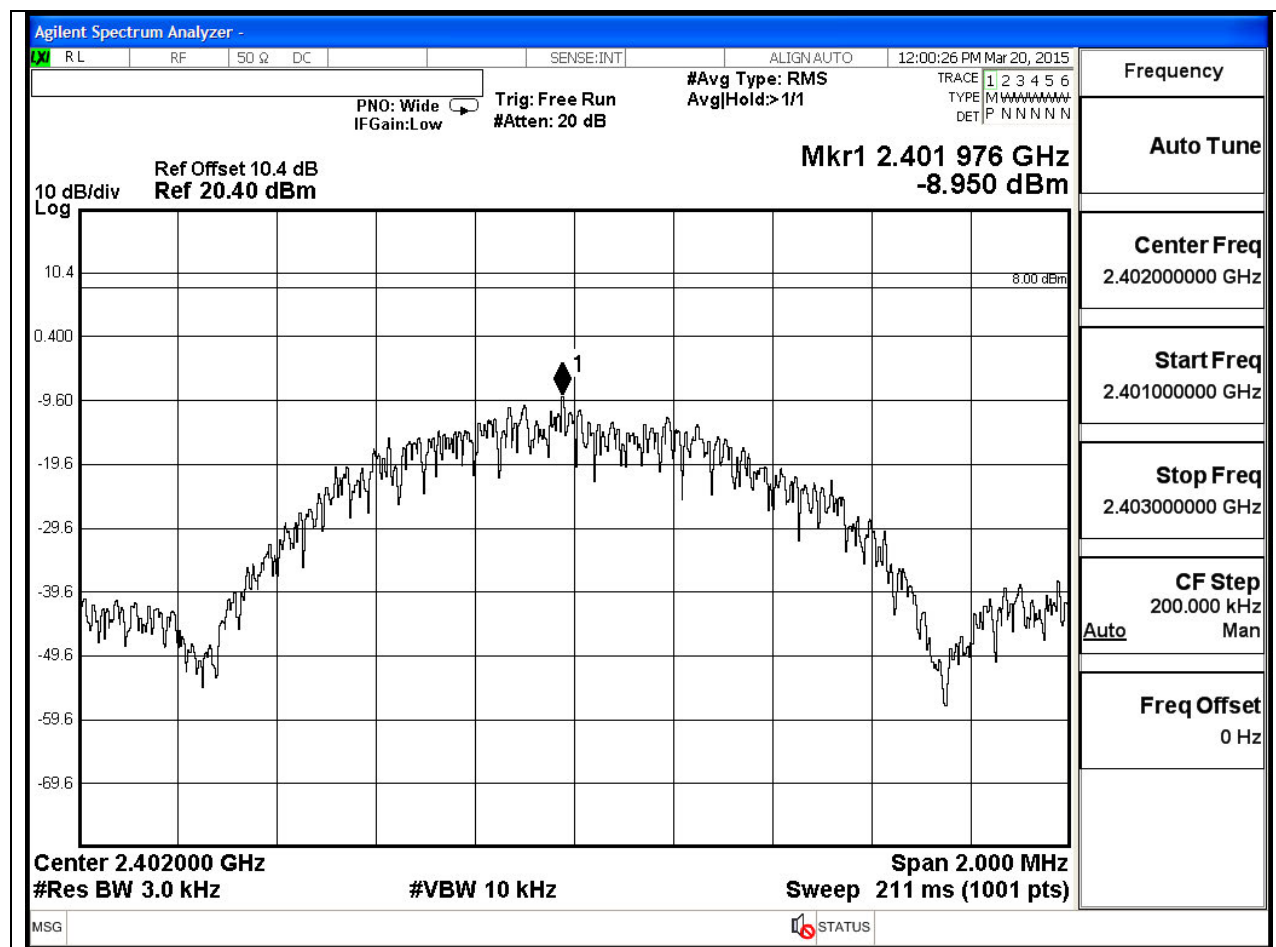

Agilent Spectrum Analyzer -

RL RF 50 Ω DC SENSE:INT ALIGN AUTO 11:42:04 AM Mar 20, 2015

PN0: Wide Trig: Free Run #Avg Type: RMS IFGain:Low #Atten: 20 dB Avg|Hold:>1/1

TRACE 1 2 3 4 5 6
TYPE [M] [W] [W] [W] [W] [W]
DET [P] [N] [N] [N] [N] [N]

Ref Offset 10.4 dB
Ref 20.40 dBm

Mkr1 2.439 970 GHz
-7.930 dBm

10 dB/div
Log

Center 2.440000 GHz
#Res BW 3.0 kHz
#VBW 10 kHz
Span 2.000 MHz
Sweep 211 ms (1001 pts)

MSG STATUS

Frequency
Auto Tune
Center Freq
2.440000000 GHz
Start Freq
2.439000000 GHz
Stop Freq
2.441000000 GHz
CF Step
200.000 kHz
Auto Man
Freq Offset
0 Hz

Agilent Spectrum Analyzer -

R L RF 50 Ω DC SENSE:INT ALIGN AUTO 01:24:03 PM Mar 20, 2015

PNO: Wide Trg: Free Run #Avg Type: RMS Avg|Hold:>1/1
IFGain:Low #Atten: 20 dB TRACE 1 2 3 4 5 6
TYPE [M] W W W W W W W W
DET P N N N N N N

Ref Offset 10.4 dB Mkr1 2.479 964 GHz
Ref 20.40 dBm -8.889 dBm

10 dB/div Log

Center 2.480000 GHz Span 2.000 MHz
#Res BW 3.0 kHz #VBW 10 kHz Sweep 211 ms (1001 pts)

Frequency	
Auto Tune	
Center Freq	2.480000000 GHz
Start Freq	2.479000000 GHz
Stop Freq	2.481000000 GHz
CF Step	200.000 kHz
Auto Man	
Freq Offset	0 Hz

MSG STATUS

7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL


LOW CHANNEL BANDEDGE

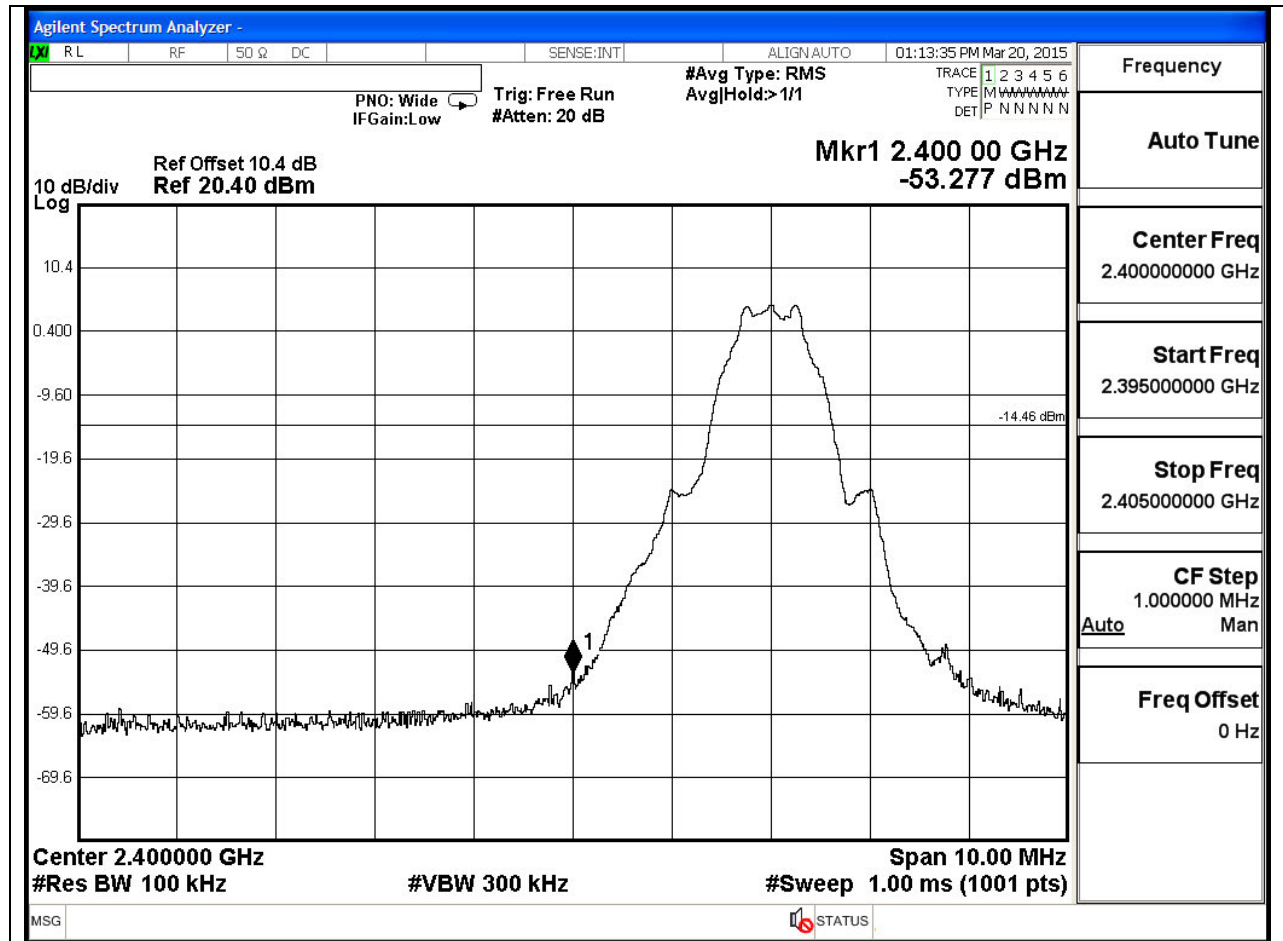

SPURIOUS EMISSIONS, MID CHANNEL


MID CHANNEL REFERENCE

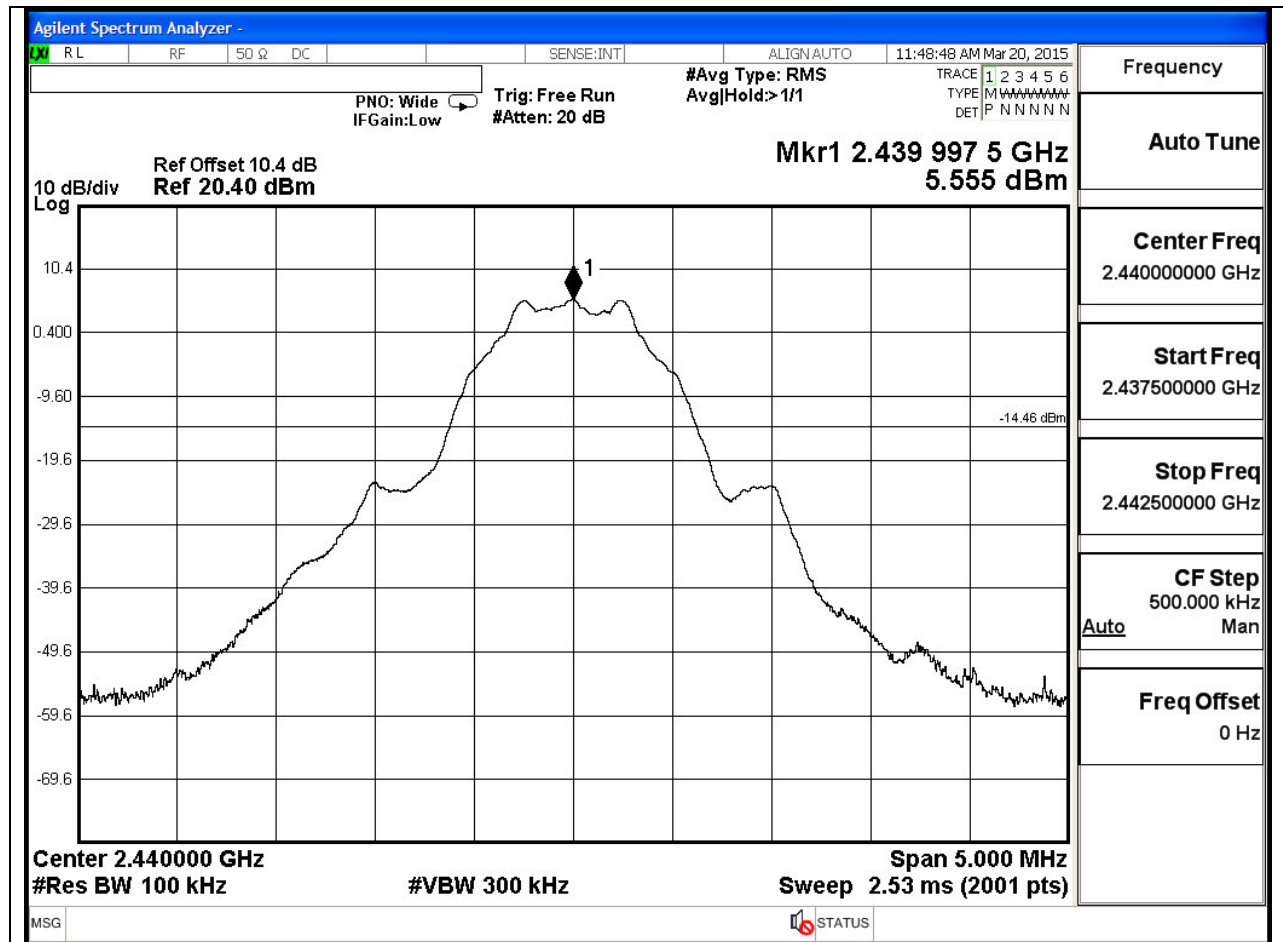

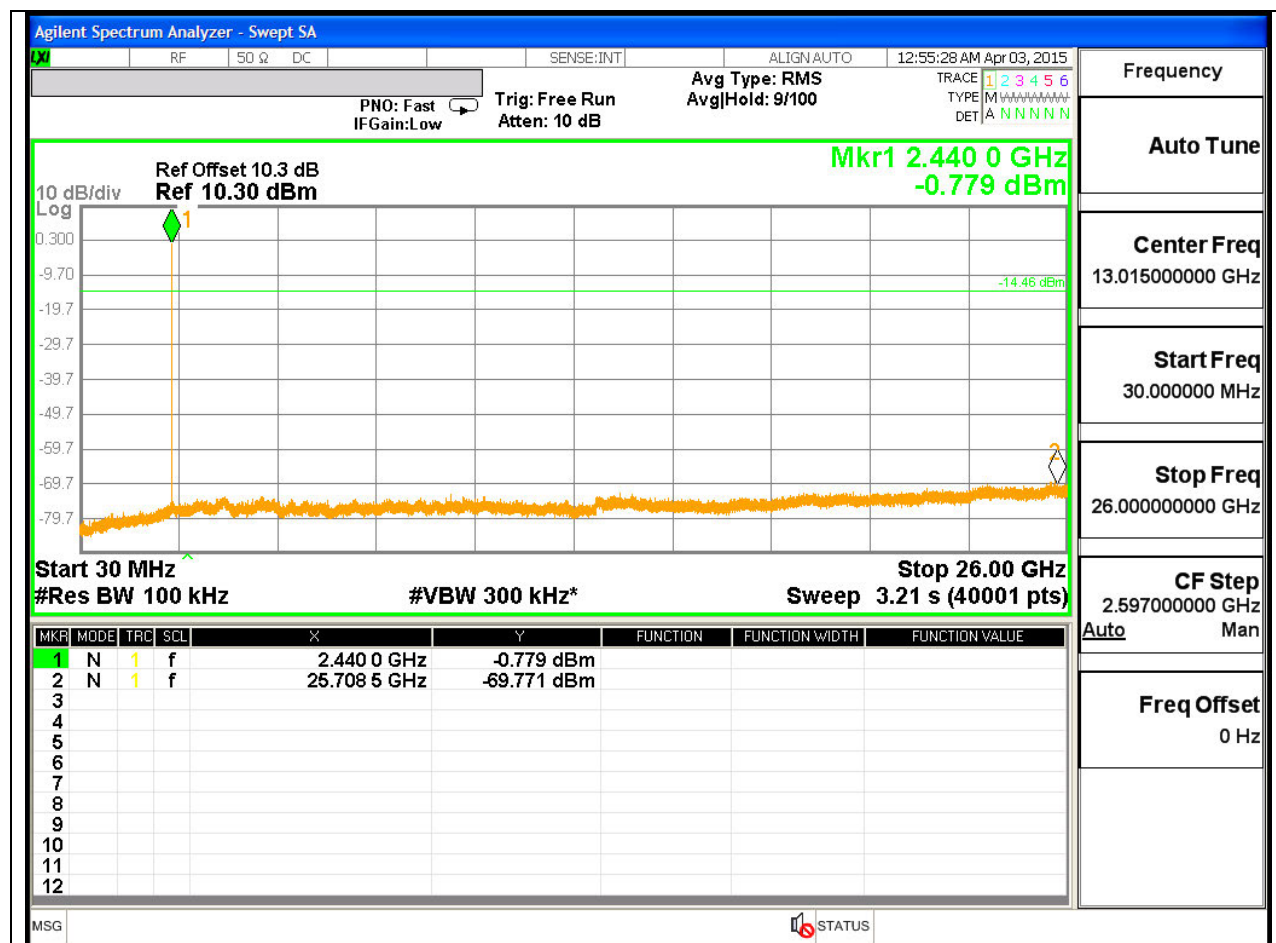

SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

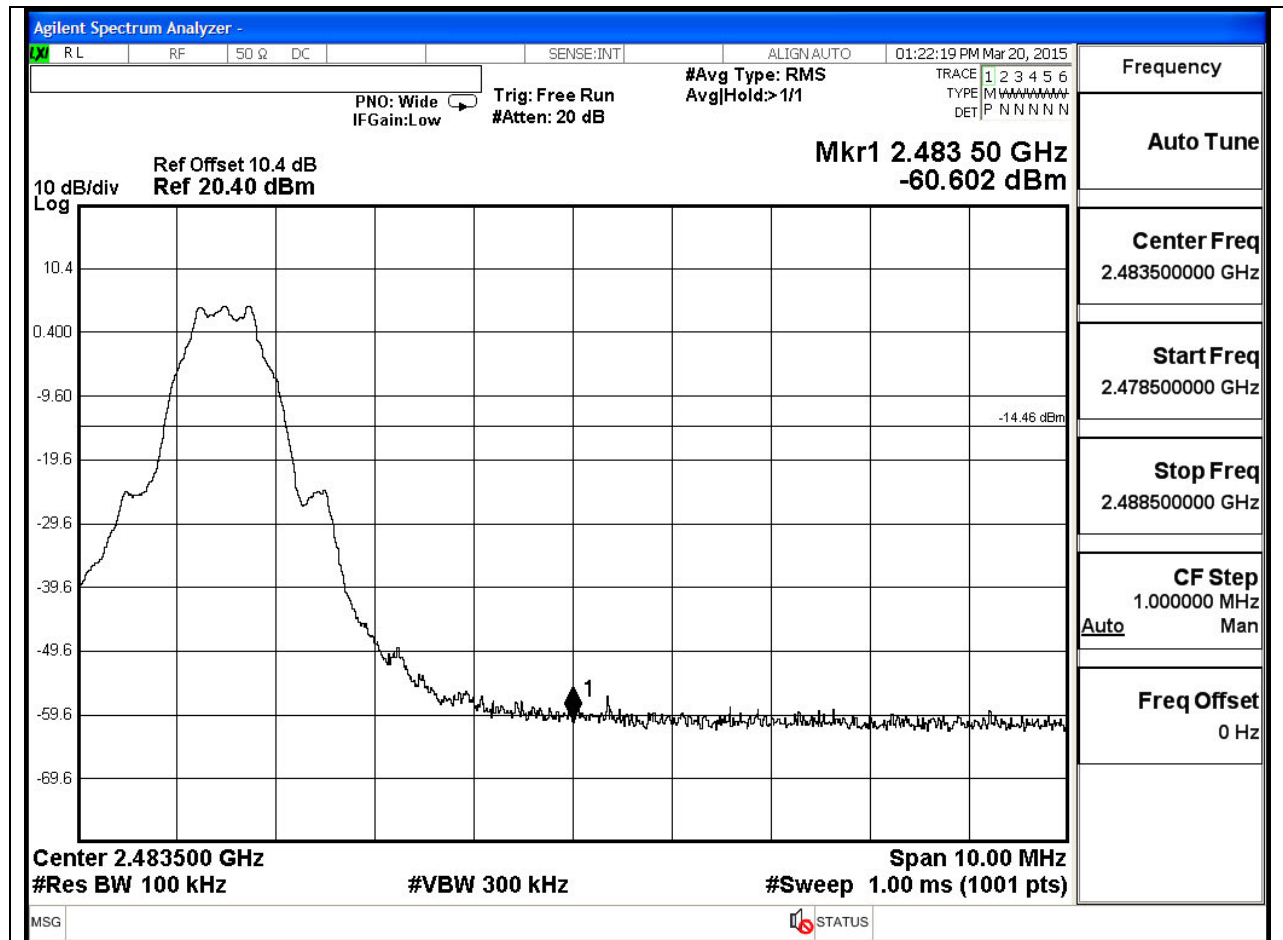

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-GEN Clause 8.9 (Transmitter)

IC RSS-GEN Clause 7 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log(1/x)$. For this sample: DCF = $10 \log(1/0.617) = 2.09 \text{ dB}$
(Spectrum Analyzer round it up to 2.1dB)


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

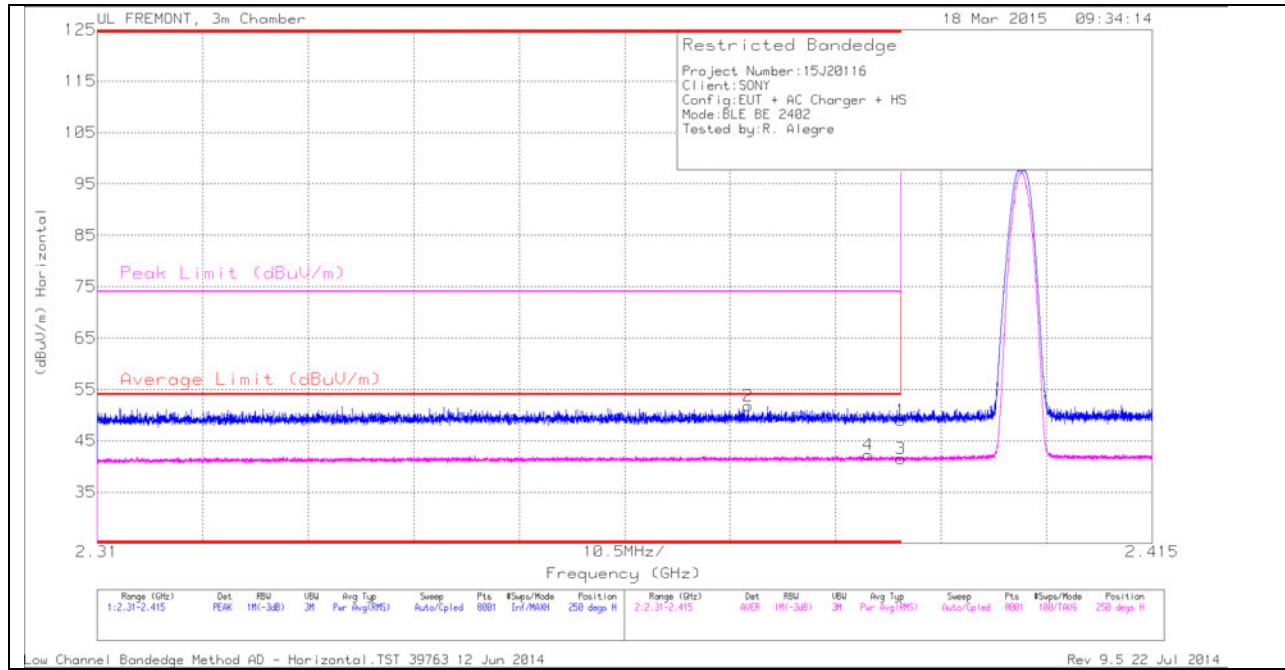

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.06	PK	32	-23.1	0	48.96	-	-	74	-25.04	250	370	H
2	* 2.375	42.99	PK	31.9	-23.1	0	51.79	-	-	74	-22.21	250	370	H
3	* 2.39	30.54	RMS	32	-23.1	2.09	41.53	54	-12.47	-	-	250	370	H
4	* 2.387	31.27	RMS	32	-23.1	2.09	42.26	54	-11.74	-	-	250	370	H

VERTICAL PEAK AND AVERAGE PLOT

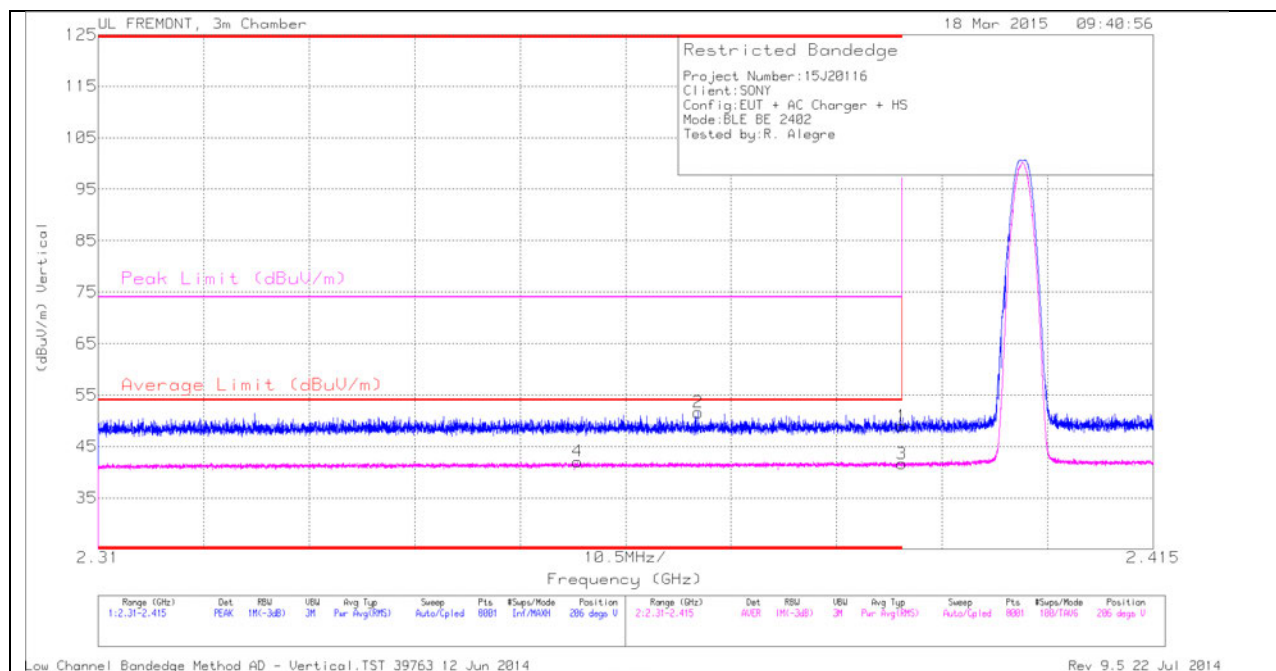


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 2.358	31.19	RMS	31.9	-23.1	2.09	42.08	54	-11.92	-	-	206	377	V
2	* 2.37	42.82	PK	31.9	-23.1	0	51.62	-	-	74	-22.38	206	377	V
1	* 2.39	40.08	PK	32	-23.1	0	48.98	-	-	74	-25.02	206	377	V
3	* 2.39	30.64	RMS	32	-23.1	2.09	41.63	54	-12.37	-	-	206	377	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

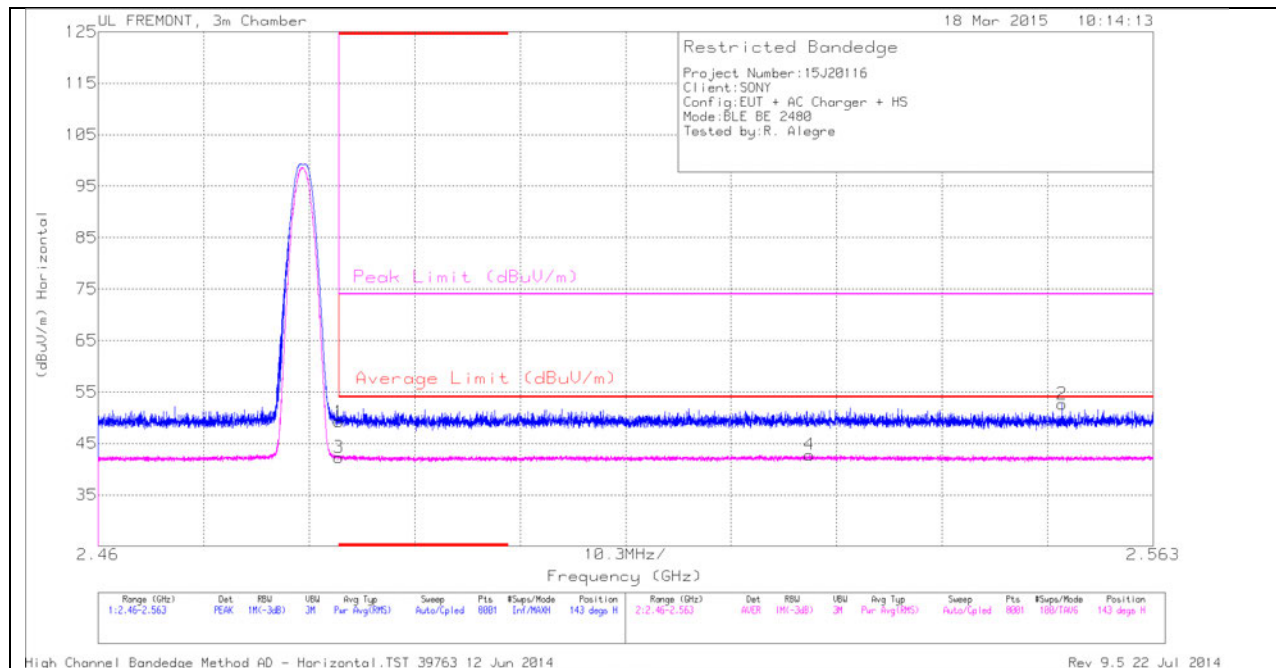

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.73	PK	32.3	-22.8	0	49.23	-	-	74	-24.77	143	347	H
3	* 2.484	30.71	RMS	32.3	-22.8	2.09	42.3	54	-11.7	-	-	143	347	H
4	2.529	30.92	RMS	32.4	-22.6	2.09	42.81	54	-11.19	-	-	143	347	H
2	2.554	42.98	PK	32.4	-22.7	0	52.68	-	-	74	-21.32	143	347	H


VERTICAL PEAK AND AVERAGE PLOT

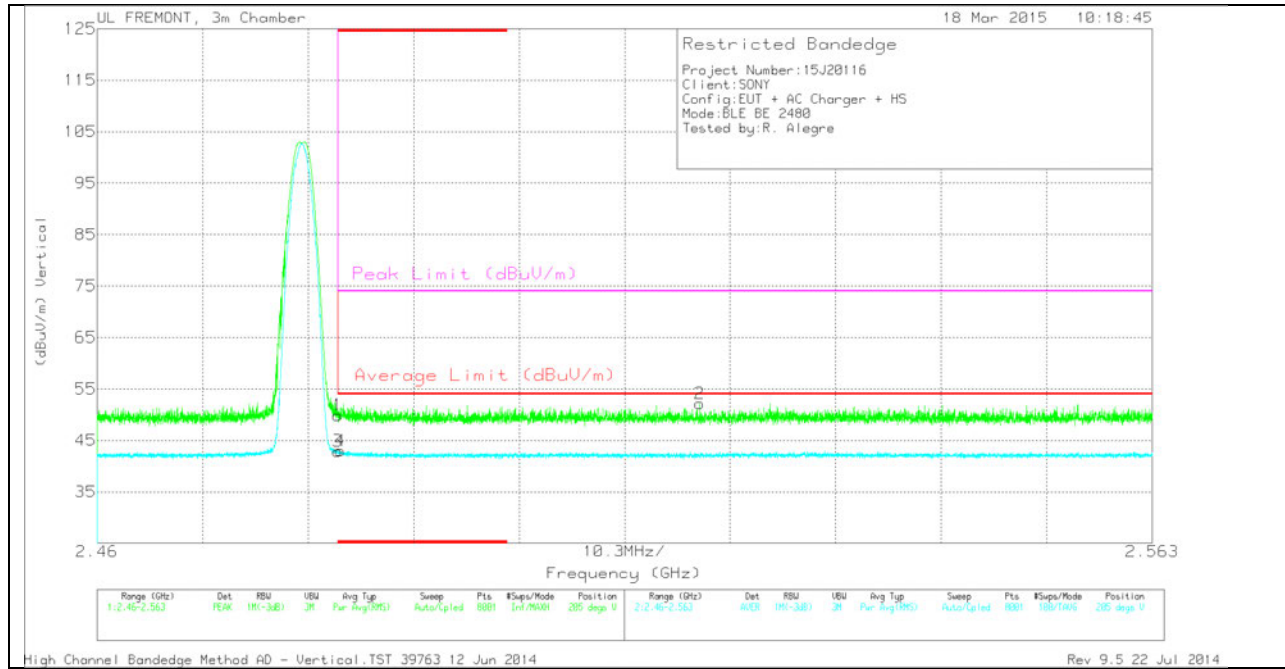

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.36	PK	32.3	-22.8	0	49.86	-	-	74	-24.14	205	350	V
3	* 2.484	31.31	RMS	32.3	-22.8	2.09	42.9	54	-11.1	-	-	205	350	V
4	* 2.484	31.38	RMS	32.3	-22.8	2.09	42.97	54	-11.03	-	-	205	350	V
2	2.519	42.66	PK	32.3	-22.8	0	52.16	-	-	74	-21.84	205	350	V

HARMONICS AND SPURIOUS EMISSIONS

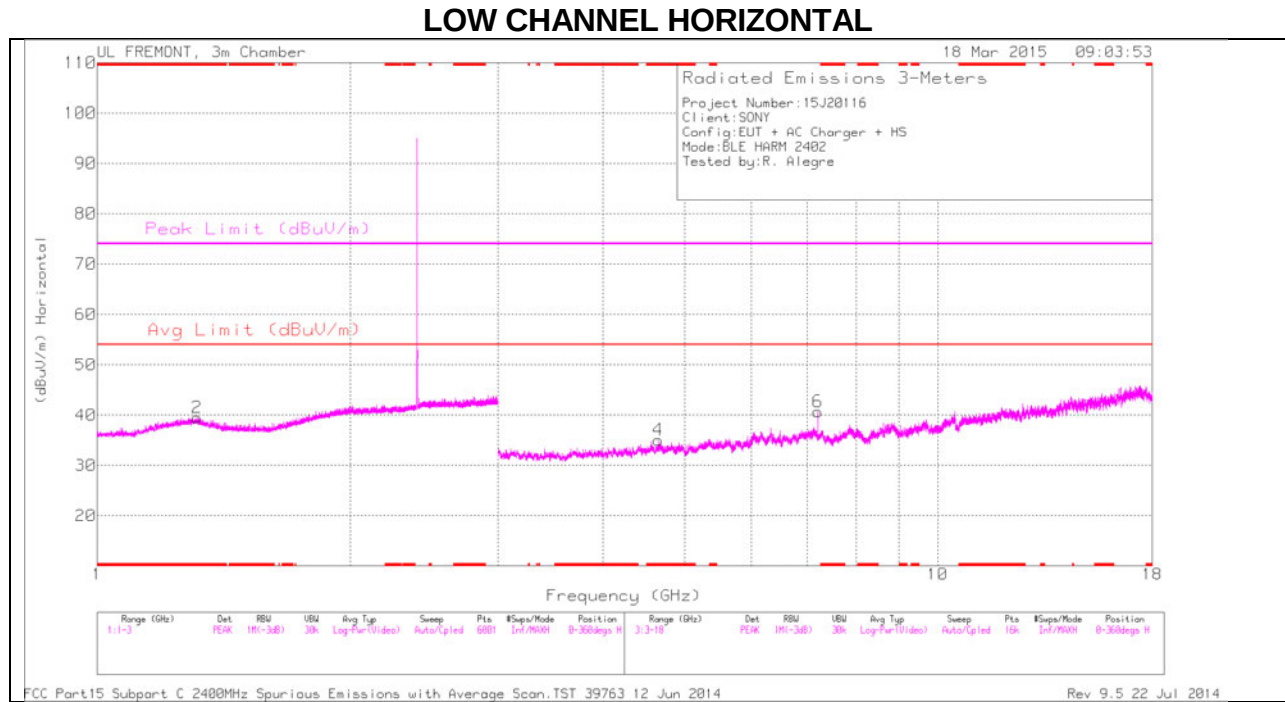

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

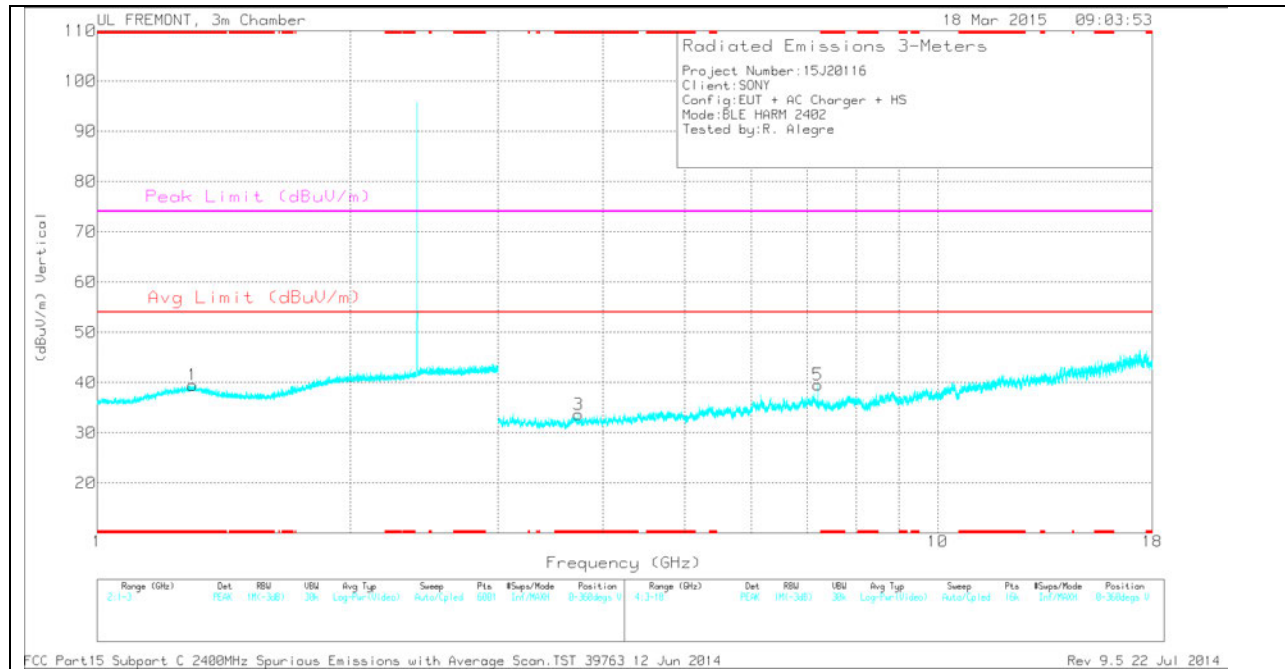

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.299	33.37	PK	29.9	-23.8	0	39.47	-	-	74	-34.53	0-360	200	V
2	* 1.316	33.63	PK	29.7	-23.8	0	39.53	-	-	74	-34.47	0-360	100	H
3	* 3.74	31.53	PK	33	-30.9	0	33.63	-	-	74	-40.37	0-360	100	V
4	* 4.654	31.97	PK	34	-30.9	0	35.07	-	-	74	-38.93	0-360	200	H
6	7.206	34.28	PK	35.6	-29.2	0	40.68	-	-	-	-	0-360	200	H
5	7.206	33.15	PK	35.6	-29.2	0	39.55	-	-	-	-	0-360	200	V


PK - Peak detector

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7.205	42.32	PK2	35.6	-29.2	0	48.72	-	-	74	-25.28	360	213	H
7.207	31.82	MAV1	35.6	-29.2	2.09	40.31	54	-13.69	-	-	360	213	H


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

MID CHANNEL HORIZONTAL

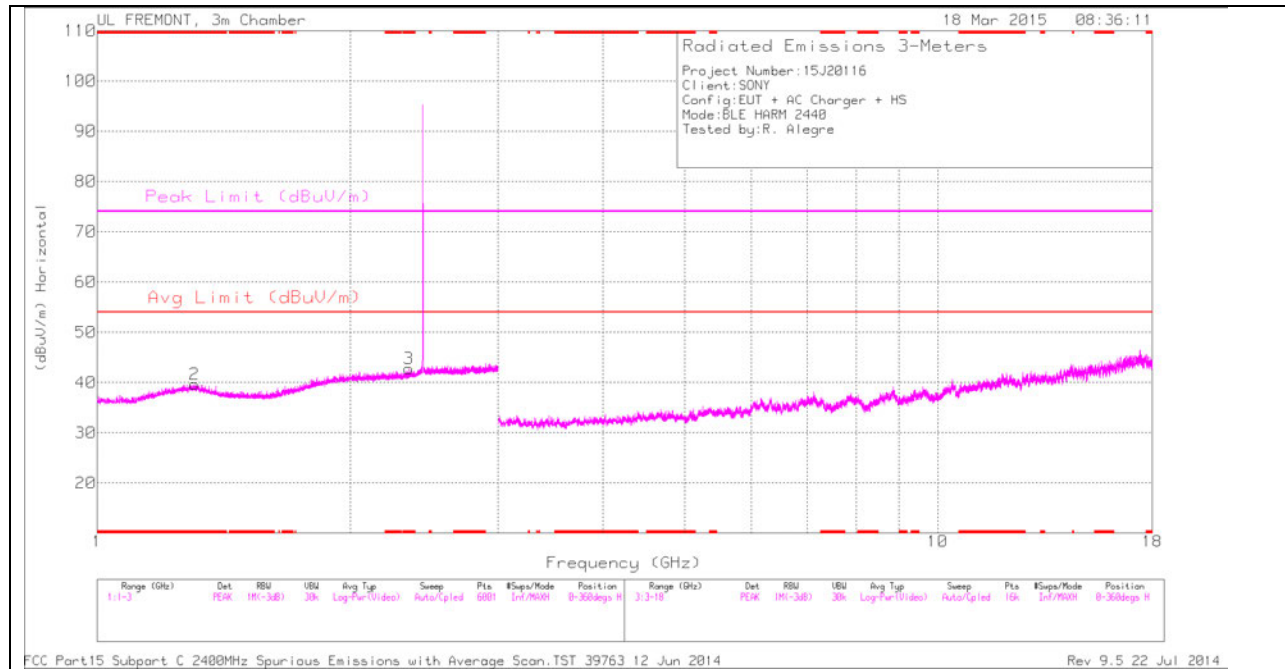

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

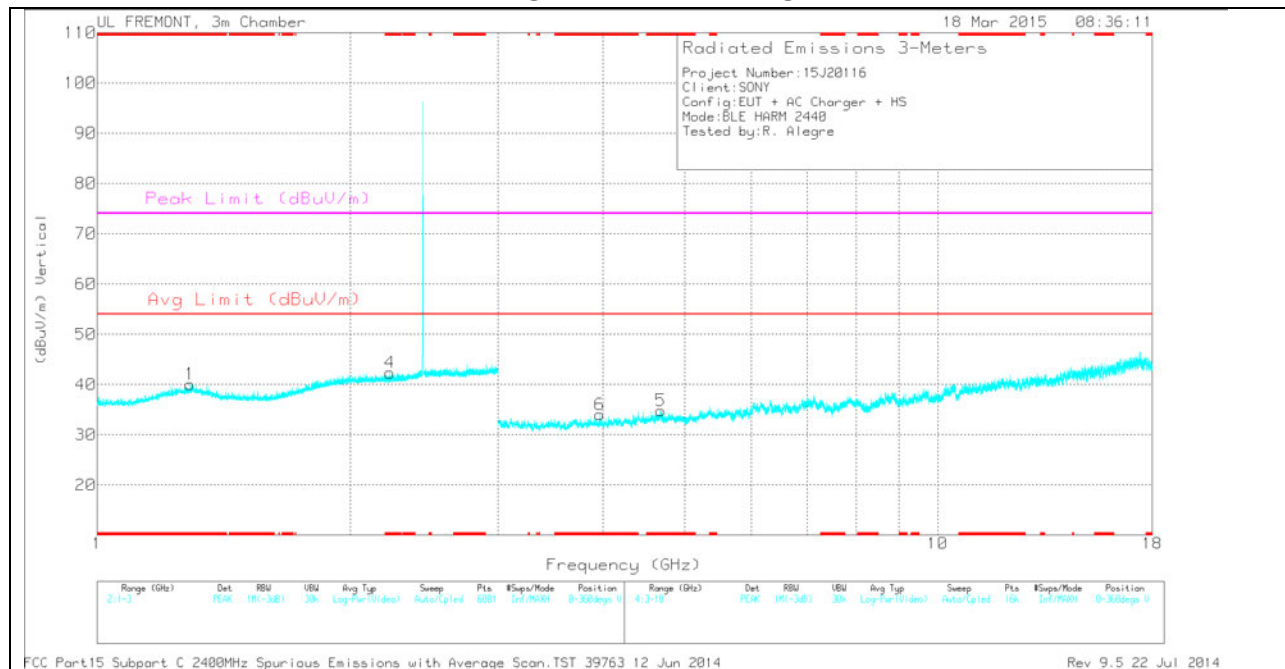

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.307	33.66	PK	29.8	-23.8	0	39.66	-	-	74	-34.34	0-360	200	H
3	* 2.35	34.14	PK	31.8	-23.2	0	42.74	-	-	74	-31.26	0-360	100	H
1	* 1.291	33.95	PK	29.8	-23.7	0	40.05	-	-	74	-33.95	0-360	100	V
4	* 2.231	33.86	PK	31.5	-23	0	42.36	-	-	74	-31.64	0-360	100	V
5	* 4.684	31.51	PK	34	-30.7	0	34.81	-	-	74	-39.19	0-360	200	V
6	* 3.967	31.91	PK	33.2	-31.1	0	34.01	-	-	74	-39.99	0-360	100	V

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

HIGH CHANNEL HORIZONTAL

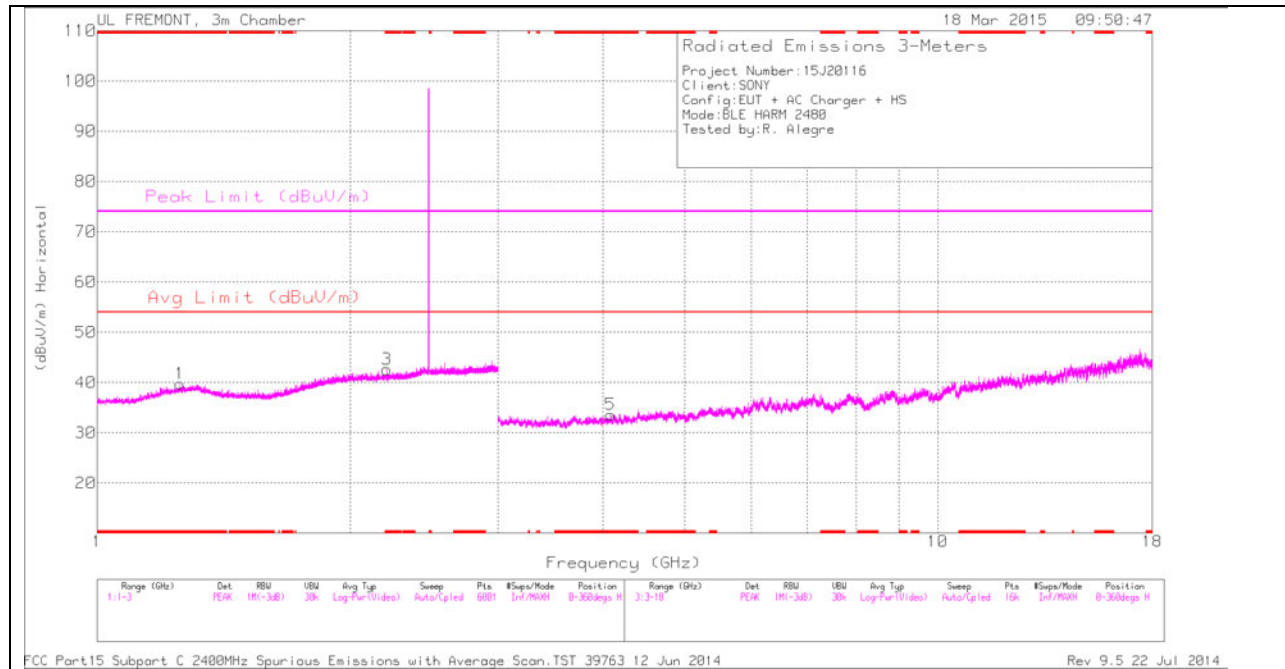

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

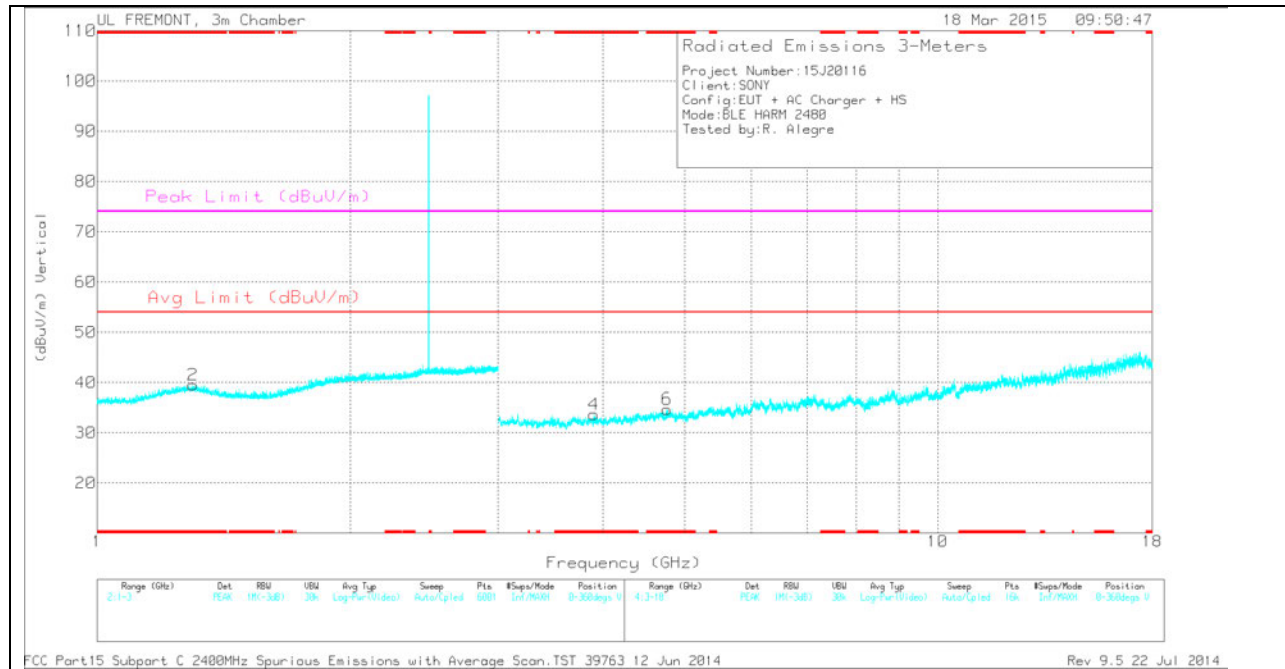

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filt /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.255	34.08	PK	29.5	-23.8	0	39.78	-	-	74	-34.22	0-360	200	H
2	* 1.3	33.44	PK	29.9	-23.8	0	39.54	-	-	74	-34.46	0-360	100	V
3	* 2.21	34.11	PK	31.4	-22.9	0	42.61	-	-	74	-31.39	0-360	100	H
4	* 3.9	31.64	PK	33.2	-31.2	0	33.64	-	-	74	-40.36	0-360	100	V
5	* 4.084	31.79	PK	33.3	-31.5	0	33.59	-	-	74	-40.41	0-360	100	H
6	* 4.762	31.69	PK	34	-31	0	34.69	-	-	74	-39.31	0-360	100	V


PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013


8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

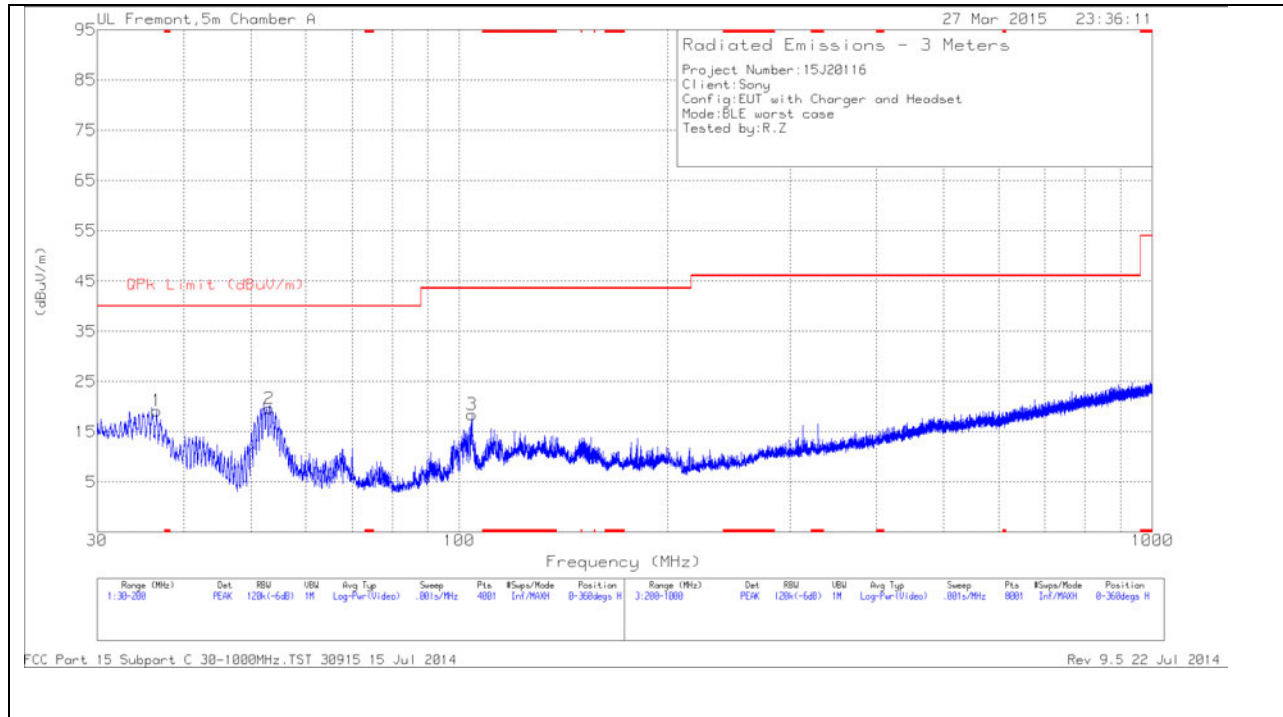

VERTICAL PLOT

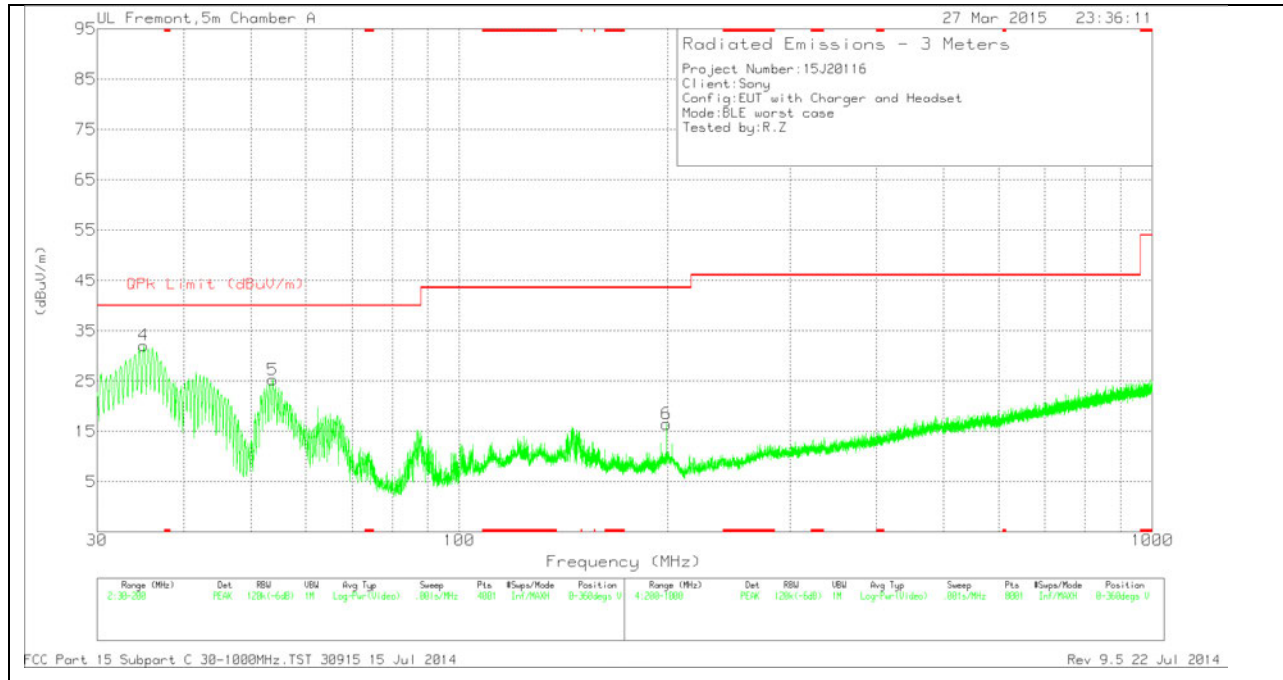

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	35.015	45.58	PK	17.7	-31.2	32.08	40	-7.92	0-360	101	V
1	36.5875	33.78	PK	16.6	-31.2	19.18	40	-20.82	0-360	400	H
2	53.1625	43.36	PK	7.3	-31	19.66	40	-20.34	0-360	400	H
5	53.8	49.07	PK	7.2	-31	25.27	40	-14.73	0-360	101	V
3	104.29	37.64	PK	11.3	-30.5	18.44	43.52	-25.08	0-360	200	H
6	199.0225	33.89	PK	12.5	-29.9	16.49	43.52	-27.03	0-360	101	V

PK - Peak detector

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

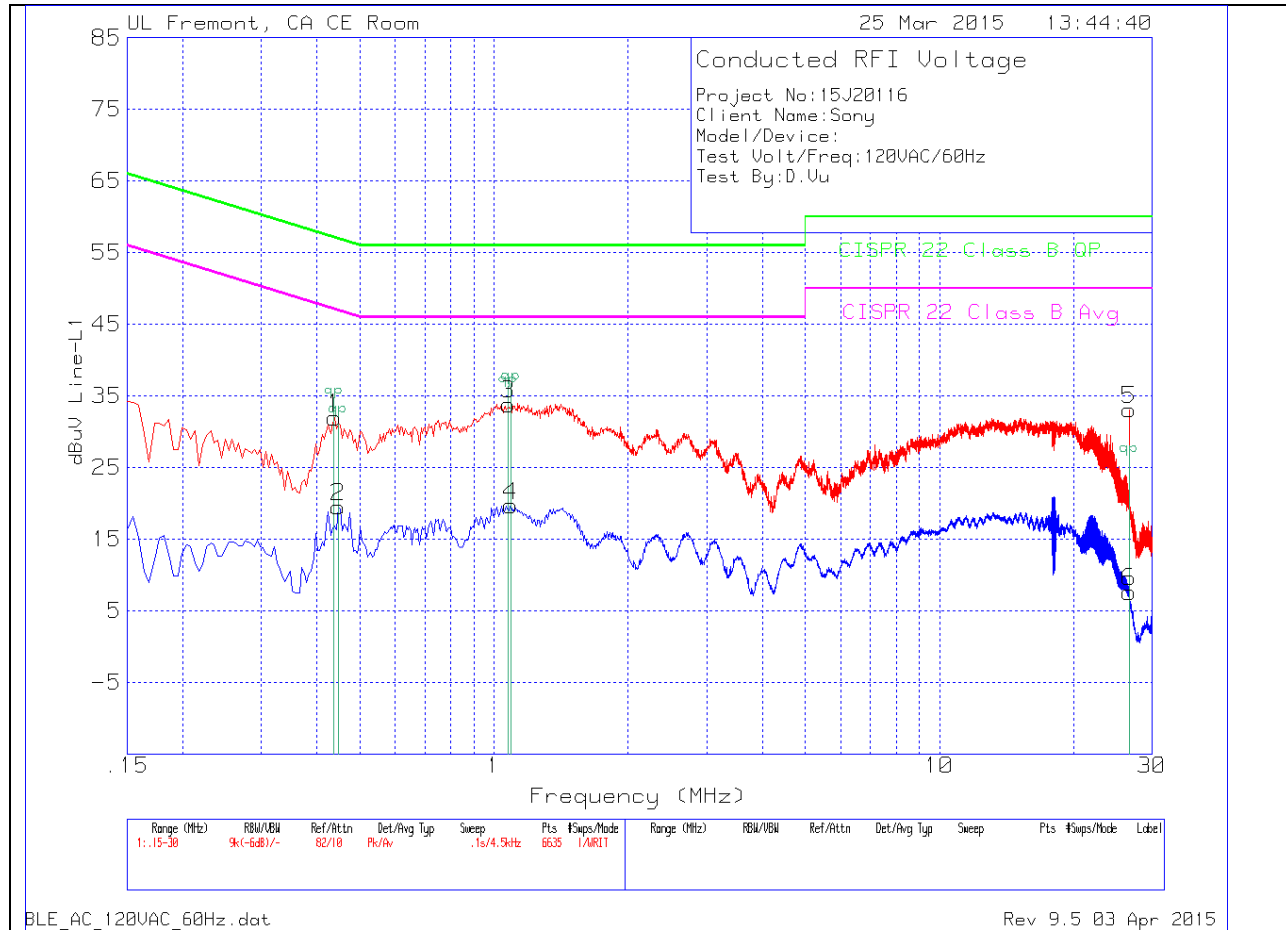


LINE 1 RESULTS

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.438	31.58	Pk	.4	0	31.98	57.1	-25.12		
2	.447	19.11	Av	.4	0	19.51	-	-	46.93	-27.42
3	1.077	33.64	Pk	.2	0	33.84	56	-22.16		
4	1.0905	19.52	Av	.2	0	19.72	-	-	46	-26.28
5	26.673	32.48	Pk	.3	.3	33.08	60	-26.92		
6	26.673	7.04	Av	.3	.3	7.64	-	-	50	-42.36

LINE 2 PLOT

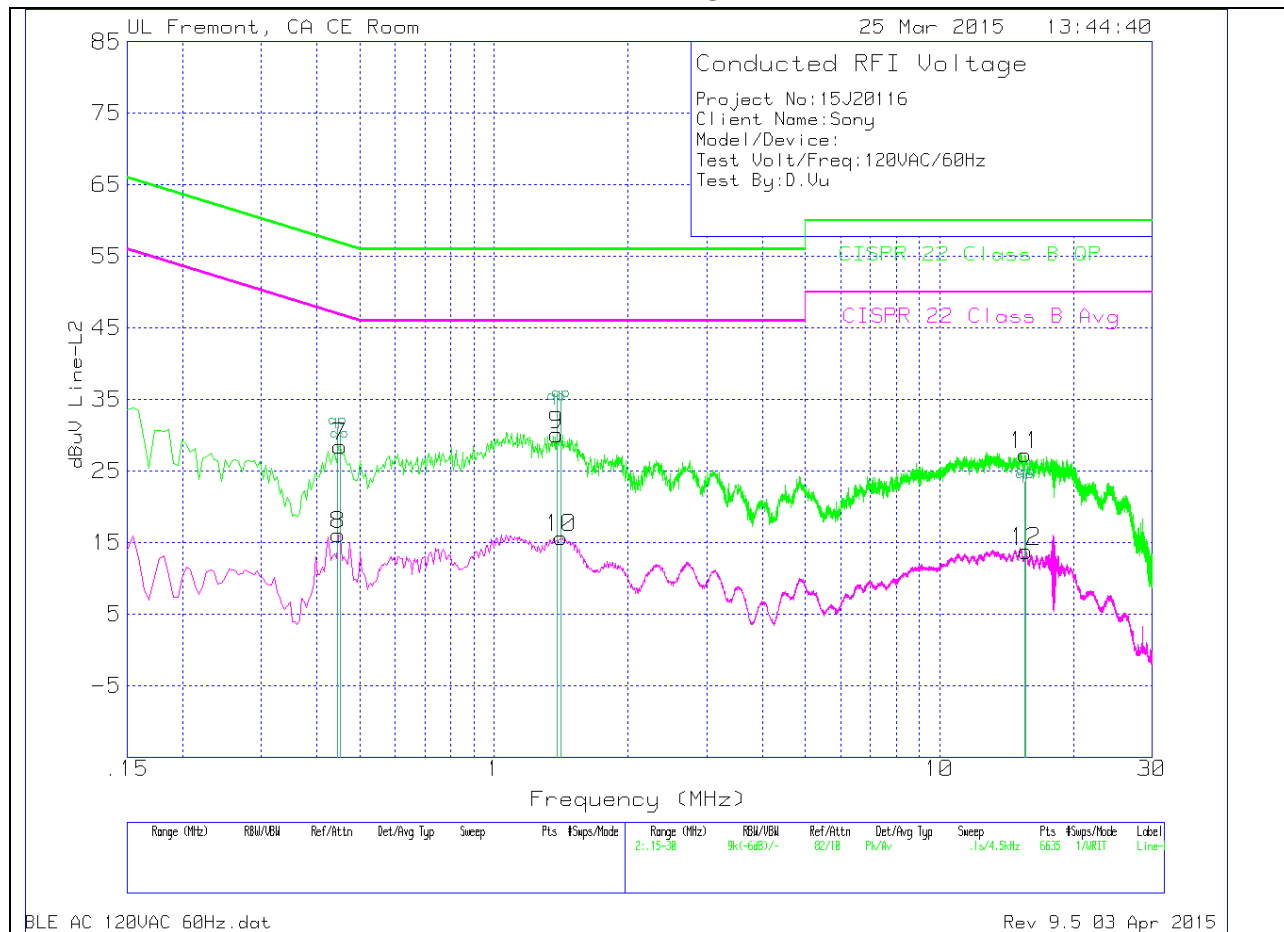

LINE 2 RESULTS

Range 2: Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
7	.4515	28.05	Pk	.4	0	28.45	56.85	-28.4		
8	.447	15.7	Av	.4	0	16.1	-	-	46.93	-30.83
9	1.383	29.82	Pk	.2	.1	30.12	56	-25.88		
10	1.4145	15.42	Av	.2	.1	15.72	-	-	46	-30.28
11	15.5715	26.79	Pk	.3	.2	27.29	60	-32.71		
12	15.648	13.31	Av	.3	.2	13.81	-	-	50	-36.19