



**FCC CFR47 PART 15 SUBPART C**

**ANT+  
CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC**

**FCC ID: PY7-PM0794**

**REPORT NUMBER: 15J20275-E6 Revision A  
ISSUE DATE: MAY 05, 2015**

**Prepared for  
SONY MOBILE COMMUNICATIONS, INC.  
1-8-15 KONAN, MINATO-KU  
TOKYO, 108-0075 JAPAN**

**Prepared by  
UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	04/25/15	Initial Issue	CHOON OOI
A	04/30/15	Updated Section 5, & Revised Antenna Gain	CHOON OOI

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY.....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH .....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP .....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. LIMITS AND RESULTS .....</b>	<b>11</b>
7.1. <i>99% BANDWIDTH.....</i>	<i>11</i>
7.2. <i>TRANSMITTER RADIATED EMISSIONS.....</i>	<i>12</i>
7.2.1. <i>FUNDAMENTAL FREQUENCY RADIATED EMISSION .....</i>	<i>13</i>
7.2.2. <i>TRANSMITTER RESTRICTED BAND EDGES .....</i>	<i>13</i>
7.3. <i>SPURIOUS BELOW 1 GHz.....</i>	<i>13</i>
<b>8. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>14</b>
<b>9. SETUP PHOTOS.....</b>	<b>15</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC  
**SERIAL NUMBER:** 159243-6 (Conducted), 153033-5 (Radiated)  
**DATE TESTED:** MARCH 9-27, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



CHOON OOI  
CONSUMER TECHNOLOGY DIVISION  
WiSE PROJECT LEAD  
UL Verification Services Inc.

STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WiSE LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input checked="" type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC.

The model FCC ID: PY7-PM0794 shares the same enclosure and circuit board as mode FCC ID: PY7-PM0793. The unlicensed radios (WLAN/BT/NFC/ANT+) including antenna and GPS receiver, are identical between the two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: PY7-PM0793 data remains representative of this model (FCC ID: PY7-PM0794), FCC ID: PY7-PM0794 leveraged test data from FCC ID: PY7-PM0793.

### 5.2. MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.4dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Frequency Range (MHz)	Mode	Peak E-field Strength (dBuV/m)	Avg E-field Strength (dBuV/m)	Distance (m)
2403 - 2480	ANT +	91.22	90.99	3.00

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	DOC
Earphone	SONY	MH410C	N/A	DOC


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is set to continuously transmit in ANT + test mode



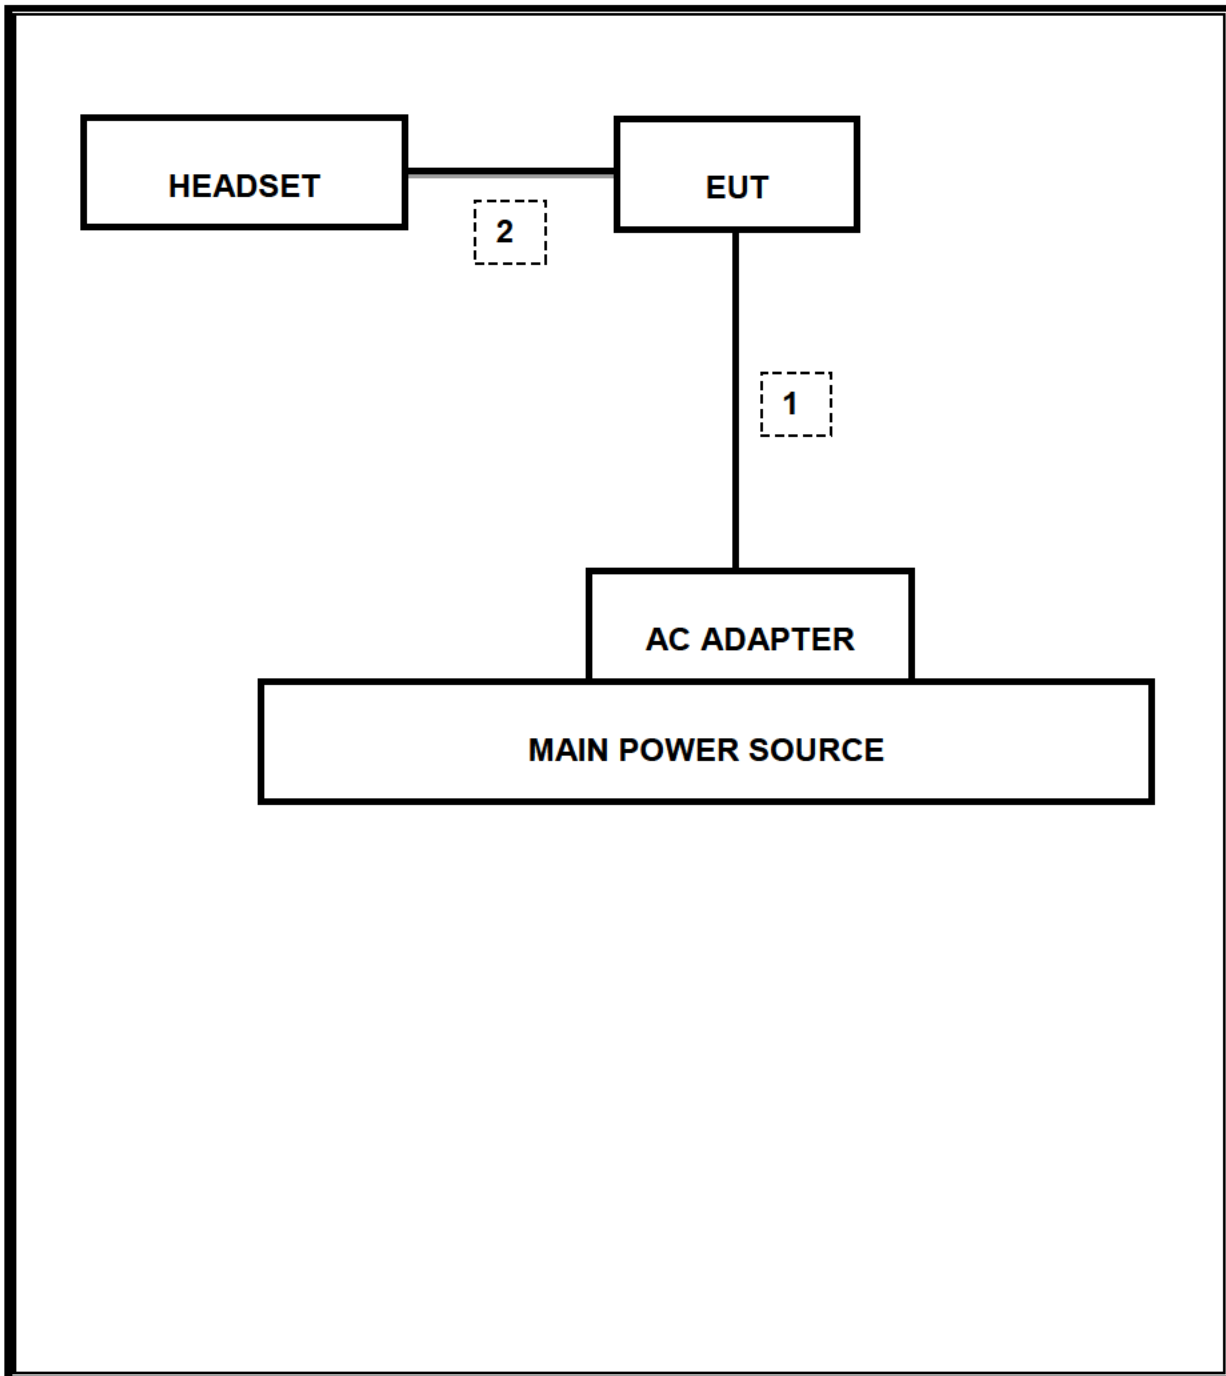

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	12/08/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/15
RF Preampifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preampifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	09/03/15
RF Preampifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/16

## 7. LIMITS AND RESULTS

### 7.1. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

## 7.2. TRANSMITTER RADIATED EMISSIONS

### TEST PROCEDURE

ANSI C63.4

### LIMIT

IC RSS-210, A2.9  
FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz .....	50	500
2400–2483.5 MHz .....	50	500
5725–5875 MHz .....	50	500
24.0–24.25 GHz .....	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490 .....	2400/F(kHz)	300
0.490-1.705 .....	24000/F(kHz)	30
1.705-30.0 .....	30	30
30-88 .....	100 **	3
88-216 .....	150 **	3
216-960 .....	200 **	3
Above 960 .....	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

**RESULTS**

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

**7.2.1. FUNDAMENTAL FREQUENCY RADIATED EMISSION**

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

**7.2.2. TRANSMITTER RESTRICTED BAND EDGES**

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

**HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz**

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

**7.3. SPURIOUS BELOW 1 GHz**

Please refer to ANT+ test report of FCC ID: PY7-PM0793.

## 8. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

ANSI C63.4 - 2009

### RESULTS

Please refer to ANT+ test report of FCC ID: PY7-PM0793.