



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE + BLUETOOTH + DTS/UNII a/b/g/n/ac + ANT+ and NFC

FCC ID: PY7-PM0793

REPORT NUMBER: 15J20116-E5

ISSUE DATE: APRIL 1, 2015

Prepared for  
SONY MOBILE COMMUNICATIONS, INC.  
1-8-15 KONAN, MINATO-KU  
TOKYO, 108-0075 JAPAN

Prepared by  
UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	4/1/15	Initial Issue	CHOON OOI

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	7
4.2. <i>SAMPLE CALCULATION</i> .....	7
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	8
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	12
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	14
5.5. <i>DESCRIPTION OF TEST SETUP</i> .....	15
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>17</b>
<b>7. SUMMARY TABLE .....</b>	<b>18</b>
<b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b>	<b>19</b>
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i> .....	19
8.2. <i>DUTY CYCLE PLOTS</i> .....	19
<b>9. MEASUREMENT METHOD.....</b>	<b>22</b>
<b>10. ANTENNA PORT TEST RESULTS .....</b>	<b>23</b>
10.1. <i>6 dB BANDWIDTH</i> .....	23
10.1.1. 802.11a MODE IN THE 5.8 GHz BAND .....	23
10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND .....	23
10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND .....	24
10.1.4. 802.11ac HT80 MODE IN THE 5.8 GHz BAND .....	24
10.1.5. 6 dB BANDWIDTH MID CH PLOTS.....	25
10.2. <i>26 dB BANDWIDTH</i> .....	27
10.2.1. 802.11a MODE IN THE 5.2 GHz BAND .....	27
10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND .....	27
10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND .....	27
10.2.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND .....	27
10.2.5. 802.11a MODE IN THE 5.3 GHz BAND .....	28
10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND .....	28
10.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND .....	28
10.2.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND .....	28
10.2.9. 802.11a MODE IN THE 5.5 GHz BAND .....	29

10.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND .....	29
10.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND .....	29
10.2.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND .....	29
10.2.13. 802.11a MODE IN THE 5.8 GHz BAND .....	30
10.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND .....	30
10.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND .....	30
10.2.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND .....	30
10.2.17. 26 dB BANDWIDTH PLOTS .....	31
10.3. 99% BANDWIDTH .....	38
10.3.1. 802.11a MODE IN THE 5.2 GHz BAND .....	38
10.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND .....	38
10.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND .....	38
10.3.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND .....	38
10.3.5. 802.11a MODE IN THE 5.3 GHz BAND .....	39
10.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND .....	39
10.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND .....	39
10.3.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND .....	39
10.3.9. 802.11a MODE IN THE 5.5 GHz BAND .....	40
10.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND .....	40
10.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND .....	40
10.3.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND .....	40
10.3.13. 802.11a MODE IN THE 5.8 GHz BAND .....	41
10.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND .....	41
10.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND .....	41
10.3.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND .....	41
10.3.17. 99% BANDWIDTH PLOTS .....	42
10.4. OUTPUT POWER AND PPSD .....	49
10.4.1. 802.11a MODE IN THE 5.2 GHz BAND .....	52
10.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND .....	53
10.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND .....	54
10.4.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND .....	55
10.4.5. 802.11a MODE IN THE 5.3 GHz BAND .....	56
10.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND .....	57
10.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND .....	58
10.4.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND .....	59
10.4.9. 802.11a MODE IN THE 5.5 GHz BAND .....	60
10.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND .....	61
10.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND .....	62
10.4.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND .....	63
10.4.13. 802.11a MODE STRADDLE CHANNEL 144 .....	64
10.4.14. 802.11n HT20 MODE STRADDLE CHANNEL 144 .....	67
10.4.15. 802.11n HT40 MODE STRADDLE CHANNEL 142 .....	70
10.4.16. 802.11ac80 MODE STRADDLE CHANNEL 138 .....	73
10.4.17. 802.11a MODE IN THE 5.8 GHz BAND .....	76
10.4.18. 802.11n HT20 MODE IN THE 5.8 GHz BAND .....	77
10.4.19. 802.11n HT40 MODE IN THE 5.8 GHz BAND .....	78
10.4.20. 802.11ac HT80 MODE IN THE 5.8 GHz BAND .....	79
10.4.21. OUTPUT POWER AND PPSD PLOTS .....	80
11. TRANSMITTER ABOVE 1 GHz.....	93
11.1. 5.2 GHz.....	94

11.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND .....	94
11.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	105
11.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	116
11.1.4.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND.....	124
11.1.	5.3 GHz.....	129
11.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND .....	129
11.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	140
11.1.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	151
11.1.4.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.3 GHz BAND.....	159
11.2.	5.5-5.6 GHz.....	164
11.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND .....	164
11.2.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	177
11.2.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	190
11.2.4.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.5 GHz BAND.....	203
11.3.	5.8 GHz.....	210
11.3.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND .....	210
11.3.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND.....	223
11.3.3.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.8 GHz BAND.....	236
11.3.4.	TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.8 GHz BAND.....	246
<b>12.</b>	<b>WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band).....</b>	<b>253</b>
<b>13.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>256</b>
<b>14.</b>	<b>DYNAMIC FREQUENCY SELECTION.....</b>	<b>261</b>
14.1.	OVERVIEW.....	261
14.1.1.	LIMITS.....	261
14.1.2.	TEST AND MEASUREMENT SYSTEM.....	265
14.1.3.	SETUP OF EUT.....	268
14.1.4.	DESCRIPTION OF EUT .....	269
14.2.	RESULTS FOR 20 MHz BANDWIDTH.....	271
14.2.1.	TEST CHANNEL .....	271
14.2.2.	RADAR WAVEFORM AND TRAFFIC .....	271
14.2.3.	OVERLAPPING CHANNEL TESTS .....	274
14.2.4.	MOVE AND CLOSING TIME .....	274
14.3.	RESULTS FOR 40 MHz BANDWIDTH.....	278
14.3.1.	TEST CHANNEL .....	278
14.3.2.	RADAR WAVEFORM AND TRAFFIC .....	278
14.3.3.	OVERLAPPING CHANNEL TESTS .....	281
14.3.4.	MOVE AND CLOSING TIME .....	281
14.3.5.	10-MINUTE BEACON MONITORING PERIOD .....	285
14.4.	RESULTS FOR 80 MHz BANDWIDTH.....	286
14.4.1.	TEST CHANNEL .....	286
14.4.2.	RADAR WAVEFORM AND TRAFFIC .....	286
14.4.3.	OVERLAPPING CHANNEL TESTS .....	289
14.4.4.	MOVE AND CLOSING TIME .....	289
14.4.5.	10-MINUTE BEACON MONITORING PERIOD .....	293
<b>15.</b>	<b>SETUP PHOTOS.....</b>	<b>294</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.

**EUT DESCRIPTION:** GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac + ANT+ and NFC

**SERIAL NUMBER:** CB5A23QZE2 (Conducted), CB5A246Q9P (Radiated)

**DATE TESTED:** MARCH 17 - 25, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:

---

CHOON OOI  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.

---

CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009. 789033 D02 General UNII Test Procedures New Rules v01

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber F
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber G
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber H

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 40000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE + BLUETOOTH, DTS/UNII a/b/g/n/ac + ANT+ and NFC

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range (MHz)	Mode	Total Output Power (dBm)	Total Output Power (mW)
5180-5240	802.11a	14.34	27.16
5180-5240	802.11n HT20	14.11	25.76
5190-5230	802.11n HT40	14.1	25.70
5210	802.11ac HT80	14.2	26.30
5260-5320	802.11a	14.44	27.80
5260-5320	802.11n HT20	14.43	27.73
5270-5310	802.11n HT40	14.4	27.54
5290	802.11ac HT80	14.26	26.67
5500-5700	802.11a	14.83	30.41
5500-5700	802.11n HT20	15.07	32.14
5510-5670	802.11n HT40	14.81	30.27
5530	802.11ac HT80	14.12	25.82
5745-5825	802.11a	14.9	30.90
5745-5825	802.11n HT20	14.88	30.76
5755-5795	802.11n HT40	14.54	28.44
5775	802.11ac HT80	14.65	29.17

The transmitter has average conducted output power (measured by power meter) as follows:

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr C0 (dBm)	Avg Pwr C1 (dBm)
UNII-1	802.11a	6 Mbps	36	5180	10.7	9.7
			40	5200	10.7	10.0
			44	5220	10.9	9.7
			48	5240	10.9	9.7
	802.11n (HT20)	6.5 Mbps	36	5180	10.8	9.6
			40	5200	10.8	9.9
			44	5220	10.8	10.0
			48	5240	10.7	9.7
	802.11n (HT40)	13.5 Mbps	38	5190	10.8	10.0
			46	5230	10.8	9.7
UNII-2A	802.11ac (VHT20)	6.5 Mbps	36	5180	10.8	9.7
			40	5200	10.9	9.7
			44	5220	10.8	10.0
			48	5240	10.8	9.8
	802.11ac (VHT40)	13.5 Mbps	38	5190	10.6	9.9
			46	5230	10.7	9.8
	802.11ac (VHT80)	29.3 Mbps	42	5210	10.9	9.9
	802.11a	6 Mbps	52	5260	10.9	10.0
			56	5280	10.8	9.8
			60	5300	10.9	9.6
			64	5320	10.7	9.5
UNII-2C	802.11n (HT20)	6.5 Mbps	52	5260	11.0	10.1
			56	5280	10.6	9.5
			60	5300	10.7	9.8
			64	5320	10.8	9.6
	802.11n (HT40)	13.5 Mbps	54	5270	11.0	10.0
			62	5310	10.7	9.6
	802.11ac (VHT20)	6.5 Mbps	52	5260	10.8	10.0
			56	5280	10.7	9.5
			60	5300	10.6	9.4
			64	5320	10.9	9.5
	802.11ac (VHT40)	13.5 Mbps	54	5270	11.0	10.0
			62	5310	10.7	9.7
	802.11ac (VHT80)	29.3 Mbps	58	5290	10.6	9.3
UNII-2C	802.11a	6 Mbps	100	5500	11.0	10.1
			104	5520	11.0	10.0
			108	5540	11.3	10.0
			112	5560	11.4	10.0

			116	5580	11.5	9.8	
			120	5600	11.5	9.7	
			124	5620	11.4	9.5	
			128	5640	11.4	9.3	
			132	5660	11.4	9.4	
			136	5680	11.4	9.3	
			140	5700	11.4	9.3	
			144	5720	11.4	9.4	
			100	5500	11.4	9.7	
			104	5520	11.2	10.0	
			108	5540	11.4	10.1	
			112	5560	11.4	10.1	
			116	5580	11.4	9.8	
			120	5600	11.5	9.7	
			124	5620	11.3	9.5	
			128	5640	11.4	9.5	
			132	5660	11.3	9.5	
			136	5680	11.3	9.3	
			140	5700	11.2	9.2	
			144	5720	11.2	9.2	
			102	5510	11.2	9.8	
			110	5550	11.3	9.9	
			118	5590	11.4	9.7	
			126	5630	11.4	9.4	
			134	5670	11.4	9.4	
			142	5710	11.4	9.4	
			100	5500	11.2	9.6	
			104	5520	11.2	10.0	
			108	5540	11.3	10.0	
			112	5560	11.4	10.0	
			116	5580	11.3	9.8	
			120	5600	11.4	9.7	
			124	5620	11.4	9.4	
			128	5640	11.4	9.3	
			132	5660	11.4	9.3	
			136	5680	11.5	9.2	
			140	5700	11.3	9.2	
			144	5720	11.1	9.2	
			102	5510	11.3	10.0	
			110	5550	11.4	10.0	
			118	5590	11.4	9.6	
			126	5630	11.5	9.4	
			134	5670	11.5	9.2	
			142	5710	11.4	9.2	

UNII-3 or §15.247	802.11ac (VHT80)	29.3 Mbps	106	5530	11.2	10.0	
			122	5610	11.3	9.4	
			138	5690	11.1	9.1	
	802.11a	6 Mbps	149	5745	10.8	9.0	
			153	5765	10.8	9.1	
			157	5785	10.8	9.3	
			161	5805	10.6	9.2	
			165	5825	10.8	9.4	
	802.11n (HT20)	6.5 Mbps	149	5745	11.0	9.2	
			153	5765	10.9	9.2	
			157	5785	11.0	9.5	
			161	5805	10.6	9.1	
			165	5825	10.9	9.5	
	802.11n (HT40)	13.5 Mbps	151	5755	10.8	9.2	
			159	5795	10.9	9.2	
	802.11ac (VHT20)	6.5 Mbps	149	5745	11.0	9.1	
			153	5765	11.0	9.2	
			157	5785	10.9	9.2	
			161	5805	10.8	9.3	
			165	5825	10.9	9.4	
	802.11ac (VHT40)	13.5 Mbps	151	5755	10.8	9.2	
			159	5795	10.9	9.3	
	802.11ac (VHT80)	29.3 Mbps	155	5775	10.7	9.0	

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, please refer to section 10.4 for antenna gain information.

#### List of test reduction and modes covering other modes:

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5180 - 5240	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5180 - 5240	802.11HT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5180 - 5240	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5190 - 5230	802.11n HT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5190 - 5230	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5210	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5210	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5260 - 5320	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5260 - 5320	802.11HT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5260 - 5320	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5270 - 5310	802.11n HT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5270 - 5310	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5290	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5290	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5500 - 5700	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5500 - 5700	802.11HT20 1TX	802.11n HT20 2TX CDD
5500 - 5700	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5500 - 5700	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5500 - 5700	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5500 - 5700	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5510 - 5670	802.11n HT40 1TX	802.11n HT40 2TX CDD
5510 - 5670	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5510 - 5670	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5510 - 5670	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5510 - 5670	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5530	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5530	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

Authorized Frequency Band (Antenna port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
5745 - 5825	802.11a legacy 1TX/STBC 2TX	802.11a 2TX CDD
5745 - 5825	802.11HT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11HT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 1TX	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 2TX STBC/SDM	802.11n HT20 2TX CDD
5745 - 5825	802.11ac VHT20 2TX CDD/Tx BF	802.11n HT20 2TX CDD
5755 - 5795	802.11n HT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11n HT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 1TX	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 2TX STBC/SDM	802.11n HT40 2TX CDD
5755 - 5795	802.11ac VHT40 2TX CDD/Tx BF	802.11n HT40 2TX CDD
5775	802.11ac VHT80 1TX	802.11ac VHT80 2TX CDD
5775	802.11ac VHT80 2TX STBC/SDM/Tx BF	802.11ac VHT80 2TX CDD

## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps  
802.11n HT20mode: MCS0  
802.11n HT40mode: MCS0  
802.11ac VHT80mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	SONY	MH410C	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

### TEST SETUP

The EUT is setup as a stand-alone device.

**SETUP DIAGRAM FOR TESTS**

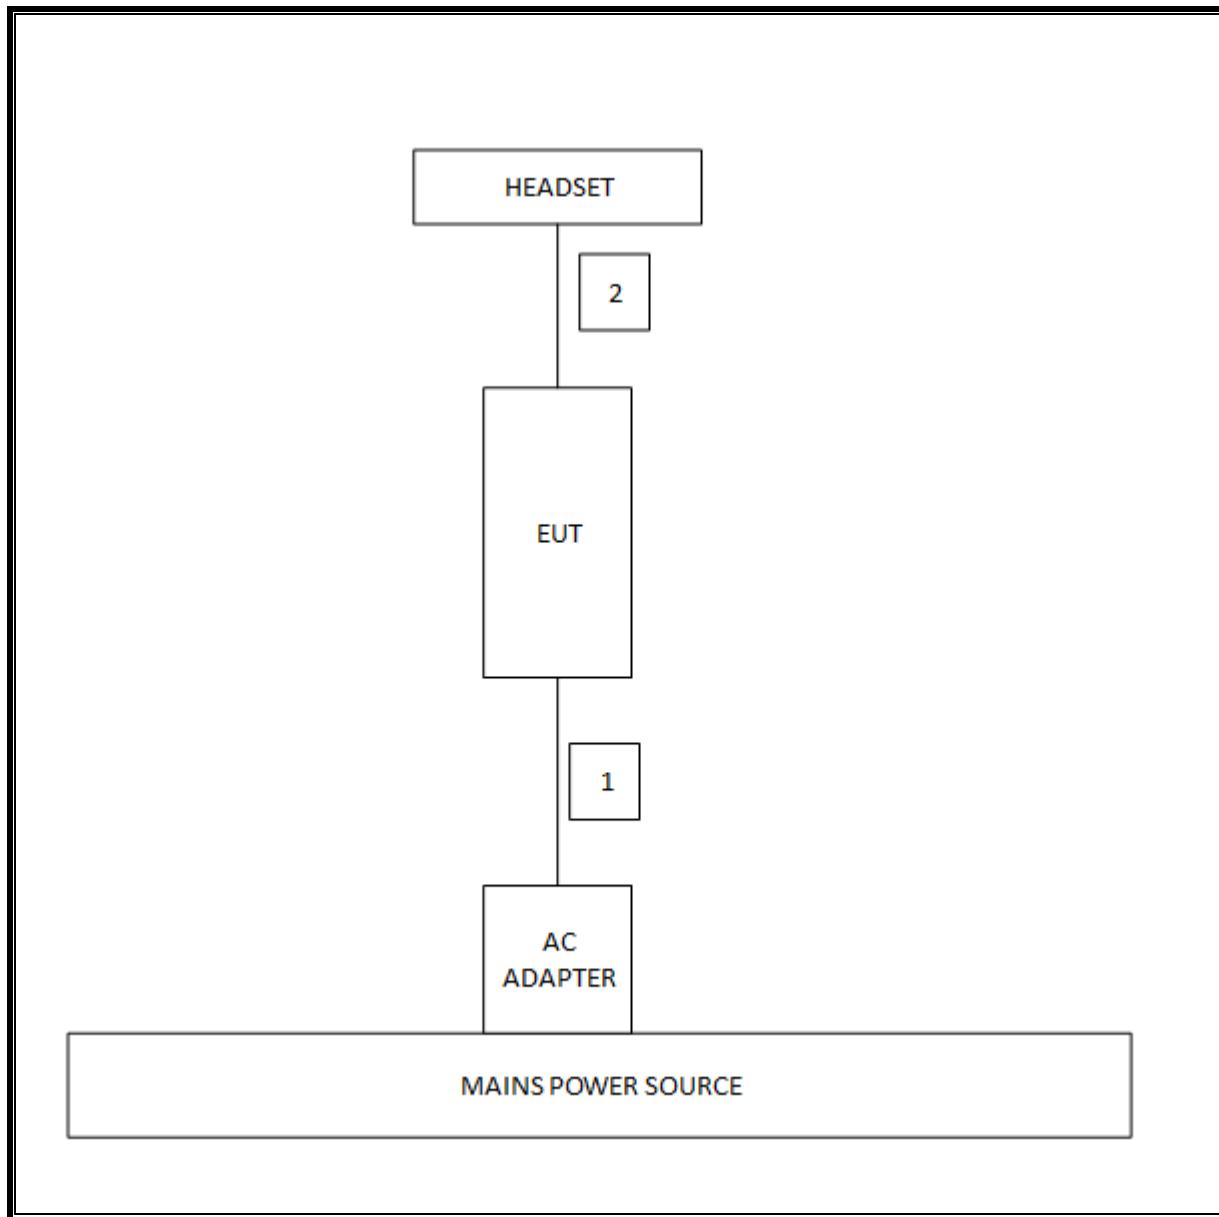

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	100773	08/15/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	12/08/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	09/03/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 18GHz	Miteq	AFS42-00101800-25-S-42	1818466	05/09/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

## 7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.407 (a)	Occupied Band width (26dB)	N/A	Conducted	Pass	82.5MHz
14.407	6dB Band width	>500KHz		Pass	76.08MHz
15.407 (a)(2)	TX Cond. Power 5.15-2.25, 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		Pass	15.07dBm
15.407 (a)(3)	TX Cond. Power 5.725-5.850	< 30dBm or 17+10Log(OBW)		Pass	14.88dBm
15.407 (a)(5)	PSD (5.2,5.3,5.5GHz)	<11dBm		Pass	3.49dBm
15.407 (a)(5)	PSD	30dBm per 500kHz		Pass	1.25dBm
15.207 (a)	AC Power Line conducted emissions	Section 10		Pass	44.76dBuV(AV)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	49.66dBuV/m
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Radiated / Conducted	Pass	N/A

## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.


### PROCEDURE



KDB 789033 Zero-Span Spectrum Analyzer Method.


#### 8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11a	3.12	3.15	0.992	99.2%	0.00	0.010
802.11n HT20	2.91	2.930	0.991	99.1%	0.00	0.010
802.11n HT40	1.42	1.442	0.983	98.3%	0.00	0.010
802.11ac HT80	0.68	0.698	0.971	97.1%	0.13	1.476

#### 8.2. DUTY CYCLE PLOTS

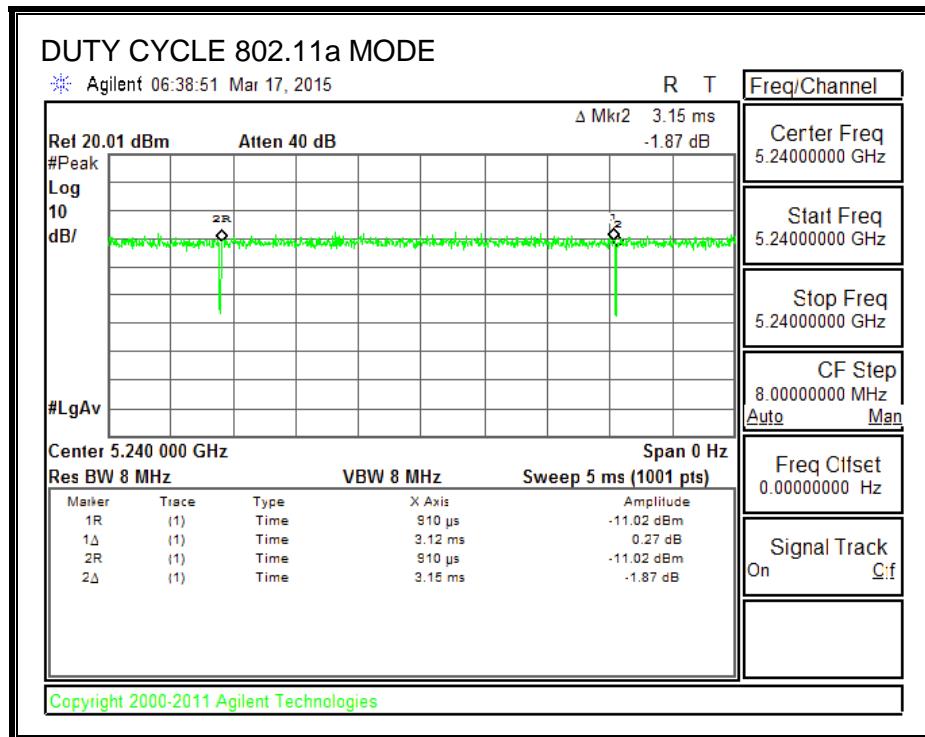

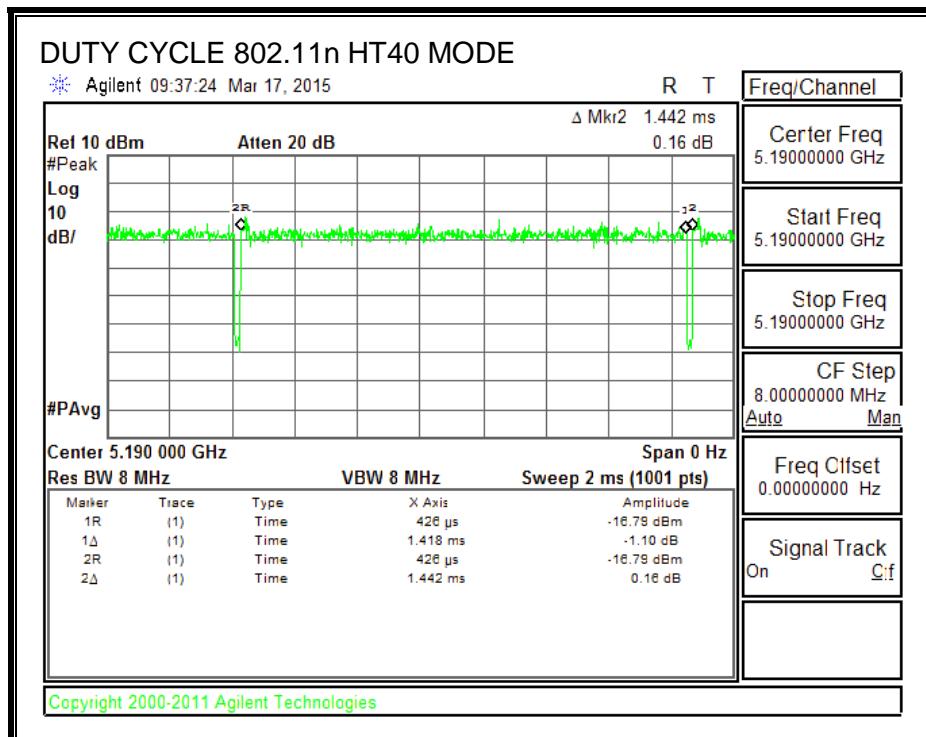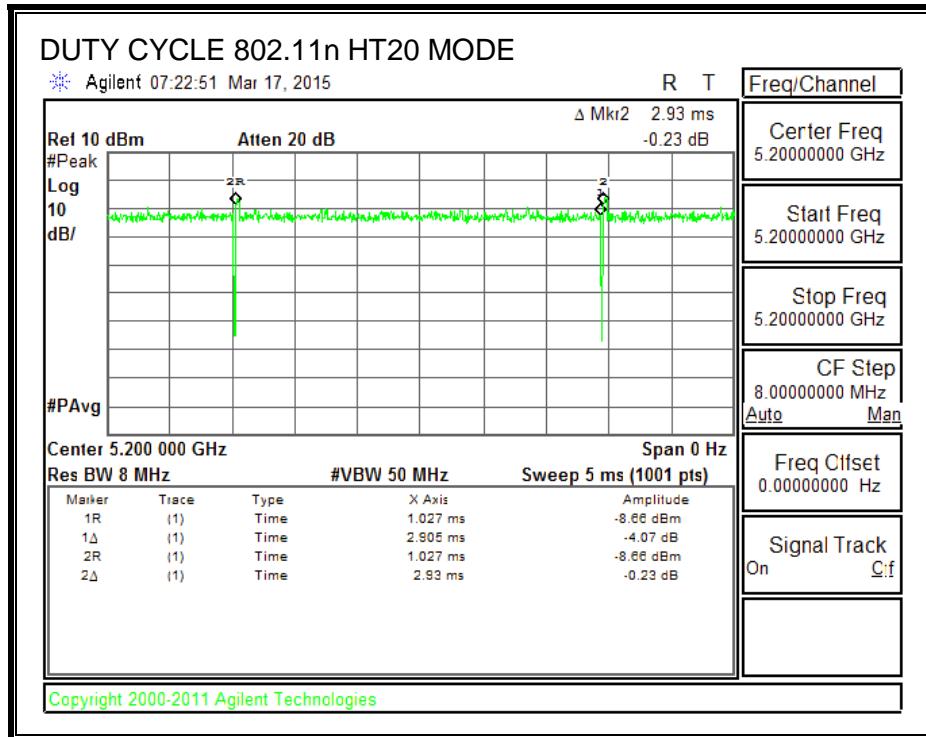

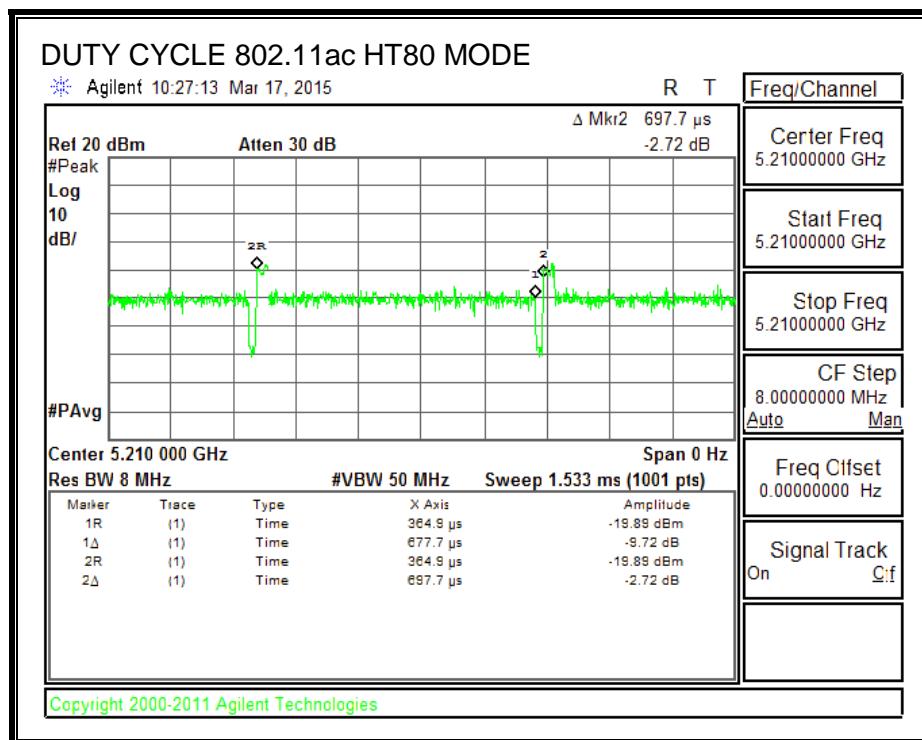

## 9. MEASUREMENT METHOD

789033 D02 General UNII Test Procedures New Rules v01

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.407

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to 789033 D02 General UNII Test Procedures New Rules v01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq$  3 x RBW, peak detector and max hold.

#### RESULTS

##### 10.1.1. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5745	16.44	16.44	0.5
Mid	5785	16.44	16.41	0.5
High	5825	16.41	16.44	0.5
Worst		16.41	16.41	

##### 10.1.2. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5745	17.64	17.70	0.5
Mid	5785	17.64	17.64	0.5
High	5825	17.64	17.67	0.5
Worst		17.64	17.64	

### 10.1.3. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5755	36.36	36.48	0.5
High	5795	36.30	36.42	0.5
Worst		36.30	36.42	0.5

### 10.1.4. 802.11ac HT80 MODE IN THE 5.8 GHz BAND


Channel	Frequency	6 dB Bandwidth CHAIN 0	6 dB Bandwidth CHAIN 1	Minimum Limit
	(MHz)	(MHz)	(MHz)	(MHz)
Low	5775	76.08	76.08	0.5
Worst				0.5

## 10.1.5. 6 dB BANDWIDTH MID CH PLOTS

### 6 dB BANDWIDTH Chain 0

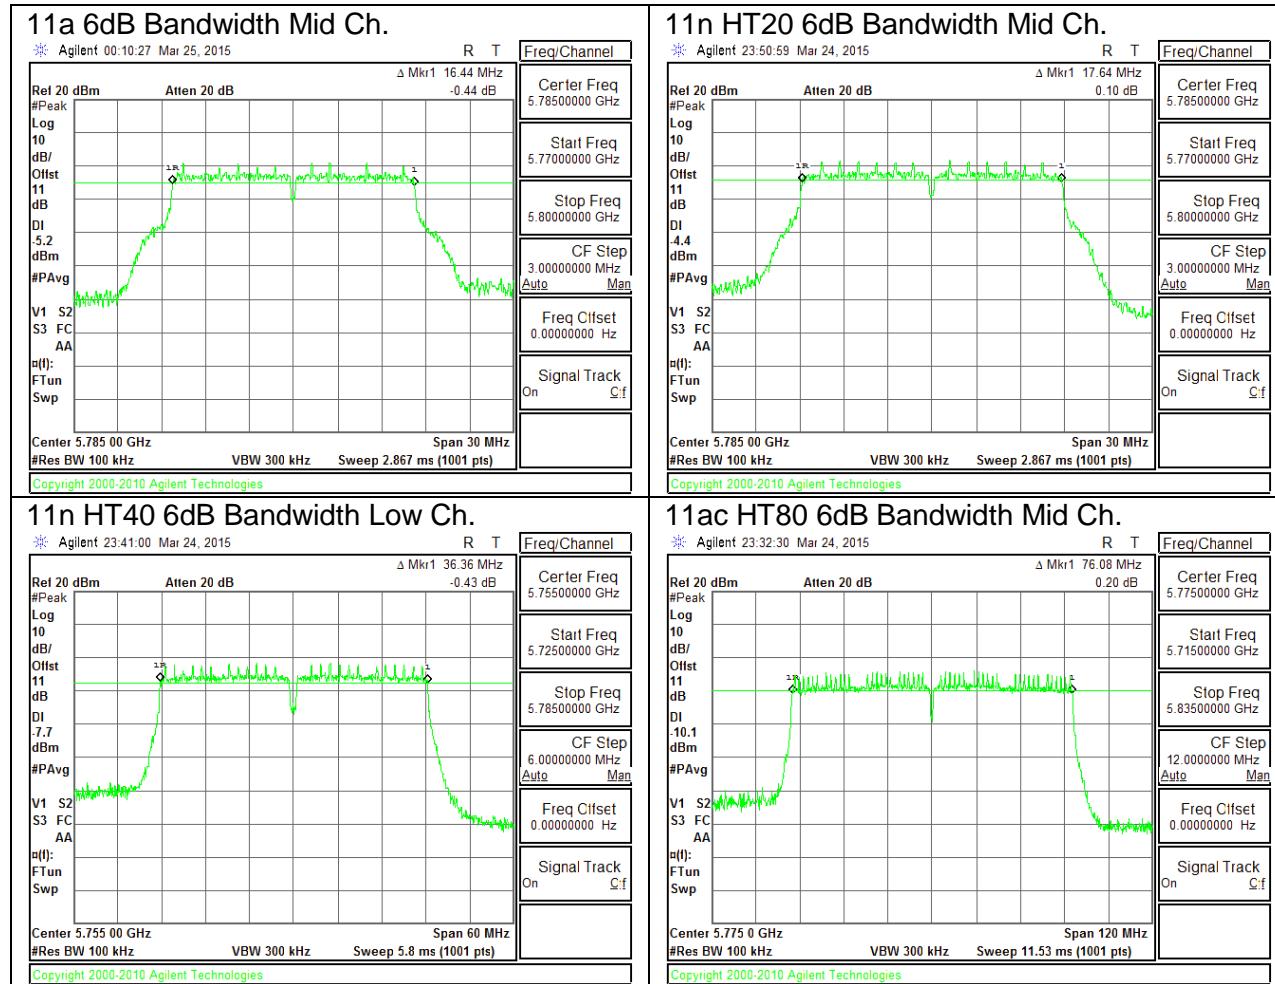

## 6 dB BANDWIDTH Chain 1

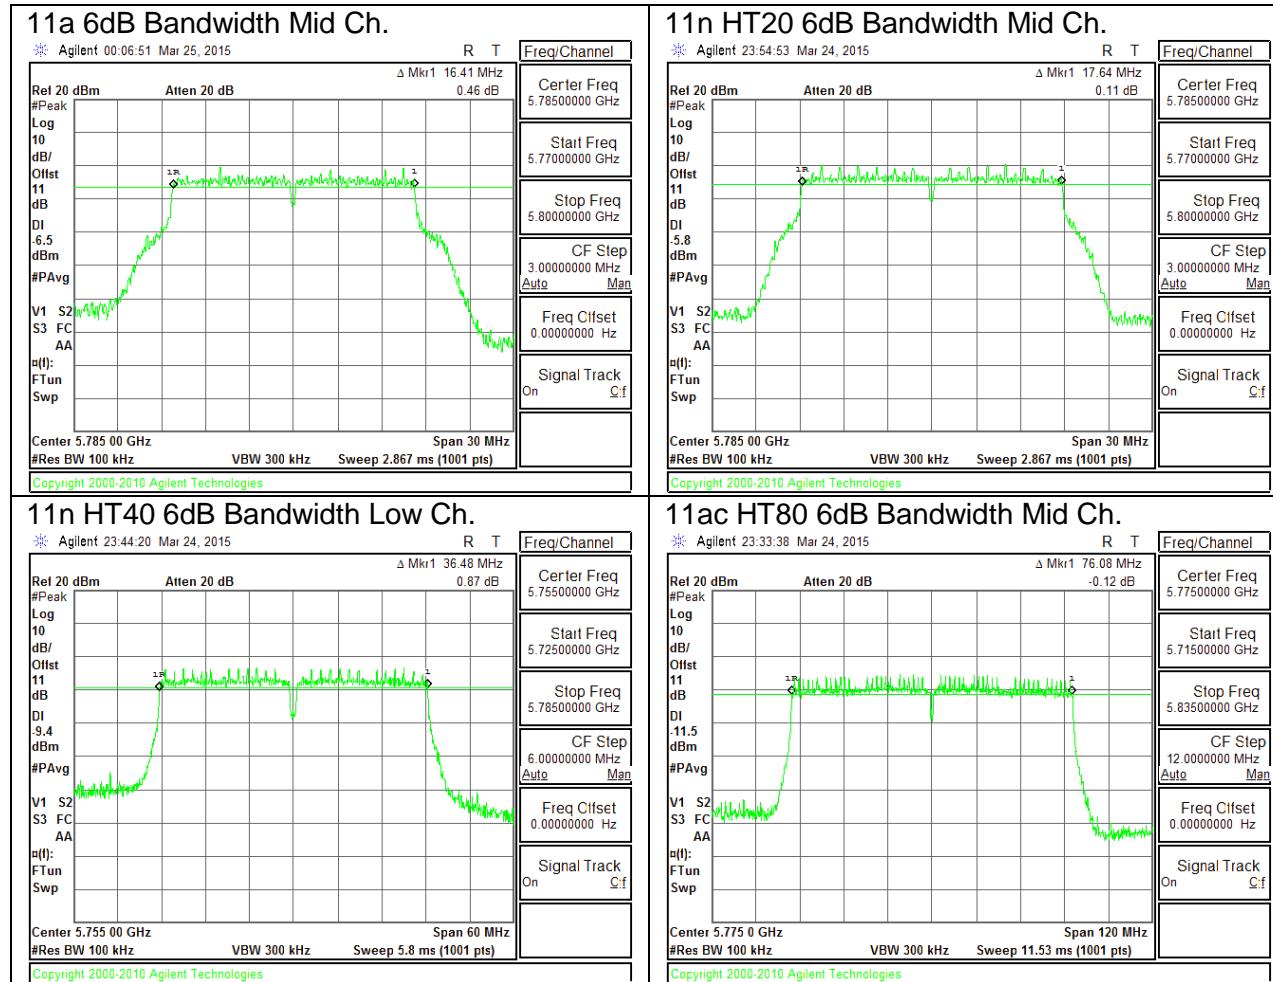

## 10.2. 26 dB BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.4	23.3
Mid	5200	21.3	21.5
High	5240	18.4	18.5

#### 10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5180	21.9	21.6
Mid	5200	21.8	21.8
High	5240	18.9	18.8

#### 10.2.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5190	40.0	39.5
High	5230	40.0	39.7

#### 10.2.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5210	81.6	80.8

---

#### 10.2.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	18.5	18.6
Mid	5300	21.4	21.8
High	5320	21.6	21.5

#### 10.2.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5260	19.0	18.8
Mid	5300	21.8	21.7
High	5320	21.6	21.6

#### 10.2.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5270	39.7	39.9
High	5310	40.3	39.7

#### 10.2.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5290	81.6	81.6

#### 10.2.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.6	21.5
Mid	5580	18.6	18.5
High	5700	21.6	21.4
144	5720	21.2	21.3

#### 10.2.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5500	21.9	21.9
Mid	5580	19.1	19.0
High	5700	22.1	21.6
144	5720	21.5	21.4

#### 10.2.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5510	40.0	39.5
Mid	5550	40.2	39.6
High	5670	40.2	39.5
142	5710	39.8	39.8

#### 10.2.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5530	81.8	81.1
138	5690	82.5	82

---

### 10.2.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5745	21.7	21.7
Mid	5785	21.6	21.5
High	5825	21.7	21.5

### 10.2.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5745	21.6	21.7
Mid	5785	22.2	21.6
High	5825	21.8	21.7

### 10.2.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5755	40.0	39.4
High	5795	39.9	39.8


### 10.2.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	26 dB BW Chain 0 (MHz)	26 dB BW Chain 1 (MHz)
Low	5775	82.0	81.5


## 10.2.17. 26 dB BANDWIDTH PLOTS


### UNII 5.2 GHz

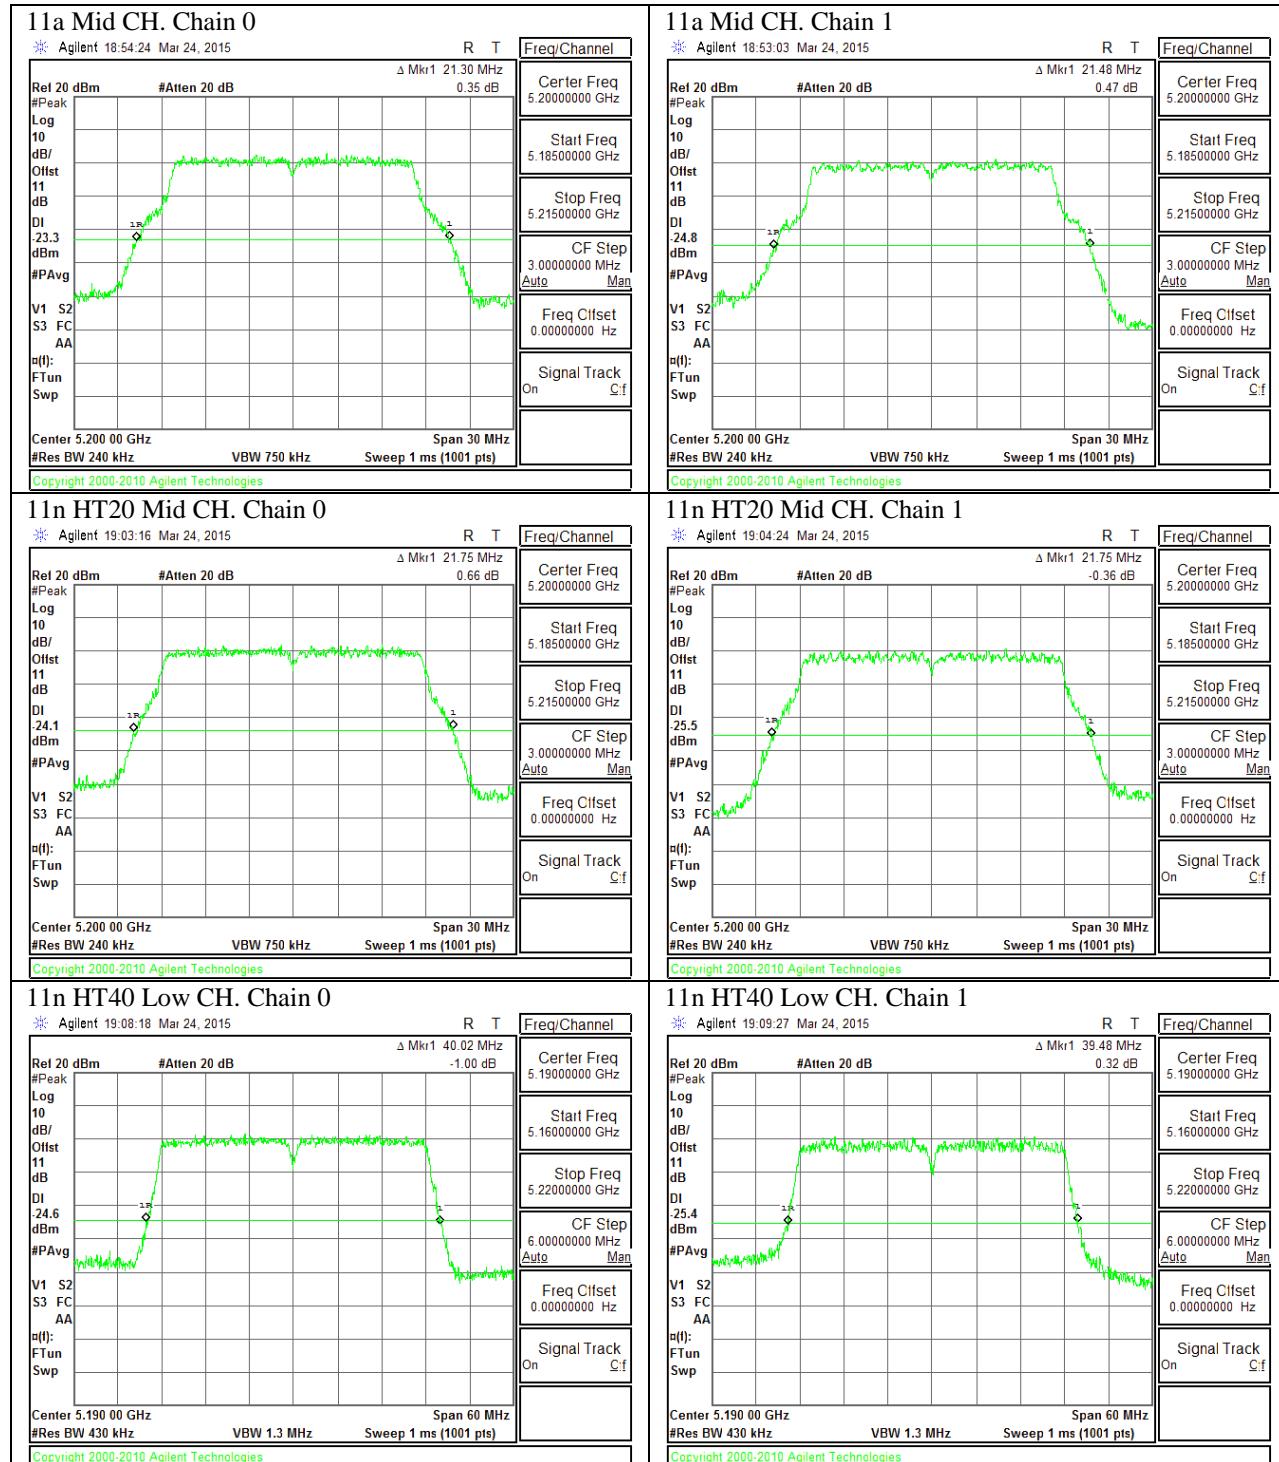

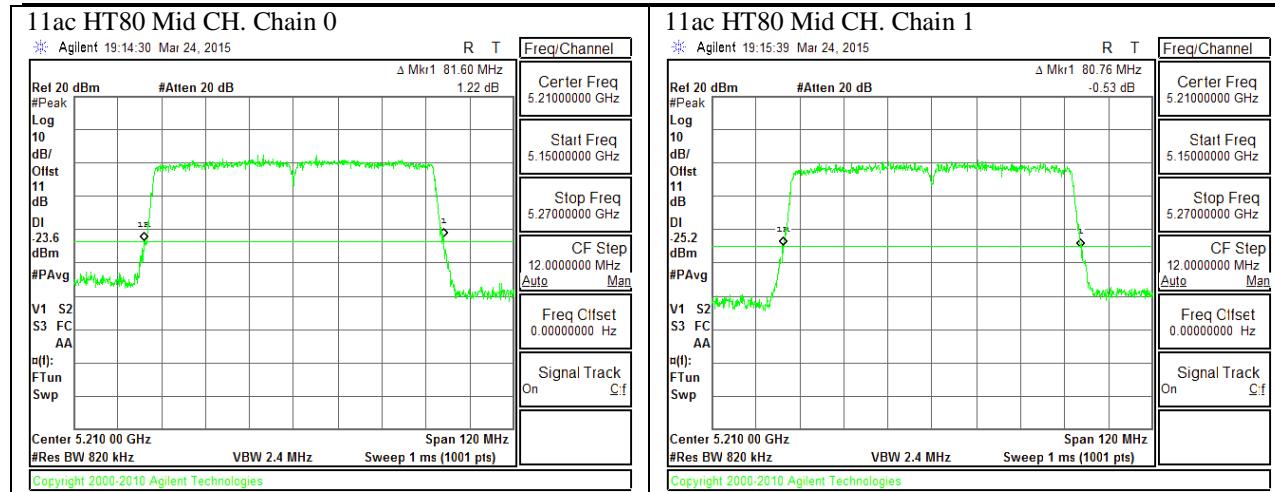



## UNII 5.3GHz

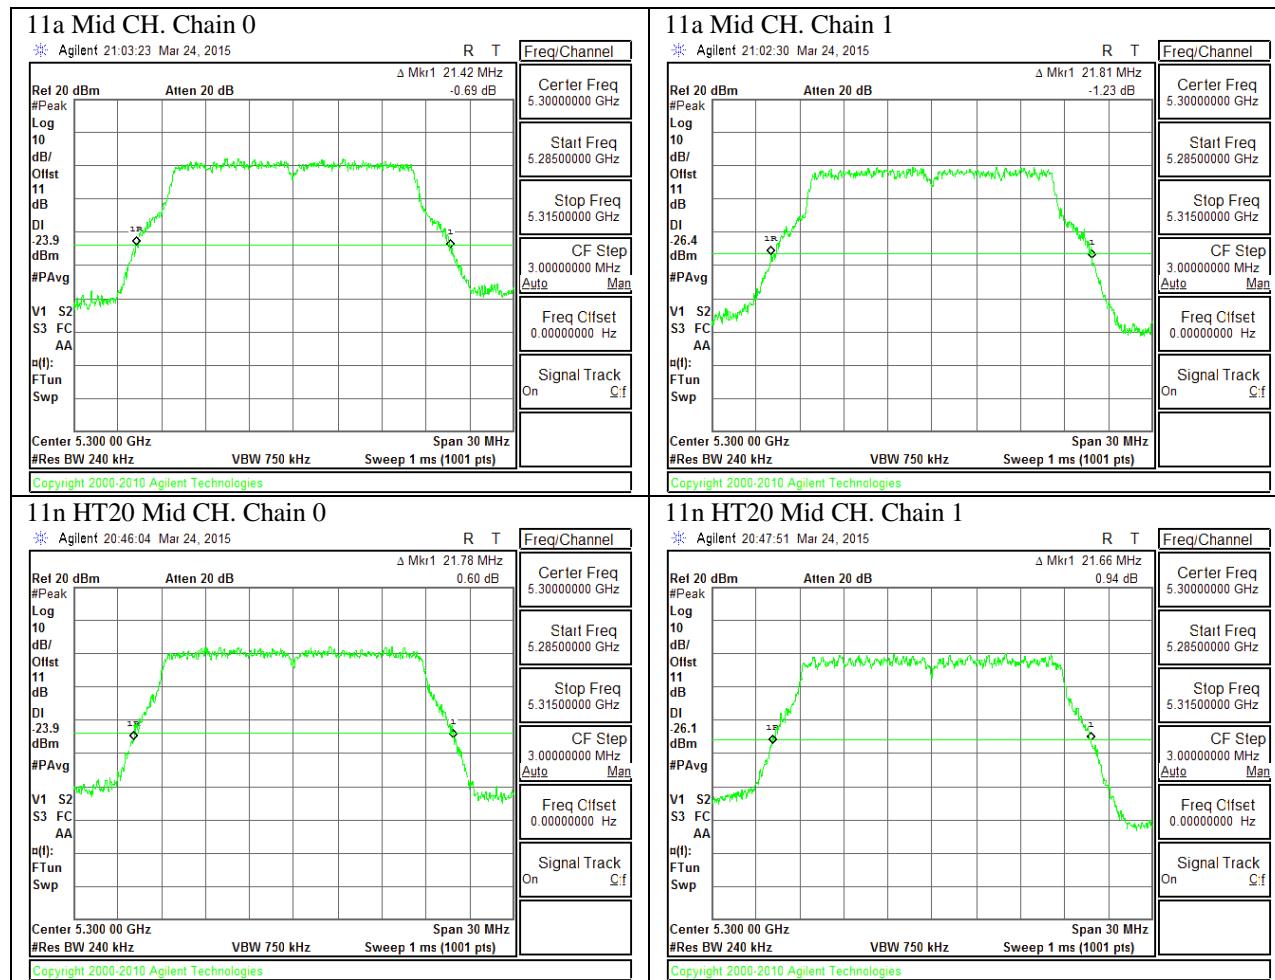

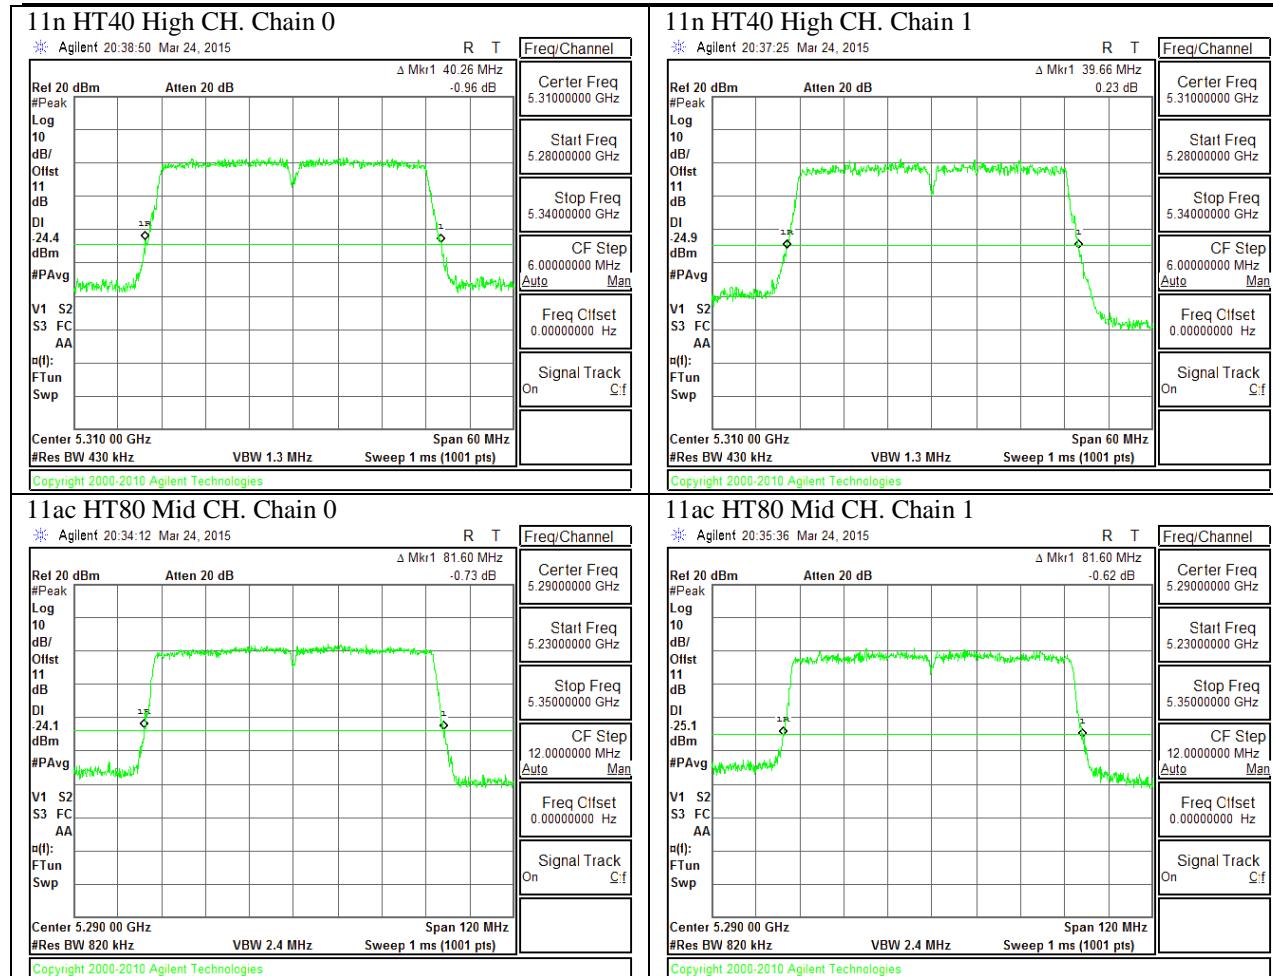



## UNII 5.5GHz

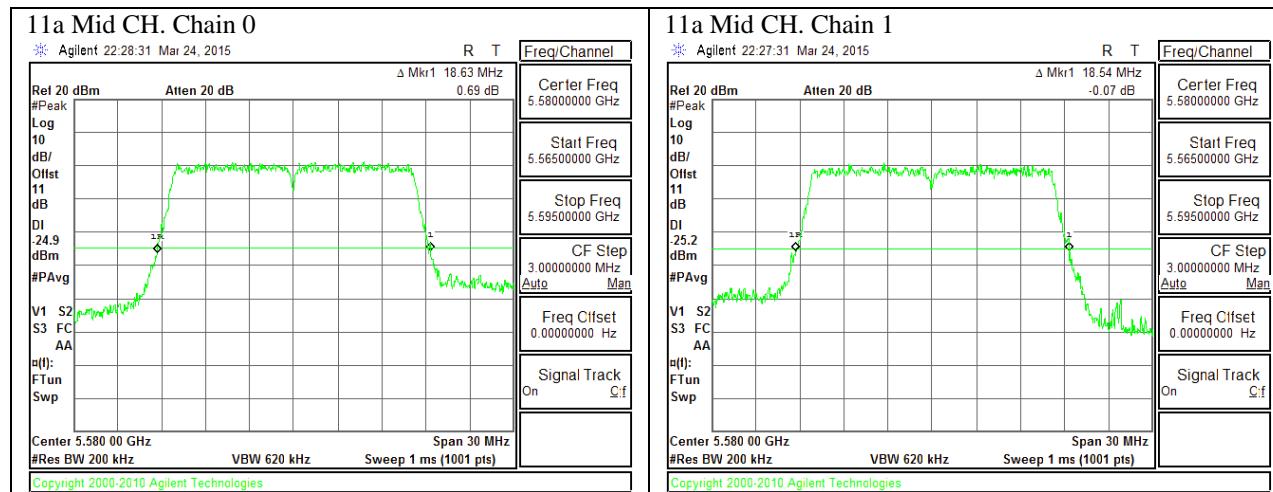

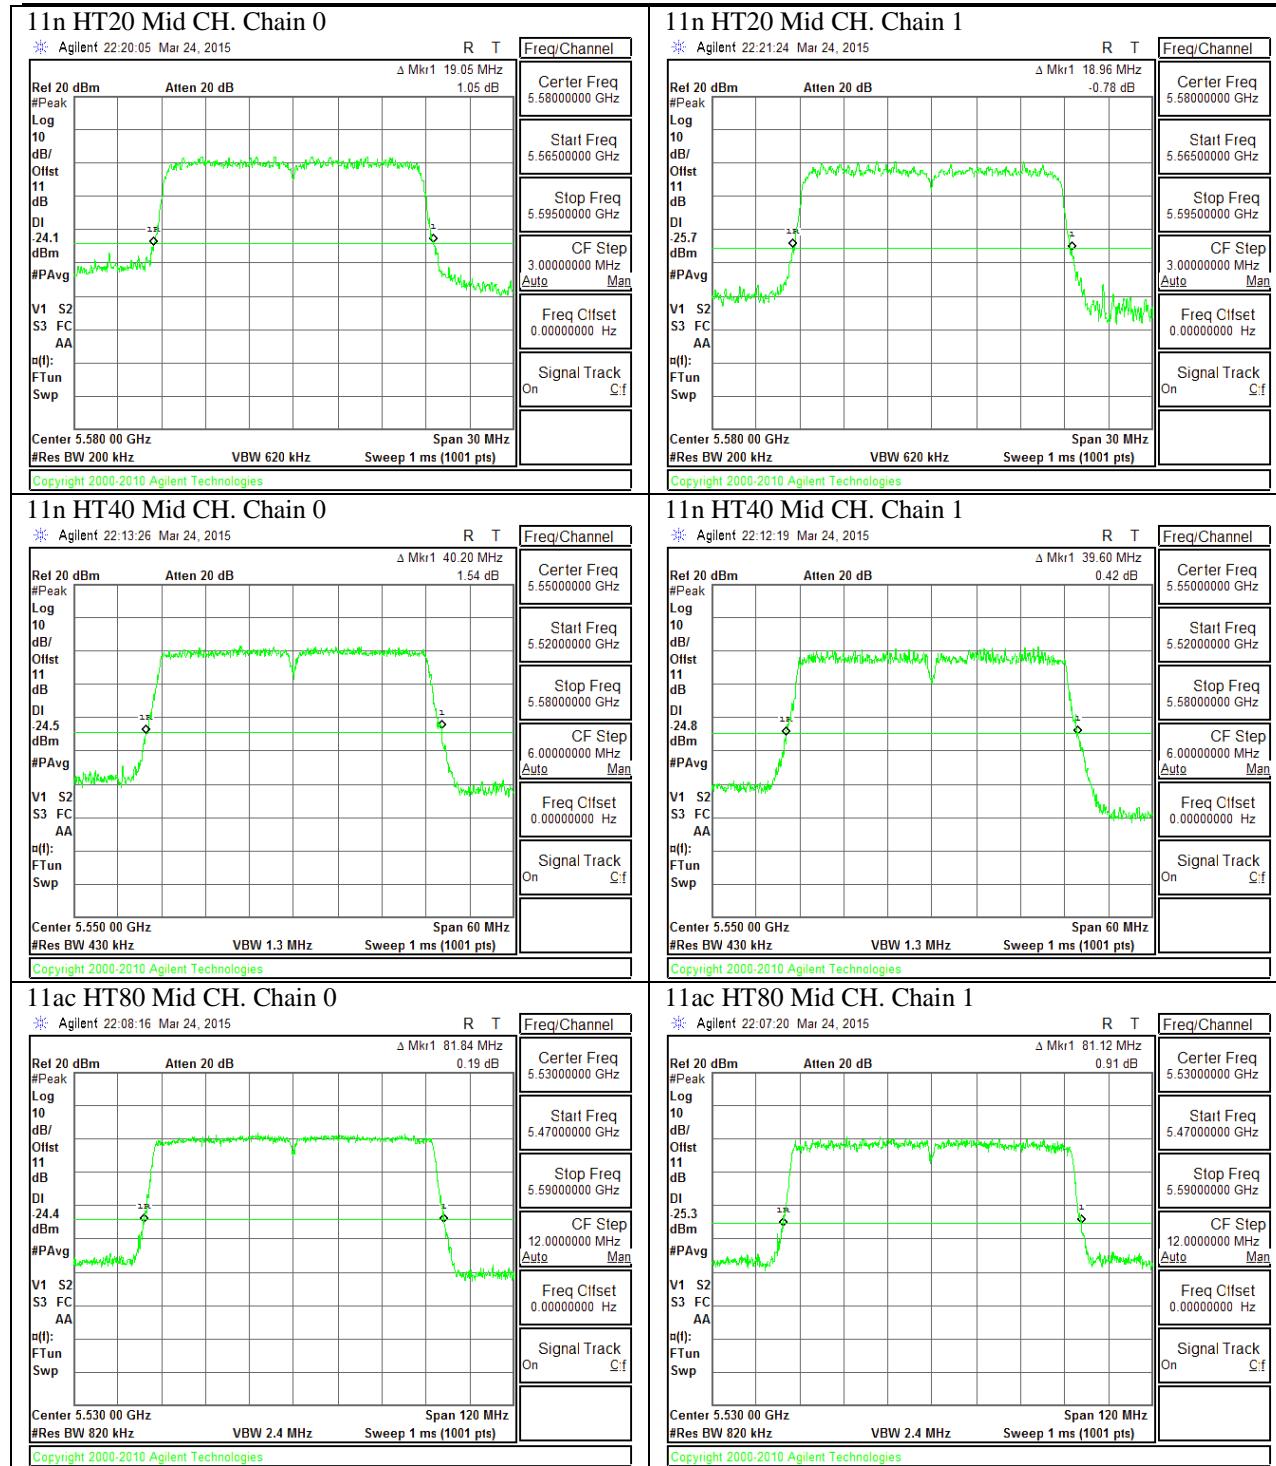



## UNII Straddling Channels

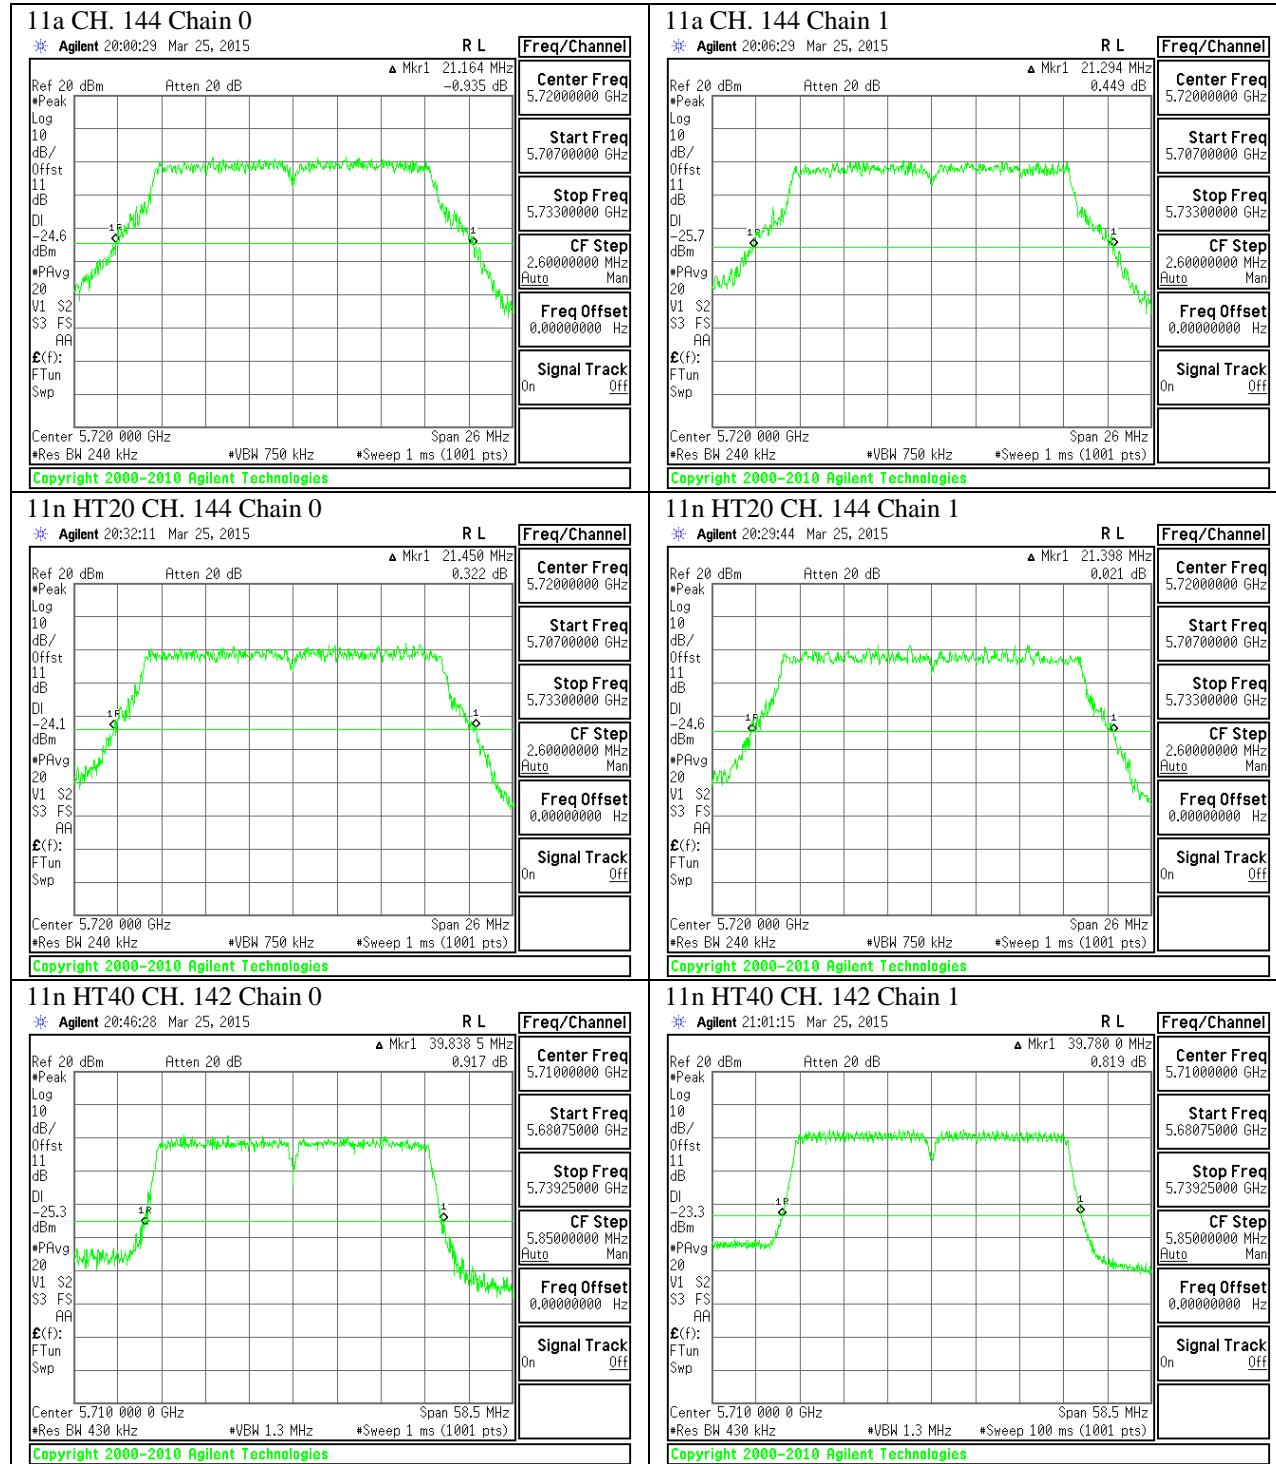

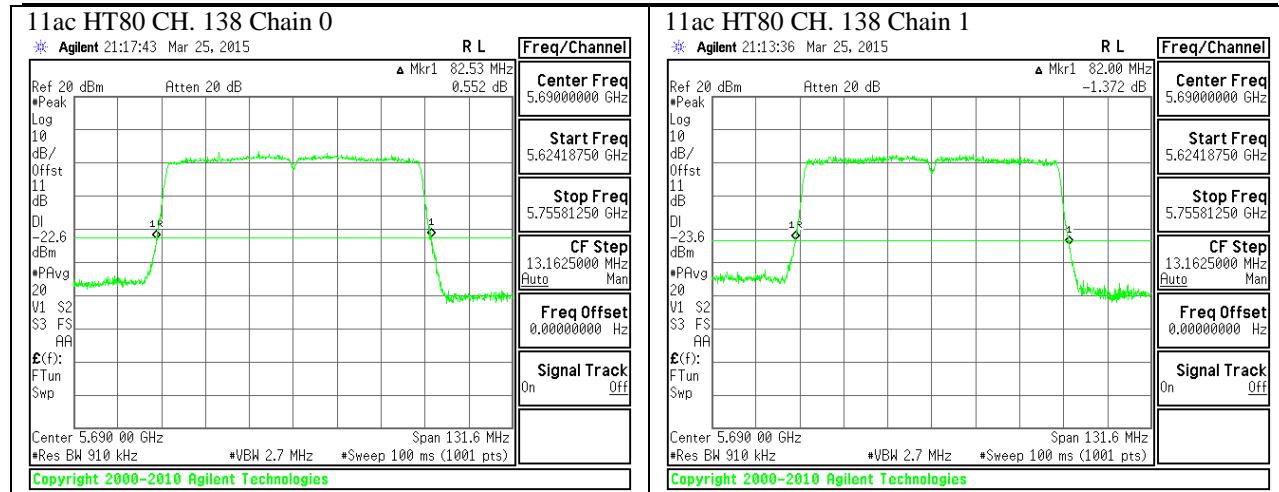

## UNII 5.8GHz

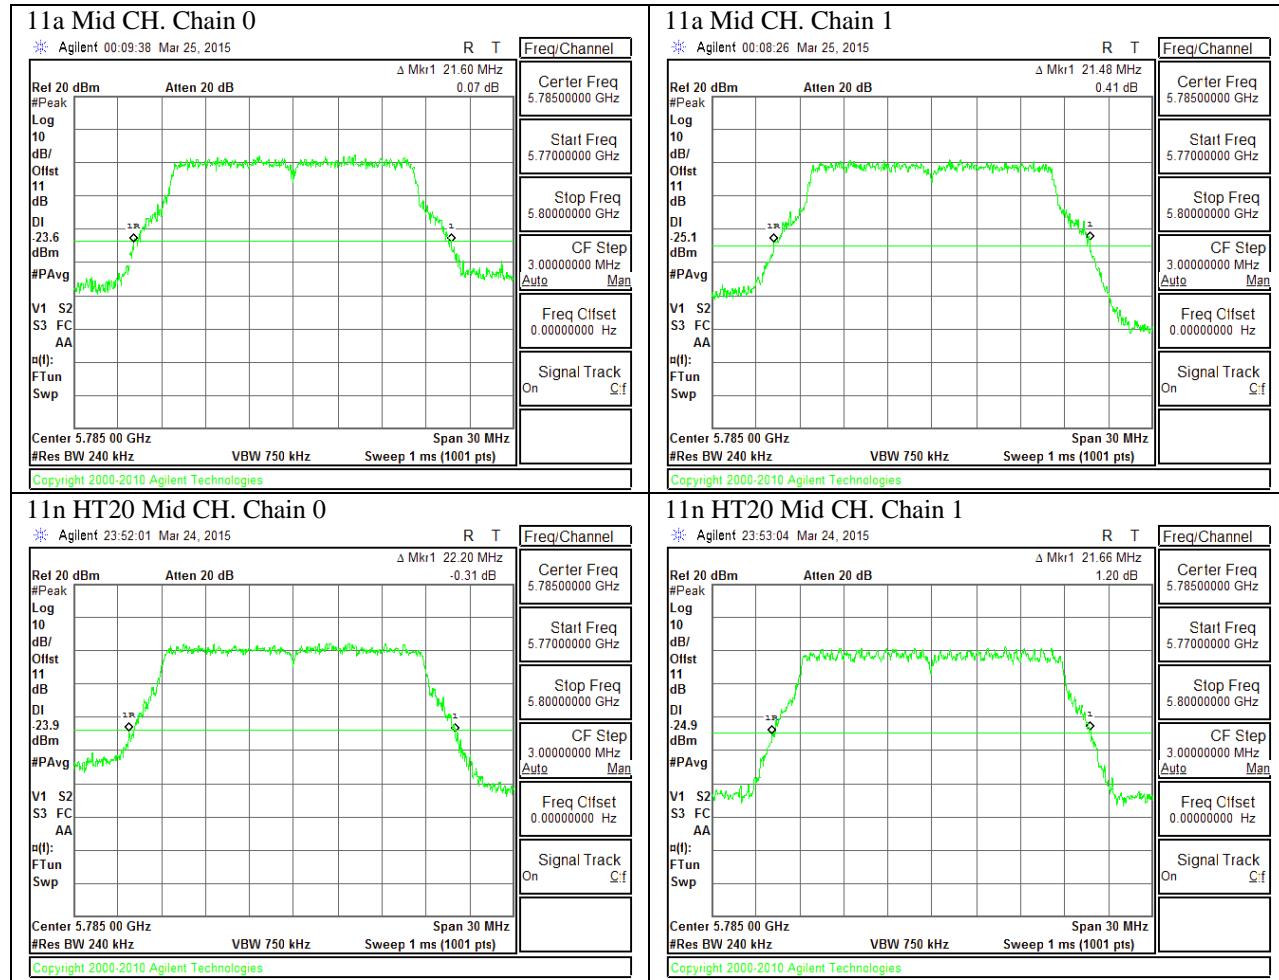

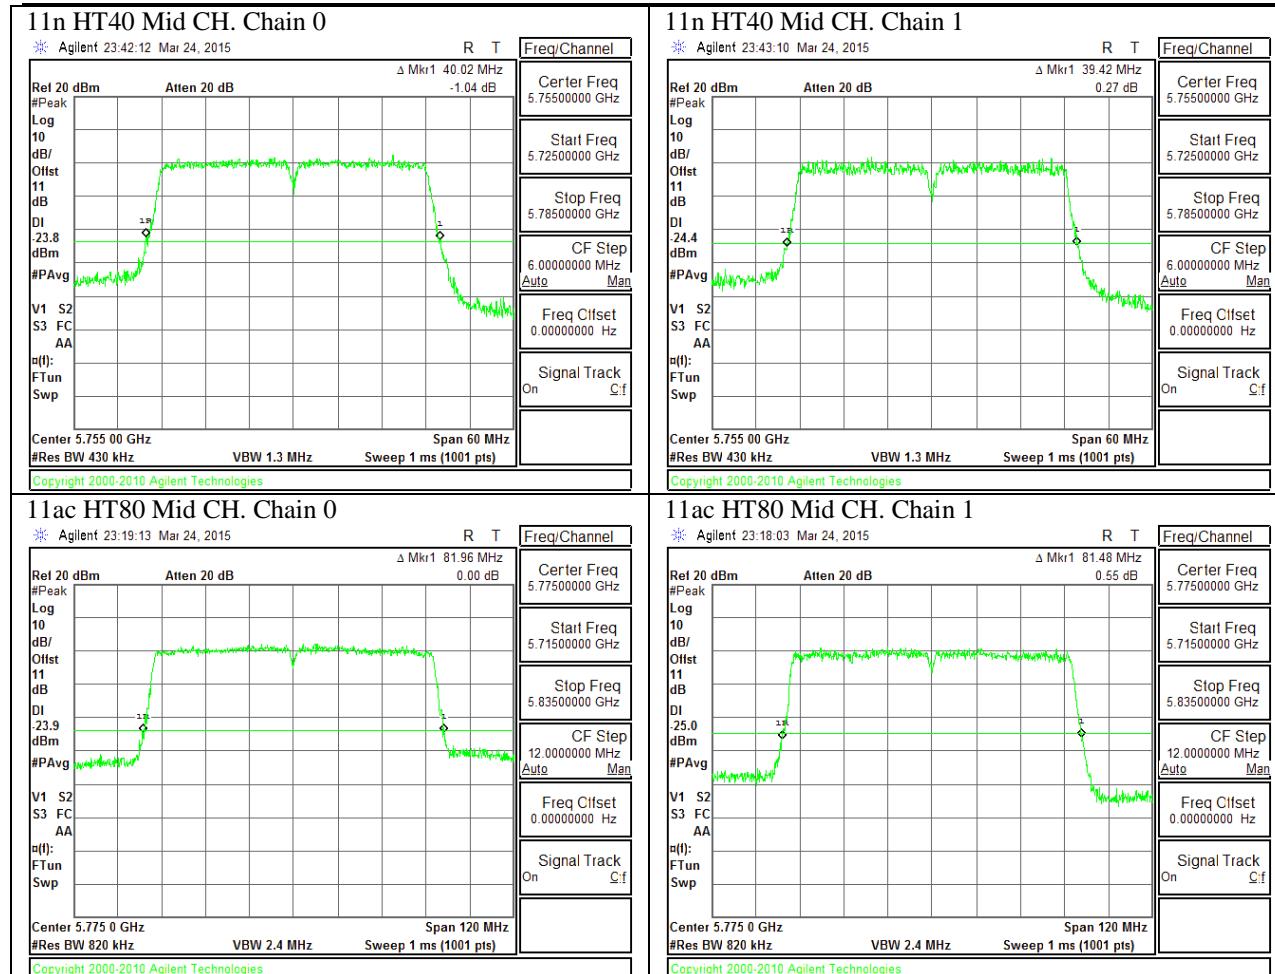

### 10.3. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### RESULTS

##### 10.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	16.6	16.5
Mid	5200	16.4	16.5
High	5240	16.4	16.4

##### 10.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5180	17.8	17.8
Mid	5200	17.8	17.7
High	5240	17.5	17.5

##### 10.3.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5190	36.2	36.4
High	5230	36.4	36.4

##### 10.3.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5210	76.0	76.3

---

### 10.3.5. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	16.4	16.4
Mid	5300	16.5	16.4
High	5320	16.4	16.5

### 10.3.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5260	17.5	17.4
Mid	5300	17.8	17.9
High	5320	17.7	17.7

### 10.3.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5270	36.2	36.1
High	5310	36.2	36.2

### 10.3.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5290	75.4	76.2

---

### 10.3.9. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	16.4	16.5
Mid	5580	16.4	16.5
High	5700	16.5	16.5
144	5720	17.2	17.1

### 10.3.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5500	17.8	17.9
Mid	5580	17.6	17.4
High	5700	17.7	17.8
144	5720	18.3	18.1

### 10.3.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5510	36.4	36.3
Mid	5550	36.4	36.3
High	5670	36.3	36.3
142	5710	36.6	36.4

### 10.3.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5530	76.0	76.0
138	5690	76.1	75.8

---

### 10.3.13. 802.11a MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5745	16.7	16.7
Mid	5785	16.5	16.5
High	5825	16.8	16.6

### 10.3.14. 802.11n HT20 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5745	17.7	17.7
Mid	5785	17.8	17.8
High	5825	17.7	17.8

### 10.3.15. 802.11n HT40 MODE IN THE 5.8 GHz BAND


Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5755	36.0	36.2
High	5795	36.3	36.4


### 10.3.16. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

Channel	Frequency (MHz)	99% BW Chain 0 (MHz)	99% BW Chain 1 (MHz)
Low	5775	76.1	75.8


### 10.3.17. 99% BANDWIDTH PLOTS


#### UNII 5.2GHz

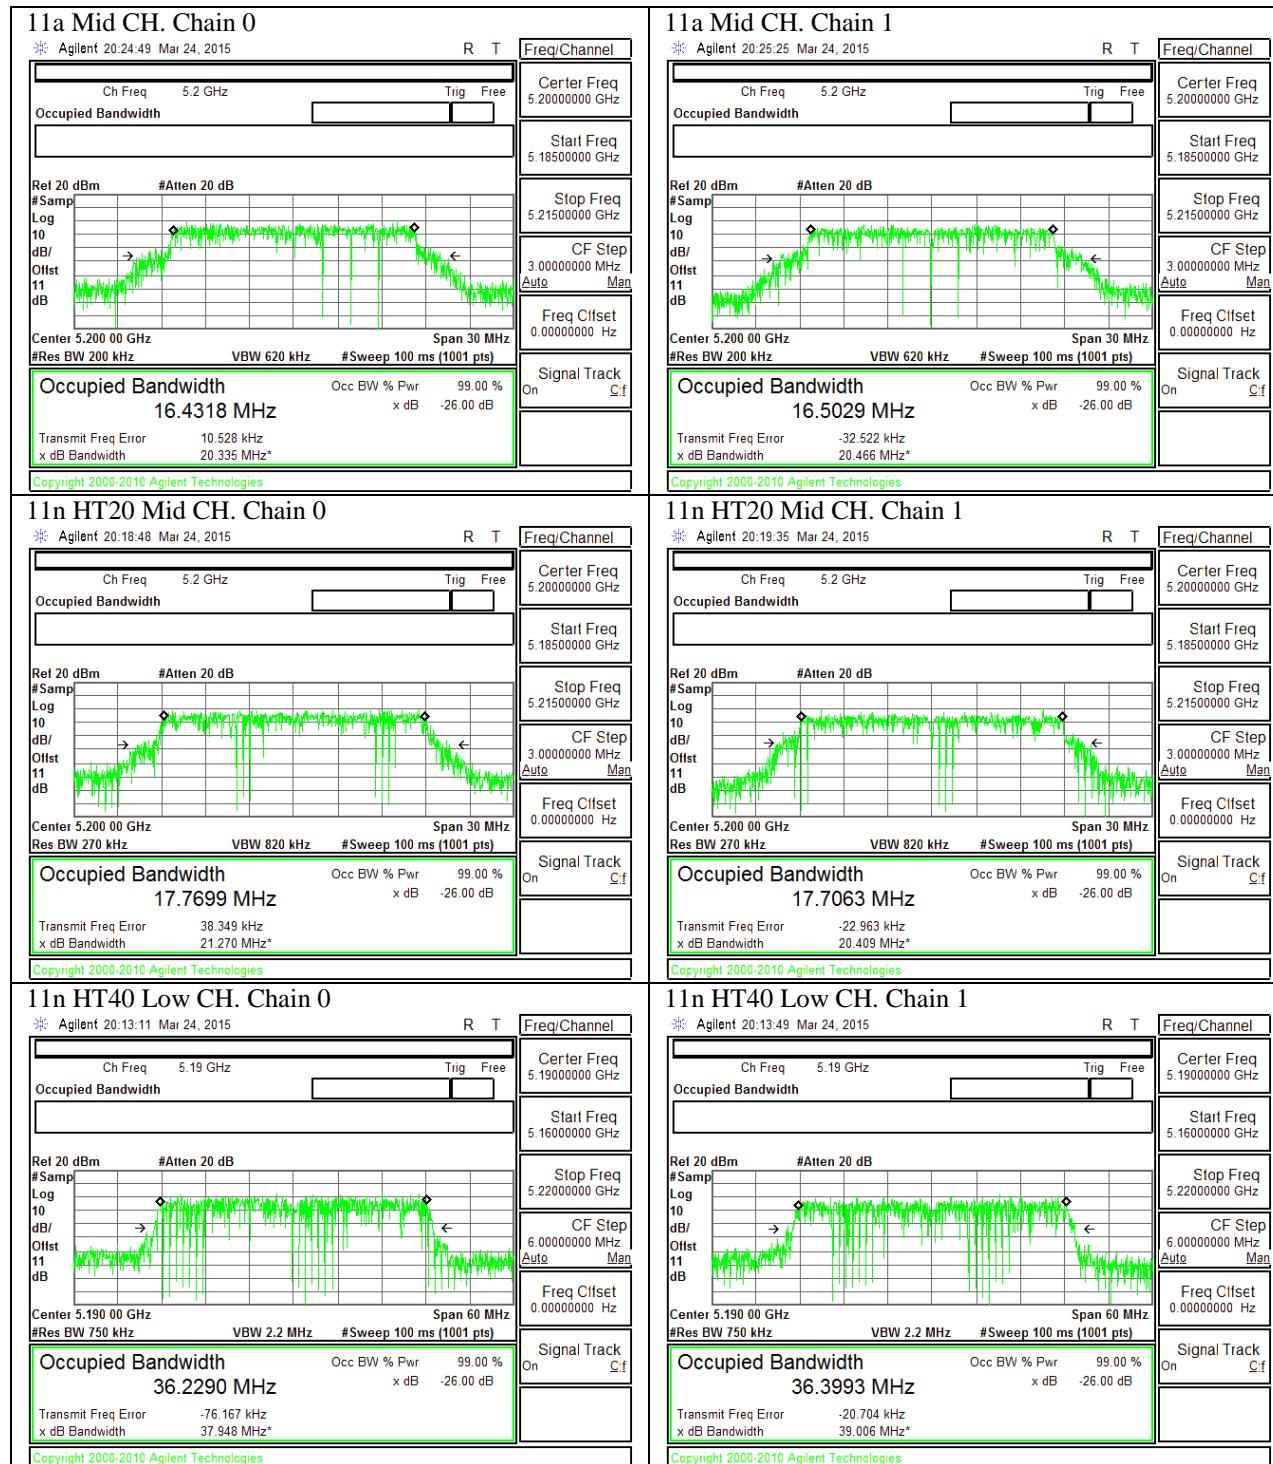

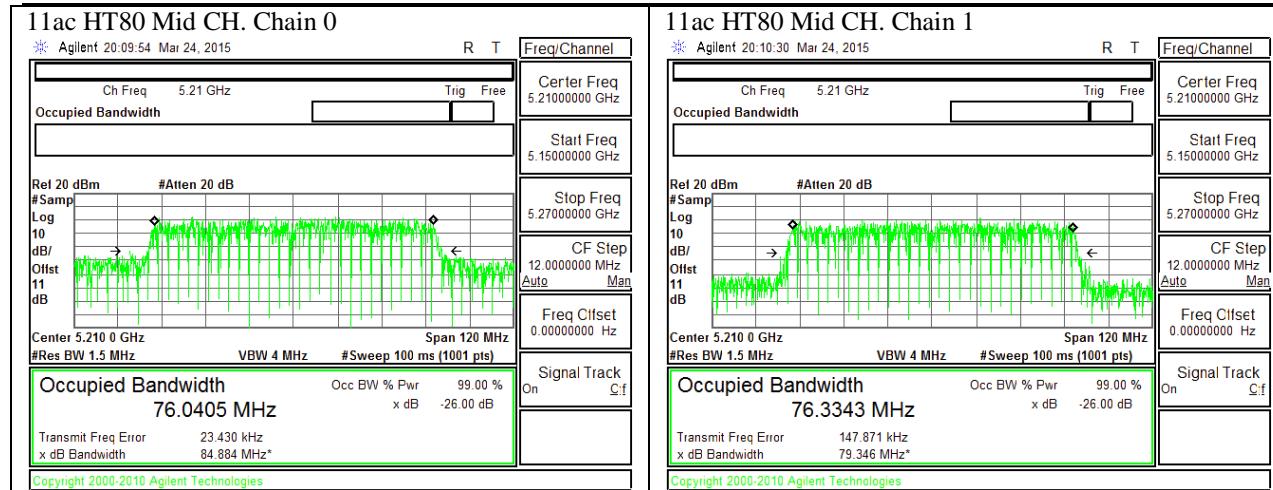



## UNII 5.3GHz

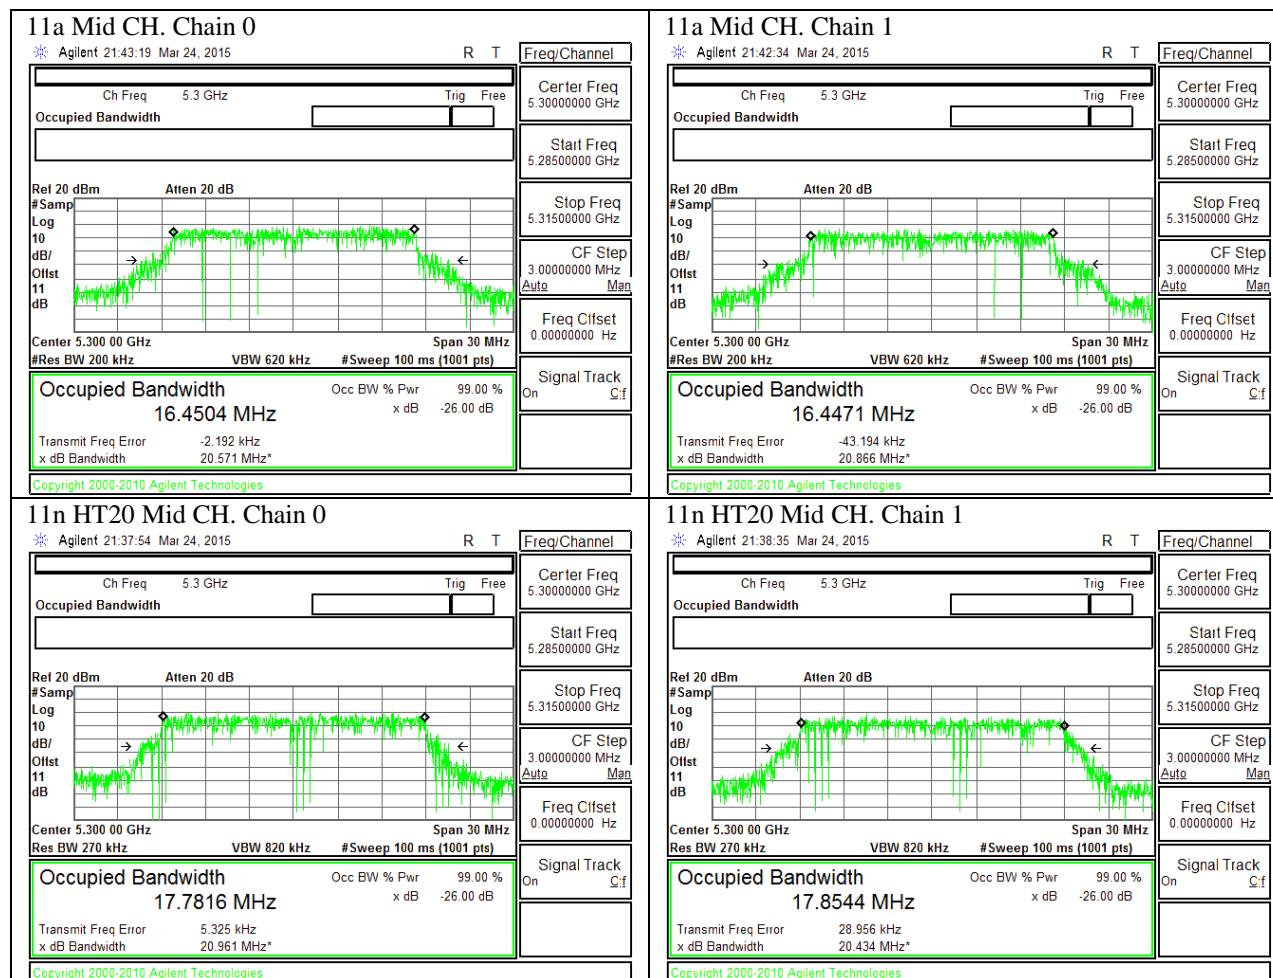

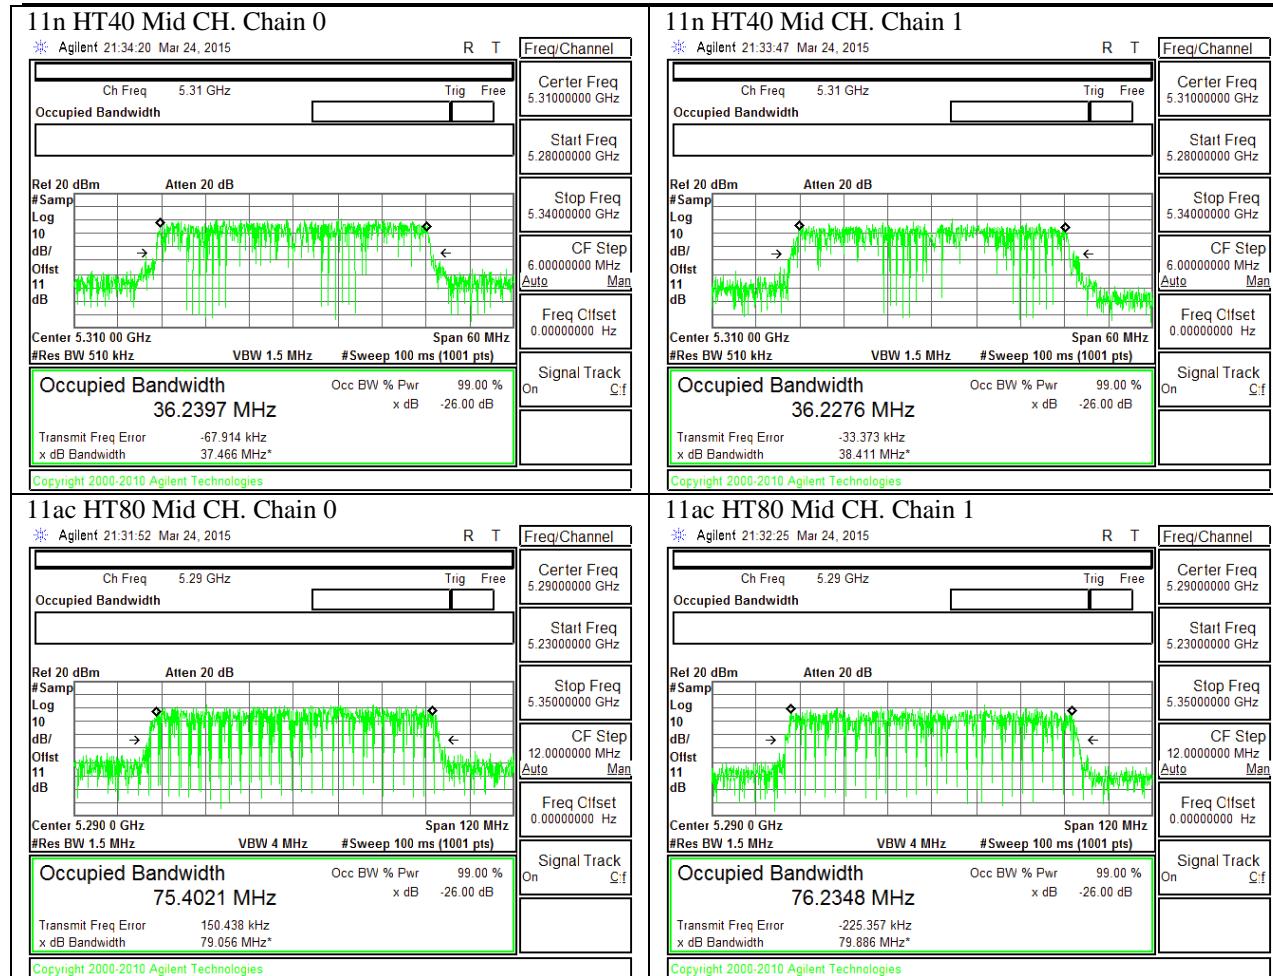



## UNII 5.5GHz

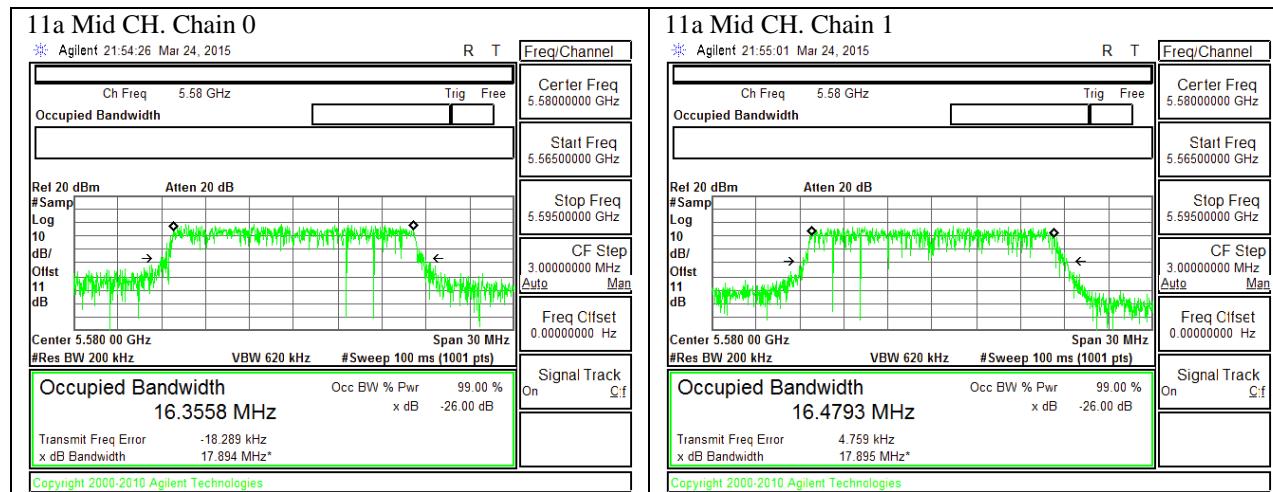

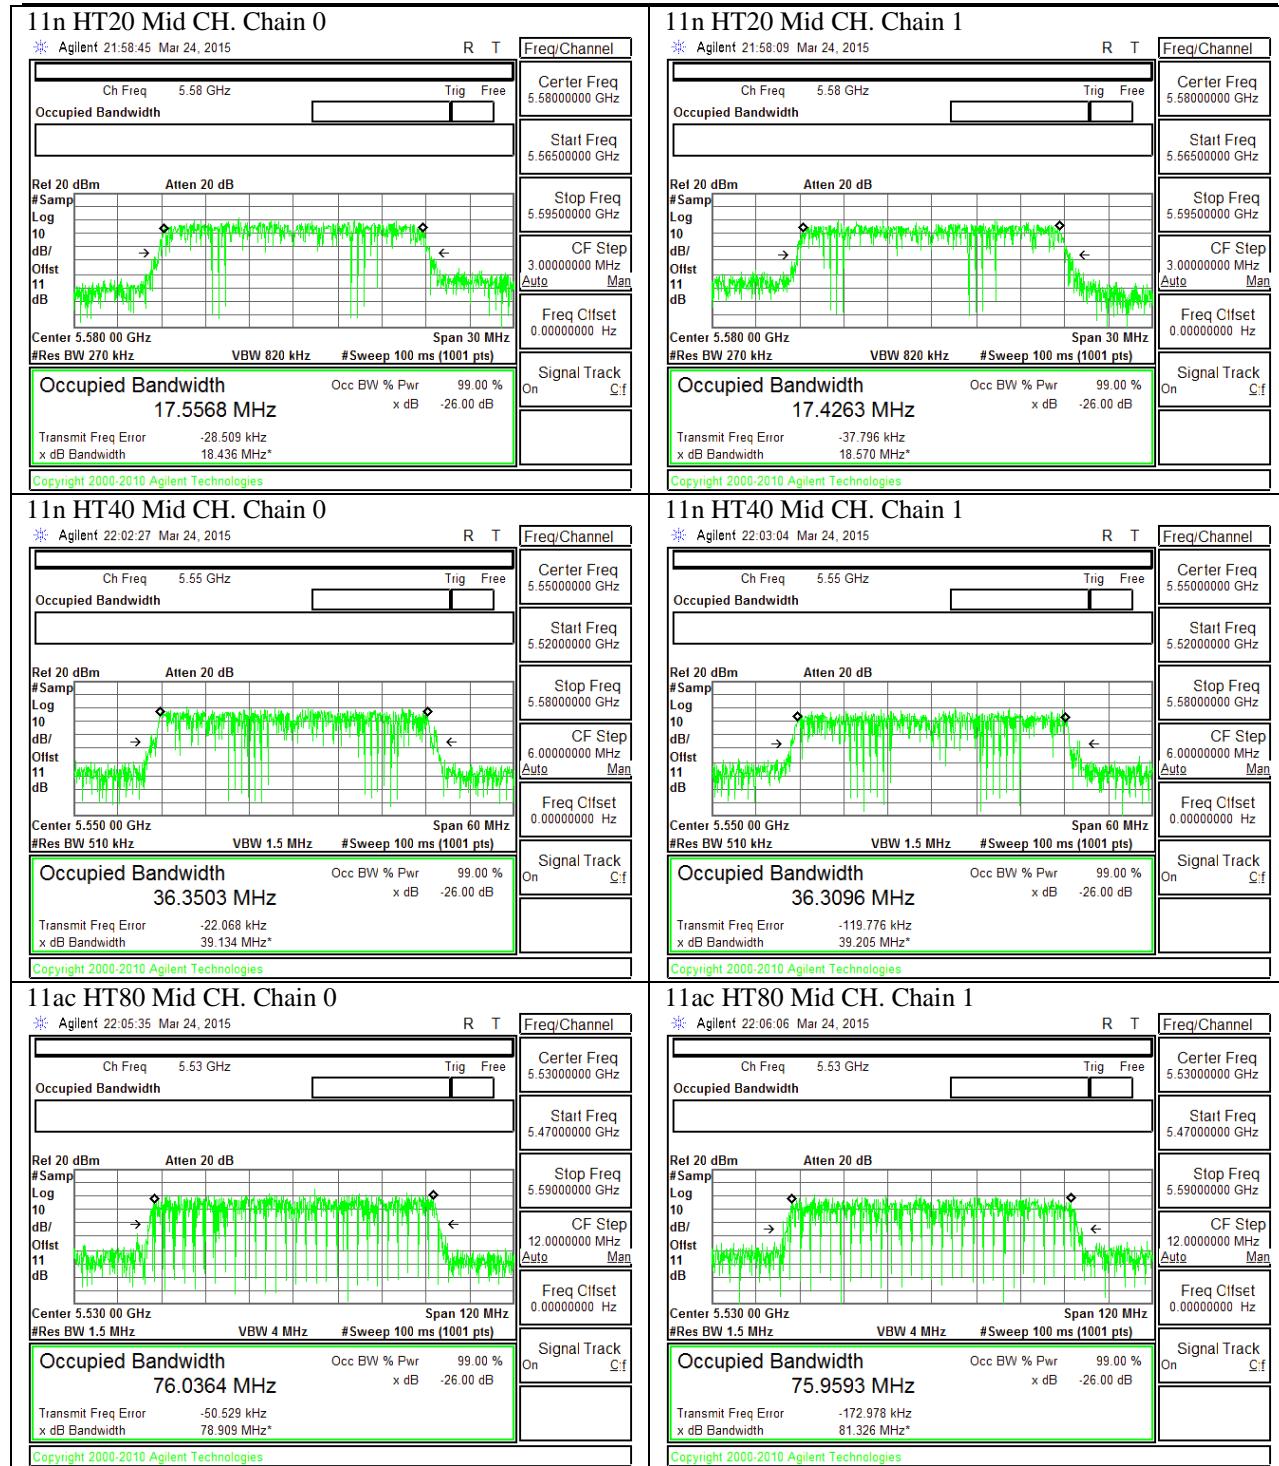



## UNII Straddling Channels

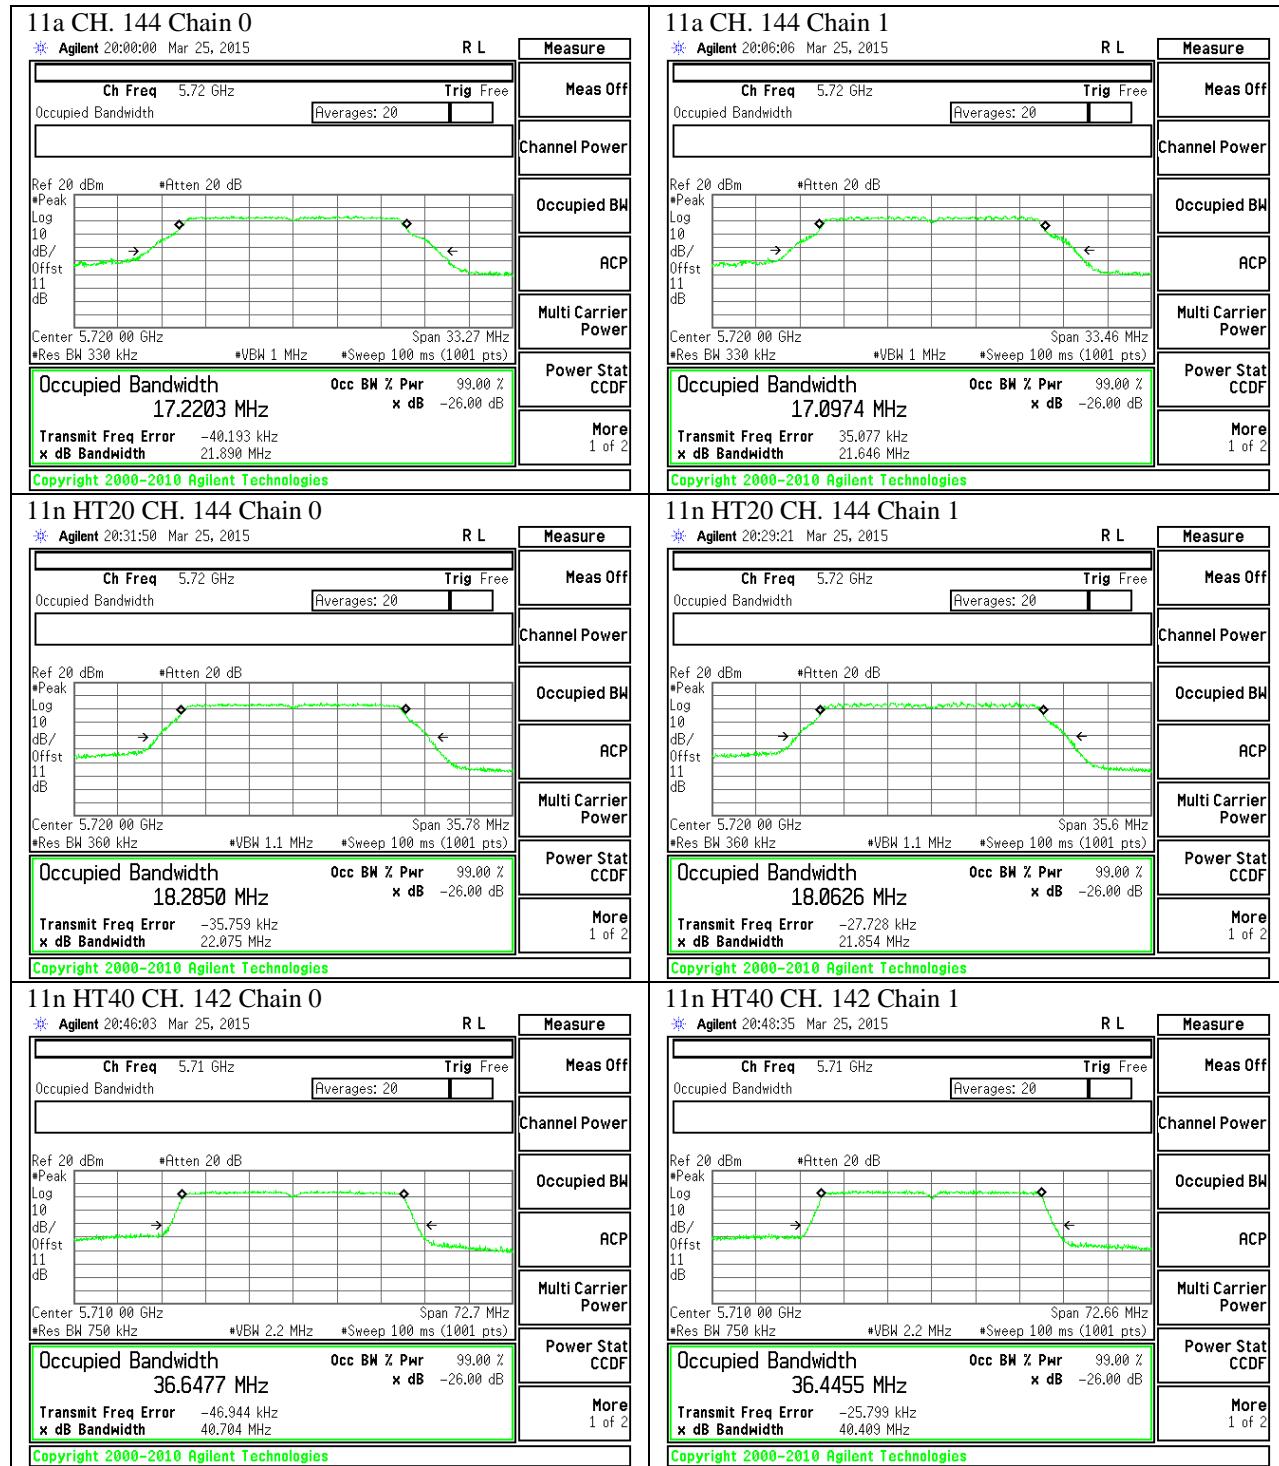

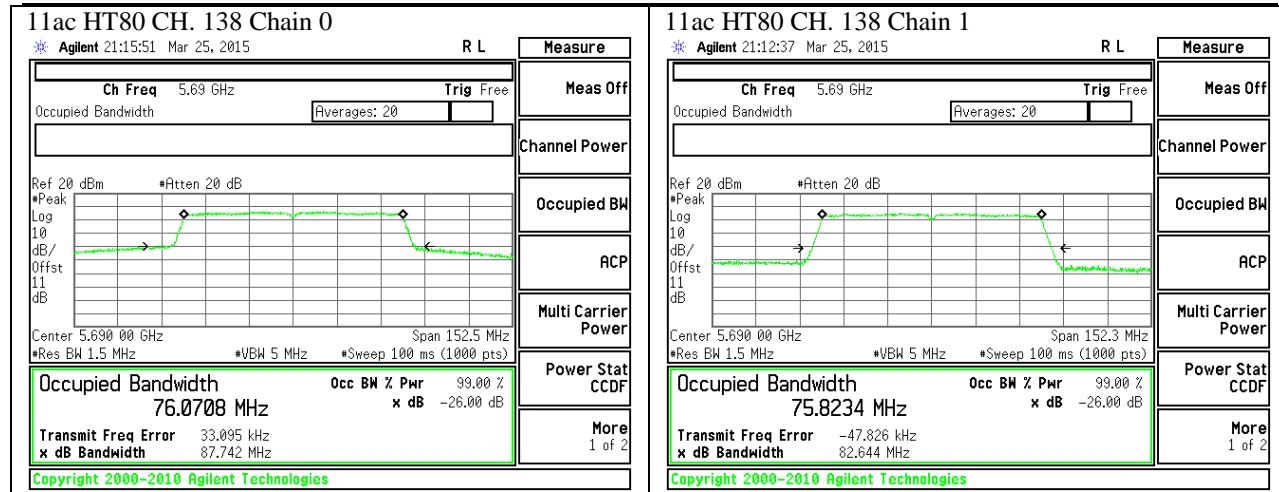

## UNII 5.8GHz

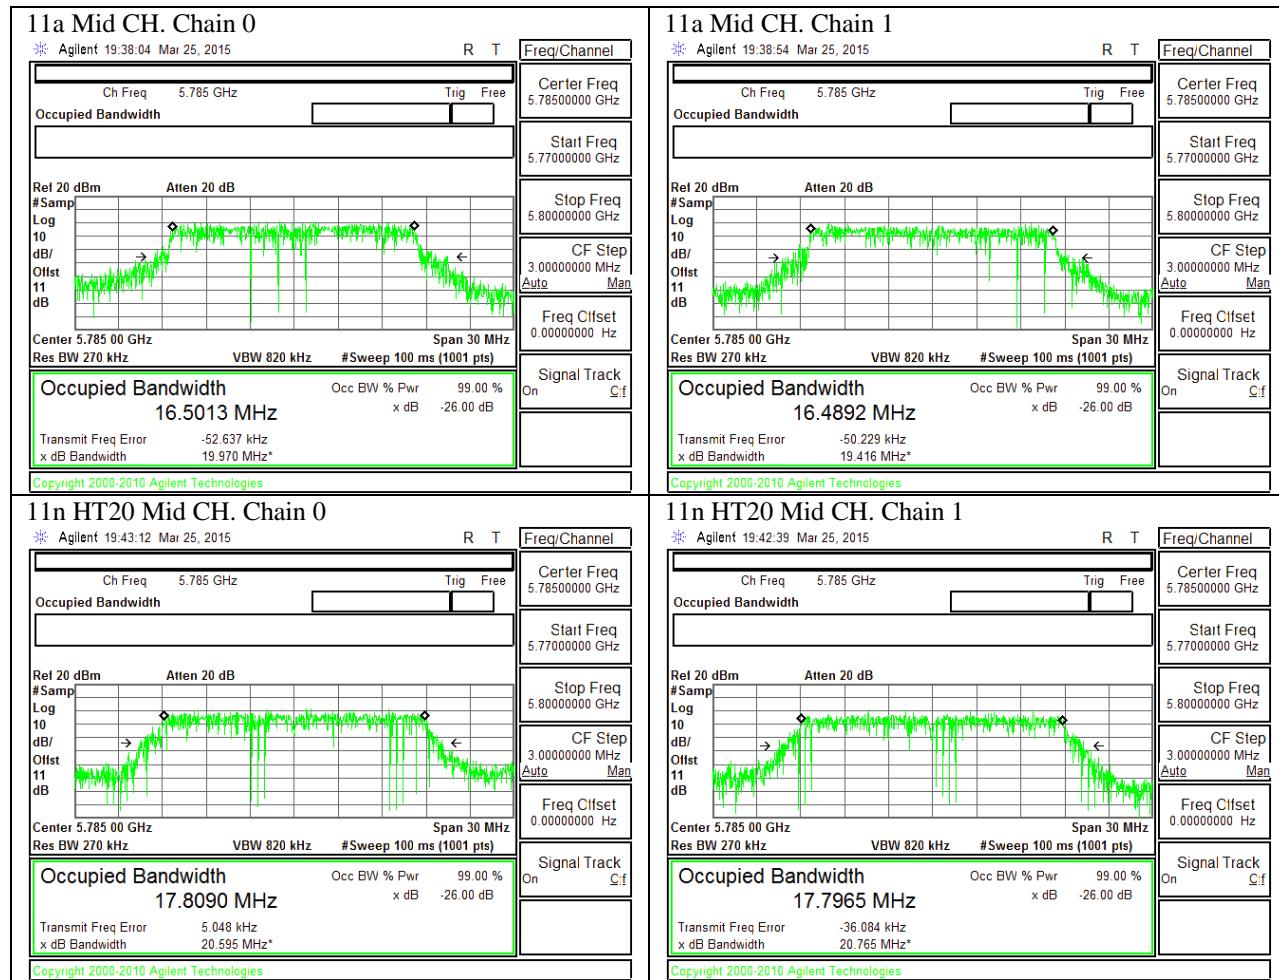

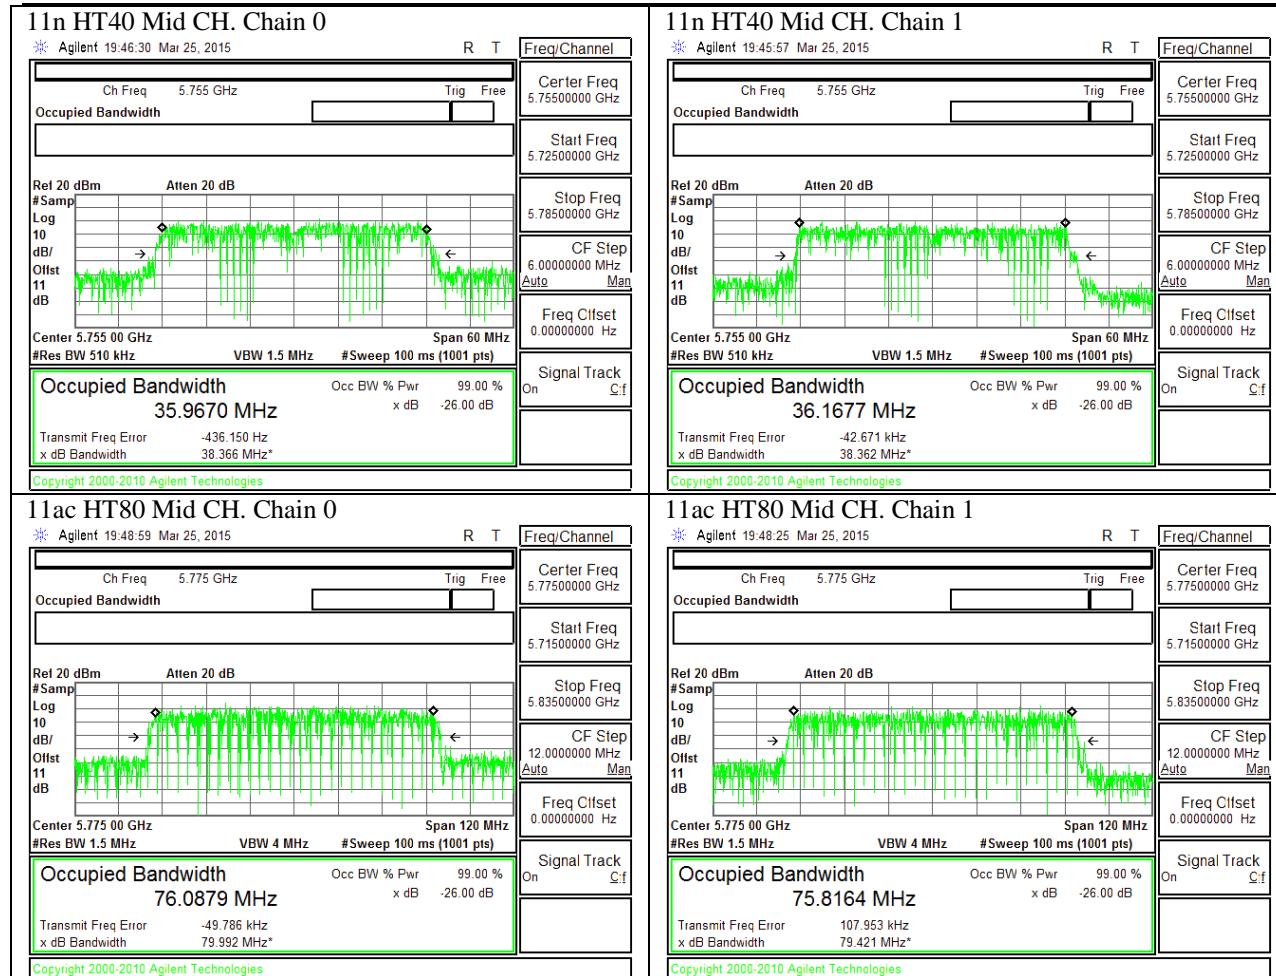

## 10.4. OUTPUT POWER AND PPSD

### LIMITS

FCC §15.407 (a) (1) (2) (3)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

### **DIRECTIONAL ANTENNA GAIN**

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

5180-5320MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-2.70	-2.70	-2.70

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5180-5320MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-2.70	-2.70	0.31

5500-5700MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-2.80	-2.80	-2.80

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5500-5700MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-2.80	-2.80	0.21

5725-5850MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Uncorrelated Chains Directional Gain (dBi)</b>
-3.00	-3.00	-3.00

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

5725-5850MHz

<b>Chain 0 Antenna Gain (dBi)</b>	<b>Chain 1 Antenna Gain (dBi)</b>	<b>Correlated Chains Directional Gain (dBi)</b>
-3.00	-3.00	0.01

## RESULTS

### 10.4.1. 802.11a MODE IN THE 5.2 GHz BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min BW (MHz)	Min BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5180	23.31	16.5500	-2.70	0.31
Mid	5200	21.48	16.5000	-2.70	0.31
High	5240	18.45	16.4400	-2.70	0.31

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	24.00	22.19	26.70	24.00	11.00	10.00	10.69
Mid	5200	24.00	22.17	26.70	24.00	11.00	10.00	10.69
High	5240	24.00	22.16	26.70	24.00	11.00	10.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.89	10.26	14.16	24.00	-9.84
Mid	5200	12.05	10.47	14.34	24.00	-9.66
High	5240	12.05	10.32	14.28	24.00	-9.72

#### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	0.51	-1.14	2.77	11.00	-8.23
Mid	5200	0.75	-0.77	3.07	11.00	-7.93
High	5240	0.96	-0.91	3.14	11.00	-7.86

#### 10.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5180	21.93	17.7600	-2.70	0.31
Mid	5200	21.75	17.7600	-2.70	0.31
High	5240	18.87	17.4700	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	24.00	22.49	25.19	24.00	11.00	10.00	10.69
Mid	5200	24.00	22.49	25.19	24.00	11.00	10.00	10.69
High	5240	23.76	22.42	25.12	23.76	11.00	10.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	11.77	10.22	14.07	24.00	-9.93
Mid	5200	11.90	10.13	14.11	24.00	-9.89
High	5240	11.82	10.09	14.05	23.76	-9.71

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	0.18	-1.43	2.46	11.00	-8.54
Mid	5200	0.17	-1.48	2.43	11.00	-8.57
High	5240	0.34	-1.34	2.59	11.00	-8.41

### 10.4.3. 802.11n HT40 MODE IN THE 5.2 GHz BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5190	40.02	36.3900	-2.70	0.31
High	5230	39.96	36.4000	-2.70	0.31

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	24.00	23.00	25.70	26.70	11.00	10.00	10.69
High	5230	24.00	23.00	25.70	26.70	11.00	10.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	11.98	9.97	14.10	24.00	-9.90
High	5230	11.86	9.71	13.92	24.00	-10.08

#### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-2.70	-4.54	-0.51	11.00	-11.51
High	5230	-2.82	-4.89	-0.72	11.00	-11.72

#### 10.4.4. 802.11ac HT80 MODE IN THE 5.2 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
Low	5210	81.60	76.3300	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSSD Limit (dBm)
Low	5210	24.00	23.00	25.70	26.70	11.00	10.00	10.69

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PPSSD
--------------------	------	--

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5210	11.93	9.99	14.20	24.00	-9.80

##### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
Low	5210	-5.59	-7.59	-3.34	11.00	-14.34

#### 10.4.5. 802.11a MODE IN THE 5.3 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5260	18.57	16.4200	-2.70	0.31
Mid	5300	21.81	16.4500	-2.70	0.31
High	5320	21.57	16.4900	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.15	29.15	26.70	11.00	11.00	10.69
Mid	5300	24.00	23.16	29.16	26.70	11.00	11.00	10.69
High	5320	24.00	23.17	29.17	26.70	11.00	11.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.40	10.14	14.43	24.00	-9.57
Mid	5300	12.44	10.11	14.44	24.00	-9.56
High	5320	12.37	10.18	14.42	24.00	-9.58

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	1.07	-1.18	3.10	11.00	-7.90
Mid	5300	1.03	-1.28	3.04	11.00	-7.96
High	5320	1.00	-1.19	3.05	11.00	-7.95

#### 10.4.6. 802.11n HT20 MODE IN THE 5.3 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5260	19.02	17.4700	-2.70	0.31
Mid	5300	21.78	17.8500	-2.70	0.31
High	5320	21.63	17.7300	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.42	29.42	26.70	11.00	11.00	10.69
Mid	5300	24.00	23.52	29.52	26.70	11.00	11.00	10.69
High	5320	24.00	23.49	29.49	26.70	11.00	11.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	12.28	10.00	14.30	24.00	-9.70
Mid	5300	12.21	9.87	14.20	24.00	-9.80
High	5320	12.47	10.04	14.43	24.00	-9.57

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	0.73	-1.55	2.75	11.00	-8.25
Mid	5300	0.50	-1.71	2.54	11.00	-8.46
High	5320	0.85	-1.61	2.80	11.00	-8.20

#### 10.4.7. 802.11n HT40 MODE IN THE 5.3 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5270	39.90	36.1600	-2.70	0.31
High	5310	40.26	36.2300	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5270	24.00	24.00	30.00	26.70	11.00	11.00	10.69
High	5310	24.00	24.00	30.00	26.70	11.00	11.00	10.69

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	12.37	10.13	14.40	24.00	-9.60
High	5310	12.32	9.80	14.25	24.00	-9.75

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	-2.01	-4.38	-0.02	11.00	-11.02
High	5310	-2.29	-4.82	-0.36	11.00	-11.36

#### 10.4.8. 802.11ac HT80 MODE IN THE 5.3 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW	Min 99% BW	Directional Gain for Power	Directional Gain for PPSSD
Low	5290	81.60	76.2300	-2.70	0.31

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSSD Limit (dBm)	IC PSD Limit (dBm)	PPSSD Limit (dBm)
Low	5290	24.00	24.00	30.00	26.70	11.00	11.00	10.69

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PPSSD
--------------------	------	--

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5290	12.09	9.86	14.26	24.00	-9.74

##### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
Low	5290	-5.53	-7.61	-3.31	11.00	-14.31

### 10.4.9. 802.11a MODE IN THE 5.5 GHz BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5500	21.63	16.4500	-2.80	0.21
Mid	5580	18.63	16.4700	-2.80	0.21
High	5700	21.63	16.4900	-2.80	0.21

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.16	29.16	26.80	11.00	11.00	10.79
Mid	5580	24.00	23.17	29.17	26.80	11.00	11.00	10.79
High	5700	24.00	23.17	29.17	26.80	11.00	11.00	10.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.73	9.82	13.89	24.00	-10.11
Mid	5580	12.19	10.93	14.62	24.00	-9.38
High	5700	12.22	11.38	14.83	24.00	-9.17

#### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	0.52	-1.48	2.64	11.00	-8.36
Mid	5580	0.92	-0.38	3.33	11.00	-7.67
High	5700	0.85	0.08	3.49	11.00	-7.51

#### 10.4.10. 802.11n HT20 MODE IN THE 5.5 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5500	21.93	17.8800	-2.80	0.21
Mid	5580	19.05	17.5500	-2.80	0.21
High	5700	22.08	17.7500	-2.80	0.21

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.52	29.52	26.80	11.00	11.00	10.79
Mid	5580	24.00	23.44	29.44	26.80	11.00	11.00	10.79
High	5700	24.00	23.49	29.49	26.80	11.00	11.00	10.79

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	11.90	9.97	14.05	24.00	-9.95
Mid	5580	11.85	10.63	14.29	24.00	-9.71
High	5700	12.50	11.56	15.07	24.00	-8.93

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	0.30	-1.56	2.48	11.00	-8.52
Mid	5580	0.26	-0.86	2.75	11.00	-8.25
High	5700	0.82	-0.11	3.39	11.00	-7.61

### 10.4.11. 802.11n HT40 MODE IN THE 5.5 GHz BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
Low	5510	40.02	36.4200	-2.80	0.21
Mid	5550	40.20	36.3500	-2.80	0.21
High	5670	40.20	36.3100	-2.80	0.21

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSSD
--------------------	------	--

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	11.92	9.87	14.03	24.00	-9.97
Mid	5550	12.00	10.34	14.25	24.00	-9.75
High	5670	12.38	11.13	14.81	24.00	-9.19

#### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
Low	5510	-2.76	-4.70	-0.61	11.00	-11.61
Mid	5550	-2.56	-4.28	-0.33	11.00	-11.33
High	5670	-2.29	-3.44	0.18	11.00	-10.82

#### 10.4.12. 802.11ac HT80 MODE IN THE 5.5 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
Low	5530	81.84	76.0300	-2.80	0.21

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSSD Limit (dBm)	IC PSD Limit (dBm)	PPSSD Limit (dBm)
Low	5530	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.13	Included in Calculations of Corr'd Power & PPSSD
--------------------	------	--

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5530	11.83	9.93	14.12	24.00	-9.88

##### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
Low	5530	-5.84	-7.81	-3.57	11.00	-14.57

### 10.4.13. 802.11a MODE STRADDLE CHANNEL 144

#### UNII-2C BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
144	5720	15.60	13.5500	-2.80	0.21

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
144	5720	22.93	22.32	28.32	22.32	11.00	11.00	11.00

Duty Cycle CF (dB) 0.00 Included in Calculations of Corr'd Power & PPSSD

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	11.12	10.46	13.81	22.32	-8.51

##### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
144	5720	0.40	-0.31	3.07	11.00	-7.93

**UNII-3 BAND**

**Bandwidth and Antenna Gain**

Channel	Frequency	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
144	5720	5.60	3.5500	-2.80	0.21

**Limits**

Channel	Frequency	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
144	5720	18.48	16.50	22.50	16.50	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

**Output Power Results**

Channel	Frequency	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	5.70	4.72	8.25	16.50	-8.25

**PPSD Results**

Channel	Frequency	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
144	5720	-2.52	-3.59	-0.01	11.00	-11.01

**AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)**

**Results**

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)</b>				
5720 (UNII-2 portion)	11.12	10.46	13.813	24.06
5720 (UNII-3 portion)	5.70	4.72	8.248	6.68
5720 (Whole signal)	11.40	9.40	13.524	22.51

#### 10.4.14. 802.11n HT20 MODE STRADDLE CHANNEL 144

##### UNII-2C BAND

###### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
144	5720	15.75	14.0500	-2.80	0.21

###### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
144	5720	22.97	22.48	28.48	22.48	11.00	11.00	11.00

Duty Cycle CF (dB) 0.00 Included in Calculations of Corr'd Power & PPSSD

###### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	11.11	10.42	13.79	22.48	-8.69

###### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
144	5720	0.15	-0.53	2.83	11.00	-8.17

**UNII-3 BAND**

**Bandwidth and Antenna Gain**

Channel	Frequency	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
144	5720	5.75	4.0500	-2.80	0.21

**Limits**

Channel	Frequency	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
144	5720	18.60	17.07	23.07	17.07	11.00	11.00	11.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

**Output Power Results**

Channel	Frequency	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
144	5720	5.70	4.72	8.25	17.07	-8.82

**PPSD Results**

Channel	Frequency	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
144	5720	-2.52	-3.59	-0.01	11.00	-11.01

**AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)**

**Results**

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)</b>				
5720 (UNII-2 portion)	11.11	10.42	13.789	23.93
5720 (UNII-3 portion)	5.70	4.72	8.248	6.68
5720 (Whole signal)	11.20	9.20	13.324	21.50

## 10.4.15. 802.11n HT40 MODE STRADDLE CHANNEL 142

### UNII-2C BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
142	5710	34.90	33.2000	-2.80	0.21

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
142	5710	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB) 0.12 Included in Calculations of Corr'd Power & PPSSD

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	11.71	10.67	14.35	24.00	-9.65

#### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
142	5710	-2.80	-3.86	-0.17	11.00	-11.17

**UNII-3 BAND**

**Bandwidth and Antenna Gain**

Channel	Frequency	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
142	5710	4.90	3.2000	-2.80	0.21

**Limits**

Channel	Frequency	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
142	5710	17.90	16.05	22.05	16.05	11.00	11.00	11.00

Duty Cycle CF (dB) 0.12 Included in Calculations of Corr'd Power & PPSD

**Output Power Results**

Channel	Frequency	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
142	5710	1.41	0.39	4.06	16.05	-11.99

**PPSD Results**

Channel	Frequency	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
142	5710	-6.03	-7.04	-3.38	11.00	-14.38

**AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)**

**Results**

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)</b>				
5710 (UNII-2 portion)	11.71	10.67	14.351	27.24
5710 (UNII-3 portion)	1.41	0.39	4.060	2.55
5710 (Whole signal)	11.40	9.20	13.568	22.74

## 10.4.16. 802.11ac80 MODE STRADDLE CHANNEL 138

### UNII-2C BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSSD (dBi)
138	5690	56.00	52.9000	-2.80	0.21

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB) 0.24 Included in Calculations of Corr'd Power & PPSSD

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	11.63	10.54	14.37	24.00	-9.63

#### PPSSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSSD (dBm)	Chain 1 Meas PPSSD (dBm)	Total Corr'd PPSSD (dBm)	PPSSD Limit (dBm)	PPSSD Margin (dB)
138	5690	-5.87	-6.97	-3.13	11.00	-14.13

**UNII-3 BAND**

**Bandwidth and Antenna Gain**

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
138	5690	26.00	22.9000	-2.80	0.21

**Limits**

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
138	5690	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB) 0.24 Included in Calculations of Corr'd Power & PPSD

**Output Power Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
138	5690	-2.34	-3.60	0.32	24.00	-23.68

**PPSD Results**

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
138	5690	-9.64	-10.74	-6.90	11.00	-17.90

**AVERAGE OUTPUT POWER (WHOLE FUNDAMENTAL)**

**Results**

Frequency	Power, Chain 0 (dBm)	Power, Chain 1 (dBm)	Output Power (dBm)	Output Power (mW)
<b>5.6 GHz band, 2TX (Channels overlapping UNII-2 and UNII-3 bands)</b>				
5690 (UNII-2 portion)	11.63	10.54	14.249	26.60
5690 (UNII-3 portion)	-2.34	-3.60	0.326	1.08
5690 (Whole signal)	11.10	9.10	13.464	22.20

## 10.4.17. 802.11a MODE IN THE 5.8 GHz BAND

### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5745	21.72	16.6800	-3.00	0.01
Mid	5785	21.60	16.5000	-3.00	0.01
High	5825	21.66	16.7500	-3.00	0.01

### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5745	30.00	29.22	35.22	29.22	30.00	17.00	17.00
Mid	5785	30.00	29.17	35.17	29.17	30.00	17.00	17.00
High	5825	30.00	29.24	35.24	29.24	30.00	17.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.50	10.86	14.77	30.00	-15.23
Mid	5785	12.49	10.87	14.77	30.00	-15.23
High	5825	12.63	11.01	14.90	30.00	-15.10

### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5745	-1.11	-3.12	1.01	17.00	-15.99
Mid	5785	-1.58	-2.97	0.79	17.00	-16.21
High	5825	-1.07	-2.59	1.25	17.00	-15.75

#### 10.4.18. 802.11n HT20 MODE IN THE 5.8 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5745	21.66	17.7300	-3.00	0.01
Mid	5785	22.20	17.8000	-3.00	0.01
High	5825	21.78	17.7700	-3.00	0.01

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5745	30.00	29.49	35.49	29.49	30.00	17.00	17.00
Mid	5785	30.00	29.50	35.50	29.50	30.00	17.00	17.00
High	5825	30.00	29.50	35.50	29.50	30.00	17.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

##### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5745	12.55	11.05	14.88	29.49	-14.61
Mid	5785	12.62	10.94	14.87	29.50	-14.63
High	5825	12.53	11.00	14.84	29.50	-14.65

##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5745	-1.71	-3.05	0.68	17.00	-16.32
Mid	5785	-1.58	-2.87	0.83	17.00	-16.17
High	5825	-1.68	-2.96	0.73	17.00	-16.27

### 10.4.19. 802.11n HT40 MODE IN THE 5.8 GHz BAND

#### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5755	40.0	36.1600	-3.00	0.01
High	5795	39.9	36.3600	-3.00	0.01

#### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5755	30.00	30.00	36.00	30.00	30.00	17.00	17.00
High	5795	30.00	30.00	36.00	30.00	30.00	17.00	17.00

Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd Power & PPSD
--------------------	------	---

#### Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5755	12.20	10.74	14.54	30.00	-15.46
High	5795	12.13	10.57	14.43	30.00	-15.57

#### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5755	-4.74	-6.53	-2.53	17.00	-19.53
High	5795	-4.98	-6.66	-2.73	17.00	-19.73

#### 10.4.20. 802.11ac HT80 MODE IN THE 5.8 GHz BAND

##### Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain for Power (dBi)	Directional Gain for PPSD (dBi)
Low	5775	81.96	76.0800	-3.00	0.01

##### Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5775	30.00	30.00	36.00	30.00	30.00	17.00	17.00

Duty Cycle CF (dB) 0.13 Included in Calculations of Corr'd Power & PPSD

##### Output Power Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5775	12.22	10.66	14.65	30.00	-15.35


##### PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Chain 1 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5775	-8.00	-9.70	-5.63	17.00	-22.63


## 10.4.21. OUTPUT POWER AND PPSD PLOTS


### UNII 5.2GHz

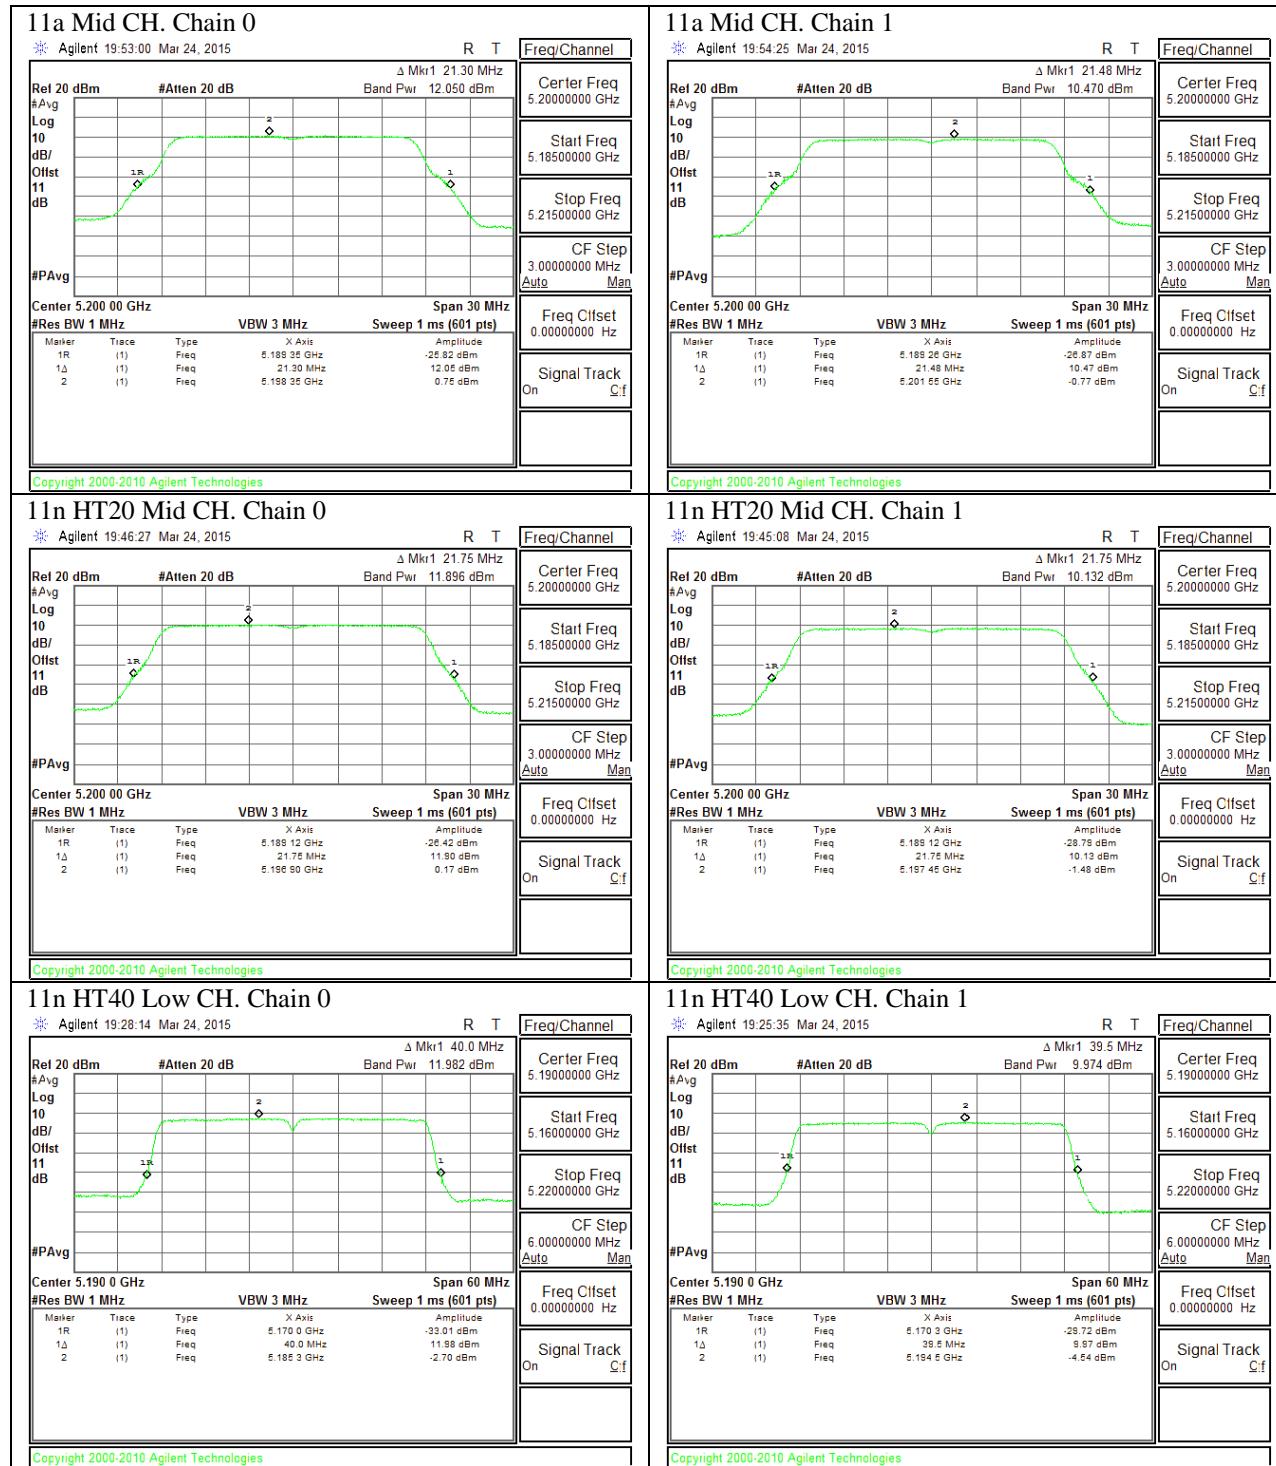

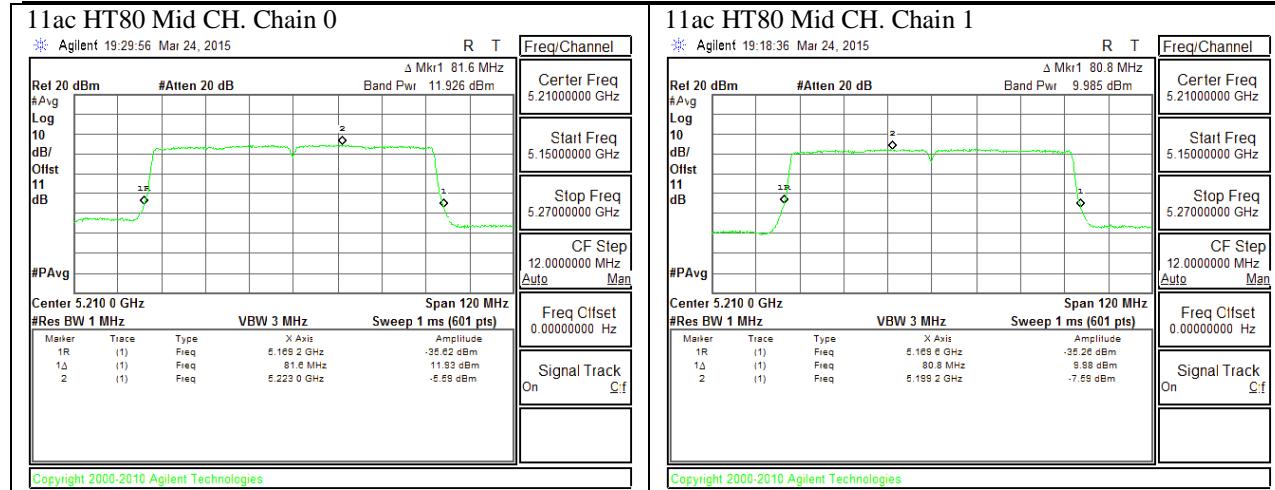



## UNII 5.3GHz

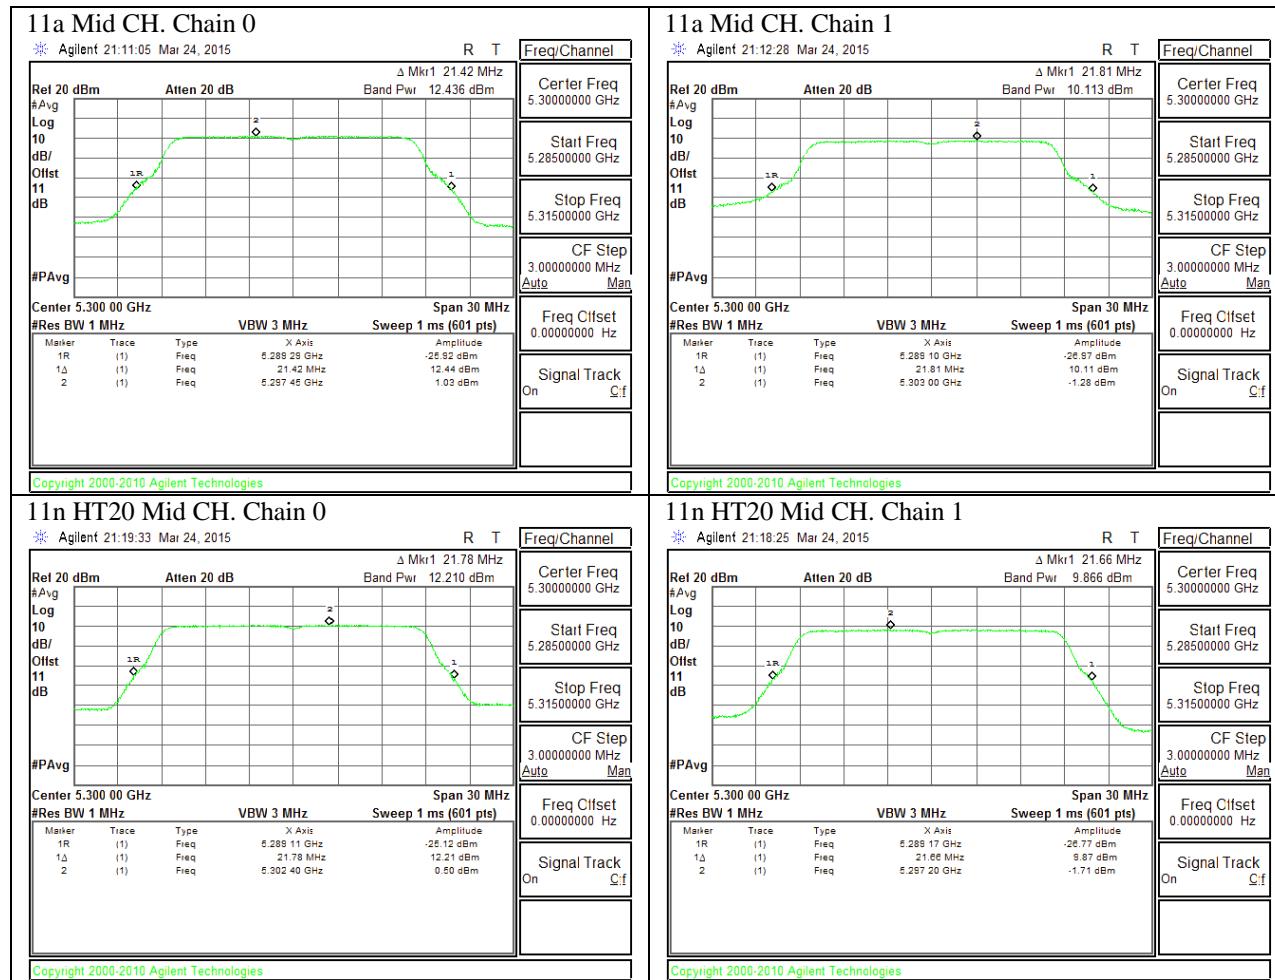

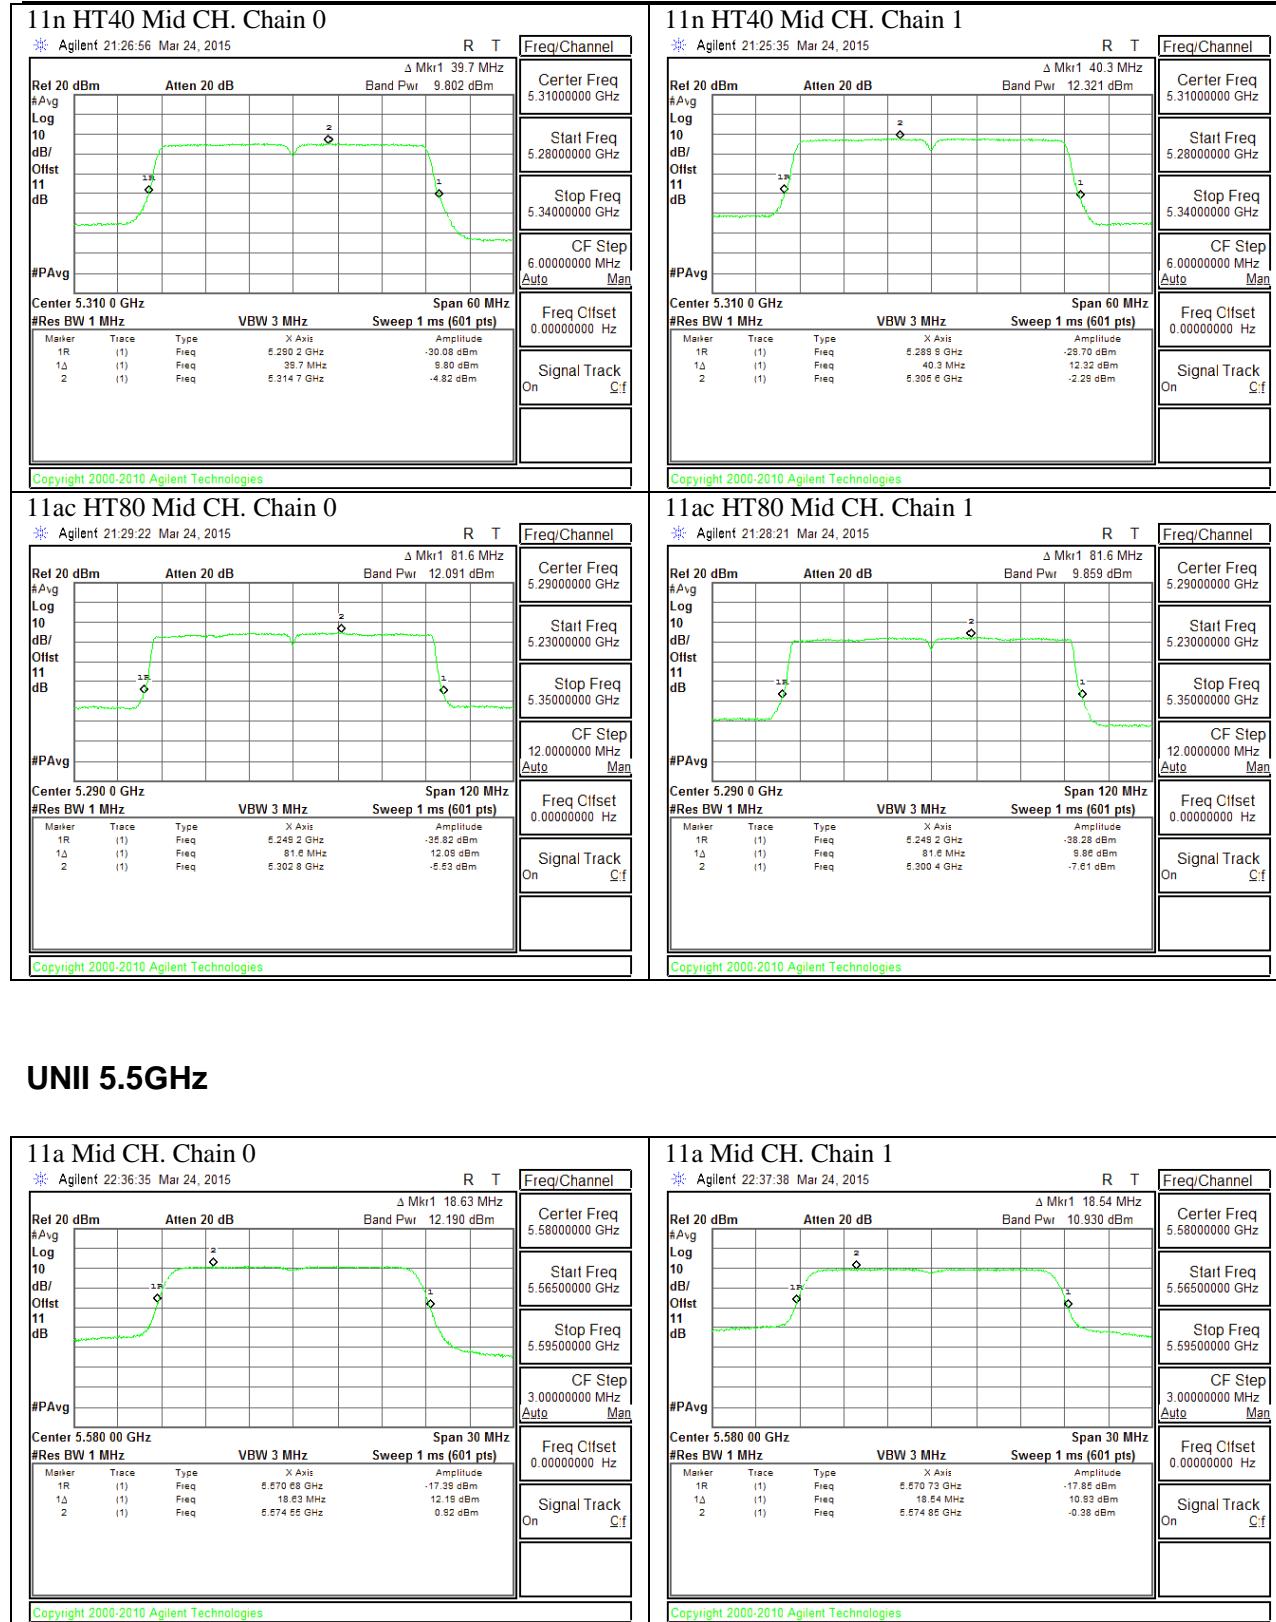


## UNII 5.5GHz

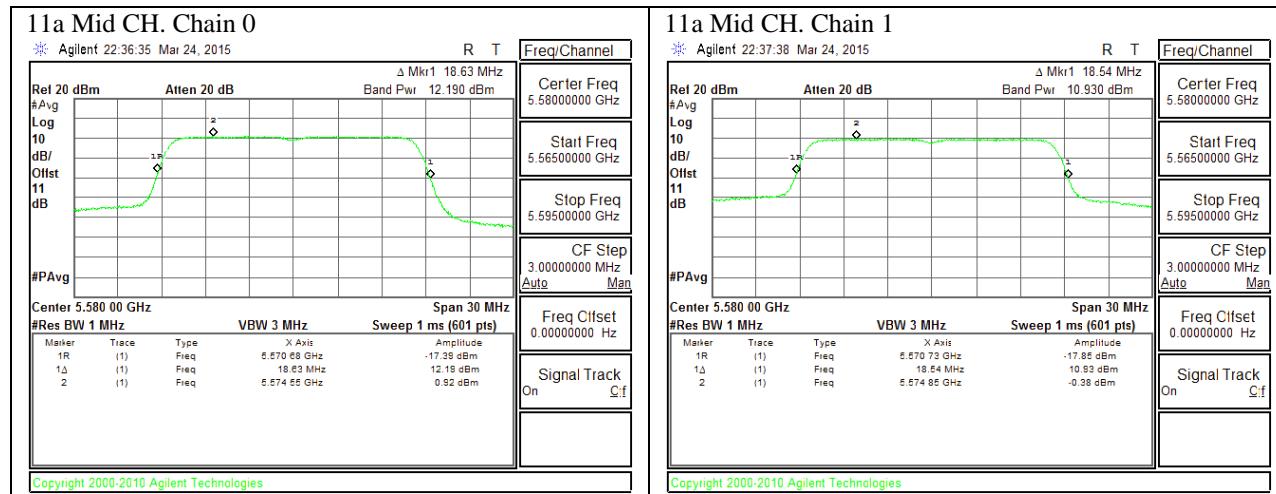


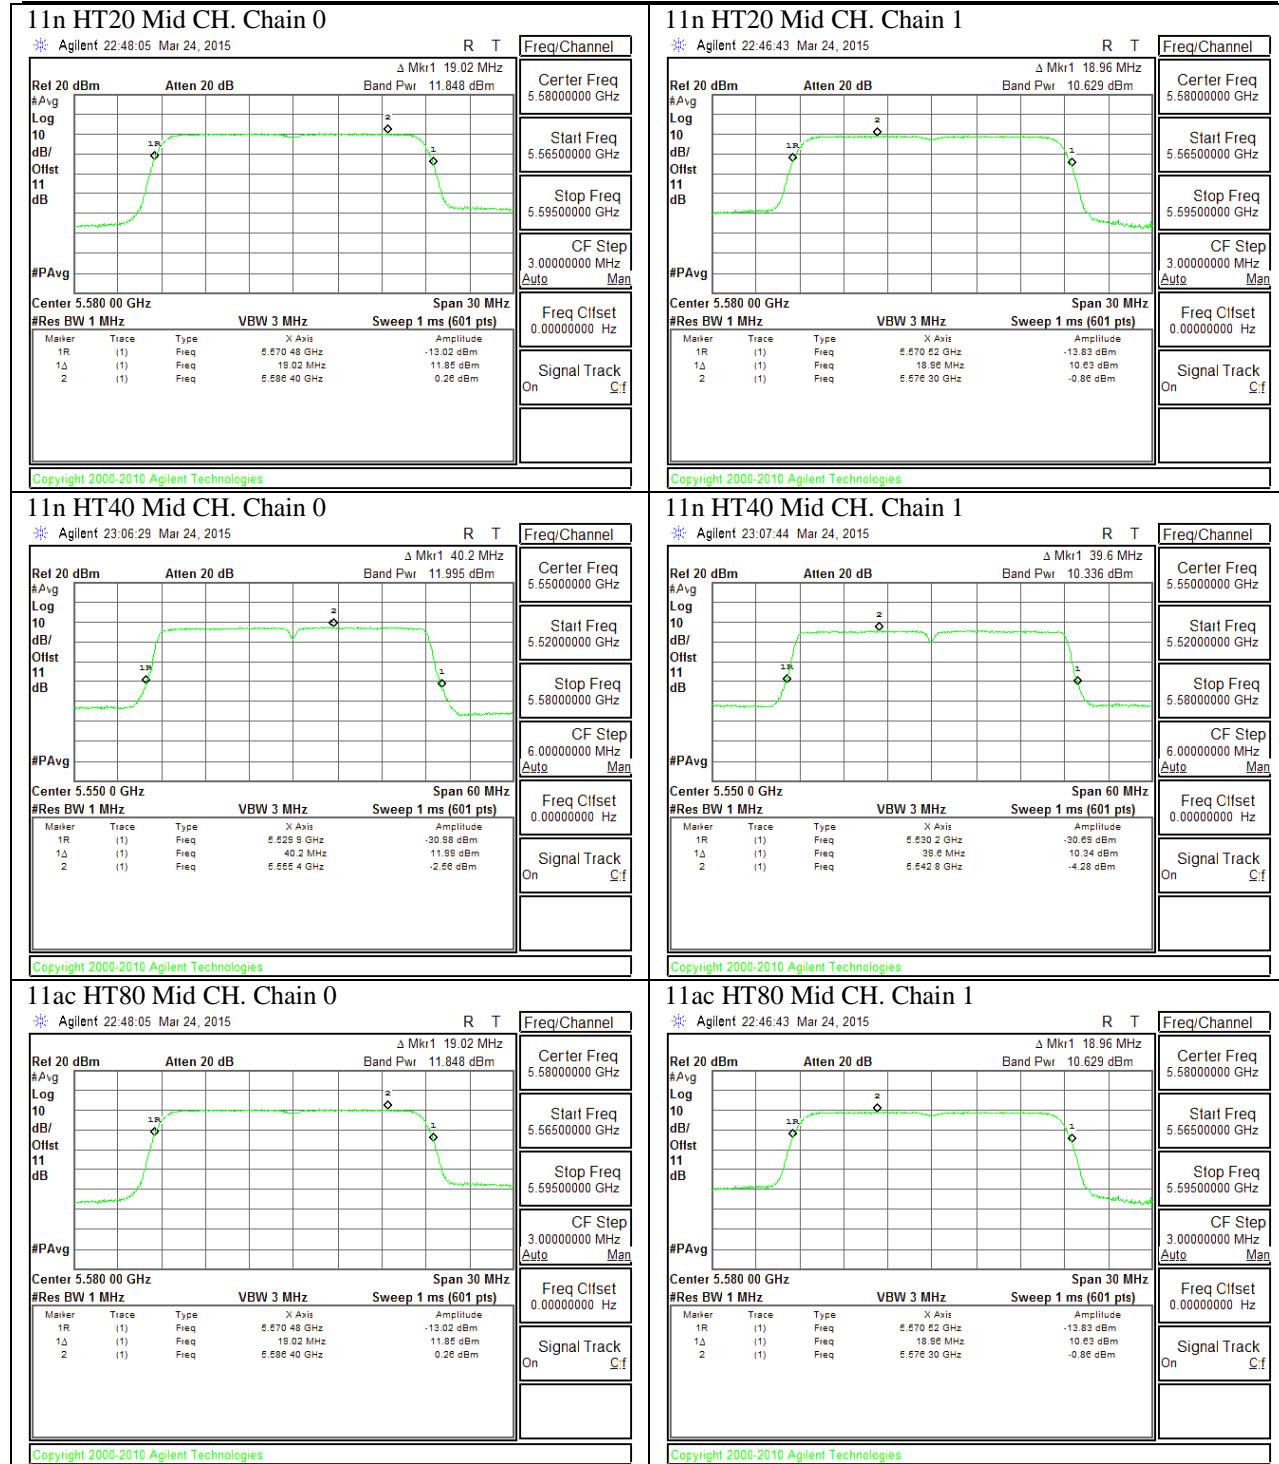


## UNII STRADDLE CHANNEL


### UNII-2C BAND

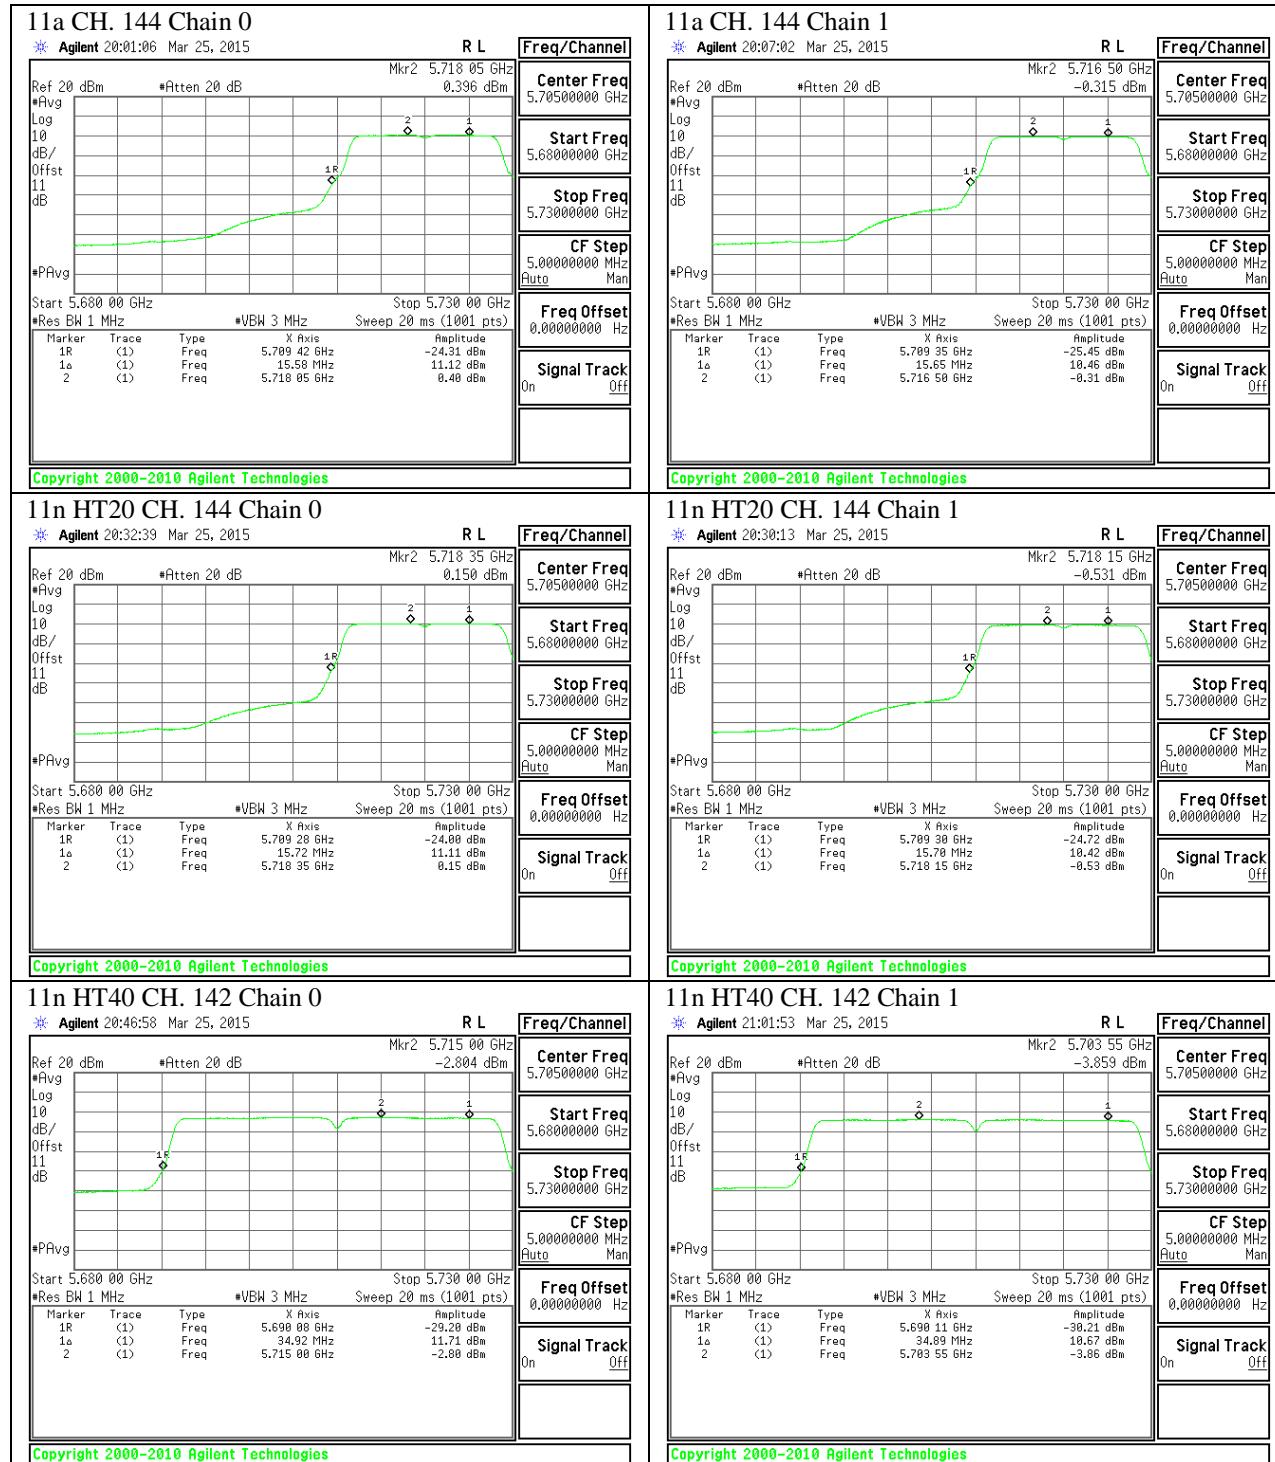

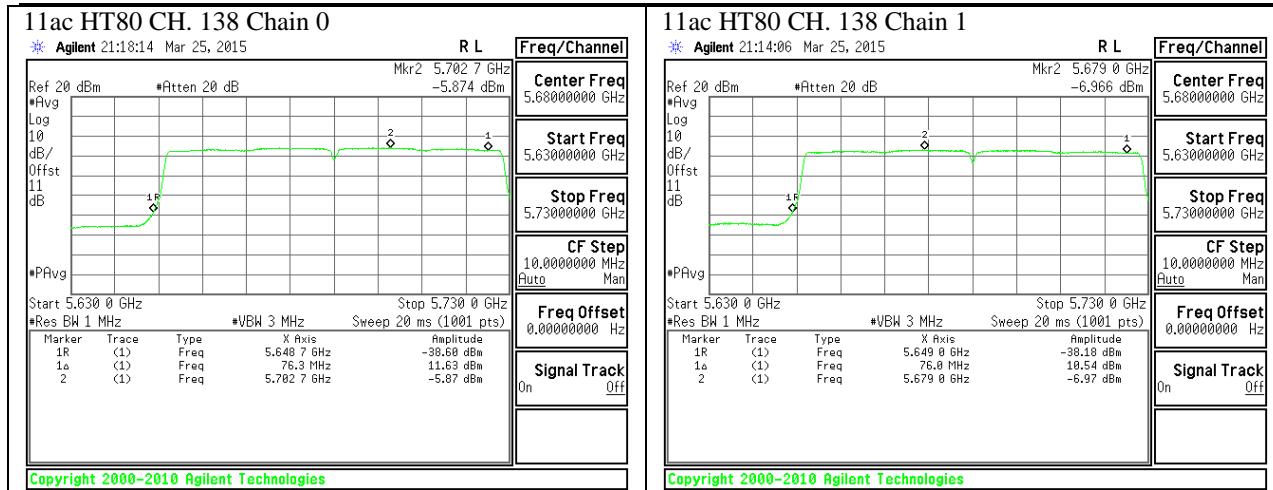



**UNII-3 BAND**

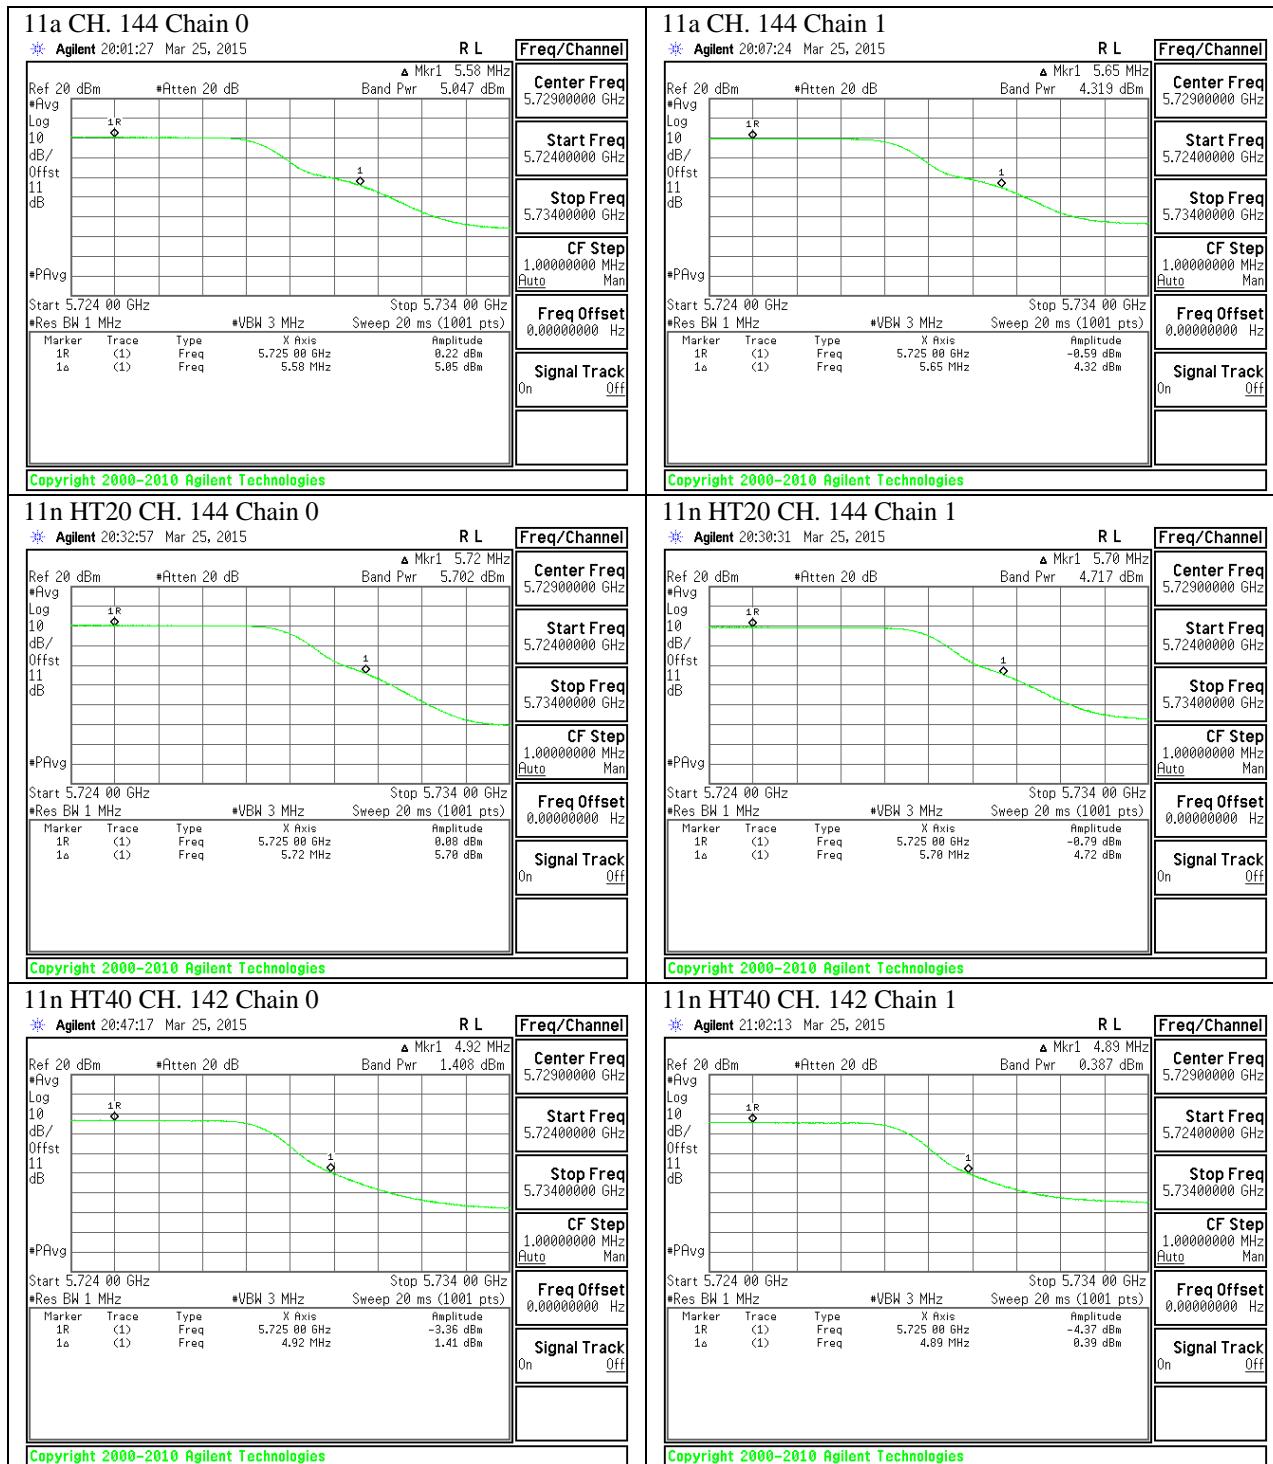

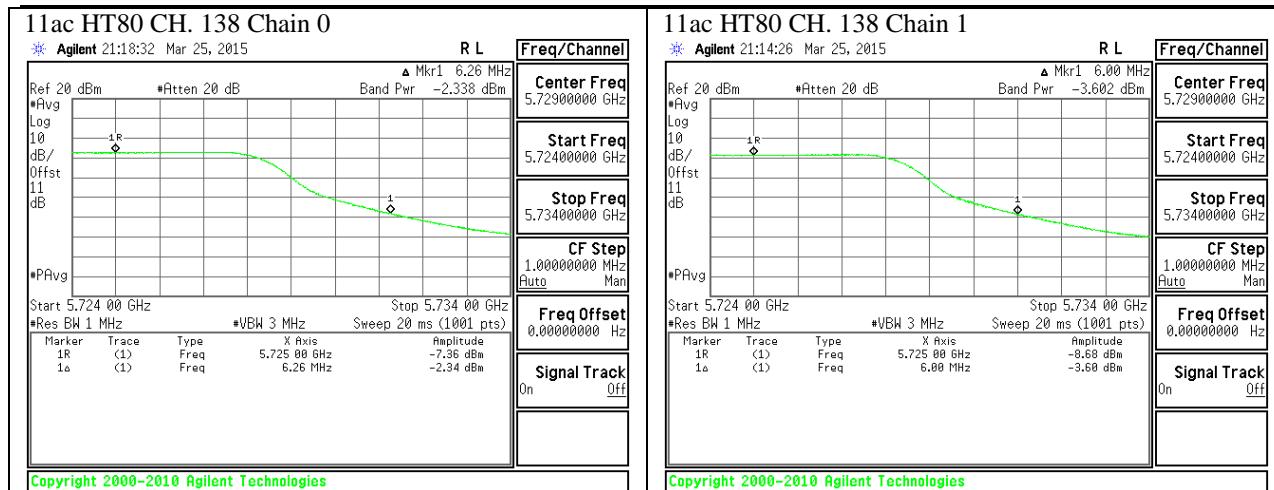



**UNII-3 BAND PSD**

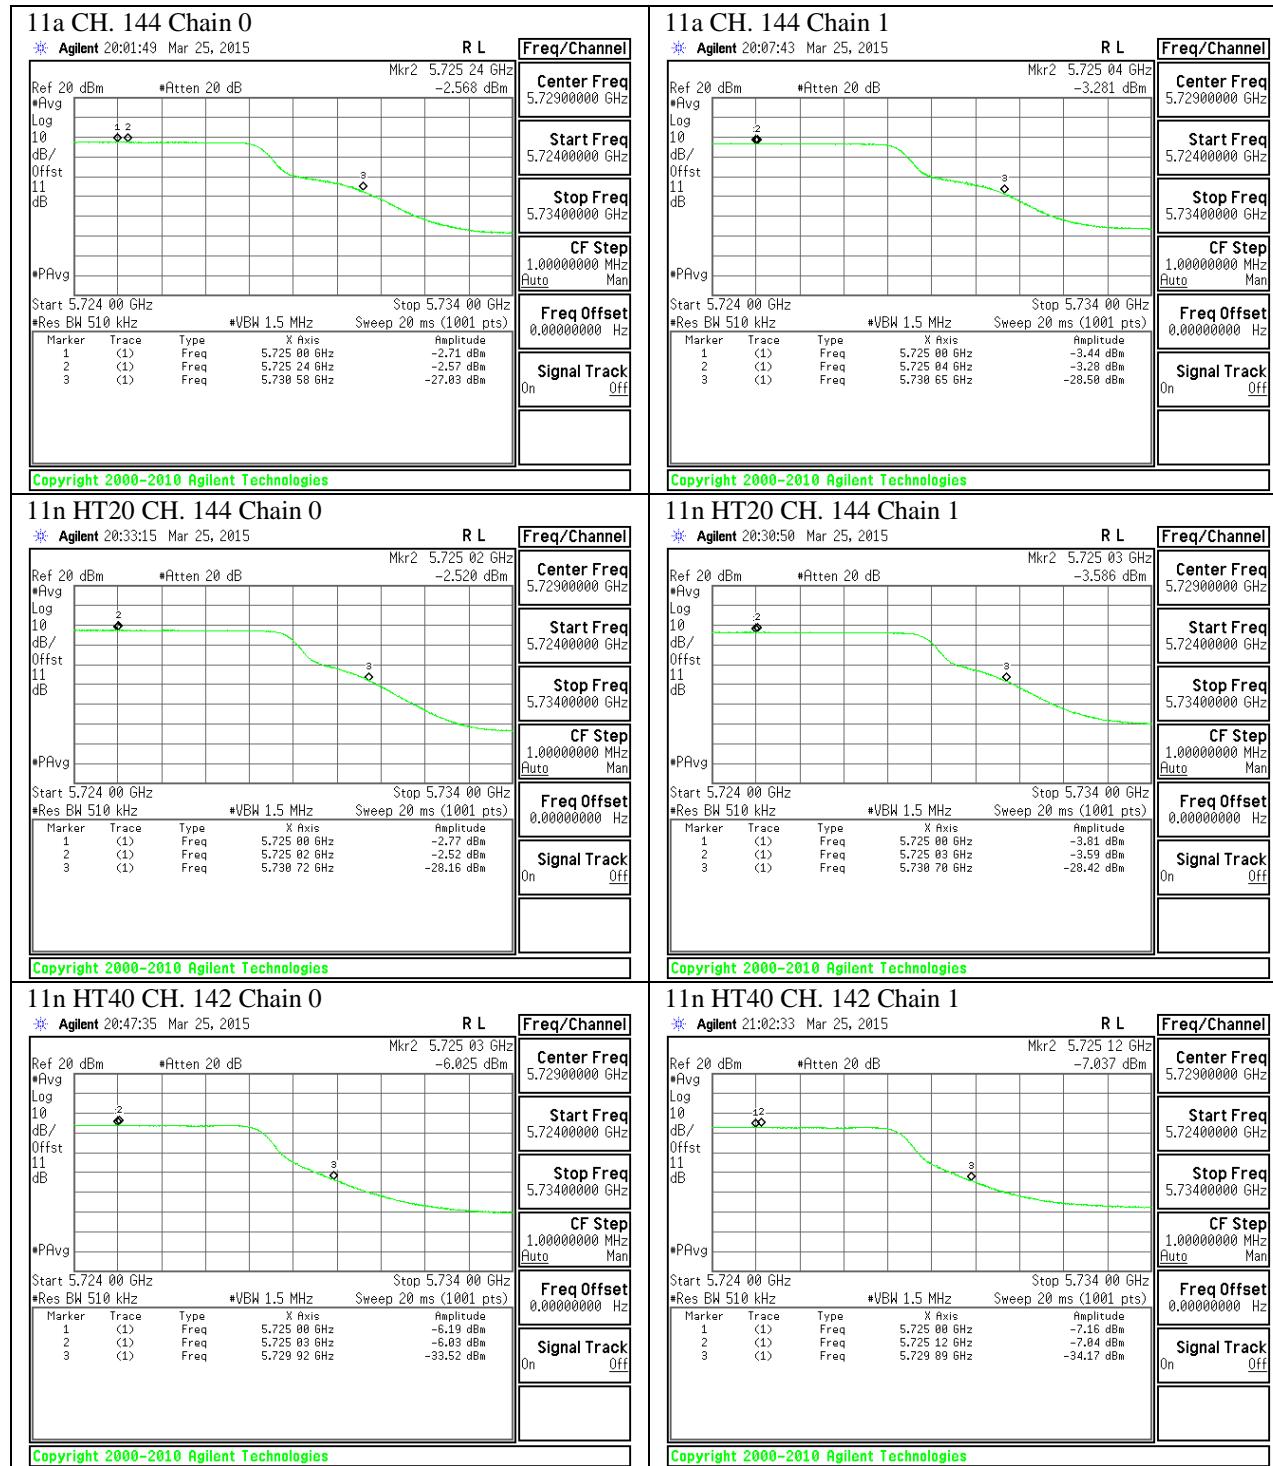


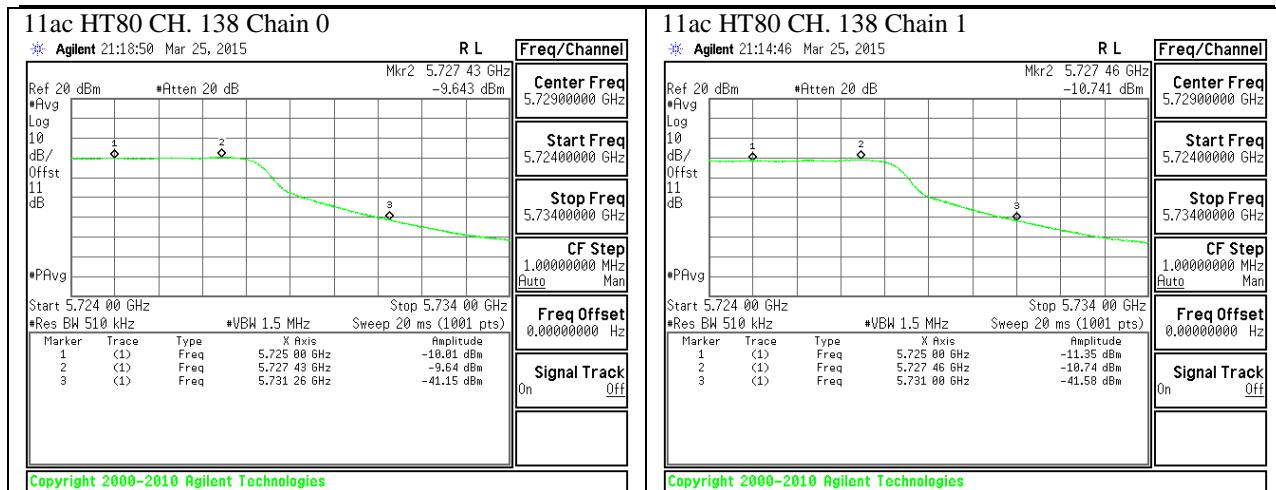

## UNII 5.8GHz

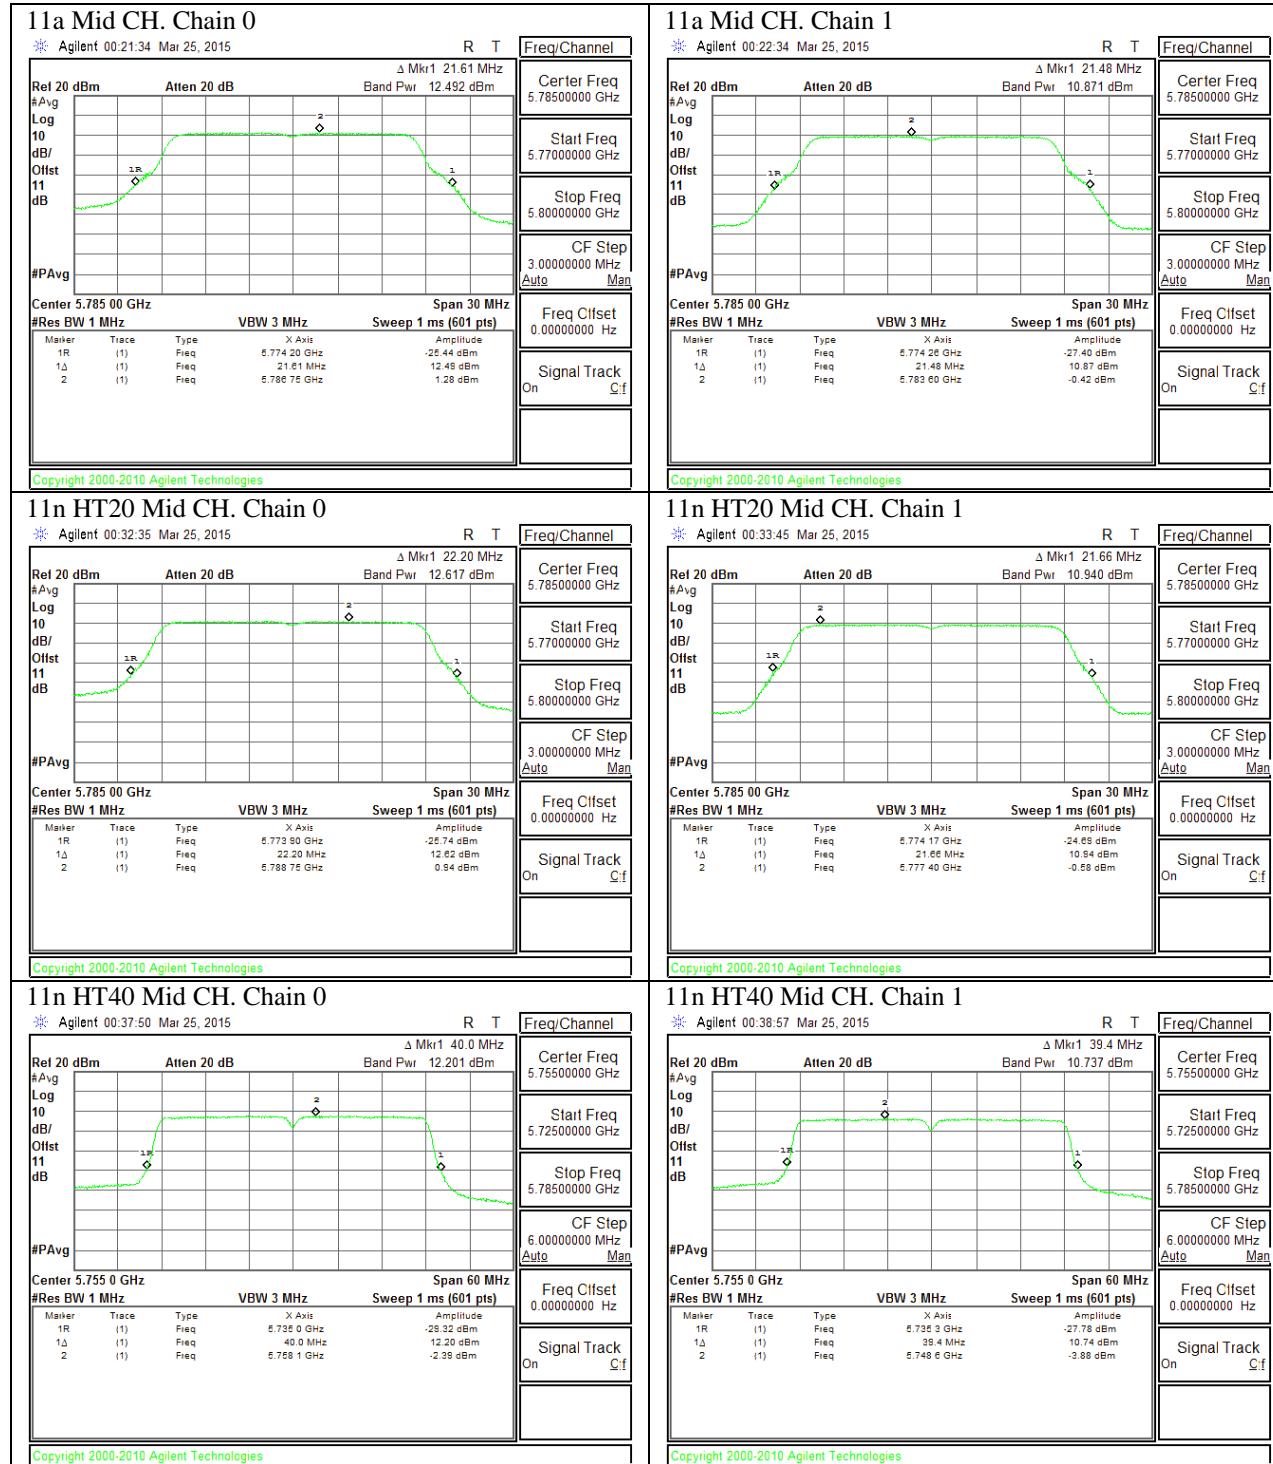

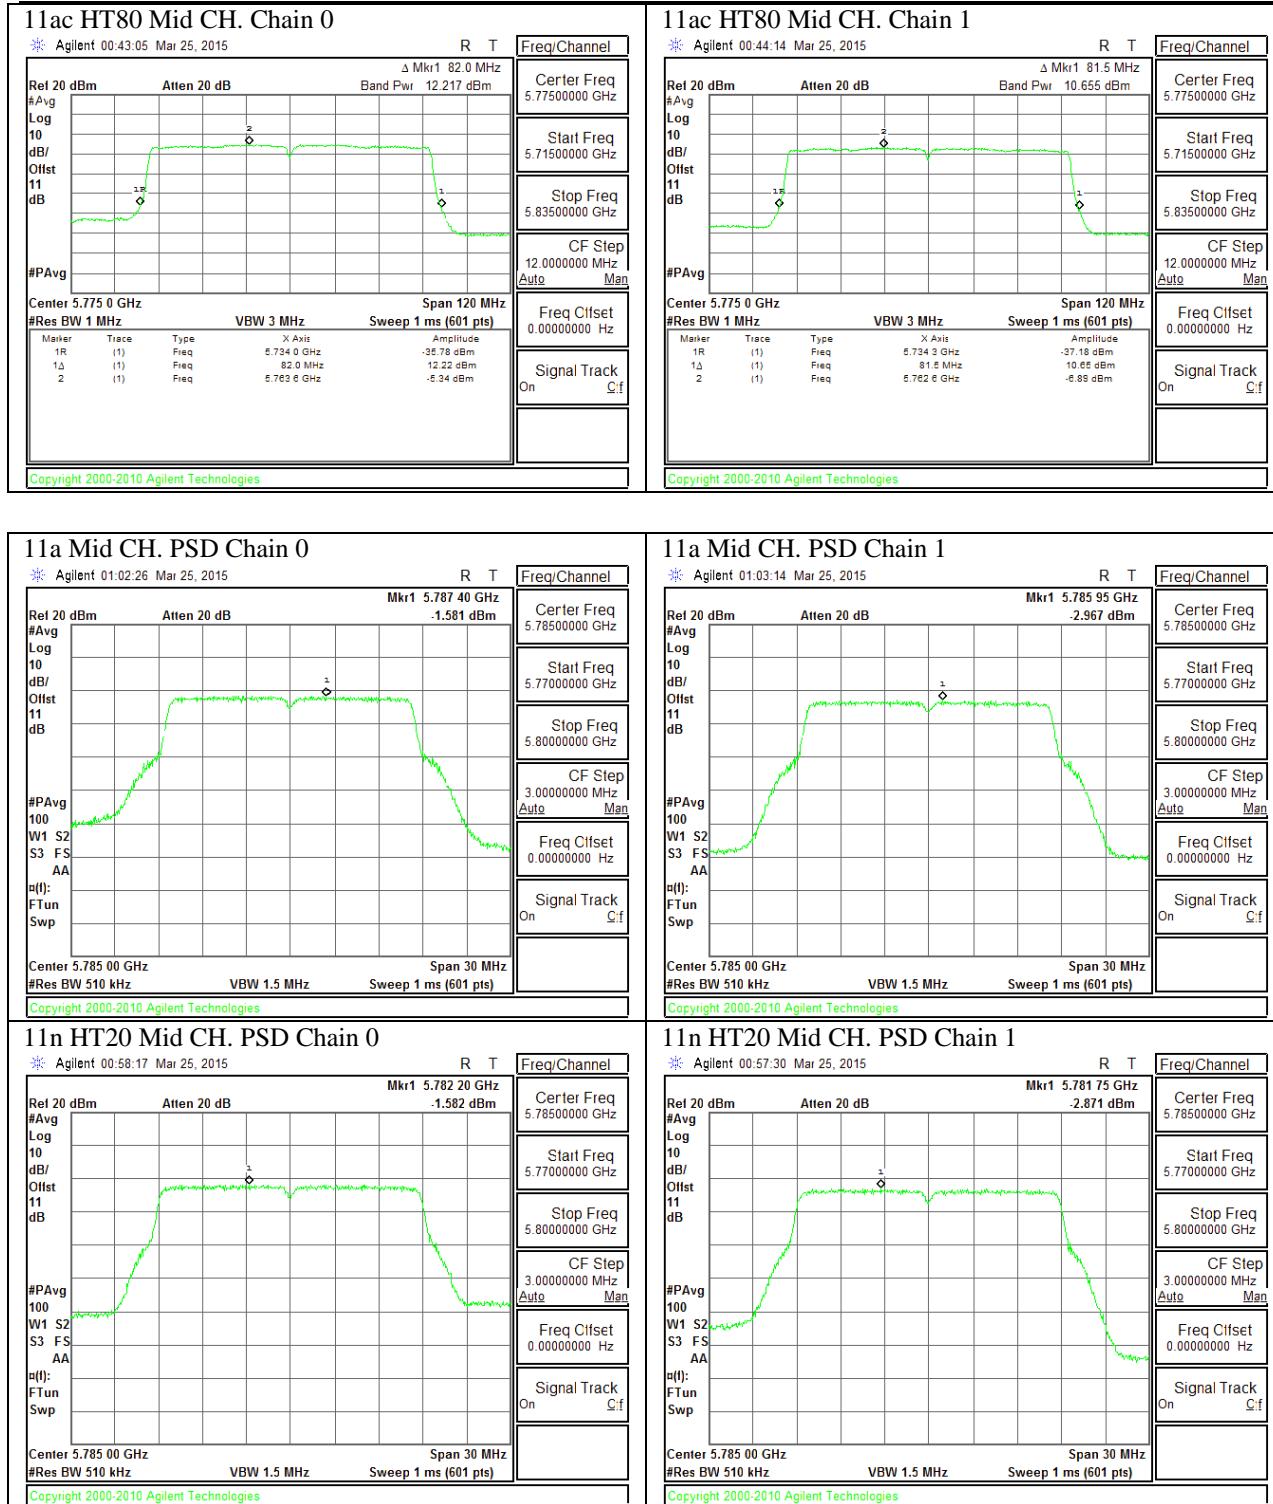

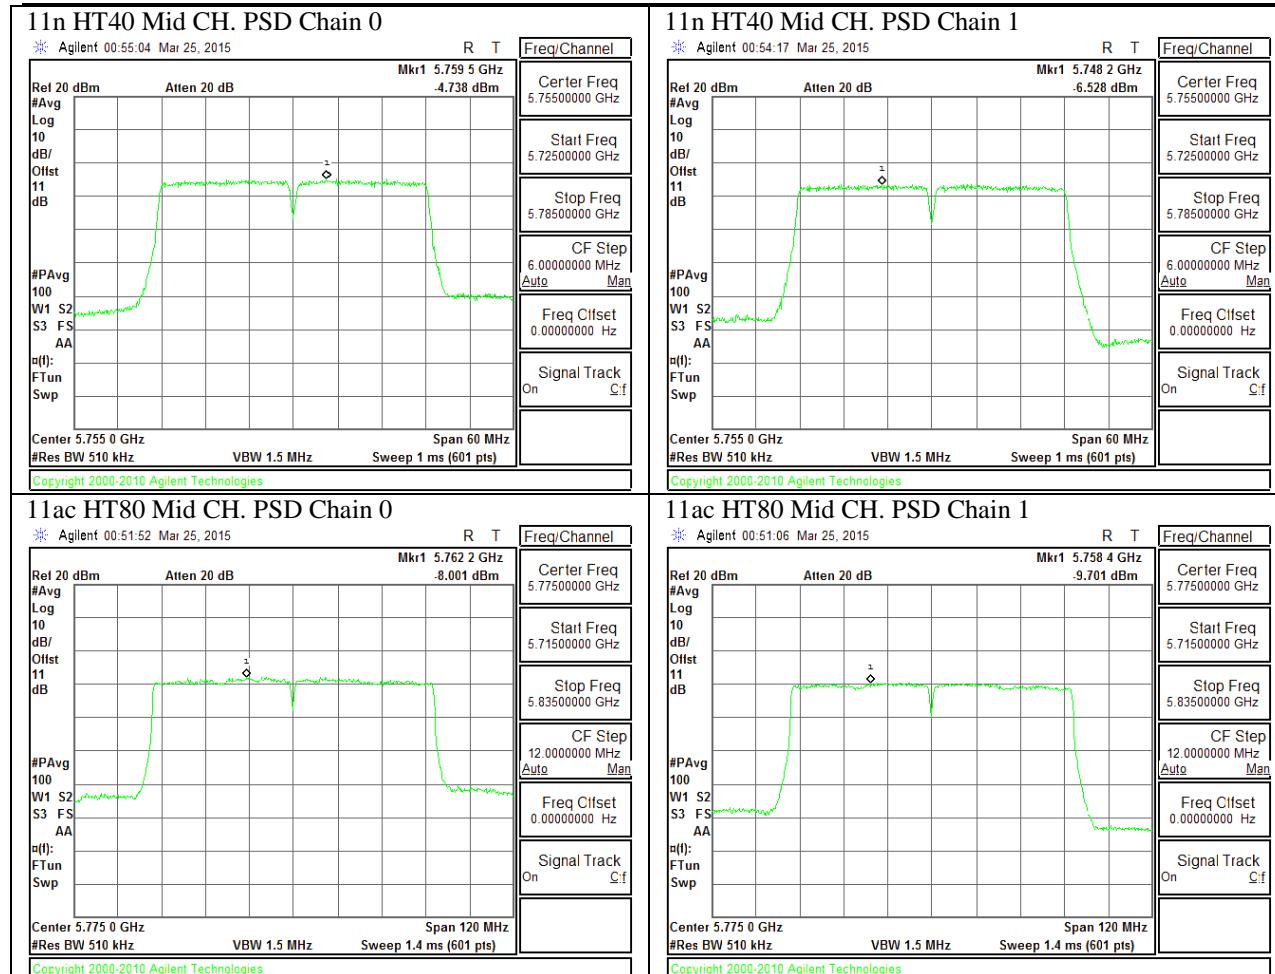

## 11. TRANSMITTER ABOVE 1 GHz

### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 UNII part H) 6) d) Method AD:

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 11.1.5.2 GHz

### 11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

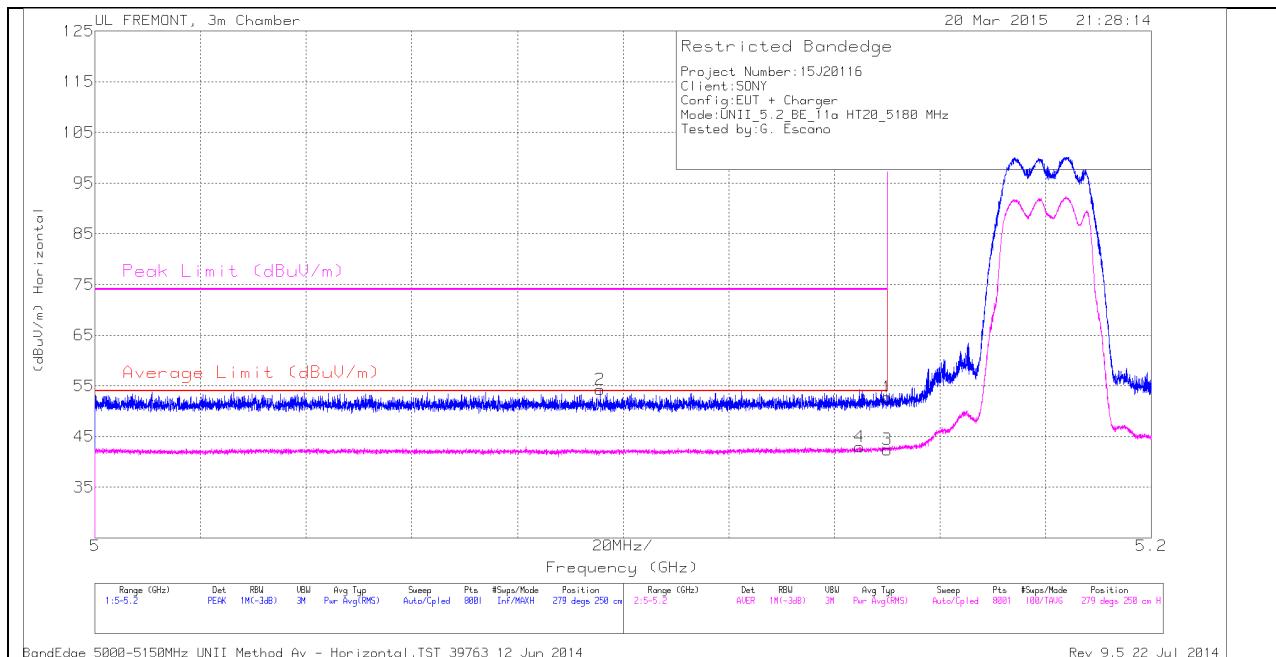


#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBmV)	Det	AF T119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBmV/m)	Average Limit (dBmV/m)	Margin (dB)	Peak Limit (dBmV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.096	41.76	PK	34.1	-21.6	0	54.26	-	-	74	-19.74	279	250	H
4	5.145	30.34	RMS	34.2	-21.6	0	42.94	54	-11.06	-	-	279	250	H
1	5.15	40.13	PK	34.2	-21.6	0	52.73	-	-	74	-21.27	279	250	H
3	5.15	29.81	RMS	34.2	-21.6	0	42.41	54	-11.59	-	-	279	250	H

PK - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

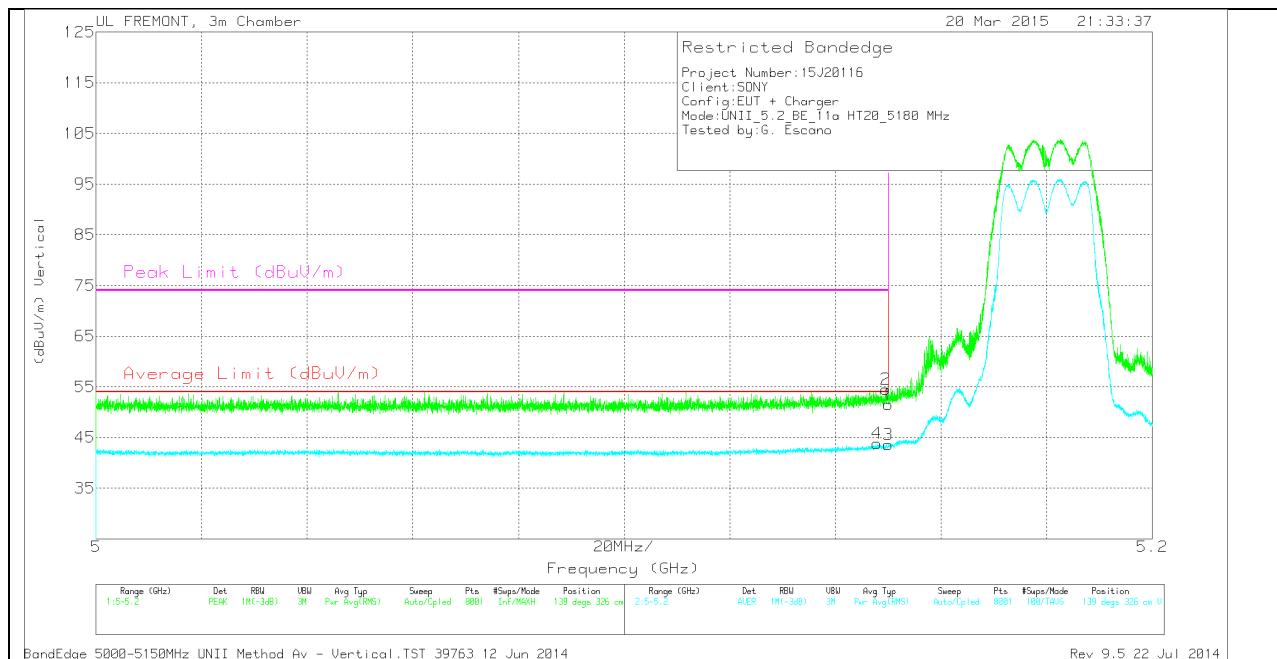

### VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.148	31.18	RMS	34.2	-21.6	0	43.78	54	-10.22	-	-	139	326	V
1	5.15	38.89	PK	34.2	-21.6	0	51.49	-	-	74	-22.51	139	326	V
2	5.15	41.92	PK	34.2	-21.6	0	54.52	-	-	74	-19.48	139	326	V
3	5.15	30.97	RMS	34.2	-21.6	0	43.57	54	-10.43	-	-	139	326	V

PK - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

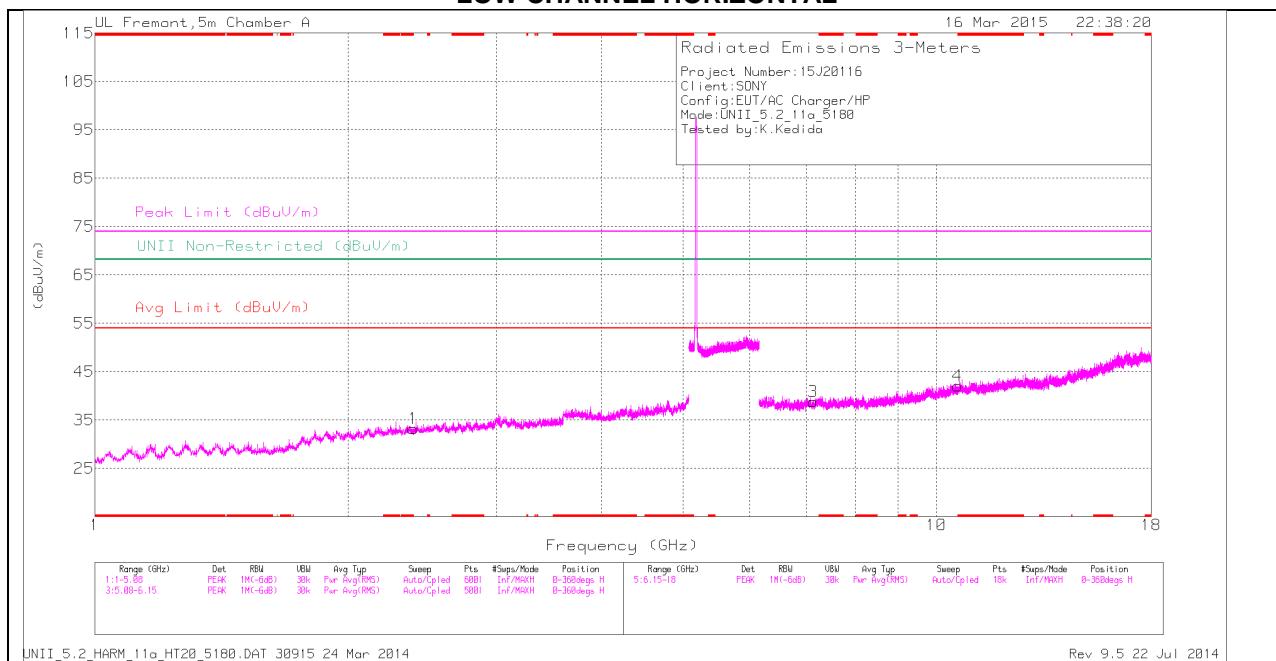

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

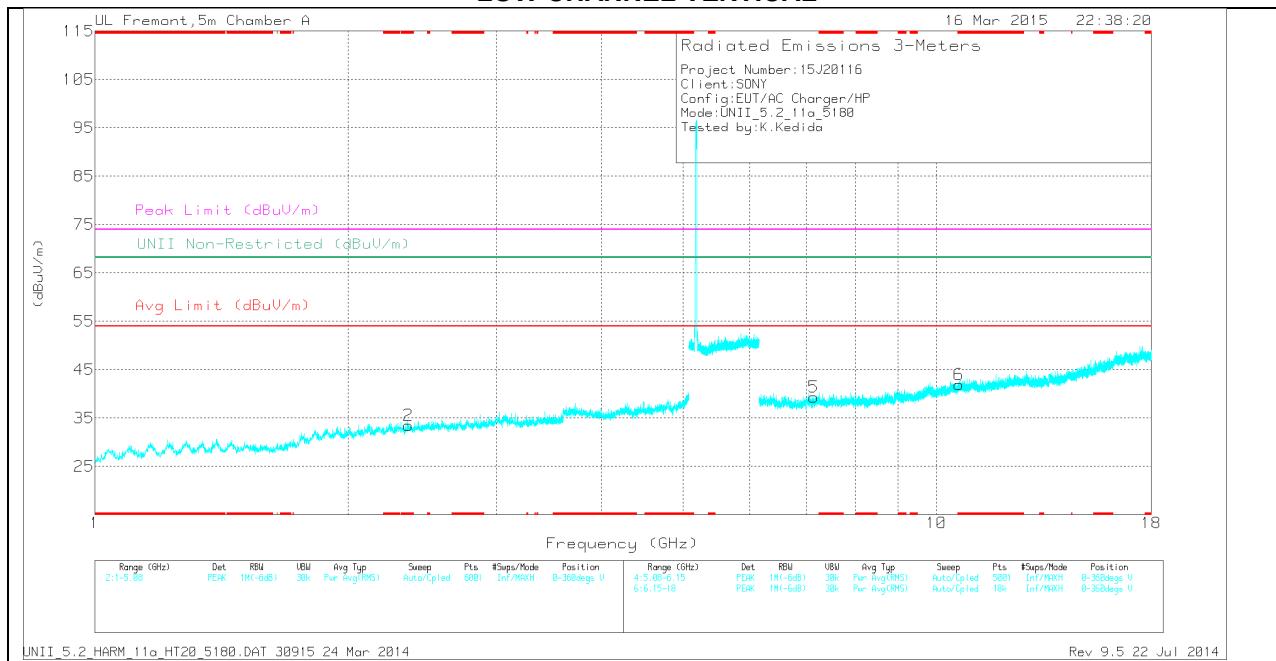

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


**TRACE MARKERS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 10.602	26.27	PK	37.7	-21.9	0	42.07	-	-	74	-31.93	-	-	0-360	201	H
6	* 10.636	26.08	PK	37.7	-21.9	0	41.88	-	-	74	-32.12	-	-	0-360	100	V
2	* 2.359	33.89	PK	31.9	-32.3	0	33.49	-	-	74	-40.51	-	-	0-360	100	V
1	* 2.389	33.44	PK	32	-32.2	0	33.24	-	-	74	-40.76	-	-	0-360	201	H
3	7.135	30.11	PK	35.5	-26.8	0	38.81	-	-	-	-	68.2	-29.39	0-360	201	H
5	7.148	30.3	PK	35.5	-26.5	0	39.3	-	-	-	-	68.2	-28.9	0-360	100	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK - Peak detector

MID CHANNEL HORIZONTAL

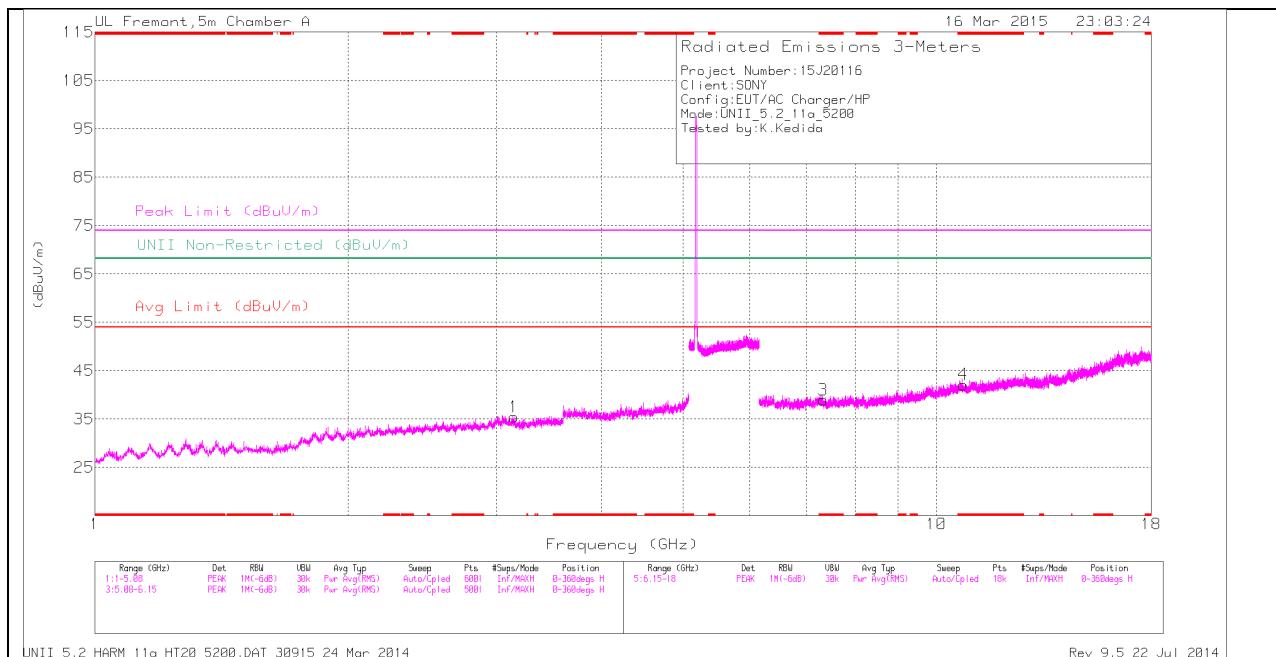

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

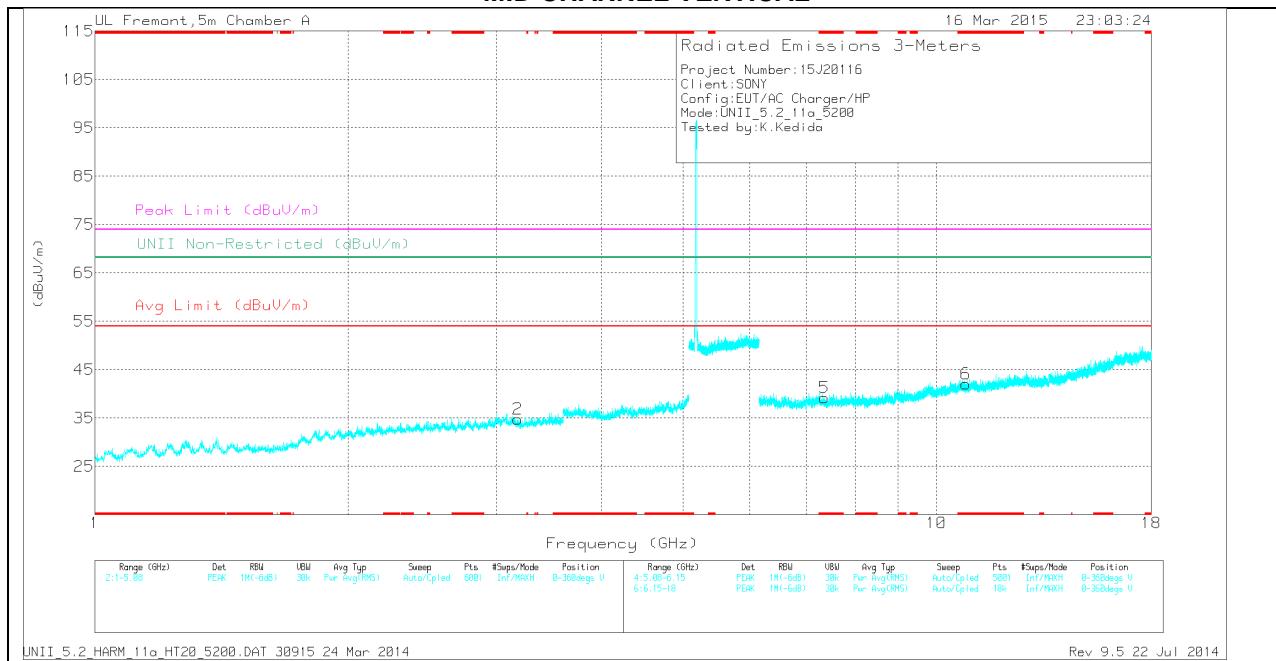

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 7.329	29.11	PK	35.5	-25.7	0	38.91	-	-	74	-35.09	-	-	0-360	201	H
4	* 10.755	26.13	PK	37.8	-21.8	0	42.13	-	-	74	-31.87	-	-	0-360	100	H
5	* 7.365	29.75	PK	35.5	-26	0	39.25	-	-	74	-34.75	-	-	0-360	201	V
6	* 10.83	26.47	PK	37.8	-22.2	0	42.07	-	-	74	-31.93	-	-	0-360	201	V
1	3.15	33.44	PK	32.8	-30.8	0	35.44	-	-	-	-	68.2	-32.76	0-360	100	H
2	3.178	33.02	PK	32.8	-31	0	34.82	-	-	-	-	68.2	-33.38	0-360	100	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK - Peak detector

**HIGH CHANNEL HORIZONTAL**

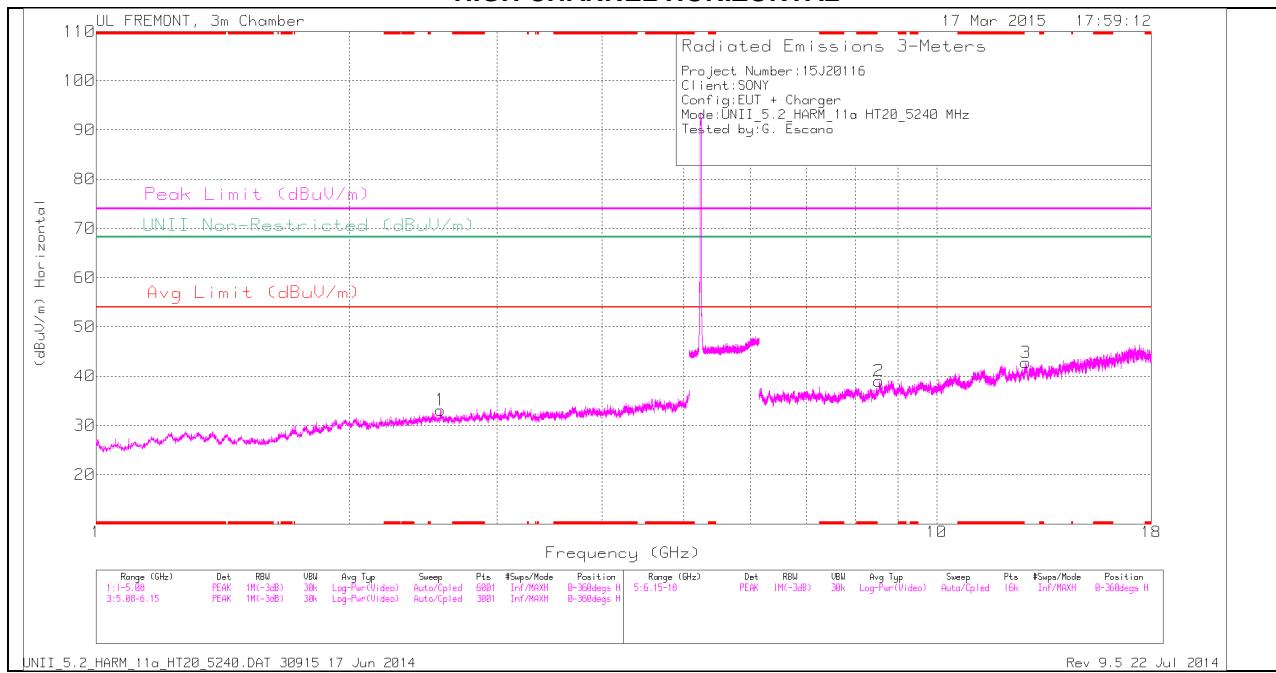

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

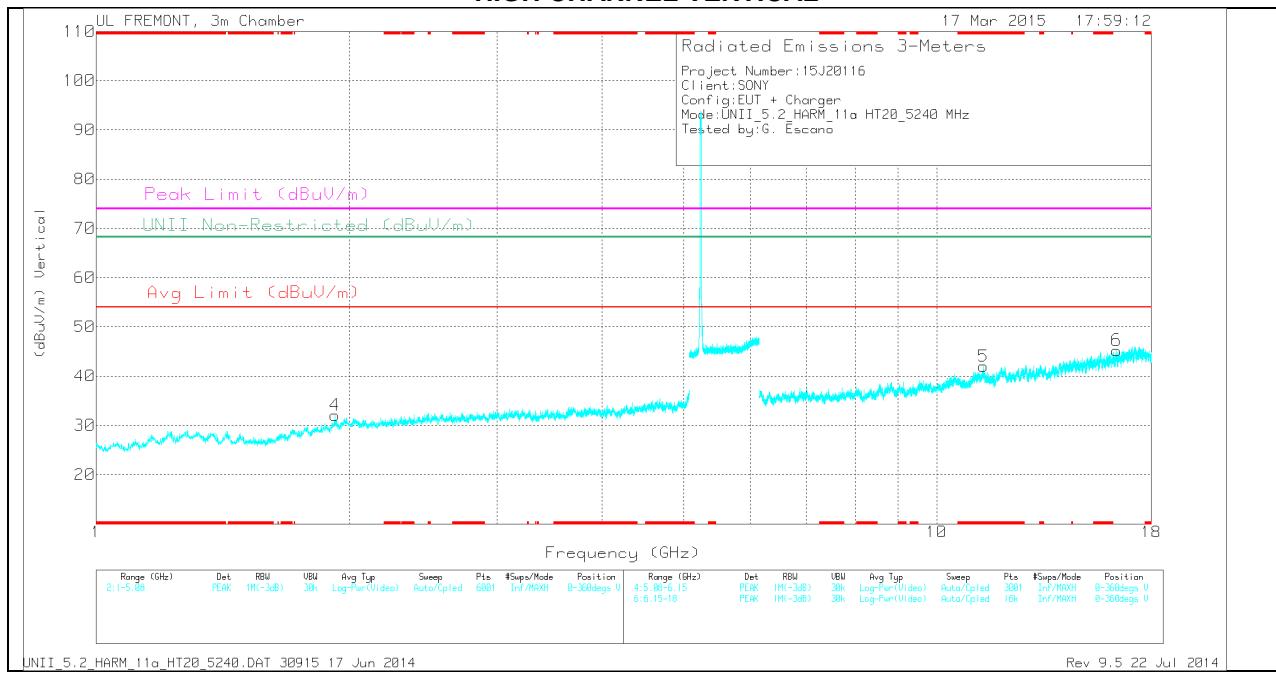

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.358	29.6	PK	38.1	-25.7	0	42	-	-	74	-32	-	-	0-360	200	V
4	1.925	33.37	PK	31.2	-32.5	0	32.07	-	-	-	-	68.2	-36.13	0-360	100	V
1	2.569	32.99	PK	32.4	-32.3	0	33.09	-	-	-	-	68.2	-35.11	0-360	100	H
2	8.535	29.71	PK	35.8	-26.5	0	39.01	-	-	-	-	68.2	-29.19	0-360	100	H
3	12.765	29.78	PK	39.1	-26.1	0	42.78	-	-	-	-	68.2	-25.42	0-360	100	H
6	16.364	29.73	PK	40.7	-25.2	0	45.23	-	-	-	-	68.2	-22.97	0-360	200	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.359	37.58	PK1	38.1	-25.7	0	49.98	-	-	74	-24.02	-	-	21	220	V
* 11.36	25.92	AD1	38.1	-25.8	0	38.22	54	-15.78	-	-	-	-	21	220	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

## 11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

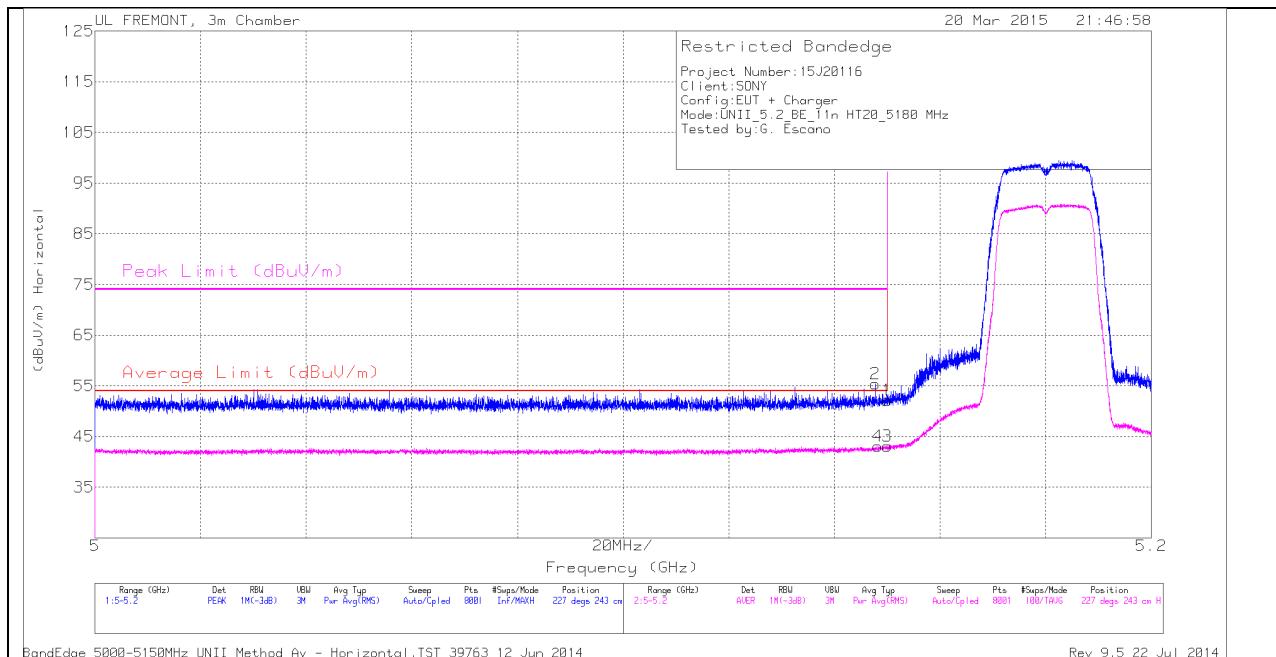


### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.148	42.82	PK	34.2	-21.6	0	55.42	-	-	74	-18.58	227	243	H
4	5.148	30.52	RMS	34.2	-21.6	0	43.12	54	-10.88	-	-	227	243	H
1	5.15	39.59	PK	34.2	-21.6	0	52.19	-	-	74	-21.81	227	243	H
3	5.15	30.49	RMS	34.2	-21.6	0	43.09	54	-10.91	-	-	227	243	H

PK - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

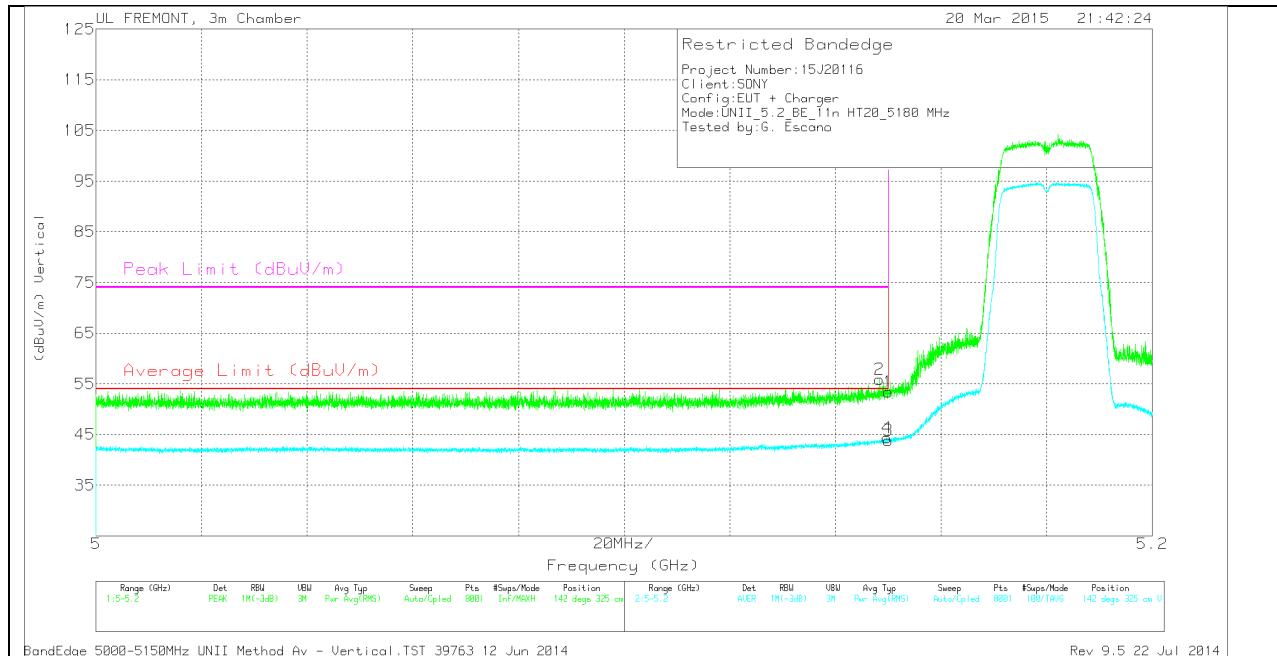

### VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.148	43.27	PK	34.2	-21.6	0	55.87	-	-	74	-18.13	142	325	V
1	5.15	40.83	PK	34.2	-21.6	0	53.43	-	-	74	-20.57	142	325	V
3	5.15	31.25	RMS	34.2	-21.6	0	43.85	54	-10.15	-	-	142	325	V
4	5.15	31.69	RMS	34.2	-21.6	0	44.29	54	-9.71	-	-	142	325	V

PK - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

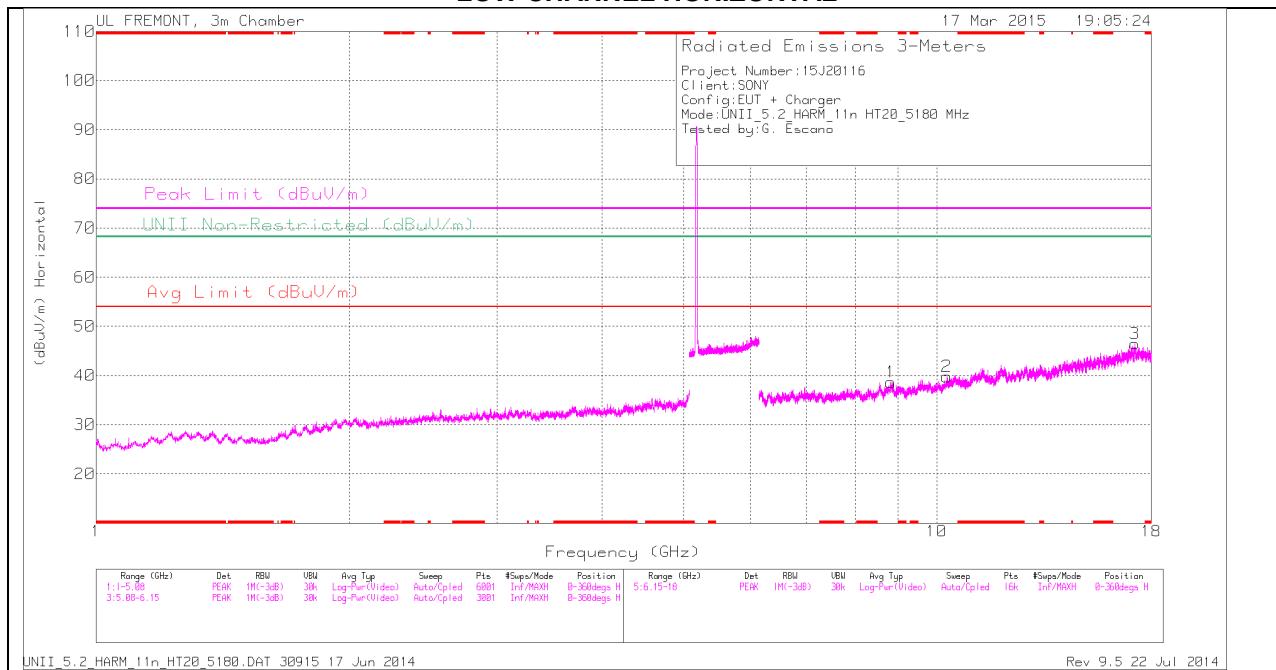

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

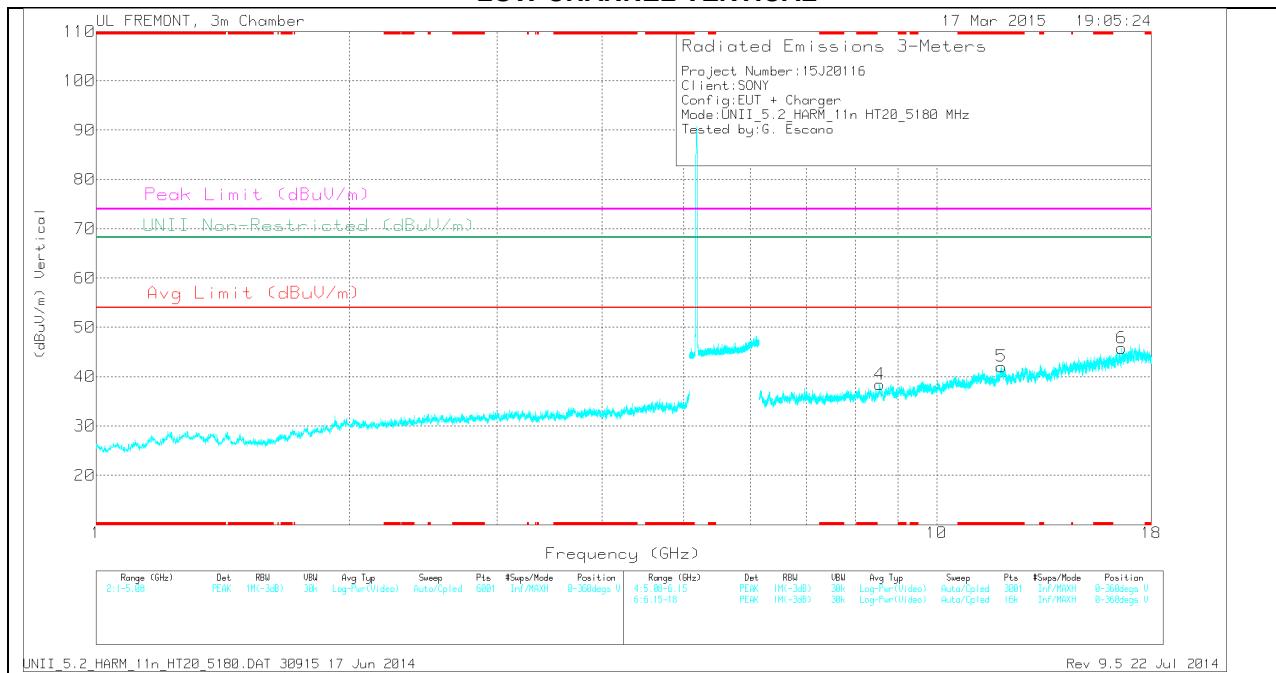

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL DATA

#### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 11.939	29.26	PK	39.1	-26.3	0	42.06	-	-	74	-31.94	-	-	0-360	100	V
4	8.552	28.75	PK	35.8	-26.1	0	38.45	-	-	-	-	68.2	-29.75	0-360	100	V
1	8.818	28.34	PK	35.9	-25.6	0	38.64	-	-	-	-	68.2	-29.56	0-360	100	H
2	10.279	28.19	PK	37.1	-25.5	0	39.79	-	-	-	-	68.2	-28.41	0-360	200	H
6	16.588	29.5	PK	41	-24.7	0	45.8	-	-	-	-	68.2	-22.4	0-360	200	V
3	17.207	28.05	PK	41.3	-22.9	0	46.45	-	-	-	-	68.2	-21.75	0-360	100	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

#### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.937	37.68	PK1	39.1	-26.3	0	50.48	-	-	74	-23.52	-	-	186	100	V
* 11.937	25.96	AD1	39.1	-26.3	0	38.76	54	-15.24	-	-	-	-	186	100	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak


AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

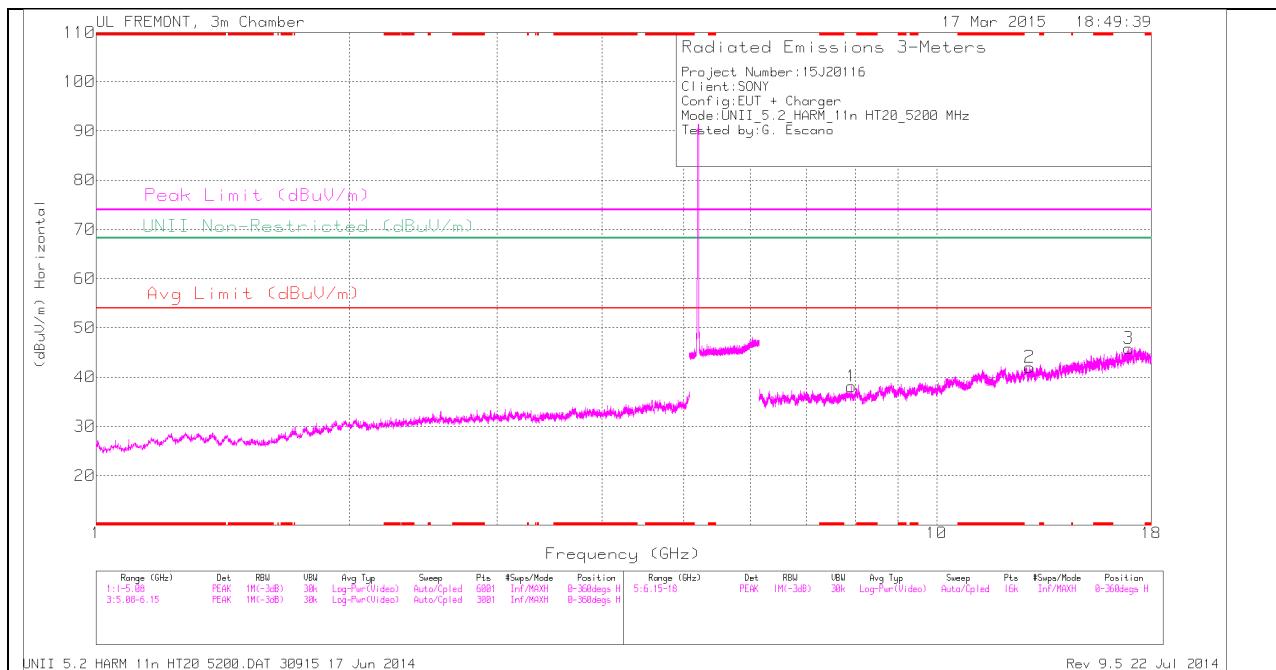

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

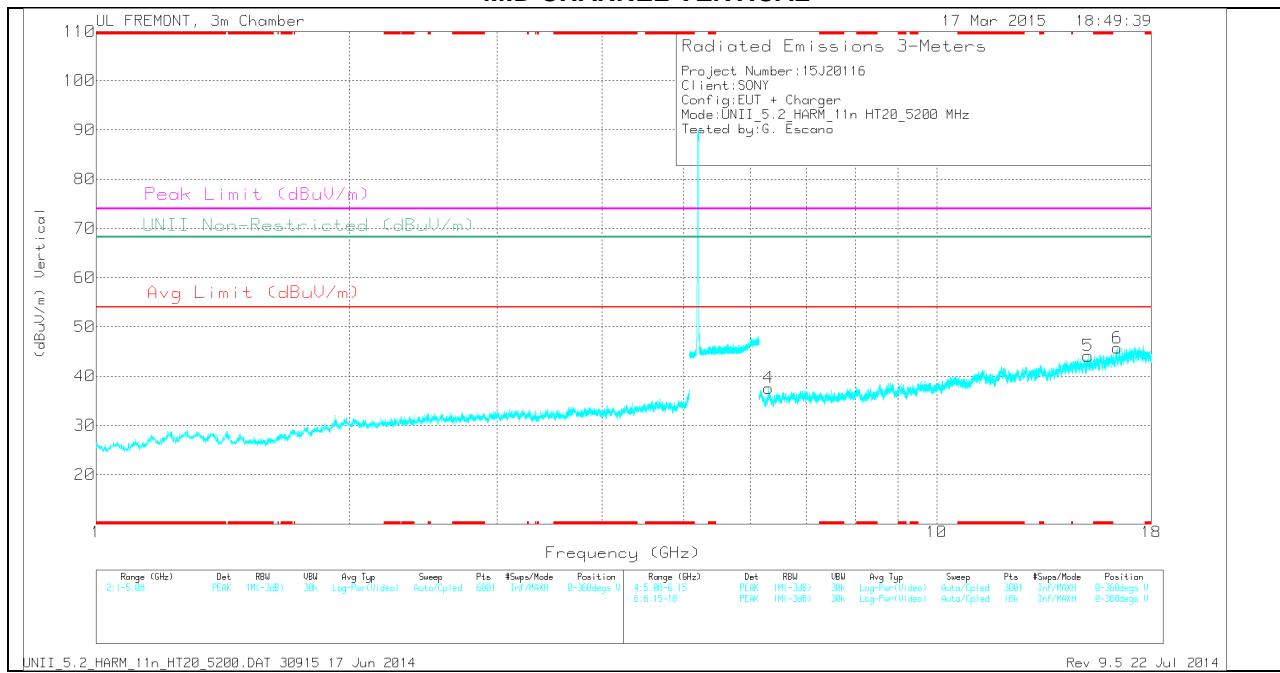

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	6.311	31.8	PK	35.4	-29.6	0	37.6	-	-	-	-	68.2	-30.6	0-360	100	V
1	7.92	30.62	PK	35.8	-28.3	0	38.12	-	-	-	-	68.2	-30.08	0-360	100	H
2	12.897	30.05	PK	39.1	-27.1	0	42.05	-	-	-	-	68.2	-26.15	0-360	100	H
5	15.139	31.13	PK	39.9	-26.9	0	44.13	-	-	-	-	68.2	-24.07	0-360	100	V
6	16.391	29.29	PK	40.7	-24.3	0	45.69	-	-	-	-	68.2	-22.51	0-360	100	V
3	16.926	28.29	PK	41.2	-23.6	0	45.89	-	-	-	-	68.2	-22.31	0-360	200	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK - Peak detector

**HIGH CHANNEL HORIZONTAL**

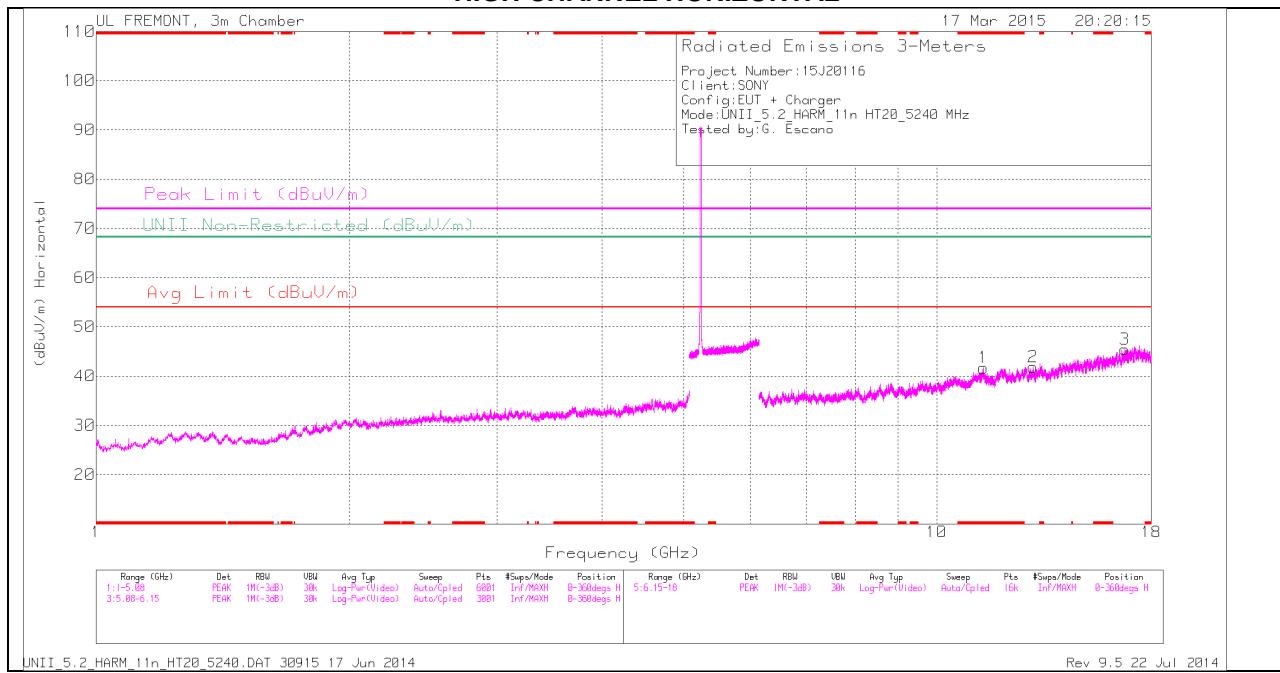

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

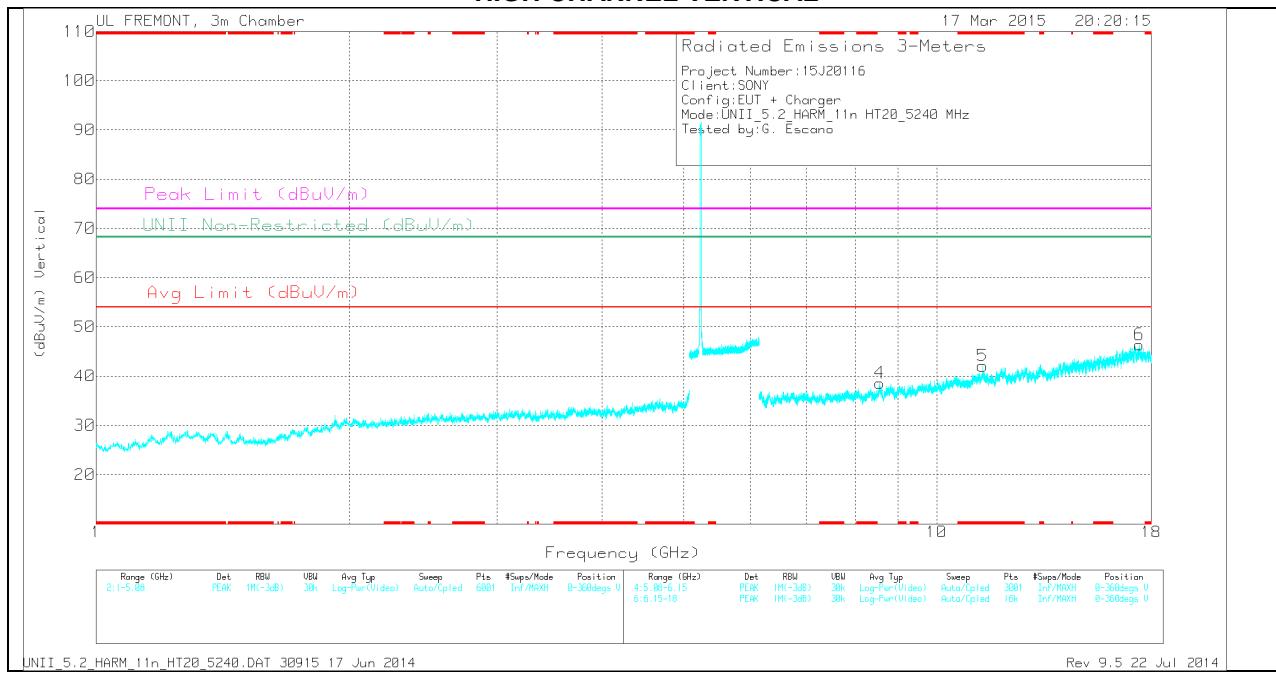

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 11.361	29.4	PK	38.1	-25.8	0	41.7	-	-	74	-32.3	-	-	0-360	100	H
5	* 11.338	29.48	PK	38.1	-25.5	0	42.08	-	-	74	-31.92	-	-	0-360	100	V
4	8.55	28.8	PK	35.8	-26	0	38.6	-	-	-	-	68.2	-29.6	0-360	200	V
2	13.026	30.13	PK	39	-27.3	0	41.83	-	-	-	-	68.2	-26.37	0-360	100	H
3	16.745	29.64	PK	41.2	-25.4	0	45.44	-	-	-	-	68.2	-22.76	0-360	100	H
6	17.422	27.2	PK	41.4	-22.2	0	46.4	-	-	-	-	68.2	-21.8	0-360	200	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.362	37.05	PK1	38.1	-25.8	0	49.35	-	-	74	-24.65	-	-	15	395	H
* 11.362	25.27	AD1	38.1	-25.8	0	37.57	54	-16.43	-	-	-	-	15	395	H
* 11.339	37.18	PK1	38.1	-25.5	0	49.78	-	-	74	-24.22	-	-	26	339	V
* 11.339	24.98	AD1	38.1	-25.5	0	37.58	54	-16.42	-	-	-	-	26	339	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

### 11.1.3. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

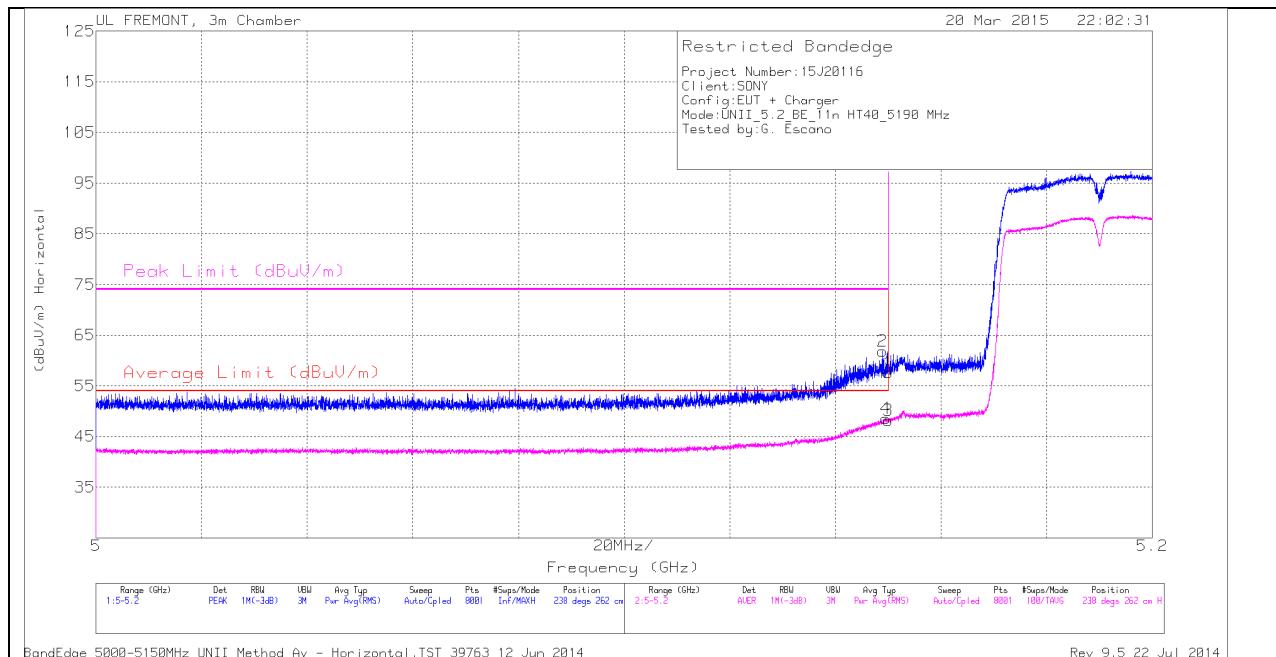


#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.149	49.27	PK	34.2	-21.6	0	61.87	-	-	74	-12.13	238	262	H
1	5.15	45.05	PK	34.2	-21.6	0	57.65	-	-	74	-16.35	238	262	H
3	5.15	35.56	RMS	34.2	-21.6	0	48.16	54	-5.84	-	-	238	262	H
4	5.15	35.91	RMS	34.2	-21.6	0	48.51	54	-5.49	-	-	238	262	H

PK - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

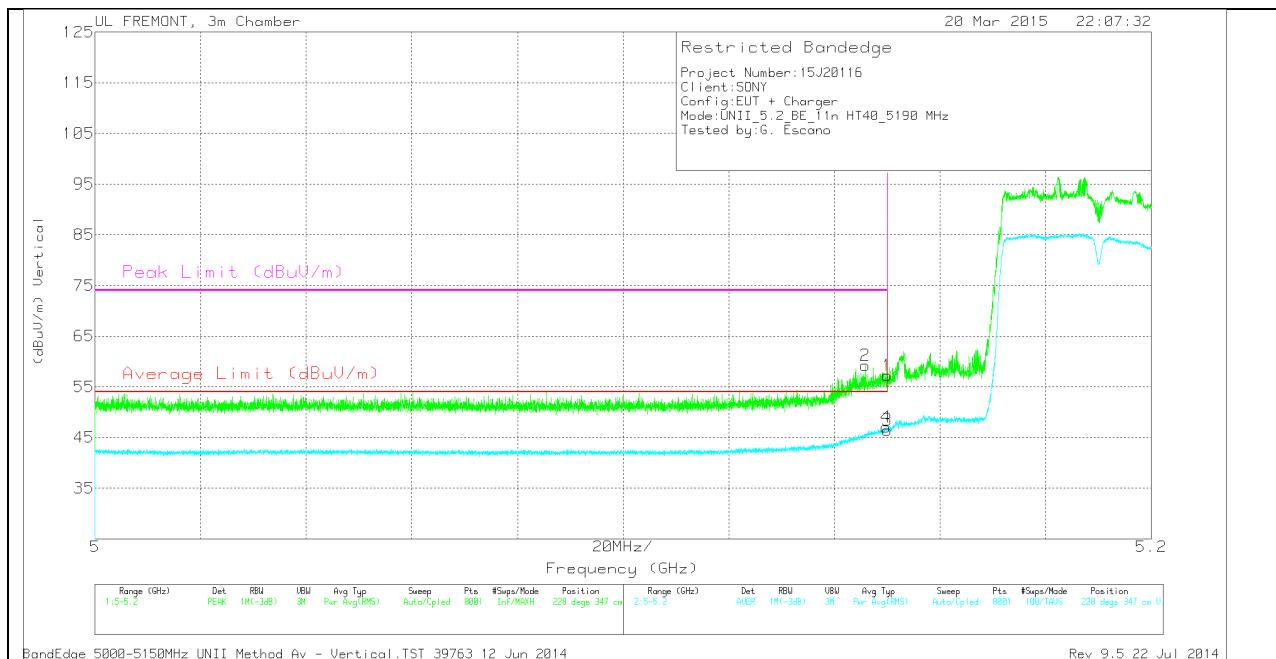

**VERTICAL DATA**


Marker	Frequency (GHz)	Meter Reading (dBmV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBmV/m)	Average Limit (dBmV/m)	Margin (dB)	Peak Limit (dBmV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.146	46.63	PK	34.2	-21.6	0	59.23	-	-	74	-14.77	228	347	V
1	5.15	44.64	PK	34.2	-21.6	0	57.24	-	-	74	-16.76	228	347	V
3	5.15	33.9	RMS	34.2	-21.6	0	46.50	54	-7.50	-	-	228	347	V
4	5.15	34.46	RMS	34.2	-21.6	0	47.06	54	-6.94	-	-	228	347	V

PK - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

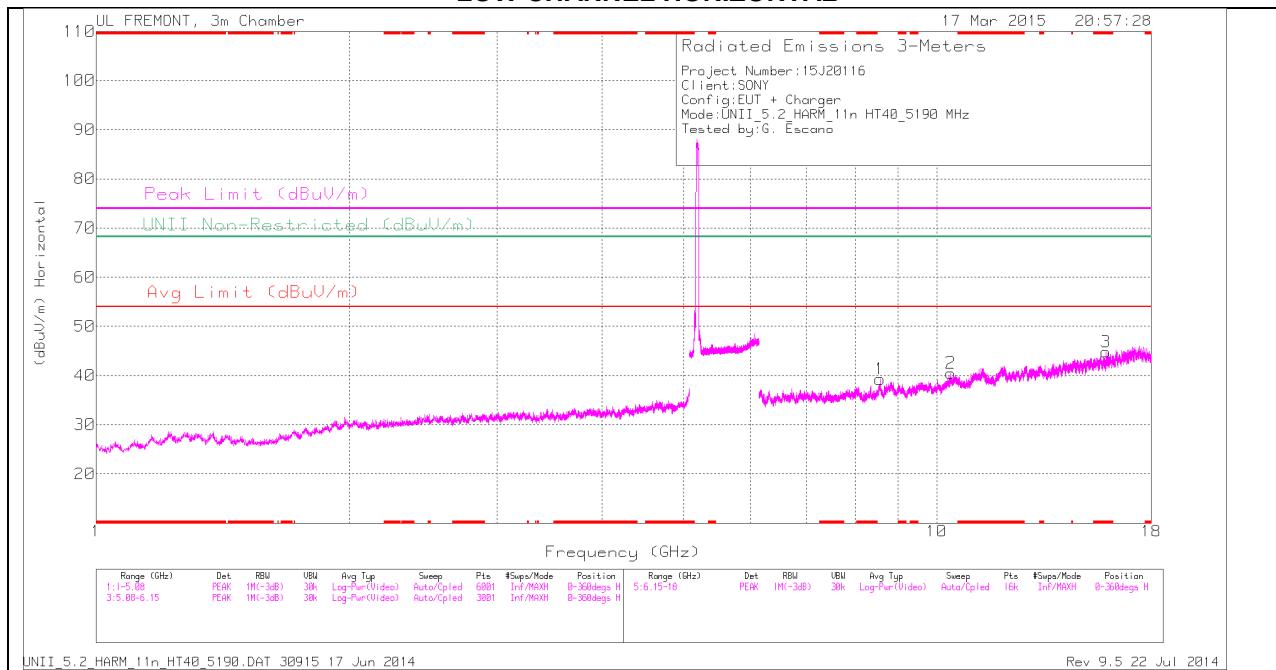

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

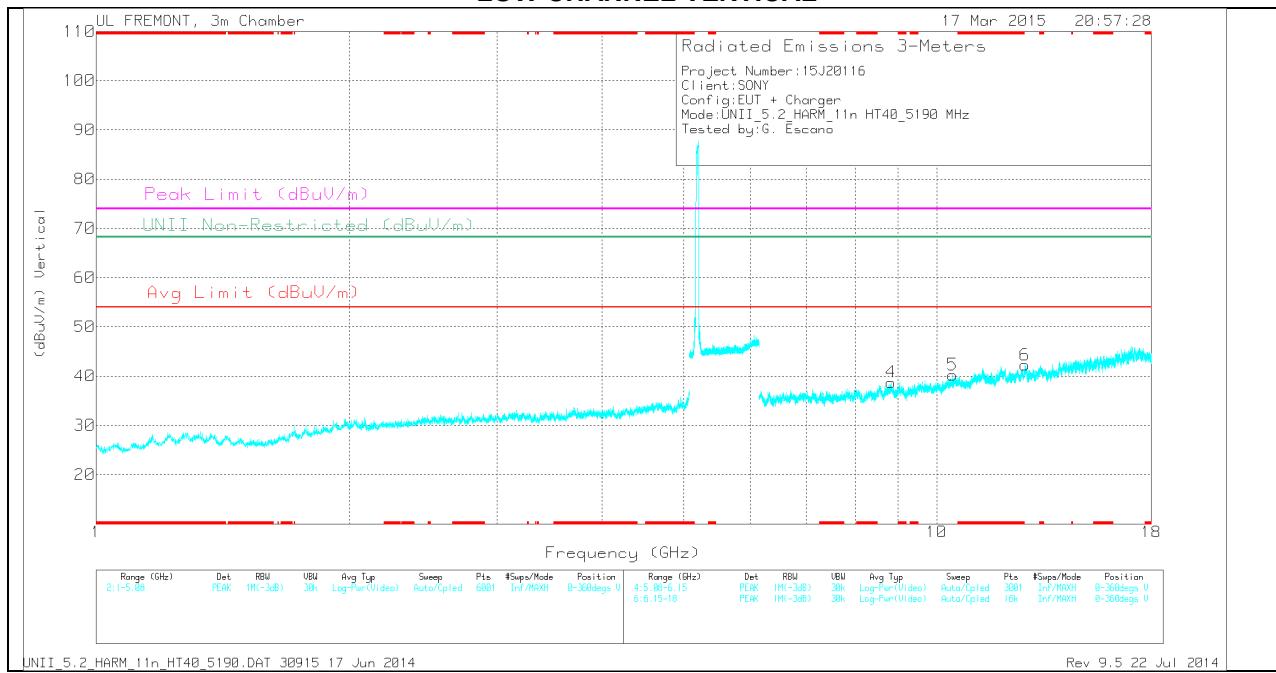

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 15.909	30.41	PK	40.3	-25.9	0	44.81	-	-	74	-29.19	-	-	0-360	200	H
1	8.563	29.67	PK	35.8	-26.2	0	39.27	-	-	-	-	68.2	-28.93	0-360	100	H
4	8.826	28.74	PK	35.9	-25.9	0	38.74	-	-	-	-	68.2	-29.46	0-360	200	V
2	10.399	28.99	PK	37.3	-25.8	0	40.49	-	-	-	-	68.2	-27.71	0-360	100	H
5	10.442	28.75	PK	37.3	-25.8	0	40.25	-	-	-	-	68.2	-27.95	0-360	100	V
6	12.741	28.96	PK	39.1	-25.8	0	42.26	-	-	-	-	68.2	-25.94	0-360	100	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.911	38.67	PK1	40.3	-26	0	52.97	-	-	74	-21.03	-	-	75	169	H
* 15.911	27.3	AD1	40.3	-26	0	41.60	54	-12.40	-	-	-	-	75	169	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak


AD1 - KDB789033 Method: AD Primary Power Average

HIGH CHANNEL HORIZONTAL

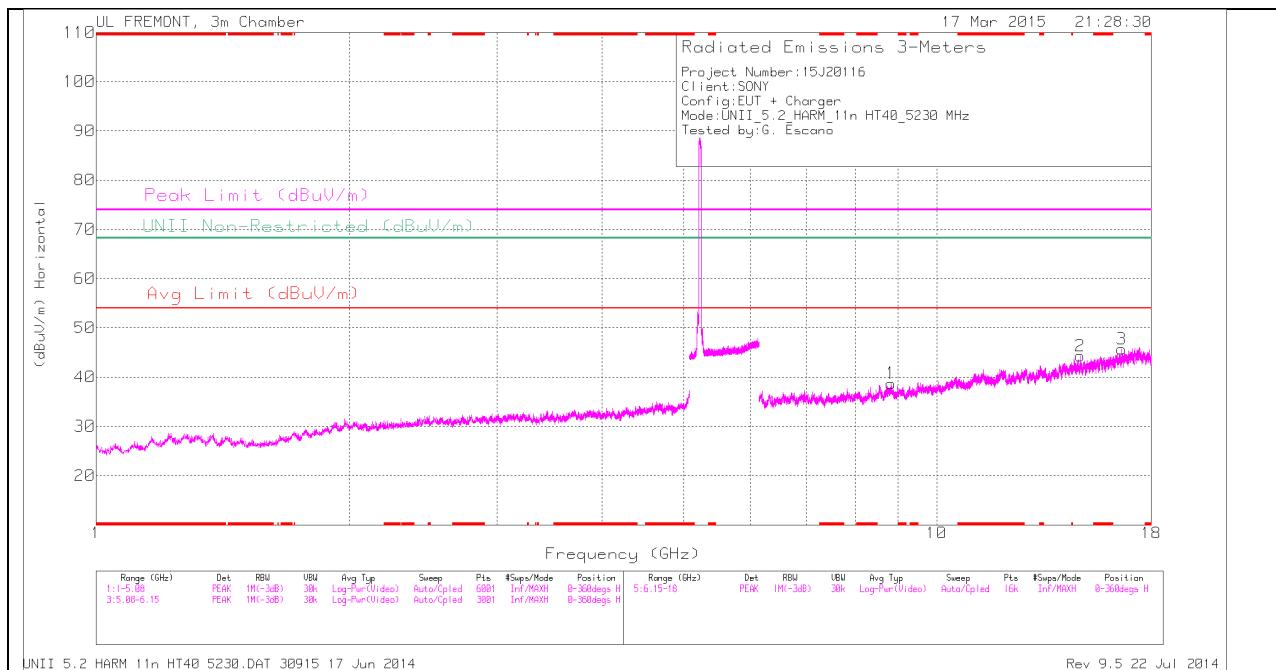

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

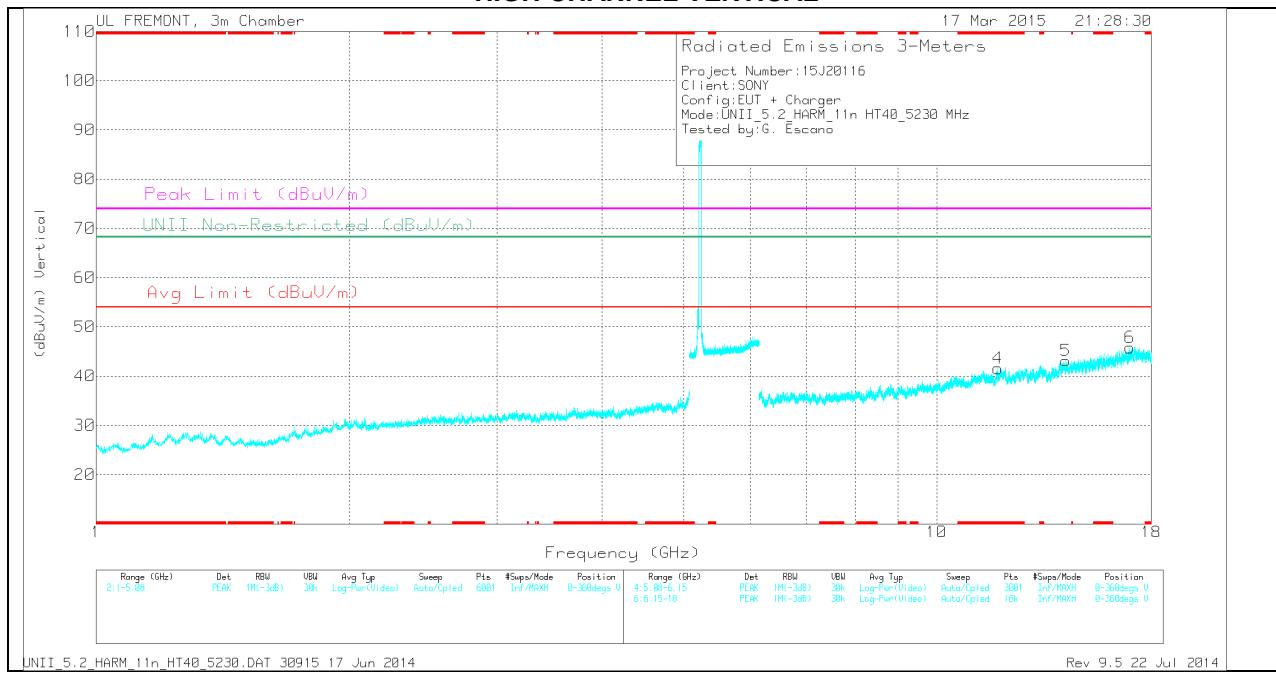

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 11.827	28.77	PK	39	-26.2	0	41.57	-	-	74	-32.43	-	-	0-360	200	V
1	8.822	28.52	PK	35.9	-25.7	0	38.72	-	-	-	-	68.2	-29.48	0-360	200	H
5	14.24	30.55	PK	39.2	-26.6	0	43.15	-	-	-	-	68.2	-25.05	0-360	200	V
2	14.806	31.89	PK	39.8	-27.4	0	44.29	-	-	-	-	68.2	-23.91	0-360	100	H
3	16.603	28.91	PK	41	-24.2	0	45.71	-	-	-	-	68.2	-22.49	0-360	200	H
6	16.982	28.1	PK	41.3	-23.6	0	45.8	-	-	-	-	68.2	-22.4	0-360	100	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.827	37.92	PK1	39	-26.2	0	50.72	-	-	74	-23.28	-	-	251	186	V
* 11.825	26.11	AD1	39	-26.3	0	38.81	54	-15.19	-	-	-	-	251	186	V


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

### 11.1.4. TX ABOVE 1 GHz 802.11ac HT80 MODE IN THE 5.2 GHz BAND RESTRICTED BANEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

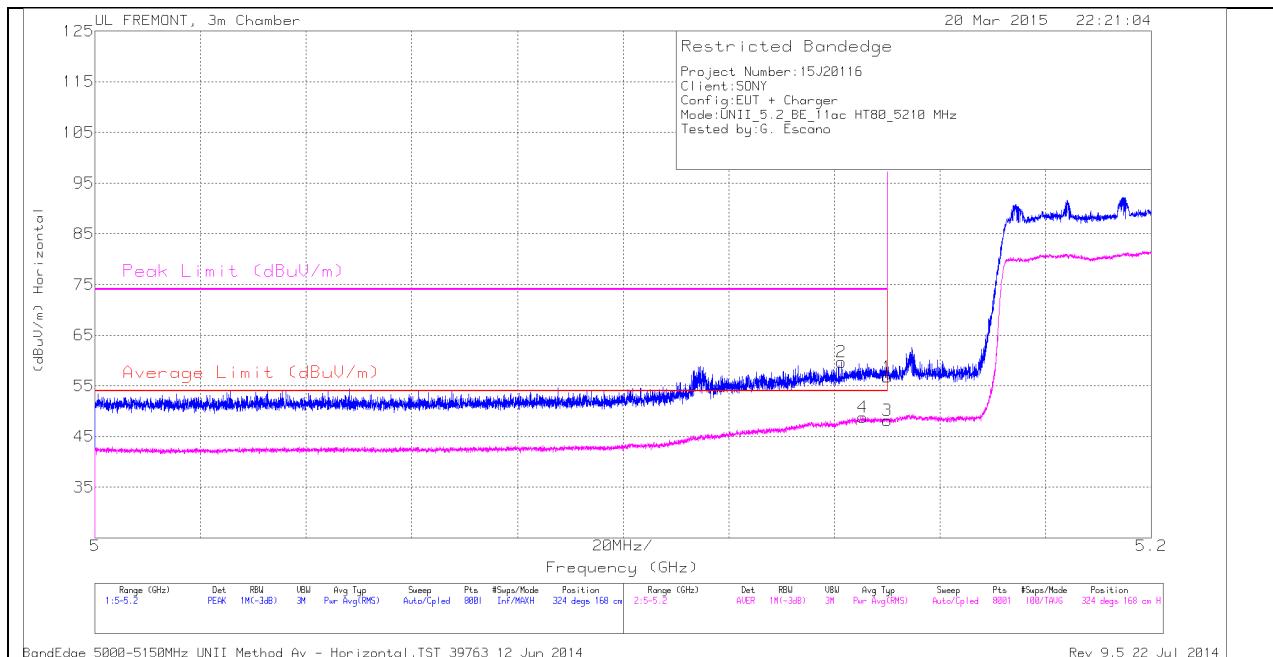


#### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.141	47.07	PK	34.2	-21.6	0	59.67	-	-	74	-14.33	324	168	H
4	5.145	36.17	RMS	34.2	-21.6	.13	48.9	54	-5.1	-	-	324	168	H
1	5.15	44.12	PK	34.2	-21.6	0	56.72	-	-	74	-17.28	324	168	H
3	5.15	35.56	RMS	34.2	-21.6	.13	48.29	54	-5.71	-	-	324	168	H

PK - Peak detector

RMS - RMS detection

### VERTICAL PEAK AND AVERAGE PLOT

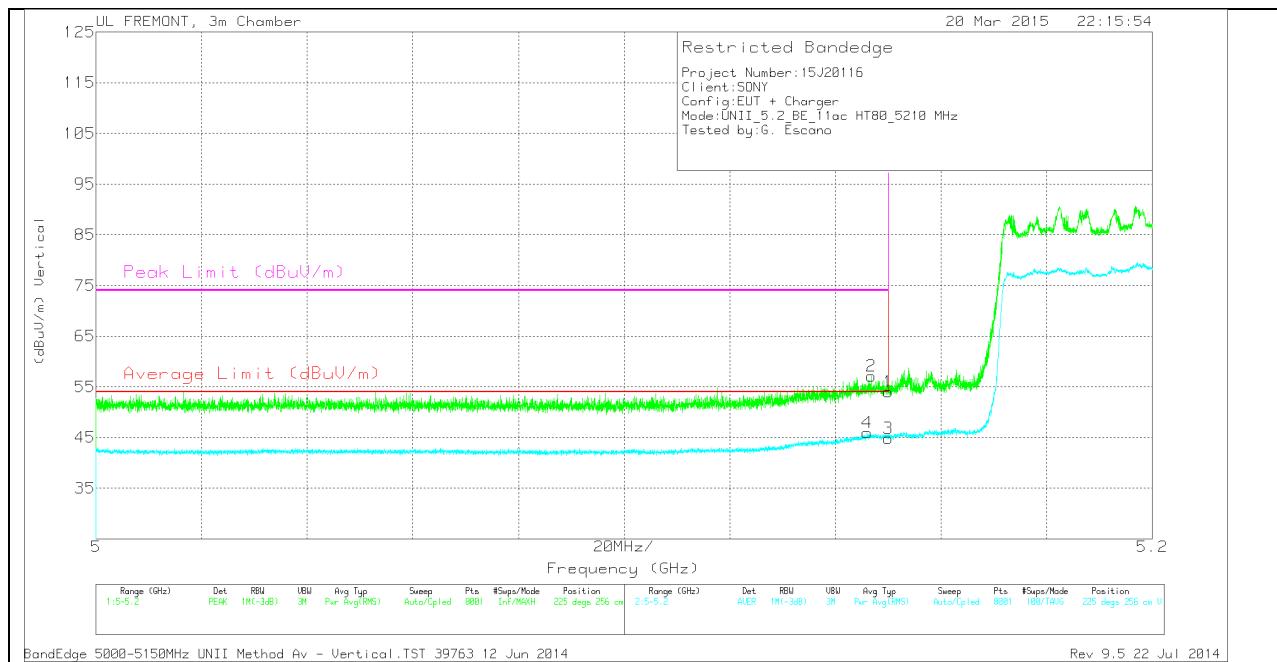

### VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	5.146	33.19	RMS	34.2	-21.6	.13	45.92	54	-8.08	-	-	225	256	V
2	5.147	44.54	PK	34.2	-21.6	0	57.14	-	-	74	-16.86	225	256	V
1	5.15	41.39	PK	34.2	-21.6	0	53.99	-	-	74	-20.01	225	256	V
3	5.15	32.11	RMS	34.2	-21.6	.13	44.84	54	-9.16	-	-	225	256	V

PK - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

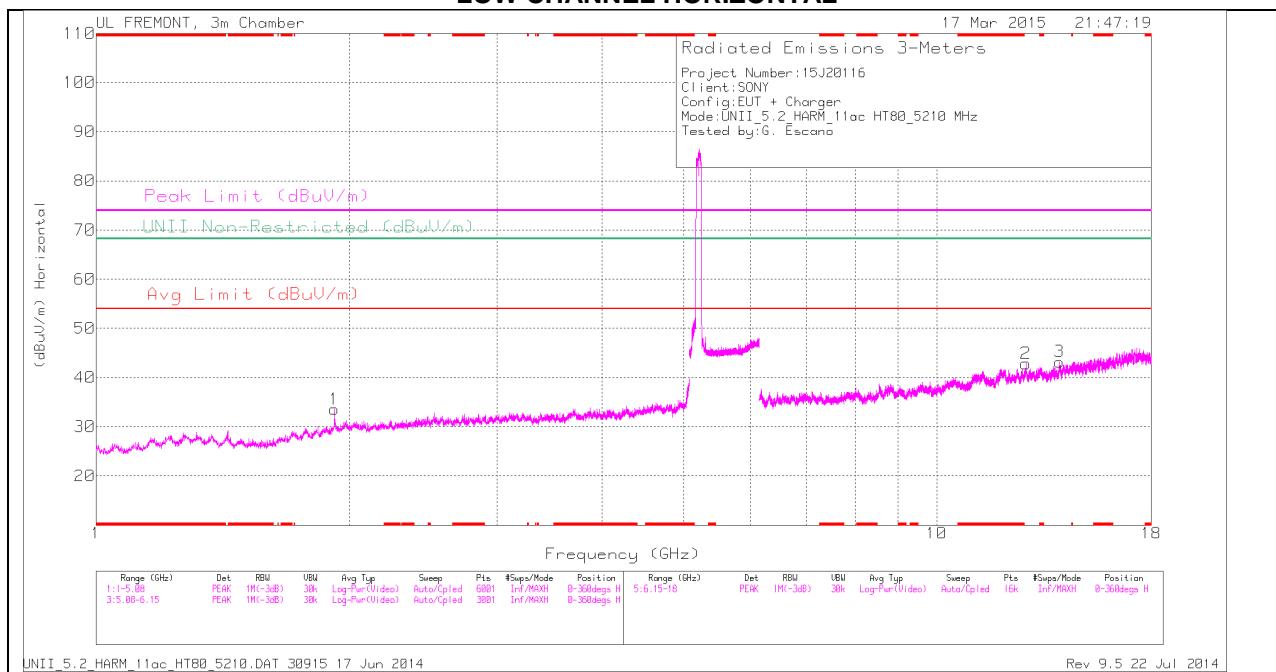

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

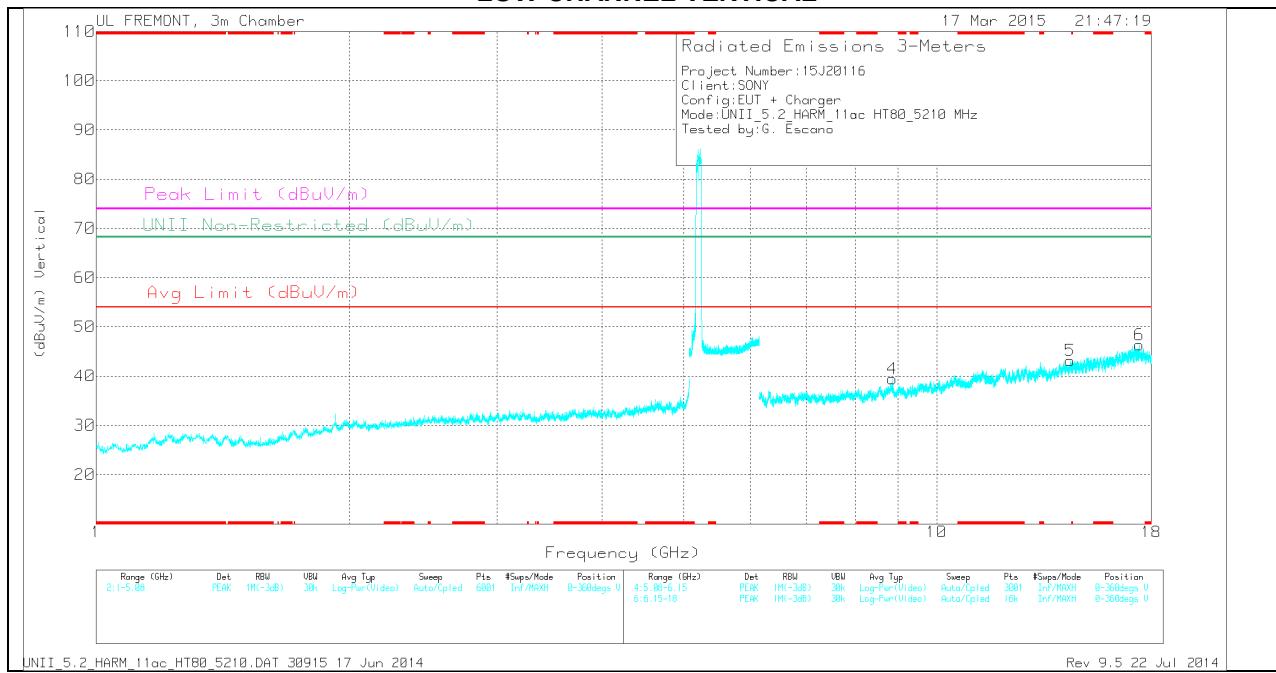

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

**TRACE MARKERS**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.921	34.96	PK	31.2	-32.6	0	33.56	-	-	-	68.2	-34.64	0-360	200	H	
4	8.852	30.16	PK	35.9	-26.6	0	39.46	-	-	-	68.2	-28.74	0-360	100	V	
2	12.766	29.75	PK	39.1	-26	0	42.85	-	-	-	68.2	-25.35	0-360	100	H	
3	13.992	32.11	PK	38.8	-27.7	0	43.21	-	-	-	68.2	-24.99	0-360	100	H	
5	14.422	30.95	PK	39.6	-27.4	0	43.15	-	-	-	68.2	-25.05	0-360	100	V	
6	17.42	27.02	PK	41.4	-22.1	0	46.32	-	-	-	68.2	-21.88	0-360	100	V	


\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### 11.1.5.3 GHz

#### 11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

##### HORIZONTAL PEAK AND AVERAGE PLOT

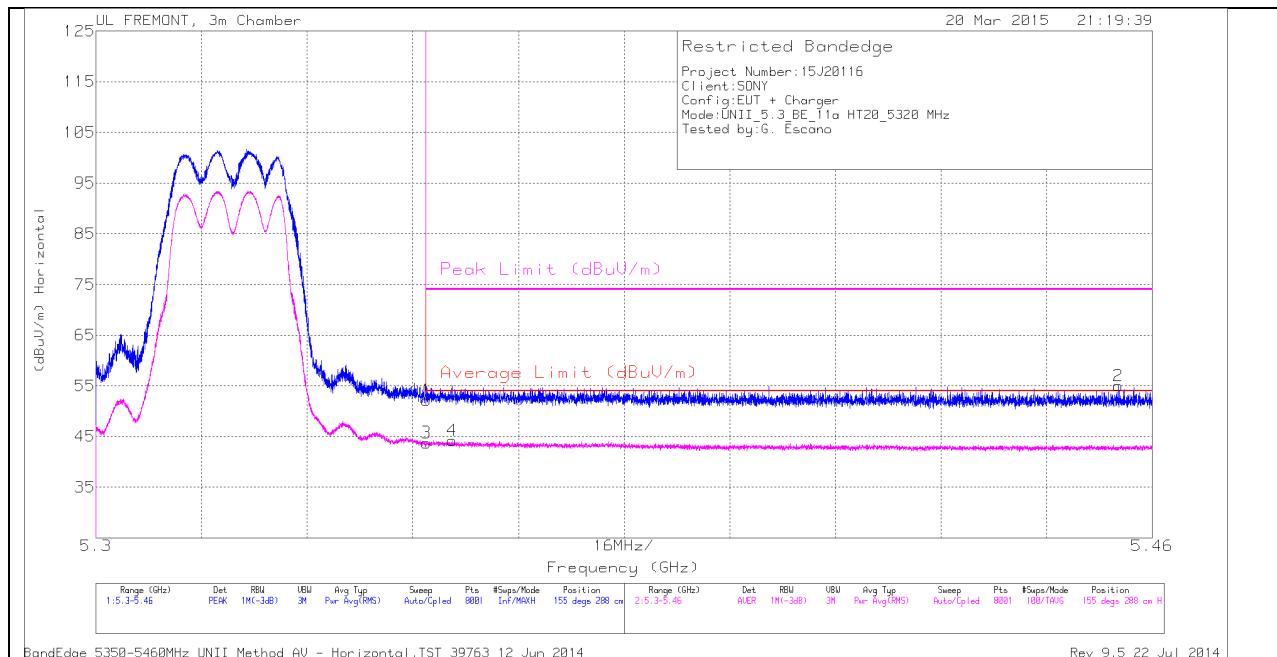


##### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35	39.09	PK	34.5	-21.4	0	52.19	-	-	74	-21.81	155	288	H
3	5.35	30.67	RMS	34.5	-21.4	0	43.77	54	-10.23	-	-	155	288	H
4	5.354	31.12	RMS	34.5	-21.4	0	44.22	54	-9.78	-	-	155	288	H
2	5.455	41.8	PK	34.6	-21.4	0	55	-	-	74	-19	155	288	H

PK - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

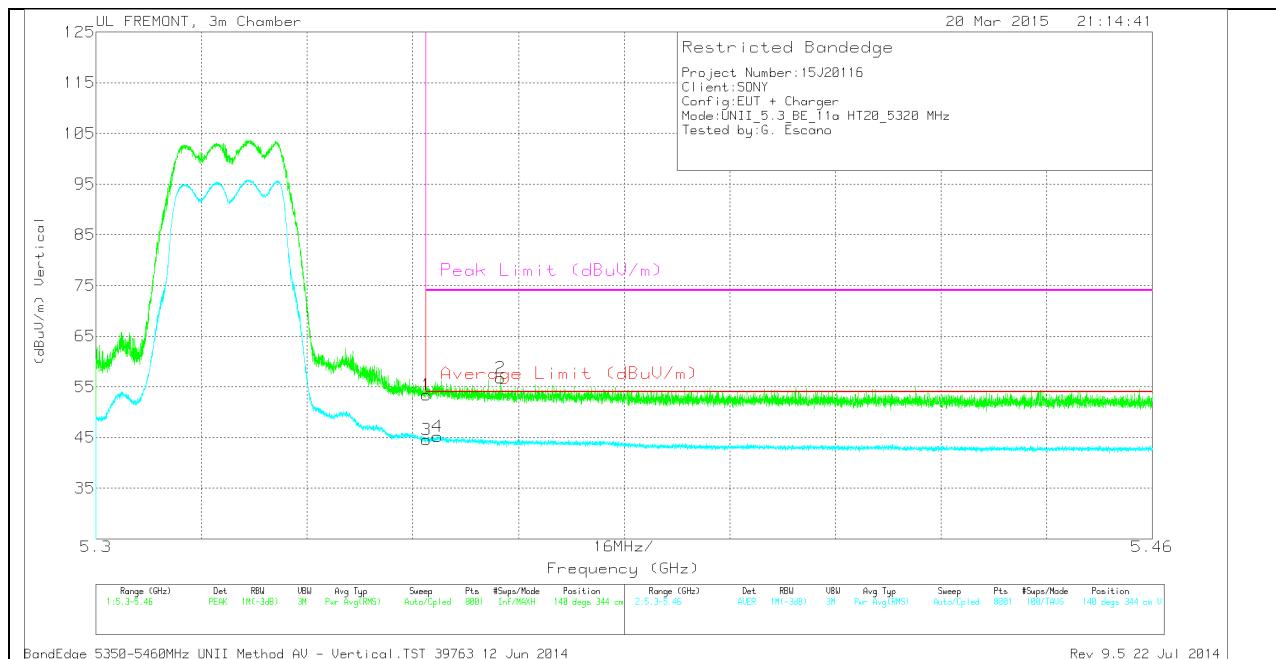

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBmV)	Det	AF T119 (dB/m)	Amp/Cbl/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBmV/m)	Average Limit (dBm/m)	Margin (dB)	Peak Limit (dBm/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35	40.34	PK	34.5	-21.4	0	53.44	-	-	74	-20.56	140	344	V
3	5.35	31.49	RMS	34.5	-21.4	0	44.59	54	-9.41	-	-	140	344	V
4	5.352	32.1	RMS	34.5	-21.4	0	45.2	54	-8.8	-	-	140	344	V
2	5.361	43.6	PK	34.5	-21.4	0	56.7	-	-	74	-17.3	140	344	V

PK - Peak detector

RMS - RMS detection


## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

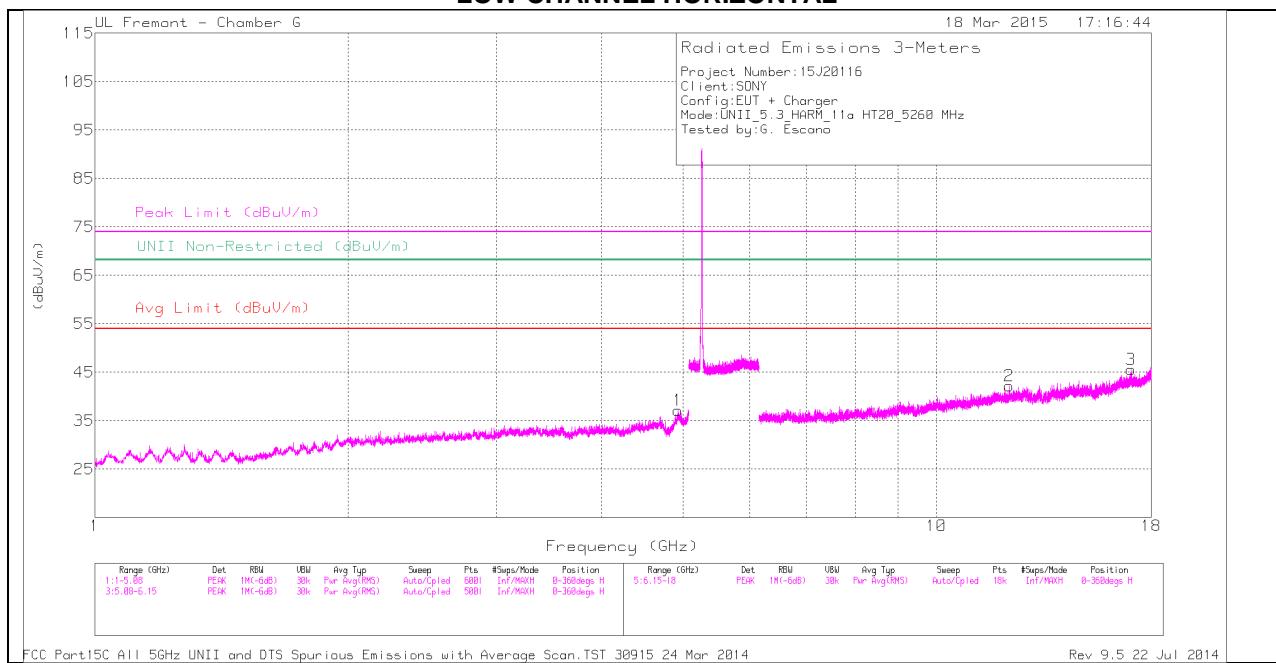

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

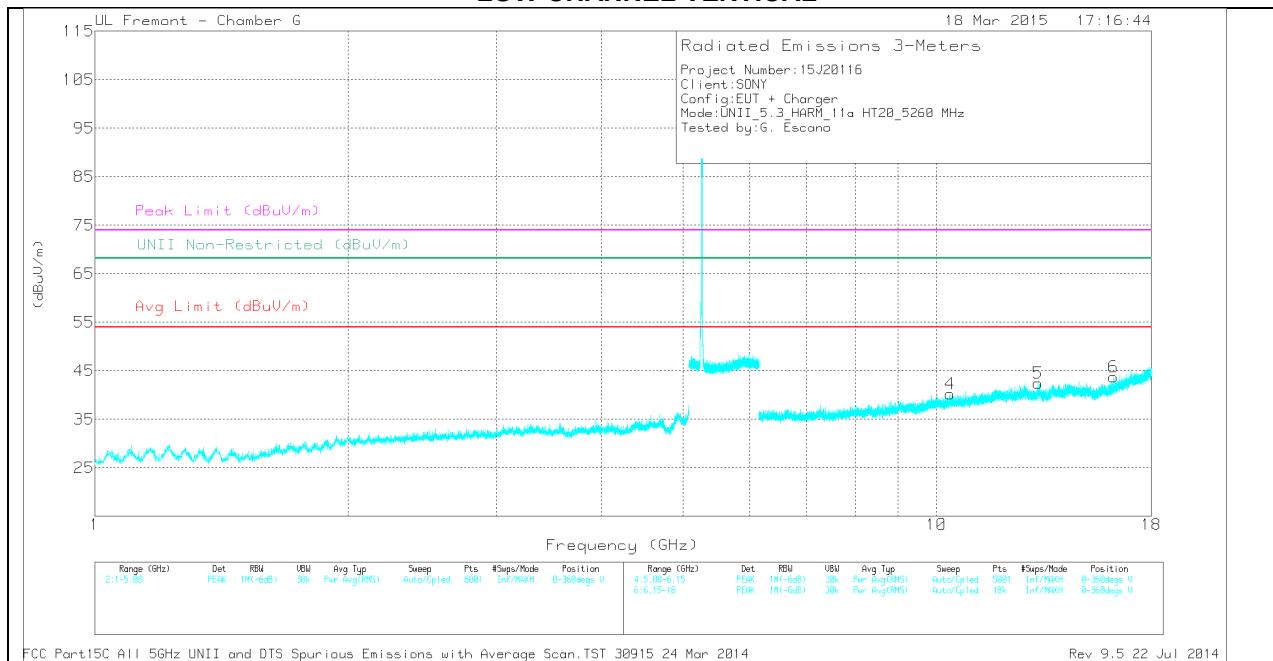

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## LOW CHANNEL DATA

### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.933	34.75	PK	34.1	-31.7	0	37.15	-	-	74	-36.85	-	-	0-360	201	H
2	* 12.192	29.87	PK	38.8	-26.5	0	42.17	-	-	74	-31.83	-	-	0-360	201	H
4	10.372	29.88	PK	37.5	-27.1	0	40.28	-	-	-	-	68.2	-27.92	0-360	201	V
5	13.2	29.64	PK	39	-26.2	0	42.44	-	-	-	-	68.2	-25.76	0-360	201	V
6	16.243	29.62	PK	40.8	-26.7	0	43.72	-	-	-	-	68.2	-24.48	0-360	201	V
3	17.043	28.92	PK	42	-25.4	0	45.52	-	-	-	-	68.2	-22.68	0-360	101	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.933	42.98	PK1	34.1	-31.7	0	45.38	-	-	74	-28.62	-	-	114	197	H
* 4.933	30.39	AD1	34.1	-31.7	0	32.79	54	-21.21	-	-	-	-	114	197	H
* 12.192	36.33	PK1	38.8	-26.5	0	48.63	-	-	74	-25.37	-	-	294	222	H
* 12.191	25.24	AD1	38.8	-26.6	0	37.44	54	-16.56	-	-	-	-	294	222	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

MID CHANNEL HORIZONTAL

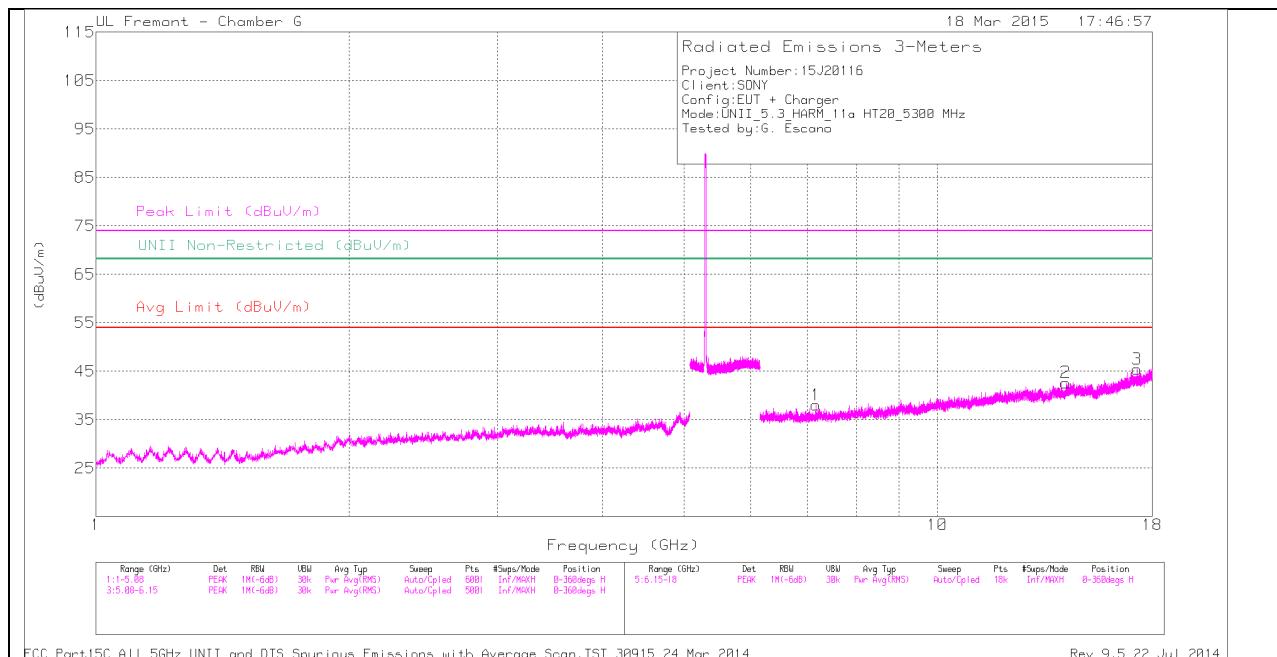

MID CHANNEL VERTICAL

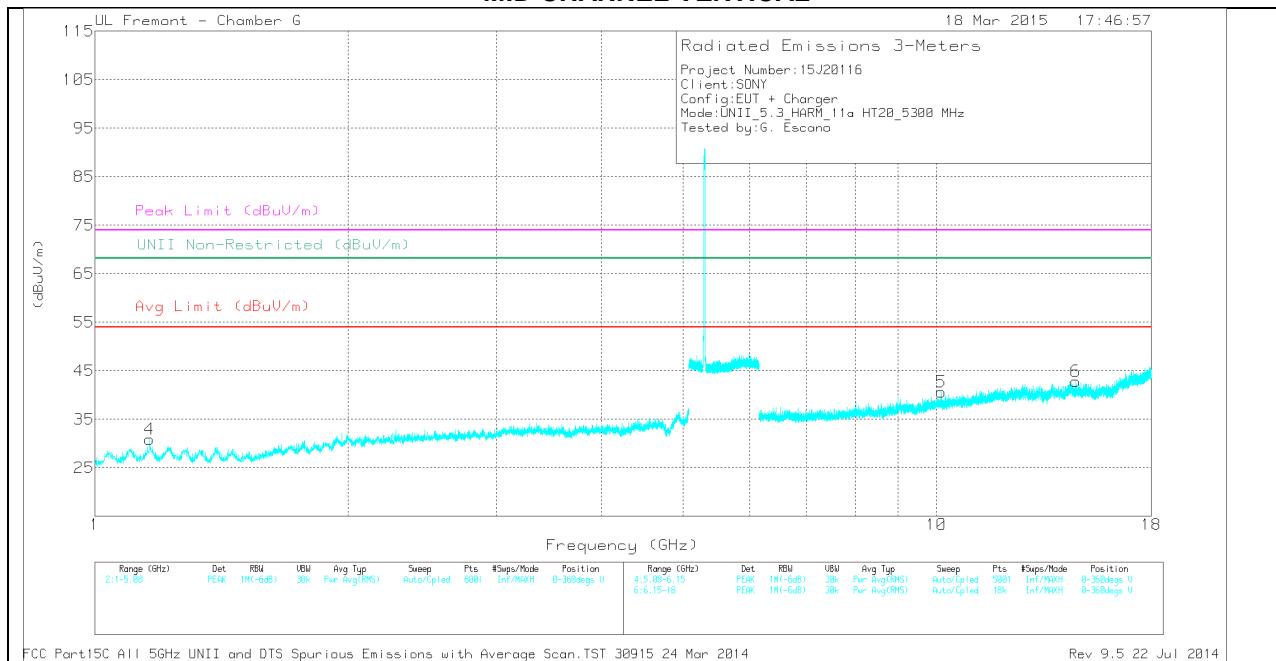

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### MID CHANNEL DATA

#### TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 1.161	37.63	PK	28.8	-35.5	0	30.93	-	-	74	-43.07	-	-	0-360	101	V
1	7.169	34.16	PK	35.6	-31.7	0	38.06	-	-	-	-	68.2	-30.14	0-360	201	H
5	10.137	30.89	PK	37.5	-27.8	0	40.59	-	-	-	-	68.2	-27.61	0-360	201	V
2	14.206	30.65	PK	39.7	-27.7	0	42.65	-	-	-	-	68.2	-25.55	0-360	101	H
6	14.638	31.16	PK	40	-28.3	0	42.86	-	-	-	-	68.2	-25.34	0-360	201	V
3	17.257	29.16	PK	41.5	-25.2	0	45.46	-	-	-	-	68.2	-22.74	0-360	201	H

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

#### Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.162	45.06	PK1	28.8	-35.5	0	38.36	-	-	74	-35.64	-	-	288	122	V
* 1.161	32.8	AD1	28.8	-35.5	0	26.1	54	-27.9	-	-	-	-	288	122	V

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK1 - KDB789033 Method: Peak

AD1 - KDB789033 Method: AD Primary Power Average

**HIGH CHANNEL HORIZONTAL**

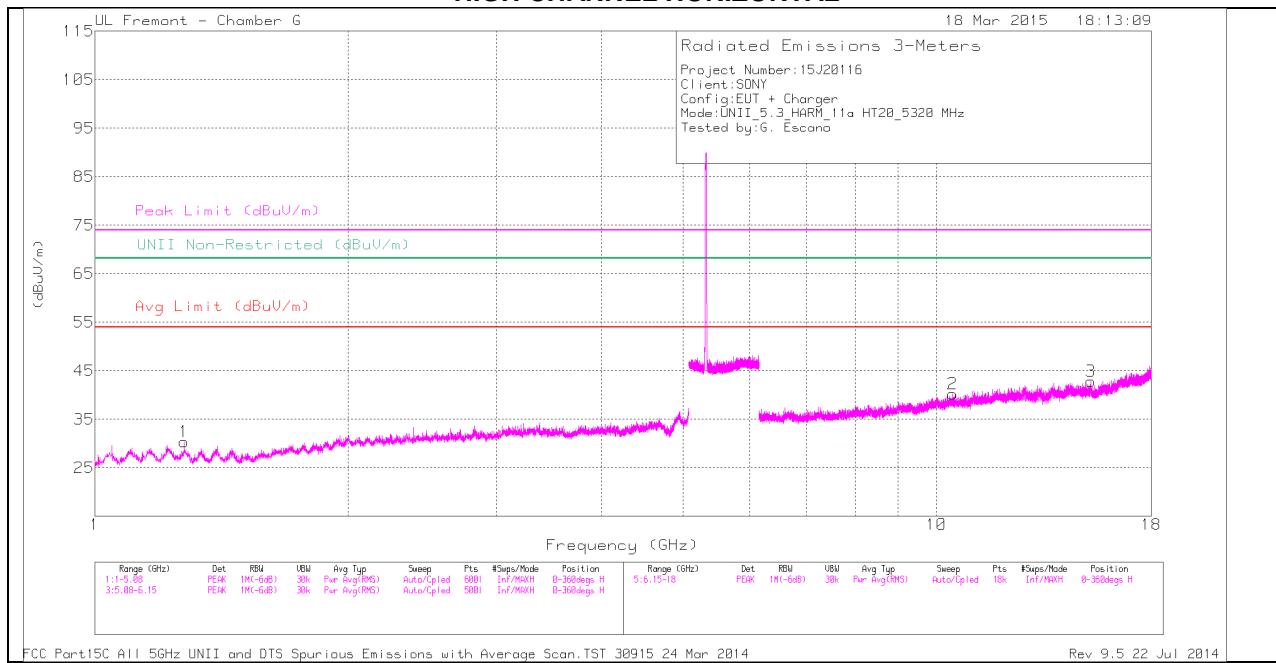

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.