



EMC TEST REPORT

No. I15Z40514-EMC14

for

Sony Mobile Communications Inc.

GSM/WCDMA/LTE device

FCC ID: PY7-PM0796

with

Hardware Version: A

Software Version: 28.0.A.0.684

Issued Date: 2015-05-19

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL Beijing.

Test Laboratory:

FCC 2.948 Listed: No. 525429

IC O.A.T.S listed: No. 12389A-1

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15Z40514-EMC14	Rev.0	1st edition	2015-04-24
I15Z40514-EMC14	Rev.1	2st edition	2015-05-19

CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
6.1. SUMMARY OF TEST RESULTS	10
6.2. STATEMENTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
ANNEX B: TEST LAYOUT	错误!未定义书签。
ANNEX C: EUT PHOTOGRAPH	错误!未定义书签。

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment


Normal Temperature: 15-35°C
Relative Humidity: 20-75%
Air pressure: 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Receipt of Sample: 2015-03-20
Testing Start Date: 2015-03-24
Testing End Date: 2015-03-25


1.4. Signature



Zhang Ying
(Prepared this test report)



Qu Pengfei
(Reviewed this test report)



Liu Baodian
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact Person: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications Inc.
Address /Post: 1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan
City: Tokyo
Postal Code: 108-0075
Country: Japan

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA, LTE Bluetooth (EDR and BLE), ANT+, WLAN (802.11 a/ac/b/g/n), NFC, FM, GPS device
FCC ID	PY7-PM0796
Antenna	Internal
Power supply	Battery (charged by travel adapter or vehicle charger)
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN	IMEI	HW Version	SW Version
EUT10	CB5A24YCVX	004402148060480	A	28.0.A.0.684

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE2	Vehicle Charger	/	1
#25450	USB Cable	10115W02400154C	/

AE2

Type	CAA-0003013
Manufacturer	Sony Mobile
Length of cable	98cm (the length of USB cable)

#25450

Type	AI-0120
Manufacturer	SONY
Length of cable	98cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of GSM/UMTS/LTE device with integrated antenna and embedded battery.

The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/4/5/8 and LTE FDD bands 1/2/3/4/5/7/8/17/20, TDD bands 38/39/40/41. It supports GPRS service with multi-slots

©Copyright. All rights reserved by CTTL.

class 33 and EGPRS service with multi-slots class 33. The HSDPA and HSUPA features are also supported.

It has MP3, camera, USB memory, Mobile High-Definition Link (MHL 3.0), FM radio, GPS receiver, NFC, Bluetooth (EDR and Bluetooth 4.1), ANT+, WLAN (802.11 a/ac/b/g/n) and Wi-Fi hotspot functions.

It includes normal options: vehicle charger and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-13 Edition
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	1

6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the GPS receiver function among the features described in section 3.

7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL. DUE DATE	CAL. INTERVAL
1.	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15	3 Years
2.	Test Receiver	ESCI 7	100948	R&S	2015-07-16	1 Year
3.	Test Receiver	FSV	101047	R&S	2015-07-03	1 Year
4.	EMI Antenna	3115	6914	ETS-Lindgren	2016-11-19	3 Years
5.	Universal Radio Communication Tester	CMU200	116455	R&S	2015-05-13	1 Year
6.	Vector Signal Generator	SMBV100A	260613	R&S	2016-01-28	1 Year

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a)

A.1.1 Method of measurement

The field strength of radiated emissions from the GPS receiver of MS at a distance of 10 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

A.1.2 EUT Operating Mode:

EUT Setup: EUT10 + AE2 + #25450

A vector signal generator is used to provide the simulated GPS signal, and the frequency is set to 1575.42 MHz. Before the test starts, the integrated GPS application in MS is started up and locked to the simulated GPS signal.

Meanwhile, the EUT is synchronized to universal radio communication tester, and able to respond to paging messages and incoming call. An established call has been released.

A.1.3 Measurement Limit

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit (μV/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement result for GPS mode:

Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17959.200	55.8	-17.7	45.6	27.900	V
17988.950	55.5	-17.7	45.6	27.600	H
17875.900	54.9	-18.5	45.6	27.800	V
17980.450	54.8	-17.7	45.6	26.900	V
17775.600	54.7	-18.5	45.6	27.600	V
17994.900	54.6	-17.7	45.6	26.700	H

Average detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17992.350	43.3	-17.7	45.6	15.400	V
17997.450	43.2	-17.7	45.6	15.300	H
17999.150	43.2	-17.7	45.6	15.300	V
17998.300	43.2	-17.7	45.6	15.300	H
17988.100	43.1	-17.7	45.6	15.200	V
17978.750	43.1	-17.7	45.6	15.200	H

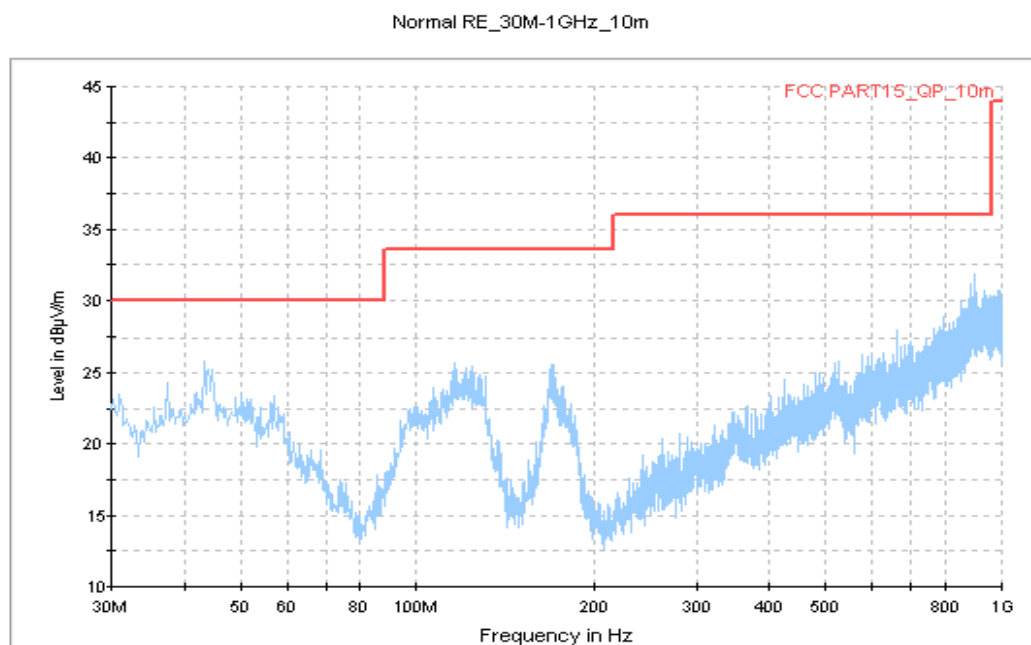


Figure A.1 Radiated Emission from 30MHz to 1GHz

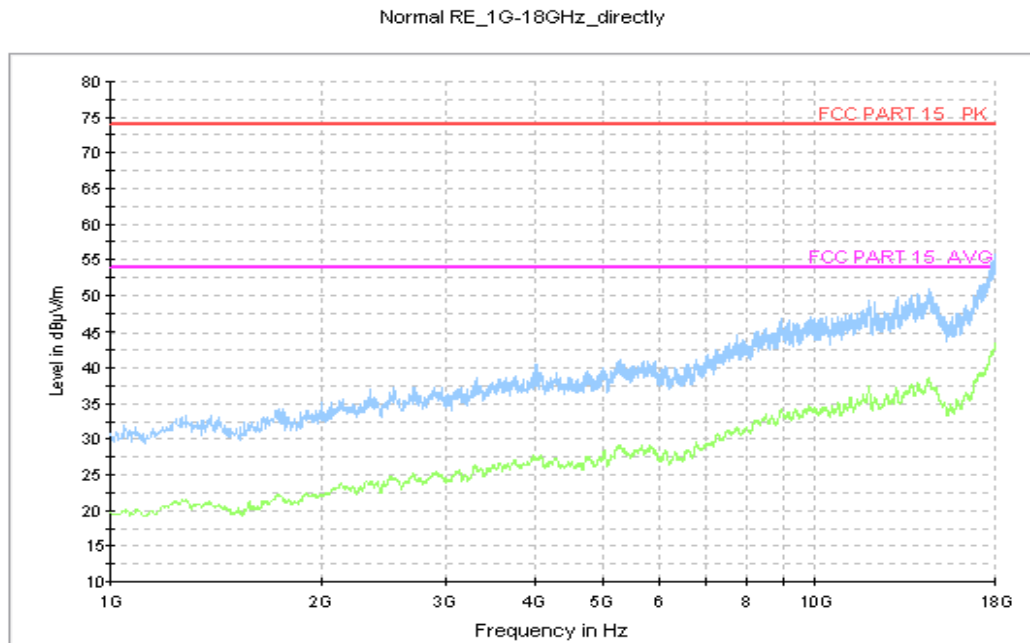


Figure A.2 Radiated Emission from 1GHz to 18GHz

Maximum expanded measurement uncertainty (30MHz - 1GHz): $U = 3.9$ dB, $k = 2$.

Maximum expanded measurement uncertainty (>1GHz): $U = 4.2$ dB, $k = 2$

*****END OF REPORT*****