



# EMC TEST REPORT

**No. I15Z40385-EMC04**

**for**

**Sony Mobile Communications Inc.**

**GSM/WCDMA/LTE Mobile Phone**

**FCC ID: PY7-PM0817**

**with**

**Hardware Version: A**

**Software Version: KK-MR1-SHINANO2-DSDS-150114-0317**

**Issued Date: 2015-04-14**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***FCC 2.948 Listed: No. 525429***

***IC O.A.T.S listed: No. 12389A-1***

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@catr.cn](mailto:ctl_terminals@catr.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I15Z40385-EMC04	Rev.0	1st edition	2015-03-09
I15Z40385-EMC04	Rev.1	2st edition	2015-04-14



## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. TESTING LOCATION .....</b>	<b>4</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.3. PROJECT DATA .....</b>	<b>4</b>
<b>1.4. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. GENERAL DESCRIPTION .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>6.1. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>6.2. STATEMENTS.....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

#### **Location 1: CTTL(huayuan North Road)**

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%  
Air pressure: 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### **1.3. Project data**


Receipt of Sample: Jul. 08<sup>th</sup>, 2014  
Testing Start Date: Jul. 25<sup>th</sup>, 2014  
Testing End Date: Jul. 25<sup>th</sup>, 2014

### **1.4. Signature**



---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Song Chongwen**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Sony Mobile Communications (China) Co. Ltd  
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,  
Chaoyang District  
City: Beijing  
Postal Code: 100102  
Country: China  
Contact Person: Ma, Gang  
Telephone: +86-10-58656312  
Fax: +86-10-58659049

### **2.2. Manufacturer Information**

Company Name: Sony Mobile Communications Inc.  
Address /Post: 1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan  
City: Tokyo  
Postal Code: 108-0075  
Country: Japan

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA, LTE Bluetooth (EDR and BLE), ANT+, WLAN ( 802.11 a/ac/b/g/n), NFC, FM, GPS mobile phone
FCC ID	PY7-PM0817
Antenna	Internal
Power supply	Battery ( charged by travel adapter or vehicle charger )
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT7	CB5A1ZTFL3	004402452521127	A	23.0.F.0.56

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>	<b>Revision</b>
AE2	Vehicle Charger	/	1
AE3	USB Cable	134912A21208328	AP1.0

##### AE2

Type	CAA-0003013
Manufacturer	Sony Mobile
Length of cable	100cm (the length of USB cable)

##### AE3

Commercial name	EC803
Type	AI-0404
Manufacturer	Sony Mobile
Length of cable	100 cm

\*AE ID: is used to identify the test sample in the lab internally.



### **3.4. General Description**

The Equipment Under Test (EUT) is a model of GSM/WCDMA/LTE Mobile Phone with integrated antenna and embedded battery.

The EUT supports GSM, WCDMA and LTE. It supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33. The HSDPA (Cat 24) and HSUPA (Cat 6) features are also supported.

It has MP3, camera, USB memory, FM radio, GPS receiver, NFC, Bluetooth (EDR, BLE), ANT+, WLAN (802.11 a/ac/b/g/n) and Wi-Fi hotspot functions.

It includes normal options: vehicle charger and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

Note: The GSM/WCDMA/LTE Mobile Phone with FCC ID is PY7-PM0817 manufactured by Sony Mobile Communications Inc. is a variant model based on GSM/WCDMA/LTE Mobile Phone with FCC ID is PY7-PM0808 for conformance test. According to the declaration of changes, the results are inherited from the initial model. The report number of initial model is I14Z47255-EMC04.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-13 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	1

### 6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the GPS receiver function among the features described in section 3.



## 7. Test Equipments Utilized

<b>NO.</b>	<b>NAME</b>	<b>TYPE</b>	<b>SERIES NUMBER</b>	<b>PRODUCER</b>	<b>CAL. DUE DATE</b>	<b>CAL. INTERVAL</b>
1.	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15	3 Years
2.	Vector Signal Generator	SMU200A	102082	R&S	2014-12-09	1 Year
3.	Test Receiver	ESCI 7	100948	R&S	2015-07-18	1 Year
4.	Test Receiver	FSV40	101047	R&S	2015-07-03	1 Year
5.	EMI Antenna	3115	6914	ETS-Lindgren	2014-12-16	3 Years

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a)

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the GPS receiver of MS at a distance of 10 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

#### **A.1.2 EUT Operating Mode:**

EUT Setup: EUT7 + AE2 + AE3

A vector signal generator is used to provide the simulated GPS signal, and the frequency is set to 1575.42 MHz. Before the test starts, the integrated GPS application in MS is started up and locked to the simulated GPS signal.

Meanwhile, the EUT is synchronized to universal radio communication tester, and able to respond to paging messages and incoming call. An established call has been released.

#### **A.1.3 Measurement Limit**

Limit from CFR Part 15.109(a)

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

#### **A.1.5 Measurement Results**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_{\text{A}} + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{Mea}$ : Measurement result on receiver.


**Measurement result for GPS mode:**

**Peak detector**

Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{Mea}$ (dB $\mu$ V)	Polarity
17886.844	62.1	-18.5	45.6	35.000	V
17973.438	61.7	-17.7	45.6	33.800	H
17874.094	61.6	-18.5	45.6	34.500	V
17910.750	61.5	-18.5	45.6	34.400	V
17907.031	61.5	-18.5	45.6	34.400	H
17891.625	61.3	-18.5	45.6	34.200	V

**Average detector**


Frequency(MHz)	Result(dB $\mu$ V/m)	$G_{PL}$ (dB)	$G_A$ (dB/m)	$P_{Mea}$ (dB $\mu$ V)	Polarity
17895.344	50.0	-18.5	45.6	22.900	V
17874.094	49.9	-18.5	45.6	22.800	V
17885.250	49.8	-18.5	45.6	22.700	H
17878.875	49.8	-18.5	45.6	22.700	V
17898.000	49.7	-18.5	45.6	22.600	H
17932.000	49.7	-17.7	45.6	21.800	V

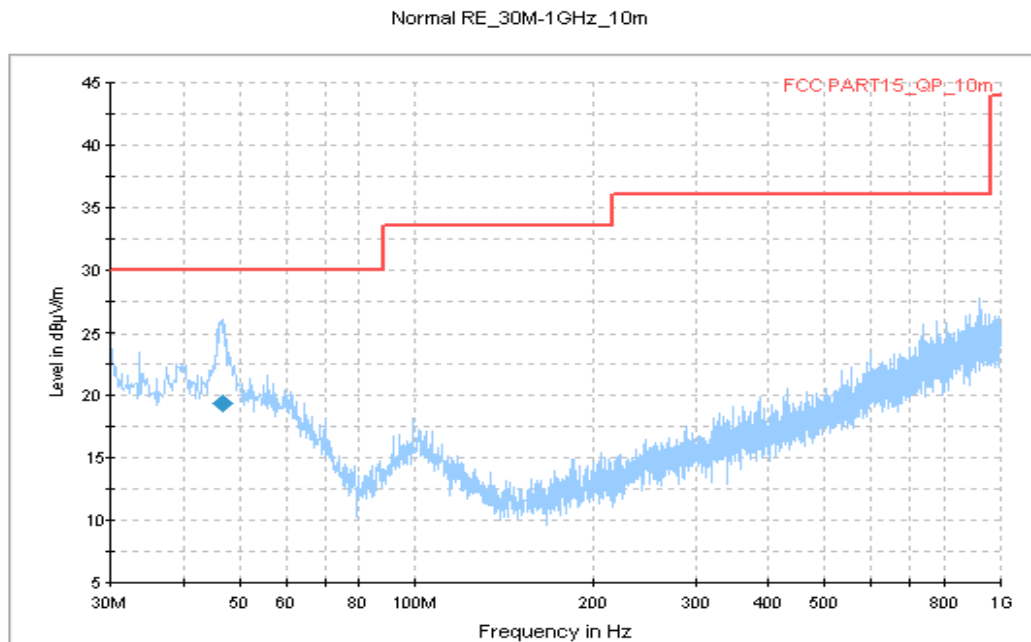

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V/m)
46.733750	19.4	109.0	V	-16.0	-17.5	10.6	30.0

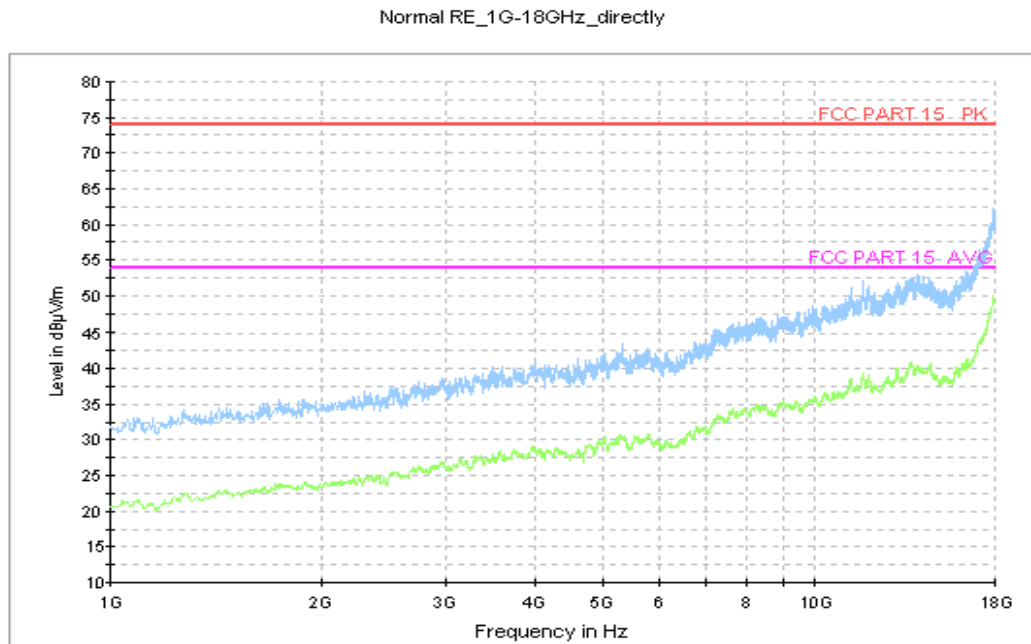

**Figure A.2 Radiated Emission from 1GHz to 18GHz**

Maximum expanded measurement uncertainty (30MHz - 1GHz):  $U = 3.9$  dB,  $k = 2$ .

Maximum expanded measurement uncertainty (>1GHz):  $U = 4.2$  dB,  $k = 2$

**\*\*\*END OF REPORT\*\*\***