ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	**Mobile Phone**
Brand Name:	**Sony**
Type No.:	**PM-0852-BV**
Model Difference:	**N/A**
FCC ID:	**PY7-PM0852**
Report No.:	**ER/2014/B0060**
Issue Date:	**Jan. 15, 2015**
FCC Rule Part:	**§15.247, Cat: DTS**
Prepared for:	**Sony Mobile Communications AB Nya Vattentornet 22188 Lund/Sweden**
Prepared by:	**SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803**

Testing Laboratory
0513

Note: *This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.*

VERIFICATION OF COMPLIANCE

Applicant:	Sony Mobile Communications AB Nya Vattentornet 22188 Lund/Sweden
Product Name:	Mobile Phone
Brand Name:	Sony
Type No.:	PM-0852-BV
Model Difference:	N/A
FCC ID:	PY7-PM0852
File Number:	ER/2014/B0060
Date of test:	Nov. 06, 2014 ~ Nov. 21, 2014
Date of EUT Received:	Nov. 06, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 & ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.The test results of this report relate only to the tested sample identified in this report.

Test By:	Marcus Tseng	***Date***	Jan. 15, 2015
	Marcus Tseng / Engineer		
Prepared By:	Tiffany Kao	***Date***	Jan. 15, 2015
	Tiffany Kao / Clerk		
Approved By:	Jim Chang	***Date***	Jan. 15, 2015
	Jim Chang / Supervisor		

Revision History

Report Number	Revision	Description	Issue Date
ER/2014/B0060	Rev.00	Initial creation of document	Nov. 25, 2014
ER/2014/B0060	Rev.01	Updated HW, SW, and internal photo	Jan. 09, 2015
ER/2014/B0060	Rev.02	Revised Measurement Procedure of Peak Output Power Measure-ment	Jan. 15, 2015

Table of Contents

1 GENERAL INFORMATION

1.1 Product Description

General:

Product Name:	Mobile Phone	
Brand Name:	Sony	
Type No.:	PM-0852-BV	
Model Difference:	N/A	
Data Cable (USB):	Model No.: EC450, Supplier: K-one Type No.: AI-0700, Length: 100 cm	
Simple Hands-Free (SHF-White):	Model No.: MH410c, Supplier: Foster Electric Type No.: AG-1100	
Car Charger:	Model No.: AN400, Supplier: Salcomp Type No.: CAA-0003013	
BT PHF:	Model No.: SBH20, Supplier: Sony Type No.: RD-0010 coupling with Simple Hands Free (Model No.: MH755, Supplier: BALDA, Type No.: AG-0503)	
Hardware Version:	A	
Software Version:	25.0.A.0.33	
Power Supply:	3.8Vdc	
	Battery:	Model No.: LIS1574ERPC, Supplier: Sony Type No.: N/A
	Adapter:	Model No.: EP800, Supplier: Salcomp Type No.: CAA-0002016-US

Bluetooth BR+EDR:

Bluetooth Version:	V4.1 dual mode + HS
Channel number:	79 channels
Modulation type:	Frequency Hopping Spread Spectrum
Transmit Power:	5.38dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	PIFA Antenna, Gain: 2.52dBi

Bluetooth Low Energy:

Frequency Range:	2402 – 2480MHz
Bluetooth Version:	V4.1 dual mode + HS
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	-1.49dBm (Peak)
Antenna Designation:	PIFA Antenna, Gain: 2.52dBi

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology
11b/g	2412-2462	11	b: 18.87dBm g: 22.66dBm	DSSS, OFDM
11n	HT20 2412-2462	11	HT20: 21.09dBm	OFDM
11n	HT40 2422-2452	7	HT40: 22.22dBm	OFDM
Antenna Designation:		PIFA Antenna, Gain: 2.52dBi		
Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM		
Transition Rate:		802.11 b: 1/2/5.5/11 Mbps; 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 72.2Mbps 802.11 n_40MHz: 13.5 –135Mbps		

WLAN 5GHz:

Wi-Fi	Frequency Range	Channels	Avg. Power	Modulation Technology
11a	5150~5250	4	13.96dBm	OFDM
	5250~5350	4	13.99dBm	
	5470~5725	8	13.96dBm	
	5725-5850	5	13.79dBm	
11n	HT20 5150~5250	4	HT20: 12.99dBm	OFDM
	HT20 5250~5350	4	HT20: 12.95dBm	
	HT20 5470~5725	8	HT20: 12.99dBm	
	HT20 5725-5850	5	HT20: 12.79dBm	
11n	HT40 5150~5250	2	HT40: 11.95dBm	OFDM
	HT40 5250~5350	2	HT40: 11.93dBm	
	HT40 5470~5725	3	HT40: 11.96dBm	
	HT40 5725-5850	2	HT40: 11.98dBm	
Antenna Designation	PIFA Antenna, 5GHz Gain: -0.54dBi (5150MHz-5250MHz) 5GHz Gain: -0.89dBi (5250MHz-5350MHz) 5GHz Gain: -0.34dBi (5470MHz-5725MHz) 5GHz Gain: -0.19dBi (5725MHz-5850MHz)			
Modulation type	64QAM, 16QAM, QPSK, BPSK for OFDM			
Transition Rate:	802.11 a: 6/9/12/18/24/36/48/54 Mbps 802.11 n_20MHz: 6.5 – 65.0Mbps 802.11 n_40MHz: 13.5 – 135.0Mbps			

GSM / WCDMA/ LTE:

	Operating Frequency		Rated Power
Cellular Phone Standards Frequency Range and Power	GSM/GPRS 850, Class 12	824.2 MHz– 848.8 MHz	33dBm
	EDGE 850, Class 12	824.2 MHz– 848.8 MHz	27dBm
	GSM/GPRS 1900, Class 12	1850.2MHz – 1909.8MHz	30dBm
	EDGE 1900, Class 12	1850.2MHz – 1909.8MHz	26dBm
	WCDMA/HSUPA/HSDPA /HSPA+ Band II	1852.4MHz – 1907.6MHz	24dBm
	WCDMA/HSUPA/HSDPA /HSPA+ Band IV	1712.4MHz - 1752.6MHz	24dBm
	WCDMA/HSUPA/HSDPA /HSPA+ Band V	826.4MHz - 846.6MHz	24dBm
	1.4MHz BW LTE-Band 2	1850MHz– 1909.3MHz	23dBm
	3MHz BW LTE-Band 2	1851.5MHz – 1908.5MHz	23dBm
	5MHz BW LTE-Band 2	1852.5MHz – 1907.5MHz	23dBm
	10MHz BW LTE-Band 2	1855MHz – 1905MHz	23dBm
	15MHz BW LTE-Band 2	1857.5MHz – 1902.5MHz	23dBm
	20MHz BW LTE-Band 2	1860MHz – 1900MHz	23dBm
	1.4MHz BW LTE-Band 4	1710.7MHz– 1754.3MHz	23dBm
	3MHz BW LTE-Band 4	1711.5MHz – 1753.5MHz	23dBm
	5MHz BW LTE-Band 4	1712.5MHz – 1752.5MHz	23dBm
	10MHz BW LTE-Band 4	1715MHz – 1750MHz	23dBm
	15MHz BW LTE-Band 4	1717.5MHz – 1747.5MHz	23dBm
	20MHz BW LTE-Band 4	1720MHz – 1745MHz	23dBm
	5MHz BW LTE-Band 5	2502.5MHz – 2567.5MHz	23dBm
	10MHz BW LTE-Band 5	2505.0MHz – 2565.0MHz	23dBm
	15MHz BW LTE-Band 5	2507.5MHz – 2562.5MHz	23dBm
	20MHz BW LTE-Band 5	2510.0MHz – 2560MHz	23dBm

	Operating Frequency		Rated Power
Cellular Phone Standards Frequency Range and Power	5MHz BW LTE-Band 7	2502.5MHz – 2567.5MHz	23dBm
	10MHz BW LTE-Band 7	2505.0MHz – 2565.0MHz	23dBm
	15MHz BW LTE-Band 7	2507.5MHz – 2562.5MHz	23dBm
	20MHz BW LTE-Band 7	2510.0MHz – 2560MHz	23dBm
	1.4MHz BW LTE-Band 12	699.7MHz– 715.3MHz	23dBm
	3MHz BW LTE-Band 12	700.5MHz – 714.5MHz	23dBm
	5MHz BW LTE-Band 12	701.5MHz – 713.5MHz	23dBm
	10MHz BW LTE-Band 12	704.0MHz – 711.0MHz	23dBm
	5MHz BW LTE-Band 13	779.5MHz – 784.5MHz	23 dBm
	10MHz BW LTE-Band 13	782MHz - 782MHz	23 dBm
	5MHz BW LTE-Band 17	706.5MHz – 713.5MHz	23dBm
	10MHz BW LTE-Band 17	709.0MHz –711.0MHz	23dBm

Type of Emission:	GSM 850: 252KGXW, GSM 1900: 249KGXW GPRS 850: 248KGXW, GPRS 1900: 248KGXW EDGE 850: 259KG7W, EDGE 1900: 254KG7W WCDMA Band II: 4M23F9W, WCDMA Band IV: 4M22F9W, WCDMA Band V: 4M24F9W HSDPA Band II: 4M21F9W, HSDPA Band IV: 4M21F9W, HSDPA Band V: 4M23F9W HSUPA Band II: 4M21F9W, HSUPA Band IV: 4M23F9W, HSUPA Band V: 4M23F9W 1.4MHz BW LTE-Band 2 QPSK:1M10G7D 1.4MHz BW LTE-Band 2 16QAM: 1M09D7W 3MHz BW LTE-Band 2 QPSK: 2M71G7D 3MHz BW LTE-Band 2 16QAM: 2M70D7W 5MHz BW LTE-Band 2 QPSK: 4M54G7D 5MHz BW LTE-Band 2 16QAM: 4M53D7W 10MHz BW LTE-Band 2 QPSK: 8M98G7D 10MHz BW LTE-Band 2 16QAM: 8M98D7W 15MHz BW LTE-Band 2 QPSK: 13M49G7D 15MHz BW LTE-Band 2 16QAM: 13M54D7W 20MHz BW LTE-Band 2 QPSK: 18M04G7D 20MHz BW LTE-Band 2 16QAM: 18M00D7W 1.4MHz BW LTE-Band 4 QPSK:1M10G7D 1.4MHz BW LTE-Band 4 16QAM: 1M10D7W 3MHz BW LTE-Band 4 QPSK: 2M72G7D 3MHz BW LTE-Band 4 16QAM: 2M71D7W 5MHz BW LTE-Band 4 QPSK: 4M52G7D 5MHz BW LTE-Band 4 16QAM: 4M52D7W 10MHz BW LTE-Band 4 QPSK: 8M98G7D 10MHz BW LTE-Band 4 16QAM: 8M98D7W 15MHz BW LTE-Band 4 QPSK: 13M50G7D 15MHz BW LTE-Band 4 16QAM: 13M52D7W 20MHz BW LTE-Band 4 QPSK: 17M99D7W 20MHz BW LTE-Band 4 16QAM: 18M00D7W

Type of Emission:	5MHz BW LTE-Band 5 QPSK: 1M10G7D 5MHz BW LTE-Band 5 16QAM: 1M10D7W 10MHz BW LTE-Band 5 QPSK: 2M71G7D 10MHz BW LTE-Band 5 16QAM: 2M70D7W 15MHz BW LTE-Band 5 QPSK: 4M53G7D 15MHz BW LTE-Band 5 16QAM: 4M53D7W 20MHz BW LTE-Band 5 QPSK: 9M01G7D 20MHz BW LTE-Band 5 16QAM: 9M06D7W 5MHz BW LTE-Band 7 QPSK: 4M53G7D 5MHz BW LTE-Band 7 16QAM: 4M54D7W 10MHz BW LTE-Band 7 QPSK: 9M00G7D 10MHz BW LTE-Band 7 16QAM: 8M99D7W 15MHz BW LTE-Band 7 QPSK: 13M49G7D 15MHz BW LTE-Band 7 16QAM: 13M52D7W 20MHz BW LTE-Band 7 QPSK: 17M98G7D 20MHz BW LTE-Band 7 16QAM: 17M96D7W 1.4MHz BW LTE-Band 12 QPSK:1M10G7D 1.4MHz BW LTE-Band 12 16QAM: 1M10D7W 3MHz BW LTE-Band 12 QPSK: 2M71G7D 3MHz BW LTE-Band 12 16QAM: 2M70D7W 5MHz BW LTE-Band 12 QPSK: 4M53G7D 5MHz BW LTE-Band 12 16QAM: 4M52D7W 10MHz BW LTE-Band 12 QPSK: 9M05G7D 10MHz BW LTE-Band 12 16QAM: 9M05D7W 5MHz BW LTE-Band 13 QPSK: 4M54G7D 5MHz BW LTE-Band 13 16QAM: 4M55D7W 10MHz BW LTE-Band 13 QPSK: 8M97G7D 10MHz BW LTE-Band 13 16QAM: 8M97D7W 5MHz BW LTE-Band 17 QPSK: 4M52G7D 5MHz BW LTE-Band 17 16QAM: 4M52D7W 10MHz BW LTE-Band 17 QPSK: 8M98G7D 10MHz BW LTE-Band 17 16QAM: 8M96D7W
IMEI:	00440245-355173-5

The report applied for Bluetooth Low Energy.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: PY7-PM0852** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with FCC part 15; Subpart B is authorized under the certification procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009 & ANSI C63.10:2009. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with Jun 2014 KDB558074 V03r02 for compliance to FCC 47CFR 15.247 requirements.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2009 & ANSI C63.10: 2009. FCC Registration Numbers are: 990257, Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 455997.

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009 & 6.2 ANSI 63.10:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 & 6.2.2, and 6.2.3 in ANSI 63.10:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 and of ANSI C63.4:2009, & Section 6.3, 6.4, 6.5, and 6.6 of ANSI 63.10:2009.

2.4 Configuration of Tested System

Fig. 2-1 Radiated Emission

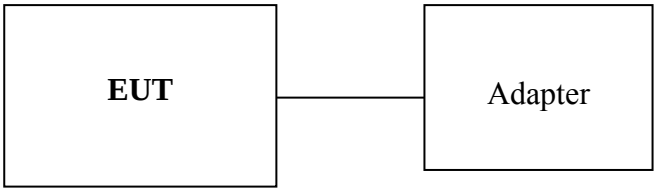

Fig. 2-2 Conducted (Antenna Port) Configuration

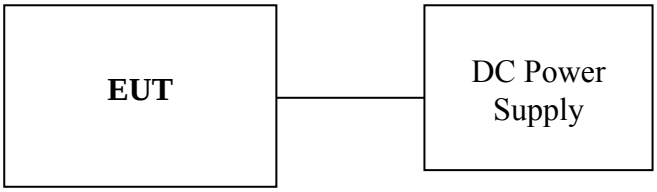

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	HP	E3640A	KR93300208	N/A	N/A

Fig. 2-2 AC Power Line Conducted Emission

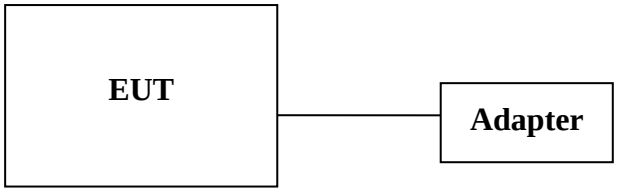

Table 2-2 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A

3 SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(d)	Spurious Emission	Compliant
§15.247(e)	Peak Power Density	Compliant
§15.203	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.
Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz)、mid (2442MHz) and high (2480MHz) with BT4.0 mode is chosen for full testing.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for BT4.0 mode Transmitter for channel Low, Mid and High, the worst case H position was reported.

Type no, PM-0850-BV, and Type no PM-0852-BV share the equivalently identical enclosure,
Material of coating, I/O function, PCB board, display, and power source. In addition, PM-0850-BV, and Type no PM-0852-BV implement the same Bluetooth/WLAN chipset/module with the same antenna that operates with the same transmitted power level. Hence, this given test report contains the identical test results that inherent from PM-0850-BV.

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.42 dB
6dB Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Peak Power Density	+/- 1.55 dB
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : **Vertical**)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty (Polarization : **Horizontal**)	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

6.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015
LISN	Rolf-Heine	NNB-2/16Z	99012	03/26/2014	03/25/2015
LISN	FCC	FCC-LISN-50/250-25-2-01	04034	03/19/2014	03/18/2015
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2013	11/25/2014

6.3 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009 & ANSI C63.10:2009.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

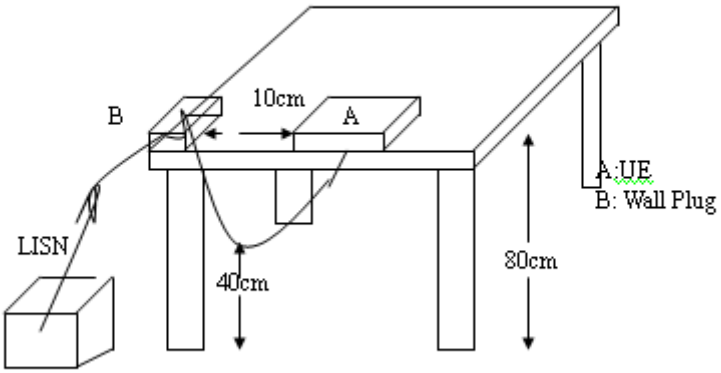

6.5 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit

AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode			Test Date:	Nov. 21, 2014
Temperature:	26 ℃	Humidity:	60 %	Test By:	Tin
Model No.:	EP800				

Site ConductionRoom
Limit: FCC Class B Conduction(QP)
Mode: Operation
Note: Adapter:3113W 22 608033

Phase: L1
Power: AC 120V/60Hz

Temperature: 24 ℃
Humidity: 66%

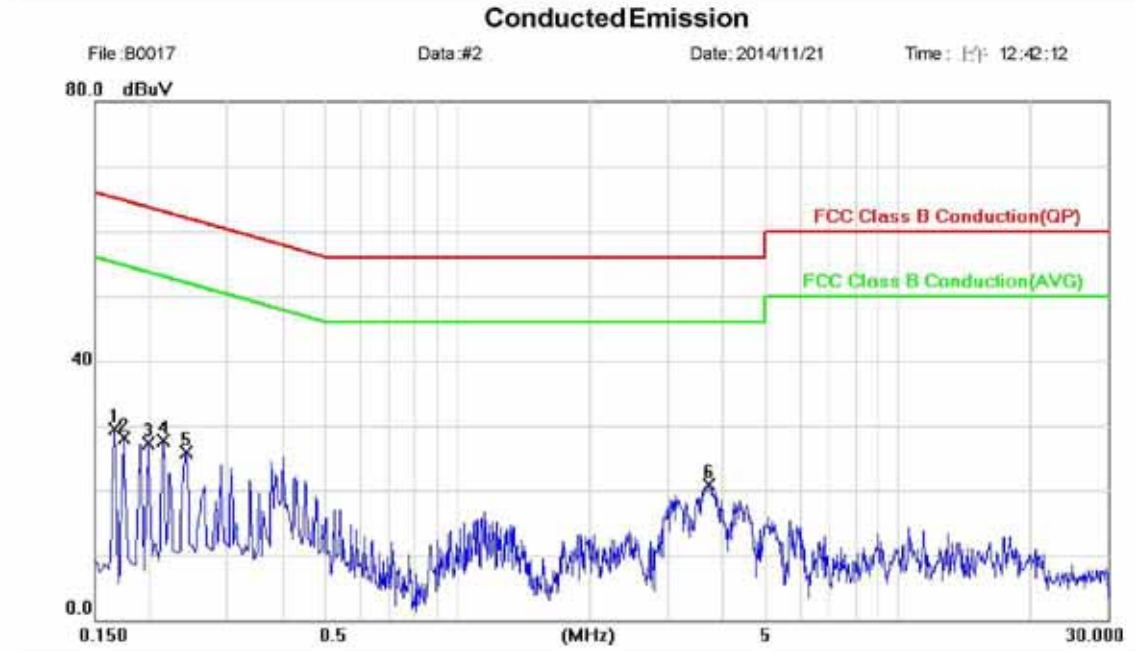

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1660	29.45	0.05	29.50	65.16	-35.66	peak	
2		0.1740	28.02	0.05	28.07	64.77	-36.70	peak	
3		0.1980	27.23	0.06	27.29	63.69	-36.40	peak	
4		0.2140	27.56	0.06	27.62	63.05	-35.43	peak	
5		0.2420	25.82	0.06	25.88	62.03	-36.15	peak	
6	*	3.7260	20.68	0.17	20.85	56.00	-35.15	peak	

Site ConductionRoom	Phase:	N	Temperature: 24 ℃
Limit: FCC Class B Conduction(QP)	Power:	AC 120V/60Hz	Humidity: 66%
Mode: Operation			
Note: Adapter:3113W 22 608033			

Conducted Emission

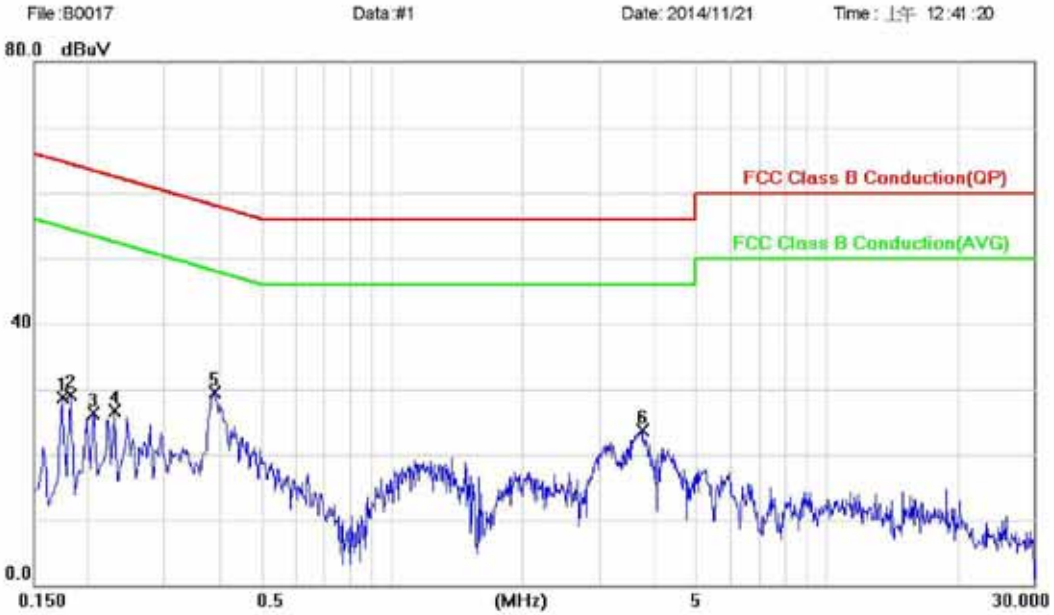

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1740	28.73	0.05	28.78	64.77	-35.99	peak	
2		0.1820	29.13	0.06	29.19	64.39	-35.20	peak	
3		0.2060	26.22	0.06	26.28	63.37	-37.09	peak	
4		0.2300	26.62	0.06	26.68	62.45	-35.77	peak	
5	*	0.3900	29.53	0.07	29.60	58.06	-28.46	peak	
6		3.7620	23.48	0.17	23.65	56.00	-32.35	peak	

7 PEAK OUTPUT POWER MEASUREMENT

7.1 Standard Applicable:

According to §15.247 (b)

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

7.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015

7.3 Test Set-up:

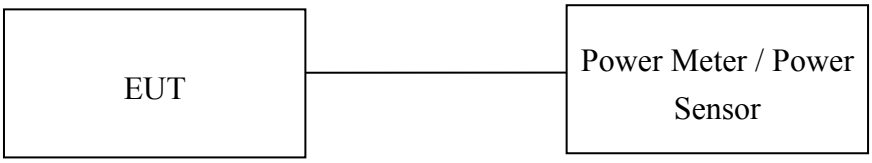

7.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (**Peak power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =peak, Sweep = Auto.

(**Avg. power setting on Spectrum:** Channel power function, RBW = 1MHz, VBW = 3MHz, Span: 30/60MHz, Detector =Avg., Trace avg =100, Sweep = Auto, Setting on spectrum is adjusted based on the mandatory procedure in 9.2.2.4 of the KDB558074). Power Meter is used as the auxiliary test equipment to conduct the output power measurement. 9.2.3, option 3 in KDB558074 is followed.

3. Record the max. Reading as observed from Spectrum or Power Meter.

4. Repeat above procedures until all test default channel measured was complete.

Duty Factor:

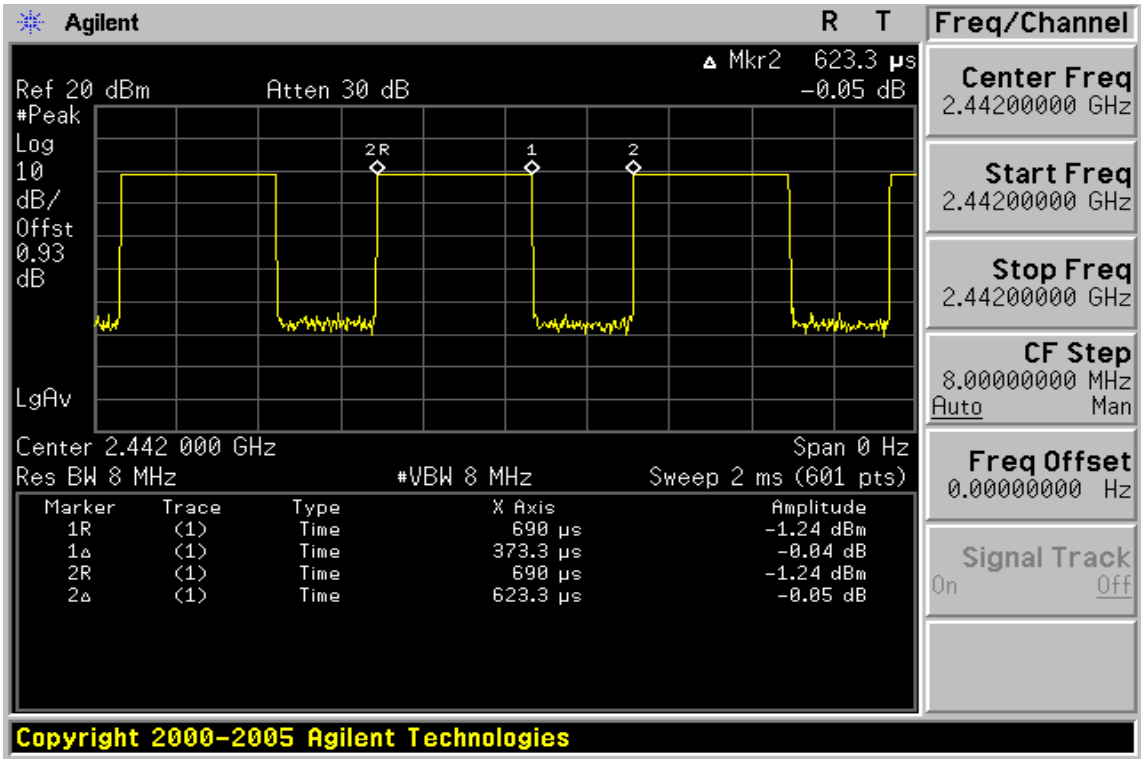

7.5 Measurement Result:

BT4.0 mode:

CH	Frequency (MHz)	Peak Power Output(dBm)	Required Limit
0	2402	-3.53	1 Watt = 30 dBm
20	2442	**-1.49**	1 Watt = 30 dBm
39	2480	-2.77	1 Watt = 30 dBm

CH	Frequency (MHz)	Average Power Output(dBm)	Required Limit
0	2402	-6.00	1 Watt = 30 dBm
20	2442	-3.86	1 Watt = 30 dBm
39	2480	-5.21	1 Watt = 30 dBm

Note: Measured by power meter,* ***cable loss as 0.93dB that offsets on the power meter in Peak*

Note: Measured by power meter,* ***as cable loss+ Duty cycle factor that offsets on the power meter*

8 6dB BANDWIDTH

8.1 Standard Applicable:

According to §15.247(a)(2), Systems using digital modulation techniques may operate in the 902 - 928 MHz,2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500kHz.

8.2 Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Power Meter	Anritsu	ML2495A	1005007	01/13/2014	01/12/2015
Power Sensor	Anritsu	MA2411B	917032	01/13/2014	01/12/2015
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015
Spectrum Analyzer	Agilent	E4440A	MY45304525	03/08/2014	03/07/2015
DC Block	Mini-Circuits	BLK-18-S+	1	02/27/2014	02/26/2015
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	01/03/2014	01/02/2015
Attenuator	Mini-Circuit	BW-S10W2+	002	02/27/2014	02/26/2015
Splitter	Agilent	11636B	N/A	02/27/2014	02/26/2015

8.3 Test Set-up:

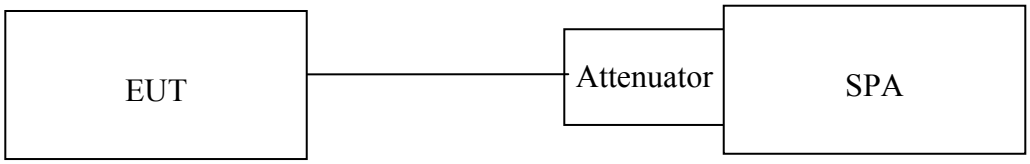

8.4 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 5MHz, Detector=Peak, Sweep=auto, the setting on spectrum is adjusted based on the procedure as guide in 8.1 option 1 of KDB558074.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat above procedures until all test default channel measured were complete.

8.5 Measurement Result:

BT4.0 mode

Frequency (MHz)	Bandwidth (kHz)	Bandwidth (kHz)	Result
2402	707.820	> 500	PASS
2442	703.533	> 500	PASS
2480	690.900	> 500	PASS

**** Cable loss as 0.93dB that offsets on the spectrum.***

** Note: The arrow "->" reveals X decibel level*

Note: Refer to next page for plots.

BT4.0 mode

6dB Band Width Test Data CH-Low

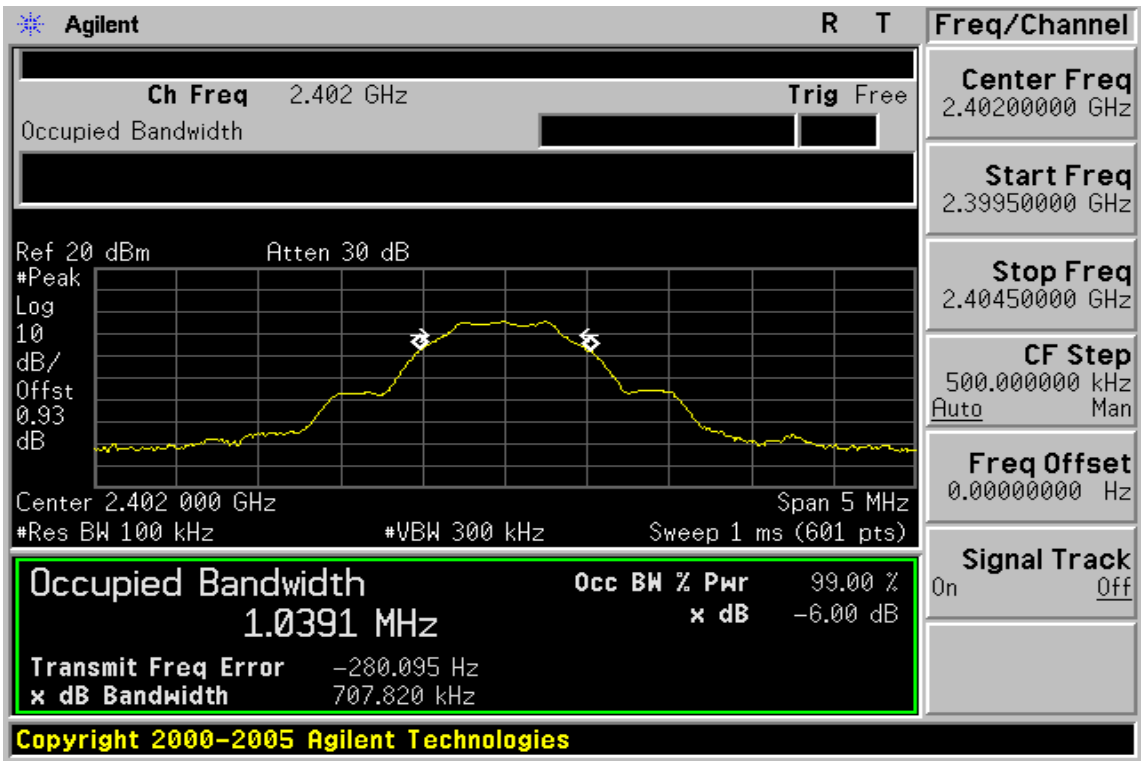

6dB Band Width Test Data CH-Mid

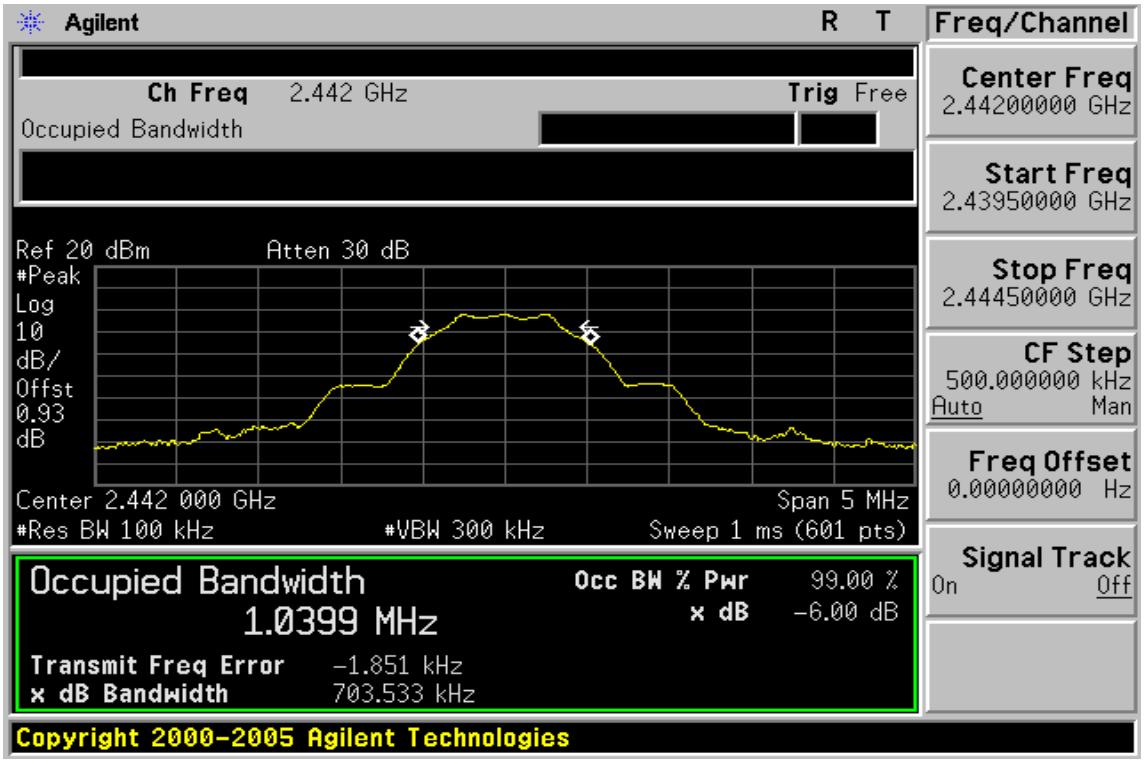

6dB Band Width Test Data CH-High

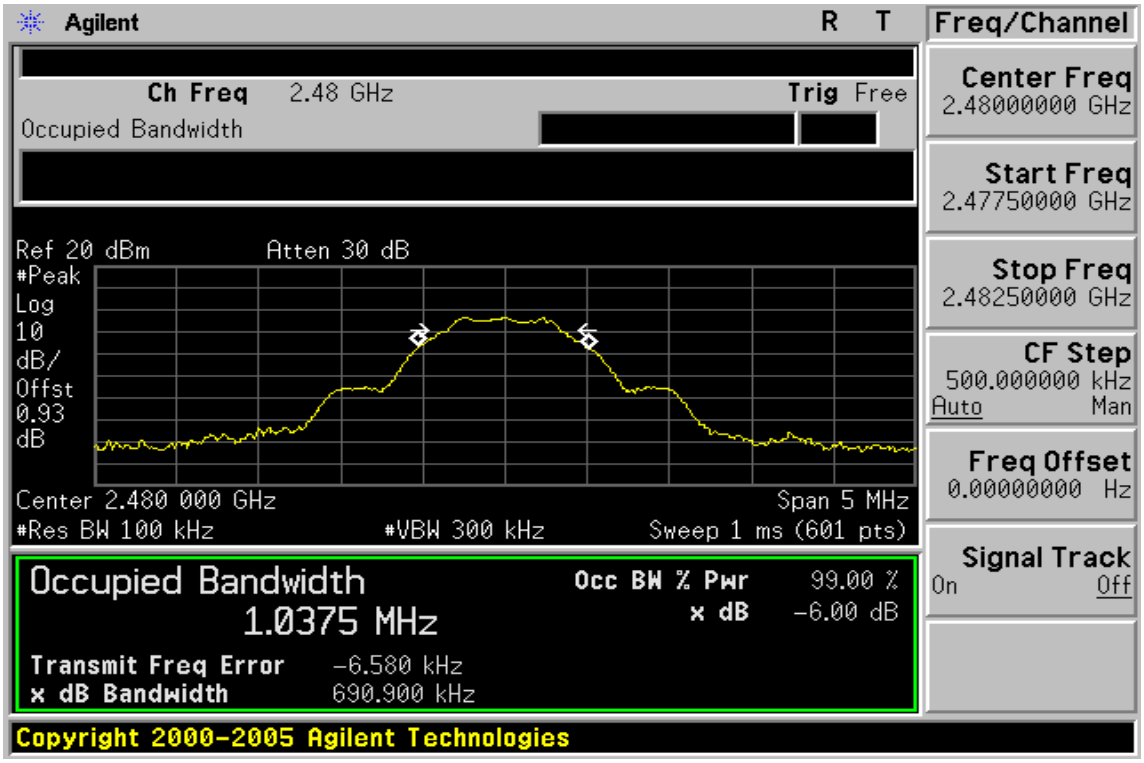

9 BAND EDGES MEASUREMENT

9.1 Standard Applicable:

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 Measurement Equipment Used:

9.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

9.2.2 Radiated emission:

966 Chamber					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
EMI Test Receiver	R&S	ESCI7	100760	05/26/2014	05/25/2015
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/19/2014	05/18/2015
EXA Spectrum Analyzer	Agilent	N9010A	MY50420195	01/20/2014	01/19/2015
Spectrum Analyzer	R&S	FSV-30	101398	10/07/2014	10/06/2015
Loop Antenna	ETS.LINDGREN	6502	00148045	07/03/2014	07/02/2015
Bilog Antenna	SCHWAZBECK	VULB9168	378	01/02/2014	01/01/2015
Horn antenna	ETS.LINDGREN	3117	123995	05/19/2014	05/18/2015
Horn Antenna	Schwarzbeck	BBHA9170	184	01/23/2014	01/22/2015
Pre-Amplifier	Agilent	8447D	2944A07676	01/03/2014	01/02/2015
Pre-Amplifier	Agilent	8449B	3008A00578	01/03/2014	01/02/2015
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/24/2014	01/23/2015
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M2	02/27/2014	02/26/2015
Attenuator	Mini-Circuit	BW-S10W2+	004	02/27/2014	02/26/2015
Turn Table	HD	DT420	N/A	N.C.R	N.C.R
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R
Controller	HD	HD100	N/A	N.C.R	N.C.R
Low Loss Cable	Huber Suhner	966_Rx	9	01/03/2014	01/02/2015

9.3 Test SET-UP:

9.3.1 Conducted Emission at antenna port:

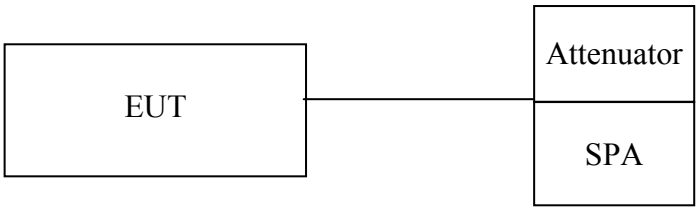

9.3.2 Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

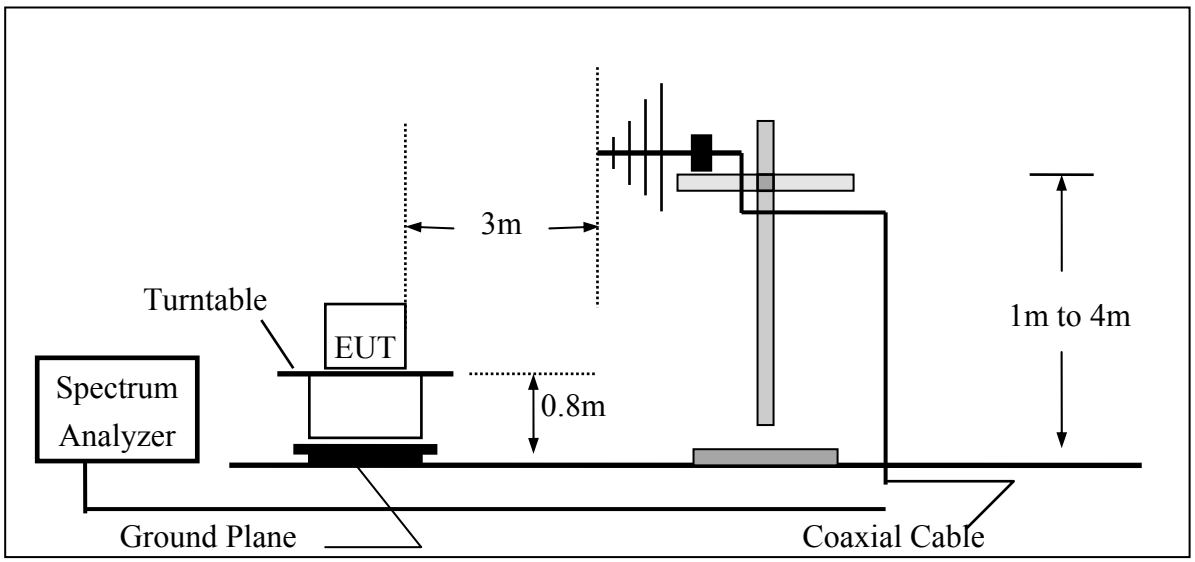

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

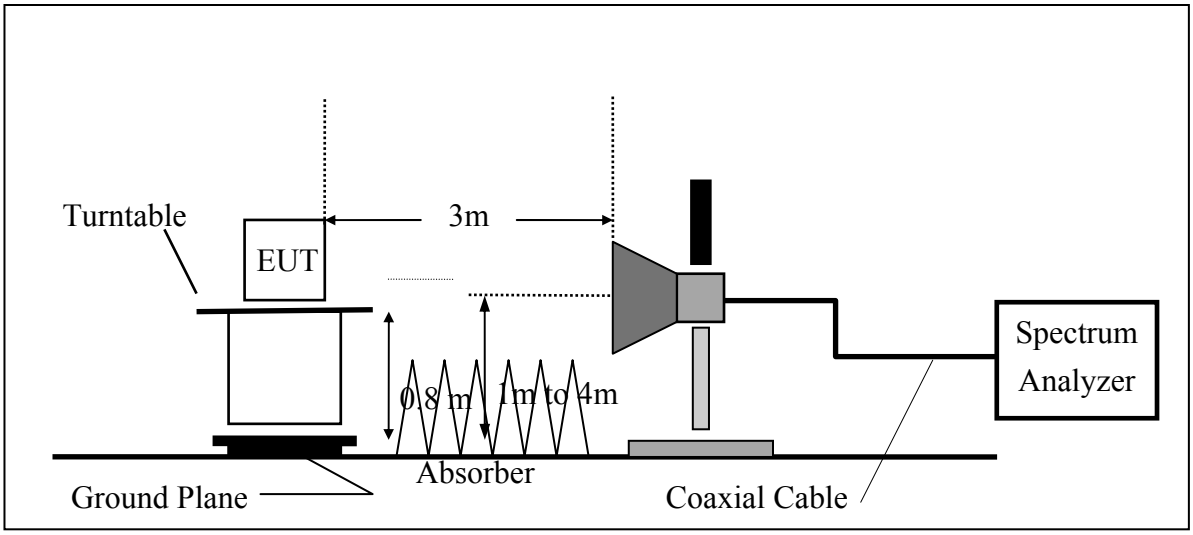

9.4 Measurement Procedure:

Unwanted Emissions into Non-Restricted Frequency Bands, Measurement Procedure followed by 11.1 of KDB558074 D01

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
4. Set the spectrum analyzer as RBW, VBW=300KHz, Detector = Peak, Sweep = auto
5. Mark the highest reading of the emission as the reference level measurement.
6. Set DL as the limit = reading on marker 1 – 20dBm
7. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 KHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
8. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Unwanted Emission falling into Restricted Frequency Bands, Measurement Procedure followed by 12.1 of KDB558074:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. On spectrum, following 8.1.2, and RBW = 1MHz, VBW = 3MHz, & Marker 2390MHz, and 2483.5MHz (Peak Measurement). Average Measurement: following 8.2 with the modification span to 1MHz, &RBW = 1MHz, VBW = 3MHz and peak marker function to obtain the highest reading on 2390, and 2483.5MHz.

Repeat above procedures until all default test channel (low, middle, and high) was complete

9.5 Field Strength Calculation:

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

BT4.0 mode
Band Edges Test Data CH-Low

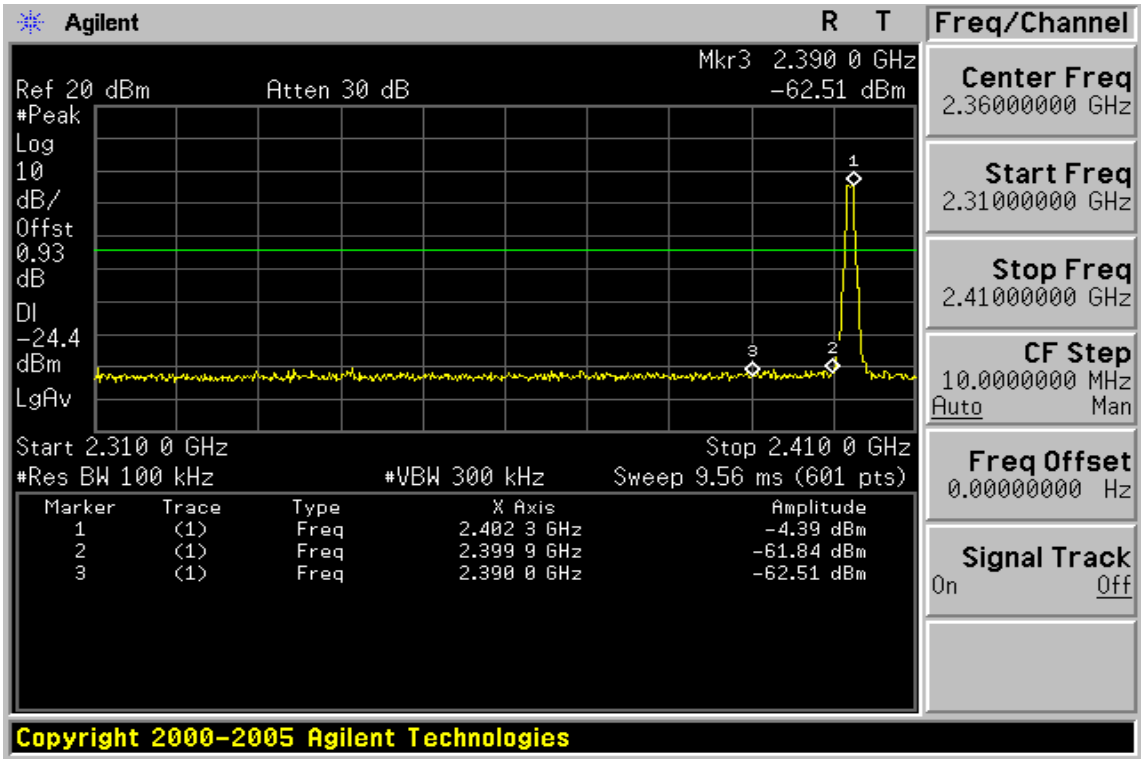

Band Edges Test Data CH-High

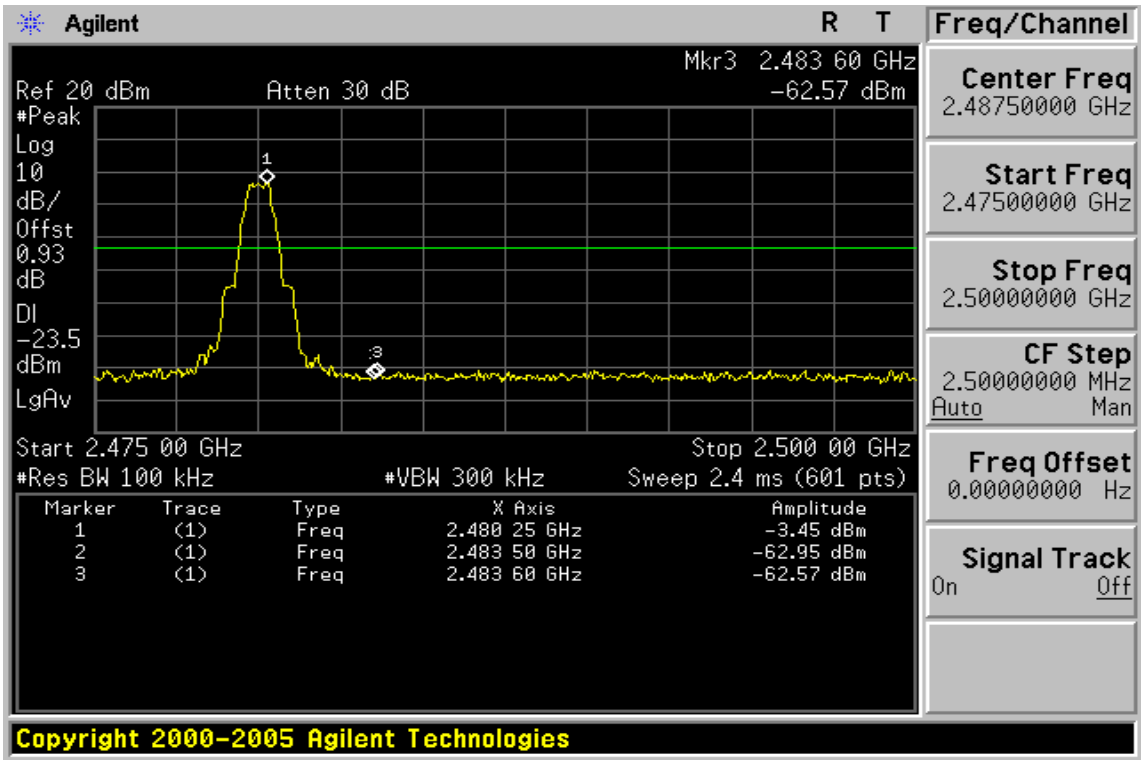

Tabular Results:

BT4.0

Frequency (GHz)	Results (dBm)	Ref (dBm)	Limit (dBm)	Verdict
2.3999	-61.84	-4.39	-24.4	Pass
2.4836	-62.57	-3.45	-23.5	Pass

Note: Limit = Ref (The highest level of emission) dBm – 20dBm

Radiated Emission: BT4.0 mode:

For measurement plot of radiation revealing the compliance of 15.209, please refer to Appendix I.

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
2390.00	E	Average	30.02	2.48	32.50	54.00	-21.50
2390.00	E	Peak	43.20	2.48	45.68	74.00	-28.32

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
2390.00	E	Average	30.37	2.48	32.85	54.00	-21.15
2390.00	E	Peak	43.06	2.48	45.54	74.00	-28.46

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
2483.50	E	Average	30.56	2.84	33.40	54.00	-20.60
2483.50	E	Peak	43.50	2.84	46.34	74.00	-27.66

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
2483.50	E	Average	30.53	2.84	33.37	54.00	-20.63
2483.50	E	Peak	44.13	2.84	46.97	74.00	-27.03

.

10 SPURIOUS RADIATED EMISSION TEST

10.1 Standard Applicable

According to §15.247(d),

Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

10.2 Measurement Equipment Used:

10.2.1 Conducted Emission at antenna port:

Refer to section 7.2 for details.

10.2.2 Radiated emission:

Refer to section 9.2.2 for details.

10.3 Test SET-UP:

10.3.1 Conducted Emission at antenna port:

Refer to section 8.3 for details.

10.3.2 Radiated emission:

Refer to section 9.3.2 for details.

10.4 Measurement Procedure:

Radiated Emission:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
7. Repeat above procedures until all default test channel measured were complete.

Conducted Emission:

1. To connect Antenna Port of EUT to Spectrum.
2. Set RBW = 100K & VBW = 300K on Spectrum.
3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz, 18G to 40GHz (applicable if operation mode is 5GHz)
4. Via Software, combine 5 spans of frequency range into one plot
5. Repeat above procedures until all default test channel measured were complete.

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

10.6 Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Conducted Spurious Emission Measurement Result (BT4.0 mode)

Ch Low 30MHz – 3GHz

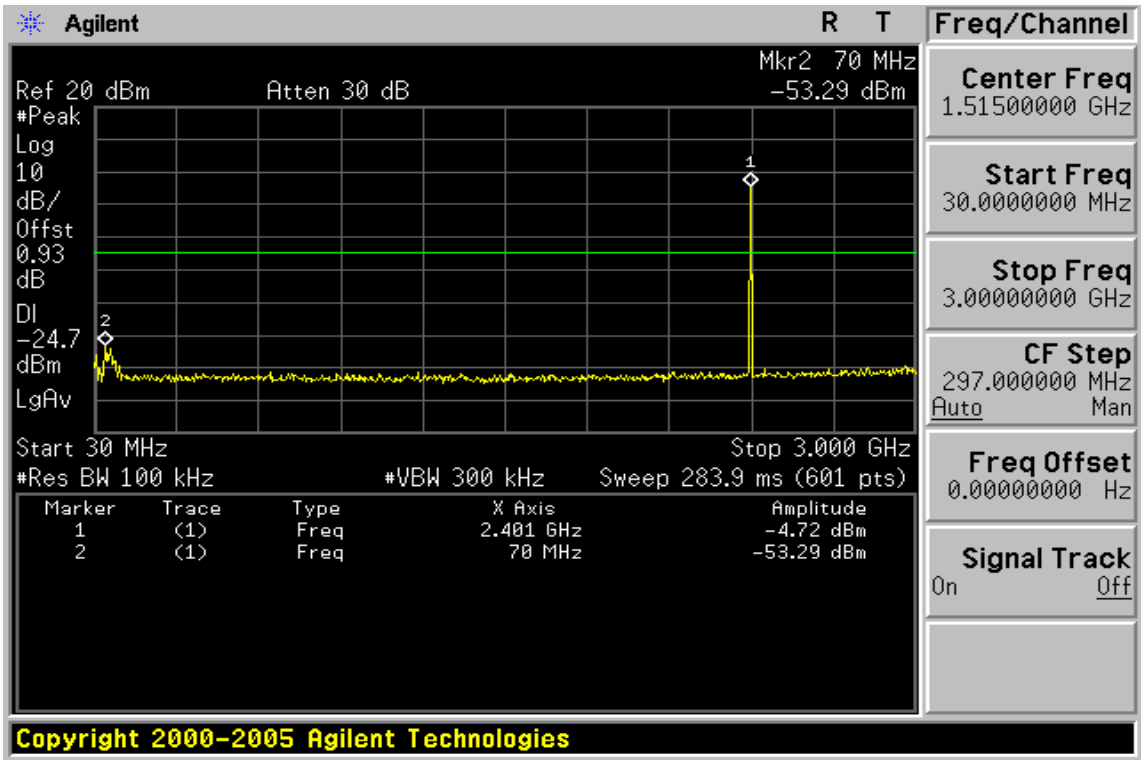

Ch Low 3GHz – 26.5GHz

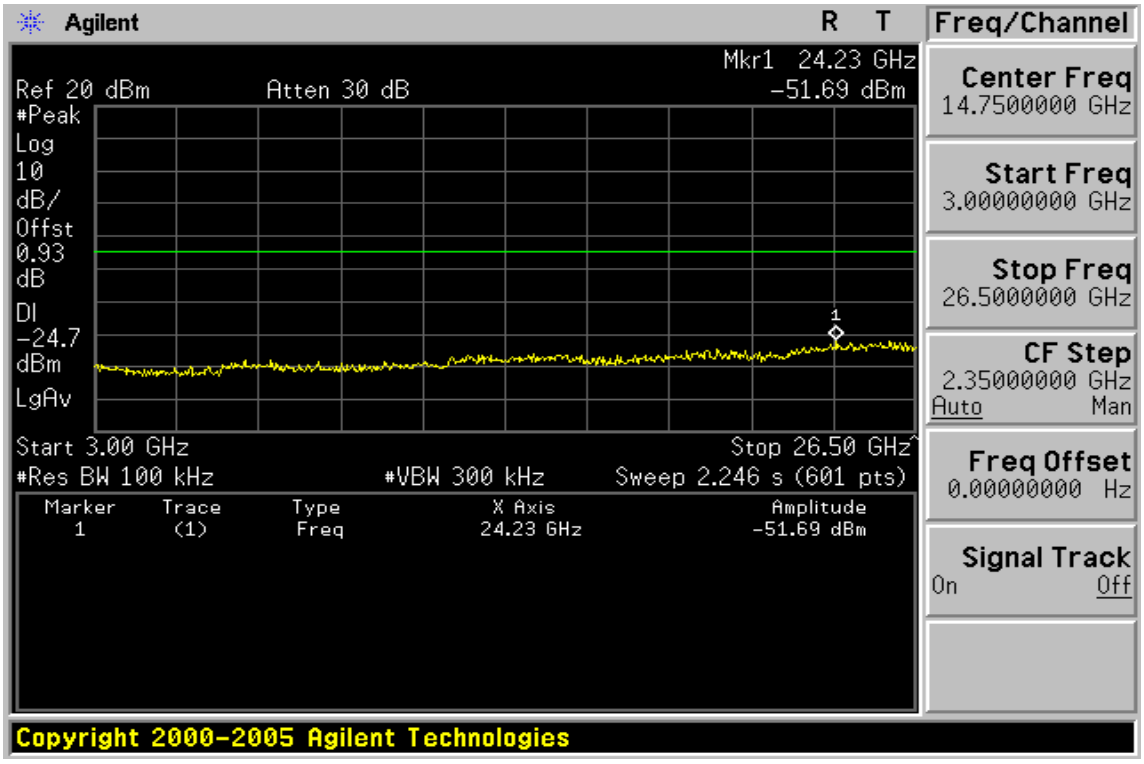

Ch Mid 30MHz – 3GHz

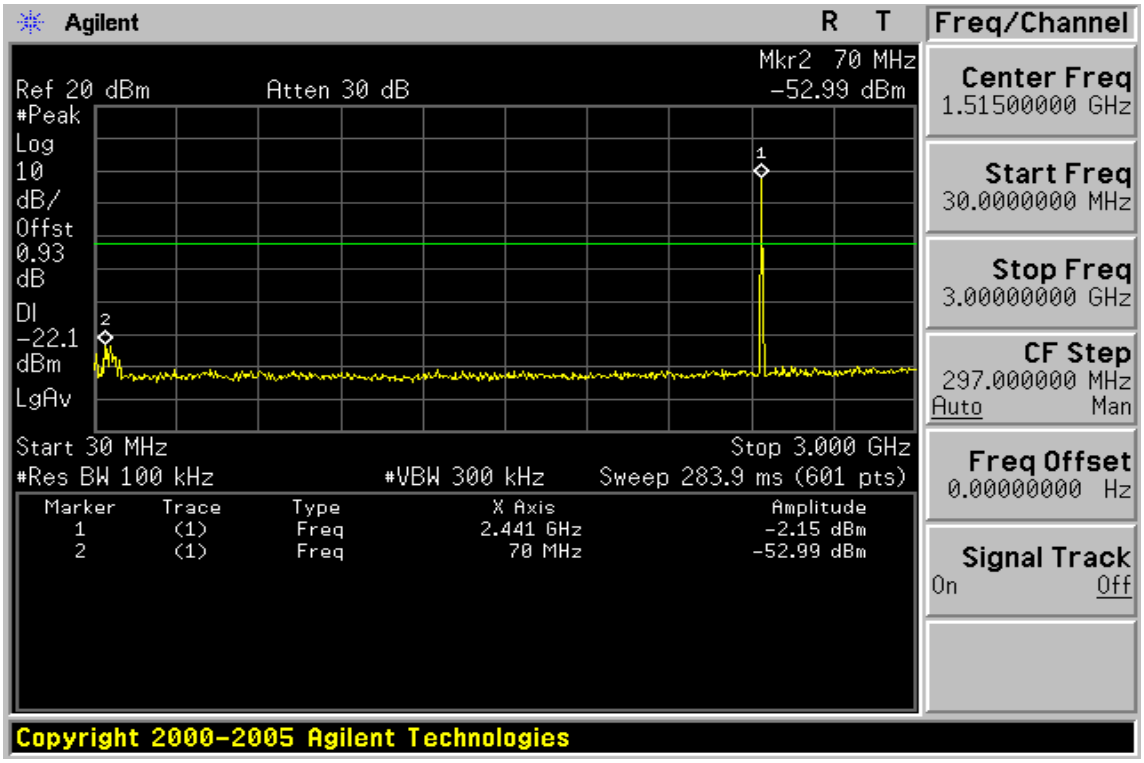

Ch Mid 3GHz – 26.5GHz

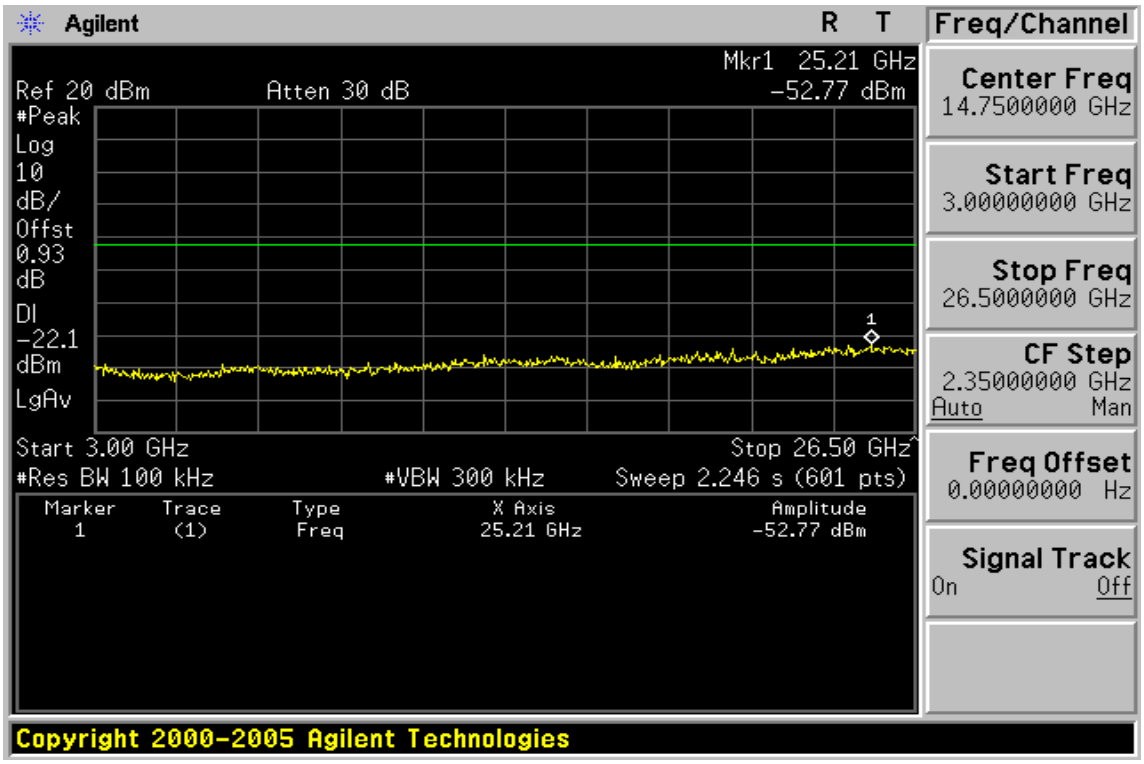

Ch High 30MHz – 3GHz

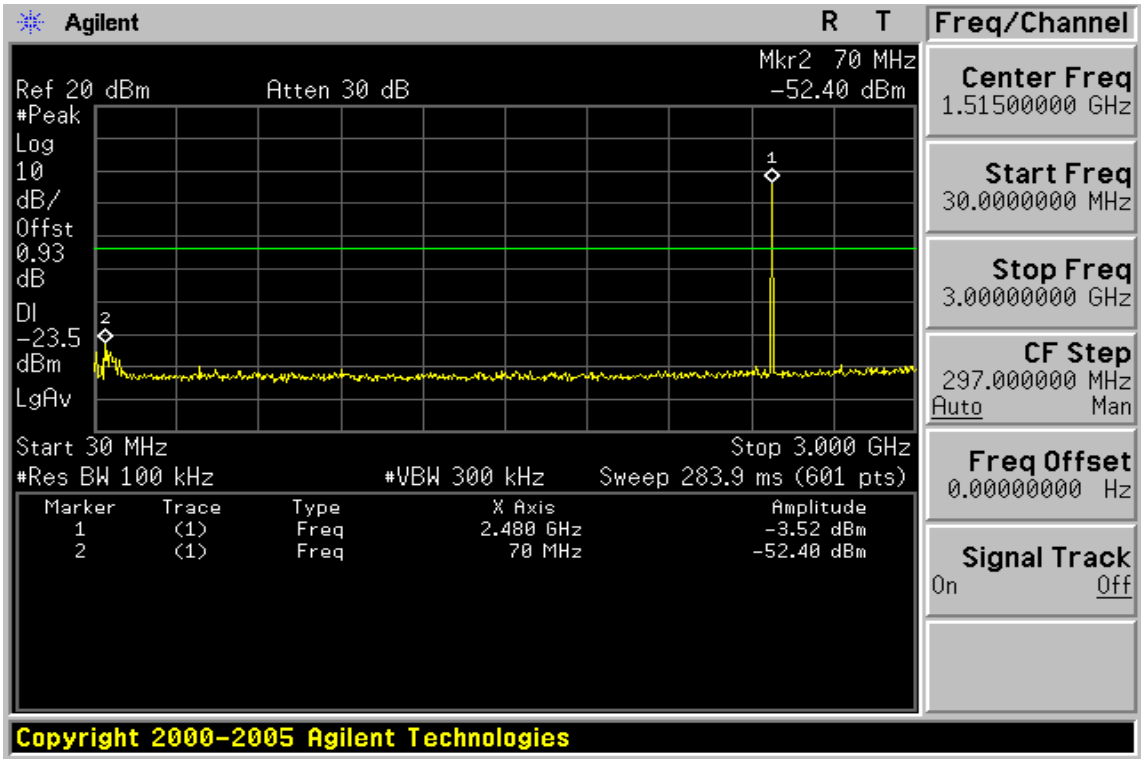

Ch High 3GHz – 26.5GHz

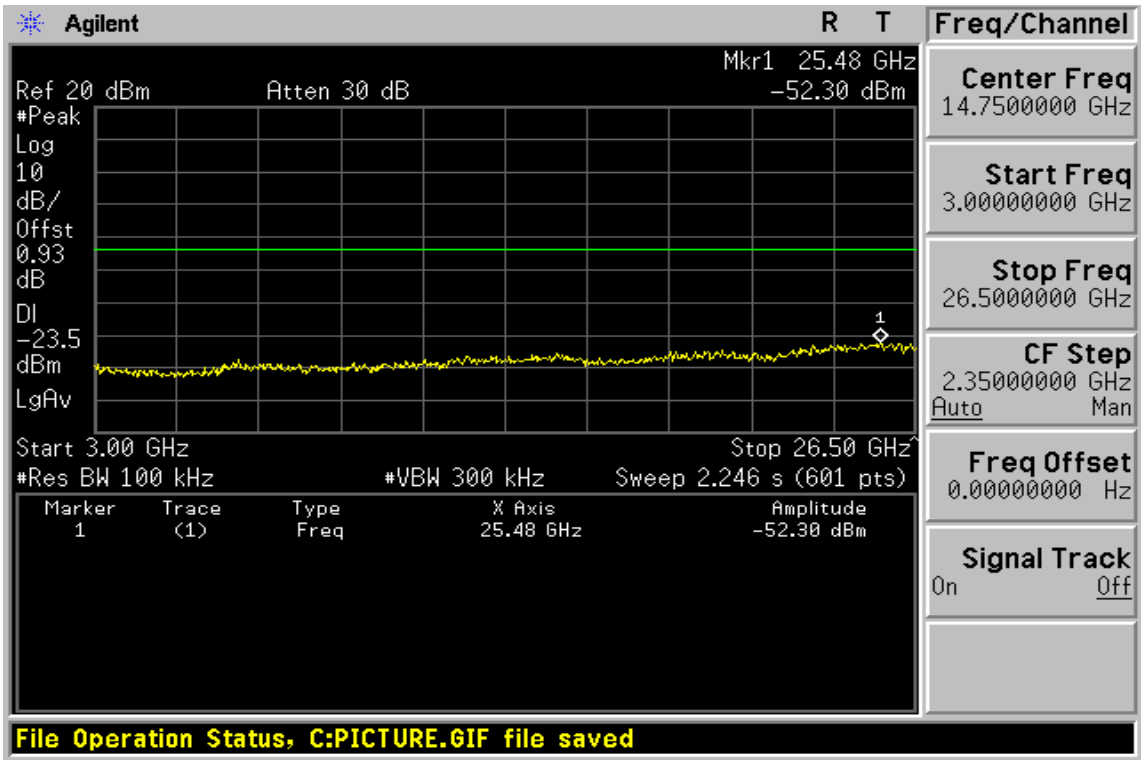

Tabular Results:

Out of Band emission at antenna terminals – BT 4.0

Fundamental Frequency :2402 MHz Engineer :Tin
Operation Mode :TX Low

Freq. (MHz)	Note F/H/E/S	Reading dBm	Limit dBm	Safe Margin dB
2401.00	Ref	-4.72	---	---
<30	S	---	-24.70	---
30-1000	S	---	-24.70	---
4804.00	H	---	-24.70	---
7206.00	H	---	-24.70	---
9608.00	H	---	-24.70	---
12010.00	H	---	-24.70	---
14412.00	H	---	-24.70	---
16814.00	H	---	-24.70	---
19216.00	H	---	-24.70	---
21618.00	H	---	-24.70	---
24020.00	H	---	-24.70	---
24230.00	S	-51.69	-24.70	26.99

Note : "H" : denotes Harmonic Frequency. "S" : denotes Spurious Frequency.
"---" : denotes Noise Floor. Ref: Reference Signal

Note2: Limit = Ref (the highest emission of the fundamental) – 20dBm

Fundamental Frequency :2442 MHz Engineer :Tin
Operation Mode :TX Mid

Freq. (MHz)	Note F/H/E/S	Reading dBm	Limit dBm	Safe Margin dB
2441.00	Ref	-2.15	---	---
<30	S	---	-22.10	---
30-1000	S	---	-22.10	---
4884.00	H	---	-22.10	---
7326.00	H	---	-22.10	---
9768.00	H	---	-22.10	---
12210.00	H	---	-22.10	---
14652.00	H	---	-22.10	---
17094.00	H	---	-22.10	---
19536.00	H	---	-22.10	---
21978.00	H	---	-22.10	---
24420.00	H	---	-22.10	---
25210.00	S	-52.77	-22.10	30.67

Note : "H" : denotes Harmonic Frequency. "S" : denotes Spurious Frequency.
"---" : denotes Noise Floor.

Note2: Limit = Ref (the highest emission of the fundamental) – 20dBm

Fundamental Frequency :2480 MHz Engineer :Tin
Operation Mode :TX High

Freq. (MHz)	Note F/H/E/S	Reading dBm	Limit dBm	Safe Margin dB
2480.00	Ref	-3.52	---	---
<30	S	---	-23.50	---
30-1000	S	---	-23.50	---
4960.00	H	---	-23.50	---
7440.00	H	---	-23.50	---
9920.00	H	---	-23.50	---
12400.00	H	---	-23.50	---
14880.00	H	---	-23.50	---
17360.00	H	---	-23.50	---
19840.00	H	---	-23.50	---
22320.00	H	---	-23.50	---
24800.00	H	---	-23.50	---
25480.00	S	-52.3	-23.50	28.80

Note : "H" : denotes Harmonic Frequency. "S" : denotes Spurious Frequency.
"---" : denotes Noise Floor.
Note2: Limit = Ref (the highest emission of the fundamental) – 20dBm

Radiated Spurious Emission Measurement Result (BT4.0 mode)

For measurement plot of radiation, please refer to Appendix I.

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
32.91	S	Peak	50.76	-13.88	36.88	40.00	-3.12
162.89	S	Peak	38.84	-12.51	26.33	43.50	-17.17
392.78	S	Peak	30.21	-9.23	20.98	46.00	-25.02
559.62	S	Peak	27.73	-6.54	21.19	46.00	-24.81
754.59	S	Peak	27.64	-2.49	25.15	46.00	-20.85
935.98	S	Peak	28.10	0.06	28.16	46.00	-17.84
4804.00	H	Average	24.92	6.75	31.67	54.00	-22.33
4804.00	H	Peak	38.44	6.75	45.19	74.00	-28.81
7206.00	H	---					
9608.00	H	---					
12010.00	H	---					
14412.00	H	---					
16814.00	H	---					
19216.00	H	---					
21618.00	H	---					
24020.00	H	---					

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
32.91	S	Peak	38.28	-13.88	24.40	40.00	-15.60
242.43	S	Peak	29.49	-13.20	16.29	46.00	-29.71
441.28	S	Peak	28.00	-8.58	19.42	46.00	-26.58
551.86	S	Peak	28.75	-7.05	21.70	46.00	-24.30
730.34	S	Peak	28.79	-3.62	25.17	46.00	-20.83
941.80	S	Peak	27.56	0.16	27.72	46.00	-18.28
4804.00	H	Average	24.92	6.75	31.67	54.00	-22.33
4804.00	H	Peak	37.50	6.75	44.25	74.00	-29.75
7206.00	H	---					
9608.00	H	---					
12010.00	H	---					
14412.00	H	---					
16814.00	H	---					
19216.00	H	---					
21618.00	H	---					
24020.00	H	---					

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2442 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
32.91	S	Peak	50.99	-13.88	37.11	40.00	-2.89
158.04	S	Peak	38.78	-12.40	26.38	43.50	-17.12
390.84	S	Peak	32.61	-9.28	23.33	46.00	-22.67
553.80	S	Peak	29.54	-6.92	22.62	46.00	-23.38
760.41	S	Peak	27.45	-2.52	24.93	46.00	-21.07
950.53	S	Peak	28.15	0.28	28.43	46.00	-17.57
4884.00	H	Average	24.57	6.94	31.51	54.00	-22.49
4884.00	H	Peak	37.45	6.94	44.39	74.00	-29.61
7326.00	H	---					
9768.00	H	---					
12210.00	H	---					
14652.00	H	---					
17094.00	H	---					
19536.00	H	---					
21978.00	H	---					
24420.00	H	---					

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2442 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
31.94	S	Peak	38.05	-13.88	24.17	40.00	-15.83
236.61	S	Peak	30.33	-13.50	16.83	46.00	-29.17
447.10	S	Peak	28.29	-8.34	19.95	46.00	-26.05
515.97	S	Peak	28.78	-7.31	21.47	46.00	-24.53
753.62	S	Peak	27.50	-2.49	25.01	46.00	-20.99
949.56	S	Peak	27.69	0.27	27.96	46.00	-18.04
4884.00	H	Average	24.45	6.94	31.39	54.00	-22.61
4884.00	H	Peak	37.91	6.94	44.85	74.00	-29.15
7326.00	H	---					
9768.00	H	---					
12210.00	H	---					
14652.00	H	---					
17094.00	H	---					
19536.00	H	---					
21978.00	H	---					
24420.00	H	---					

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
32.91	S	Peak	51.07	-13.88	37.19	40.00	-2.81
222.06	S	Peak	38.77	-14.27	24.50	46.00	-21.50
385.02	S	Peak	31.50	-9.37	22.13	46.00	-23.87
559.62	S	Peak	28.95	-6.54	22.41	46.00	-23.59
748.77	S	Peak	27.94	-2.54	25.40	46.00	-20.60
954.41	S	Peak	27.41	0.31	27.72	46.00	-18.28
4960.00	H	Average	24.04	7.08	31.12	54.00	-22.88
4960.00	H	Peak	37.37	7.08	44.45	74.00	-29.55
7440.00	H	---					
9920.00	H	---					
12400.00	H	---					
14880.00	H	---					
17360.00	H	---					
19840.00	H	---					
22320.00	H	---					
24800.00	H	---					

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

Actual FS(dBμV / m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV / m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBμV	dB	dBμV / m	dBμV / m	dB
31.94	S	Peak	38.36	-13.88	24.48	40.00	-15.52
242.43	S	Peak	28.66	-13.20	15.46	46.00	-30.54
448.07	S	Peak	27.95	-8.30	19.65	46.00	-26.35
559.62	S	Peak	28.89	-6.54	22.35	46.00	-23.65
748.77	S	Peak	27.34	-2.54	24.80	46.00	-21.20
949.56	S	Peak	27.97	0.27	28.24	46.00	-17.76
4960.00	H	Average	24.03	7.08	31.11	54.00	-22.89
4960.00	H	Peak	37.05	7.08	44.13	74.00	-29.87
7440.00	H	---					
9920.00	H	---					
12400.00	H	---					
14880.00	H	---					
17360.00	H	---					
19840.00	H	---					
22320.00	H	---					
24800.00	H	---					

11 PEAK POWER SPECTRAL DENSITY

11.1 Standard Applicable:

According to §15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

11.2 Measurement Equipment Used:

Refer to section 7.2 for details.

11.3 Test Set-up:

Refer to section 8.3 for details.

11.4 Measurement Procedure: (following the measurement procedure 10.2 of KDB558074):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW ≥ 3 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.5 Measurement Result:

BT4.0 mode

Frequency MHz	RF Power Density Reading (dBm)	Maximum Limit (dBm)	Result
2402	-19.03	8	PASS
2442	-16.69	8	PASS
2480	-18.08	8	PASS

NOTE: cable loss as 0.93dB that offsets in the spectrum

Note: Refer to next page for plots.

BT4.0 mode

Power Spectral Density Test Plot (CH-Low)

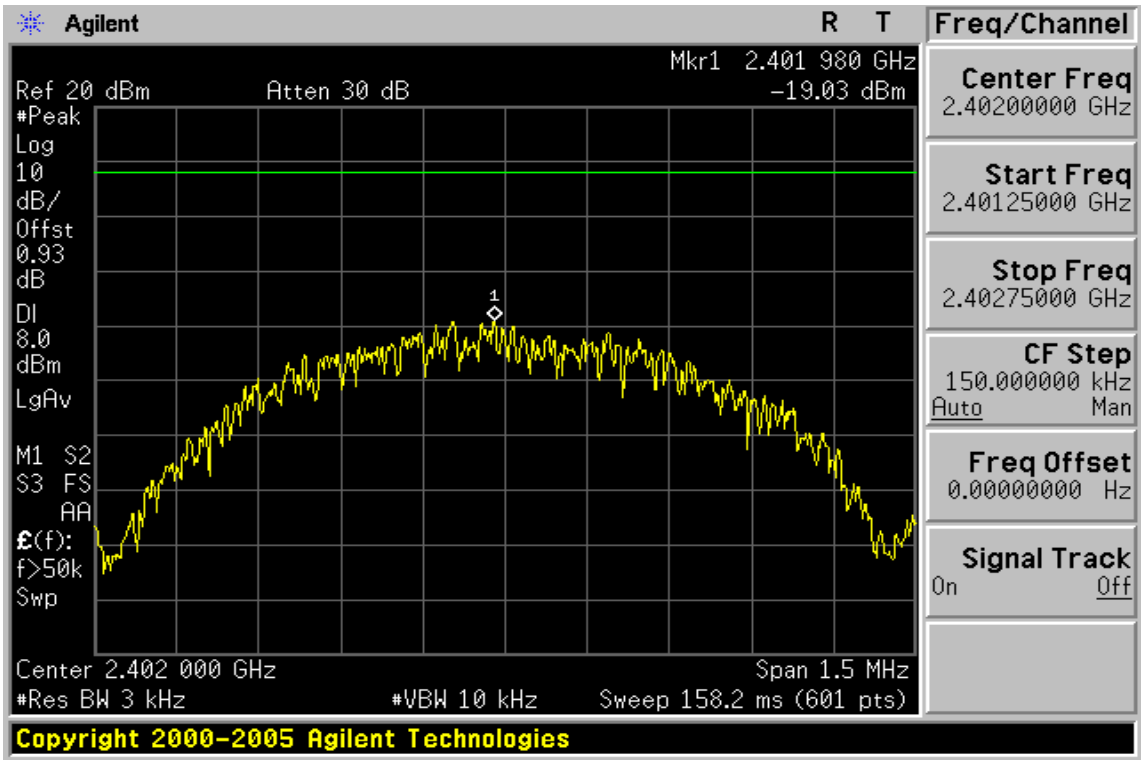

Power Spectral Density Test Plot (CH-Mid)

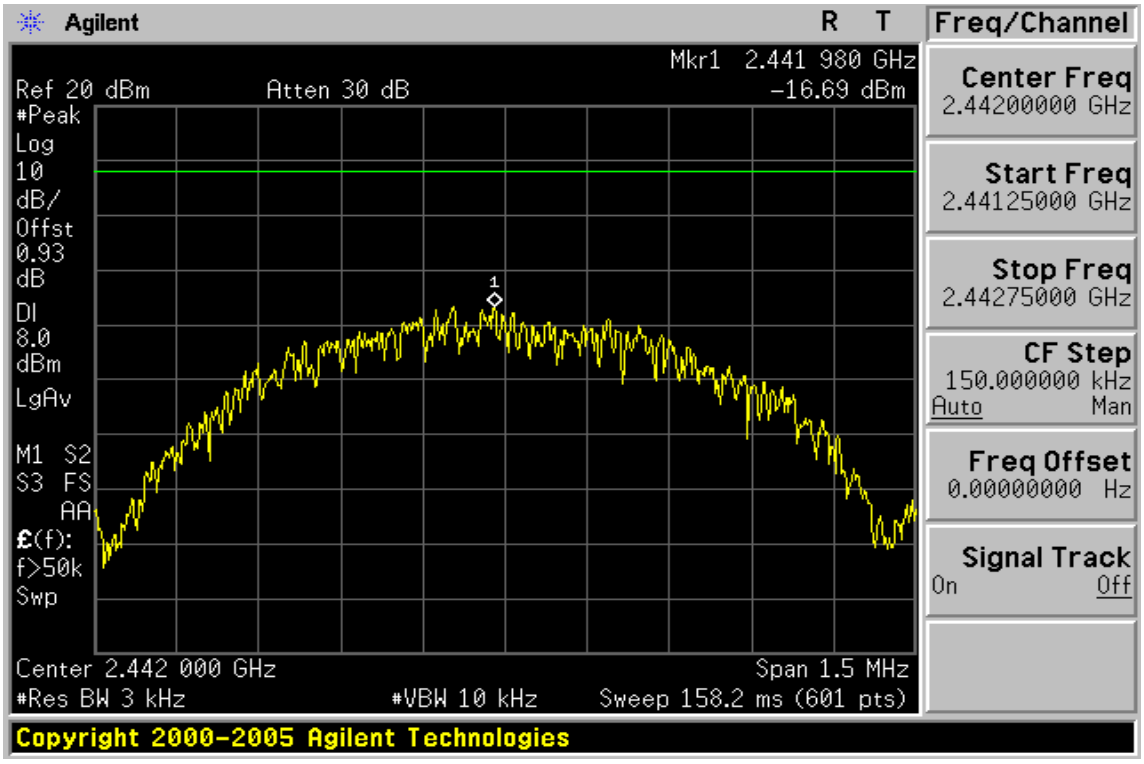

Power Spectral Density Test Plot (CH-High)

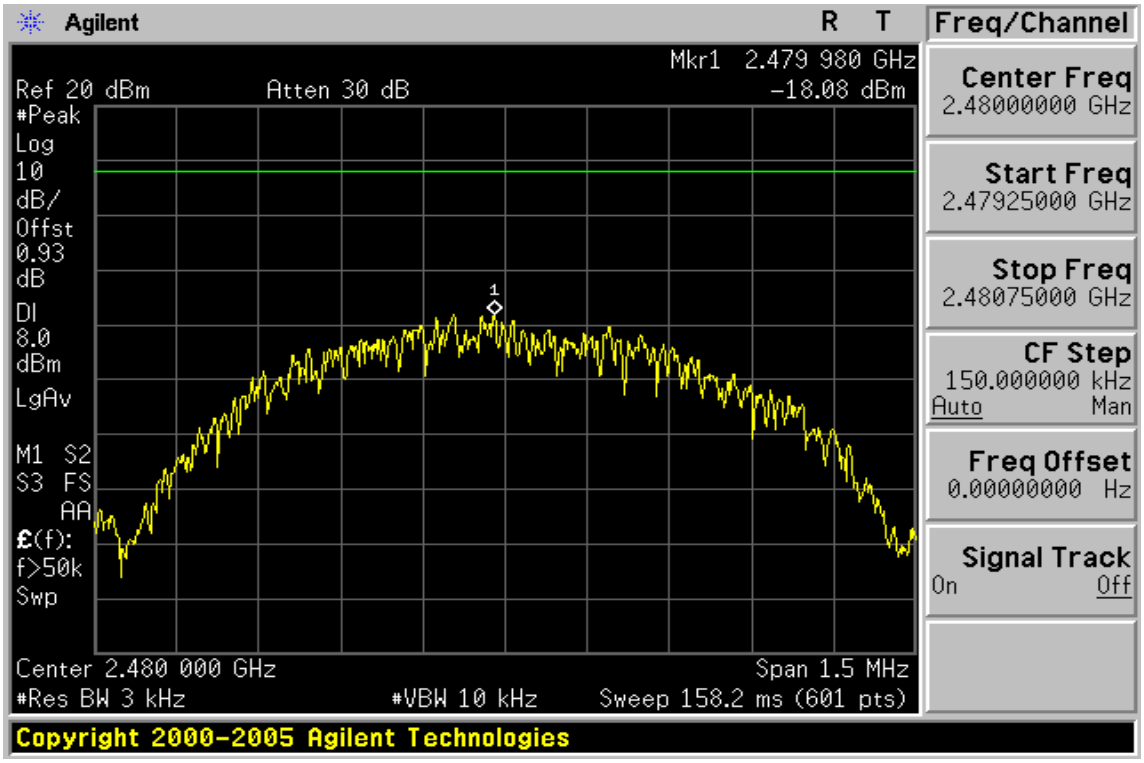

12 ANTENNA REQUIREMENT

12.1 Standard Applicable:

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

12.2 Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2.52dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

APPENDIX 1

MEASUREMENT PLOT OF RADIATED SPURIOUS EMISSION

Band Edges Radiated Emission:

Note: The emission that surpasses the limit of peak represents the fundamental emission of the operation that does not account to be conformed to the limit of the interest.

BT4.0 mode

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

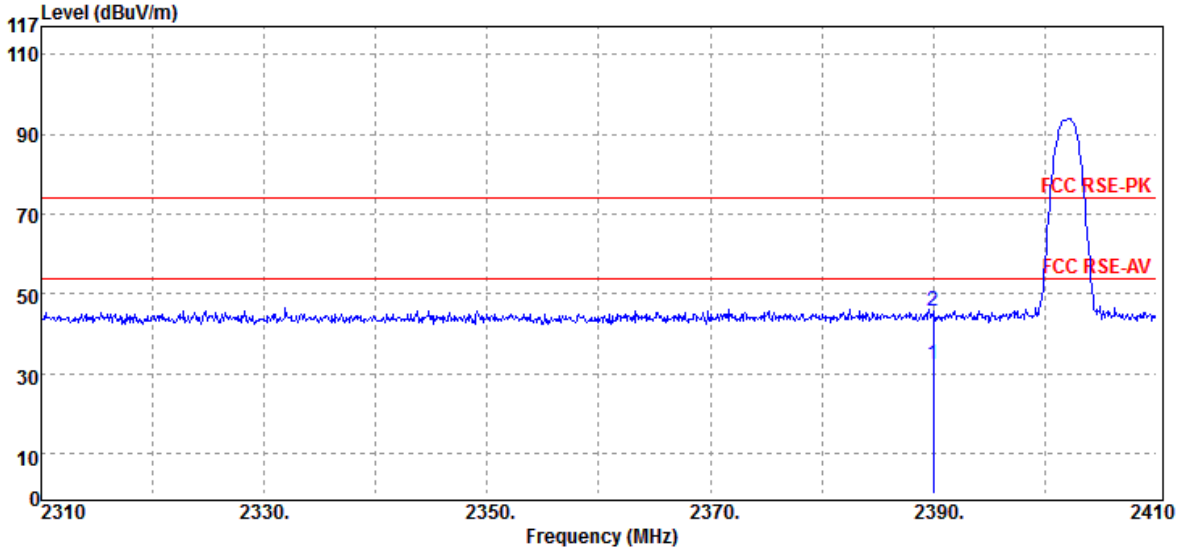

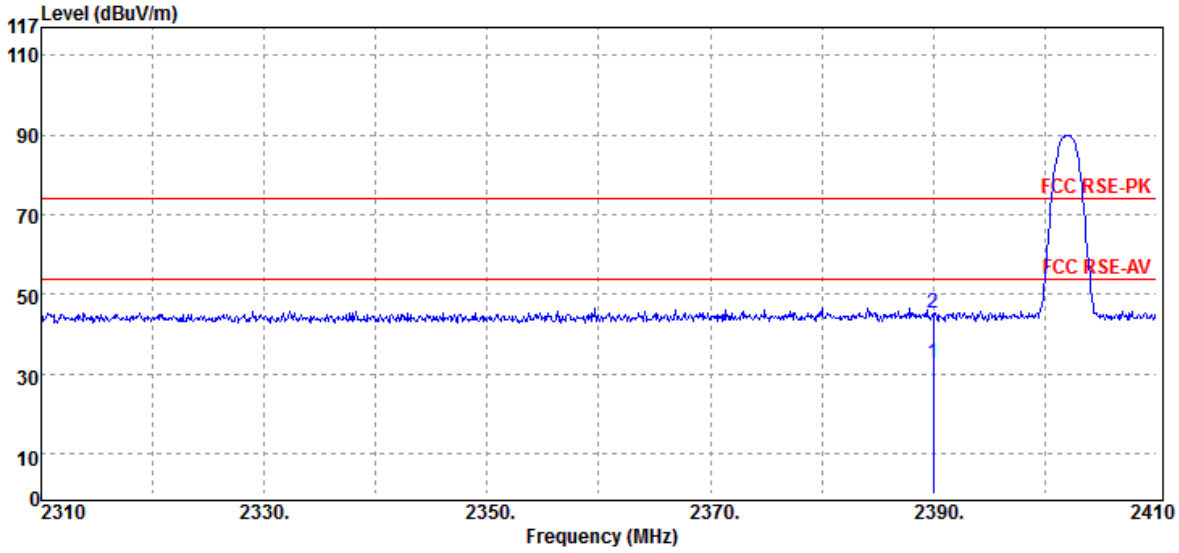

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:Band Edge HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

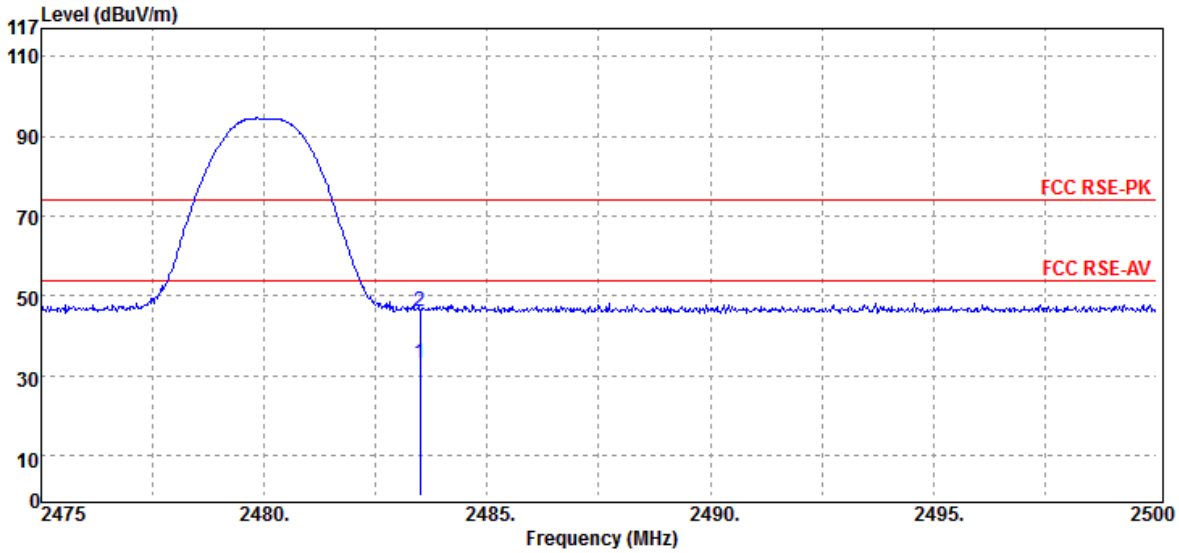

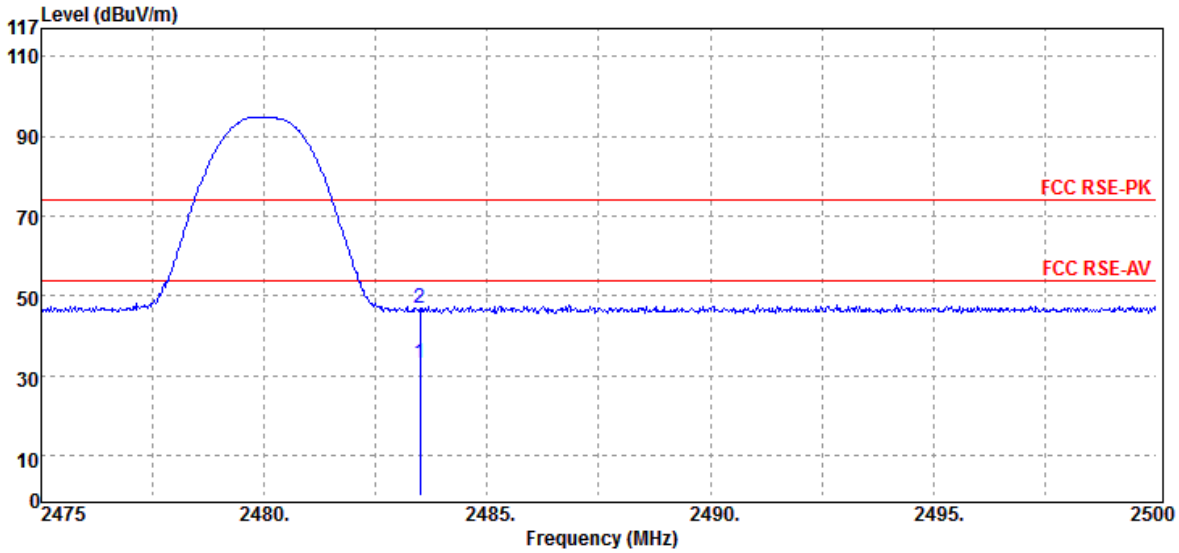

Radiated Spurious Emission Measurement photos Result (below 1GHz)

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

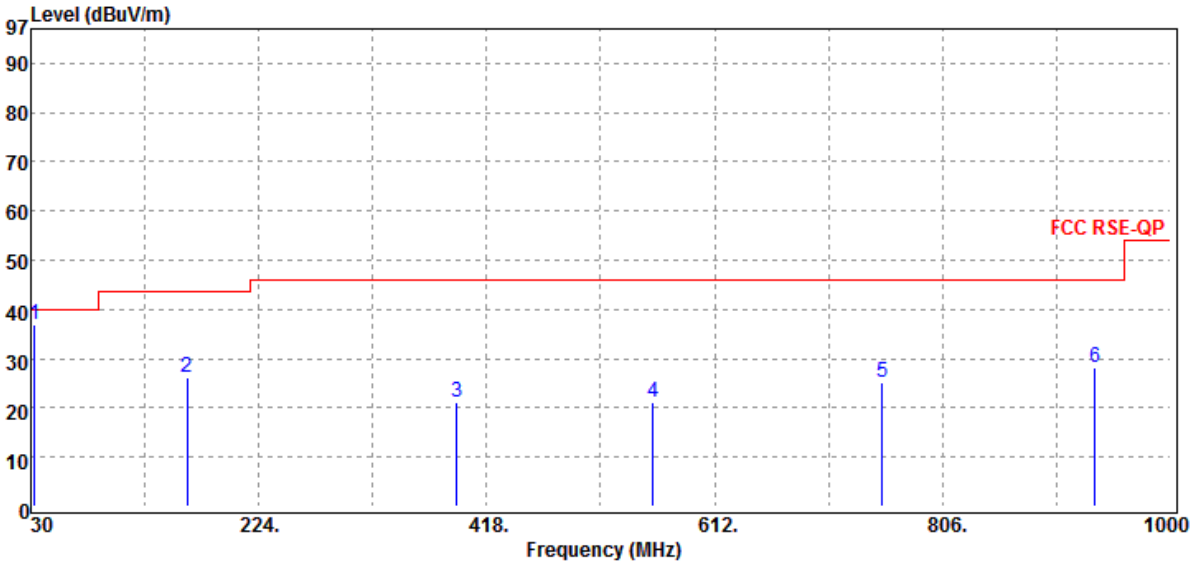

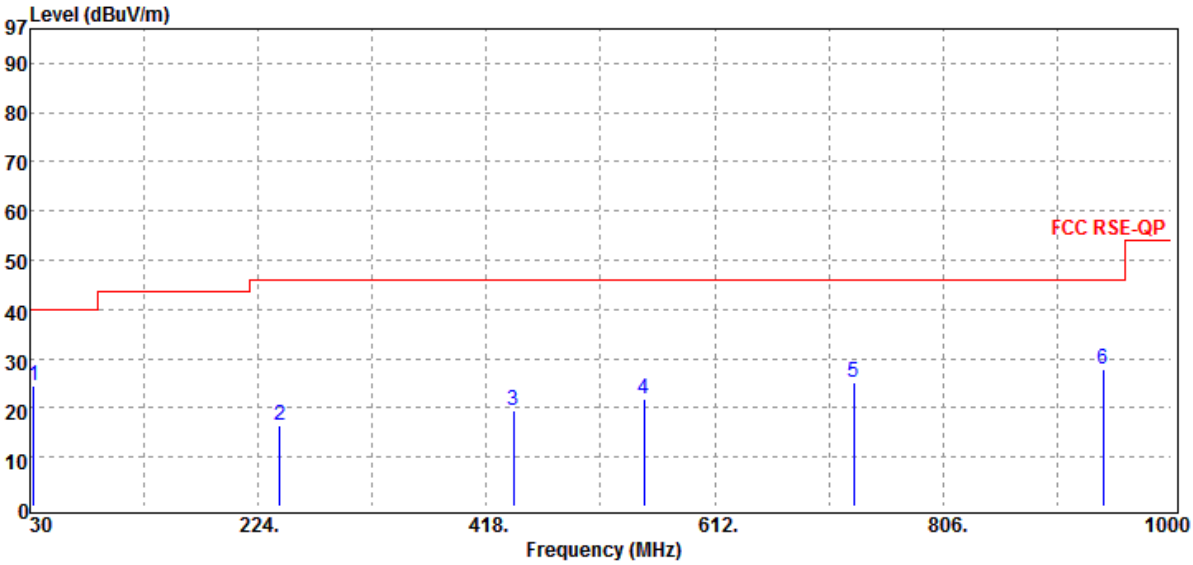

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2442 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

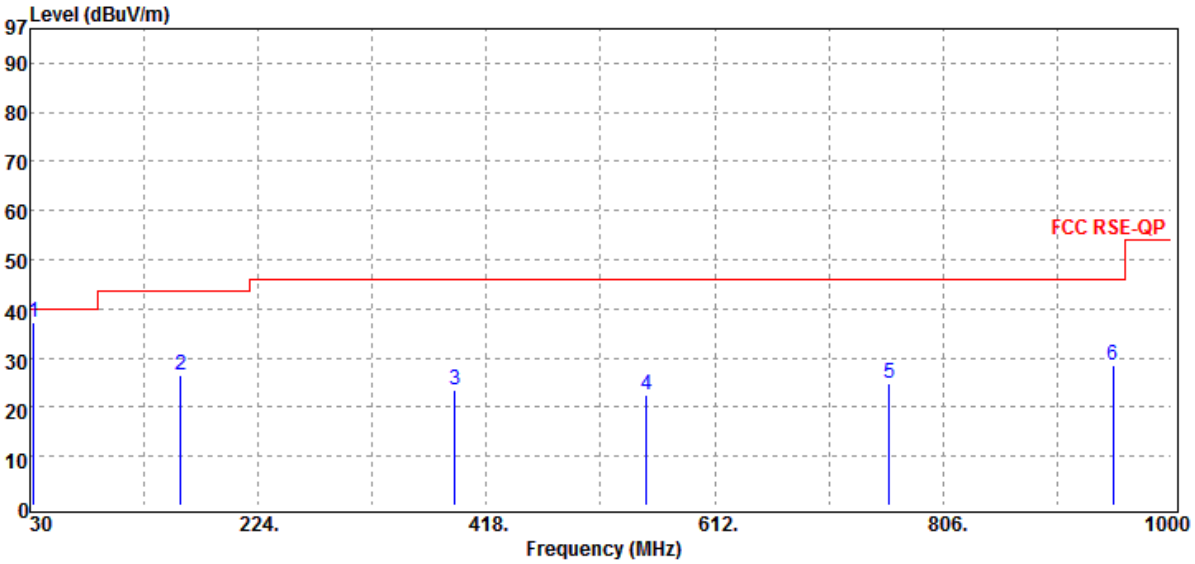

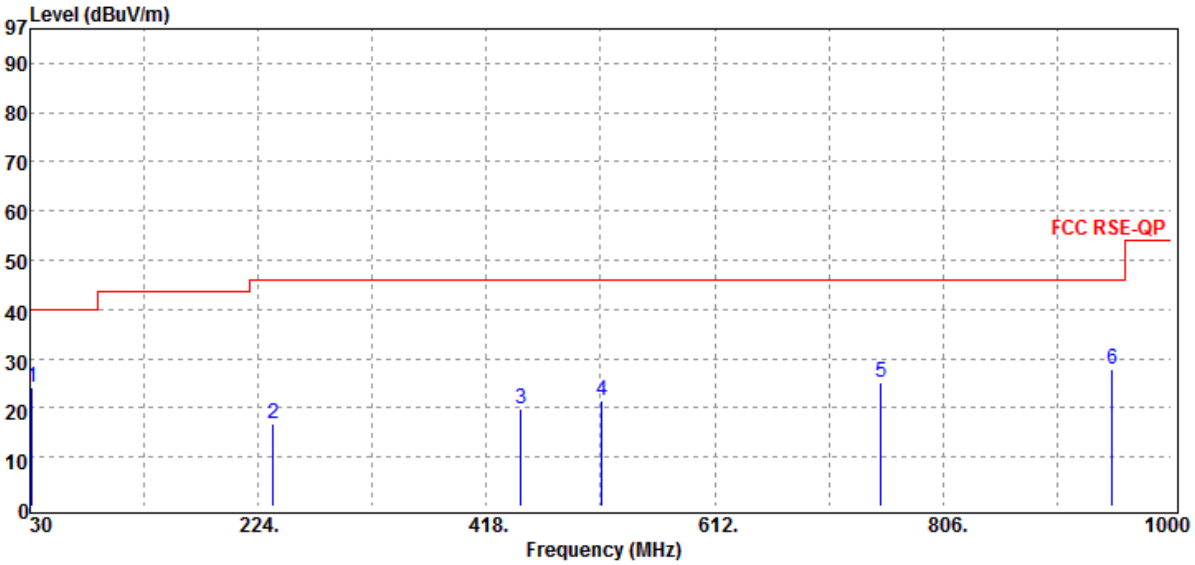

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

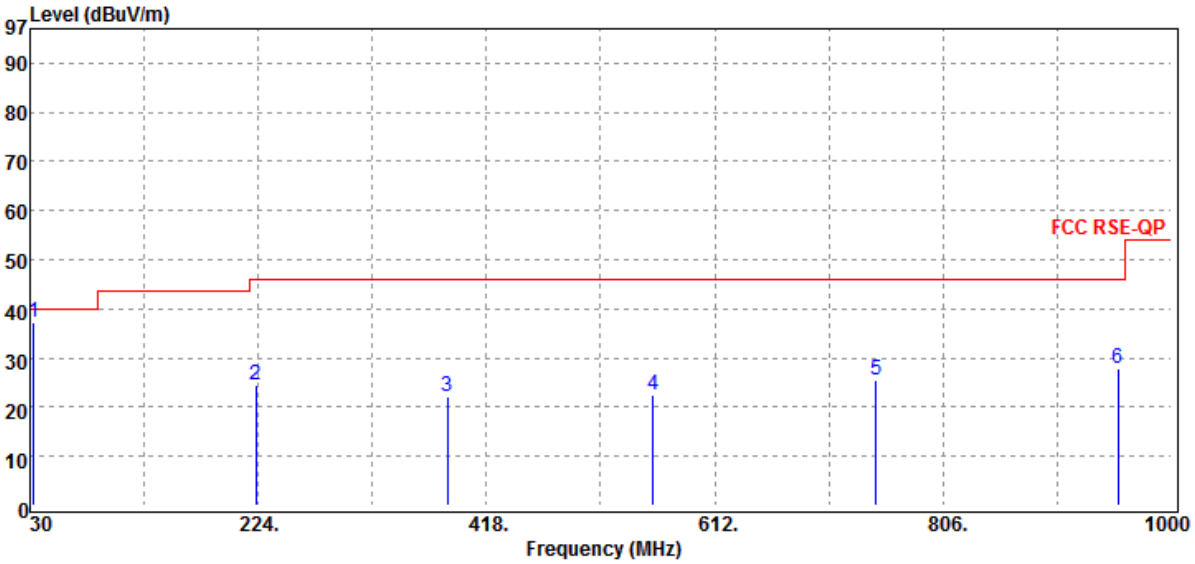

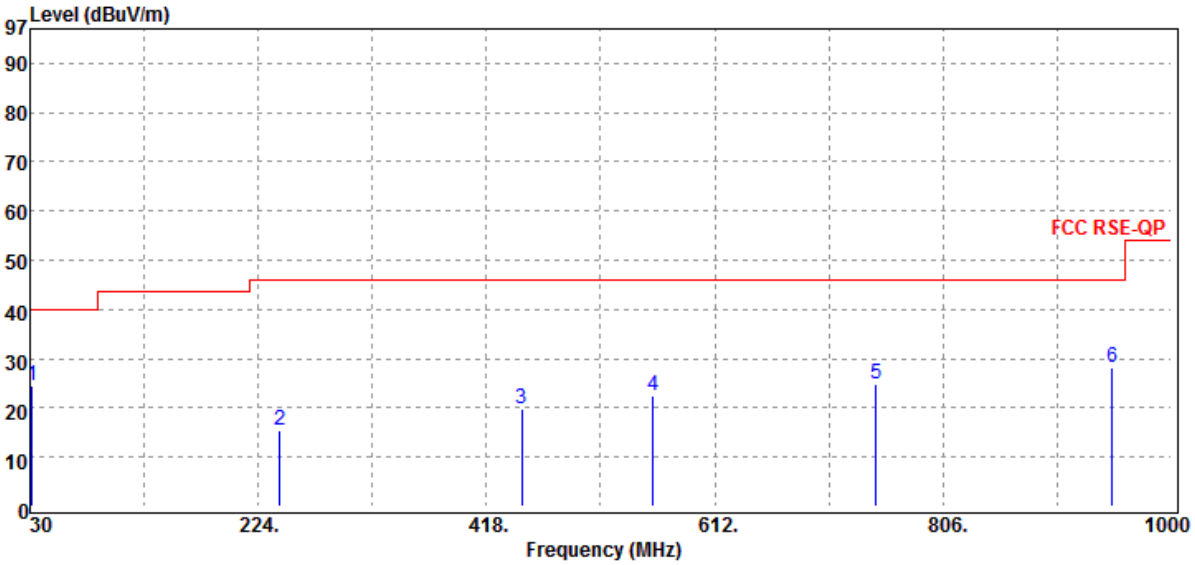

Radiated Spurious Emission Measurement photos Result (above 1GHz)

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX LOW	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

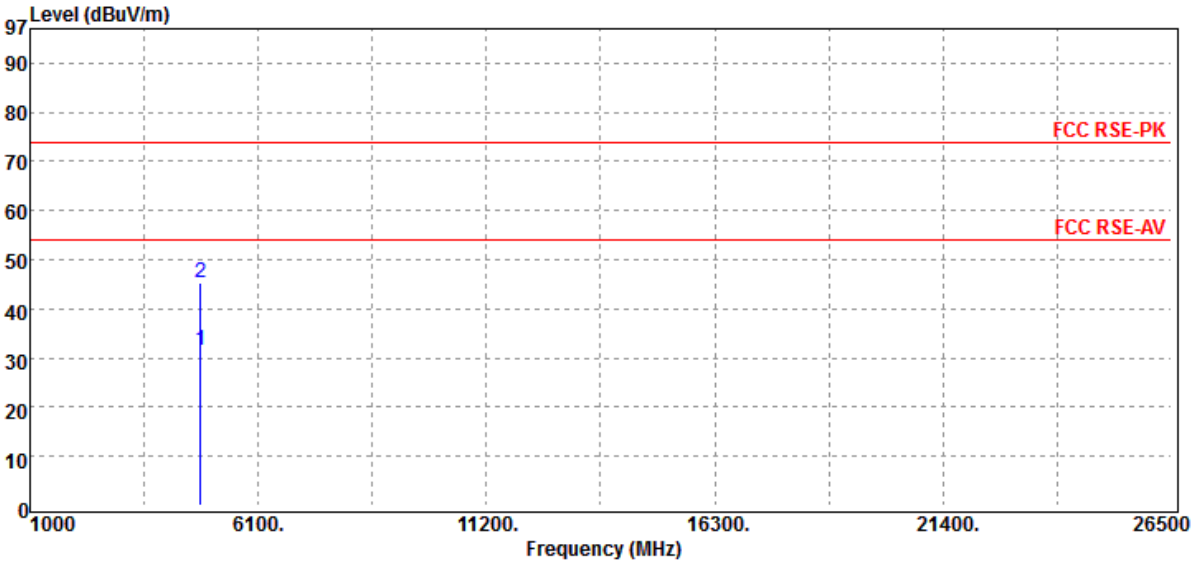

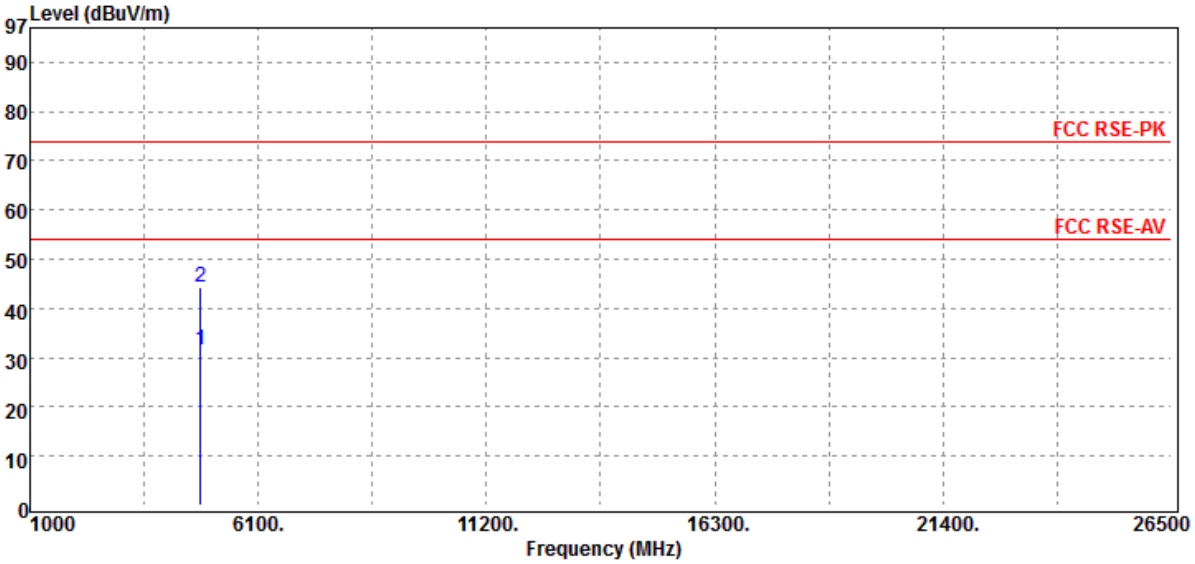

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2442 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX MID	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.

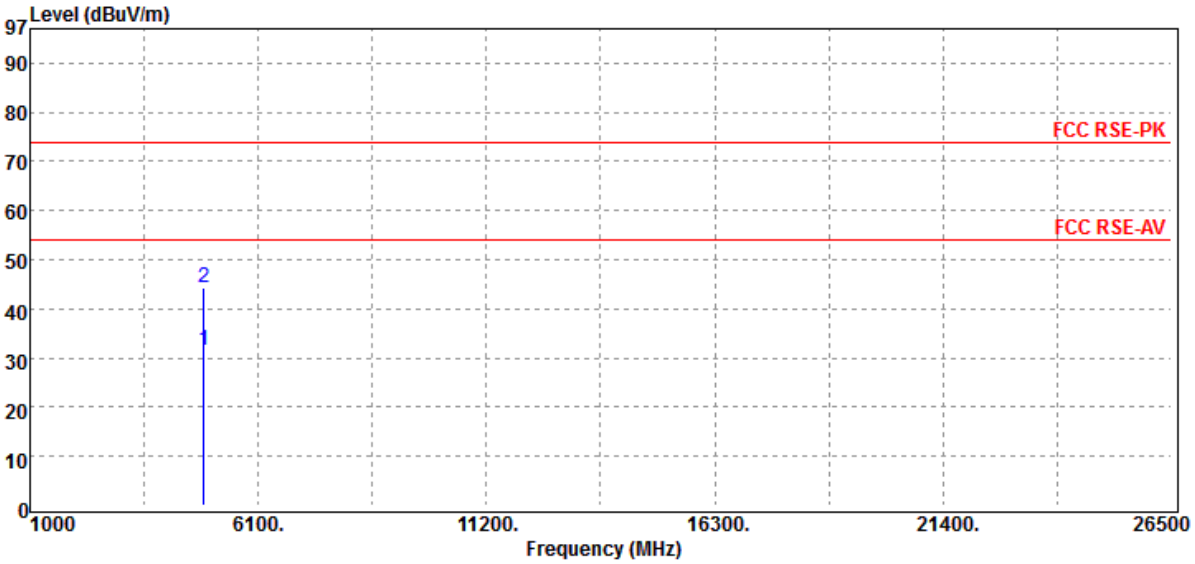

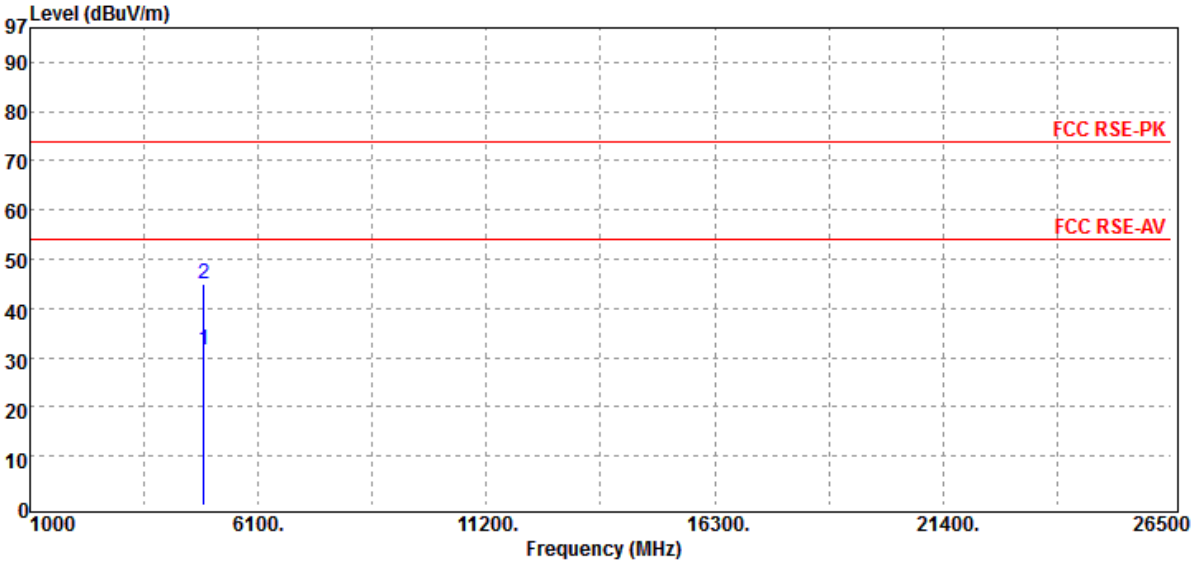

Operation Band	:BT4.0	Test Date	:2014-11-07
Fundamental Frequency	:2480 MHz	Temp./Humi.	:23 deg_C / 58 RH
Operation Mode	:TX HIGH	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:Ver. / Hor.