

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

|                                   | OF   |  |  |
|-----------------------------------|--|--|--|
| Product Name:                     | PDA Phone  |  |  |
| Brand Name:                       | Sony   |  |  |
| Type No.:                         | PM-0872-BV   |  |  |
| Model Difference:                 | N/A  |  |  |
| FCC ID:                           | PY7-PM0872   |  |  |
| Report No.:                       | ER/2015/40160  |  |  |
| Issue Date:                       | Jun. 05, 2015  |  |  |
| FCC Rule Part:                    | §15.225  |  |  |
| Prepared for:                     | Sony Mobile Communications AB<br>Nya Vattentornet 22188 Lund/ Sweden   |  |  |
| Prepared by:                      | SGS Taiwan Ltd.<br>Electronics & Communication Laboratory<br>No.134, Wu Kung Road, New Taipei Industrial Park, Wuku<br>District, New Taipei City, Taiwan 24803   |  |  |
| TAF<br>Testing Laboratory<br>0513 | <b>Note:</b> This report shall not be reproduced except in full, without<br>the written approval of SGS Taiwan Ltd. This document may be<br>altered or revised by SGS Taiwan Ltd. personnel only, and shall<br>be noted in the revision section of the document. |  |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# VERIFICATION OF COMPLIANCE

| Applicant:Sony Mobile CommunicationsNya Vattentornet 22188 Lund/S |                               |
|---|-------------------------------|
| Product Name:   | PDA Phone                     |
| Brand Name:   | Sony                          |
| Type No.:   | PM-0872-BV                    |
| Model Difference:   | N/A                           |
| FCC ID:   | PY7-PM0872                    |
| File Number:  | ER/2015/40160                 |
| Date of test:   | Apr. 22, 2015 ~ Jun. 05, 2015 |
| Date of EUT Received:   | Apr. 22, 2015                 |

# We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

| Test By:     | Marcus Tseng                       | Date: | Jun. 05, 2015 |
|--------------|------------------------------------|-------|---------------|
|              | Marcus Tseng / Engineer            |       |               |
| Prepared By: | Allen Isai                         | Date: | Jun. 05, 2015 |
| Approved By  | Allen Tsai / Engineer<br>Jim Chang | Date: | Jun. 05, 2015 |
|              | Jim Chang / Asst. Manager          |       |               |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Revision History**

| Report Number | Revision | Description                  | Issue Date    |
|---------------|----------|------------------------------|---------------|
| ER/2015/40160 | Rev.00   | Initial creation of document | Jun. 05, 2015 |
|               |          |                              |               |
|               |          |                              |               |
|               |          |                              |               |



# **Table of Contents**

| 1 | G   | GENERAL INFORMATION  | 6  |
|---|-----|--|----|
|   | 1.1 | PRODUCT DESCRIPTION  | 6  |
|   | 1.2 | PRODUCT FEATURE OF EQUIPMENT UNDER TEST                      | 7  |
|   | 1.3 | TEST METHODOLOGY OF APPLIED STANDARDS                        | 8  |
|   | 1.4 | TEST FACILITY  | 8  |
|   | 1.5 | SPECIAL ACCESSORIES  | 8  |
|   | 1.6 | EQUIPMENT MODIFICATIONS                                      | 8  |
| 2 | S   | YSTEM TEST CONFIGURATION                                     | 9  |
|   | 2.1 | EUT CONFIGURATION  | 9  |
|   | 2.2 | EUT Exercise   | 9  |
|   | 2.3 | TEST PROCEDURE   | 9  |
|   | 2.4 | MEASUREMENT RESULTS EXPLANATION EXAMPLE                      | 9  |
|   | 2.5 | CONFIGURATION OF TESTED SYSTEM                               | 10 |
| 3 | S   | UMMARY OF TEST RESULTS                                       | 10 |
| 4 | D   | DESCRIPTION OF TEST MODES                                    | 11 |
|   | 4.1 | THE WORST TEST MODES AND CHANNEL DETAILS                     | 11 |
| 5 | Ν   | IEASUREMENT UNCERTAINTY                                      | 12 |
| 6 | C   | CONDUCTED EMISSION TEST                                      |    |
| U | 6.1 | STANDARD APPLICABLE:   |    |
|   | 6.2 | MEASUREMENT EQUIPMENT USED:                                  |    |
|   | 6.3 | EUT SETUP:   |    |
|   | 6.4 | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)                 |    |
|   | 6.5 | MEASUREMENT PROCEDURE:                                       |    |
|   | 6.6 | MEASUREMENT RESULT:  |    |
| 7 |     | RADIATED TEST ITEMS  |    |
|   | 7.1 | MEASUREMENT PROCEDURE  |    |
|   | 7.2 | TEST SET-UP  |    |
|   | 7.3 | Measurement Equipment Used                                   |    |
|   | 7.4 | FIELD STRENGTH CALCULATION                                   |    |
|   | 7.5 | FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT | 23 |
|   | 7.6 | RADIATED EMISSION MEASUREMENT                                |    |
| 8 | F   | REQUENCY STABILITY   |    |
|   | 8.1 | STANDARD APPLICABLE  |    |
|   | 8.2 | MEASUREMENT PROCEDURE  |    |
|   | 8.3 | TEST SET-UP  |    |
|   |     |  |    |



| 8.4   | Measurement Equipment Used        |  |
|-------|-----------------------------------|--|
| 8.5   | MEASUREMENT RESULTS               |  |
| 9 20  | DB OCCUPIED BANDWIDTH MEASUREMENT |  |
| 9.1   | STANDARD APPLICABLE:              |  |
| 9.2   | LIMIT:                            |  |
| 9.3   | TEST SET-UP                       |  |
| 9.4   | Measurement Procedure             |  |
| 9.5   | Measurement Equipment Used        |  |
| 9.6   | 20dB Bandwidth Measurement Result |  |
| 10 AN | TENNA REQUIREMENT                 |  |
| 10.1. | STANDARD APPLICABLE               |  |
| 10.2. | ANTENNA CONNECTED CONSTRUCTION    |  |



#### **GENERAL INFORMATION** 1

#### 1.1 **Product Description**

### General:

| Product Name:                  | PDA Phone   |   |  |
|--------------------------------|---|---|--|
| Brand Name:                    | Sony  |   |  |
| Type No.:                      | PM-0872-BV  |   |  |
| Model Difference:              | N/A   |   |  |
| Data Cable (USB):              |   | : EC450, Supplier: K-one<br>1242-6715.3, Length: 100 cm   |  |
| Simple Hands-Free (SHF-White): | Model No.<br>Type No.:  | : MH410c, Supplier: Foster Electric<br>AG-1100  |  |
| Car Charger:                   | Model No.: AN400, Supplier: Salcomp<br>Type No.: CAA-0003013  |   |  |
| BT PHF:                        | Model No.: MW600, Supplier: BALDA<br>Type No.: DDA-0002029.Bcoupling with Simple Hands Free<br>(Model No.: MH755, Supplier: BALDA, Type No.: AG-0502) |   |  |
| Product SW/HW version:         | 30.0.A.0.20 / A   |   |  |
| Radio SW/HW version:           | 30.0.A.0.2  | 0 / A   |  |
| Test SW Version:               | N/A   |   |  |
| RF power setting in TEST SW:   | N/A   |   |  |
|                                | 3.8Vdc  |   |  |
|                                | Battery:  | Model No.: AGPB016-A001, Supplier: Sony<br>Type No.: N/A  |  |
| Power Supply:                  | Adapter:  | <ol> <li>M odel No.: EP800, Supplier: Phihong<br/>Type No.: AC-0300-US</li> <li>Model No.: EP800, Supplier: Salcomp<br/>Type No.: AC-0030-US</li> </ol> |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



NFC.

| NIC.                 |                       |
|----------------------|-----------------------|
| Operating Frequency: | 13.56MHz              |
| Transmit Power:      | < 123.90dBuV/m at 3m. |
| Number of Channels:  | 1                     |
| Antenna Type:        | Loop Antenna          |
| Modulation Type:     | ASK, BPSK             |

#### 1.2 **Product Feature of Equipment Under Test**

The equipment under Test (Hereafter Called: EUT) is PDA Phone supporting, GSM / WCDMA / LTE, Wi-Fi 802.11abgn, Bluetooth with NFC features, and below is details of information

| Product Feature                              |                                       |  |  |
|--|---------------------------------------|--|--|
| Product Name:                                | PDA Phone                             |  |  |
| Brand Name:                                  | Sony                                  |  |  |
| Type No.:                                    | PM-0872-BV                            |  |  |
| Model Difference:                            | N/A                                   |  |  |
| FCC ID                                       | PY7-PM0872                            |  |  |
| GSM Operating Band(s)                        | GSM 850/900/1800/1900MHz              |  |  |
| GPRS / EGPRS Multi Slot Class                | Class 12                              |  |  |
| WCDMA Operating Band(s) FDD Band II / IV / V |                                       |  |  |
| WCDMA Rel. Version                           | Release 8                             |  |  |
| LTE Operating Band(s)                        | FCC Band 2 / 4 / 5 / 7 / 12 / 13 / 17 |  |  |
| LTE Rel. Version                             | Release 9 / Category 4                |  |  |
| Wi-Fi Specification                          | 802.11a/b/g/n                         |  |  |
| Bluetooth Version                            | V4.0 dual mode + HS                   |  |  |
| NFC Specification                            | NFC                                   |  |  |

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 1.3 **Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.225

ANSI C63.10:2009

All test items have been performed and record as per the above standards.

The composite system (digital device) is compliance with FCC Subpart B is authorized under the certification procedure.

#### **Test Facility** 1.4

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 990257 (Wugu)

Canada Registration Number: 4620A-5.

#### 1.5 **Special Accessories**

There is no special accessory used while test was conducted.

#### 1.6 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### SYSTEM TEST CONFIGURATION 2

#### 2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 **Test Procedure**

### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz., The CISPR Quasi-Peak and Average detector mode is employed according to §15.107. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### 2.4 **Measurement Results Explanation Example**

### For all conducted test items:


The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 2.5 **Configuration of Tested System**

## Fig. 2-1 Radiated Emission



# Fig. 2-2 AC Power Line Conducted Emission



### **Table 2-1 Equipment Used in Tested System**

| Item | Equipment         | Mfr/Brand | Model/Type No. | Series No. | Data Cable | Power Cord |
|------|-------------------|-----------|----------------|------------|------------|------------|
| 1.   | NFC Test Software | N/A       | N/A            | N/A        | N/A        | N/A        |

#### 3 SUMMARY OF TEST RESULTS

| FCC Rules       | Description Of Test       | Result    |
|-----------------|---------------------------|-----------|
| §15.207         | AC Power Line Conducted   | Constitut |
| §15.207         | Emission                  | Compliant |
| §15.225 (a)-(d) | Radiated Emission         | Compliant |
| 815 200         | Radiated Emission Limits, |           |
| §15.209         | general requirement       | Compliant |
| §15.225 (e)     | Frequency Stability       | Compliant |
| §2.1049         |                           |           |
| §15.215 (c)     | 20 dB Bandwidth           | Compliant |
| §15.203         | Antenna Requirement       | Compliant |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **DESCRIPTION OF TEST MODES** 4

#### The Worst Test Modes and Channel Details 4.1

- 1. The EUT stay in continuous transmitting mode.
- 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

|  |  | <u> </u>          | Č.         |  |  |  |
|--|--|-------------------|------------|--|--|--|
| <b>RADIATED EMISSION TEST</b>                    |  |                   |            |  |  |  |
| MODE   | MODE AVAILABLE TESTED<br>CHANNEL CHANNEL |                   |            |  |  |  |
| NFC  | 1  | 1                 | ASK        |  |  |  |
|  | FREQUENCY STABILITY                      |                   |            |  |  |  |
| MODE   | AVAILABLE<br>CHANNEL                     | TESTED<br>CHANNEL | MODULATION |  |  |  |
| NFC  | 1  | 1                 | ASK        |  |  |  |
| 20dB BANDWIDTH                                   |  |                   |            |  |  |  |
| MODE AVAILABLE TESTED<br>CHANNEL CHANNEL MODULAT |  |                   |            |  |  |  |
| NFC  | 1  | 1                 | ASK        |  |  |  |

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for NFC Transmitter for channel the worst case H position was reported.

### Note:

Type no, PM-0872-BV, and Type no PM-0873-BV share the equivalently identical enclosure, material of coating, I/O function, PCB board, display, and power source. In addition, PM-0872-BV, and Type no. PM-0873-BV implement the same NFC chipset/module with the same antenna that operates with the same transmitted power level. Hence, this given test report contains the identical test results that inherent from PM-0873-BV.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **MEASUREMENT UNCERTAINTY** 5

| Test Items                       | Uncertainty                 |  |  |  |
|----------------------------------|-----------------------------|--|--|--|
| AC Power Line Conducted Emission | +/- 2.586 dB                |  |  |  |
| Frequency Stability              | +/- 51.33 Hz                |  |  |  |
| 20 dB OCCUPIED BANDWIDTH         | +/- 51.33 Hz                |  |  |  |
| Temperature                      | +/- 0.65 °C                 |  |  |  |
| Humidity                         | +/- 4.6 %                   |  |  |  |
| DC / AC Power Source             | DC= +/- 0.13%, AC= +/- 0.2% |  |  |  |

Radiated Spurious Emission:

|                                   | 30MHz - 180MHz: +/- 3.37dB |
|-----------------------------------|----------------------------|
| Measurement uncertainty           | 180MHz -417MHz: +/- 3.19dB |
| (Polarization : <b>Vertical</b> ) | 0.417GHz-1GHz: +/- 3.19dB  |

|                                     | 30MHz - 167MHz: +/- 4.22dB |  |  |
|-------------------------------------|----------------------------|--|--|
| Measurement uncertainty             | 167MHz -500MHz: +/- 3.44dB |  |  |
| (Polarization : <b>Horizontal</b> ) | 0.5GHz-1GHz: +/- 3.39dB    |  |  |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

binds of the mark of the stated and the state of the st electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **CONDUCTED EMISSION TEST** 6

#### 6.1 **Standard Applicable:**

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

| Frequency range  | Limits<br>dB(uV) |          |  |  |  |  |  |  |
|--|------------------|----------|--|--|--|--|--|--|
| MHz  | Quasi-peak       | Average  |  |  |  |  |  |  |
| 0.15 to 0.50   | 66 to 56         | 56 to 46 |  |  |  |  |  |  |
| 0.50 to 5  | 56               | 46       |  |  |  |  |  |  |
| 5 to 30  | 60               | 50       |  |  |  |  |  |  |
| Note   |                  |          |  |  |  |  |  |  |
| 1. The lower limit shall apply at the transition frequencies |                  |          |  |  |  |  |  |  |

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 6.2 **Measurement Equipment Used:**

| Conducted Emission Test Site |             |                   |          |            |            |  |  |  |  |
|------------------------------|-------------|-------------------|----------|------------|------------|--|--|--|--|
| EQUIPMENT                    | MFR         | MODEL             | SERIAL   | LAST       | CAL DUE.   |  |  |  |  |
| ТҮРЕ                         |             | NUMBER            | NUMBER   | CAL.       |            |  |  |  |  |
| EMI Test Receiver            | R&S         | ESCI 3            | 101311   | 06/20/2014 | 06/19/2015 |  |  |  |  |
| LISN                         | Schwarzbeck | NSLK 8127         | 8127-648 | 06/10/2014 | 06/09/2015 |  |  |  |  |
| LISN                         | Rolf-Heine  | NNB-2/16Z         | 99012    | 03/04/2015 | 03/03/2016 |  |  |  |  |
| Coaxial Cables               | N/A         | N30N30-1042-150cm | N/A      | 01/06/2015 | 01/07/2016 |  |  |  |  |

#### 6.3 **EUT Setup:**


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### **Test SET-UP (Block Diagram of Configuration)** 6.4

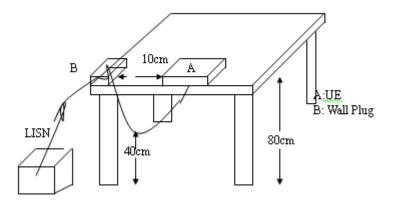

#### 6.5 **Measurement Procedure:**

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

#### **Measurement Result:** 6.6


Note: Refer to next page for measurement data and plots. Note2: The \* reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# AC POWER LINE CONDUCTED EMISSION TEST DATA

| Operation Mode: | Operation mode    |                  |      | Test Date: | May 28, 2015 |
|-----------------|-------------------|------------------|------|------------|--------------|
| Temperature:    | 24 °C             | Humidity:        | 66 % | Test By:   | Marcus       |
| Model No.:      | Adapter: EP800, S | upplier: Phihong |      | Phase:     | L1           |

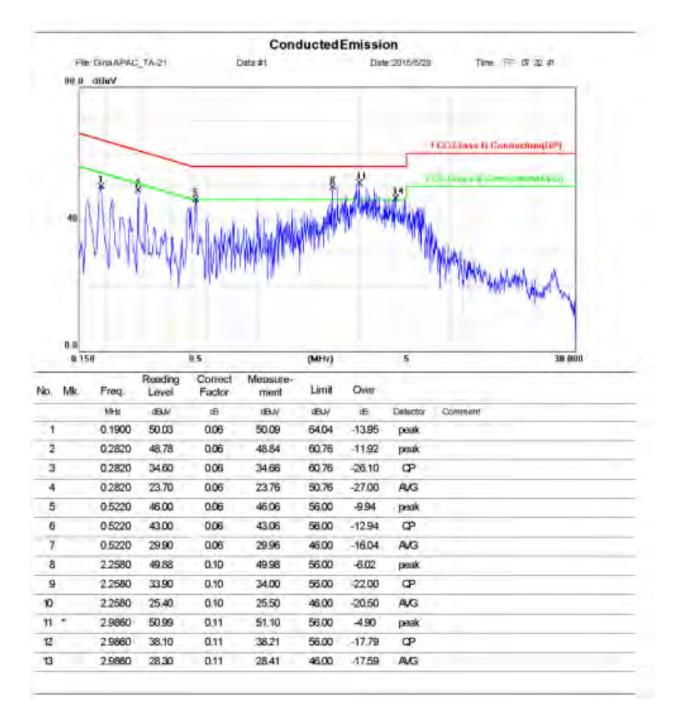

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



| No. | Mk. | Freq.  | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over   |          |         |
|-----|-----|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV             | dB                | dBJV             | dBulV | dB     | Detector | Comment |
| 14  |     | 4.4300 | 46.33            | 0.15              | 46.48            | 56.00 | -9.52  | peak     |         |
| 15  |     | 4.4300 | 35.60            | 0.15              | 35.75            | 56.00 | -20.25 | œ        |         |
| 16  |     | 4.4300 | 24.80            | 0.15              | 24.95            | 46.00 | -21.05 | A/G      |         |



7

8

9

ю ٠

11

12

13

0.5900

0.5900

0.5900

2.9660

2,9660

2,9660

4,4500

47.78

37.40

30.80

54.56

43.30

33.20

49.90

0.06

0.06

0.06

011

0.11

0.11

0.15

47.84

37.46

30.86

54.67

43.41

33.31

50.05

56.00

56.00

46.00

56.00

56.00

46.00

56.00

-8.16

-18.54

-15.14

-1.33

-12.59

-12.69

-5.95

peak

P

AG

peak


P

ANG

peak

### **FCC ID: PY7-PM0872**

| Operation Mode: | Operation mode    |                   |      | Test Date: | May 28, 2015 |
|-----------------|-------------------|-------------------|------|------------|--------------|
| Temperature:    | 24 °C             | Humidity:         | 66 % | Test By:   | Marcus       |
| Model No.:      | Adapter: EP800, S | Supplier: Phihong |      | Phase:     | Ν            |

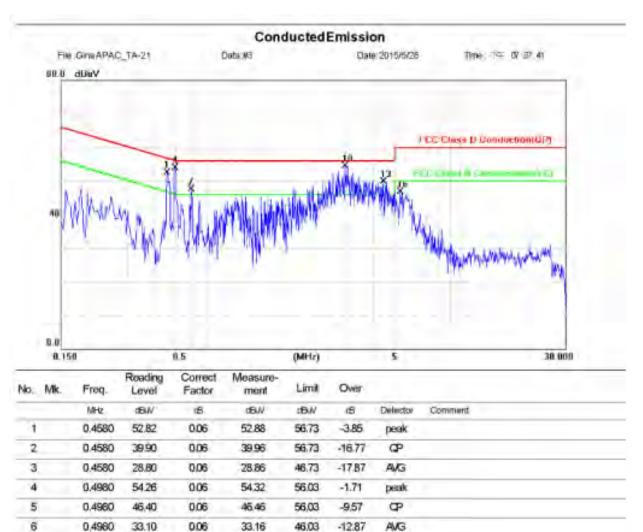


| y to the sample(s) tested and such sample(s) are retained for 90 days only. |
|---|
|   |
|   |



| No. Mk | k. Freq. | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over   |          |         |  |
|--------|----------|------------------|-------------------|------------------|-------|--------|----------|---------|--|
|        | MHz      | dBut/            | ß                 | dBuV             | dBuV  | æ      | Detector | Comment |  |
| 14     | 4.4500   | 39.20            | 0.15              | 39.35            | 56.00 | -16.65 | œ        |         |  |
| 15     | 4.4500   | 28.80            | 0.15              | 28.95            | 46.00 | -17.05 | AVG      |         |  |
| 16     | 5.3300   | 46.99            | 0.16              | 47.15            | 60.00 | -12.85 | peak     |         |  |
| 17     | 5.3300   | 35.20            | 0.16              | 35.36            | 60.00 | -24.64 | œ        |         |  |
| 18     | 5.3300   | 24.60            | 0.16              | 24.76            | 50.00 | -25.24 | A/G      |         |  |




| Operation Mode: | Operation mode                    |           |      | Test Date: | Apr. 30, 2015 |
|-----------------|-----------------------------------|-----------|------|------------|---------------|
| Temperature:    | 24 °C                             | Humidity: | 66 % | Test By:   | Tin           |
| Model No.:      | Adapter: EP800, Supplier: Phihong |           |      | Phase:     | L1            |

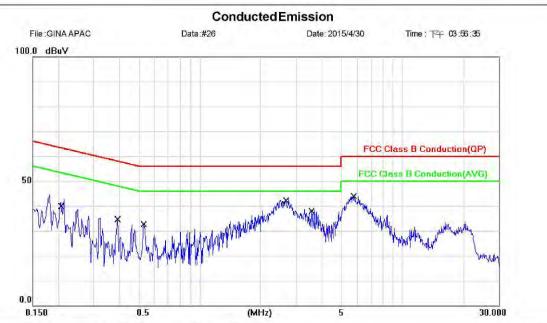

| No. | Mk. | Freq.  | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over   |          |         |
|-----|-----|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV             | dB                | dBuV             | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.2100 | 34.20            | 9.94              | 44.14            | 63.21 | -19.07 | QP       |         |
| 2   |     | 0.2100 | 19.60            | 9.94              | 29.54            | 53.21 | -23.67 | AVG      |         |
| 3   |     | 0.3933 | 19.70            | 9.93              | 29.63            | 57.99 | -28.36 | QP       |         |
| 4   |     | 0.3933 | 6.40             | 9.93              | 16.33            | 47.99 | -31.66 | AVG      |         |
| 5   |     | 0.5303 | 15.90            | 9.93              | 25.83            | 56.00 | -30.17 | QP       |         |
| 6   |     | 0.5303 | 12.50            | 9.93              | 22.43            | 46.00 | -23.57 | AVG      |         |
| 7   | 1   | 2.6300 | 27.80            | 9.98              | 37.78            | 56.00 | -18.22 | QP       | -       |
| 8   | *   | 2.6300 | 18.70            | 9.98              | 28.68            | 46.00 | -17.32 | AVG      |         |
| 9   |     | 3.5880 | 18.60            | 9.99              | 28.59            | 56.00 | -27.41 | QP       |         |
| 10  |     | 3.5880 | 9.90             | 9.99              | 19.89            | 46.00 | -26.11 | AVG      |         |
| 11  |     | 5.6860 | 28.60            | 10.03             | 38.63            | 60.00 | -21.37 | QP       |         |
| 12  |     | 5.6860 | 20.70            | 10.03             | 30.73            | 50.00 | -19.27 | AVG      |         |
|     |     |        |                  |                   |                  |       |        |          |         |



| Operation Mode: | Operation mode                    |           |      | Test Date: | Apr. 30, 2015 |
|-----------------|-----------------------------------|-----------|------|------------|---------------|
| Temperature:    | 24 °C                             | Humidity: | 66 % | Test By:   | Tin           |
| Model No.:      | Adapter: EP800, Supplier: Phihong |           |      | Phase:     | Ν             |

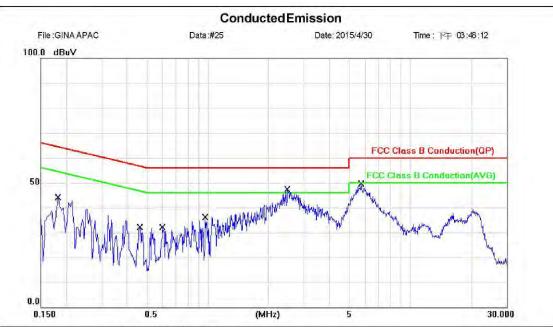

| No. | Mk. | Freq.  | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limit | Over   |          |         |
|-----|-----|--------|------------------|-------------------|------------------|-------|--------|----------|---------|
|     | -   | MHz    | dBuV             | dB                | dBuV             | dBuV  | dB     | Detector | Comment |
| 1   |     | 0.1846 | 32.50            | 9.92              | 42.42            | 64.28 | -21.86 | QP       |         |
| 2   |     | 0.1846 | 12.70            | 9.92              | 22.62            | 54.28 | -31.66 | AV/G     |         |
| 3   |     | 0.4652 | 19.20            | 9.92              | 29.12            | 56.60 | -27.48 | QP       |         |
| 4   | 1   | 0.4652 | 9.00             | 9.92              | 18.92            | 46.60 | -27.68 | AV/G     |         |
| 5   | 5   | 0.5983 | 20.50            | 9.92              | 30.42            | 56.00 | -25.58 | QP       |         |
| 6   |     | 0.5983 | 9.60             | 9.92              | 19.52            | 46.00 | -26.48 | AV/G     |         |
| 7   | 1   | 0.9827 | 22.80            | 9.93              | 32.73            | 56.00 | -23.27 | QP       |         |
| 8   | A   | 0.9827 | 9.90             | 9.93              | 19.83            | 46.00 | -26.17 | AV/G     |         |
| 9   | *   | 2.4830 | 34.60            | 9.96              | 44.56            | 56.00 | -11.44 | QP       |         |
| 10  |     | 2.4830 | 21.80            | 9.96              | 31.76            | 46.00 | -14.24 | AV/G     |         |
| 11  | - ÷ | 5.7180 | 32.80            | 10.02             | 42.82            | 60.00 | -17.18 | QP       |         |
| 12  | 1   | 5.7180 | 23.90            | 10.02             | 33.92            | 50.00 | -16.08 | AV/G     |         |
| _   |     |        |                  |                   |                  |       |        |          |         |




#### 7 **RADIATED TEST ITEMS**

#### 7.1 **Measurement Procedure**


- Configure the EUT according to ANSI C63.4. 1.
- 2. The EUT was placed on a turn table which is 0.8m above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete

#### 7.2 **Test SET-UP**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

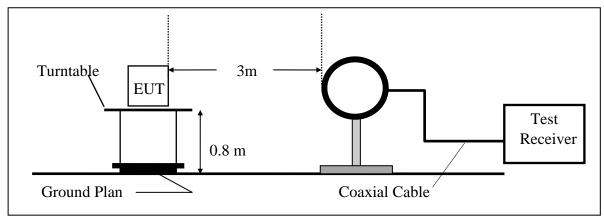

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

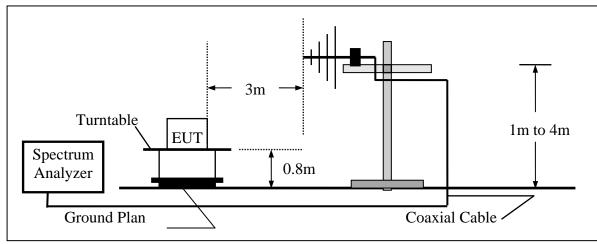

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 7.3 **Measurement Equipment Used**

|                       | 966 Chamber  |             |            |            |            |  |  |  |  |  |  |  |
|-----------------------|--------------|-------------|------------|------------|------------|--|--|--|--|--|--|--|
| EQUIPMENT             | MFR          | MODEL       | SERIAL     | LAST       | CAL DUE.   |  |  |  |  |  |  |  |
| ТҮРЕ                  |              | NUMBER      | NUMBER     | CAL.       |            |  |  |  |  |  |  |  |
| EMI Test Receiver     | R&S          | ESCI7       | 100760     | 05/04/2015 | 05/03/2016 |  |  |  |  |  |  |  |
| EXA Spectrum Analyzer | Agilent      | N9010A      | MY50420195 | 12/22/2014 | 12/21/2015 |  |  |  |  |  |  |  |
| Bilog Antenna         | SCHWAZBECK   | VULB9168    | 378        | 12/23/2014 | 12/22/2015 |  |  |  |  |  |  |  |
| Loop Antenna          | ETS.LINDGREN | 6502        | 00148045   | 07/03/2014 | 07/02/2015 |  |  |  |  |  |  |  |
| Pre-Amplifier         | Agilent      | 8447D       | 2944A07676 | 01/02/2015 | 01/01/2016 |  |  |  |  |  |  |  |
| Turn Table            | HD           | DT420       | N/A        | N.C.R      | N.C.R      |  |  |  |  |  |  |  |
| Antenna Tower         | HD           | MA240-N     | 240/657    | N.C.R      | N.C.R      |  |  |  |  |  |  |  |
| Controller            | HD           | HD100       | N/A        | N.C.R      | N.C.R      |  |  |  |  |  |  |  |
| Low Loss Cable        | Huber Suhner | 966_Rx      | 9          | 01/02/2015 | 01/01/2016 |  |  |  |  |  |  |  |
| 3m Site NSA           | SGS          | 966 chamber | N/A        | 07/15/2014 | 07/14/2015 |  |  |  |  |  |  |  |

#### 7.4 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

# FS = RA + AF + CL - AG

| Where | FS = Field Strength    | CL = Cable Attenuation Factor (Cable Loss) |
|-------|------------------------|--|
|       | RA = Reading Amplitude | AG = Amplifier Gain                        |
|       | AF = Antenna Factor    |  |

The limit of the emission level is expressed in dBuV/m, which converts  $20*\log(uV/m)$ 

Actual FS( $dB\mu V/m$ ) = SPA. Reading level( $dB\mu V$ ) + Factor(dB)

Factor(dB) = Antenna Factor(dB $\mu$ V/m) + Cable Loss(dB) – Pre\_Amplifier Gain(dB)

### Note :

- "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.
- "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



#### 7.5 Field Strength of Fundamental Emissions and Mask Measurement

#### 7.5.1 **Standard Applicable**

### Limit:

| Rules and specifiactions       | CFR 47 Part 15 section 15.225(a)-(d) |                                  |                                 |  |  |  |
|--------------------------------|--------------------------------------|----------------------------------|---------------------------------|--|--|--|
| Frequency of Emission<br>(MHz) | Field Strength<br>(µV/m)at 30m       | Field Strength<br>(dBµV/m)at 30m | Field Strength<br>(dBµV/m)at 3m |  |  |  |
| 1.705~13.110                   | 30                                   | 29.5                             | 69.5                            |  |  |  |
| 13.110~13.410                  | 106                                  | 40.5                             | 80.5                            |  |  |  |
| 13.410~13.553                  | 334                                  | 50.5                             | 90.47                           |  |  |  |
| 13.553~13.567                  | 15848                                | 84                               | 123.9                           |  |  |  |
| 13.567~13.710                  | 334                                  | 50.5                             | 90.47                           |  |  |  |
| 13.710~14.010                  | 106                                  | 40.5                             | 80.5                            |  |  |  |
| 14.010~30.00                   | 30                                   | 29.5                             | 69.5                            |  |  |  |

### Note:

- 1. Emission level in dBuV/m=20 log ( $\mu$ V/m)
- 2. Distance extrapolation factor =  $40 \log$  (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




### 7.5.2 Field Strength of Fundamental Emission Measurement Result

| Operation Ban<br>Fundamental F<br>Operation Moo<br>EUT Pol. | Frequency | :NFC<br>:13.56 MHz<br>:MAIN<br>:H Plan |                  | Test Date<br>Temp./Humi.<br>Engineer<br>Measurement | Antenna Pol. | :2015-05-2<br>:19.2 deg_0<br>:Curry<br>:VERTICA | C/58RH    |
|---|-----------|--|------------------|---|--------------|---|-----------|
| 127Level  | (dBuV/m)  |  |                  |   |              |   |           |
| 120   |           |  |                  |   |              |   |           |
| 100   |           |  |                  |   |              | 15.225(13.56M)MA                                | <u>sk</u> |
| 80  |           |  |                  |   |              |   |           |
| 60  |           |  |                  |   |              |   |           |
| 40  |           |  |                  | 1   |              |   |           |
| 20  |           |  |                  |   |              |   |           |
| 0 <mark></mark>   |           | 13.53                                  | 13.55<br>Frequen | 13.57<br>cy (MHz)                                   | 13.5         | 9   | 13.61     |
| Freq.   | Note      | Detector                               | Spectrum         | Factor  | Actual       | Limit   | Margin    |
| *   |           | Mode                                   | Reading Level    | 1   | FS           | @3m   | C         |
| MHz   | F/H/E/S   | PK/QP/AV                               | dBµV             | dB  | dBµV/m       | dBµV/m  | dB        |
| 13.56   | F         | Peak                                   | 30.81            | 11.38   | 42.19        | 123.90  | -81.71    |



**Report No: ER/2015/40160** Issue Date: Jan. 05, 2015 Page: 25 of 38

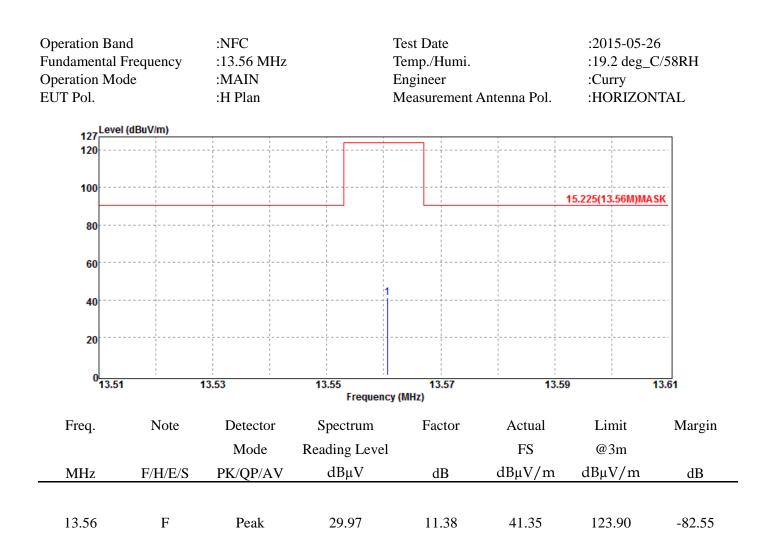


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 7.5.3 Mask Measurement Result

| Operation Band        | :NFC       | Test Date                |
|-----------------------|------------|--------------------------|
| Fundamental Frequency | :13.56 MHz | Temp./Humi.              |
| Operation Mode        | :MASK      | Engineer                 |
| EUT Pol.              | :H Plan    | Measurement Antenna Pol. |
|                       |            |                          |


:2015-05-26 :19.2 deg\_C/58RH :Curry :VERTICAL

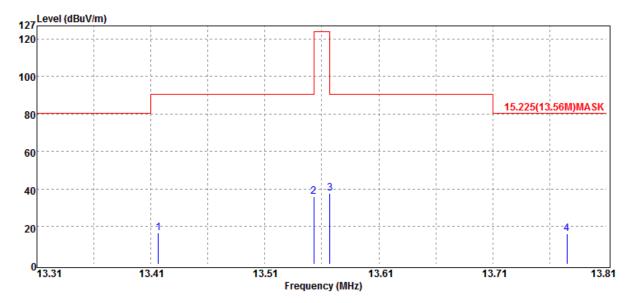

| Freq. | Note    | Detector | Spectrum      | Factor | Actual | Limit  | Margin |
|-------|---------|----------|---------------|--------|--------|--------|--------|
|       |         | Mode     | Reading Level |        | FS     | @3m    |        |
| MHz   | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
|       |         |          |               |        |        |        |        |
| 13.42 | S       | Peak     | 5.29          | 11.38  | 16.67  | 90.47  | -73.80 |
| 13.55 | S       | Peak     | 24.44         | 11.38  | 35.82  | 90.47  | -54.65 |
| 13.57 | S       | Peak     | 26.49         | 11.38  | 37.87  | 90.47  | -52.60 |
| 13.78 | S       | Peak     | 4.92          | 11.39  | 16.31  | 80.50  | -64.19 |



**Report No: ER/2015/40160** Issue Date: Jan. 05, 2015 Page: 27 of 38

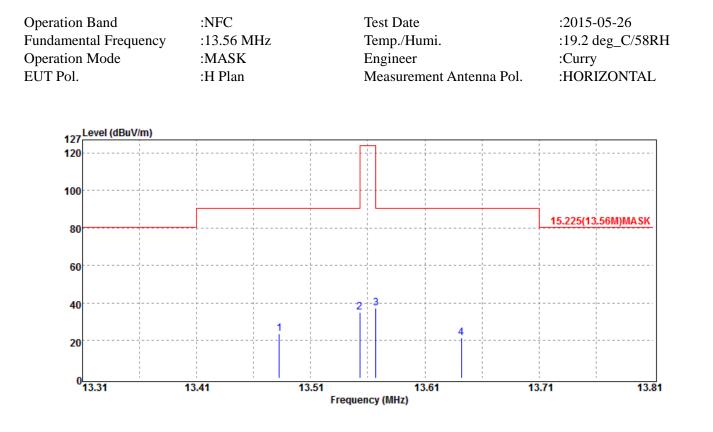

| Freq.   | Note    | Detector | Spectrum      | Factor | Actual | Limit  | Margin |
|---------|---------|----------|---------------|--------|--------|--------|--------|
|         |         | Mode     | Reading Level |        | FS     | @3m    |        |
| <br>MHz | F/H/E/S | PK/QP/AV | dBµV          | dB     | dBµV/m | dBµV/m | dB     |
|         |         |          |               |        |        |        |        |
| 13.48   | S       | Peak     | 12.53         | 11.38  | 23.91  | 90.47  | -66.56 |
| 13.55   | S       | Peak     | 23.75         | 11.38  | 35.13  | 90.47  | -55.34 |
| 13.57   | S       | Peak     | 25.95         | 11.38  | 37.33  | 90.47  | -53.14 |
| 13.64   | S       | Peak     | 10.36         | 11.38  | 21.74  | 90.47  | -68.73 |
|         |         |          |               |        |        |        |        |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 7.6 Radiated Emission Measurement

# 7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

| Frequency<br>(MHz) | Field strength<br>(µV/m) | Distance<br>(meters) |
|--------------------|--------------------------|----------------------|
| 0.009~0.490        | 2400/F(kHz)              | 300                  |
| 0.490~1.705        | 24000/F(kHz)             | 30                   |
| 1.705-30           | 30                       | 30                   |
| 30-88              | 100                      | 3                    |
| 88-216             | 150                      | 3                    |
| 216-960            | 200                      | 3                    |
| Above 960          | 500                      | 3                    |

### Note:

1. Emission level in  $dB\mu V/m=20 \log (\mu V/m)$ 

- 2. Distance extrapolation factor =  $40 \log$  (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




## 7.6.2 Radiated Emission Measurement Result

| Fundamental Frequency :<br>Operation Mode : |          | :NFC<br>:13.56 MHz<br>:TX<br>:H Plan |               | Test Date<br>Temp./Humi.<br>Engineer<br>Measurement An | ntenna Pol. | :2015-05-26<br>:19.2 deg_C/5<br>:Curry<br>:VERTICAL | 58RH   |
|---|----------|--------------------------------------|---------------|--|-------------|---|--------|
|   | (dBuV/m) | i i                                  | i             |  |             | i   |        |
| 120   |          |                                      |               |  |             |   |        |
| 100   |          |                                      |               |  |             |   |        |
| 80  |          |                                      |               |  |             |   |        |
| 60  |          |                                      |               |  |             |   |        |
| 40  |          |                                      | 4             |  |             | 15.225(13.56M)MA                                    | SK     |
| 1   |          | 2                                    | 3             | 5  | 6           | 7   |        |
| 20  |          |                                      |               |  |             |   |        |
| 0 <mark></mark><br>10                       | i        | 14.                                  | 18.<br>Freque | 22.<br>ncy (MHz)                                       | 26.         | 1 1   | 30     |
| Freq.                                       | Note     | Detector                             | Spectrum      | Factor   | Actual      | Limit   | Margin |
|   |          | Mode                                 | Reading Lev   | el   | FS          | @3m   |        |
| MHz   | F/H/E/S  | PK/QP/AV                             | dBµV          | dB   | dBµV/m      | dBµV/m  | dB     |
|   |          |                                      |               |  |             |   |        |
| 10.74                                       | S        | Peak                                 | 16.69         | 11.31  | 28.00       | 69.54   | -41.54 |
| 15.58                                       | S        | Peak                                 | 13.59         | 11.42  | 25.01       | 69.54   | -44.53 |
| 17.56                                       | S        | Peak                                 | 15.24         | 11.46  | 26.70       | 69.54   | -42.84 |
| 17.90                                       | S        | Peak                                 | 21.57         | 11.46  | 33.03       | 69.54   | -36.51 |
| 21.36                                       | S        | Peak                                 | 8.22          | 11.09  | 19.31       | 69.54   | -50.23 |
| 25.54                                       | S        | Peak                                 | 9.02          | 9.97   | 18.99       | 69.54   | -50.55 |
| 27.12                                       | Н        | Peak                                 | 8.26          | 9.62   | 17.88       | 69.54   | -51.66 |




**Report No: ER/2015/40160** Issue Date: Jan. 05, 2015 Page: 30 of 38

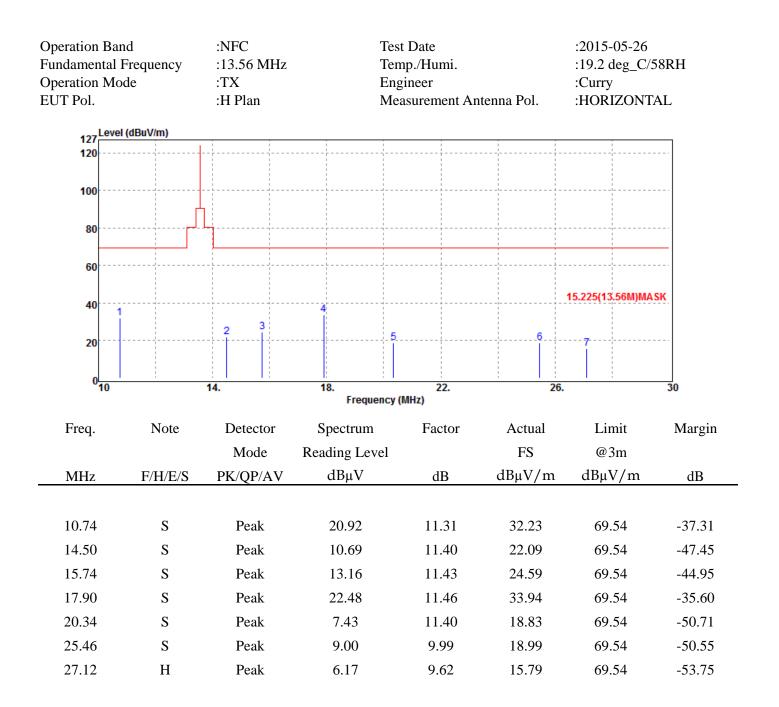

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




**Report No: ER/2015/40160** Issue Date: Jan. 05, 2015 Page: 31 of 38

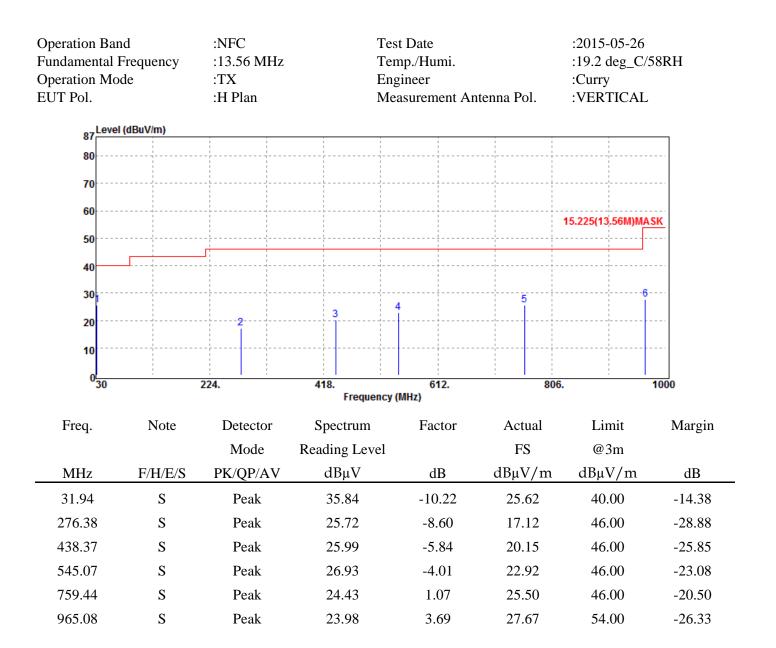

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



**Report No: ER/2015/40160** Issue Date: Jan. 05, 2015 Page: 32 of 38

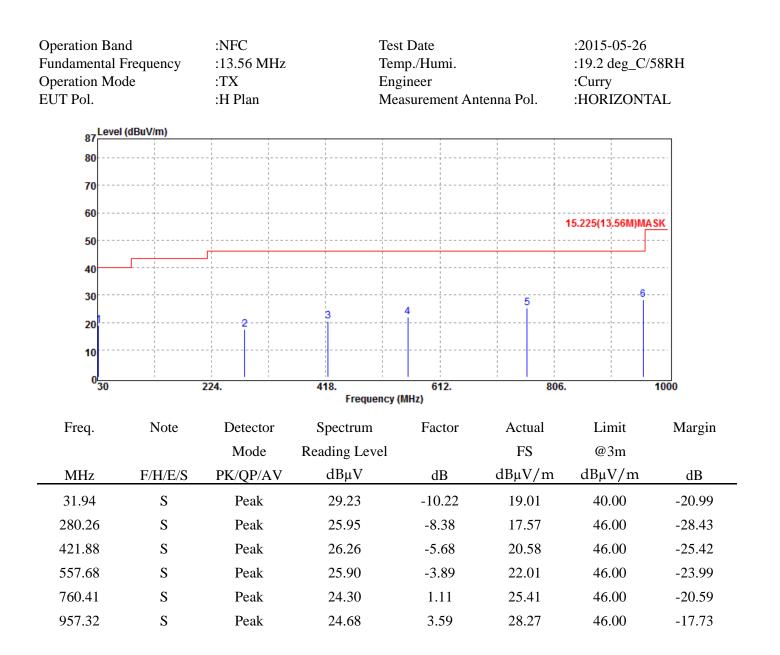

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **FREQUENCY STABILITY** 8

#### 8.1 **Standard Applicable**


The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 8.2 **Measurement Procedure**

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- Turn the EUT on and couple its output to spectrum. 3.
- 4. Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn 5. the EUT and measure the operating frequency.
- Repeat step with the temperature chamber set to the lowest temperature. 6.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span = 100 kHz, Detector =Max hold, Mark peak.

#### 8.3 **Test SET-UP**

# **Temperature Chamber**

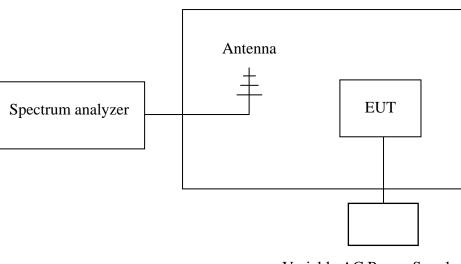

Variable AC Power Supply

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### **Measurement Equipment Used** 8.4

| Conducted Emission Test Site |          |           |            |            |            |  |  |  |  |  |  |
|------------------------------|----------|-----------|------------|------------|------------|--|--|--|--|--|--|
| EQUIPMENT                    | MFR      | MODEL     | SERIAL     | LAST       | CAL DUE.   |  |  |  |  |  |  |
| TYPE                         |          | NUMBER    | NUMBER     | CAL.       | CAL DUE.   |  |  |  |  |  |  |
| Spectrum Analyzer            | Agilent  | E4446A    | MY51100003 | 01/29/2015 | 01/28/2016 |  |  |  |  |  |  |
| Temperature Chamber          | TERCHY   | MHG-120LF | 911009     | 05/06/2015 | 05/05/2016 |  |  |  |  |  |  |
| AC Power Supply              | APW-105N | 887592    | All Power  | N/A        | N/A        |  |  |  |  |  |  |

#### 8.5 **Measurement Results**

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



# A. Temperature Variation

| Power Supply | Environment      | Frequency | Delta (Hz) | Limit (KHz)   |  |
|--------------|------------------|-----------|------------|---------------|--|
| Vdc          | Temperature (°C) | (MHz)     | Dena (112) | LIIIII (KIIZ) |  |
| 3.8          | -20              | 13.5608   | -130.00    | +/- 1.356     |  |
| 3.8          | -10              | 13.56081  | -140.00    | +/- 1.356     |  |
| 3.8          | 0                | 13.56077  | -100.00    | +/- 1.356     |  |
| 3.8          | 10               | 13.56071  | -40.00     | +/- 1.356     |  |
| 3.8          | 20               | 13.56067  | 0.00       | +/- 1.356     |  |
| 3.8          | 30               | 13.5606   | 70.00      | +/- 1.356     |  |
| 3.8          | 40               | 13.56055  | 120.00     | +/- 1.356     |  |
| 3.8          | 50               | 13.56058  | 90.00      | +/- 1.356     |  |

# **B.** Supply Voltage Variation

| Power Supply | Environment      | Frequency | Delta (Hz)  | Limit (KHz) |  |
|--------------|------------------|-----------|-------------|-------------|--|
| Vdc          | Temperature (°C) | (MHz)     | Delta (IIZ) |             |  |
| 4.2          | 20               | 13.56073  | -60.00      | +/- 1.356   |  |
| 3.8          | 20               | 13.56067  | 0.00        | +/- 1.356   |  |
| 3.2          | 20               | 13.56061  | 60.00       | +/- 1.356   |  |



#### **20 dB OCCUPIED BANDWIDTH MEASUREMENT** 9


#### 9.1 **Standard Applicable:**

The 20 dB bandwidth shall be specified in operating frequency band.

#### 9.2 Limit:

None

#### **Test Set-up** 9.3



#### **Measurement Procedure** 9.4

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

#### 9.5 **Measurement Equipment Used**


| Conducted Emission Test Site |         |        |            |            |            |  |  |  |
|------------------------------|---------|--------|------------|------------|------------|--|--|--|
| EQUIPMENT                    | MFR     | MODEL  | SERIAL     | LAST       |            |  |  |  |
| TYPE                         |         | NUMBER | NUMBER     | CAL.       | CAL DUE.   |  |  |  |
| Spectrum Analyzer            | Agilent | E4446A | MY51100003 | 01/29/2015 | 01/28/2016 |  |  |  |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



#### **20dB Bandwidth Measurement Result** 9.6

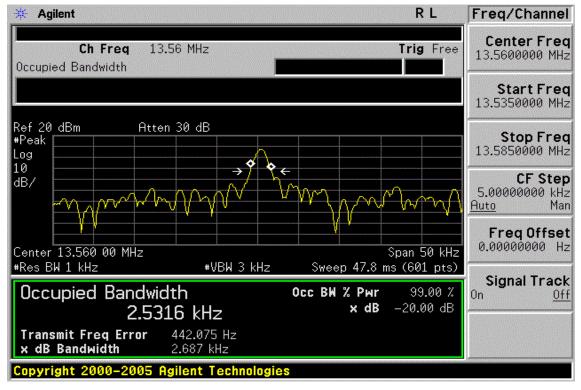

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **10 ANTENNA REQUIREMENT**

## **10.1. Standard Applicable**

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

### **10.2.** Antenna Connected Construction

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms\_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.