



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications Inc.  
**EQUIPMENT** : Smart phone  
**BRAND NAME** : SONY  
**TYPE NAME** : PM-0891-BV  
**FCC ID** : PY7-PM0891  
**STANDARD** : FCC Part 15 Subpart C §15.225  
**CLASSIFICATION** : (DXX) Low Power Communication Device Transmitter

The testing was completed on Jul. 06, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



Table of Contents

REVISION HISTORY.....3
SUMMARY OF THE TEST RESULT .....4
1. GENERAL INFORMATION.....5
1.1 Applicant ..... 5
1.2 Manufacturer..... 5
1.3 Product Details..... 5
1.4 Modification of EUT..... 6
1.5 Testing Location ..... 7
1.6 Applicable Standards ..... 7
1.7 Test Modes..... 7
1.8 Test Configurations..... 8
1.9 Table for Supporting Units ..... 9
2. CONDUCTED EMISSION TEST.....10
2.1 Measuring Instruments ..... 10
2.2 Test setup ..... 10
2.3 Test Result of Conducted Emission Test..... 10
2.4 AC Power Line Conducted Emissions Measurement ..... 11
3. CONDUCTED TEST ITEMS .....12
3.1 Measuring Instruments ..... 12
3.2 Test Setup ..... 12
3.3 Test Result of Conducted Test Items..... 12
3.4 20dB Spectrum Bandwidth Measurement ..... 13
3.5 Frequency Stability Measurement ..... 13
4. RADIATED TEST ITEMS.....14
4.1 Measuring Instruments ..... 14
4.2 Test Setup ..... 14
4.3 Test Result of Radiated Test Items ..... 14
4.4 Field Strength of Fundamental Emissions and Mask Measurement ..... 15
4.5 Radiated Emissions Measurement ..... 16
5. LIST OF MEASURING EQUIPMENT .....18
APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST
APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS
B.1.Test Result of 20dB Spectrum Bandwidth
B.2 Test Result of Frequency Stability
APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS
C.1 Test Result of Field Strength of Fundamental Emissions
C.2 Results of Radiated Emissions (9 kHz~30MHz)
C.3 Results of Radiated Emissions (30MHz~1GHz)



**REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR542942D	Rev. 01	Initial issue of report	Jul. 02, 2015
FR542942D	Rev. 02	Update the verify data of hardware A.	Jul. 09, 2015



### SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	12.80 dB at 2.966 MHz
3.2	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	66.64 dB at 13.560 MHz
3.3	2.1049	20dB Spectrum Bandwidth	Complies	-
3.4	15.225(d) 15.209	Radiated Emissions	Complies	14.23 dB at 895.000 MHz
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.26dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±5.2dB	Confidence levels of 95%



# 1. GENERAL INFORMATION

## 1.1 Applicant

**Sony Mobile Communications Inc.**  
Nya Vattentornet, 22188 Lund, Sweden

## 1.2 Manufacturer

**Arima Communications Corp.**  
6F, No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

## 1.3 Product Details

Items	Description
<b>Tx/Rx Frequency Range</b>	13.553 ~ 13.567MHz
<b>Channel Number</b>	1
<b>20dBW</b>	2.64kHz
<b>99%OBW</b>	2.24kHz
<b>Antenna Type</b>	Loop Antenna
<b>Type of Modulation</b>	ASK

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402454994819 IMEI 2: 004402454994827	A	29.0.B.0.76	WUJ01JV262	RF Conducted Measurement Radiated Emission AC Conducted Emission



Accessory List	
<b>AC Adapter</b>	Model No. : EP800
	Type No. : CAA-0002016-US B
	S/N : 1110W 21 106665 (for Radiated Spurious Emission)
	S/N : 3113W 38 210631 (for Conducted Emission)
<b>Battery</b>	Model No. : LIS1579ERPC
<b>Earphone 1</b>	Model No. : MH410c
	Type No. : AG-1100
	S/N : 14341EC40048D00 (for Radiated Spurious Emission)
	S/N : 14371E6600174A0 (for Conducted Emission)
<b>USB Cable</b>	Model No. : EC450
	Type No. : AI-0700
	S/N : 143312DD1473582 (for Radiated Spurious Emission)
	S/N : 134912D1000585A (for Conducted Emission)

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH03-HY	CO05-HY	03CH07-HY
<b>Test Engineer</b>	Danny Chen	Kai-Chun Chu	Nick Yu
<b>Temperature</b>	22~24	26~28	22~24
<b>Relative Humidity</b>	53~55	58~62	57~62

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.225
- ANSI C63.10-2009


### 1.7 Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz
<b>Note:</b>	
1. The EUT was programmed to be in continuously transmitting mode.	
2. The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.	

## 1.8 Test Configurations

### <AC Conducted Emissions>

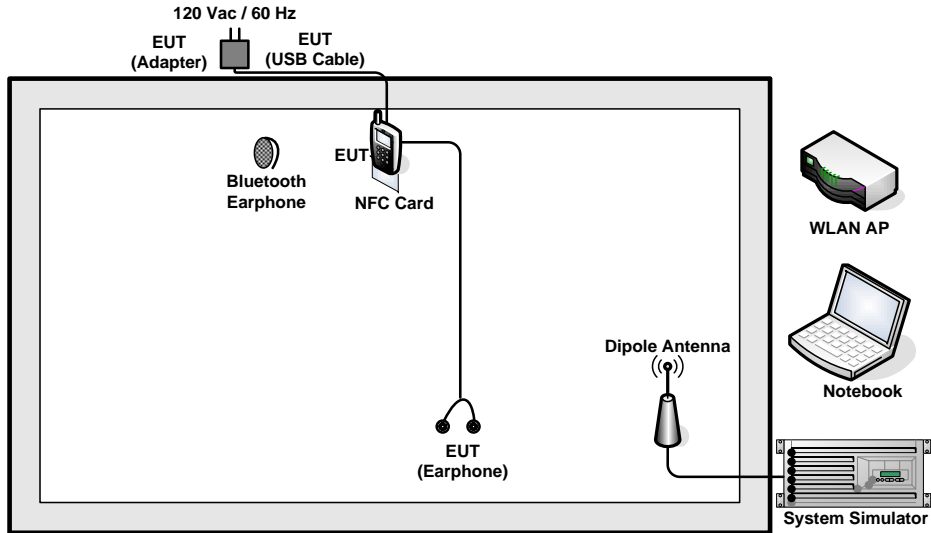

### < For Fundamental Emissions and Mask and Radiated Emissions Measurement >

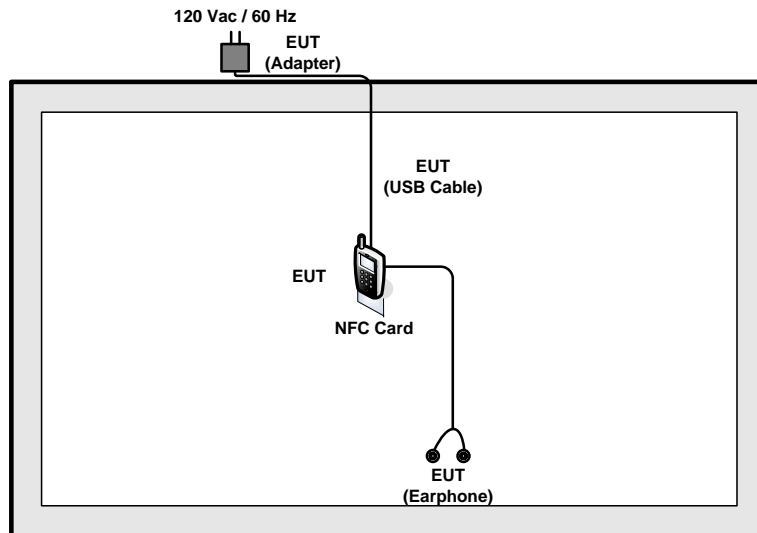





1.9 Table for Supporting Units


Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-865L	KA2IR865LA1	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A
6.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

## 2. CONDUCTED EMISSION TEST

### 2.1 Measuring Instruments

See list of measuring instruments of this test report.

### 2.2 Test setup

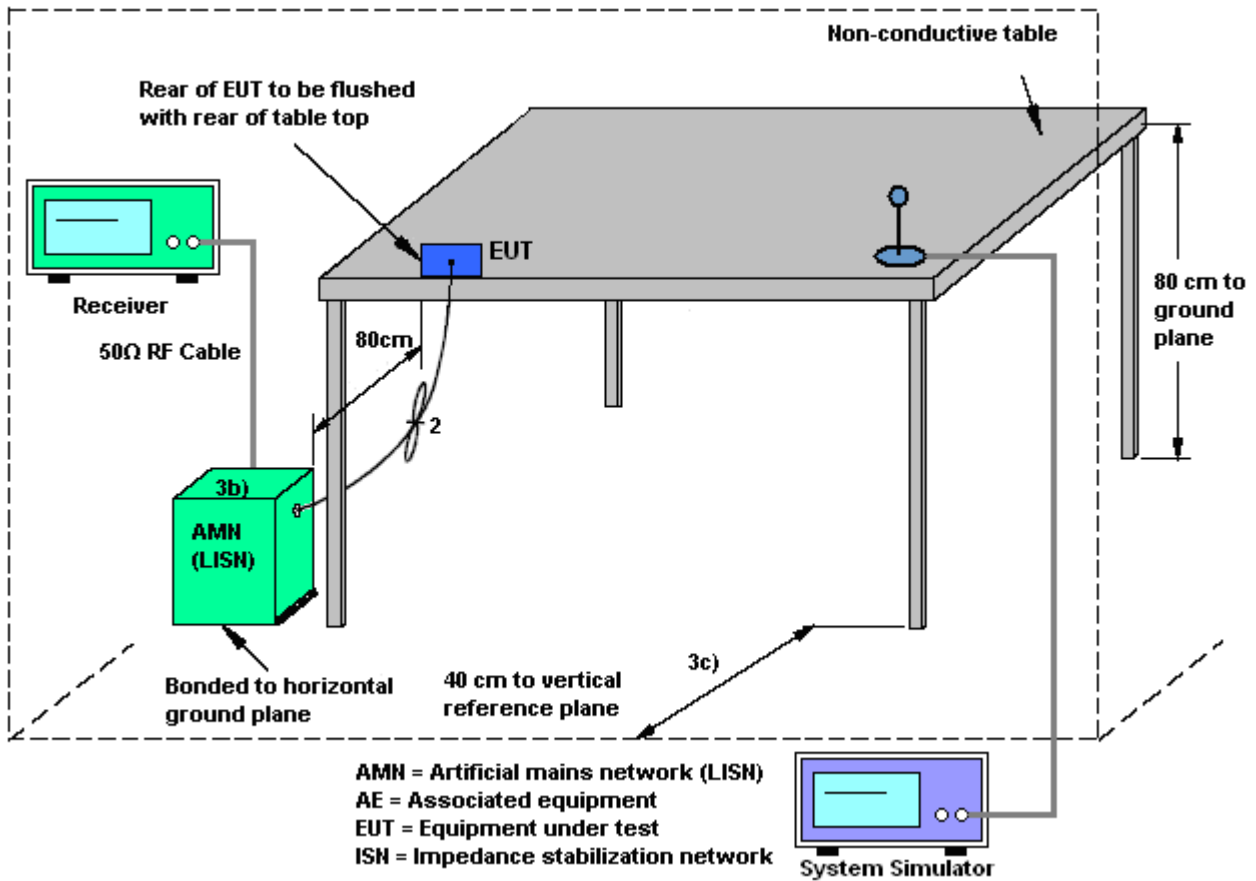

### 2.3 Test Result of Conducted Emission Test

Please refer to Appendix A.



## 2.4 AC Power Line Conducted Emissions Measurement

### Limit

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.

### Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3. CONDUCTED TEST ITEMS

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup

##### 20dB Spectrum Bandwidth

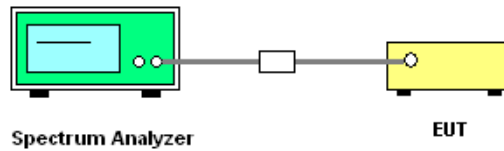

##### Frequency Stability

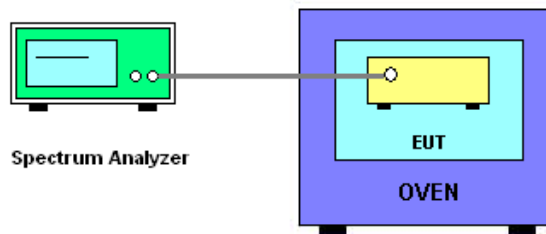

#### 3.3 Test Result of Conducted Test Items

Please refer to Appendix B.



### 3.4 20dB Spectrum Bandwidth Measurement

#### Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band 13.553~13.567MHz

#### Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

### 3.5 Frequency Stability Measurement

#### Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.


## 4. RADIATED TEST ITEMS

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

For radiated emissions below 30MHz

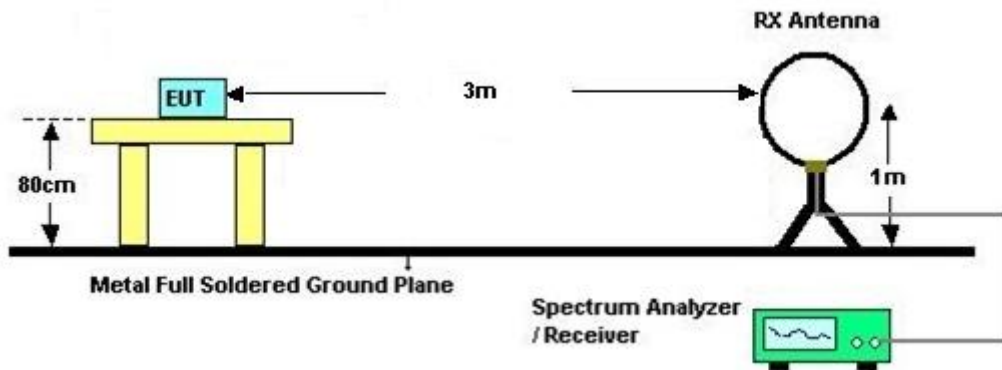

For radiated emissions above 30MHz

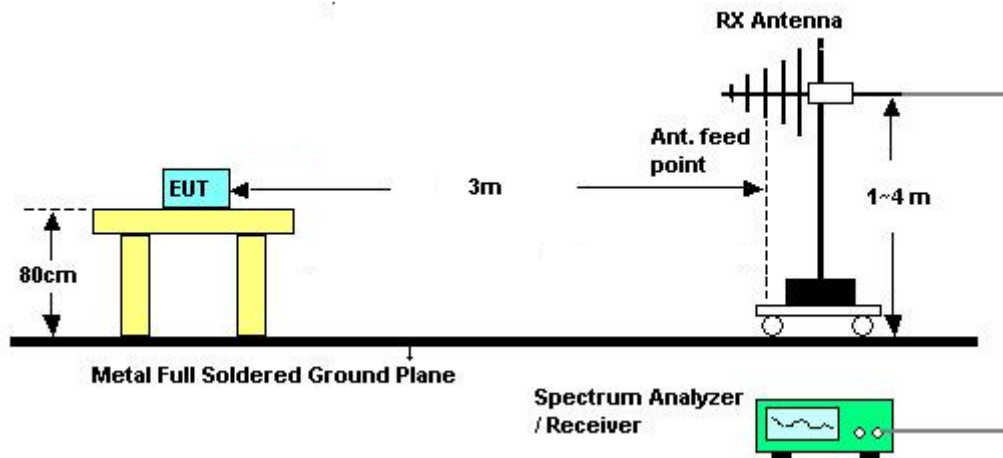

### 4.3 Test Result of Radiated Test Items

Please refer to Appendix C.



### 4.4 Field Strength of Fundamental Emissions and Mask Measurement

#### Limit

Rules and specifications	CFR 47 Part 15 section 15.225(a)-(d)			
Description	Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553~13.567MHz			
Freq. of Emission (MHz)	Field Strength (µV/m) at 30m	Field Strength (dBµV/m) at 30m	Field Strength (dBµV/m) at 10m	Field Strength (dBµV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

#### Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553~13.567MHz.

Note: Emission level (dBµV/m) = 20 log Emission level (µV/m).



### 4.5 Radiated Emissions Measurement

#### Limit

The field strength of any emissions which appear outside of 13.553~13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (µV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.



**Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

**Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



### 5. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 14, 2014	Jul. 03, 2015	Jun. 13, 2015	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	N/A	Dec. 01, 2014	Jul. 03, 2015	Nov. 30, 2015	Conducted (TH03-HY)
Hygrometer	Testo	608-H1	34893241	N/A	May. 04, 2015	Jul. 03, 2015	May. 03, 2016	Conducted (TH03-HY)
RF cable	WOKEN	S05	S05-130708-2 2	N/A	Jan. 21, 2015	Jul. 03, 2015	Jan. 20, 2016	Conducted (TH03-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 06, 2015	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz – 2.75GHz	Dec. 01, 2014	Jul. 06, 2015	Nov. 30, 2015	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	Jul. 06, 2015	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	Jul. 06, 2015	Dec. 01, 2015	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2015	Jul. 06, 2015	Jan. 01, 2016	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Jul. 06, 2015	N/A	Conduction (CO05-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Jul. 03, 2015	Sep. 26, 2015	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 04, 2015	Jul. 03, 2015	May 03, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Jul. 03, 2015	Jul. 27, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1000MHz	Mar. 12, 2015	Jul. 03, 2015	Mar. 11, 2016	Radiation (03CH07-HY)
Signal Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Mar. 10, 2015	Jul. 03, 2015	Mar. 09, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2014	Jul. 03, 2015	Aug. 29, 2015	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~40GHz	Dec. 04, 2014	Jul. 03, 2015	Dec. 03, 2015	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9kHz~1GHz	Dec. 04, 2014	Jul. 03, 2015	Dec. 03, 2015	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Jul. 03, 2015	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Jul. 03, 2015	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jul. 03, 2015	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Jul. 03, 2015	N/A	Radiation (03CH07-HY)
Test Software	N/A	E3	6.2009-8-24 (sporton)	N/A	N/A	Jul. 03, 2015	N/A	Radiation (03CH07-HY)
Filter	Wainwright	WHK20 /1000C7/40SS	SN2	20M High Pass	Oct. 01, 2014	Jul. 03, 2015	Sep. 30, 2015	Radiation (03CH07-HY)


**Note:** Test equipment calibration is traceable to the procedure of ISO17025.



## Appendix A. Test Results of Conducted Emission Test

<Original Test Result>

Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx + Earphone 1 + SIM 1		

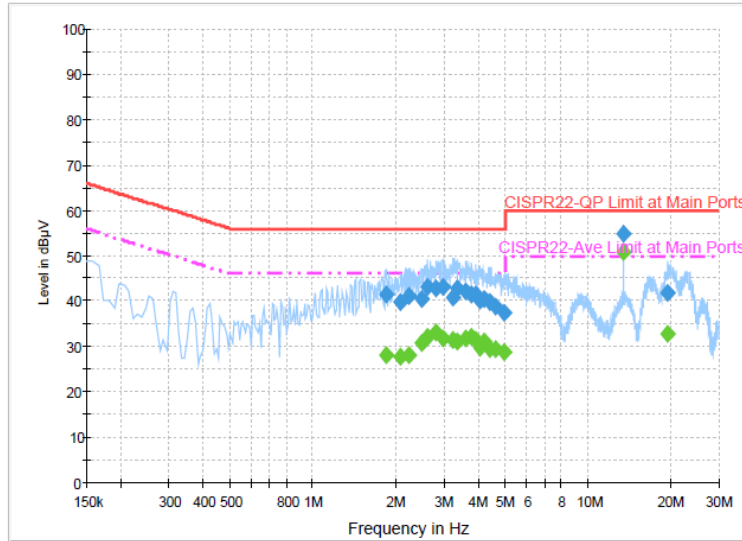


### Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.846000	41.5	Off	L1	19.5	14.5	56.0
2.094000	39.9	Off	L1	19.7	16.1	56.0
2.246000	41.2	Off	L1	19.7	14.8	56.0
2.494000	40.5	Off	L1	19.7	15.5	56.0
2.614000	43.0	Off	L1	19.7	13.0	56.0
2.814000	42.7	Off	L1	19.7	13.3	56.0
2.966000	43.2	Off	L1	19.7	12.8	56.0
3.238000	40.7	Off	L1	19.7	15.3	56.0
3.374000	42.7	Off	L1	19.7	13.3	56.0
3.622000	42.0	Off	L1	19.7	14.0	56.0
3.782000	41.6	Off	L1	19.7	14.4	56.0
3.926000	41.3	Off	L1	19.7	14.7	56.0
4.062000	40.0	Off	L1	19.7	16.0	56.0
4.190000	40.5	Off	L1	19.7	15.5	56.0
4.390000	40.0	Off	L1	19.7	16.0	56.0
4.646000	38.8	Off	L1	19.7	17.2	56.0
4.982000	37.6	Off	L1	19.9	18.4	56.0
13.558000	54.9	Off	L1	19.9	5.1	60.0
19.598000	41.8	Off	L1	20.0	18.2	60.0



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx + Earphone 1 + SIM 1		

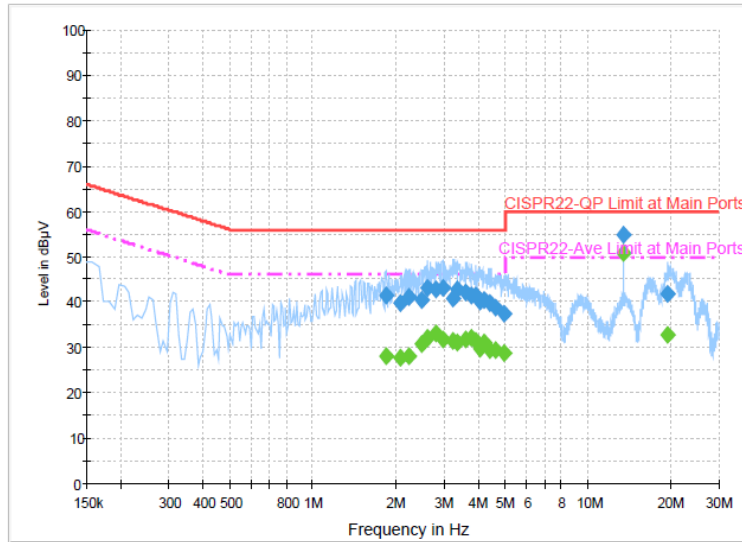


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.846000	28.2	Off	L1	19.5	17.8	46.0
2.094000	27.9	Off	L1	19.7	18.1	46.0
2.246000	27.9	Off	L1	19.7	18.1	46.0
2.494000	30.7	Off	L1	19.7	15.3	46.0
2.614000	32.0	Off	L1	19.7	14.0	46.0
2.814000	33.0	Off	L1	19.7	13.0	46.0
2.966000	31.9	Off	L1	19.7	14.1	46.0
3.238000	31.6	Off	L1	19.7	14.4	46.0
3.374000	31.1	Off	L1	19.7	14.9	46.0
3.622000	31.6	Off	L1	19.7	14.4	46.0
3.782000	32.1	Off	L1	19.7	13.9	46.0
3.926000	31.4	Off	L1	19.7	14.6	46.0
4.062000	29.7	Off	L1	19.7	16.3	46.0
4.190000	31.2	Off	L1	19.7	14.8	46.0
4.390000	29.5	Off	L1	19.7	16.5	46.0
4.646000	29.3	Off	L1	19.7	16.7	46.0
4.982000	28.6	Off	L1	19.9	17.4	46.0
13.558000	50.7	Off	L1	19.9	-0.7	50.0
19.598000	32.7	Off	L1	20.0	17.3	50.0



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx + Earphone 1 + SIM 1		

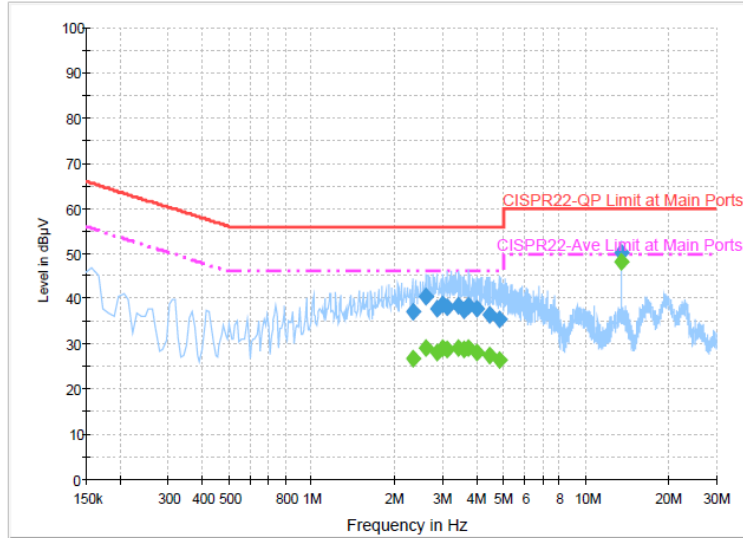

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.334000	37.2	Off	N	19.7	18.8	56.0
2.606000	40.4	Off	N	19.7	15.6	56.0
2.862000	37.9	Off	N	19.7	18.1	56.0
3.022000	38.8	Off	N	19.7	17.2	56.0
3.134000	38.2	Off	N	19.7	17.8	56.0
3.454000	38.5	Off	N	19.7	17.5	56.0
3.614000	37.4	Off	N	19.7	18.6	56.0
3.726000	38.6	Off	N	19.7	17.4	56.0
3.990000	37.9	Off	N	19.7	18.1	56.0
4.478000	36.4	Off	N	19.7	19.6	56.0
4.830000	35.5	Off	N	19.7	20.5	56.0
13.558000	50.2	Off	N	20.0	9.8	60.0


**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
2.334000	26.9	Off	N	19.7	19.1	46.0
2.606000	28.9	Off	N	19.7	17.1	46.0
2.862000	28.0	Off	N	19.7	18.0	46.0
3.022000	29.1	Off	N	19.7	16.9	46.0
3.134000	28.6	Off	N	19.7	17.4	46.0
3.454000	29.3	Off	N	19.7	16.7	46.0
3.614000	28.6	Off	N	19.7	17.4	46.0
3.726000	29.0	Off	N	19.7	17.0	46.0
3.990000	28.1	Off	N	19.7	17.9	46.0
4.478000	27.3	Off	N	19.7	18.7	46.0
4.830000	26.6	Off	N	19.7	19.4	46.0
13.558000	48.1	Off	N	20.0	1.9	50.0



<Terminal Test Result>

Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx + Earphone 1 + SIM 1		

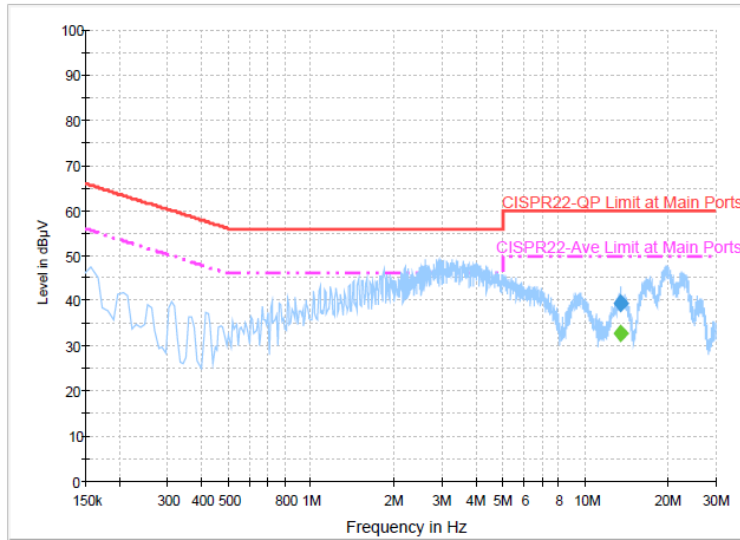

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.558000	39.5	Off	L1	19.9	20.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.558000	32.7	Off	L1	19.9	17.3	50.0



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + NFC Tx + Earphone 1 + SIM 1		

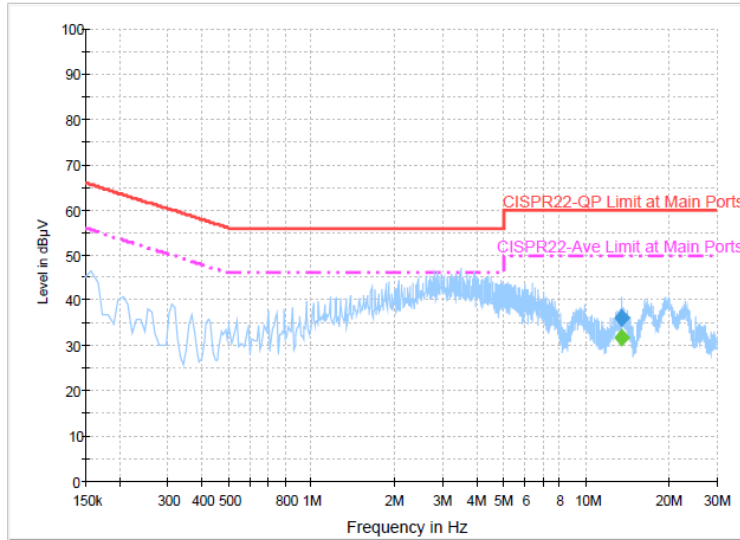

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.558000	36.1	Off	N	20.0	23.9	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.558000	31.6	Off	N	20.0	18.4	50.0

Remark: 13.558MHz is the NFC RF fundamental signal.



# Appendix B. Test Results of Conducted Test Items

## B.1 Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56
20dB Bandwidth (kHz)	2.640	99% OccupiedBW(kHz)	2.240
Frequency range (MHz)	$f_L > 13.553$	13.55902	Test Result
	$f_H < 13.567$	13.56166	Complies






B.2 Test Result of Frequency Stability


Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
120	13.560340	-20	13.560380
102	13.560340	-10	13.560410
138	13.560340	0	13.560400
		10	13.560380
		20	13.560360
		30	13.560340
		40	13.560320
		50	13.560290
Max.Deviation (MHz)	0.000340	Max.Deviation (MHz)	0.000410
Max.Deviation (ppm)	25.0737	Max.Deviation (ppm)	30.2360
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



## Appendix C. Test Results of Radiated Test Items

### C.1 Test Result of Field Strength of Fundamental Emissions

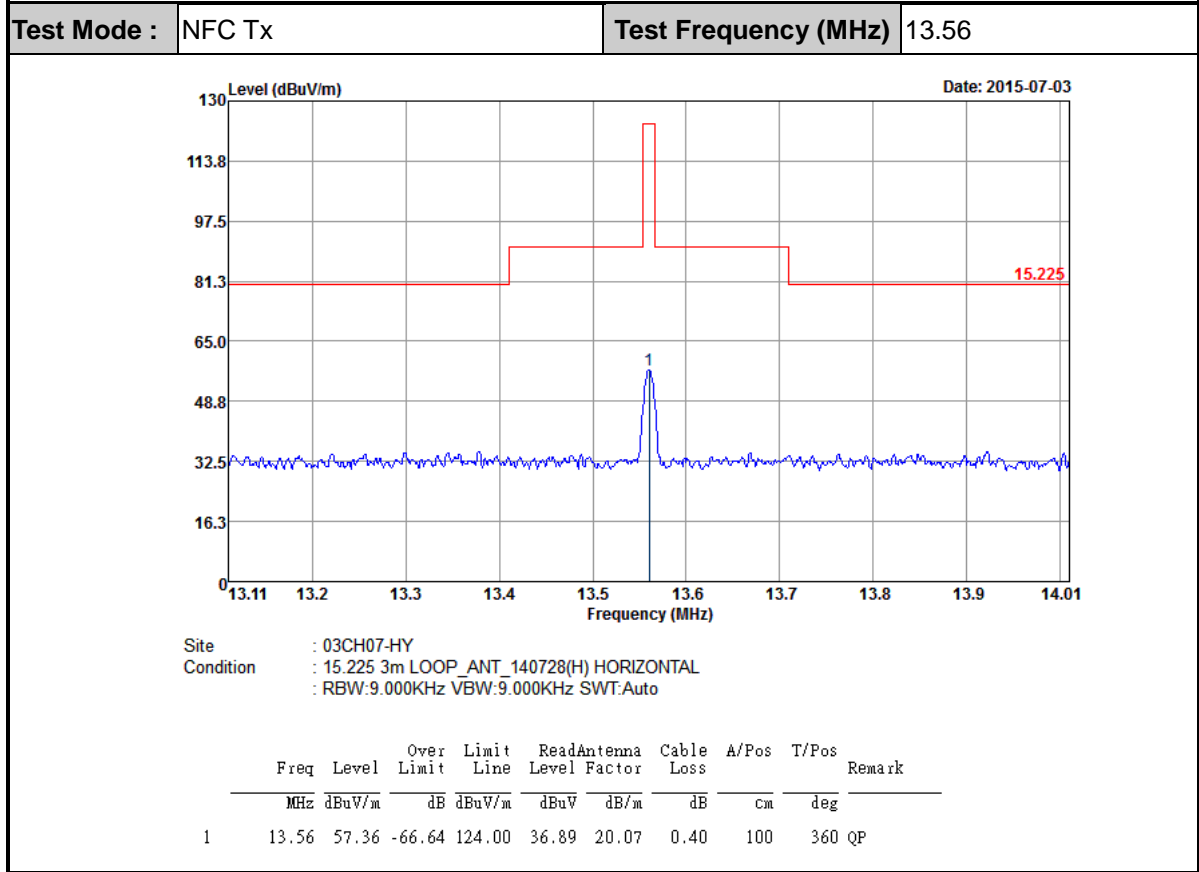

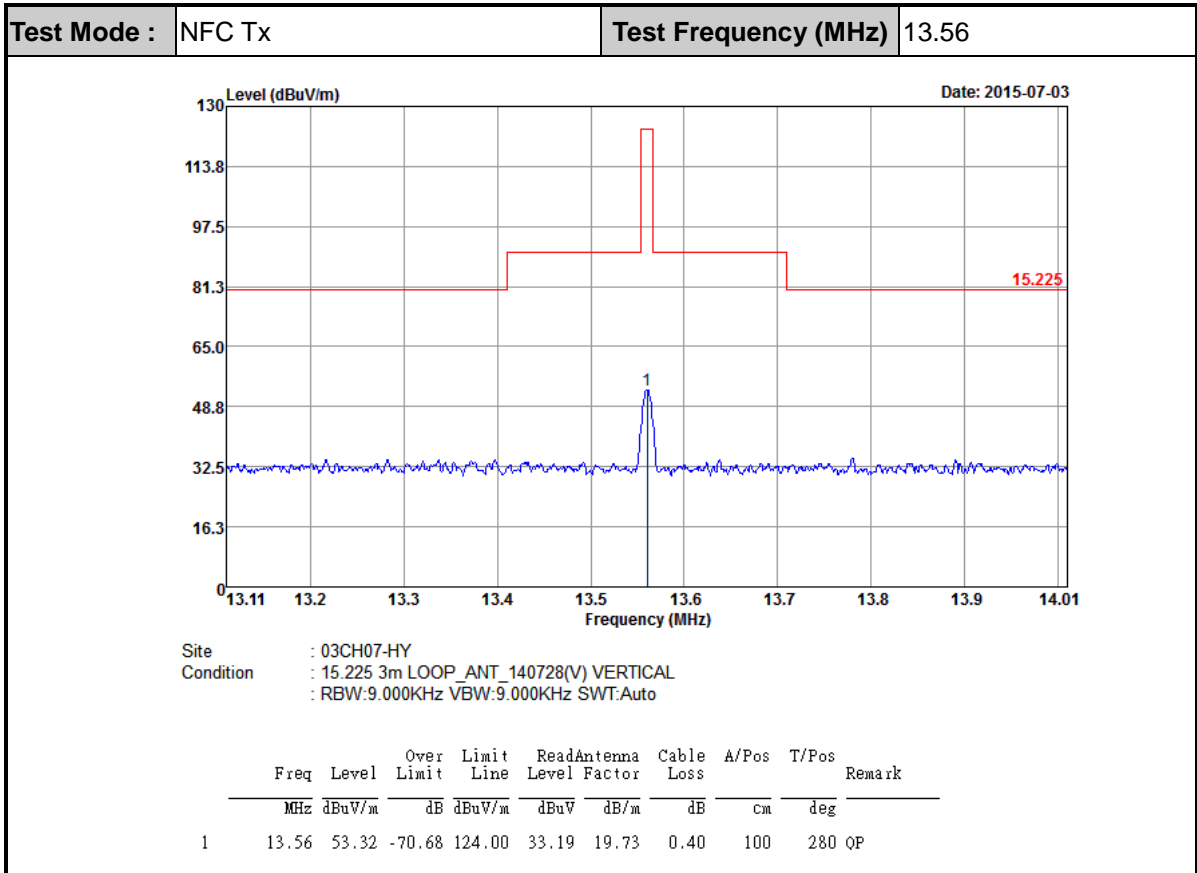

**Note:**

1. All NFC's spurious emissions are below 20dB of limits.
2. The tests were performed with Adapter, Battery, Earphone 1, USB Cable, and SIM 1.



C.2 Results of Radiated Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx			Polarization :		Horizontal		
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.05383	33.99	-78.99	112.98	13.69	20.01	0.29			Average
0.06216	22.17	-89.56	111.73	1.87	20.01	0.29			Average
0.1078	28.43	-78.52	106.95	8.18	19.96	0.29			QP
0.11404	22.02	-84.44	106.46	1.79	19.94	0.29			Average
0.47402	47	-47.09	94.09	26.83	19.88	0.29			Average
6.731	49.2	-20.8	70	28.86	19.97	0.37	100	63	QP
11.448	35.87	-34.13	70	15.41	20.07	0.39			QP
13.56	57.57	-12.43	70	37.1	20.07	0.4			QP
20.077	48.9	-21.1	70	28.03	20.44	0.43			QP
26.61	37.96	-32.04	70	16.8	20.68	0.48			QP

Test Mode :		NFC Tx			Polarization :		Vertical		
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.05398	32.89	-80.07	112.96	12.57	20.03	0.29			Average
0.06294	22.01	-89.62	111.63	1.69	20.03	0.29			Average
0.10776	26.89	-80.07	106.96	6.61	19.99	0.29			QP
0.12992	21.37	-83.96	105.33	1.12	19.96	0.29			Average
0.4492	47.89	-46.67	94.56	27.7	19.9	0.29			Average
3.577	41.44	-28.56	70	21.12	19.97	0.35			QP
12.808	36.12	-33.88	70	15.96	19.76	0.4			QP
13.56	52.78	-17.22	70	32.65	19.73	0.4			QP
20.041	44.08	-25.92	70	23.72	19.93	0.43	100	165	QP
26.61	37.63	-32.37	70	17.06	20.09	0.48			QP

Note:

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
- Limit line = specific limits (dBμV) + distance extrapolation factor.
- The tests were performed with Adapter, Battery, Earphone 1, USB Cable, and SIM 1.



C.3 Results of Radiated Emissions (30MHz~1GHz)

Test Mode :		NFC Tx			Polarization :		Horizontal			
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.53	25.44	-14.56	40	41.57	13.3	1.77	31.2			Peak
142.59	26.25	-17.25	43.5	43.24	11.5	2.61	31.1			Peak
259.23	18.28	-27.72	46	32.48	13.84	2.96	31			Peak
510.7	21.34	-24.66	46	29.99	18.1	3.89	30.64			Peak
629	24.17	-21.83	46	30.11	20.38	4.22	30.54			Peak
895	31.77	-14.23	46	34.37	23.05	4.66	30.31	112	56	Peak

Test Mode :		NFC Tx			Polarization :		Vertical			
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
67.8	22.75	-17.25	40	45.71	6.24	2.06	31.26			Peak
201.45	15.3	-28.2	43.5	34.59	9.12	2.69	31.1			Peak
262.47	16.2	-29.8	46	30.37	13.67	3.16	31			Peak
474.3	21.07	-24.93	46	30.56	17.54	3.77	30.8			Peak
563.2	23.01	-22.99	46	29.86	19.89	4.01	30.75			Peak
871.2	27.58	-18.42	46	30.29	22.99	4.66	30.36	103	136	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The tests were performed with Adapter, Battery, Earphone 1, USB Cable, and SIM 1.