



# FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.  
EQUIPMENT : GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII  
a/b/g/n/ac, ANT+, and NFC  
BRAND NAME : Sony  
FCC ID : PY7-PM0900  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jul. 16, 2015 and testing was completed on Aug. 15, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0900

Page Number : 1 of 40

Report Issued Date : Aug. 31, 2015

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.0



## TABLE OF CONTENTS

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                    | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                              | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                               | <b>5</b>  |
| 1.1 Applicant .....                                              | 5         |
| 1.2 Manufacturer .....                                           | 5         |
| 1.3 Product Feature of Equipment Under Test .....                | 5         |
| 1.4 Modification of EUT .....                                    | 6         |
| 1.5 Testing Location .....                                       | 6         |
| 1.6 Applicable Standards .....                                   | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>        | <b>8</b>  |
| 2.1 Descriptions of Test Mode .....                              | 8         |
| 2.2 Test Mode .....                                              | 9         |
| 2.3 Connection Diagram of Test System .....                      | 10        |
| 2.4 Support Unit used in test configuration and system .....     | 11        |
| 2.5 EUT Operation Test Setup .....                               | 11        |
| 2.6 Measurement Results Explanation Example .....                | 11        |
| <b>3 TEST RESULT .....</b>                                       | <b>12</b> |
| 3.1 6dB and 99% Bandwidth Measurement .....                      | 12        |
| 3.2 Peak Output Power Measurement .....                          | 17        |
| 3.3 Power Spectral Density Measurement .....                     | 18        |
| 3.4 Conducted Band Edges and Spurious Emission Measurement ..... | 23        |
| 3.5 Radiated Band Edges and Spurious Emission Measurement .....  | 28        |
| 3.6 AC Conducted Emission Measurement .....                      | 33        |
| 3.7 Antenna Requirements .....                                   | 37        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                       | <b>38</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                         | <b>40</b> |
| <b>APPENDIX A. CONDUCTED TEST RESULTS</b>                        |           |
| <b>APPENDIX B. TEST RESULT OF RADIATED EMISSION</b>              |           |
| <b>APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS</b>              |           |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR571610B  | Rev. 01 | Initial issue of report | Aug. 31, 2015 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | Description                                | Limit                          | Result | Remark                                     |
|----------------|--------------------|--------------------------------------------|--------------------------------|--------|--------------------------------------------|
| 3.1            | 15.247(a)(2)       | 6dB Bandwidth                              | $\geq 0.5\text{MHz}$           | Pass   | -                                          |
| 3.1            | -                  | 99% Bandwidth                              | -                              | Pass   | -                                          |
| 3.2            | 15.247(b)(1)       | Peak Output Power                          | $\leq 30\text{dBm}$            | Pass   | -                                          |
| 3.3            | 15.247(e)          | Power Spectral Density                     | $\leq 8\text{dBm}/3\text{kHz}$ | Pass   | -                                          |
| 3.4            | 15.247(d)          | Conducted Band Edges and Spurious Emission | $\leq 20\text{dBc}$            | Pass   | -                                          |
| 3.5            | 15.247(d)          | Radiated Band Edges and Spurious Emission  | 15.209(a) & 15.247(d)          | Pass   | Under limit<br>11.99 dB at<br>2485.080 MHz |
| 3.6            | 15.207             | AC Conducted Emission                      | 15.207(a)                      | Pass   | Under limit<br>21.00 dB at<br>0.630 MHz    |
| 3.7            | 15.203 & 15.247(b) | Antenna Requirement                        | N/A                            | Pass   | -                                          |



# 1 General Description

## 1.1 Applicant

**Sony Mobile Communications Inc.**  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

**Sony Mobile Communications Inc.**  
1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, ANT+, NFC and GPS

| Product Specification subjective to this standard |                                           |
|---------------------------------------------------|-------------------------------------------|
| Antenna Type/Gain                                 | Monopole Antenna type with gain -1.60 dBi |

| EUT Information List   |            |              |            |                            |
|------------------------|------------|--------------|------------|----------------------------|
| IMEI                   | HW Version | SW Version   | S/N        | Performed Test Item        |
| IMEI : 004402455309058 | A          | 32.0.A.0.323 | CB5A276KW9 | RF conducted measurement   |
| IMEI : 004402455308407 |            |              | CB5A27412G | Radiated Spurious Emission |
| IMEI : 004402455306211 |            |              | CB5A2741RU | Conducted Emission         |

| Accessory List |                                                                                            |
|----------------|--------------------------------------------------------------------------------------------|
| AC Adapter     | Model No. : UCH20                                                                          |
|                | Type No. : AC-0061-US                                                                      |
|                | S/N :                                                                                      |
|                | 5815W22500081 (for radiated spurious emission)<br>2115W15500021 (for conducted emission)   |
| Earphone       | Model No. : MDR-NC31E                                                                      |
|                | Type No. : AG-1110                                                                         |
| USB Cable      | Model No. : UCB11                                                                          |
|                | Type No. : AI-0120                                                                         |
|                | S/N :                                                                                      |
|                | 10115W02400028C(for radiated spurious emission)<br>1522A73000065C4(for conducted emission) |

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

|                    |                                                                                                                                                                  |         |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                       |         |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-3456<br>FAX: +886-3-328-4978 |         |
| Test Site No.      | Sporton Site No.                                                                                                                                                 |         |
|                    | TH05-HY                                                                                                                                                          | CO05-HY |

**Note:** The test site complies with ANSI C63.4 2009 requirement.



|                           |                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                            |
| <b>Test Site Location</b> | No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd.,<br>Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.<br>TEL: +886-3-327-0855 |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                               |
|                           | 03CH10-HY                                                                                                             |

**Note:** The test site complies with ANSI C63.4 2009 requirement.

## 1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

| Channel | Frequency | Bluetooth 4.0 – LE RF Output Power |
|---------|-----------|------------------------------------|
|         |           | Data Rate / Modulation             |
|         |           | GFSK                               |
|         |           | 1Mbps                              |
| Ch00    | 2402MHz   | 6.89 dBm                           |
| Ch19    | 2440MHz   | 7.55 dBm                           |
| Ch39    | 2480MHz   | 7.22 dBm                           |

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


| Summary table of Test Cases |                                                                         |
|-----------------------------|-------------------------------------------------------------------------|
| Test Item                   | Data Rate / Modulation                                                  |
|                             | Bluetooth 4.0 – LE / GFSK                                               |
| Conducted<br>TCs            | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps                                |
|                             | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps                                |
|                             | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps                                |
| Radiated<br>TCs             | Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps                                |
|                             | Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps                                |
|                             | Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps                                |
| AC<br>Conducted<br>Emission | Mode 1 :: Bluetooth Link + USB Cable( Charging from Adapter) + Earphone |

## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

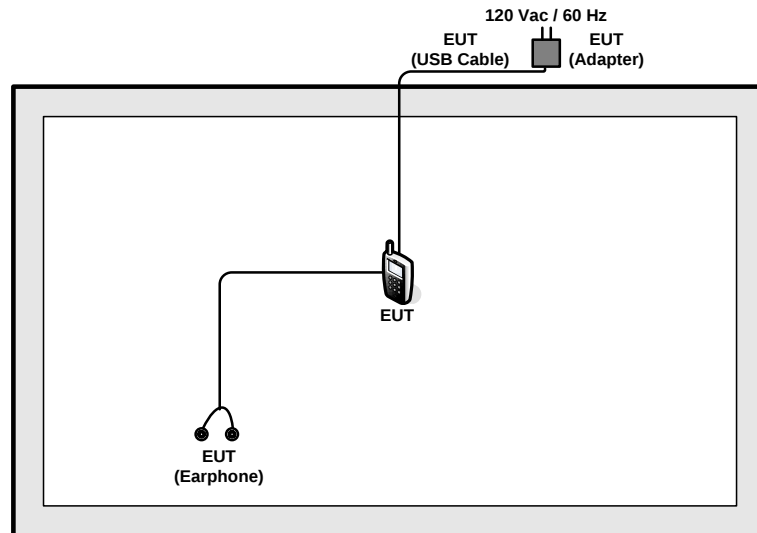

### <AC Conducted Emission Mode>

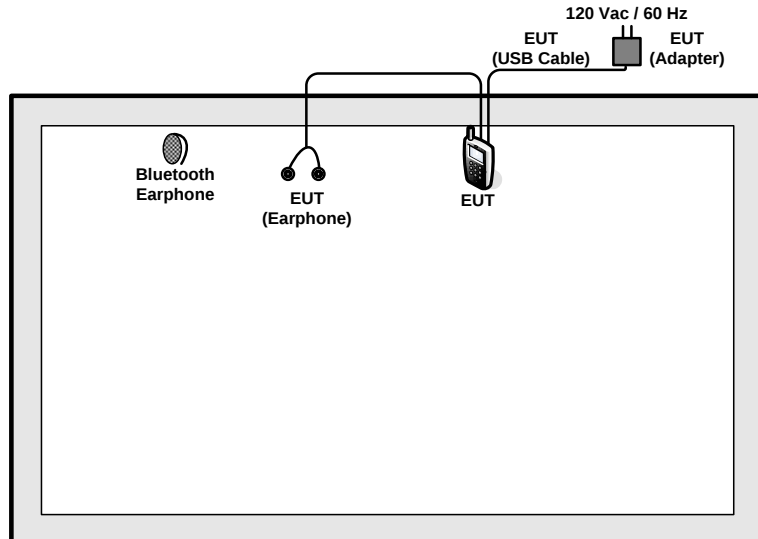

## 2.4 Support Unit used in test configuration and system

| Item | Equipment          | Trade Name | Model Name | FCC ID     | Data Cable        | Power Cord |
|------|--------------------|------------|------------|------------|-------------------|------------|
| 1.   | Bluetooth Earphone | Sony       | SBH20      | PY7-RD0010 | Unshielded, 0.75m | N/A        |
| 2.   | SD Card            | SanDisk    | MicroSD HC | FCC DoC    | N/A               | N/A        |

## 2.5 EUT Operation Test Setup

For Bluetooth function test items, an engineering test program was provided and enabled to make EUT transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

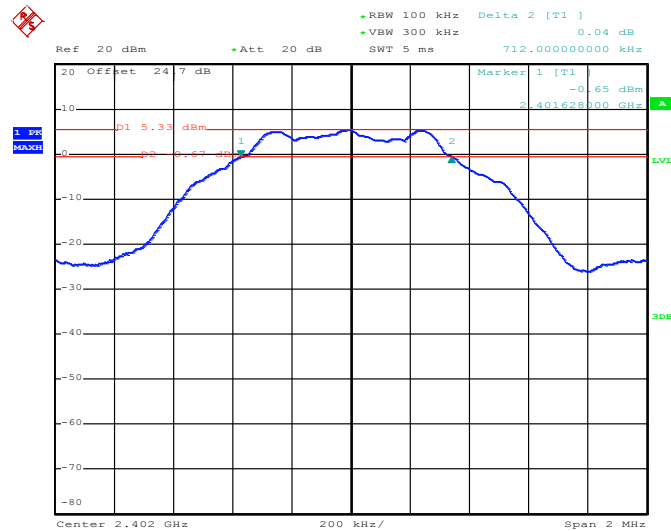


Date: 21.JUL.2015 11:48:32

### 6 dB Bandwidth Plot on Channel 19

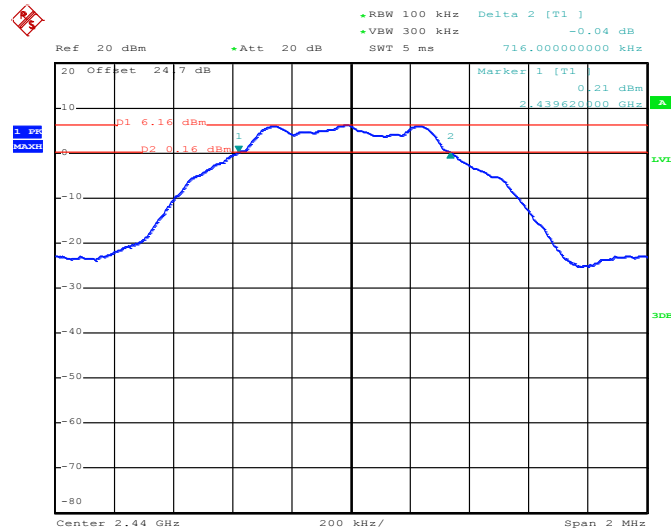

Date: 21.JUL.2015 11:53:50

### 6 dB Bandwidth Plot on Channel 39

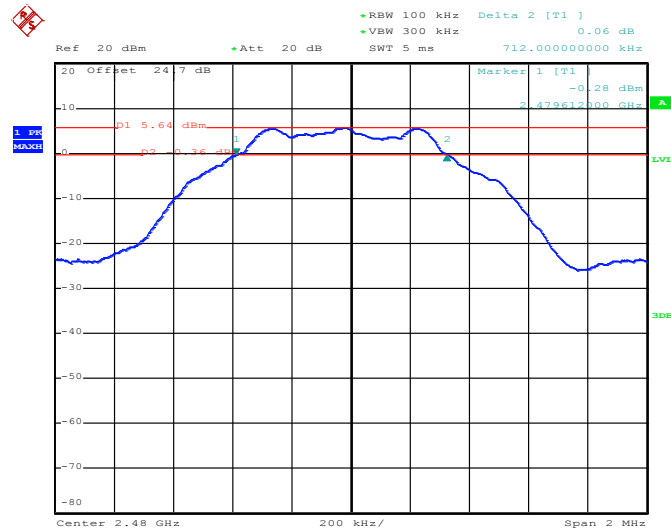


Date: 21.JUL.2015 11:56:48



### 3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


#### 99% Bandwidth Plot on Channel 00

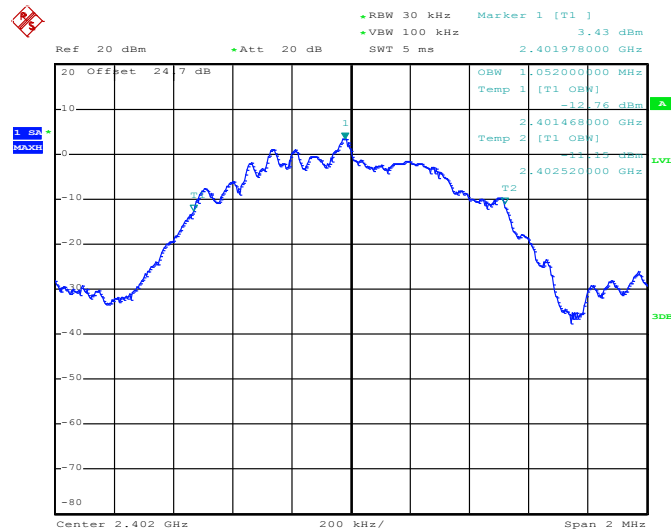

Date: 21.JUL.2015 11:51:17




### 99% Occupied Bandwidth Plot on Channel 19

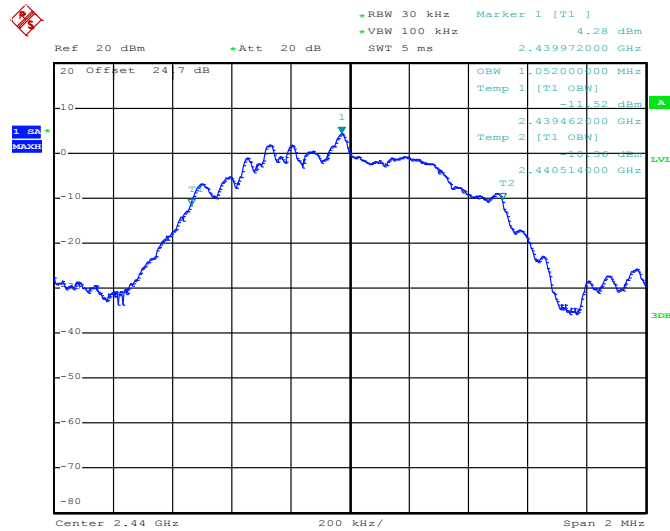

Date: 21.JUL.2015 11:55:36

### 99% Occupied Bandwidth Plot on Channel 39

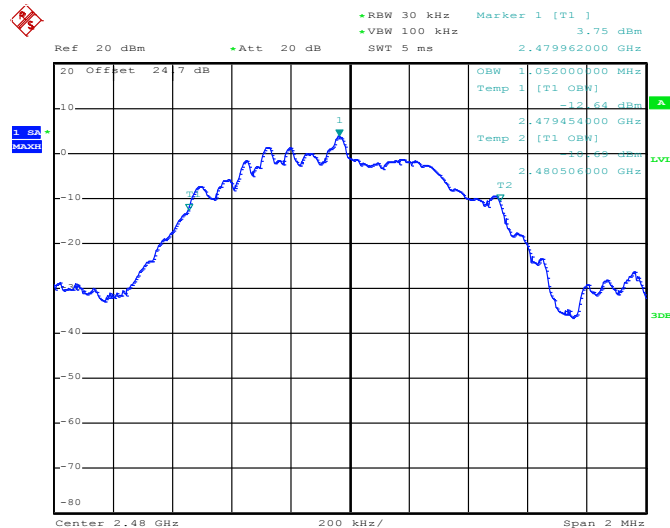

Date: 21.JUL.2015 11:57:54

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

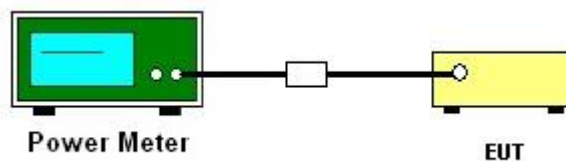

### 3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

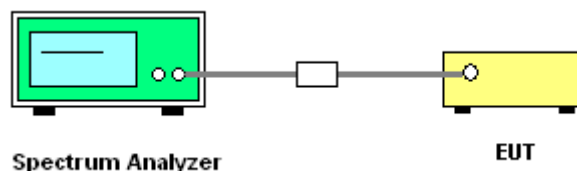




### 3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

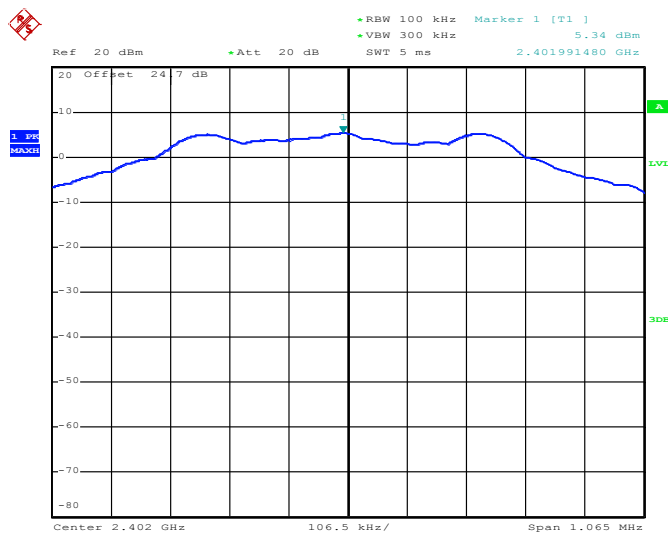

Date: 21.JUL.2015 11:49:27




PSD 100kHz Plot on Channel 19

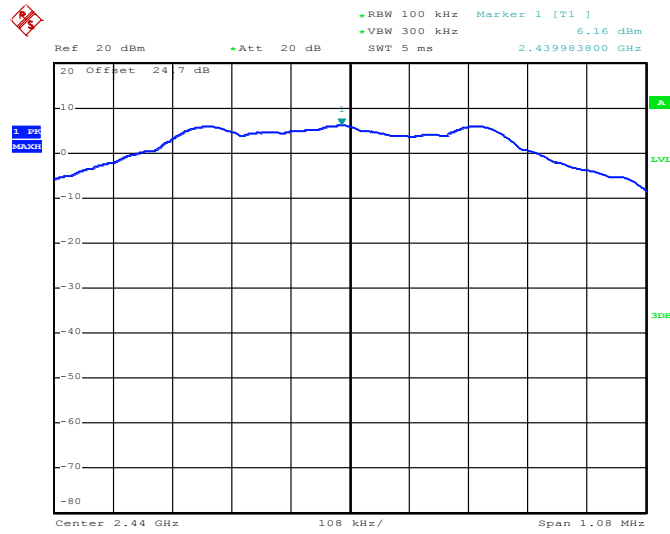

Date: 21.JUL.2015 11:54:35

PSD 100kHz Plot on Channel 39

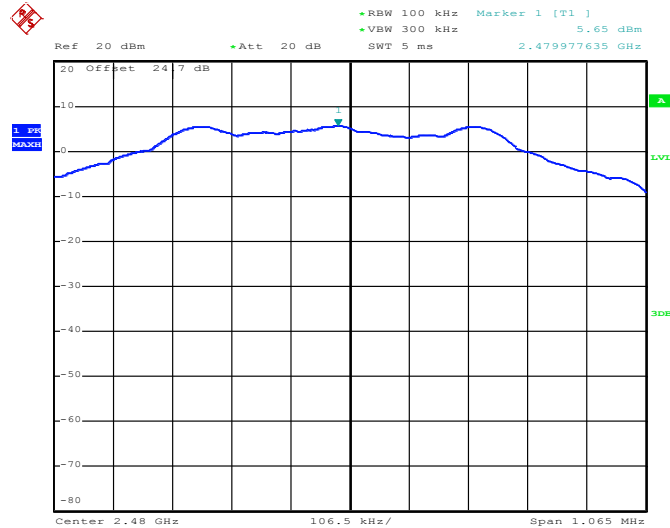


Date: 21.JUL.2015 11:57:38



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

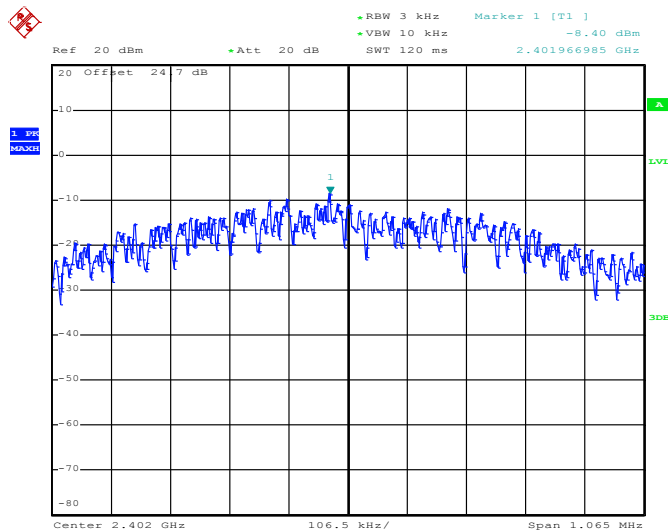

Date: 21.JUL.2015 11:48:54




PSD 3kHz Plot on Channel 19

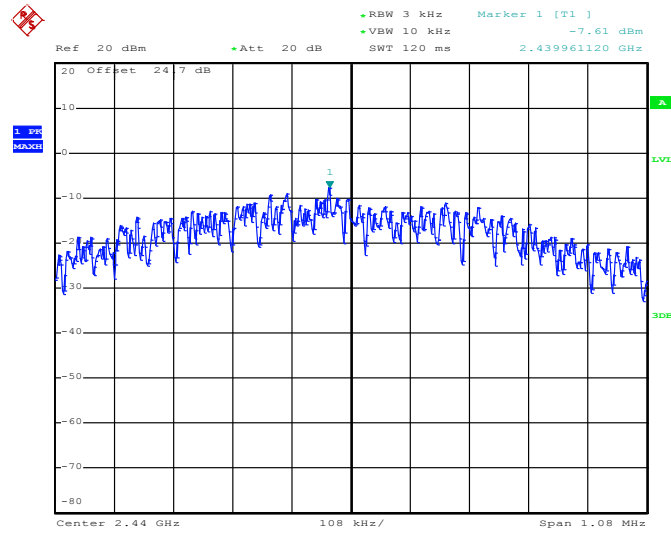

Date: 21.JUL.2015 11:54:13

PSD 3kHz Plot on Channel 39

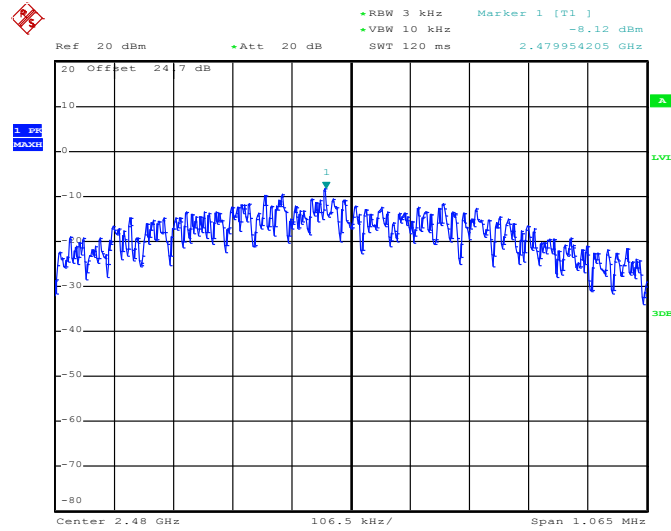

Date: 21.JUL.2015 11:57:17

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


#### 3.4.4 Test Setup

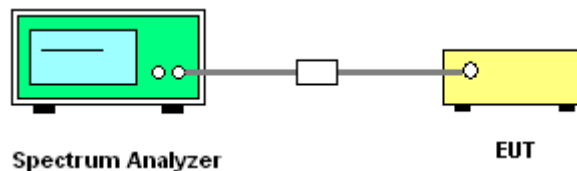




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 00

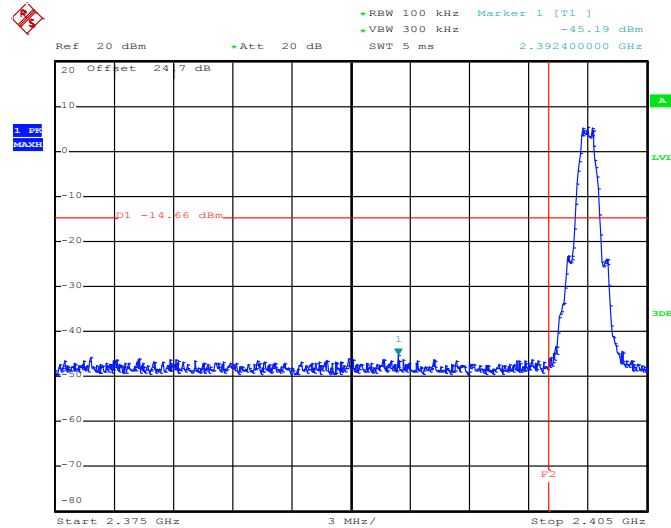

Date: 21.JUL.2015 11:49:58

#### High Band Edge Plot on Channel 39

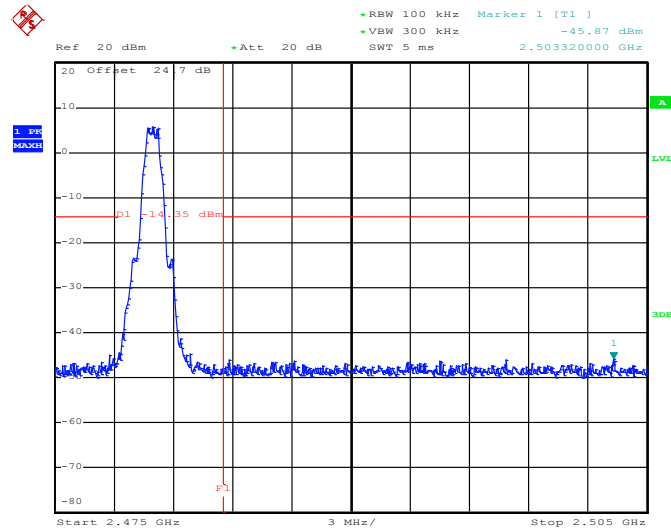


Date: 21.JUL.2015 11:58:14




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

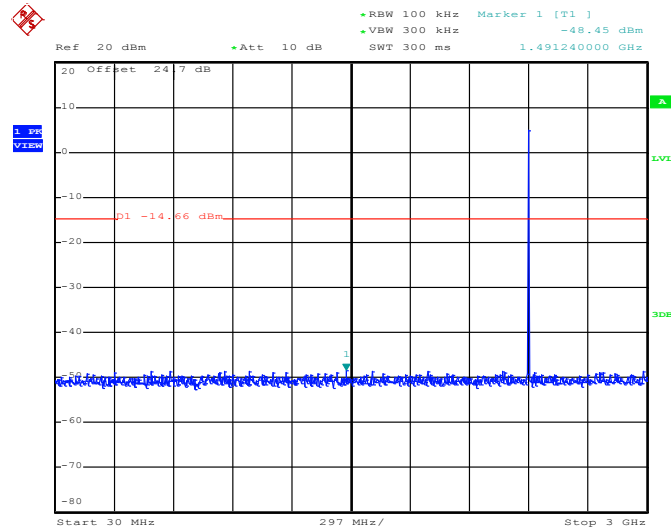

Date: 21.JUL.2015 11:50:37


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

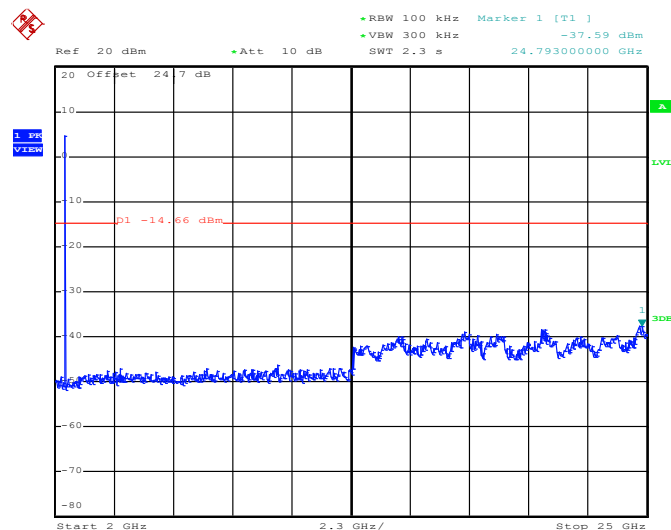

Date: 21.JUL.2015 11:50:56




## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

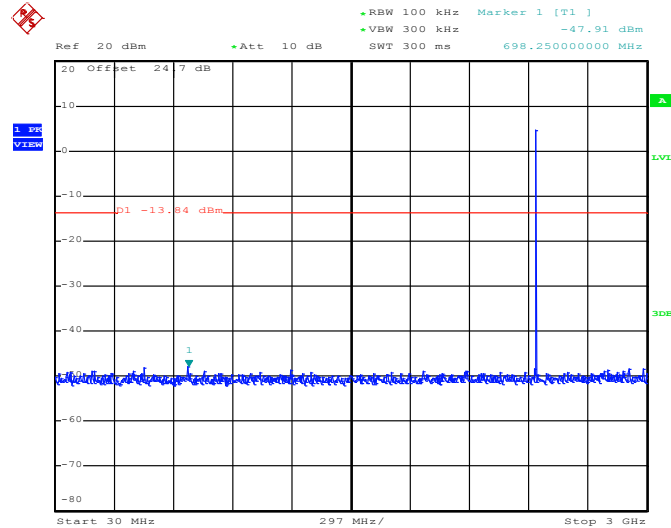

Date: 21.JUL.2015 11:55:00


## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

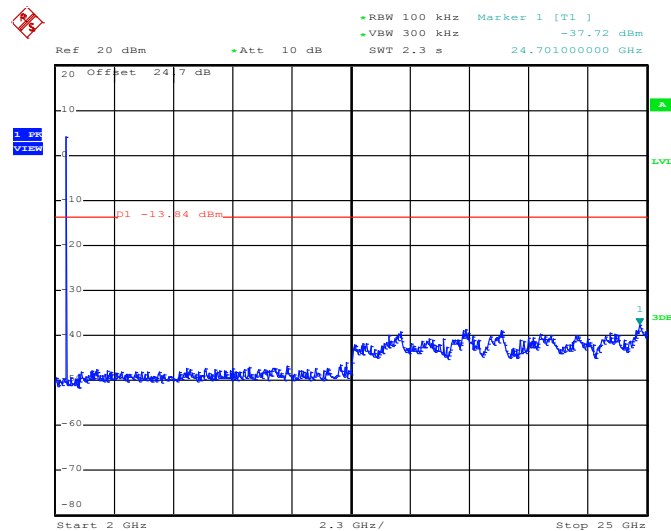

Date: 21.JUL.2015 11:55:18




## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

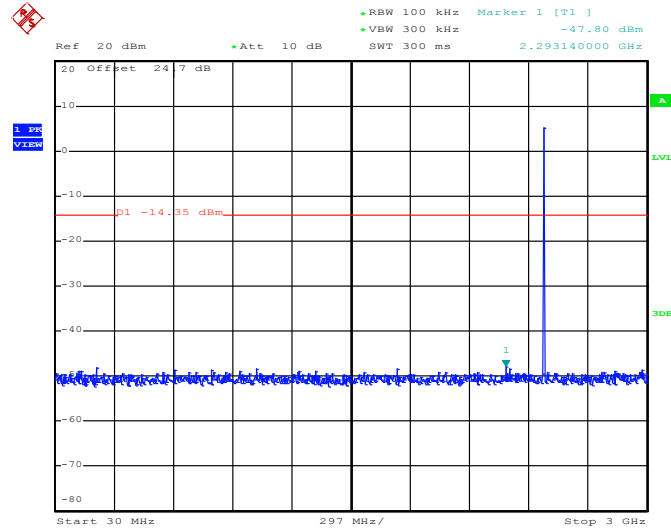

Date: 21.JUL.2015 11:58:37

## Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

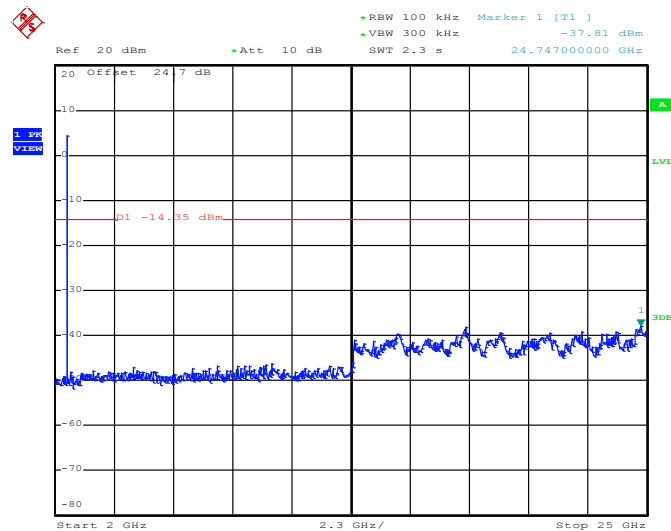

Date: 21.JUL.2015 11:58:55



### **3.5 Radiated Band Edges and Spurious Emission Measurement**

#### **3.5.1 Limit of Radiated Band Edges and Spurious Emission**

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| <b>Frequency<br/>(MHz)</b> | <b>Field Strength<br/>(microvolts/meter)</b> | <b>Measurement Distance<br/>(meters)</b> |
|----------------------------|----------------------------------------------|------------------------------------------|
| 0.009 – 0.490              | 2400/F(kHz)                                  | 300                                      |
| 0.490 – 1.705              | 24000/F(kHz)                                 | 30                                       |
| 1.705 – 30.0               | 30                                           | 30                                       |
| 30 – 88                    | 100                                          | 3                                        |
| 88 – 216                   | 150                                          | 3                                        |
| 216 - 960                  | 200                                          | 3                                        |
| Above 960                  | 500                                          | 3                                        |

#### **3.5.2 Measuring Instruments**

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - VBW = 10 Hz, when duty cycle is no less than 98 percent.
  - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Band               | Duty Cycle(%) | T( $\mu$ s) | 1/T(kHz) | VBW Setting |
|--------------------|---------------|-------------|----------|-------------|
| Bluetooth 4.0 - LE | 62.9          | 390         | 2.564    | 3kHz        |

### 3.5.4 Test Setup


For radiated emissions below 30MHz

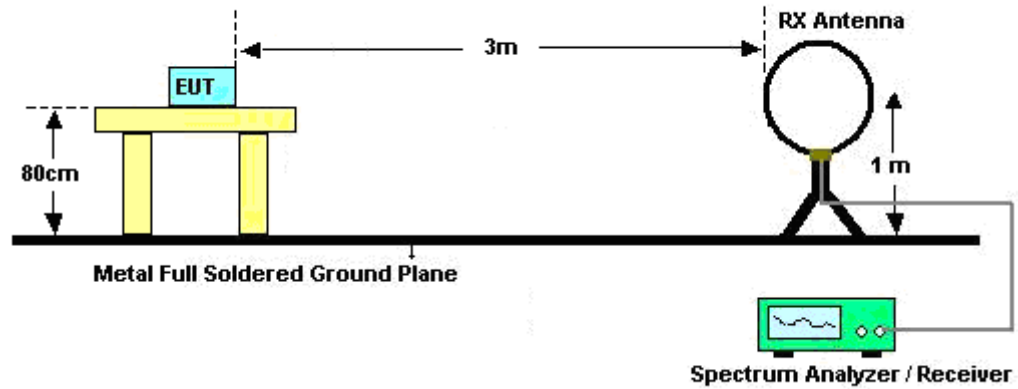

For radiated emissions from 30MHz to 1GHz

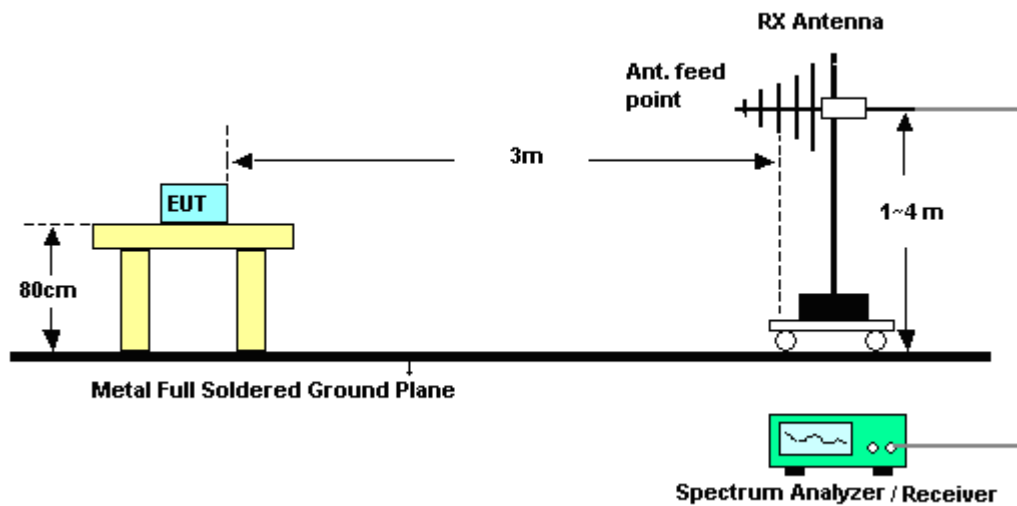

For radiated emissions above 1GHz

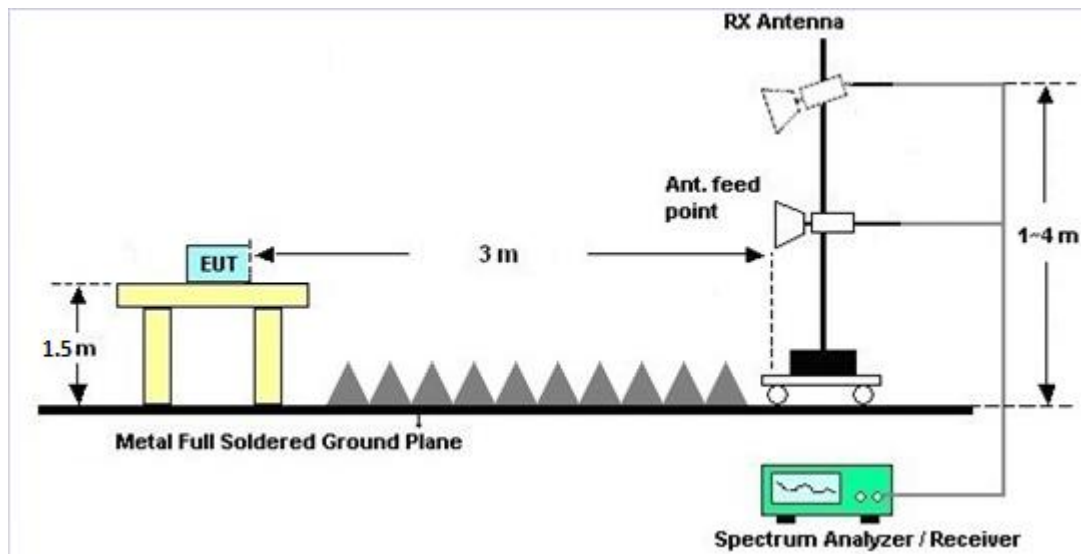

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A.

### **3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

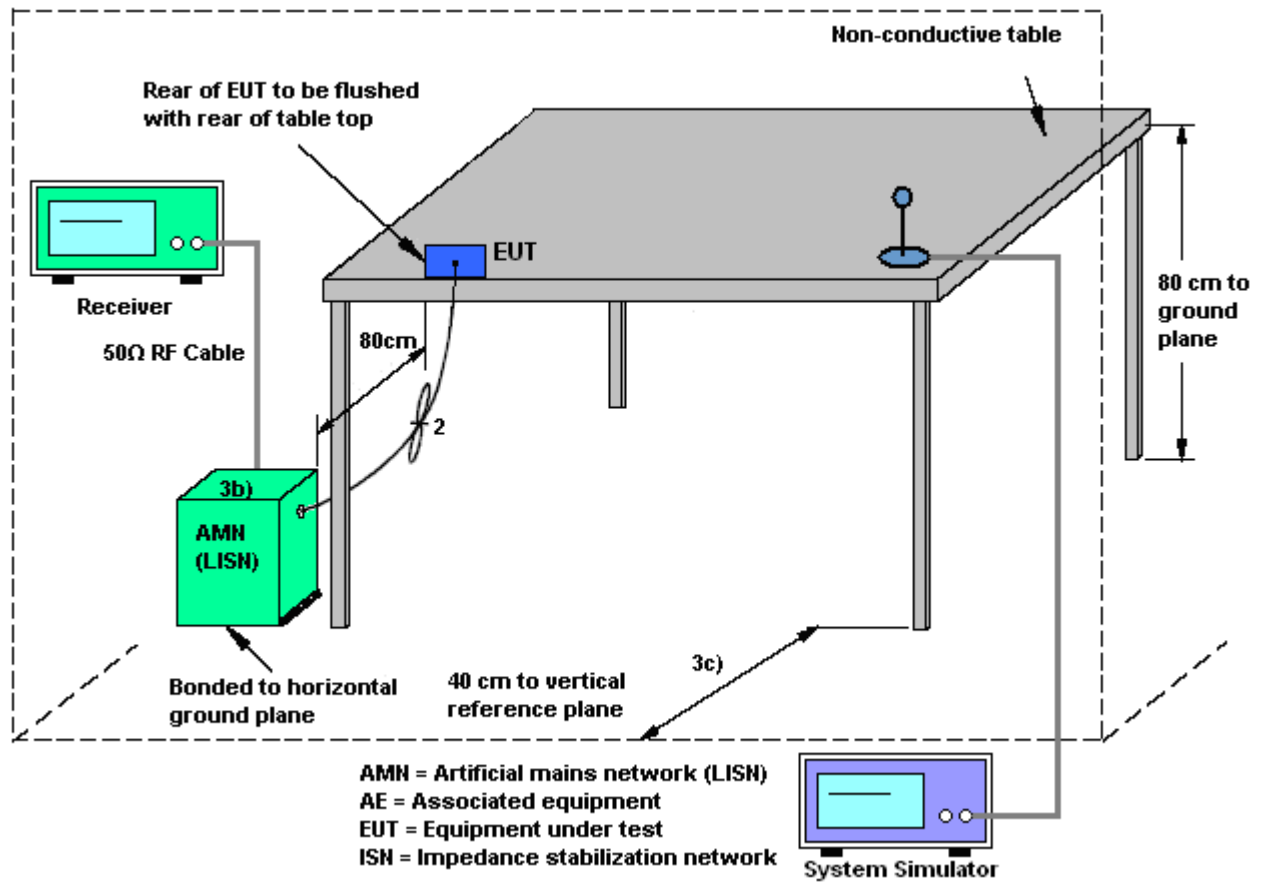

### 3.6.5 Test Result of AC Conducted Emission

|                 |                                                               |                     |         |
|-----------------|---------------------------------------------------------------|---------------------|---------|
| Test Mode :     | Mode 1                                                        | Temperature :       | 23~25°C |
| Test Engineer : | Eric Jeng                                                     | Relative Humidity : | 58~61%  |
| Test Voltage :  | 120Vac / 60Hz                                                 | Phase :             | Line    |
| Function Type : | Bluetooth Link + USB Cable( Charging from Adapter) + Earphone |                     |         |

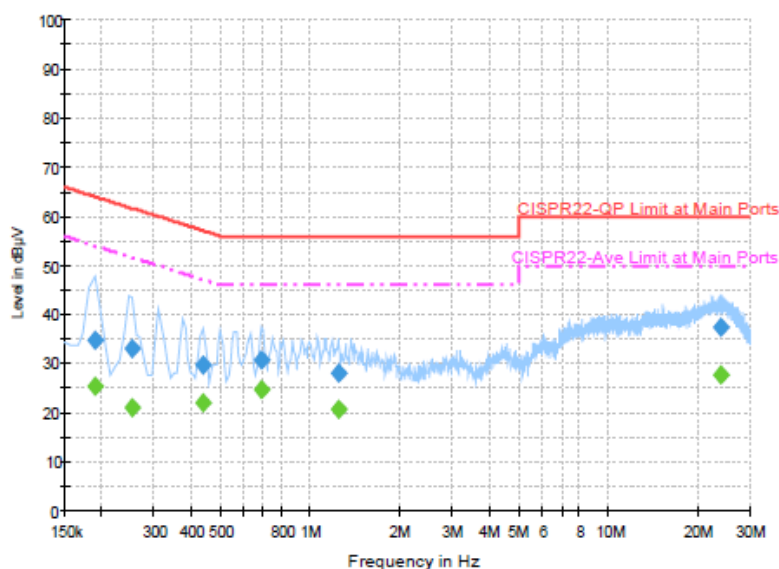

#### Final Result : QuasiPeak


| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.190000        | 34.9             | Off    | L1   | 19.5       | 29.1        | 64.0         |
| 0.254000        | 33.2             | Off    | L1   | 19.4       | 28.4        | 61.6         |
| 0.438000        | 29.6             | Off    | L1   | 19.5       | 27.5        | 57.1         |
| 0.686000        | 30.8             | Off    | L1   | 19.6       | 25.2        | 56.0         |
| 1.246000        | 27.9             | Off    | L1   | 19.6       | 28.1        | 56.0         |
| 24.006000       | 37.3             | Off    | L1   | 20.0       | 22.7        | 60.0         |

#### Final Result : Average

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.190000        | 25.5           | Off    | L1   | 19.5       | 28.5        | 54.0         |
| 0.254000        | 21.1           | Off    | L1   | 19.4       | 30.5        | 51.6         |
| 0.438000        | 22.2           | Off    | L1   | 19.5       | 24.9        | 47.1         |
| 0.686000        | 24.8           | Off    | L1   | 19.6       | 21.2        | 46.0         |
| 1.246000        | 20.9           | Off    | L1   | 19.6       | 25.1        | 46.0         |
| 24.006000       | 27.9           | Off    | L1   | 20.0       | 22.1        | 50.0         |



|                 |                                                               |                     |         |
|-----------------|---------------------------------------------------------------|---------------------|---------|
| Test Mode :     | Mode 1                                                        | Temperature :       | 23~25   |
| Test Engineer : | Eric Jeng                                                     | Relative Humidity : | 58~61   |
| Test Voltage :  | 120Vac / 60Hz                                                 | Phase :             | Neutral |
| Function Type : | Bluetooth Link + USB Cable( Charging from Adapter) + Earphone |                     |         |

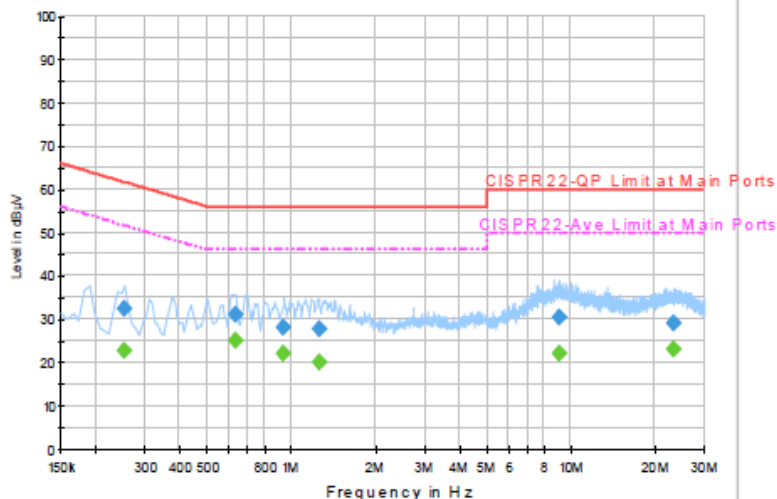

## Final Result : QuasiPeak

| Frequency (MHz) | QuasiPeak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.254000        | 32.5             | Off    | N    | 19.4       | 29.1        | 61.6         |
| 0.630000        | 30.9             | Off    | N    | 19.5       | 25.1        | 56.0         |
| 0.942000        | 28.2             | Off    | N    | 19.6       | 27.8        | 56.0         |
| 1.262000        | 27.8             | Off    | N    | 19.6       | 28.2        | 56.0         |
| 9.070000        | 30.3             | Off    | N    | 19.9       | 29.7        | 60.0         |
| 23.374000       | 29.0             | Off    | N    | 20.1       | 31.0        | 60.0         |

## Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.254000        | 22.7           | Off    | N    | 19.4       | 28.9        | 51.6         |
| 0.630000        | 25.0           | Off    | N    | 19.5       | 21.0        | 46.0         |
| 0.942000        | 22.1           | Off    | N    | 19.6       | 23.9        | 46.0         |
| 1.262000        | 20.1           | Off    | N    | 19.6       | 25.9        | 46.0         |
| 9.070000        | 22.1           | Off    | N    | 19.9       | 27.9        | 50.0         |
| 23.374000       | 23.2           | Off    | N    | 20.1       | 26.8        | 50.0         |



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

| Instrument        | Manufacturer       | Model No.                  | Serial No.                     | Characteristics | Calibration Date | Test Date                       | Due Date      | Remark                   |
|-------------------|--------------------|----------------------------|--------------------------------|-----------------|------------------|---------------------------------|---------------|--------------------------|
| Power Meter       | Agilent            | E4416A                     | GB412923<br>44                 | 300MHz~40GHz    | Jan. 14, 2015    | Jul. 20, 2015~<br>Jul. 21, 2015 | Jan. 13, 2016 | Conducted<br>(TH05-HY)   |
| Power Sensor      | Agilent            | E9327A                     | US404415<br>48                 | 300MHz~40GHz    | Jan. 14, 2015    | Jul. 20, 2015~<br>Jul. 21, 2015 | Jan. 13, 2016 | Conducted<br>(TH05-HY)   |
| Spectrum Analyzer | Rohde & Schwarz    | FSP40                      | 100055                         | 9kHz-40GHz      | Jun. 18, 2015    | Jul. 20, 2015~<br>Jul. 21, 2015 | Jun. 17, 2016 | Conducted<br>(TH05-HY)   |
| Hygrometer        | Testo              | 608-H1                     | 34897199                       | N/A             | May 04, 2015     | Jul. 20, 2015~<br>Jul. 21, 2015 | May 03, 2016  | Conducted<br>(TH05-HY)   |
| RF Cable          | HARBOUR INDUSTRIES | LL142                      | Infinet<br>CA3601-3<br>601-DLL | 0.1MHz~40GHz    | Mar. 06, 2015    | Jul. 20, 2015~<br>Jul. 21, 2015 | Mar. 05, 2016 | Conducted<br>(TH05-HY)   |
| Horn Antenna      | SCHWARZBECK        | BBHA 9170                  | BBHA9170<br>584                | 18GHz- 40GHz    | Nov. 03, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 02, 2015 | Radiation<br>(03CH10-HY) |
| Loop Antenna      | TESEQ              | HLA 6120                   | 31244                          | 9kHz~30MHz      | Feb. 02, 2015    | Aug. 08, 2015~<br>Aug. 12, 2015 | Feb. 01, 2016 | Radiation<br>(03CH10-HY) |
| RF Cable          | HUBER + SUHNER     | SUCOFLEX<br>104            | MY842095<br>21                 | 9kHz~1GHz       | Dec. 04, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Dec. 03, 2015 | Radiation<br>(03CH10-HY) |
| Amplifier         | SONOMA             | 310N                       | 187311                         | 9kHz~1GHz       | Nov. 24, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 23, 2015 | Radiation<br>(03CH10-HY) |
| Bilog Antenna     | TESEQ              | CBL 6111D                  | 35413                          | 30MHz~1GHz      | Oct. 24, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Oct. 23, 2015 | Radiation<br>(03CH10-HY) |
| EMI Test Receiver | Keysight           | N9038A                     | MY541300<br>85                 | 20Hz ~ 8.4GHz   | Nov. 05, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 04, 2015 | Radiation<br>(03CH10-HY) |
| Horn Antenna      | SCHWARZBECK        | BBHA 9120 D                | 9120D-132<br>5                 | 1GHz ~ 18GHz    | Oct. 03, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Oct. 02, 2015 | Radiation<br>(03CH10-HY) |
| Hygrometer        | TECPEL             | DTM-303B                   | TP140320                       | N/A             | Nov. 17, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 16, 2015 | Radiation<br>(03CH10-HY) |
| Preamplifier      | Keysight           | 83017A                     | MY532700<br>78                 | 1GHz~26.5GHz    | Nov. 20, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 19, 2015 | Radiation<br>(03CH10-HY) |
| Preamplifier      | MITEQ              | AMF-7D-0010<br>1800-30-10P | 1902246                        | 1GHz~18GHz      | Nov. 25, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 24, 2015 | Radiation<br>(03CH10-HY) |
| Test Software     | Audix              | E3                         | 6.2009-8-2<br>4                | N/A             | N/A              | Aug. 08, 2015~<br>Aug. 12, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Filter            | Wainwright         | WLKS1200-8<br>SS           | SN3                            | 1.2G Low Pass   | Oct. 01, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Sep. 30, 2015 | Radiation<br>(03CH10-HY) |
| Filter            | Microwave          | H3G018G1                   | SN477220                       | 3.0G High Pass  | Oct. 01, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Sep. 30, 2015 | Radiation<br>(03CH10-HY) |
| Spectrum Analyzer | Keysight           | N9010A                     | MY542004<br>85                 | 10Hz ~ 44GHz    | Oct. 14, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Oct. 13, 2015 | Radiation<br>(03CH10-HY) |



| Instrument        | Manufacturer    | Model No.               | Serial No.                       | Characteristics               | Calibration Date | Test Date                       | Due Date      | Remark                   |
|-------------------|-----------------|-------------------------|----------------------------------|-------------------------------|------------------|---------------------------------|---------------|--------------------------|
| RF Cable          | HUBER + SUHNER  | SUCOFLEX 104            | MY249564<br>MY249524<br>MY283184 | 25GHz~40GHz                   | Nov. 06, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 05, 2015 | Radiation<br>(03CH10-HY) |
| RF Cable          | HUBER + SUHNER  | SUCOFLEX 104            | MY249564<br>MY249524<br>MY283184 | 30MHz~1GHz                    | Nov. 06, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 05, 2015 | Radiation<br>(03CH10-HY) |
| RF Cable          | HUBER + SUHNER  | SUCOFLEX 104            | MY249564<br>MY249524<br>MY283184 | 1GHz~25GHz                    | Nov. 06, 2014    | Aug. 08, 2015~<br>Aug. 12, 2015 | Nov. 05, 2015 | Radiation<br>(03CH10-HY) |
| Controller        | EMEC            | EM 1000                 | N/A                              | Control Turn table & Ant Mast | N/A              | Aug. 08, 2015~<br>Aug. 12, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Antenna Mast      | EMEC            | AM-BS-4500-B            | N/A                              | 1~4m                          | N/A              | Aug. 08, 2015~<br>Aug. 12, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Turn Table        | EMEC            | TT 2200                 | N/A                              | 0-360 degree                  | N/A              | Aug. 08, 2015~<br>Aug. 12, 2015 | N/A           | Radiation<br>(03CH10-HY) |
| Preamplifier      | MITEQ           | JS44-180040<br>00-33-8P | 1840917                          | 18GHz ~ 40GHz                 | Jun. 02, 2015    | Aug. 08, 2015~<br>Aug. 12, 2015 | Jun. 01, 2016 | Radiation<br>(03CH10-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESCS 30                 | 100356                           | 9kHz – 2.75GHz                | Dec. 01, 2014    | Aug. 15, 2015                   | Nov. 30, 2015 | Conduction<br>(CO05-HY)  |
| Hygrometer        | Testo           | 608-H1                  | 34913912                         | N/A                           | Apr. 20, 2015    | Aug. 15, 2015                   | Apr. 19, 2016 | Conduction<br>(CO05-HY)  |
| LISN              | Rohde & Schwarz | ENV216                  | 100080                           | 9kHz~30MHz                    | Dec. 02, 2014    | Aug. 15, 2015                   | Dec. 01, 2015 | Conduction<br>(CO05-HY)  |
| AC Power Source   | ChainTek        | APC-1000W               | N/A                              | N/A                           | N/A              | Aug. 15, 2015                   | N/A           | Conduction<br>(CO05-HY)  |
| LF Cable          | HUBER + SUHNER  | RG-214/U                | LF01                             | N/A                           | Jan. 07, 2015    | Aug. 15, 2015                   | Jan. 06, 2016 | Conduction<br>(CO05-HY)  |
| Test Software     | N/A             | EMC32                   | 8.40.0                           | N/A                           | N/A              | Aug. 15, 2015                   | N/A           | Conduction<br>(CO05-HY)  |



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                            |      |
|----------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 2.26 |
|----------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                            |      |
|----------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 4.90 |
|----------------------------------------------------------------------------|------|



## **Appendix A. Conducted Test Results**

**Bluetooth Low Energy**

|                |                          |                    |       |    |
|----------------|--------------------------|--------------------|-------|----|
| Test Engineer: | Stuart Lin and Tommy Lee | Temperature:       | 22~25 | °C |
| Test Date:     | 2015/7/20 ~ 2015/7/21    | Relative Humidity: | 51~55 | %  |

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | 99% Occupied BW (MHz) | 6dB BW (MHz) | 6dB BW Limit (MHz) | Pass/Fail |
|------|-----------|-----------------|-----|-------------|-----------------------|--------------|--------------------|-----------|
| BLE  | 1Mbps     | 1               | 0   | 2402        | 1.05                  | 0.71         | 0.50               | Pass      |
| BLE  | 1Mbps     | 1               | 19  | 2440        | 1.05                  | 0.72         | 0.50               | Pass      |
| BLE  | 1Mbps     | 1               | 39  | 2480        | 1.05                  | 0.71         | 0.50               | Pass      |

**TEST RESULTS DATA**  
**Peak Power Table**

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | Peak Conducted Power (dBm) | Conducted Power Limit (dBm) | DG (dBi) | EIRP Power (dBm) | EIRP Power Limit (dBm) | Pass /Fail |
|------|-----------|-----------------|-----|-------------|----------------------------|-----------------------------|----------|------------------|------------------------|------------|
| BLE  | 1Mbps     | 1               | 0   | 2402        | 6.89                       | 30.00                       | -1.60    | 5.29             | 36.00                  | Pass       |
| BLE  | 1Mbps     | 1               | 19  | 2440        | 7.55                       | 30.00                       | -1.60    | 5.95             | 36.00                  | Pass       |
| BLE  | 1Mbps     | 1               | 39  | 2480        | 7.22                       | 30.00                       | -1.60    | 5.62             | 36.00                  | Pass       |

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | Duty Factor (dB) | Average Conducted Power (dBm) |
|------|-----------|-----------------|-----|-------------|------------------|-------------------------------|
| BLE  | 1Mbps     | 1               | 0   | 2402        | 2.01             | 6.37                          |
| BLE  | 1Mbps     | 1               | 19  | 2440        | 2.01             | 7.09                          |
| BLE  | 1Mbps     | 1               | 39  | 2480        | 2.01             | 6.72                          |

**TEST RESULTS DATA**  
**Peak Power Density**

| Mod. | Data Rate | N <sub>TX</sub> | CH. | Freq. (MHz) | Peak PSD (dBm /100kHz) | Peak PSD (dBm /3kHz) | DG (dBi) | Peak PSD Limit (dBm /3kHz) | Pass/Fail |
|------|-----------|-----------------|-----|-------------|------------------------|----------------------|----------|----------------------------|-----------|
| BLE  | 1Mbps     | 1               | 0   | 2402        | 5.34                   | -8.40                | -1.60    | 8.00                       | Pass      |
| BLE  | 1Mbps     | 1               | 19  | 2440        | 6.16                   | -7.61                | -1.60    | 8.00                       | Pass      |
| BLE  | 1Mbps     | 1               | 39  | 2480        | 5.65                   | -8.12                | -1.60    | 8.00                       | Pass      |

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. Radiated Spurious Emission

|                 |                                        |                     |         |
|-----------------|----------------------------------------|---------------------|---------|
| Test Engineer : | Elvis Chen and Stan Hsieh and Karl Hou | Temperature :       | 21~22°C |
|                 |                                        | Relative Humidity : | 43~44%  |

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

| BLE                     | Note | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|-------------------------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
|                         |      |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
|                         |      | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| BLE<br>CH 00<br>2402MHz |      | 2389.74   | 51.55      | -22.45 | 74         | 52.17    | 27.23    | 5.39   | 33.24  | 205    | 154     | P       | H       |
|                         |      | 2377.32   | 41.73      | -12.27 | 54         | 42.39    | 27.19    | 5.39   | 33.24  | 205    | 154     | A       | H       |
|                         | *    | 2402      | 101.39     | -      | -          | 101.99   | 27.23    | 5.39   | 33.22  | 205    | 154     | P       | H       |
|                         | *    | 2402      | 100.75     | -      | -          | 101.35   | 27.23    | 5.39   | 33.22  | 205    | 154     | A       | H       |
|                         |      |           |            |        |            |          |          |        |        |        |         |         | H       |
|                         |      |           |            |        |            |          |          |        |        |        |         |         | H       |
|                         |      | 2344.56   | 51.5       | -22.5  | 74         | 52.32    | 27.1     | 5.33   | 33.25  | 100    | 167     | P       | V       |
|                         |      | 2375.07   | 41.49      | -12.51 | 54         | 42.15    | 27.19    | 5.39   | 33.24  | 100    | 167     | A       | V       |
|                         | *    | 2402      | 89.62      | -      | -          | 90.22    | 27.23    | 5.39   | 33.22  | 100    | 167     | P       | V       |
|                         | *    | 2402      | 88.95      | -      | -          | 89.55    | 27.23    | 5.39   | 33.22  | 100    | 167     | A       | V       |
|                         |      |           |            |        |            |          |          |        |        |        |         |         | V       |
|                         |      |           |            |        |            |          |          |        |        |        |         |         | V       |
| BLE<br>CH 19<br>2440MHz |      | 2364.81   | 51.17      | -22.83 | 74         | 51.88    | 27.14    | 5.39   | 33.24  | 207    | 152     | P       | H       |
|                         |      | 2384.97   | 41.57      | -12.43 | 54         | 42.23    | 27.19    | 5.39   | 33.24  | 207    | 152     | A       | H       |
|                         | *    | 2440      | 102.08     | -      | -          | 102.5    | 27.37    | 5.42   | 33.21  | 207    | 152     | P       | H       |
|                         | *    | 2440      | 101.42     | -      | -          | 101.84   | 27.37    | 5.42   | 33.21  | 207    | 152     | A       | H       |
|                         |      | 2488.48   | 51.25      | -22.75 | 74         | 51.47    | 27.5     | 5.46   | 33.18  | 207    | 152     | P       | H       |
|                         |      | 2494.88   | 41.83      | -12.17 | 54         | 42.04    | 27.5     | 5.46   | 33.17  | 207    | 152     | A       | H       |
|                         |      | 2354.19   | 51.05      | -22.95 | 74         | 51.83    | 27.14    | 5.33   | 33.25  | 361    | 80      | P       | V       |
|                         |      | 2375.43   | 41.48      | -12.52 | 54         | 42.14    | 27.19    | 5.39   | 33.24  | 361    | 80      | A       | V       |
|                         | *    | 2440      | 92.93      | -      | -          | 93.35    | 27.37    | 5.42   | 33.21  | 361    | 80      | P       | V       |
|                         | *    | 2440      | 92.32      | -      | -          | 92.74    | 27.37    | 5.42   | 33.21  | 361    | 80      | A       | V       |
|                         |      | 2485.8    | 51.1       | -22.9  | 74         | 51.36    | 27.46    | 5.46   | 33.18  | 361    | 80      | P       | V       |
|                         |      | 2493.72   | 41.77      | -12.23 | 54         | 41.98    | 27.5     | 5.46   | 33.17  | 361    | 80      | A       | V       |



|                                  |                                                                                             |         |        |        |    |        |       |      |       |     |    |   |   |
|----------------------------------|---------------------------------------------------------------------------------------------|---------|--------|--------|----|--------|-------|------|-------|-----|----|---|---|
| <b>BLE<br/>CH 39<br/>2480MHz</b> | *                                                                                           | 2480    | 102.93 | -      | -  | 103.21 | 27.46 | 5.44 | 33.18 | 279 | 35 | P | H |
|                                  | *                                                                                           | 2480    | 102.16 | -      | -  | 102.44 | 27.46 | 5.44 | 33.18 | 279 | 35 | P | H |
|                                  |                                                                                             | 2488.68 | 51.67  | -22.33 | 74 | 51.89  | 27.5  | 5.46 | 33.18 | 279 | 35 | P | H |
|                                  |                                                                                             | 2485.08 | 42.01  | -11.99 | 54 | 42.27  | 27.46 | 5.46 | 33.18 | 279 | 35 | A | H |
|                                  |                                                                                             |         |        |        |    |        |       |      |       |     |    |   | H |
|                                  |                                                                                             |         |        |        |    |        |       |      |       |     |    |   | H |
|                                  | *                                                                                           | 2480    | 92.9   | -      | -  | 93.18  | 27.46 | 5.44 | 33.18 | 348 | 81 | P | V |
|                                  | *                                                                                           | 2480    | 92.23  | -      | -  | 92.51  | 27.46 | 5.44 | 33.18 | 348 | 81 | A | V |
|                                  |                                                                                             | 2485.68 | 50.93  | -23.07 | 74 | 51.19  | 27.46 | 5.46 | 33.18 | 348 | 81 | P | V |
|                                  |                                                                                             | 2485.4  | 41.77  | -12.23 | 54 | 42.03  | 27.46 | 5.46 | 33.18 | 348 | 81 | A | V |
|                                  |                                                                                             |         |        |        |    |        |       |      |       |     |    |   | V |
|                                  |                                                                                             |         |        |        |    |        |       |      |       |     |    |   | V |
| <b>Remark</b>                    | 1. No other spurious found.<br>2. All results are PASS against Peak and Average limit line. |         |        |        |    |        |       |      |       |     |    |   |   |



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

| BLE                     | Note                                                                                        | Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB/m ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Peak<br>Avg.<br>( P/A ) | Pol.<br>( H/V ) |
|-------------------------|---------------------------------------------------------------------------------------------|----------------------|---------------------|-------------------------|-----------------------------|---------------------------|-------------------------------|-------------------------|----------------------------|----------------------|-------------------------|-------------------------|-----------------|
| BLE<br>CH 00<br>2402MHz |                                                                                             | 4806                 | 37.85               | -36.15                  | 74                          | 59.49                     | 31.42                         | 7.58                    | 60.64                      | 100                  | 0                       | P                       | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             | 4806                 | 37.74               | -36.26                  | 74                          | 59.38                     | 31.42                         | 7.58                    | 60.64                      | 100                  | 0                       | P                       | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
| BLE<br>CH 19<br>2440MHz |                                                                                             | 4878                 | 38.38               | -35.62                  | 74                          | 59.64                     | 31.56                         | 7.7                     | 60.52                      | 100                  | 0                       | P                       | H               |
|                         |                                                                                             | 7320                 | 44.28               | -29.72                  | 74                          | 59.55                     | 36.22                         | 9.49                    | 60.98                      | 100                  | 0                       | P                       | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             | 4878                 | 38.94               | -35.06                  | 74                          | 60.2                      | 31.56                         | 7.7                     | 60.52                      | 100                  | 0                       | P                       | V               |
|                         |                                                                                             | 7320                 | 43.04               | -30.96                  | 74                          | 58.31                     | 36.22                         | 9.49                    | 60.98                      | 100                  | 0                       | P                       | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
| BLE<br>CH 39<br>2480MHz |                                                                                             | 4962                 | 39.44               | -34.56                  | 74                          | 60.02                     | 31.73                         | 8.05                    | 60.36                      | 100                  | 0                       | P                       | H               |
|                         |                                                                                             | 7440                 | 42.9                | -31.1                   | 74                          | 58.14                     | 36.49                         | 9.61                    | 61.34                      | 100                  | 0                       | P                       | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | H               |
|                         |                                                                                             | 4962                 | 39.73               | -34.27                  | 74                          | 60.31                     | 31.73                         | 8.05                    | 60.36                      | 100                  | 0                       | P                       | V               |
|                         |                                                                                             | 7440                 | 43.99               | -30.01                  | 74                          | 59.23                     | 36.49                         | 9.61                    | 61.34                      | 100                  | 0                       | P                       | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
|                         |                                                                                             |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         | V               |
| Remark                  | 1. No other spurious found.<br>2. All results are PASS against Peak and Average limit line. |                      |                     |                         |                             |                           |                               |                         |                            |                      |                         |                         |                 |



## Emission below 1GHz

## 2.4GHz BLE (LF)

| BLE                 | Note                                                                       | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|---------------------|----------------------------------------------------------------------------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
|                     |                                                                            |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
|                     |                                                                            | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| 2.4GHz<br>BLE<br>LF |                                                                            | 30.54     | 16.61      | -23.39 | 40         | 29.32    | 19.46    | 0.65   | 32.82  |        |         | P       | H       |
|                     |                                                                            | 101.01    | 18         | -25.5  | 43.5       | 38.99    | 10.5     | 1.14   | 32.63  |        |         | P       | H       |
|                     |                                                                            | 202.26    | 18.41      | -25.09 | 43.5       | 39.48    | 10.18    | 1.48   | 32.73  |        |         | P       | H       |
|                     |                                                                            | 731.9     | 22.35      | -23.65 | 46         | 31.14    | 21.25    | 2.91   | 32.95  |        |         | P       | H       |
|                     |                                                                            | 846.7     | 24.13      | -21.87 | 46         | 31.1     | 22.48    | 3.16   | 32.61  |        |         | P       | H       |
|                     |                                                                            | 959.4     | 26.38      | -19.62 | 46         | 30.49    | 24.26    | 3.29   | 31.66  | 100    | 39      | P       | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | H       |
|                     |                                                                            | 30        | 23.68      | -16.32 | 40         | 35.85    | 20       | 0.65   | 32.82  | 100    | 216     | P       | V       |
|                     |                                                                            | 39.72     | 23.66      | -16.34 | 40         | 41.31    | 14.5     | 0.65   | 32.8   |        |         | P       | V       |
|                     |                                                                            | 58.89     | 19.15      | -20.85 | 40         | 44.56    | 6.41     | 0.93   | 32.75  |        |         | P       | V       |
|                     |                                                                            | 722.1     | 21.92      | -24.08 | 46         | 31.02    | 21.05    | 2.82   | 32.97  |        |         | P       | V       |
|                     |                                                                            | 825       | 24.31      | -21.69 | 46         | 31.68    | 22.3     | 3.07   | 32.74  |        |         | P       | V       |
|                     |                                                                            | 941.2     | 27.35      | -18.65 | 46         | 31.81    | 24.11    | 3.29   | 31.86  |        |         | P       | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
|                     |                                                                            |           |            |        |            |          |          |        |        |        |         |         | V       |
| Remark              | 1. No other spurious found.<br>2. All results are PASS against limit line. |           |            |        |            |          |          |        |        |        |         |         |         |



**Note symbol**

|     |                                                                                                                                                          |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| *   | <b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. |
| !   | Test result is <b>over limit</b> line.                                                                                                                   |
| P/A | <b>Peak</b> or <b>Average</b>                                                                                                                            |
| H/V | <b>Horizontal</b> or <b>Vertical</b>                                                                                                                     |



A calculation example for radiated spurious emission is shown as below:

| WIFI    | Note | Frequency | Level      | Over   | Limit      | Read     | Antenna  | Cable  | Preamp | Ant    | Table   | Peak    | Pol.    |
|---------|------|-----------|------------|--------|------------|----------|----------|--------|--------|--------|---------|---------|---------|
| Ant.    |      |           |            | Limit  | Line       | Level    | Factor   | Loss   | Factor | Pos    | Pos     | Avg.    |         |
| 1+2     |      | ( MHz )   | ( dBμV/m ) | ( dB ) | ( dBμV/m ) | ( dBμV ) | ( dB/m ) | ( dB ) | ( dB ) | ( cm ) | ( deg ) | ( P/A ) | ( H/V ) |
| 802.11b |      | 2390      | 55.45      | -18.55 | 74         | 54.51    | 32.22    | 4.58   | 35.86  | 103    | 308     | P       | H       |
| CH 01   |      |           |            |        |            |          |          |        |        |        |         |         |         |
| 2412MHz |      | 2390      | 43.54      | -10.46 | 54         | 42.6     | 32.22    | 4.58   | 35.86  | 103    | 308     | A       | H       |

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)





**Both peak and average measured complies with the limit line, so test result is “PASS”.**







## Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)
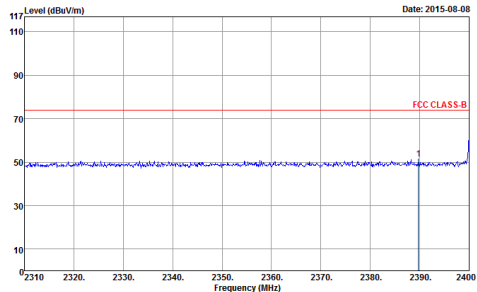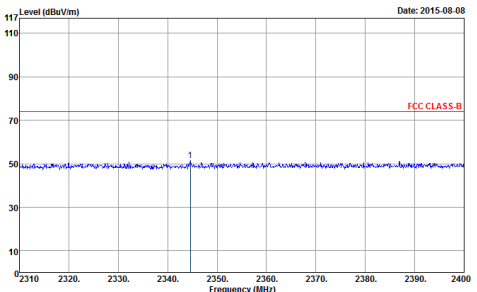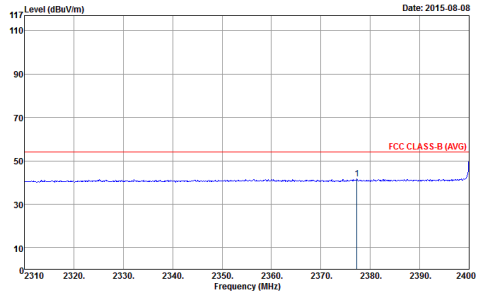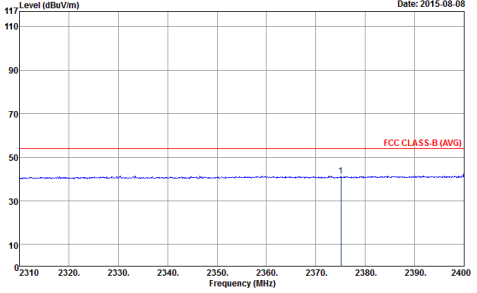
| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                                                                                                                                    |                                                                                                                                                                                                                                        |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT  | BLE CH00 2402MHz                                                                                                                                                                                                                        |                                                                                                                                                                                                                                        |
| 1    | Horizontal                                                                                                                                                                                                                              | Vertical                                                                                                                                                                                                                               |
| Peak |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL<br/>Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto<br/>Peak</p>     |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL<br/>Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto<br/>Peak</p>     |
| Avg. |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL<br/>Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto<br/>Peak</p> |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL<br/>Detector : RBW:1000.000KHz VBW:3.000KHz SWT:Auto<br/>Peak</p> |

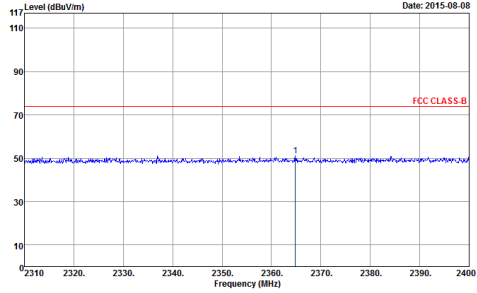
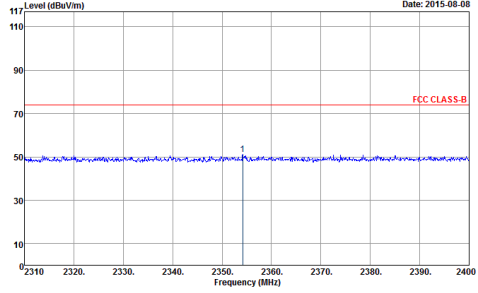
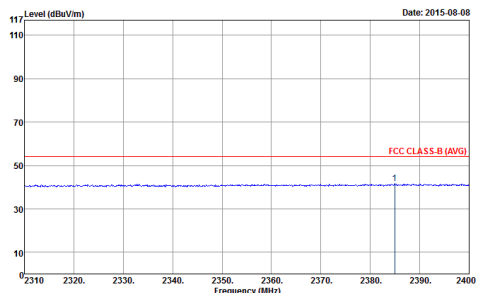
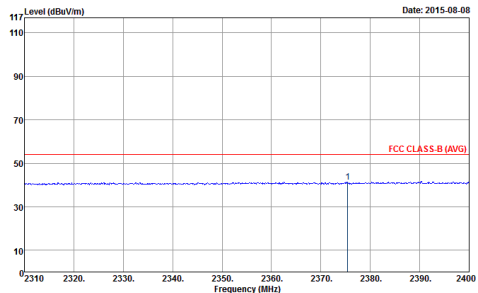


| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT  | BLE CH19 2440MHz - Low channel location                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1    | Horizontal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Vertical                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Peak | <p>The plot shows the peak level in dBuV/m versus frequency in MHz for the horizontal orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line at 70 dBuV/m indicates the FCC CLASS-B limit. The measured signal is a blue line that remains below the limit, with a peak value of 51 dBuV/m at 2365 MHz.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p>                  | <p>The plot shows the peak level in dBuV/m versus frequency in MHz for the vertical orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line at 70 dBuV/m indicates the FCC CLASS-B limit. The measured signal is a blue line that remains below the limit, with a peak value of 51 dBuV/m at 2365 MHz.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p>                  |
| Avg. | <p>The plot shows the average level in dBuV/m versus frequency in MHz for the horizontal orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line at 55 dBuV/m indicates the FCC CLASS-B (AVG) limit. The measured signal is a blue line that remains below the limit, with a peak value of 41 dBuV/m at 2365 MHz.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p> | <p>The plot shows the average level in dBuV/m versus frequency in MHz for the vertical orientation. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red horizontal line at 55 dBuV/m indicates the FCC CLASS-B (AVG) limit. The measured signal is a blue line that remains below the limit, with a peak value of 41 dBuV/m at 2365 MHz.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p> |



| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                      |                                                                                                         |
|------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| ANT  | BLE CH19 2440MHz - High channel location                                                                  |                                                                                                         |
| 1    | Horizontal                                                                                                | Vertical                                                                                                |
| Peak | <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p>       | <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p>       |
| Avg. | <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p> | <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p> |

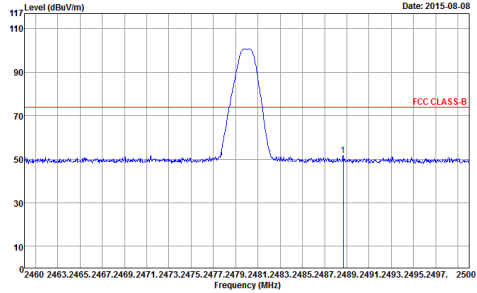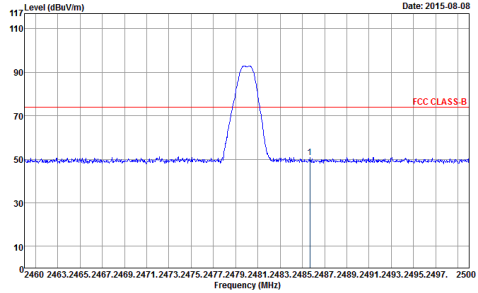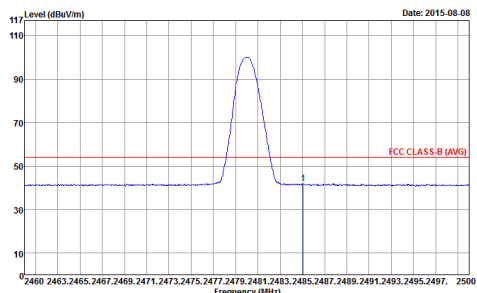
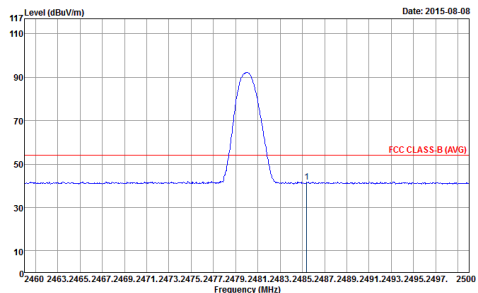


| BLE  | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT  | BLE CH39 2480MHz                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 1    | Horizontal                                                                                                                                                                                                                                                                                                                                                                                                                                       | Vertical                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Peak | <p>The plot shows a single peak at 2480 MHz. The y-axis is Level (dBuV/m) from 0 to 117. The x-axis is Frequency (MHz) from 2460 to 2500. A red line indicates the FCC CLASS-B limit at approximately 75 dBuV/m. The peak is labeled '1'.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p>               | <p>The plot shows a single peak at 2480 MHz. The y-axis is Level (dBuV/m) from 0 to 117. The x-axis is Frequency (MHz) from 2460 to 2500. A red line indicates the FCC CLASS-B limit at approximately 75 dBuV/m. The peak is labeled '1'.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p>               |
| Avg. | <p>The plot shows a single peak at 2480 MHz. The y-axis is Level (dBuV/m) from 0 to 117. The x-axis is Frequency (MHz) from 2460 to 2500. A red line indicates the FCC CLASS-B (AVG) limit at approximately 55 dBuV/m. The peak is labeled '1'.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF HORIZONTAL<br/>Detector : Peak</p> | <p>The plot shows a single peak at 2480 MHz. The y-axis is Level (dBuV/m) from 0 to 117. The x-axis is Frequency (MHz) from 2460 to 2500. A red line indicates the FCC CLASS-B (AVG) limit at approximately 55 dBuV/m. The peak is labeled '1'.</p> <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B (AVG) 3m HORN 9120D-HF VERTICAL<br/>Detector : Peak</p> |



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)
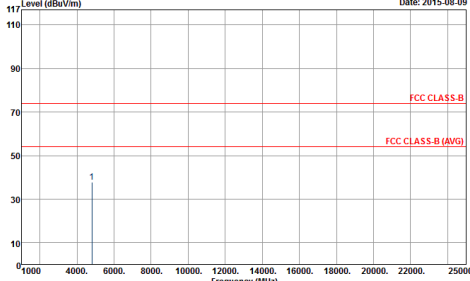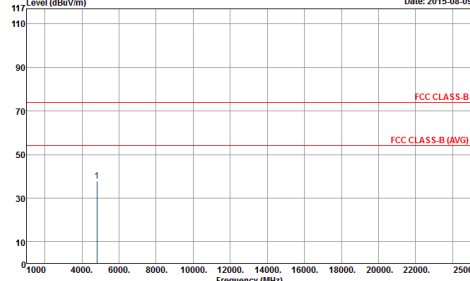
| BLE          | 2.4GHz 2400~2483.5MHz Harmonic @ 3m                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                               |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT          | BLE CH00 2402MHz                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                               |
| 1            | Horizontal                                                                                                                                                                                                                                                                     | Vertical                                                                                                                                                                                                                                                                      |
| Peak<br>Avg. | <div><p>Level (dBuV/m) <span style="float: right;">Date: 2015-08-09</span></p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 HORIZONTAL<br/>Detector : Peak</p></div> | <div><p>Level (dBuV/m) <span style="float: right;">Date: 2015-08-09</span></p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 VERTICAL<br/>Detector : Peak</p></div> |



| BLE          | 2.4GHz 2400~2483.5MHz Harmonic @ 3m                                                                                                                                                   |                                                                                                                                                                                     |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT          | BLE CH19 2440MHz                                                                                                                                                                      |                                                                                                                                                                                     |
| 1            | Horizontal                                                                                                                                                                            | Vertical                                                                                                                                                                            |
| Peak<br>Avg. | <div><p>Level (dBuV/m)</p><p>Date: 2015-08-09</p><p>Frequency (MHz)</p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 HORIZONTAL<br/>Detector : Peak</p></div> | <div><p>Level (dBuV/m)</p><p>Date: 2015-08-09</p><p>Frequency (MHz)</p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 VERTICAL<br/>Detector : Peak</p></div> |





| BLE          | 2.4GHz 2400~2483.5MHz Band Edge @ 3m                                                                                                                      |                                                                                                                                                         |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT          | BLE CH39 2480MHz                                                                                                                                          |                                                                                                                                                         |
| 1            | Horizontal                                                                                                                                                | Vertical                                                                                                                                                |
| Peak<br>Avg. | <div><p>Level (dBuV/m) Date: 2015-08-09</p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 HORIZONTAL<br/>Detector : Peak</p></div> | <div><p>Level (dBuV/m) Date: 2015-08-09</p><p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m HORN_9170_406_0584 VERTICAL<br/>Detector : Peak</p></div> |



Emission below 1GHz

2.4GHz BLE (LF)
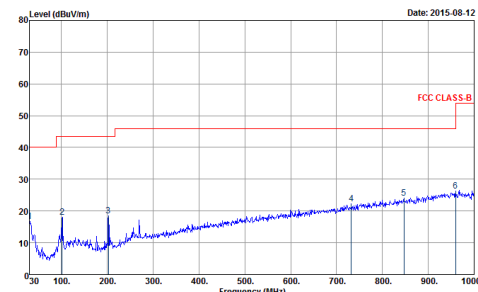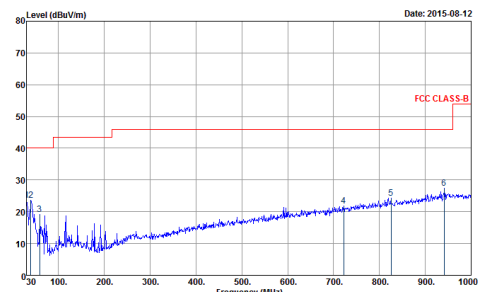
| BLE          | 2.4GHz 2400~2483.5MHz                                                                                                                                                                    |                                                                                                                                                                                         |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ANT          | BLE LF                                                                                                                                                                                   |                                                                                                                                                                                         |
| 1            | Horizontal                                                                                                                                                                               | Vertical                                                                                                                                                                                |
| QP /<br>Peak |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m BI-LOG 6111D-LF HORIZONTAL<br/>Detector : Peak</p> |  <p>Site : 03CH10-HY<br/>Condition : FCC CLASS-B 3m BI-LOG 6111D-LF VERTICAL<br/>Detector : Peak</p> |
|              |                                                                                                                                                                                          |                                                                                                                                                                                         |