FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc. EQUIPMENT : GSM/WCDMA/LTE Phone+Bluetooth,

DTS/UNII a/b/g/n and NFC

BRAND NAME : Sony

FCC ID : PY7-PM0921

STANDARD : 47 CFR Part 2, 22(H), 24(E), 27

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Oct. 07, 2015 and completely tested on Nov. 30, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 1 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Testing Laboratory 1190

Report No.: FG582708-01B

Report Template No.: BU5-FGLTE Version 1.4

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
		RY OF TEST RESULT	
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	
	1.2	Manufacturer	
	1.3	Product Feature of Equipment Under Test	5
	1.4	Modification of EUT	
	1.5	Emission Designator	7
	1.6	Testing Location	8
	1.7	Applicable Standards	8
2	TES1	CONFIGURATION OF EQUIPMENT UNDER TEST	ç
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	11
	2.3	Support Unit used in test configuration and system	11
	2.4	Measurement Results Explanation Example	11
	2.5	Frequency List of Low/Middle/High Channels	
3	CON	DUCTED TEST ITEMS	14
	3.1	Measuring Instruments	14
	3.2	Test Setup	14
	3.3	Test Result of Conducted Test	14
	3.4	Conducted Output Power	15
	3.5	Peak-to-Average Ratio	16
	3.6	Occupied Bandwidth	17
	3.7	Conducted Band Edge	
	3.8	Conducted Spurious Emission	
	3.9	Frequency Stability	
4	RAD	ATED TEST ITEMS	
	4.1	Measuring Instruments	
	4.2	Test Setup	
	4.3	Test Result of Radiated Test	
	4.4	Effective Radiated Power and Effective Isotropic Radiated Power	
	4.5	Radiated Spurious Emission	
5		OF MEASURING EQUIPMENT	
6	UNC	ERTAINTY OF EVALUATION	28

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

APPENDIX B. TEST RESULTS OF RADIATED TEST

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 2 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG582708-01B	Rev. 01	Initial issue of report	Jan. 21, 2016

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 3 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark	
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-	
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-	
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-	
3.7	§2.1051 §22.917(a) §24.238(a)	Conducted Band Edge Measurement (Band 2) (Band 5)	< 43+10log10(P[Watts])	PASS	-	
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)			
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission (Band 2) (Band 5)	< 43+10log10(P[Watts])	PASS	_	
0.0	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])	17.00		
	§2.1055 §22.355	Frequency Stability	< 2.5 ppm for Part 22			
3.9	§2.1055 §24.235 §27.54	Temperature & Voltage	Within Authorized Band	PASS	-	
	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt			
4.4	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt	PASS	-	
4.5	§2.1053 §22.917(a) §24.238(a)	Radiated Spurious Emission (Band 2) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 3.11 dB at	
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		12660.000 MHz	

Remark: Conducted Output Power and Radiated Spurious Emission of LTE Band 2 (5MHz), LTE Band 5 (3MHz), and LTE Band 7 (5MHz) are carrying out, the data reuses from FCC ID: PY7-PM0920 (Sporton report Number FG500716B)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 4 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

Nya Vattentornet, 22188 Lund, Sweden

1.2 Manufacturer

Sony Mobile Communications Inc.

1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n, GPS, and NFC

	Product Feature
Antenna Type	Coupling type (LDS) Antenna

<FG500716B>

EUT Information List												
IMEI	HW Version	SW Version	S/N	Performed Test Item								
004402455535512		22.2.4.0.40	RQ3000D4PB	RF conducted measurement ERP/EIRP Test								
004402455535231	A	33.2.A.0.19	RQ3000D4EV	Radiated Spurious Emission								

<FG582708-01B>

EUT Information List												
IMEI	HW Version	SW Version	S/N	Performed Test Item								
IEMI 1: 004402455515456 IMEI 2: 004402455515316		22.2 0.0 40	RQ3000D5YT	RF conducted measurement ERP/EIRP Test								
IEMI 1: 004402455515324 IMEI 2: 004402455515332	А	33.2.B.0.19	RQ3000D5Y3	Radiated Spurious Emission								

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 5 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report No.: FG582708-01B

Report Template No.: BU5-FGLTE Version 1.4

	Accessory List					
	Model No. : UCH20					
AC Adapter 1	Type No. : AC-0060-US					
	S/N : 1215W43609278 (Radiated Spurious Emission)					
Battery 1	Model No. : LIS1618ERPC					
	Model No. : MH410c					
Earphone	Type No. : AG-1100					
	S/N : 1541A8180036F24 (Radiated Spurious Emission)					
	Model No. : EC803					
USB Cable 1	Type No. : AI-0404					
	S/N: 153812A45005976 (Radiated Spurious Emission)					

Note:

- 1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
- 2. Above the accessories list are used to exercise the EUT during test.
- 3. For other wireless features of this EUT, test report will be issued separately.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 6 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

1.5 Emission Designator

LTE Band 2		QPSK		16QAM					
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)			
1.4	1M09G7D	-	0.2321	1M10W7D	-	0.1933			
3	2M72G7D	-	0.2586	2M72W7D	-	0.2035			
5	4M50G7D	1	0.2420	4M50W7D	-	0.1964			
10	9M01G7D	0.0085	0.2295	9M07W7D	-	0.2131			
15	13M5G7D	-	0.2277	13M5W7D	-	0.1886			
20	18M5G7D	-	0.2368	18M5W7D	-	0.2161			
LTE Band 5		QPSK		16QAM					
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)			
1.4	1M10G7D	-	0.0709	1M09W7D	-	0.0458			
3	2M73G7D	-	0.0511	2M73W7D	-	0.0428			
5	4M51G7D	1	0.0710	4M50W7D	-	0.0649			
10	9M11G7D	0.0041	0.0624	9M03W7D	1	0.0500			
LTE Band 7		QPSK			16QAM				
BW(MHz)	Emission Designator	Frequency Tolerance	Maximum EIRP(W)	Emission Designator	Frequency Tolerance	Maximum EIRP(W)			
	(99%OBW)	(ppm)	AVG.	(99%OBW)	(ppm)	AVG.			
5	4M50G7D	-	0.1450	4M52W7D	-	0.1241			
10	9M01G7D	0.0069	0.1459	9M05W7D	-	0.1206			
15	13M5G7D	-	0.1241	13M5W7D	-	0.1207			
20	18M4G7D	-	0.1317	18M5W7D	-	0.1186			

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 7 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.					
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,					
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.					
rest Site Location	TEL: +886-3-327-3456					
	FAX: +886-3-328-4978					
Toot Site No	Sporton Site No.					
Test Site No.	TH05-HY					

Test Site	SPORTON INTERNATIONAL INC.					
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,					
Took Cita Lagation	Taoyuan City, Taiwan (R.O.C.)					
Test Site Location	TEL: +886-3-327-0868					
	FAX: +886-3-327-0855					
Test Site No.	Sporton Site No.					
rest site NO.	03CH10HY					

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 8 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band		В	andwic	lth (MH	lz)		Modulation		RB#			Test Channel		
	вапо	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	Н
Mana Ondrand	2	v	V	V	V	V	y	v	v	V	V	v	V	y	V
Max. Output Power	5	v	V	V	V	-	-	v	v	V	v	v	V	V	v
Power	7	-	•	V	٧	V	V	v	v	V	V	V	V	V	v
5 1	2						V	v	V	V		v	V	V	v
Peak-to-Average Ratio	5				V	-	-	v	v	V		V	V	y	V
Hatio	7	-	-				V	v	v	V		v	V	٧	v
00 dB d 000/	2	V	V	y	V	y	V	v	v			v	٧	γ	V
26dB and 99% Bandwidth	5	v	V	V	٧	-	-	v	v			V	V	٧	V
Ballawiatii	7	-	•	٧	V	٧	V	V	V			V	V	٧	V
O a made v a da a d	2	v	V	V	٧	V	V	v	v	V		v	٧		v
Conducted	5	v	V	V	٧	-	-	v	v	V		v	٧		v
Band Edge	7	-	•	٧	V	٧	V	V	V	V		V	V		v

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 9 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4


Test Items	Band		В	andwid	lth (MH	z)		Modulation		RB#			Test Channel		
rest items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	Н
Conducted	2	v	V	v	V	v	v	V	v	v			v	V	V
Spurious	5	v	V	v	V	-	-	v	v	v			v	V	y
Emission	7	-	-	v	V	v	v	V	v	v			v	V	v
_	2				V			v				V		v	
Frequency	5				V	-	-	v				v		V	
Stability	7	-	-		V			v				V		V	
	2	v	V	v	V	V	V	v	٧	v	v	V	v	V	٧
E.R.P./ E.I.R.P.	5	v	V	v	V	-	-	v	٧	v	v	V	v	V	y
	7	-	-	V	V	v	v	v	v	٧	v	V	v	V	v
Radiated	2	v	V	v	V	V	v	v		v	v	٧	v	V	y
Spurious	5	v	V	V	V	-	-	v		٧	v	v	v	v	v
Emission	7	-	-	V	V	v	v	v		٧	v	v	v	V	v
	1. The	e mark	c " _γ " n	neans	that th	nis cor	nfigura	tion is c	hosen fo	r test	ing				•
	2. The	e mark	c "-" m	eans t	hat th	is ban	dwidth	is not s	supported	d.					
Note	3. The	e devi	ce is ir	nvestic	nated t	from 3	0MHz	to 10 ti	mes of fu	ından	nental	signal	l for r	adiate	d
									offset an			•			
									re report		aaiaii		CAPIO	. ato. y	.001.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 10 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

2.2 Connection Diagram of Test System

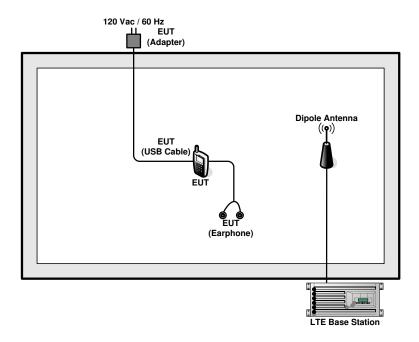

2.3 Support Unit used in test configuration and system

ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.2 + 10 = 14.2 (dB)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 11 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

2.5 Frequency List of Low/Middle/High Channels

	LTE Band 2 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest								
20	Channel	18700	18900	19100								
20	Frequency	1860	1880	1900								
15	Channel	18675	18900	19125								
15	Frequency	1857.5	1880	1902.5								
10	Channel	18650	18900	19150								
10	Frequency	1855	1880	1905								
5	Channel	18625	18900	19175								
5	Frequency	1852.5	1880	1907.5								
3	Channel	18615	18900	19185								
S	Frequency	1851.5	1880	1908.5								
1.4	Channel	18607	18900	19193								
1.4	Frequency	1850.7	1880	1909.3								

LTE Band 5 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
10	Channel	20450	20525	20600							
10	Frequency	829	836.5	844							
5	Channel	20425	20525	20625							
5	Frequency	826.5	836.5	846.5							
3	Channel	20415	20525	20635							
S	Frequency	825.5	836.5	847.5							
4.4	Channel	20407	20525	20643							
1.4	Frequency	824.7	836.5	848.3							

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 12 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

LTE Band 7 Channel and Frequency List											
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest							
20	Channel	20850	21100	21350							
20	Frequency	2510	2535	2560							
15	Channel	20825	21100	21375							
15	Frequency	2507.5	2535	2562.5							
40	Channel	20800	21100	21400							
10	Frequency	2505	2535	2565							
5	Channel	20775	21100	21425							
5	Frequency	2502.5	2535	2567.5							

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 13 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

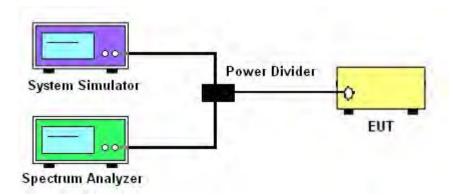

3.2.3 Frequency Stability

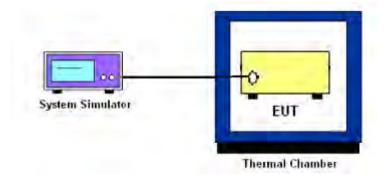

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 14 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01
Report Template No.: BU5-FGLTE Version 1.4

3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 15 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum and system simulator via a power divider.
- 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 5. Record the deviation as Peak to Average Ratio.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 16 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- 6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

Report Template No.: BU5-FGLTE Version 1.4

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a) for Band 5:

For operations in the 824 – 849 MHz band, the FCC limit is 43 + $10\log_{10}(P[Watts])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a) for Band 2:

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[Watts])$ dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4) for FCC Band 7:

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 18 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. The band edges of low and high channels for the highest RF powers were measured.
- 4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 6. Set spectrum analyzer with RMS detector.
- 7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

- = P(W)- [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB) = -13dBm.
- 9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 19 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 7. Set spectrum analyzer with RMS detector.
- 8. Taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
 - = P(W)- [43 + 10log(P)] (dB)
 - = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
 - = -13dBm.
- 11. For Band 7

The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

- = P(W) [55 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [55 + 10log(P)] (dB)
- = -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 21 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

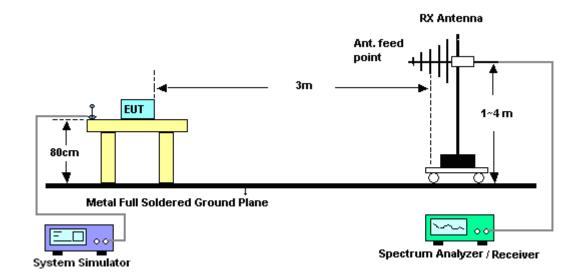

4.2.2 For radiated test above 1GHz

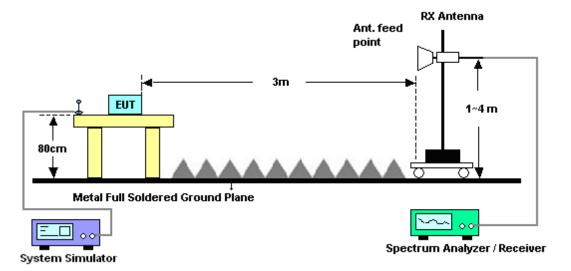

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 22 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report No.: FG582708-01B

Report Template No.: BU5-FGLTE Version 1.4

4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 7.

4.4.2 Test Procedures

- 1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
- 2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
- 3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. Tx Cable loss + Substitution antenna gain Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, EIRP = LVL + Correction factor and ERP = EIRP 2.15. Take the record of the output power at substitution antenna.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 23 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

	LTE Average									
LTE BW	1.4M	3M	5M	10M	15M	20M				
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz				
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz				
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz				
Detector	RMS	RMS	RMS	RMS	RMS	RMS				
Trace	Average	Average	Average	Average	Average	Average				
Average Type	Power	Power	Power	Power	Power	Power				
Sweep Count	100	100	100	100	100	100				

	LTE Peak									
LTE BW	1.4M	3M	5M	10M	15M	20M				
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz				
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz				
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz				
Detector	Peak	Peak	Peak	Peak	Peak	Peak				
Trace	Max Hold									
Power	Channel	Channel	Channel	Channel	Channel	Channel				

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 24 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)] (dBm) [43 + 10log(P)] (dB)
- = -13dBm.

For Band 7:

The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

- 12. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 13. ERP (dBm) = EIRP 2.15

SPORTON INTERNATIONAL INC.
TEL: 886-3-327-3456

FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 25 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report No.: FG582708-01B

Report Template No.: BU5-FGLTE Version 1.4

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Sep. 11, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	Sep. 10 2016	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°C~70°C	Dec. 04, 2014	Oct. 28, 2015 ~ Nov. 02, 2015	Dec. 03, 2015	Conducted (TH05-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 04, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	May 03, 2016	Conducted (TH05-HY)
RF cable	WOKEN	S05	S05-130708-038	N/A	Jan. 21, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	Jan. 20, 2016	Conducted (TH05-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Jun. 01, 2016	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 02, 2015	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 03, 2016	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 24, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 23, 2015	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 16, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 15, 2016	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Nov. 18, 2015 ~ Nov. 30, 2015	Nov. 16, 2016	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 8.4GHz	Nov. 05, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 04, 2015	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 8.4GHz	Nov. 04, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 03, 2016	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 29, 2016	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 20, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 19, 2015	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 13, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 12, 2016	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHZ	Oct. 15, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Oct. 14, 2016	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0-360 degree	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 17, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 16, 2015	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 17, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 16, 2016	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24958/4,MY2 8653/4,MY24953	25GHz~40GHz	Jan. 13, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Jan. 12, 2016	Radiation (03CH10-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 26 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLKS1200-8 SS	SN3	1.2G Low Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Filter	Wainwright	WHK1.5/15G -10SS	SN32	1.5G High Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCG824/8 49-40/8SS	SN35	CDMA 850	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT1850/1 910-40/8SS	SN21	1900	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT2500/2 570-10/40-10	SN1 R	LTE Band7	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Test Software	N/A	E3	6.2009-8-24	N/A	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 27 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	4.0
Confidence of 95% (U = 2Uc(y))	4.9

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	5.5
Confidence of 95% (U = 2Uc(y))	5.5

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : 28 of 28
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : A1 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

		L	TE Band	2 Maximum Average	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0		23.33	<mark>23.53</mark>	23.47
20	1	49		23.26	23.44	23.42
20	1	99		23.21	23.39	23.41
20	50	0	QPSK	22.36	22.67	22.61
20	50	24		22.28	22.52	22.51
20	50	50		22.32	22.45	22.40
20	100	0		22.34	22.54	22.51
20	1	0		22.52	22.75	22.70
20	1	49		22.56	22.64	22.68
20	1	99		22.58	22.71	22.57
20	50	0	16-QAM	21.38	21.57	21.68
20	50	24		21.33	21.50	21.51
20	50	50		21.34	21.43	21.44
20	100	0		21.37	21.48	21.53
15	1	0		23.17	23.45	23.42
15	1	37		23.19	23.41	23.37
15	1	74		23.21	23.39	23.37
15	36	0	QPSK	22.27	22.52	22.54
15	36	20		22.27	22.49	22.47
15	36	39		22.26	22.43	22.37
15	75	0		22.26	22.49	22.57

22.44

22.50

22.50

21.30

21.30

21.29

21.28

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921

15

15

15

15 15

15

15

1

1

1

36

36

36

75

0

37

74

0

20

39

0

16-QAM

Page Number : A2 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

22.63

22.60

22.51

21.55

21.37

21.35

21.45

22.73

22.62

22.64

21.50

21.48

21.44

21.47

LTE Band 2 Maximum Average Power [dBm] BW [MHz] **RB Offset** Mod Middle **RB Size** Lowest Highest 1 0 23.14 23.42 23.39 10 10 1 25 23.13 23.38 23.33 10 1 49 23.16 23.38 23.34 QPSK 22.18 22.48 22.46 10 25 0 25 22.19 22.46 22.44 10 12 10 25 25 22.17 22.41 22.34 10 50 22.21 22.47 22.42 0 10 1 0 22.42 22.65 22.63 10 1 25 22.47 22.64 22.53 10 1 49 22.51 22.62 22.53 25 0 16-QAM 21.20 21.45 21.44 10 10 25 12 21.22 21.45 21.42 10 25 25 21.20 21.40 21.31 0 21.22 21.44 21.39 10 50 5 1 0 23.19 23.46 23.33 5 1 12 23.16 23.45 23.41 5 1 24 23.08 23.36 23.32 5 12 0 **QPSK** 22.15 22.44 22.42 7 12 22.18 22.49 22.44 5 22.45 22.38 5 12 13 22.16 25 0 22.15 22.46 22.40 5 1 0 22.49 22.66 22.51 5 1 22.46 22.65 22.58 5 12 5 1 24 22.41 22.59 22.50 5 12 0 16-QAM 21.19 21.43 21.39 5 12 7 21.22 21.47 21.41 12 21.43 21.35 5 13 21.19

21.15

25

0

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921

5

Page Number : A3 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

21.35

21.41

LTE Band 2 Maximum Average Power [dBm] BW [MHz] **RB Offset** Mod Middle Highest **RB Size** Lowest 1 0 23.14 23.39 23.34 3 1 8 23.18 23.38 23.30 3 3 1 14 23.09 23.38 23.34 QPSK 22.16 22.47 22.43 3 8 0 3 22.19 22.49 22.45 8 4 3 8 7 22.17 22.47 22.41 22.60 22.52 22.46 3 15 0 3 1 0 22.65 22.66 22.52 3 1 8 22.65 22.65 22.59 22.52 3 1 14 22.33 22.59 3 16-QAM 21.26 21.51 21.43 8 0 3 8 4 21.29 21.53 21.46 3 8 7 21.28 21.49 21.42 21.20 21.48 21.42 3 15 0 1.4 1 0 23.20 23.46 23.25 1.4 1 3 23.05 23.28 23.25 1.4 1 5 23.02 23.33 23.28 1.4 3 0 **QPSK** 23.16 23.39 23.43 1 1.4 3 23.18 23.40 23.45 23.43 1.4 3 3 23.17 23.40 22.21 22.53 22.49 1.4 6 0 22.31 22.44 1.4 1 0 22.58 1 3 22.33 22.57 22.53 1.4 1.4 1 5 22.32 22.55 22.53 22.17 22.36 1.4 3 0 16-QAM 22.46 1.4 3 1 22.19 22.47 22.38 3 3 22.16 22.44 22.32 1.4

21.26

6

0

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921

1.4

Page Number : A4 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

21.38

21.54

LTE Band 5 Maximum Average Power [dBm] BW [MHz] **RB Offset** Mod Lowest Middle Highest **RB Size** 1 0 23.11 23.12 23.08 10 10 1 25 23.08 23.11 23.06 10 1 49 23.07 23.09 23.07 QPSK 22.10 22.14 22.09 10 25 0 25 22.09 22.13 22.06 10 12 10 25 25 22.06 22.11 22.01 10 50 0 22.11 22.12 22.08 10 1 0 22.23 22.44 22.37 10 1 25 22.32 22.39 22.31 22.35 10 1 49 22.43 22.34 25 0 16-QAM 21.07 21.10 21.14 10 10 25 12 21.10 21.15 21.11 10 25 25 21.11 21.17 21.04 0 21.14 10 50 21.11 21.10 5 1 0 23.05 23.08 23.01 5 1 12 22.96 23.07 23.00 5 1 24 22.90 23.07 22.91 5 12 0 **QPSK** 21.89 21.93 21.94 7 12 21.94 22.00 21.99 5 22.02 5 12 13 21.92 21.97 25 0 21.96 5 21.91 21.94 1 0 22.07 22.25 22.14 5 1 22.17 22.20 22.24 5 12 5 1 24 22.13 22.20 22.17

20.89

20.95

20.93

20.89

SPORTON INTERNATIONAL INC.

12

12

12

25

0

7

13

0

16-QAM

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921

5

5

5

5

Page Number : A5 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

20.96

21.01

20.99

20.94

20.97

21.05

21.04

20.98

		L	TE Band 5	Maximum Average	Power [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0		22.91	23.09	23.01
3	1	8	_	23.01	23.08	23.05
3	1	14		22.90	22.97	22.95
3	8	0	QPSK	21.96	22.02	22.00
3	8	4		22.14	22.05	22.02
3	8	7		21.97	22.02	22.00
3	15	0		21.97	22.03	22.02
3	1	0		22.09	22.34	22.18
3	1	8		22.17	22.33	22.29
3	1	14		22.07	22.22	22.24
3	8	0	16-QAM	21.00	21.10	21.08
3	8	4		21.02	21.13	21.10
3	8	7		20.99	21.09	21.06
3	15	0		20.96	21.05	21.04
1.4	1	0		23.05	<mark>23.16</mark>	23.02
1.4	1	3		22.94	23.02	23.00
1.4	1	5		22.99	23.06	23.06
1.4	3	0	QPSK	23.13	23.05	23.01
1.4	3	1		23.15	23.10	23.01
1.4	3	3		23.14	23.05	23.00
1.4	6	0		22.04	22.19	22.20
1.4	1	0		22.17	22.50	22.40
1.4	1	3		22.18	22.36	22.32
1.4	1	5		22.17	22.33	22.30
1.4	3	0	16-QAM	22.06	22.19	22.16
1.4	3	1		22.09	22.21	22.16
1.4	3	3		22.06	22.18	22.15
1.4	6	0		21.19	21.26	21.26

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : A6 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

CC RF Test Report No.: FG582708-01B

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	<mark>22.31</mark>	22.06	22.12
20	1	49		22.14	21.95	22.05
20	1	99		22.10	22.02	22.04
20	50	0		21.22	21.13	21.20
20	50	24		21.19	20.98	21.06
20	50	50		21.21	20.85	21.04
20	100	0		21.18	21.01	21.13
20	1	0	16-QAM	21.48	21.27	21.23
20	1	49		21.32	21.21	21.35
20	1	99		21.36	21.27	21.44
20	50	0		20.15	19.85	20.04
20	50	24		20.14	19.96	20.07
20	50	50		20.17	20.11	20.21
20	100	0		20.14	19.99	20.13
15	1	0	QPSK	22.25	21.95	21.98
15	1	37		22.14	21.97	22.03
15	1	74		22.08	21.97	22.06
15	36	0		21.21	20.90	21.01
15	36	20		21.22	20.97	21.06
15	36	39		21.16	21.04	21.12
15	75	0		21.20	20.98	20.99
15	1	0	16-QAM	21.43	21.23	21.26
15	1	37		21.34	21.24	21.36
15	1	74		21.29	21.23	21.37
15	36	0		20.15	19.89	20.01
15	36	20		20.16	19.96	20.03
15	36	39		20.14	20.03	20.13
15	75	0		20.16	19.97	20.07

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921 Page Number : A7 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

LTE Band 7 Maximum Average Power [dBm] BW [MHz] **RB Offset** Mod Lowest Middle Highest **RB Size** 1 0 22.26 21.99 21.98 10 10 1 25 22.22 21.94 22.02 10 1 49 22.20 21.99 22.06 QPSK 21.19 20.82 20.92 10 25 0 25 21.20 20.94 21.02 10 12 10 25 25 21.24 21.02 21.07 10 50 21.25 20.95 21.02 0 10 1 0 21.43 21.17 21.25 10 1 25 21.38 21.21 21.35 10 1 49 21.37 21.25 21.40 25 0 16-QAM 20.12 19.81 19.99 10 10 25 12 20.17 19.92 20.02 10 25 25 20.18 20.01 20.09 0 20.17 20.02 10 50 19.93 5 1 0 22.30 22.01 22.00 5 1 12 22.29 22.01 22.08 5 1 24 22.23 21.94 22.01 5 12 0 **QPSK** 21.33 20.89 20.99 7 12 21.32 20.98 21.07 5 21.32 21.00 21.08 5 12 13 25 0 21.32 20.96 21.02 5 1 0 21.53 21.21 21.29 5 1 21.52 21.28 21.39 5 12 5 1 24 21.41 21.21 21.32 5 12 0 16-QAM 20.21 19.88 20.01 7 5 12 20.27 19.97 20.08 12 5 13 20.27 20.00 20.09

20.24

25

0

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: PY7-PM0921

5

Page Number : A8 of A8
Report Issued Date : Jan. 21, 2016
Report Version : Rev. 01

19.93

20.02




LTE Band 2


Peak-to-Average Ratio

Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.52	5.36	5.68	6.32	
Middle CH	3.91	4.84	5.01	5.74	PASS
Highest CH	4.58	5.1	5.25	6.06	

Page Number : A2-1 of 41

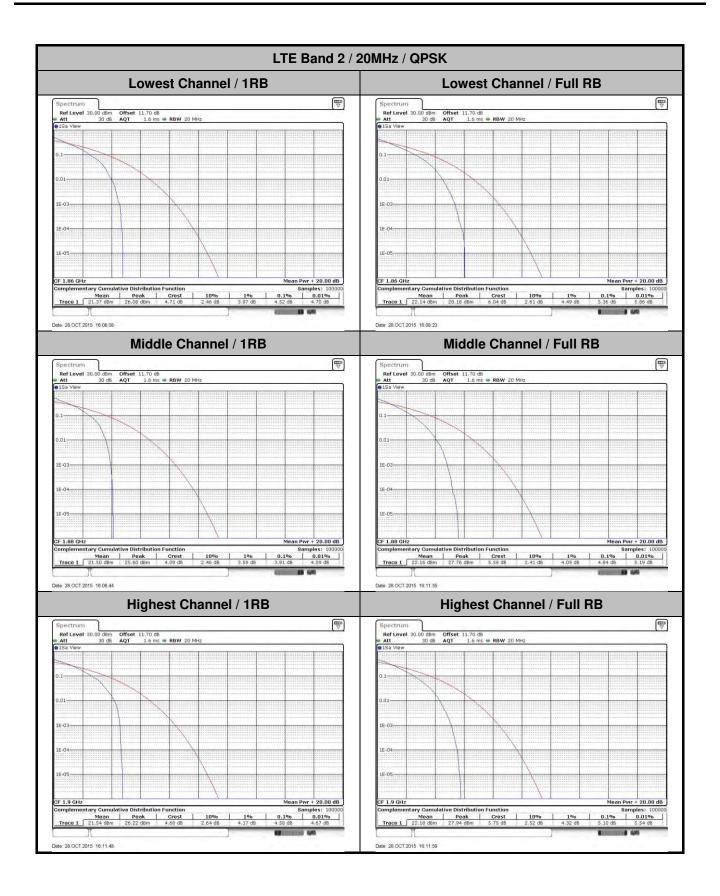



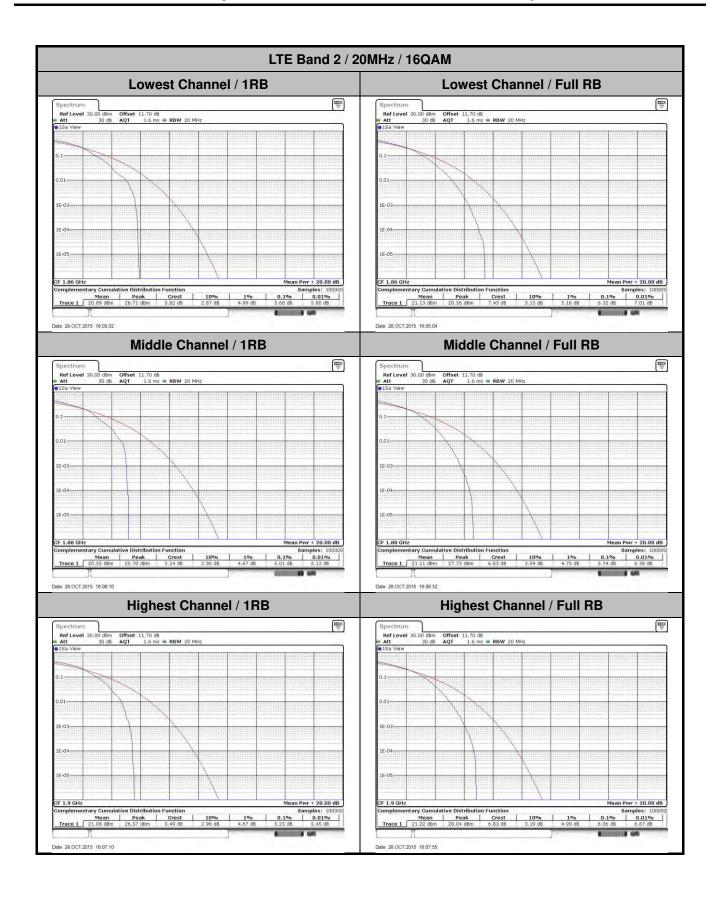


26dB Bandwidth


Mode	LTE Band 2 : 26dB BW(MHz)												
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz		
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.23	1.26	2.98	3.02	5.02	4.92	9.97	9.99	14.84	14.33	20.26	20.18	
Middle CH	1.26	1.26	3.01	2.96	4.96	4.92	9.71	9.99	14.36	14.51	20.3	20.18	
Highest CH	1.25	1.26	3.01	2.99	4.89	4.97	9.71	9.99	14.63	14.66	20.18	20.14	


Page Number : A2-4 of 41



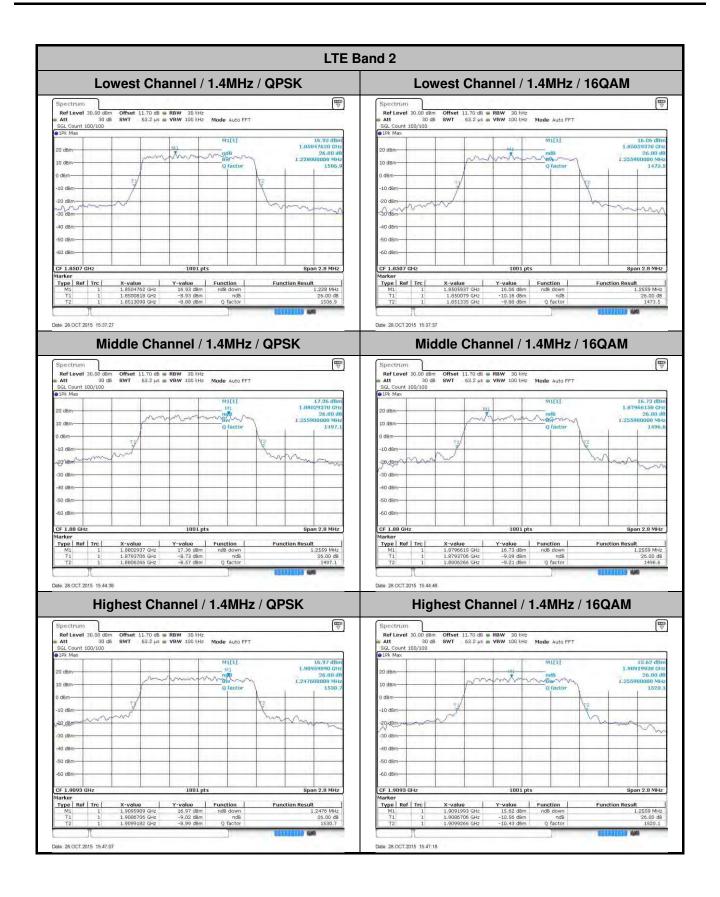




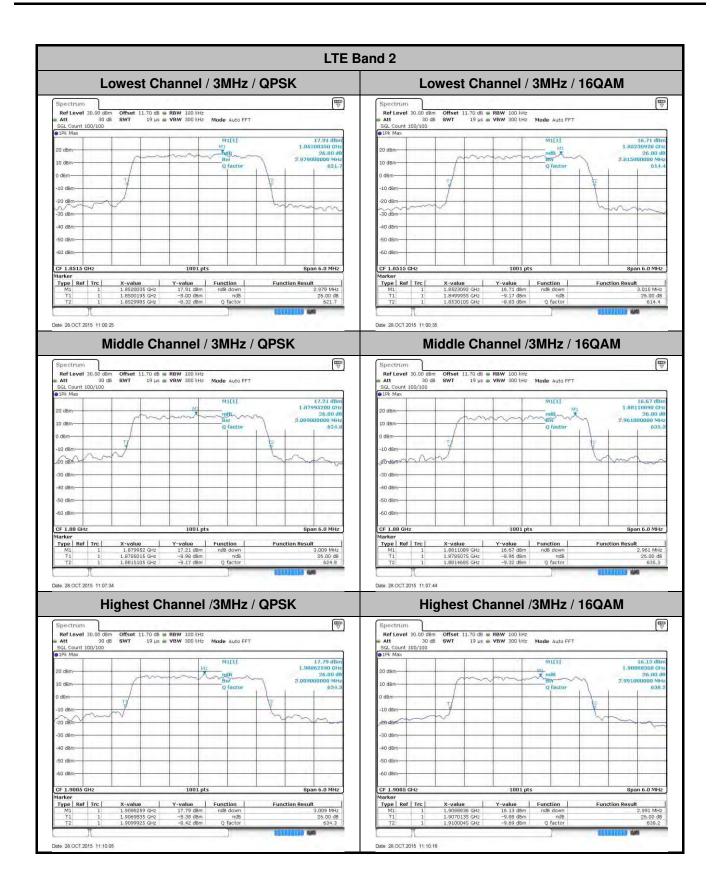


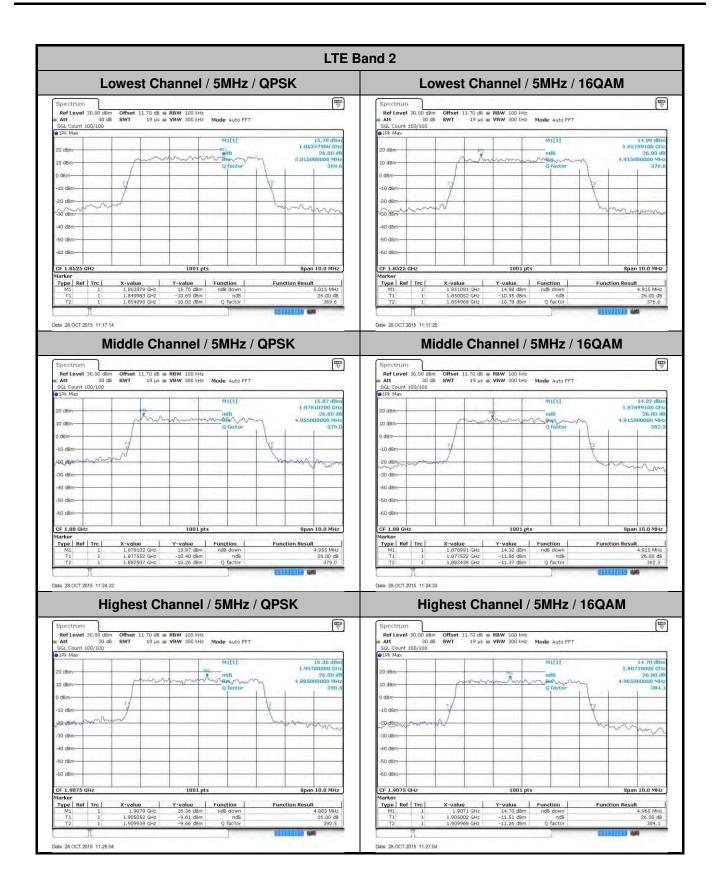




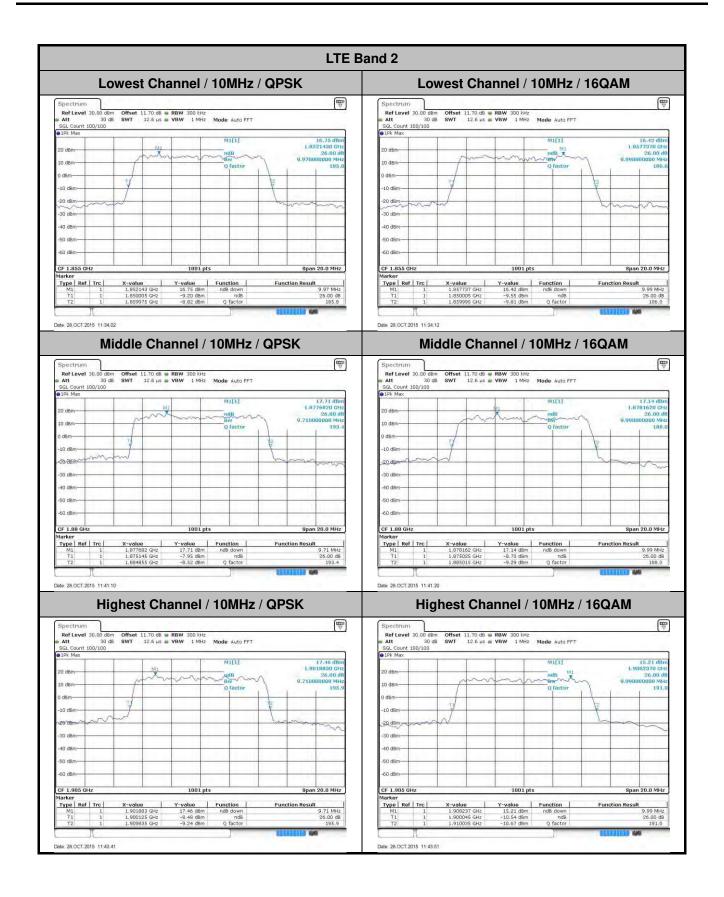



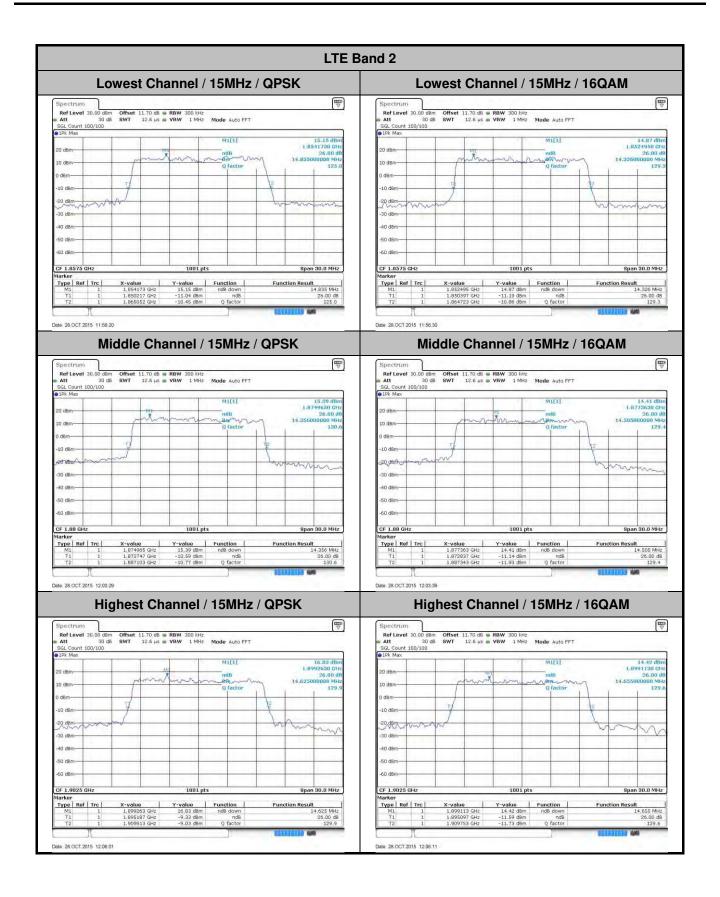

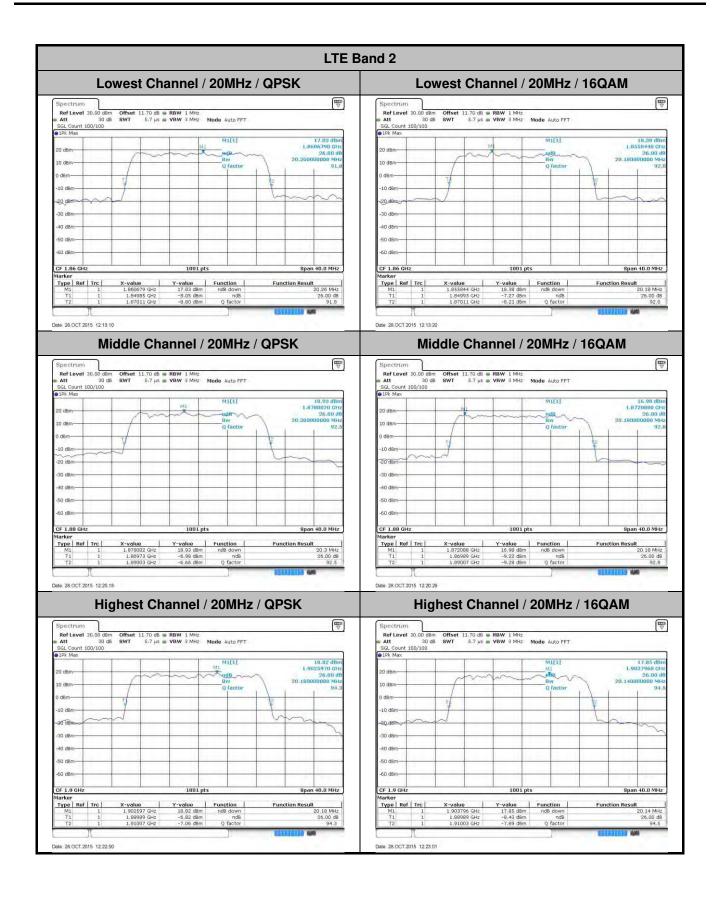



Occupied Bandwidth

Mode	LTE Band 2 : 99%OBW(MHz)												
BW	1.4MHz 3MHz			5MHz		10MHz		15MHz		20MHz			
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.09	1.09	2.7	2.71	4.5	4.5	8.99	9.07	13.46	13.46	18.46	18.38	
Middle CH	1.09	1.09	2.71	2.7	4.49	4.48	9.01	9.01	13.43	13.43	18.42	18.26	
Highest CH	1.09	1.1	2.72	2.72	4.5	4.49	8.99	8.99	13.46	13.43	18.46	18.46	


Page Number : A2-11 of 41



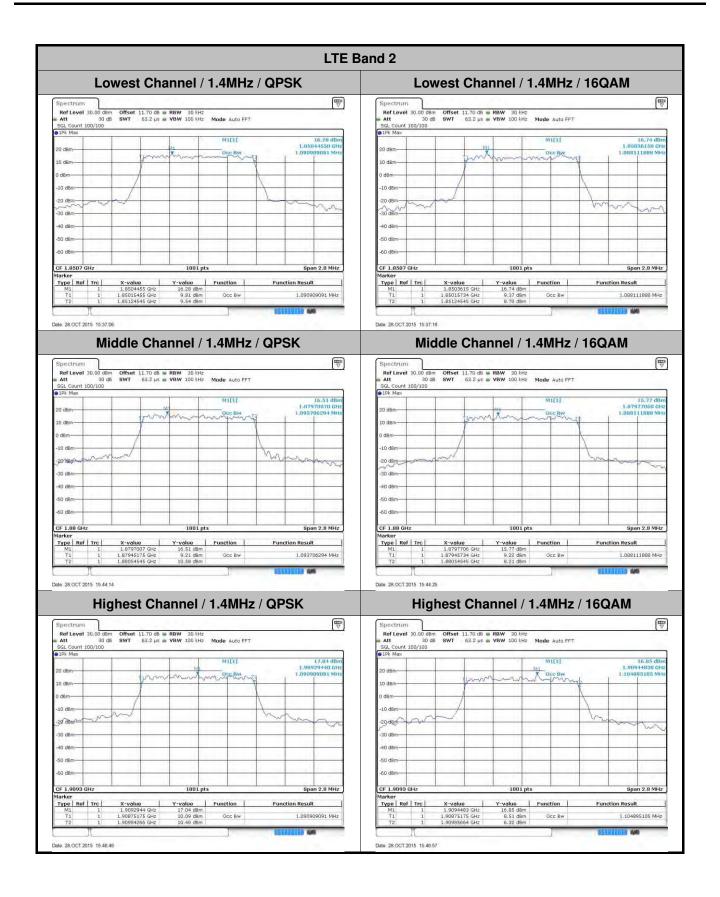


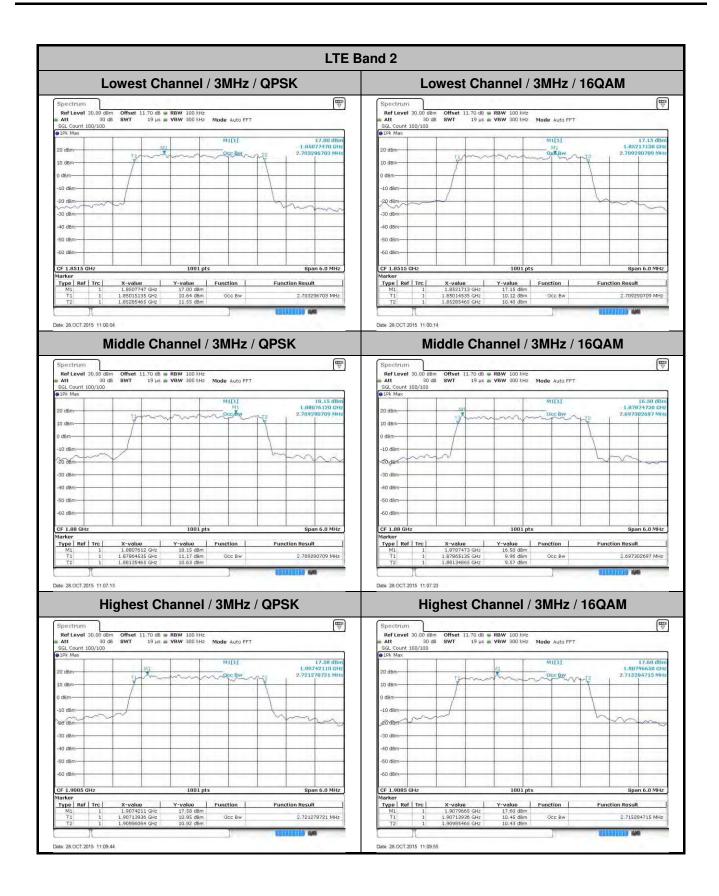




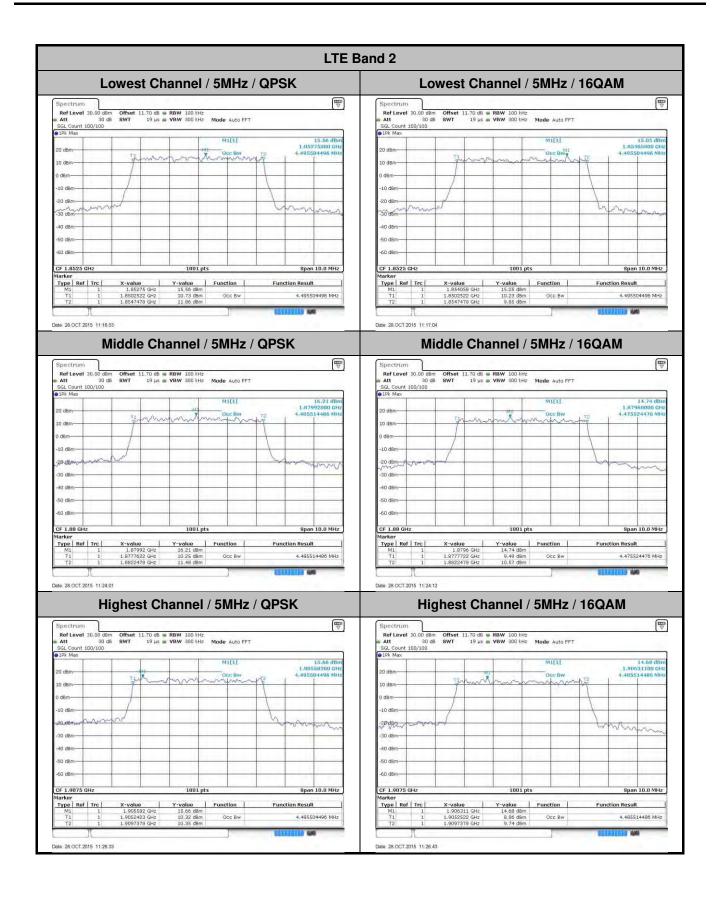




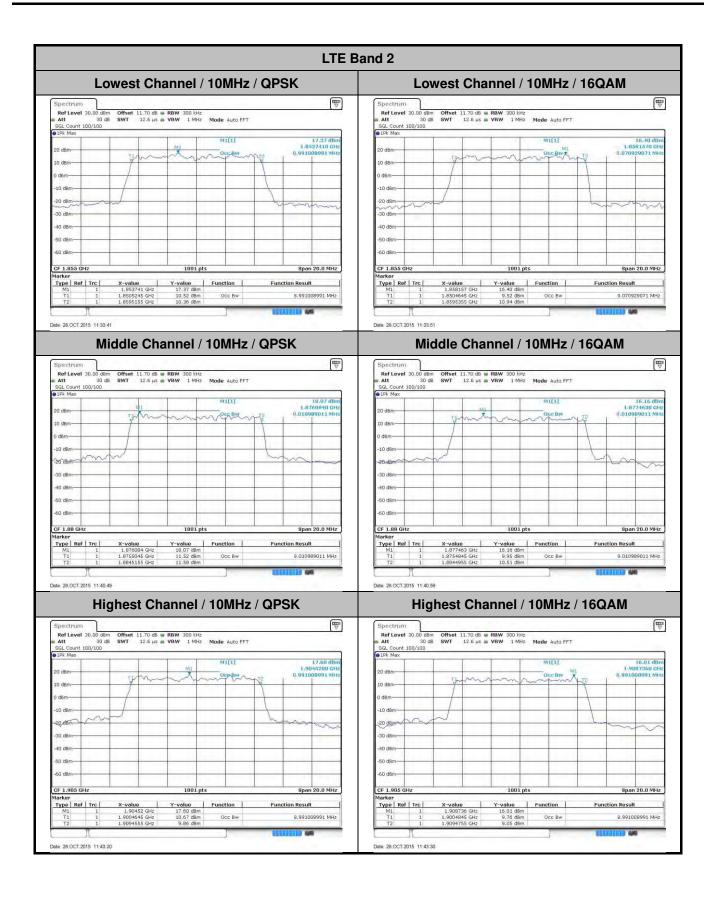



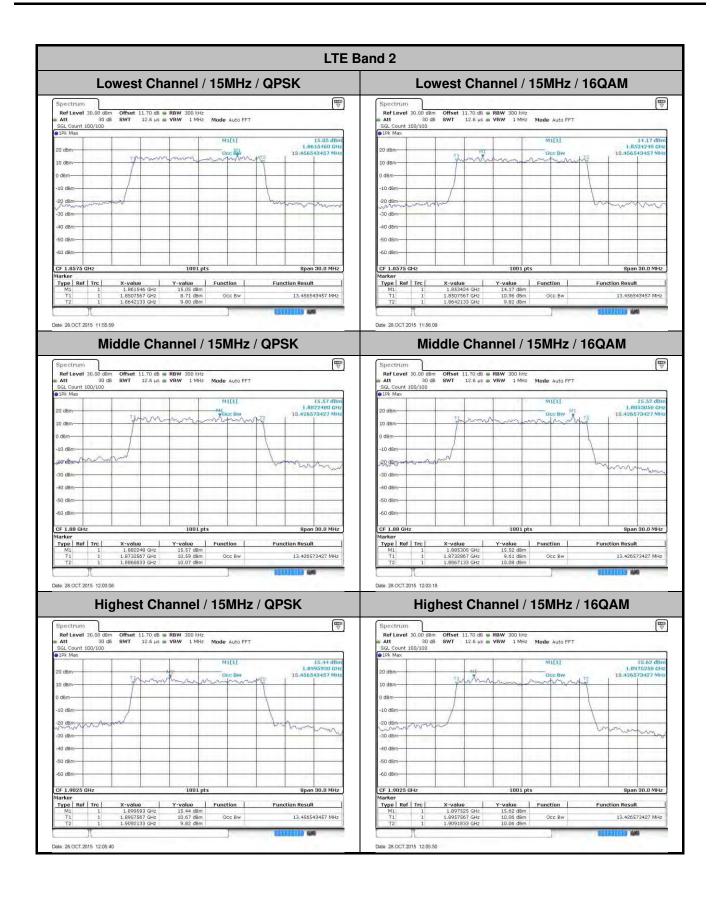


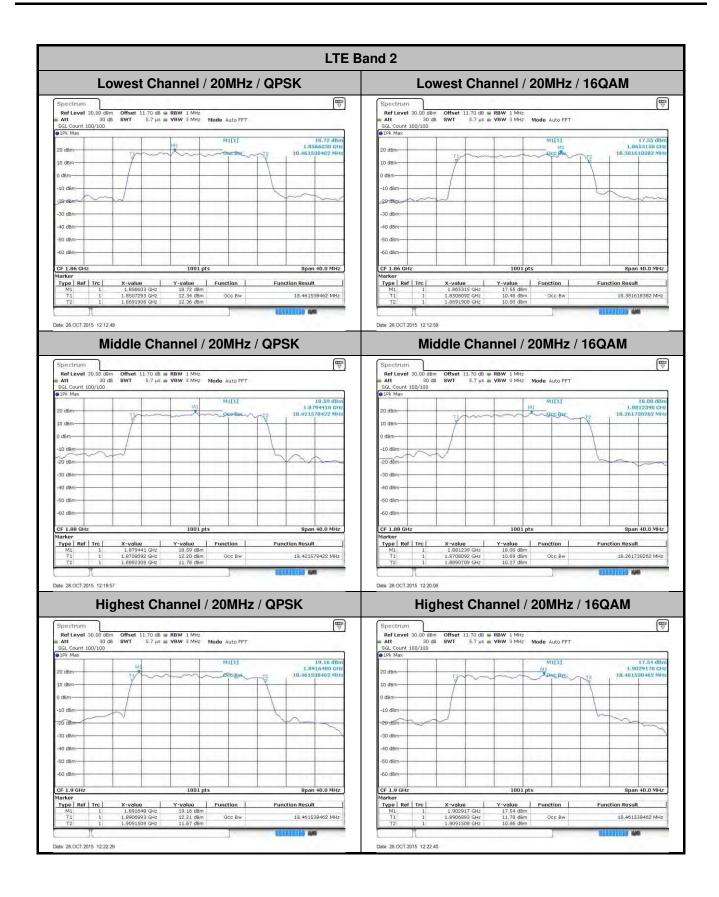






Conducted Band Edge


Page Number : A2-18 of 41

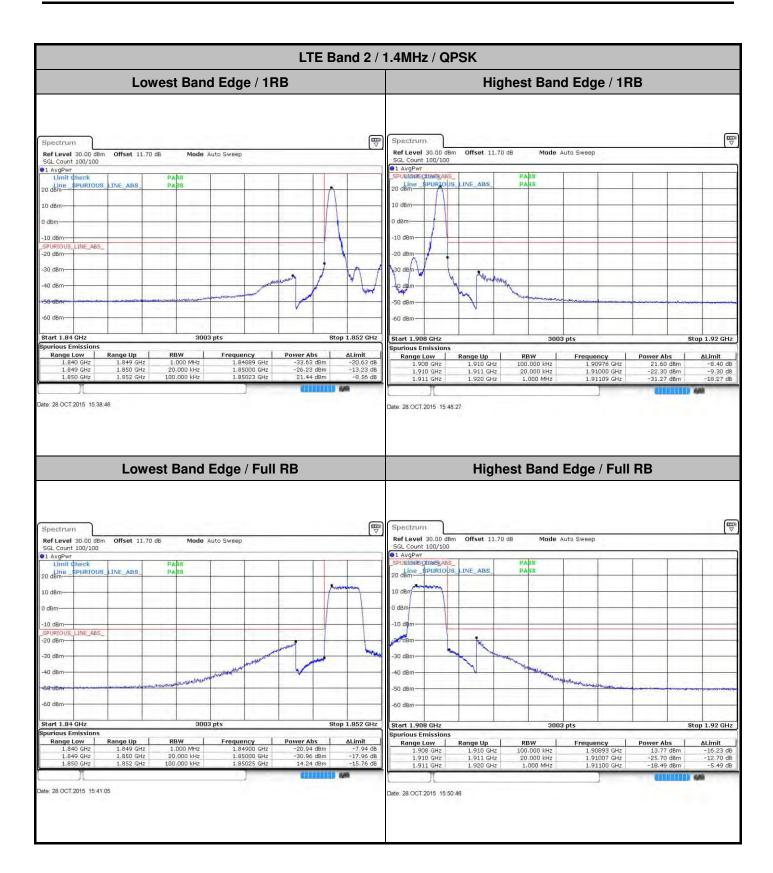


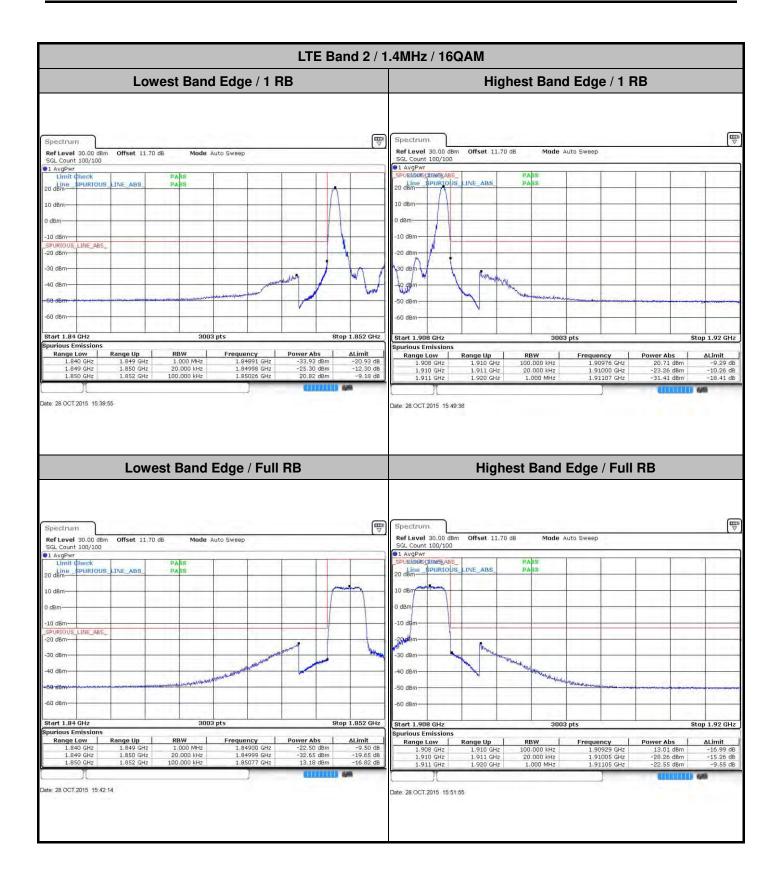


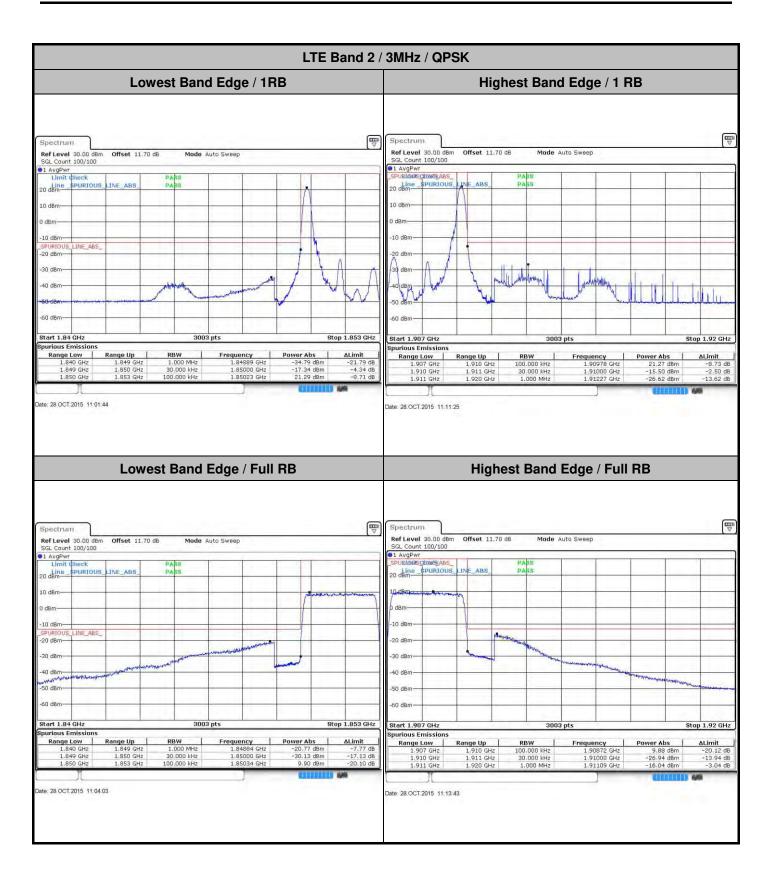


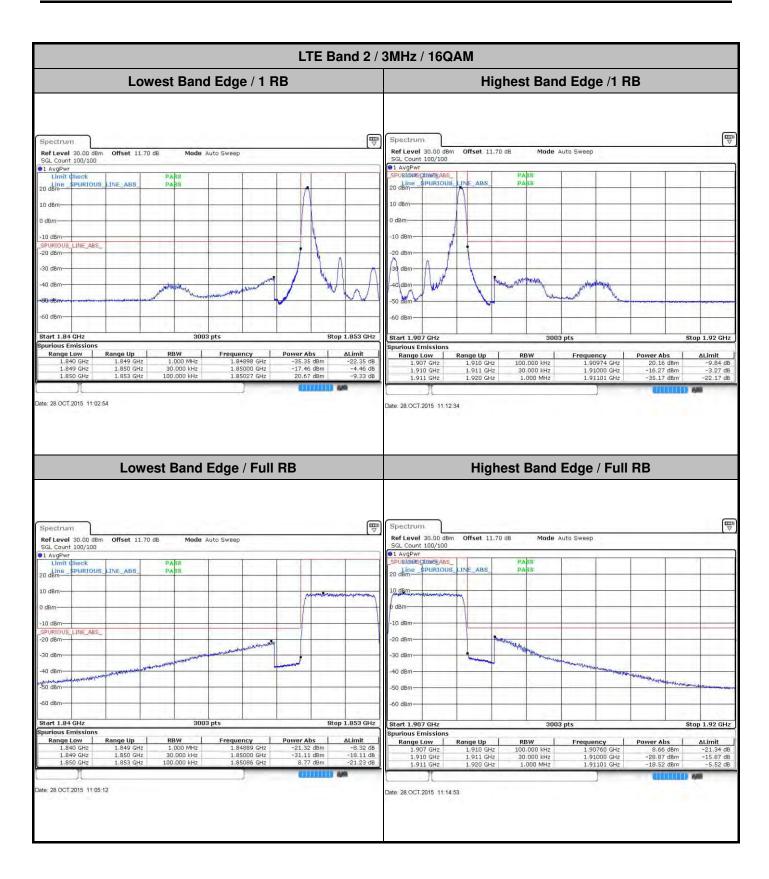


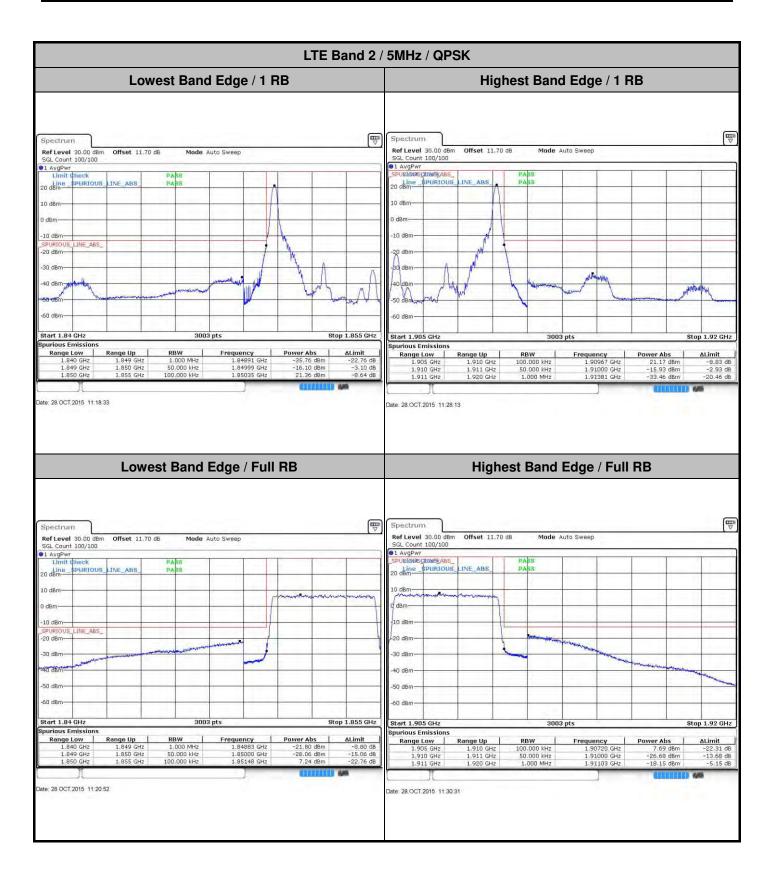


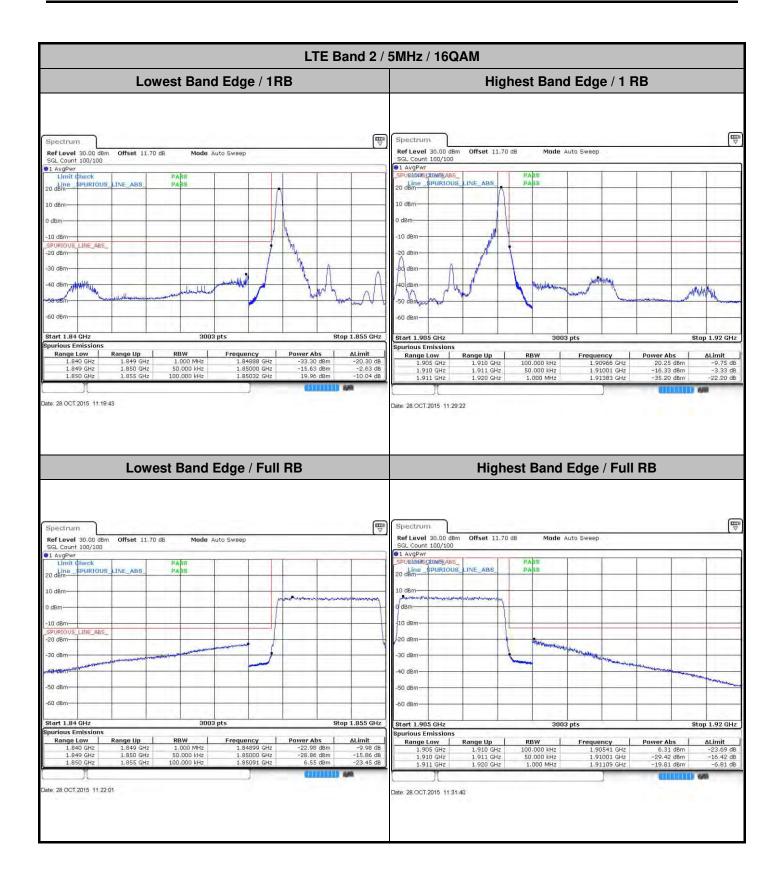


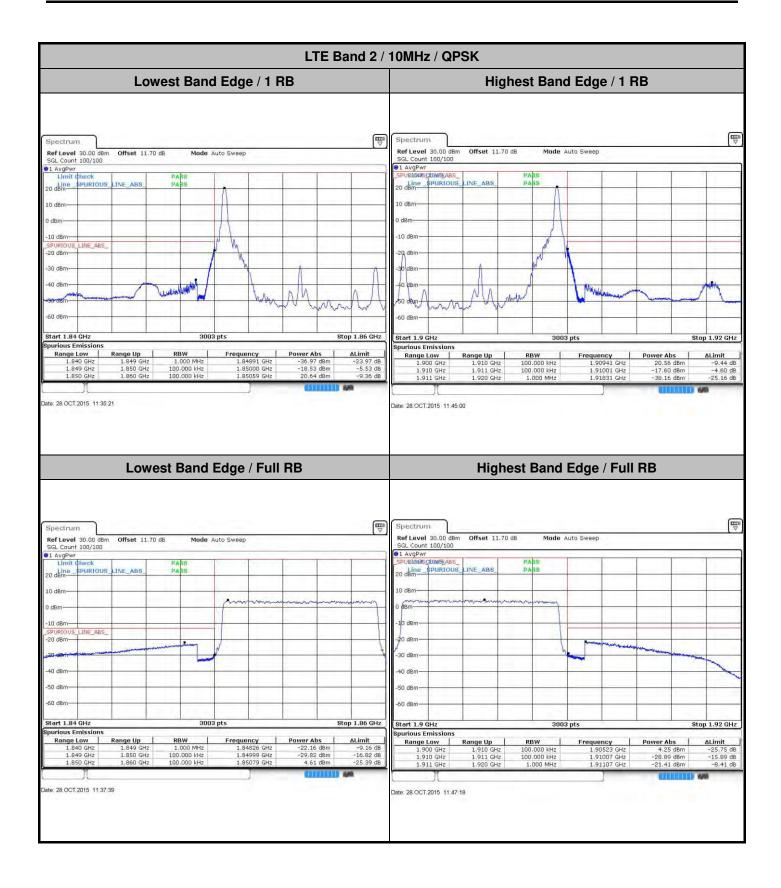


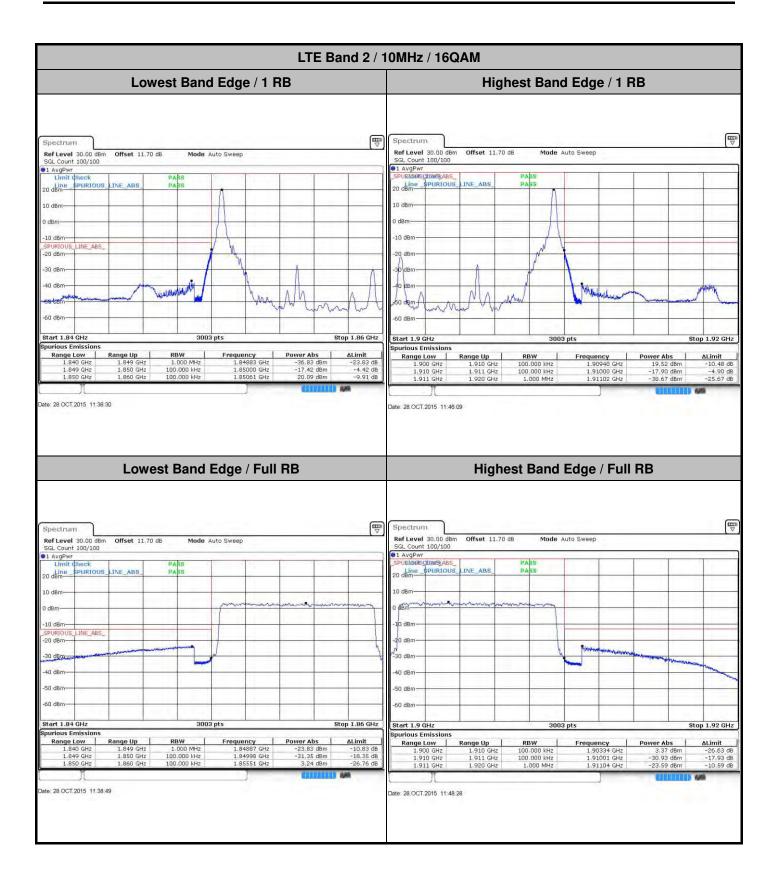

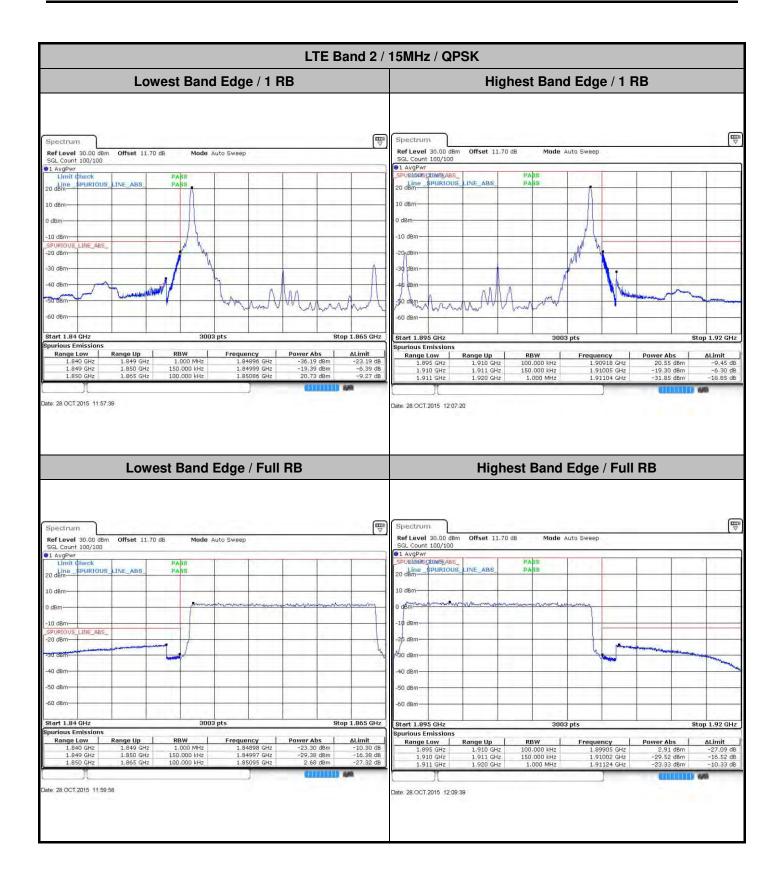

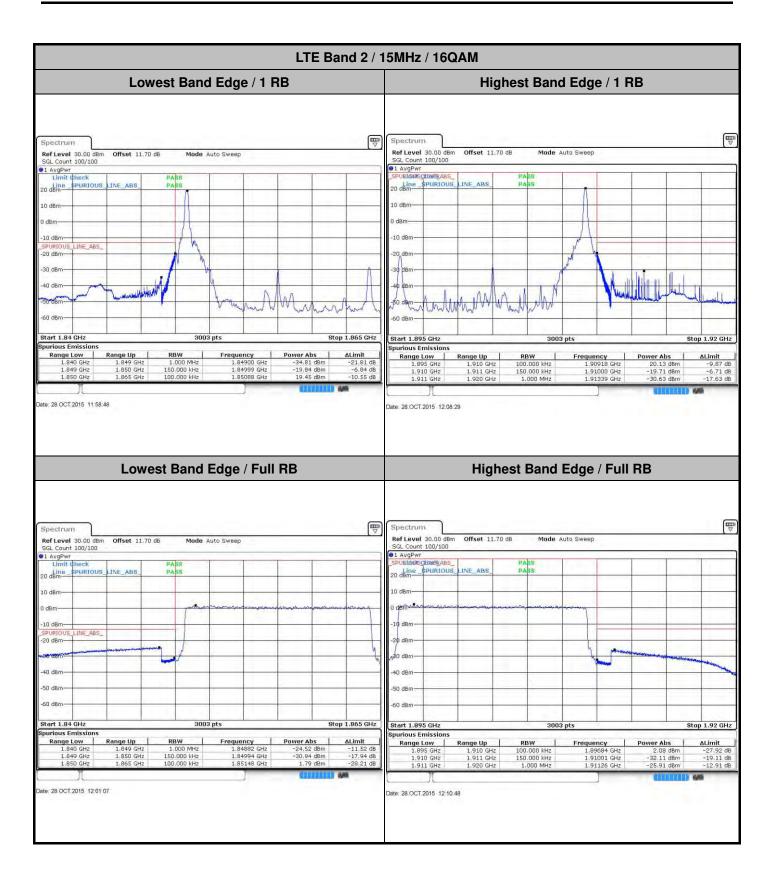


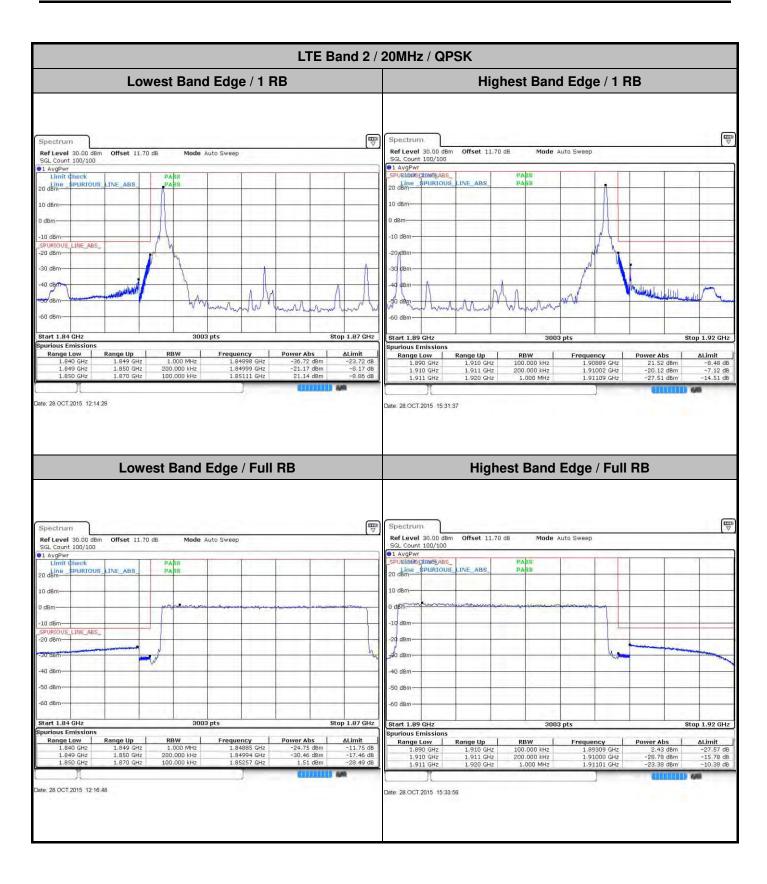


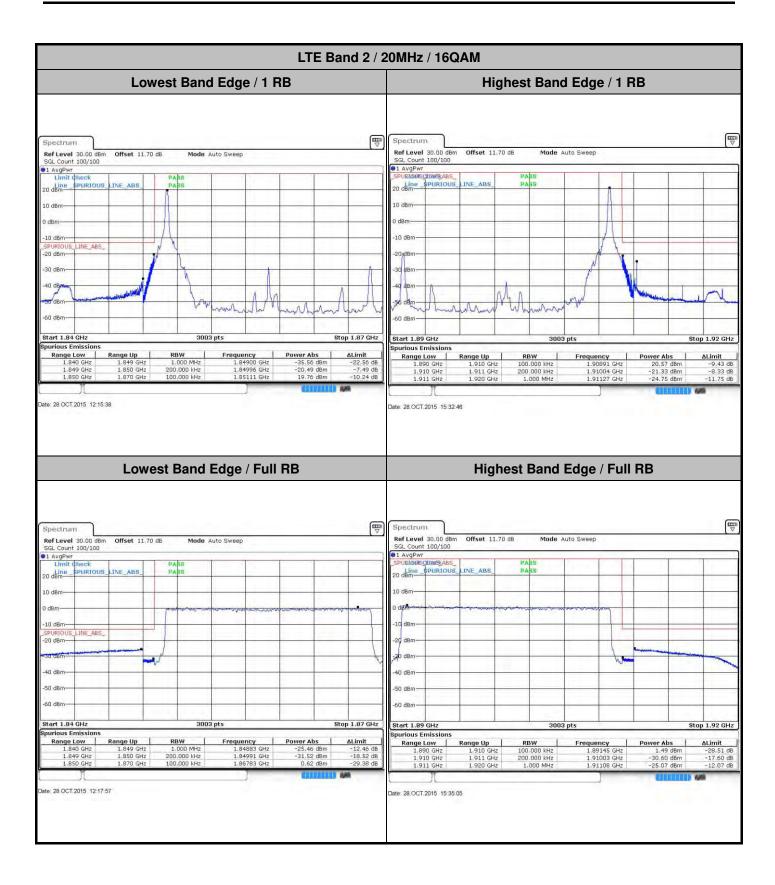



Conducted Spurious Emission


Page Number : A2-31 of 41

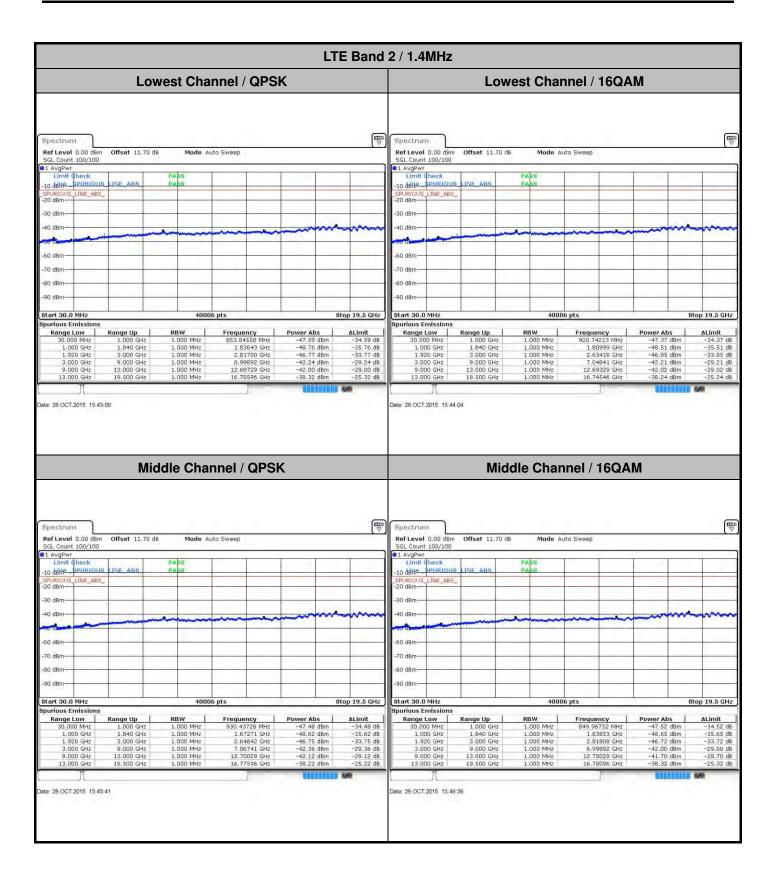


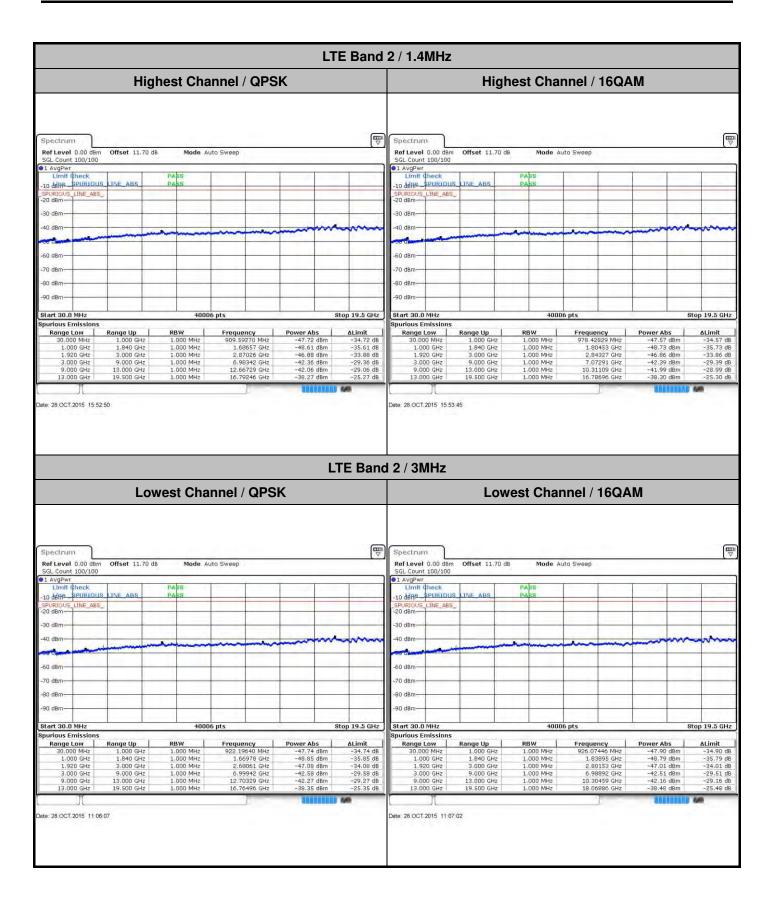


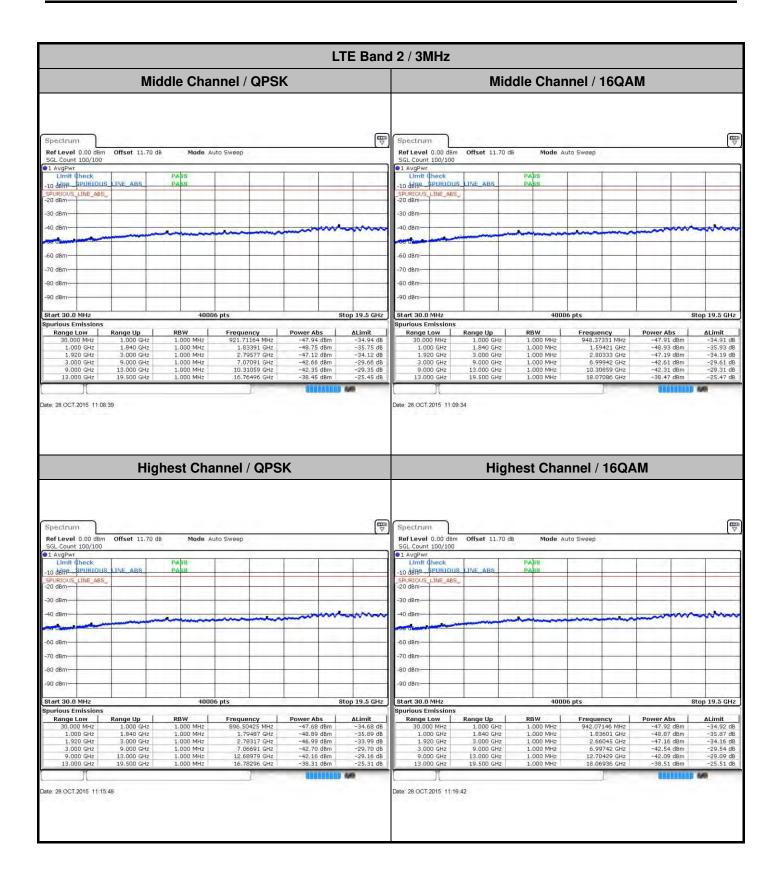

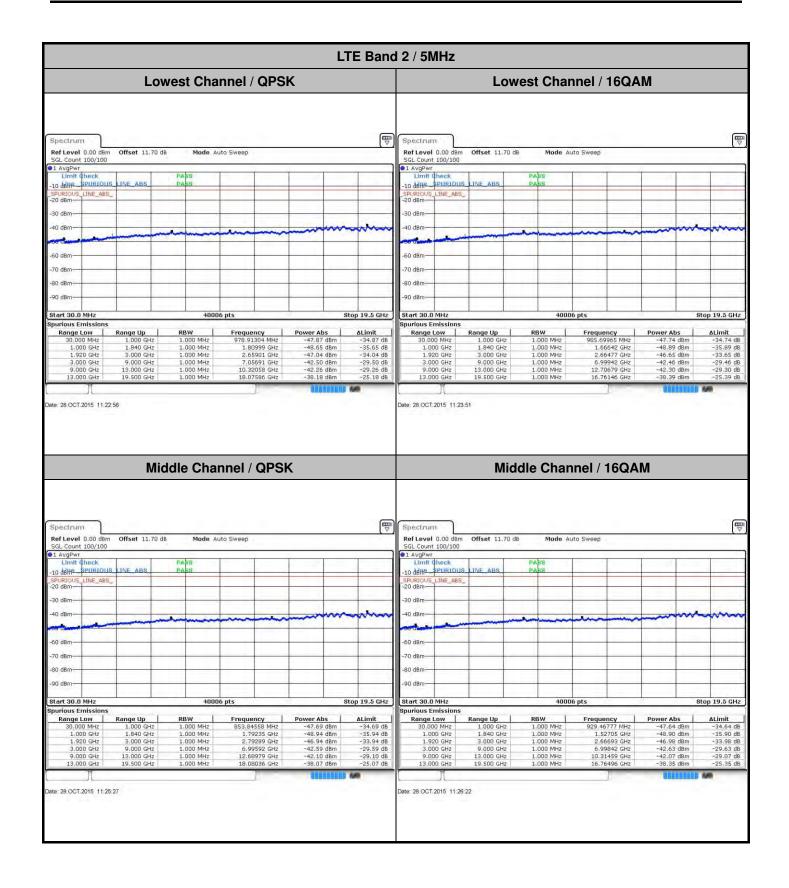


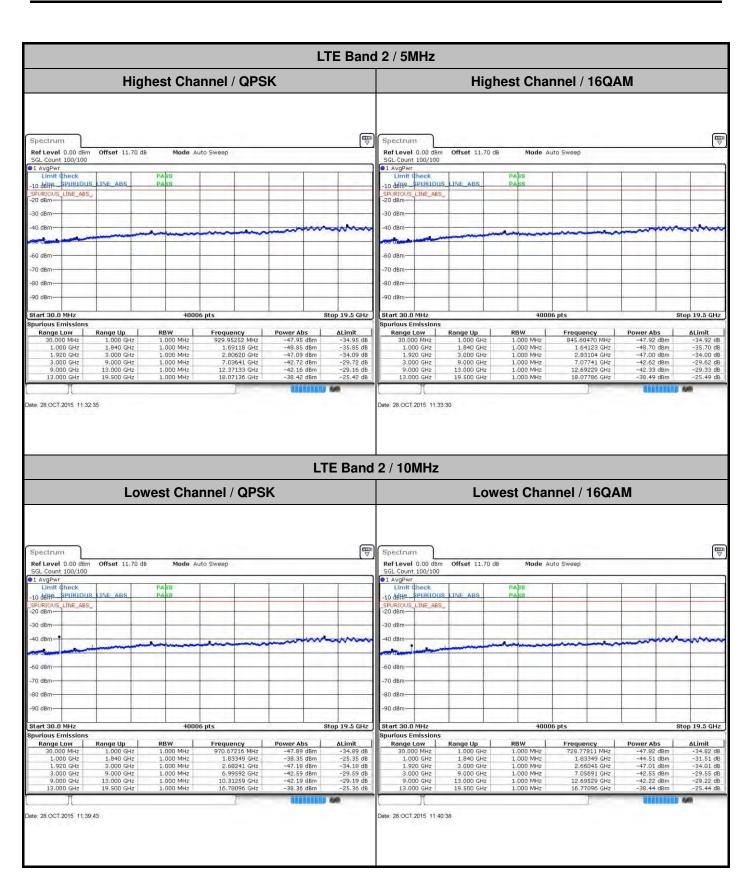


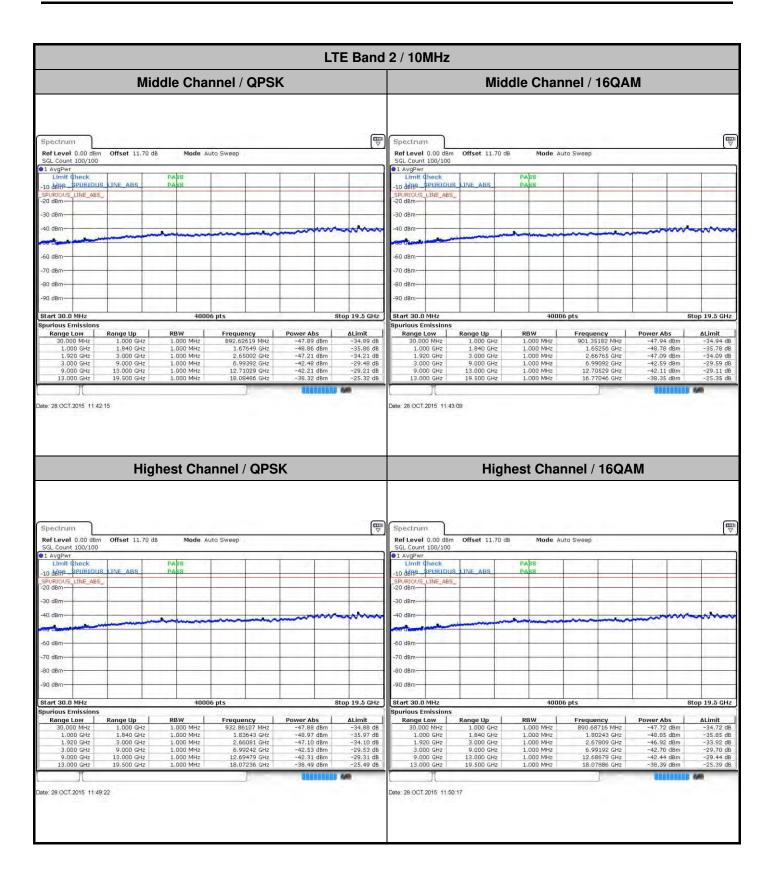

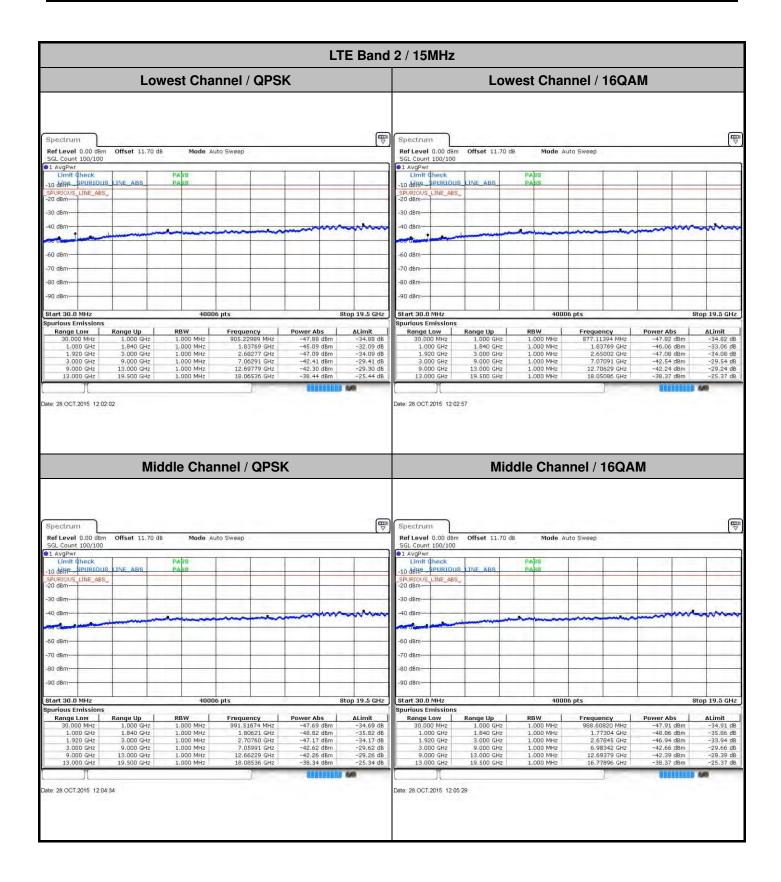



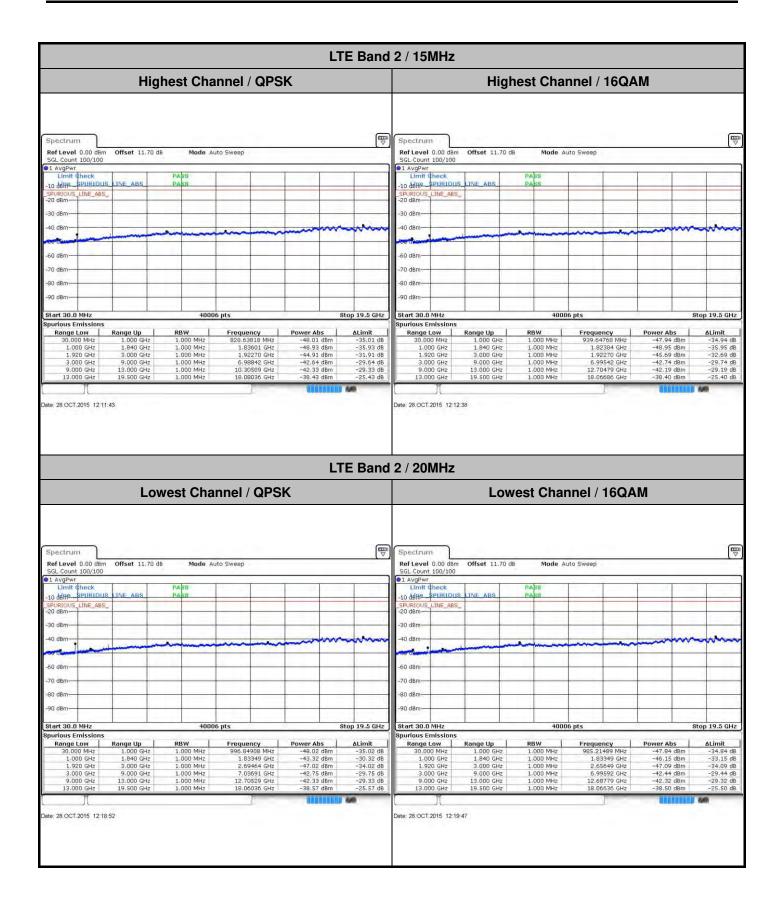

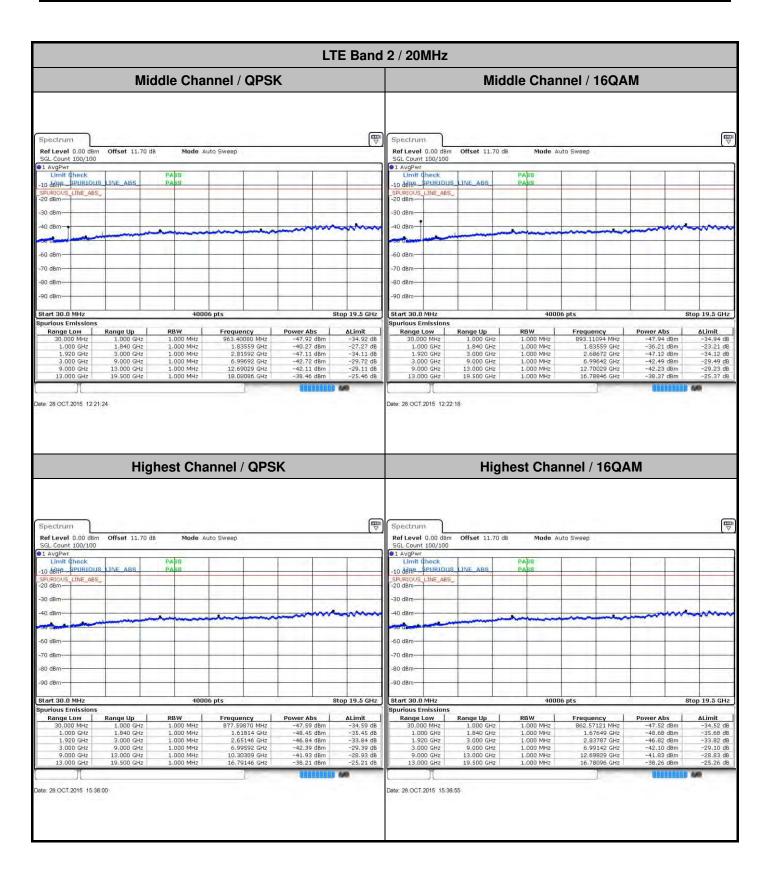



Frequency Stability

Test (Conditions	LTE Band 2 (QPSK) / Middle Channel	Limit
_		BW 10MHz	Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0018	
40	Normal Voltage	0.0004	
30	Normal Voltage Normal Voltage	0.0002	
20(Ref.)		0.0000	
10	Normal Voltage	0.0010	
0	Normal Voltage	0.0009	
-10	Normal Voltage	0.0002	PASS
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0007	
20	Maximum Voltage	0.0085	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0081	

Note:

- 1. Normal Voltage = 3.8 V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block.


Page Number : A2-41 of 41


LTE Band 5

Peak-to-Average Ratio

Mode					
Mod.	QP	SK	160	Limit: 13dB	
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.51	5.07	4.41	5.88	
Middle CH	4.58	5.48	5.54	6.23	PASS
Highest CH	4.2	5.22	5.33	5.88	

Page Number : A5-1 of 30

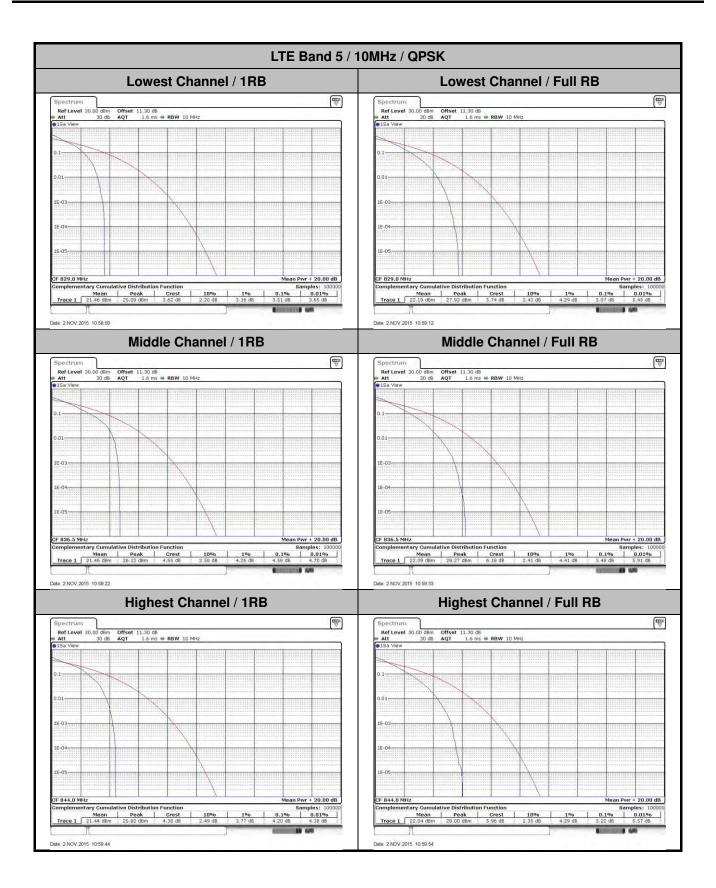

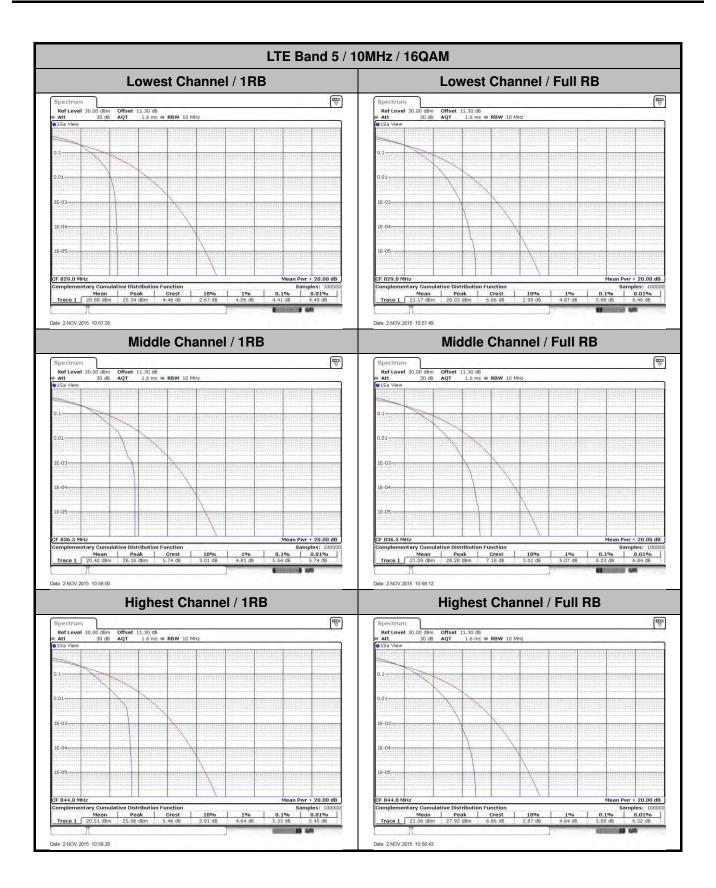

26dB Bandwidth

Mode	LTE Band 5 : 26dB BW(MHz)												
BW	1.4MHz 3MHz			5MHz 10MH		MHz 15MHz		20MHz					
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Lowest CH	1.26	1.26	3	2.97	4.96	4.96	10.05	9.85	-	-	-	-	
Middle CH	1.25	1.27	3	2.97	4.94	4.95	9.83	9.75	-	-	-	-	
Highest CH	1.26	1.25	2.99	3.02	4.84	4.91	9.81	9.89	-	-	-	-	

Page Number : A5-4 of 30

