

FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : GSM/WCDMA/LTE Phone + Bluetooth,
DTS/UNII a/b/g/n/ac, and NFC
BRAND NAME : Sony
FCC ID : PY7-PM0931
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Feb. 18, 2016 and testing was completed on Mar. 18, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	6
1.5 Testing Location	7
1.6 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power	9
2.3 Test Mode	10
2.4 Connection Diagram of Test System	11
2.5 Support Unit used in test configuration and system	12
2.6 EUT Operation Test Setup	12
2.7 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB and 99% Bandwidth Measurement	13
3.2 Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	18
3.5 Radiated Band Edges and Spurious Emission Measurement	34
3.6 AC Conducted Emission Measurement	38
3.7 Antenna Requirements	42
4 LIST OF MEASURING EQUIPMENT	43
5 UNCERTAINTY OF EVALUATION	45
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR621809C	Rev. 01	Initial issue of report	Apr. 01, 2016
FR621809C	Rev. 02	Updating carrier frequency channel in section 2.1.	Apr. 06, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.80 dB at 2390.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.10 dB at 0.470 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.2 Manufacturer

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n/ac, GPS and NFC

Product Specification subjective to this standard	
Antenna Type / Gain	Folded Monopole Antenna type with gain -5.80 dBi

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402455724207 IMEI 2: 004402455724215	A	34.0.A.0.325	CB5129YK7P	RF conducted measurement
IMEI 1: 004402455935944 IMEI 2: 004402455935951		34.0.A.0.325	CB5129YTTJ	Radiated Spurious Emission
IMEI 1: 004402455937049 IMEI 2: 004402455937056		34.0.A.1.25	CB5129YTVH	Conducted Emission

Accessory List	
AC Adapter	Model No. : UCH20
	Type No. : AC-0061-US
	S/N :
	1515W22500105 (for radiated spurious emission) 1515W22500101 (for conducted emission)
Earphone	Model No. : MH410c
	Type No. : AG-1110
	S/N :
	12361A15006EF0E (for radiated spurious emission) 12361A15006EF0E (for conducted emission)
USB Cable	Model No. : UCB16
	Type No. : AI-0142
	S/N :
	1602A9000002558 (for radiated spurious emission) 1602A9000002558 (for conducted emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b mode				
Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
Peak Power (dBm)	17.72	17.58	17.63	17.65

2.4GHz 802.11g mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Peak Power (dBm)	23.49	23.48	23.18	23.15	22.80	23.22	23.14	22.94

2.4GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Peak Power (dBm)	23.50	23.48	23.44	23.36	23.32	23.18	23.24	23.43



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera (Rear) + Earphone + USB Cable (Charging from Adapter)

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

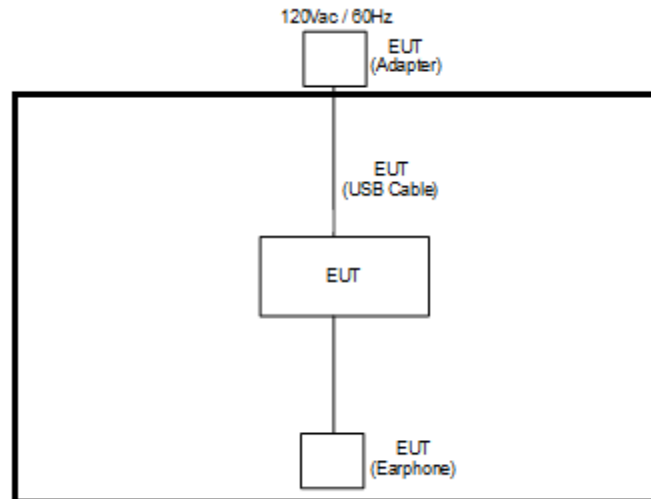

<AC Conducted Emission Mode>

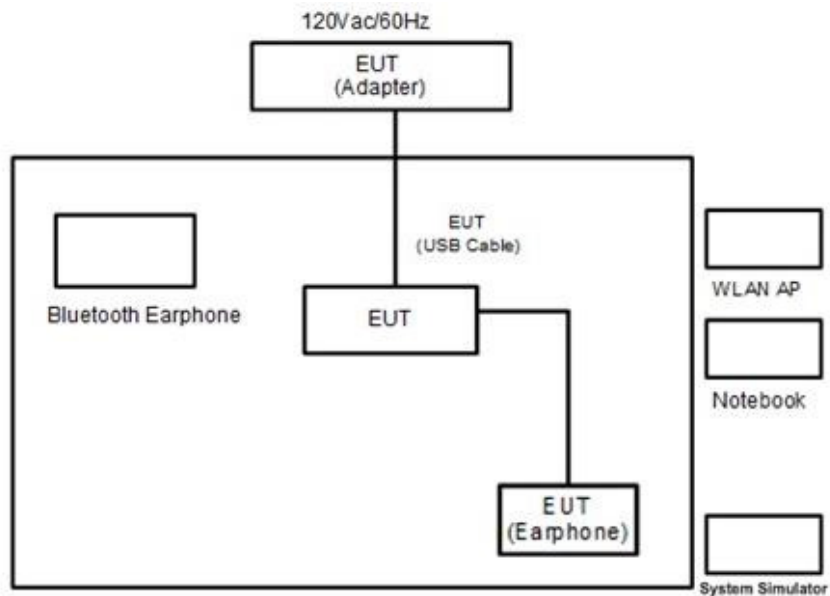

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Samsung	SBH20	PY7-RD0010	Unshielded, 0.75 m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.



3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

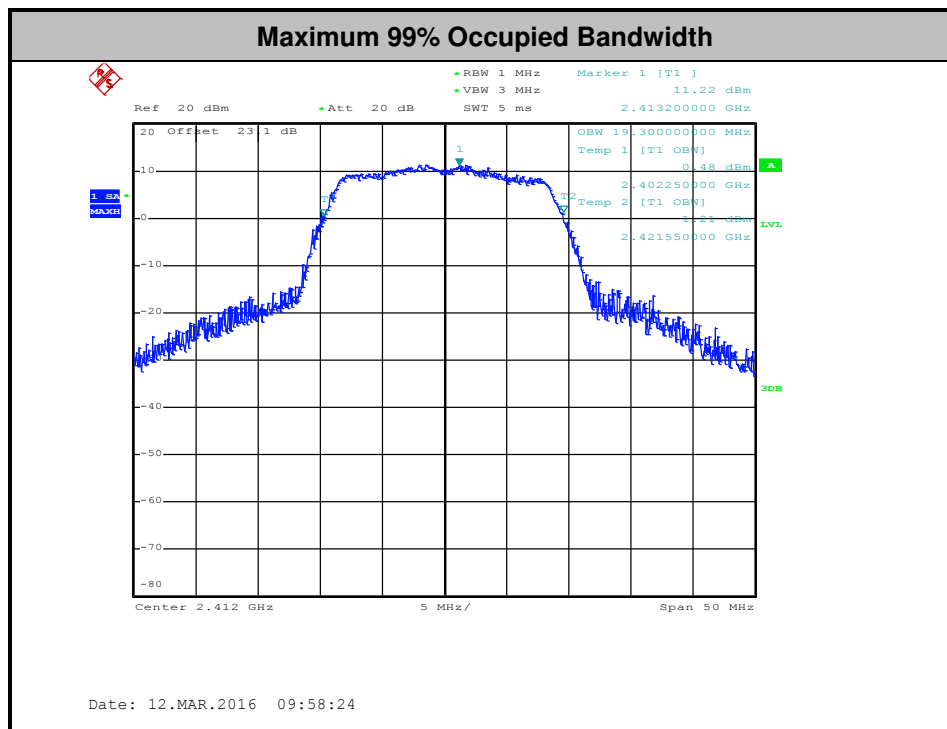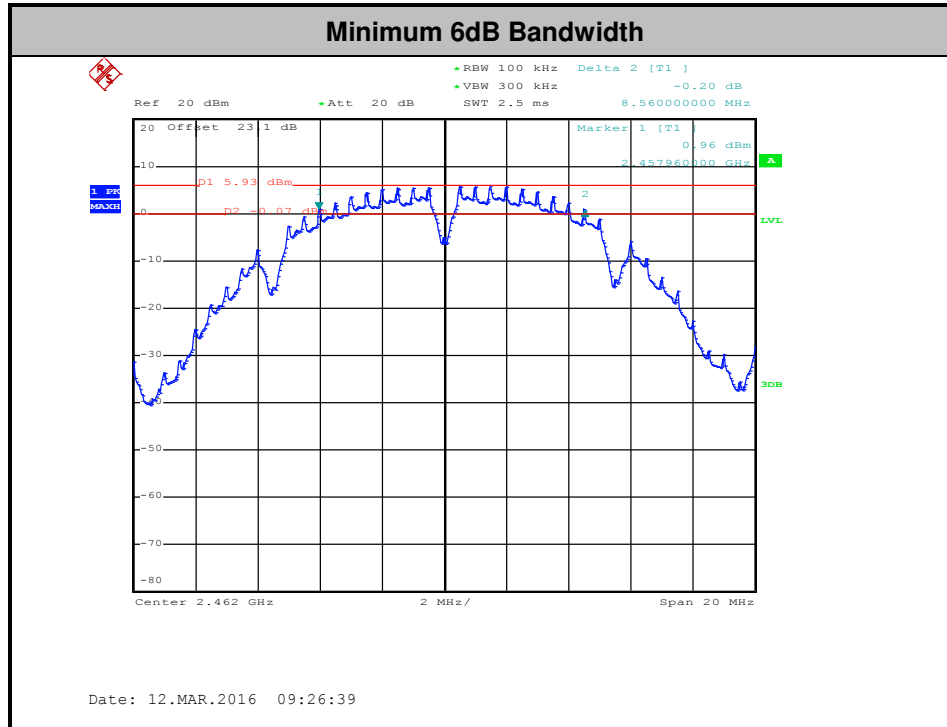

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r03 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

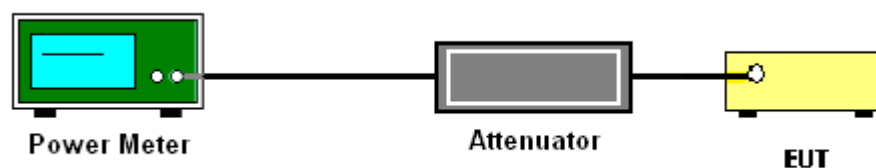

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

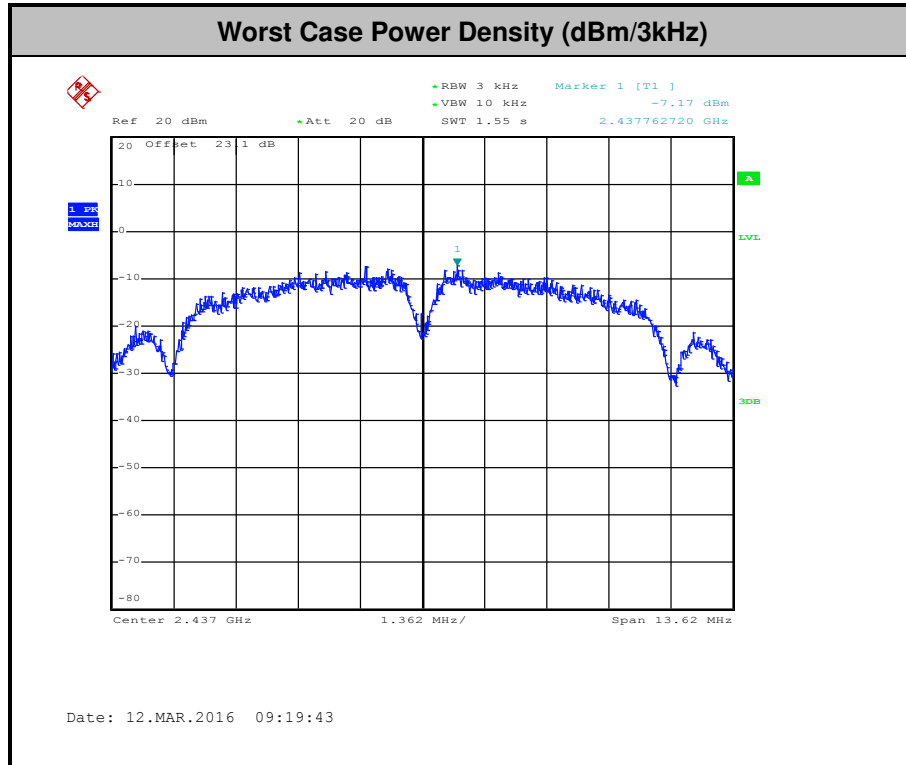

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup





3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo

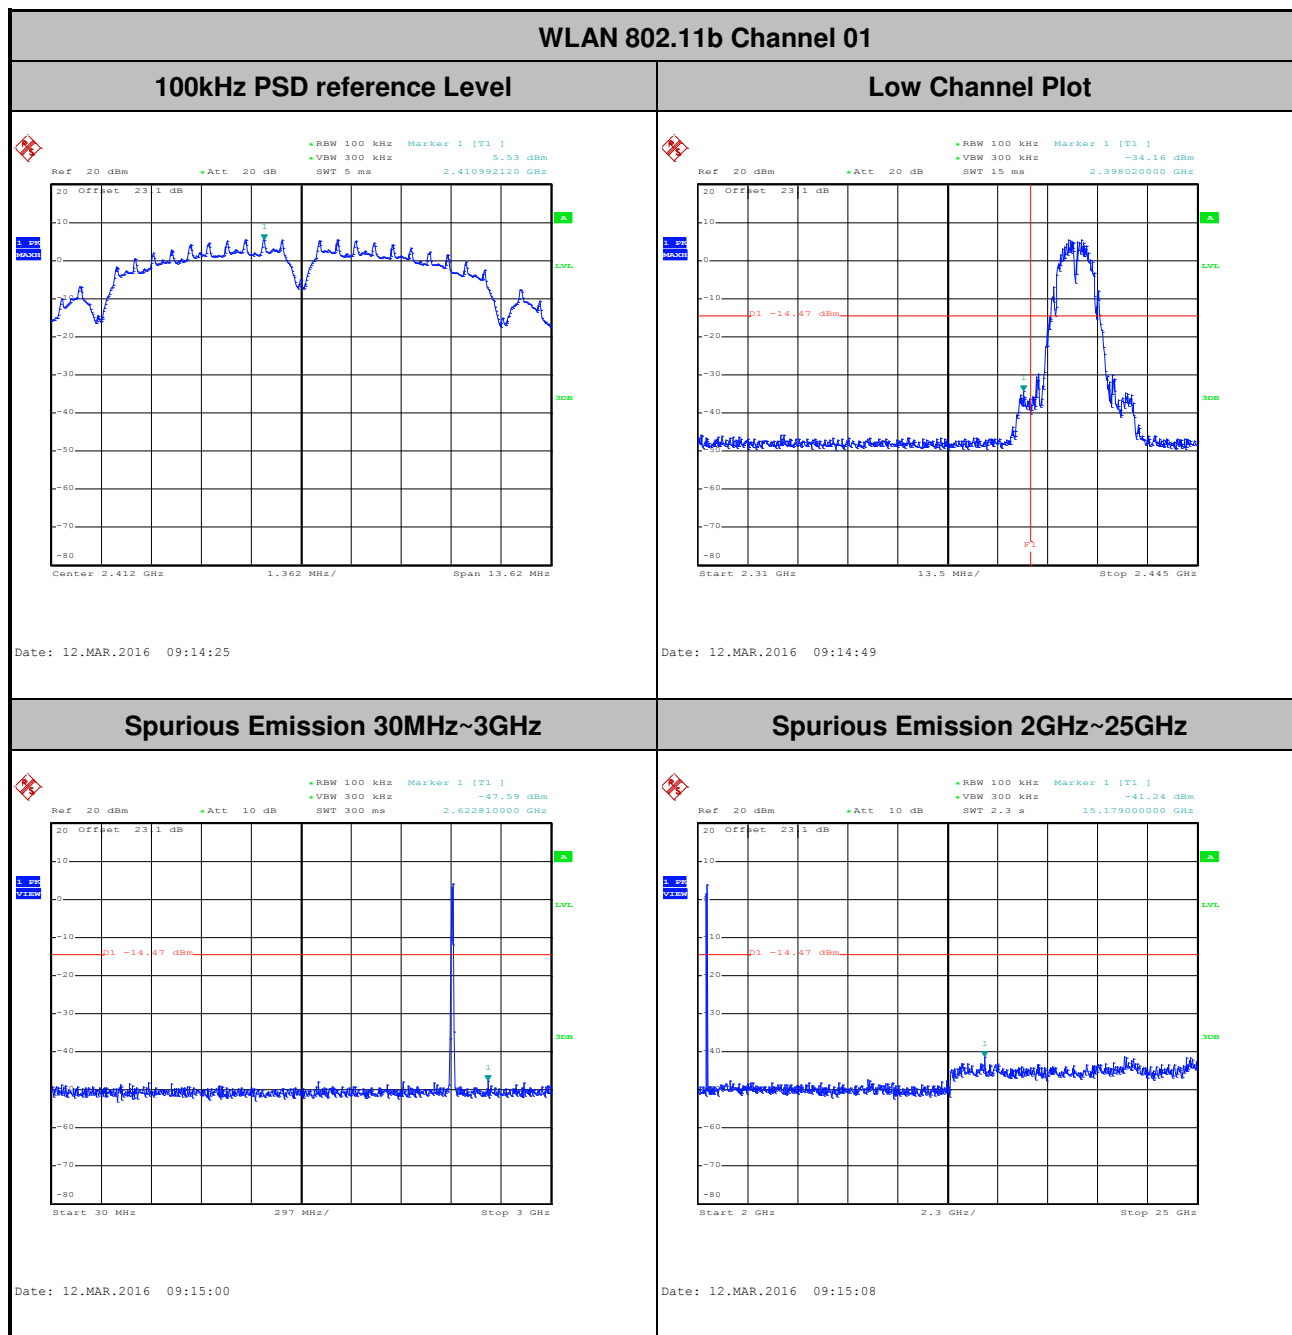




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo


WLAN 802.11b Channel 06

100kHz PSD reference Level

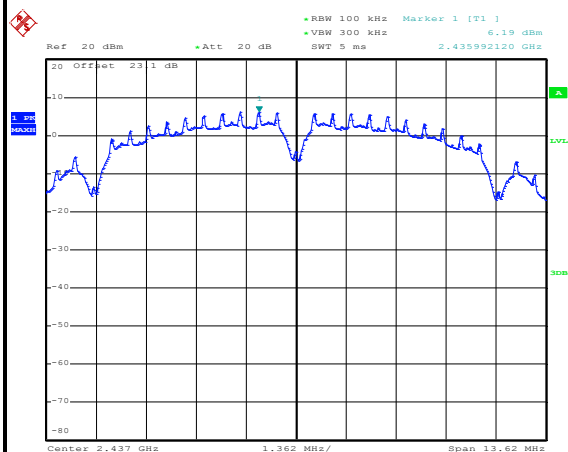


Date: 12.MAR.2016 09:20:20

Spurious Emission 30MHz~3GHz

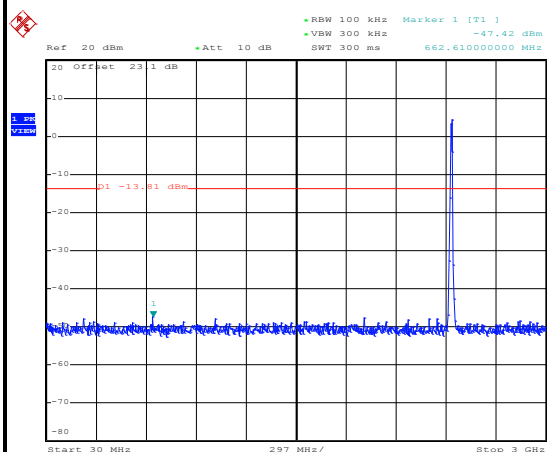

Date: 12.MAR.2016 09:20:31


Spurious Emission 2GHz~25GHz

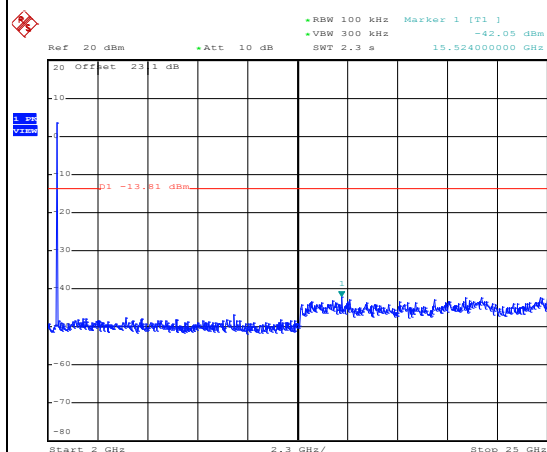


Date: 12.MAR.2016 09:20:40




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo

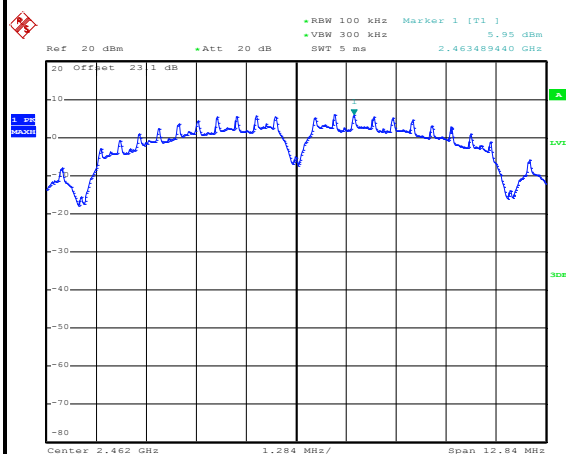WLAN 802.11b Channel 11**100kHz PSD reference Level**


Date: 12.MAR.2016 09:28:10

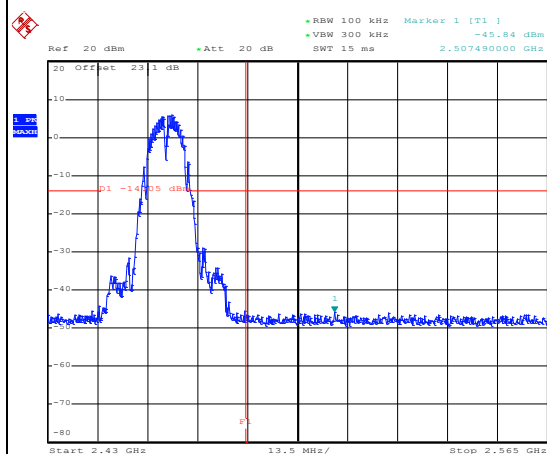High Channel Plot

Date: 12.MAR.2016 09:28:48

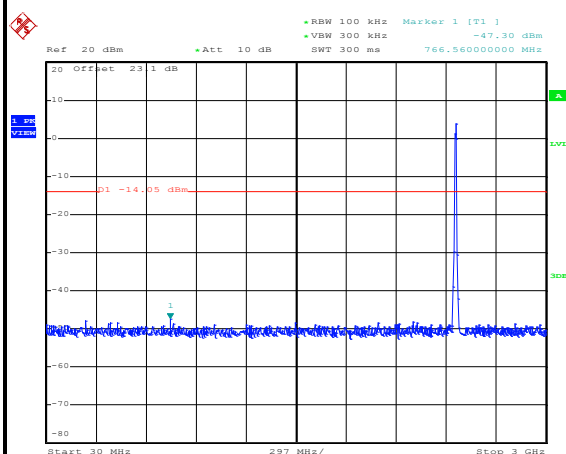Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 09:28:59

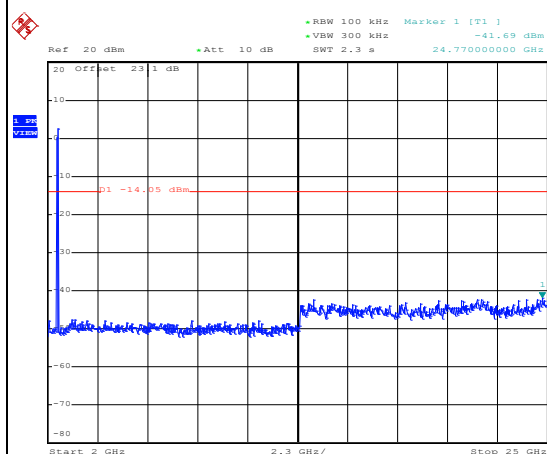Spurious Emission 2GHz~25GHz


Date: 12.MAR.2016 09:29:08



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	12	Test Engineer :	Bill Kuo


WLAN 802.11b Channel 12

100kHz PSD reference Level

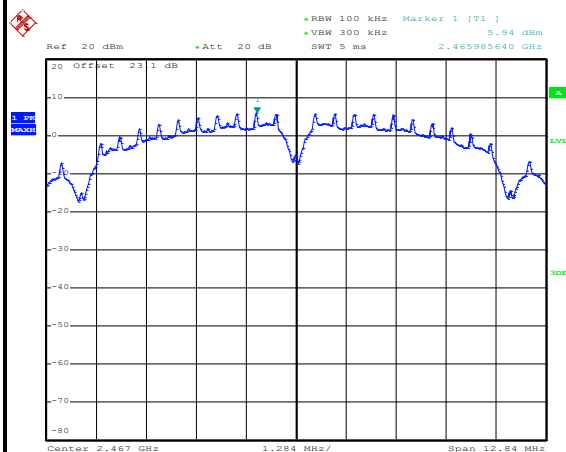


Date: 12.MAR.2016 10:30:54

High Channel Plot

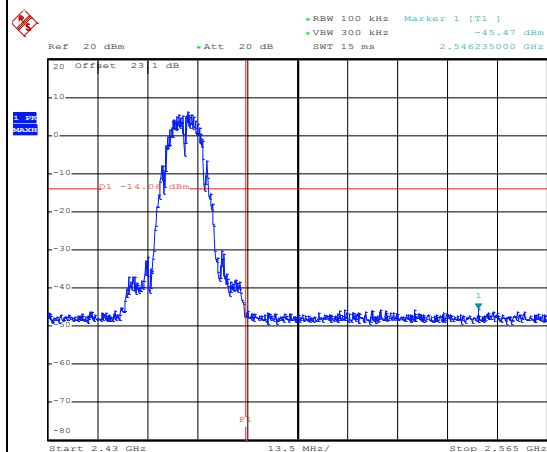


Date: 12.MAR.2016 10:31:49

Spurious Emission 30MHz~3GHz

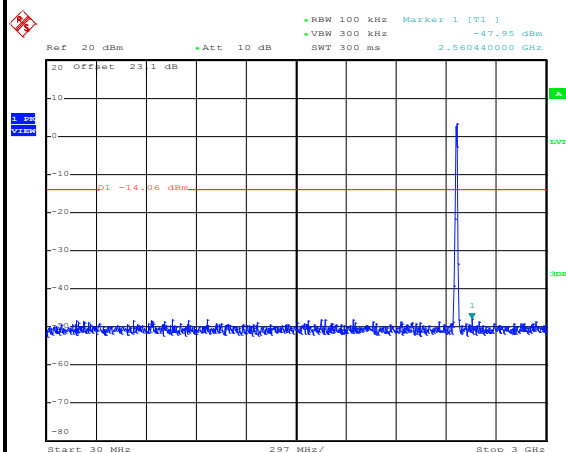

Date: 12.MAR.2016 10:32:30

Spurious Emission 2GHz~25GHz

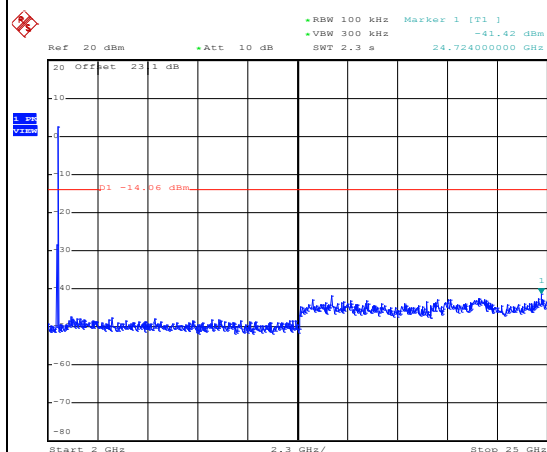


Date: 12.MAR.2016 10:32:39



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	13	Test Engineer :	Bill Kuo


WLAN 802.11b Channel 13

100kHz PSD reference Level

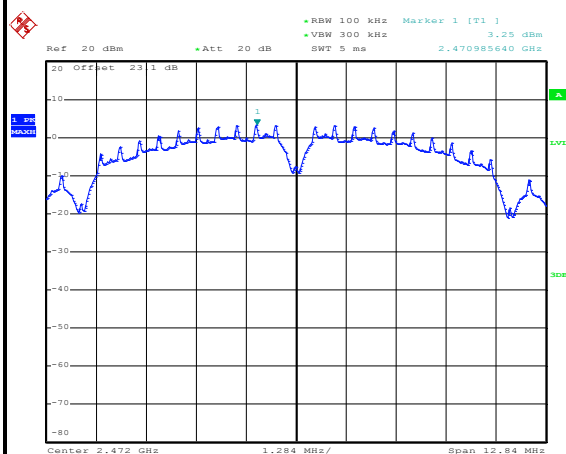


Date: 12.MAR.2016 10:37:59

High Channel Plot

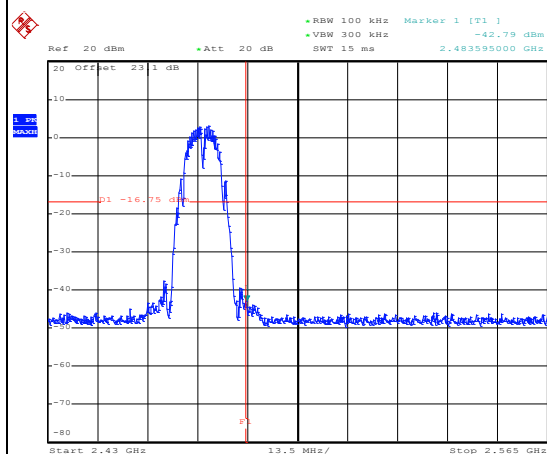


Date: 12.MAR.2016 10:42:10

Spurious Emission 30MHz~3GHz

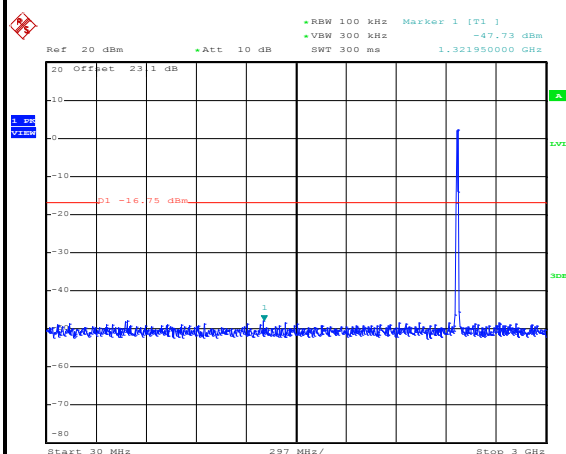

Date: 12.MAR.2016 10:38:10

Spurious Emission 2GHz~25GHz

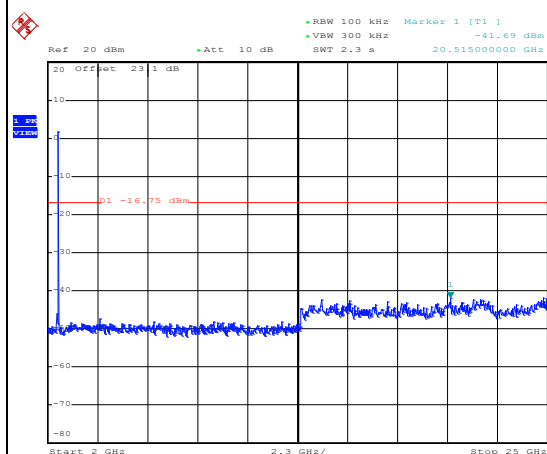


Date: 12.MAR.2016 10:38:19



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 01

100kHz PSD reference Level

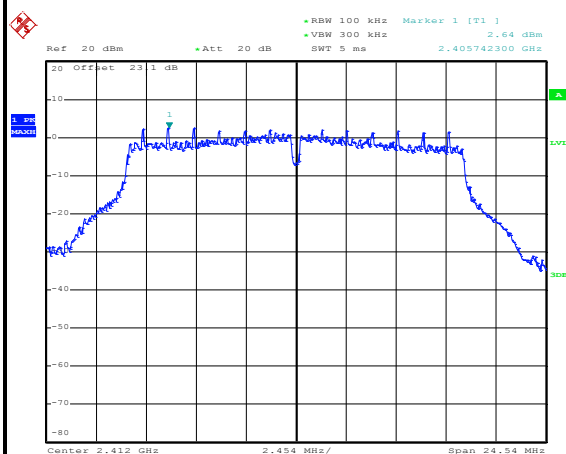


Date: 12.MAR.2016 09:49:55

Low Channel Plot

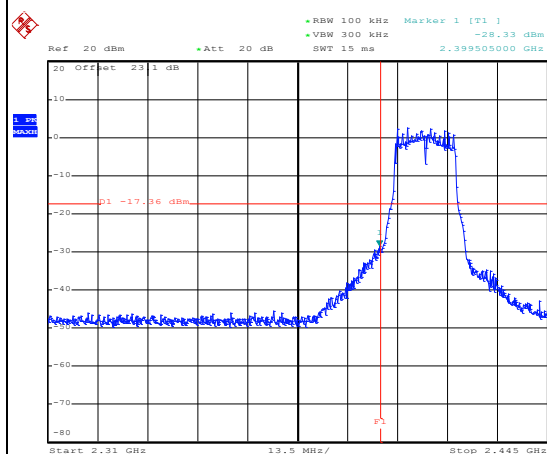


Date: 12.MAR.2016 09:50:16

Spurious Emission 30MHz~3GHz

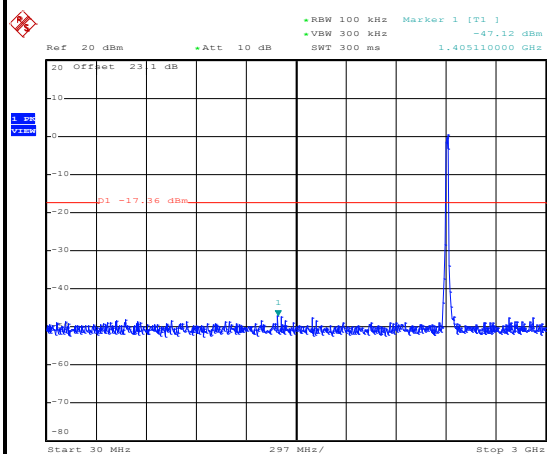

Date: 12.MAR.2016 09:50:28


Spurious Emission 2GHz~25GHz

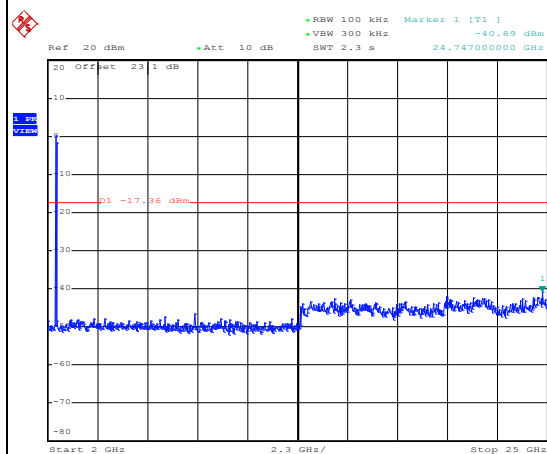


Date: 12.MAR.2016 09:50:36




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo

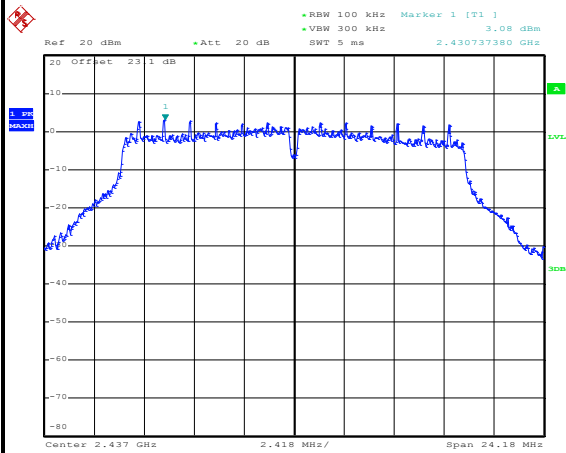WLAN 802.11g Channel 06**100kHz PSD reference Level**

Date: 12.MAR.2016 09:44:03

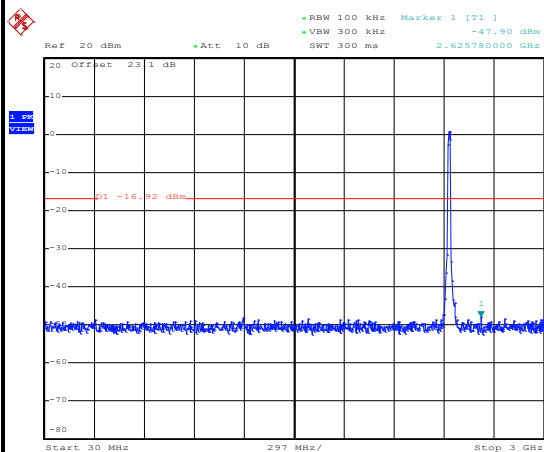Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 09:44:27

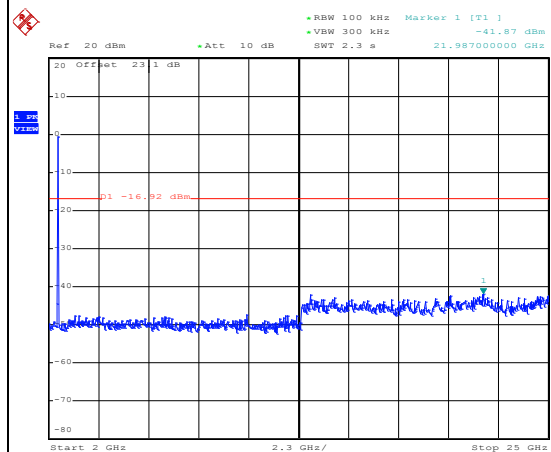Spurious Emission 2GHz~25GHz


Date: 12.MAR.2016 09:44:35



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 11

100kHz PSD reference Level

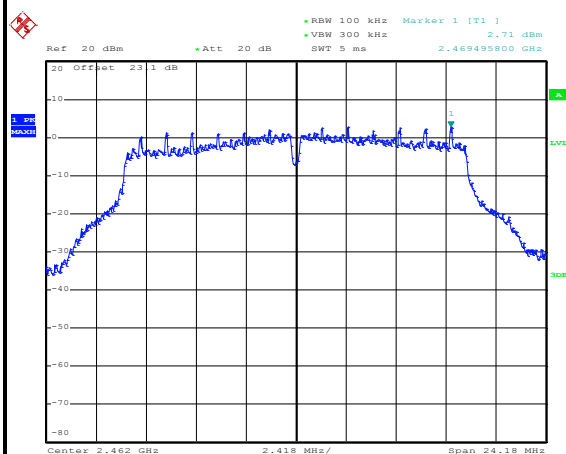


Date: 12.MAR.2016 09:38:08

High Channel Plot

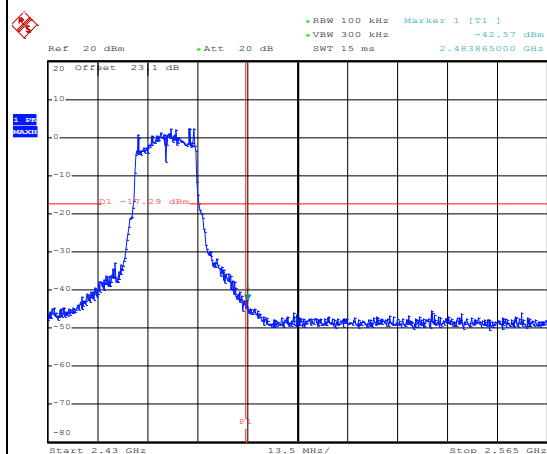


Date: 12.MAR.2016 09:38:25

Spurious Emission 30MHz~3GHz

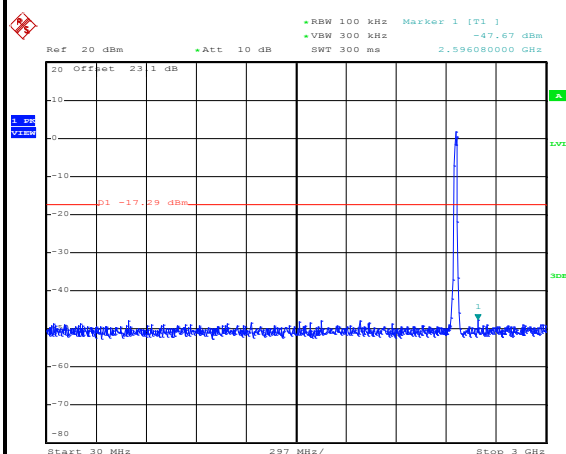

Date: 12.MAR.2016 09:38:37


Spurious Emission 2GHz~25GHz

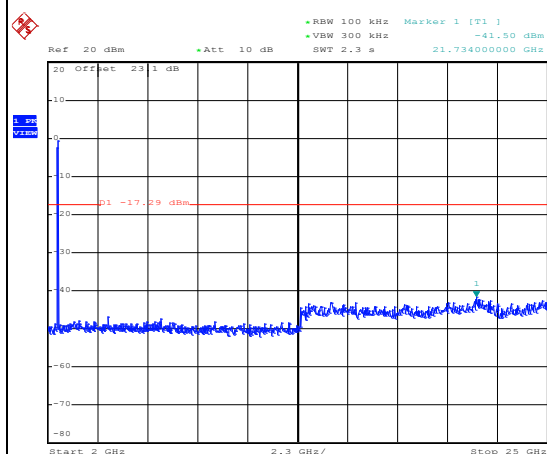


Date: 12.MAR.2016 09:38:45




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	12	Test Engineer :	Bill Kuo

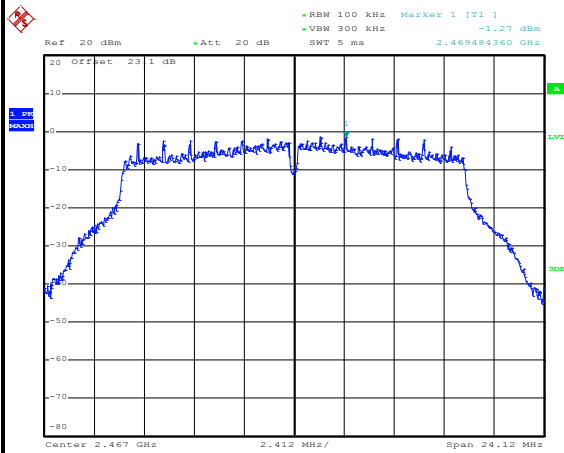WLAN 802.11g Channel 12**100kHz PSD reference Level**


Date: 12.MAR.2016 10:47:41

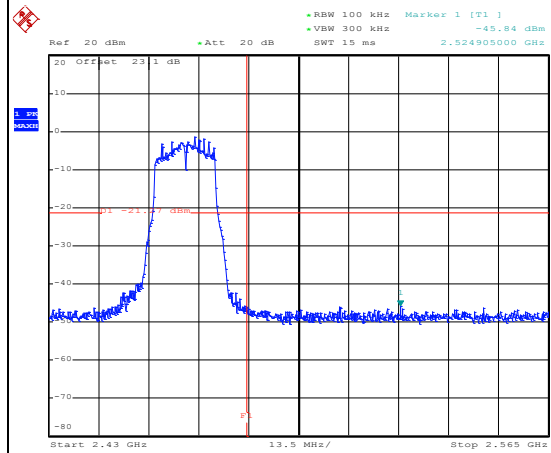High Channel Plot

Date: 12.MAR.2016 10:48:38

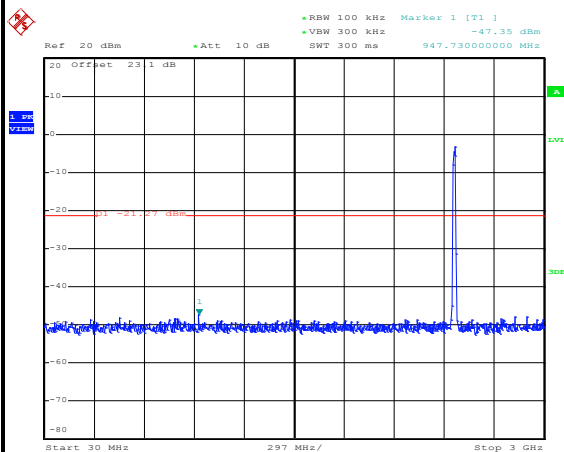Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 10:47:53

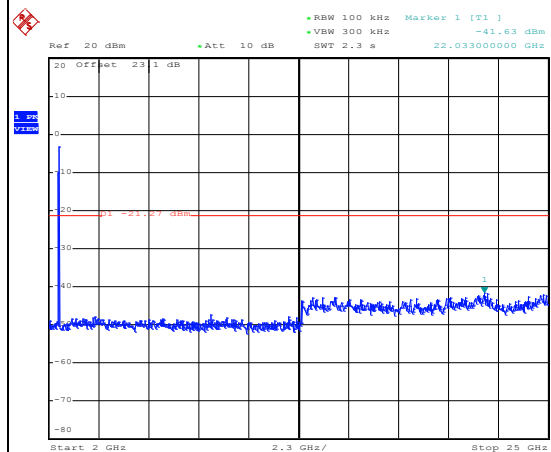Spurious Emission 2GHz~25GHz


Date: 12.MAR.2016 10:48:02



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	13	Test Engineer :	Bill Kuo


WLAN 802.11g Channel 13

100kHz PSD reference Level

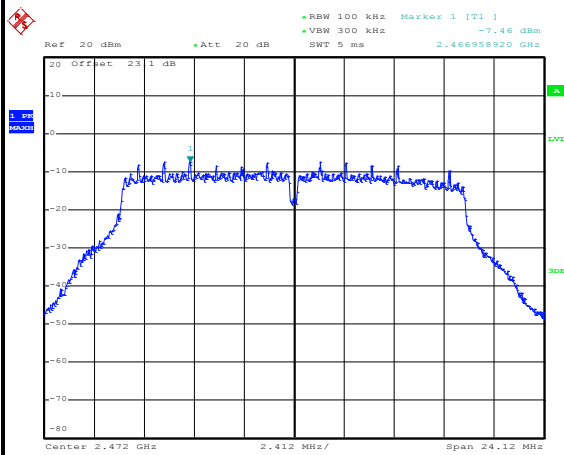


Date: 12.MAR.2016 11:08:55

High Channel Plot

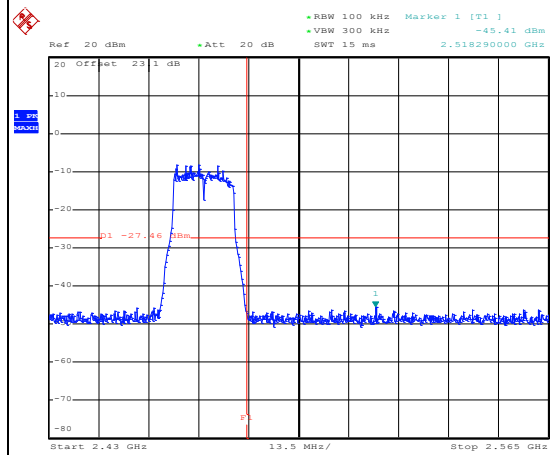


Date: 12.MAR.2016 11:11:44

Spurious Emission 30MHz~3GHz

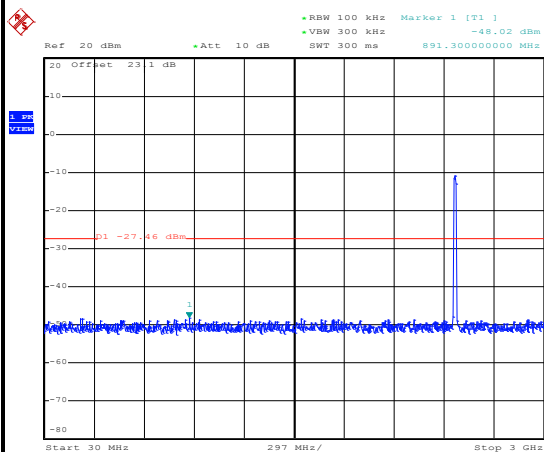

Date: 12.MAR.2016 11:10:13


Spurious Emission 2GHz~25GHz

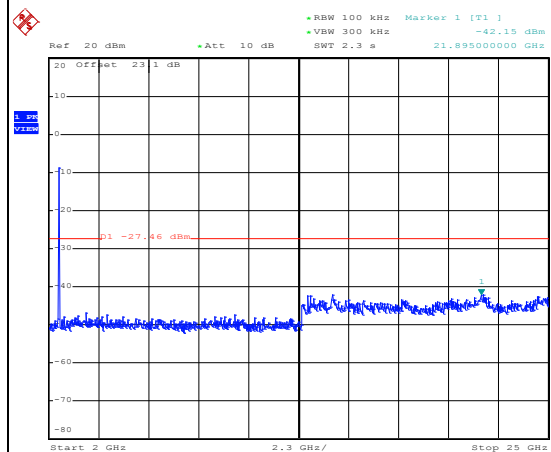


Date: 12.MAR.2016 11:10:21




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Bill Kuo

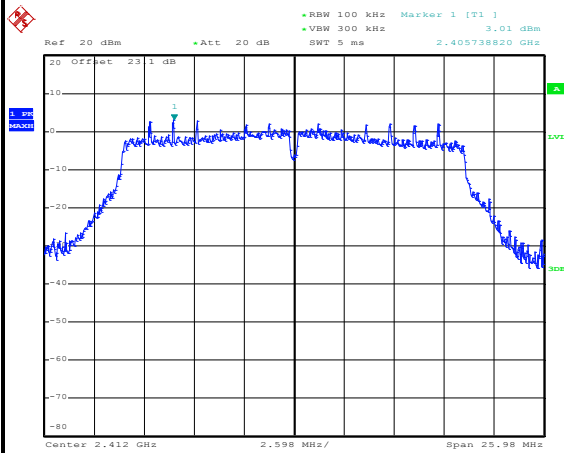WLAN 802.11n HT20 Channel 01**100kHz PSD reference Level**


Date: 12.MAR.2016 09:56:20

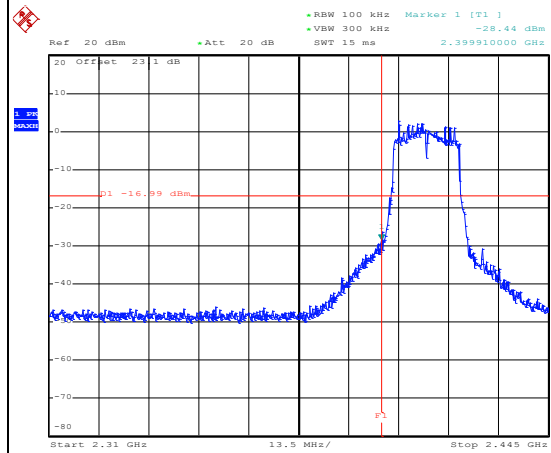Low Channel Plot

Date: 12.MAR.2016 09:56:36

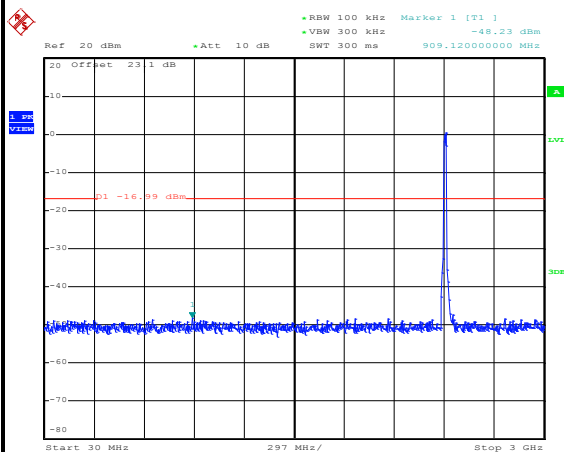Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 09:56:50

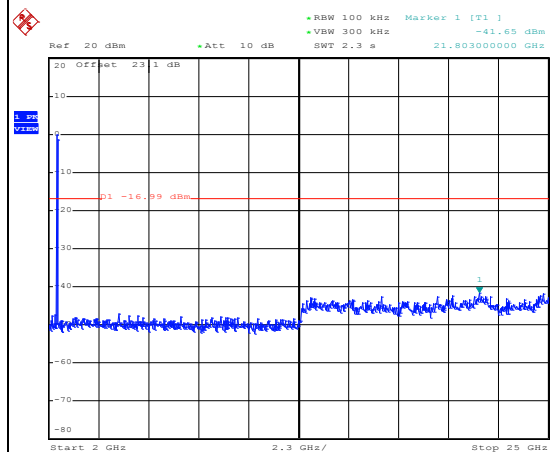Spurious Emission 2GHz~25GHz


Date: 12.MAR.2016 09:56:59



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Bill Kuo


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

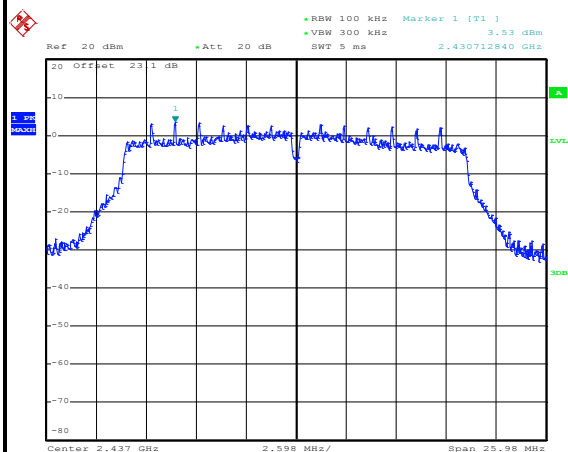


Date: 12.MAR.2016 10:04:18

Spurious Emission 30MHz~3GHz

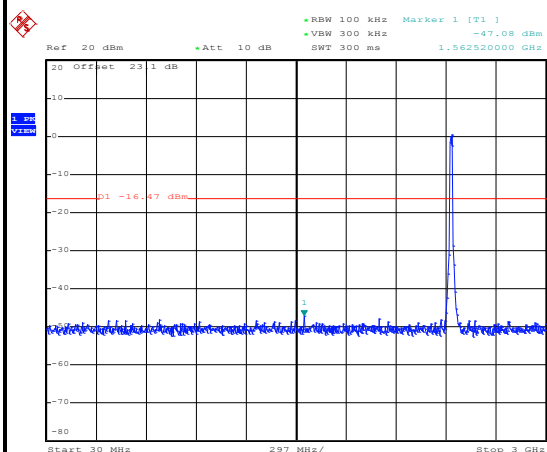

Date: 12.MAR.2016 10:04:29


Spurious Emission 2GHz~25GHz

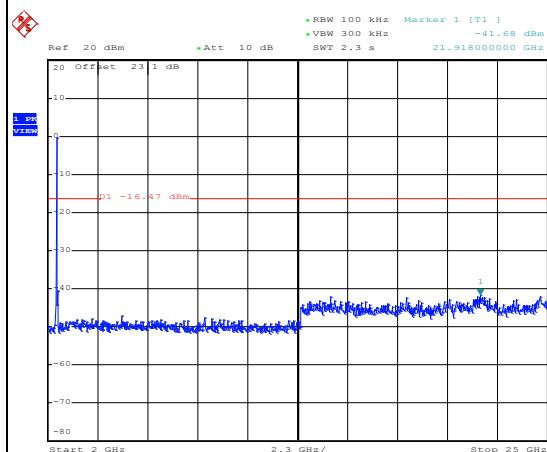


Date: 12.MAR.2016 10:04:38




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Bill Kuo

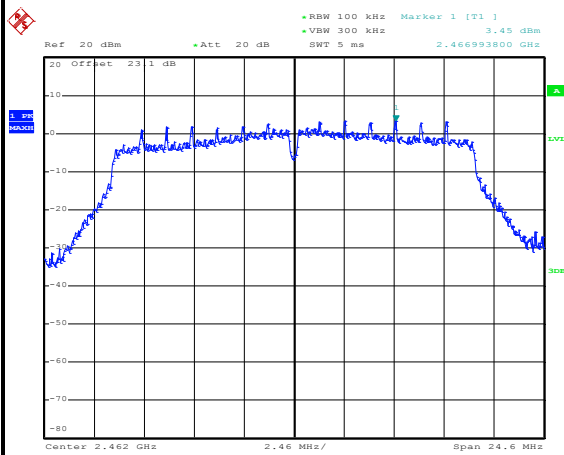WLAN 802.11n HT20 Channel 11**100kHz PSD reference Level**


Date: 12.MAR.2016 10:11:15

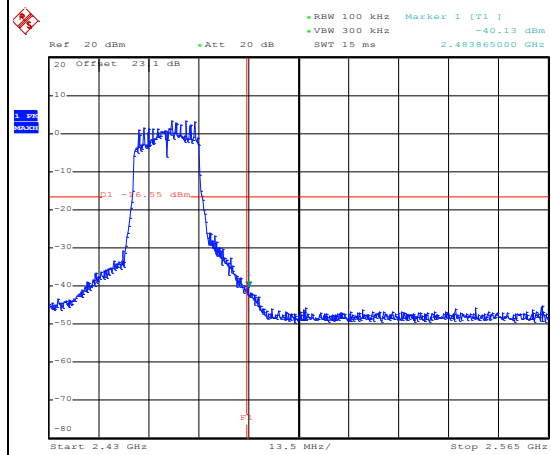High Channel Plot

Date: 12.MAR.2016 10:11:43

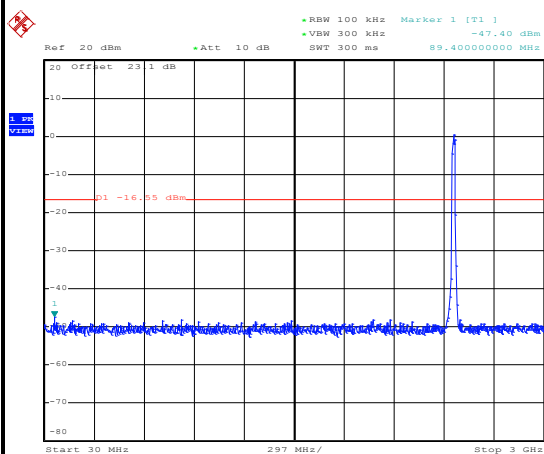Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 10:11:54

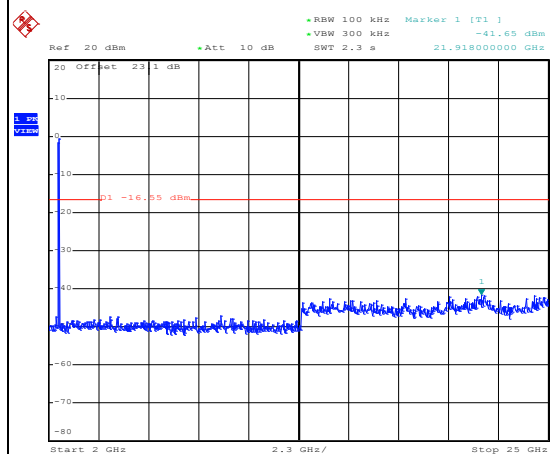Spurious Emission 2GHz~25GHz


Date: 12.MAR.2016 10:12:03



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	12	Test Engineer :	Bill Kuo


WLAN 802.11n HT20 Channel 12

100kHz PSD reference Level

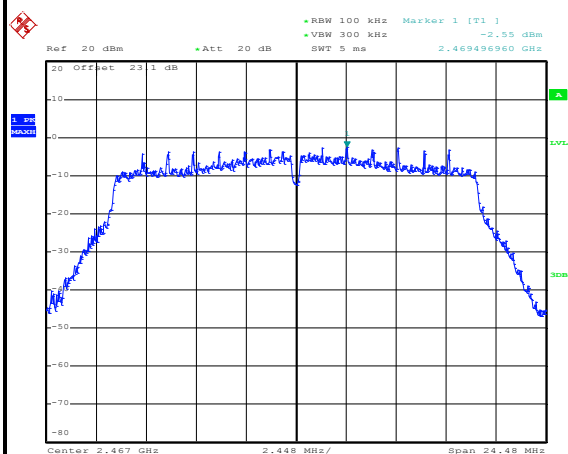


Date: 12.MAR.2016 11:15:12

High Channel Plot

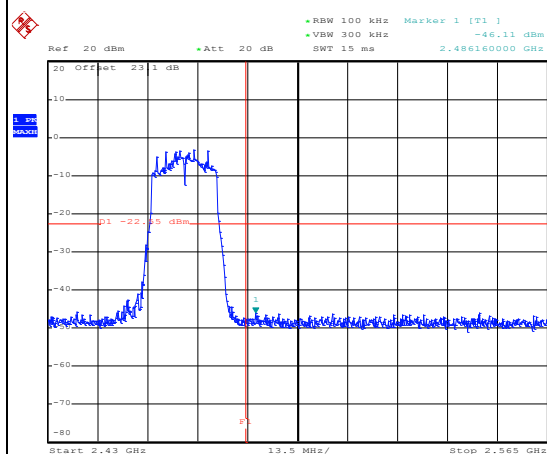


Date: 12.MAR.2016 11:16:51

Spurious Emission 30MHz~3GHz

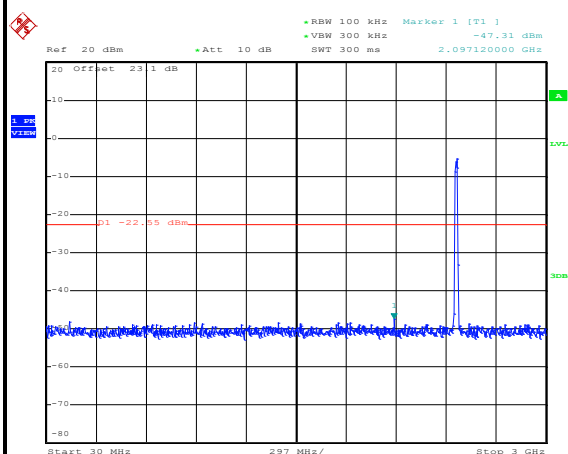

Date: 12.MAR.2016 11:15:23


Spurious Emission 2GHz~25GHz

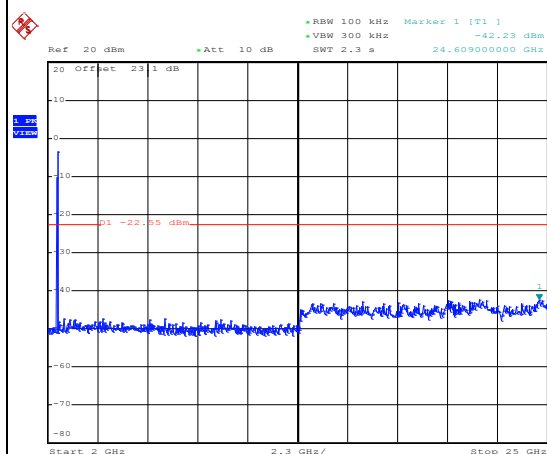


Date: 12.MAR.2016 11:15:31




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	13	Test Engineer :	Bill Kuo

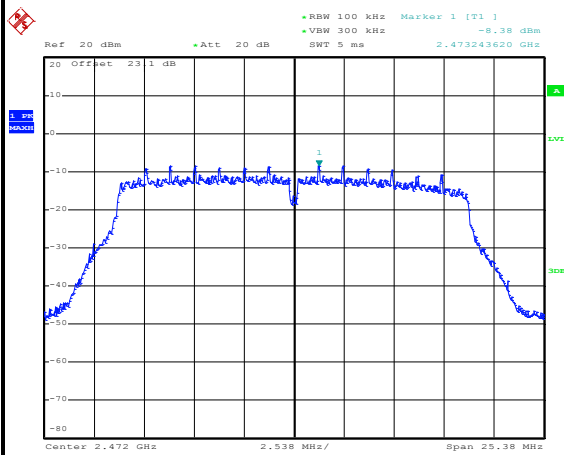WLAN 802.11n HT20 Channel 13**100kHz PSD reference Level**


Date: 12.MAR.2016 11:19:50

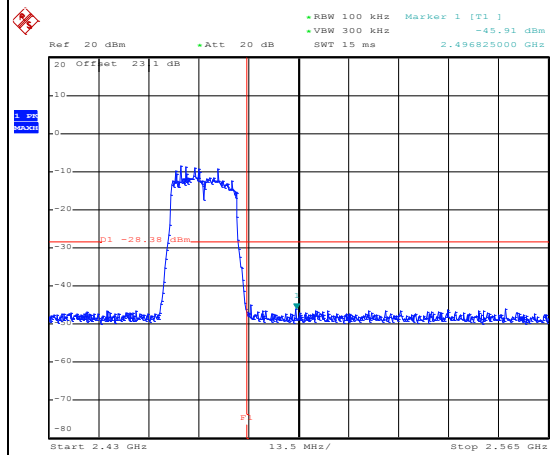High Channel Plot

Date: 12.MAR.2016 11:21:00

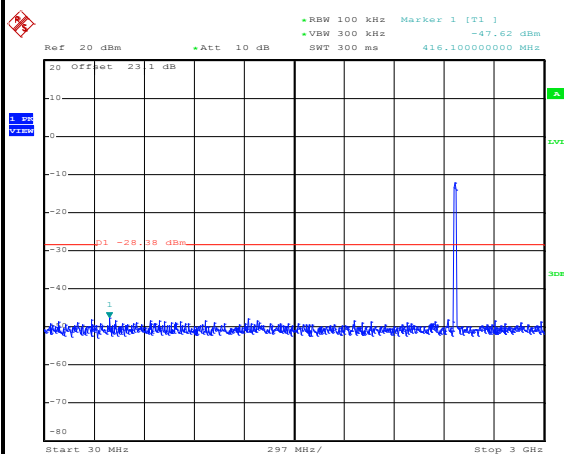Spurious Emission 30MHz~3GHz

Date: 12.MAR.2016 11:20:01

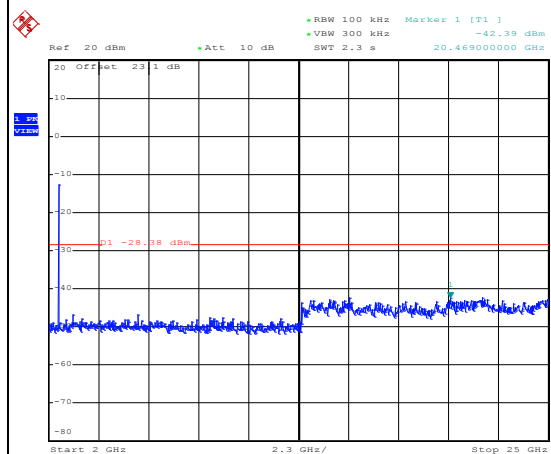Spurious Emission 2GHz~25GHz

Date: 12.MAR.2016 11:20:10

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r03.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.99	-	-	10Hz
2.4GHz 802.11n HT20	98.91	-	-	10Hz

3.5.4 Test Setup


For radiated emissions below 30MHz

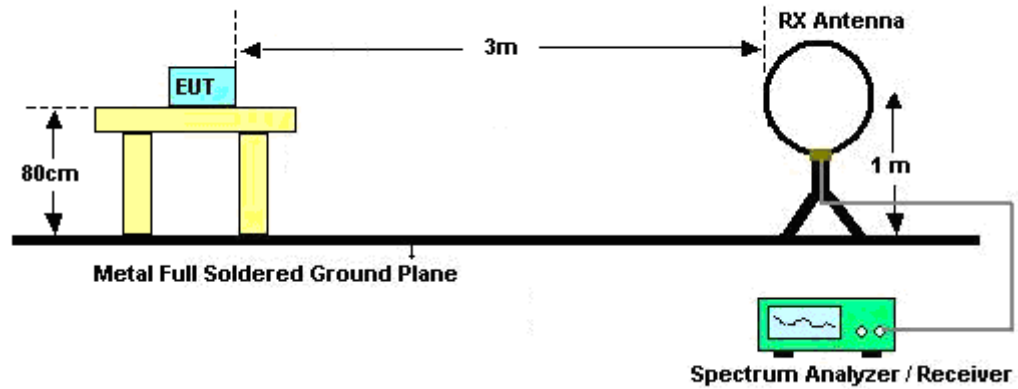

For radiated emissions from 30MHz to 1GHz

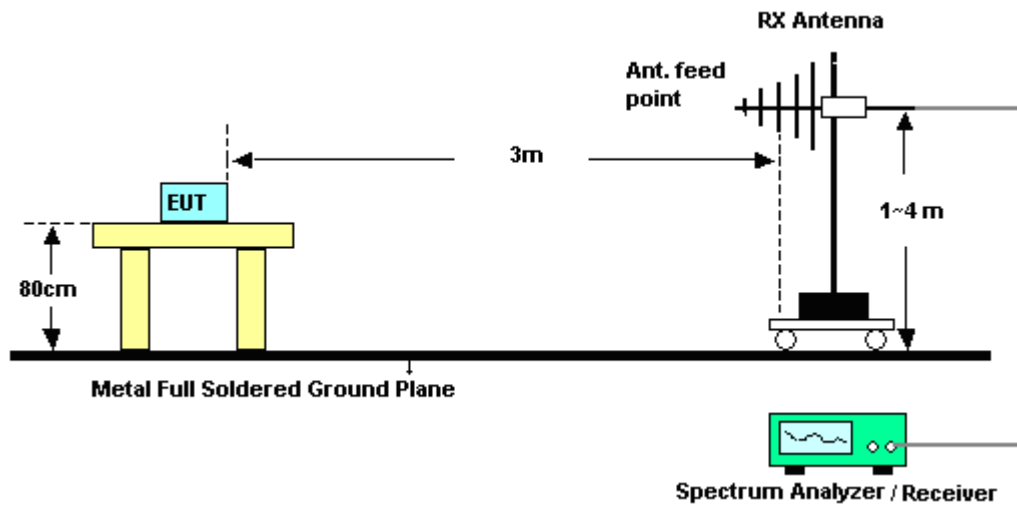

For radiated emissions above 1GHz

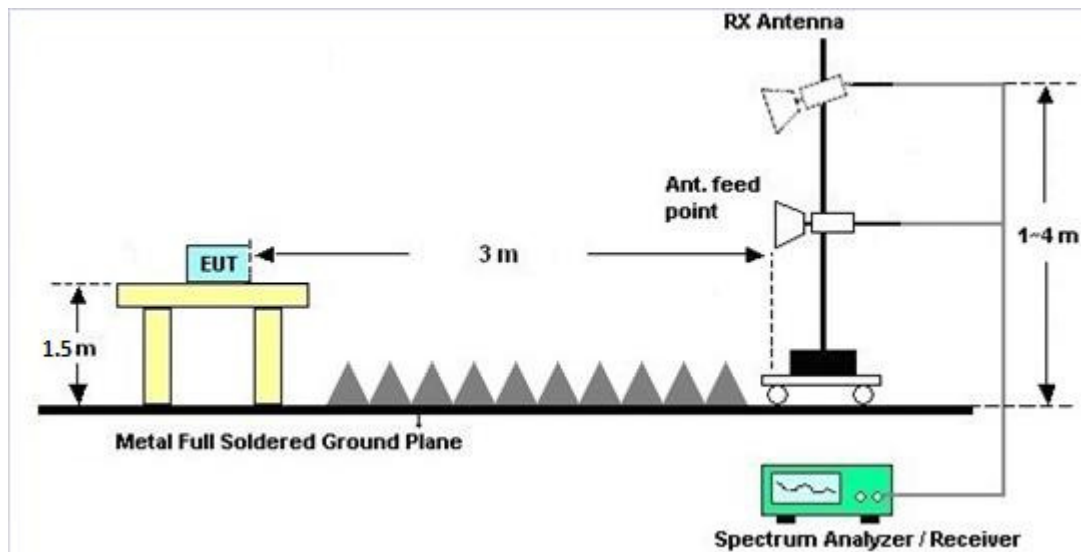

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

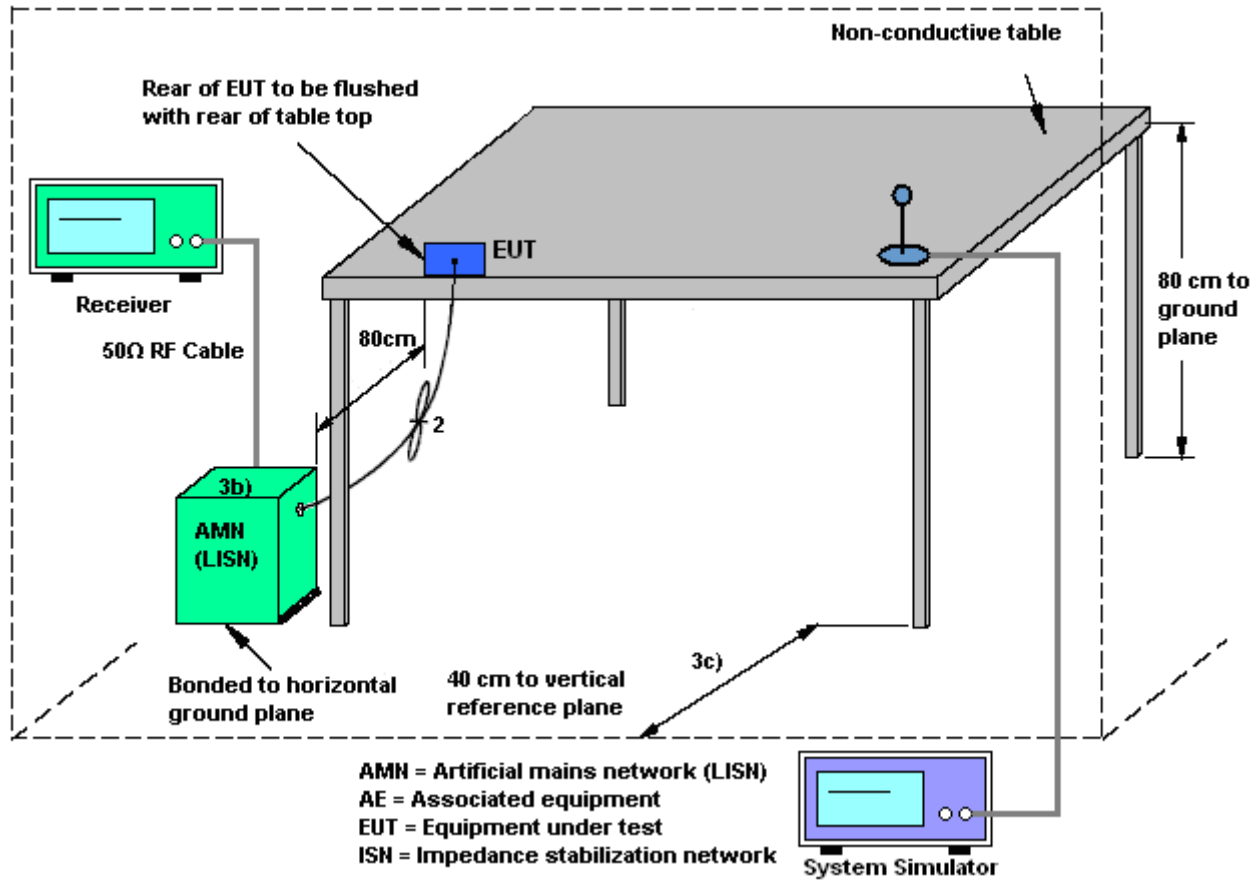

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Eric Jeng	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera (Rear) + Earphone + USB Cable (Charging from Adapter)		

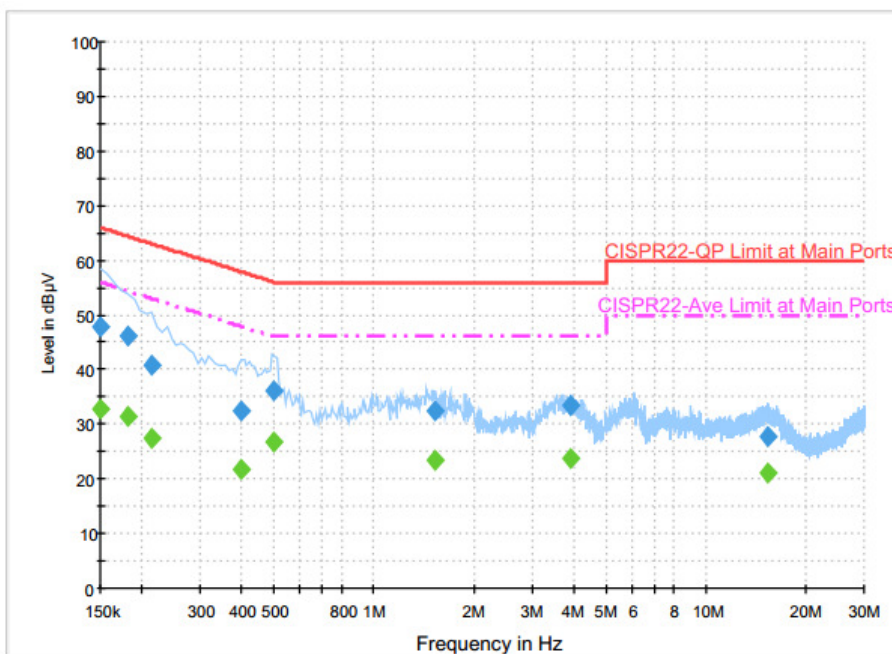


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	47.9	Off	L1	19.6	18.1	66.0
0.182000	46.1	Off	L1	19.6	18.3	64.4
0.214000	40.7	Off	L1	19.6	22.3	63.0
0.398000	32.6	Off	L1	19.6	25.3	57.9
0.502000	36.1	Off	L1	19.6	19.9	56.0
1.534000	32.3	Off	L1	19.6	23.7	56.0
3.910000	33.3	Off	L1	19.7	22.7	56.0
15.462000	27.9	Off	L1	19.8	32.1	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.9	Off	L1	19.6	23.1	56.0
0.182000	31.5	Off	L1	19.6	22.9	54.4
0.214000	27.4	Off	L1	19.6	25.6	53.0
0.398000	21.7	Off	L1	19.6	26.2	47.9
0.502000	26.6	Off	L1	19.6	19.4	46.0
1.534000	23.3	Off	L1	19.6	22.7	46.0
3.910000	23.9	Off	L1	19.7	22.1	46.0
15.462000	21.1	Off	L1	19.8	28.9	50.0

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Eric Jeng	Relative Humidity :	51~53%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (2.4GHz) Link + Camera (Rear) + Earphone + USB Cable (Charging from Adapter)		

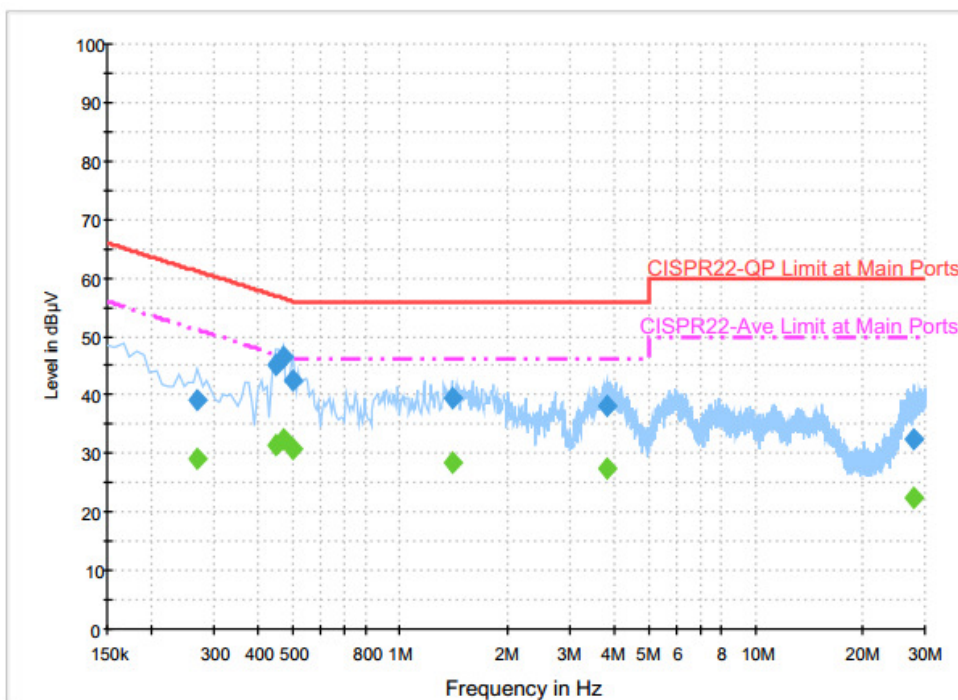
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.270000	39.0	Off	N	19.6	22.1	61.1
0.446000	45.3	Off	N	19.6	11.6	56.9
0.470000	46.4	Off	N	19.6	10.1	56.5
0.502000	42.3	Off	N	19.6	13.7	56.0
1.406000	39.6	Off	N	19.6	16.4	56.0
3.806000	38.0	Off	N	19.6	18.0	56.0
27.886000	32.6	Off	N	20.1	27.4	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.270000	29.1	Off	N	19.6	22.0	51.1
0.446000	31.4	Off	N	19.6	15.5	46.9
0.470000	32.3	Off	N	19.6	14.2	46.5
0.502000	30.7	Off	N	19.6	15.3	46.0
1.406000	28.5	Off	N	19.6	17.5	46.0
3.806000	27.4	Off	N	19.6	18.6	46.0
27.886000	22.3	Off	N	20.1	27.7	50.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H2	41410069	N/A	Aug. 27, 2015	Mar. 01, 2016 ~ Mar. 12, 2016	Aug. 26, 2016	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1240001	300MHz~40GHz	Sep. 17, 2015	Mar. 01, 2016 ~ Mar. 12, 2016	Sep. 16, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1207349	300MHz~40GHz	Sep. 17, 2015	Mar. 01, 2016 ~ Mar. 12, 2016	Sep. 16, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Mar. 01, 2016 ~ Mar. 12, 2016	Nov. 22, 2016	Conducted (TH05-HY)
RF Cable	JYEBAO	K30K30-5003-1.5M40	N/A	0.1MHz~40GHz	Mar. 18, 2015	Mar. 01, 2016 ~ Mar. 12, 2016	Mar. 17, 2016	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 12, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Mar. 12, 2016	Aug. 25, 2016	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	Mar. 12, 2016	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Mar. 12, 2016	Dec. 01, 2016	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 06, 2016	Mar. 12, 2016	Jan. 05, 2017	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	Mar. 12, 2016	N/A	Conduction (CO05-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	Schaffner	CBL6111D	35419	30MHz~1GHz	Jan. 13, 2016	Mar. 13, 2016 ~ Mar. 18, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Aug. 20, 2016	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Sep. 01, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Apr. 19, 2016	Radiation (03CH07-HY)
Amplifier	Sonoma-Instru ment	310 N	187282	10MHz-1000MHz	Dec. 31, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Dec. 30, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 19, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Mar. 13, 2016 ~ Mar. 18, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Mar. 13, 2016 ~ Mar. 18, 2016	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF78020836 8	Control Ant Mast	N/A	Mar. 13, 2016 ~ Mar. 18, 2016	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Mar. 13, 2016 ~ Mar. 18, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Mar. 13, 2016 ~ Mar. 18, 2016	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz ~ 40GHz	Apr. 20, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-18004000 -33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Jun. 01, 2016	Radiation (03CH07-HY)
EMI Test Receiver	Agilent Technologies	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Feb. 01, 2016	Mar. 13, 2016 ~ Mar. 18, 2016	Jan. 31, 2017	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Oct. 01, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Sep. 30, 2016	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2015	Mar. 13, 2016 ~ Mar. 18, 2016	Sep. 30, 2016	Radiation (03CH07-HY)
Test Software	N/A	E3	6.2009-8-24 (sporton)	N/A	N/A	Mar. 13, 2016 ~ Mar. 18, 2016	N/A	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.6
---	-----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Bill Kuo	Temperature:	21~25	°C
Test Date:	2016/3/1~2016/3/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.10	9.08	0.50	Pass
11b	1Mbps	1	6	2437	12.20	9.08	0.50	Pass
11b	1Mbps	1	11	2462	12.05	8.56	0.50	Pass
11b	1Mbps	1	12	2467	12.00	8.56	0.50	Pass
11b	1Mbps	1	13	2472	11.75	8.56	0.50	Pass
11g	6Mbps	1	1	2412	18.30	16.36	0.50	Pass
11g	6Mbps	1	6	2437	18.40	16.12	0.50	Pass
11g	6Mbps	1	11	2462	18.00	16.12	0.50	Pass
11g	6Mbps	1	12	2467	17.70	16.08	0.50	Pass
11g	6Mbps	1	13	2472	17.75	16.08	0.50	Pass
HT20	MCS0	1	1	2412	19.30	17.32	0.50	Pass
HT20	MCS0	1	6	2437	19.25	17.32	0.50	Pass
HT20	MCS0	1	11	2462	18.85	16.40	0.50	Pass
HT20	MCS0	1	12	2467	18.60	16.32	0.50	Pass
HT20	MCS0	1	13	2472	18.75	16.92	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.31	30.00	-5.80	11.51	36.00	Pass
11b	1Mbps	1	6	2437	17.72	30.00	-5.80	11.92	36.00	Pass
11b	1Mbps	1	11	2462	17.28	30.00	-5.80	11.48	36.00	Pass
11b	1Mbps	1	12	2467	17.71	30.00	-5.80	11.91	36.00	Pass
11b	1Mbps	1	13	2472	15.17	30.00	-5.80	9.37	36.00	Pass
11g	6Mbps	1	1	2412	23.47	30.00	-5.80	17.67	36.00	Pass
11g	6Mbps	1	6	2437	23.49	30.00	-5.80	17.69	36.00	Pass
11g	6Mbps	1	11	2462	23.44	30.00	-5.80	17.64	36.00	Pass
11g	6Mbps	1	12	2467	21.22	30.00	-5.80	15.42	36.00	Pass
11g	6Mbps	1	13	2472	15.26	30.00	-5.80	9.46	36.00	Pass
HT20	MCS0	1	1	2412	23.49	30.00	-5.80	17.69	36.00	Pass
HT20	MCS0	1	6	2437	23.50	30.00	-5.80	17.70	36.00	Pass
HT20	MCS0	1	11	2462	23.45	30.00	-5.80	17.65	36.00	Pass
HT20	MCS0	1	12	2467	20.91	30.00	-5.80	15.11	36.00	Pass
HT20	MCS0	1	13	2472	15.28	30.00	-5.80	9.48	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	14.47
11b	1Mbps	1	6	2437	0.00	14.69
11b	1Mbps	1	11	2462	0.00	14.45
11b	1Mbps	1	12	2467	0.00	14.68
11b	1Mbps	1	13	2472	0.00	12.07
11g	6Mbps	1	1	2412	0.04	14.70
11g	6Mbps	1	6	2437	0.04	14.78
11g	6Mbps	1	11	2462	0.04	14.49
11g	6Mbps	1	12	2467	0.04	10.60
11g	6Mbps	1	13	2472	0.04	4.23
HT20	MCS0	1	1	2412	0.05	14.42
HT20	MCS0	1	6	2437	0.05	14.77
HT20	MCS0	1	11	2462	0.05	14.45
HT20	MCS0	1	12	2467	0.05	9.02
HT20	MCS0	1	13	2472	0.05	3.11

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-8.67	-5.80	8.00	Pass
11b	1Mbps	1	6	2437	-7.17	-5.80	8.00	Pass
11b	1Mbps	1	11	2462	-7.91	-5.80	8.00	Pass
11b	1Mbps	1	12	2467	-7.98	-5.80	8.00	Pass
11b	1Mbps	1	13	2472	-10.13	-5.80	8.00	Pass
11g	6Mbps	1	1	2412	-10.48	-5.80	8.00	Pass
11g	6Mbps	1	6	2437	-10.12	-5.80	8.00	Pass
11g	6Mbps	1	11	2462	-9.70	-5.80	8.00	Pass
11g	6Mbps	1	12	2467	-13.51	-5.80	8.00	Pass
11g	6Mbps	1	13	2472	-20.03	-5.80	8.00	Pass
HT20	MCS0	1	1	2412	-10.40	-5.80	8.00	Pass
HT20	MCS0	1	6	2437	-9.37	-5.80	8.00	Pass
HT20	MCS0	1	11	2462	-9.21	-5.80	8.00	Pass
HT20	MCS0	1	12	2467	-15.56	-5.80	8.00	Pass
HT20	MCS0	1	13	2472	-22.46	-5.80	8.00	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Ken Wu, James Chiu, and Jesse Wang	Temperature :	20~23°C
		Relative Humidity :	50~66%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2340.42	55.9	-18.1	74	50.96	32.11	7.24	34.41	125	153	P	H
		2389.83	44.63	-9.37	54	39.47	32.18	7.31	34.33	125	153	A	H
	*	2410.69	98.91	-	-	93.7	32.2	7.31	34.3	125	153	P	H
	*	2410.77	96.41	-	-	91.2	32.2	7.31	34.3	125	153	A	H
													H
													H
		2389.02	56.18	-17.82	74	51.02	32.18	7.31	34.33	225	266	P	V
		2389.83	44.66	-9.34	54	39.5	32.18	7.31	34.33	225	266	A	V
	*	2413.36	103.23	-	-	98.01	32.2	7.31	34.29	225	266	P	V
	*	2413.36	100.7	-	-	95.48	32.2	7.31	34.29	225	266	A	V
													V
													V
802.11b CH 06 2437MHz		2324.22	56	-18	74	51.17	32.09	7.18	34.44	198	128	P	H
		2387.85	44.53	-9.47	54	39.38	32.18	7.31	34.34	198	128	A	H
	*	2438.41	97.6	-	-	92.25	32.24	7.36	34.25	198	128	P	H
	*	2438.41	95.05	-	-	89.7	32.24	7.36	34.25	198	128	A	H
		2495	55.7	-18.3	74	50.16	32.3	7.4	34.16	198	128	P	H
		2486.68	44.88	-9.12	54	39.37	32.28	7.4	34.17	198	128	A	H
		2366.97	55.25	-18.75	74	50.25	32.13	7.24	34.37	204	330	P	V
		2389.11	44.54	-9.46	54	39.38	32.18	7.31	34.33	204	330	A	V
	*	2438.41	100.37	-	-	95.02	32.24	7.36	34.25	204	330	P	V
	*	2438.58	97.81	-	-	92.46	32.24	7.36	34.25	204	330	A	V
		2485.68	56.25	-17.75	74	50.74	32.28	7.4	34.17	204	330	P	V
		2495.56	44.9	-9.1	54	39.36	32.3	7.4	34.16	204	330	A	V



802.11b CH 11 2462MHz	*	2462	98.81	-	-	93.36	32.26	7.4	34.21	145	11	P	H
	*	2462	96.31	-	-	90.86	32.26	7.4	34.21	145	11	A	H
		2486.45	56.18	-17.82	74	50.67	32.28	7.4	34.17	145	11	P	H
		2493.64	44.96	-9.04	54	39.42	32.3	7.4	34.16	145	11	A	H
													H
													H
	*	2462	100.4	-	-	94.95	32.26	7.4	34.21	198	281	P	V
	*	2462	97.87	-	-	92.42	32.26	7.4	34.21	198	281	A	V
		2493.56	56.31	-17.69	74	50.77	32.3	7.4	34.16	198	281	P	V
		2483.56	45.24	-8.76	54	39.74	32.28	7.4	34.18	198	281	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11b CH 12 2467MHz	*	2467	98.57	-	-	93.11	32.26	7.4	34.2	208	42	P	H
	*	2467	96.05	-	-	90.59	32.26	7.4	34.2	208	42	A	H
		2486.56	56.41	-17.59	74	50.9	32.28	7.4	34.17	208	42	P	H
		2483.52	45.45	-8.55	54	39.95	32.28	7.4	34.18	208	42	A	H
													H
													H
	*	2467	99.98	-	-	94.52	32.26	7.4	34.2	370	271	P	V
	*	2467	97.47	-	-	92.01	32.26	7.4	34.2	370	271	A	V
		2496.96	55.83	-18.17	74	50.29	32.3	7.4	34.16	370	271	P	V
		2483.52	45.76	-8.24	54	40.26	32.28	7.4	34.18	370	271	A	V
													V
													V
802.11b CH 13 2472MHz	*	2472	96.88	-	-	91.4	32.28	7.4	34.2	233	44	P	H
	*	2472	94.36	-	-	88.88	32.28	7.4	34.2	233	44	A	H
		2491.4	56.57	-17.43	74	51.03	32.3	7.4	34.16	233	44	P	H
		2483.52	46.11	-7.89	54	40.61	32.28	7.4	34.18	233	44	A	H
													H
													H
	*	2472	98.24	-	-	92.76	32.28	7.4	34.2	372	272	P	V
	*	2472	95.75	-	-	90.27	32.28	7.4	34.2	372	272	A	V
		2484.48	56.45	-17.55	74	50.95	32.28	7.4	34.18	372	272	P	V
		2483.52	46.56	-7.44	54	41.06	32.28	7.4	34.18	372	272	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	41.21	-32.79	74	54.91	34.26	11.68	59.64	100	0	P	H
													H
													H
													H
		4824	41.89	-32.11	74	55.59	34.26	11.68	59.64	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4874	39.71	-34.29	74	53.45	34.3	11.53	59.57	100	0	P	H
		7311	39.77	-34.23	74	48.83	35.6	13.81	58.47	100	0	P	H
													H
													H
		4874	39.75	-34.25	74	53.49	34.3	11.53	59.57	100	0	P	V
		7311	40.23	-33.77	74	49.29	35.6	13.81	58.47	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4924	40.54	-33.46	74	54.33	34.34	11.37	59.5	100	0	P	H
		7386	40.71	-33.29	74	49.74	35.6	13.95	58.58	100	0	P	H
													H
													H
		4924	40.17	-33.83	74	53.96	34.34	11.37	59.5	100	0	P	V
		7386	41.31	-32.69	74	50.34	35.6	13.95	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11b CH 12 2467MHz		4934	40.16	-33.84	74	53.95	34.34	11.37	59.5	100	0	P	H
		7401	41.48	-32.52	74	50.53	35.6	13.95	58.6	100	0	P	H
													H
													H
		4934	40.4	-33.6	74	54.19	34.34	11.37	59.5	100	0	P	V
		7401	40.95	-33.05	74	50	35.6	13.95	58.6	100	0	P	V
													V
													V
802.11b CH 13 2472MHz		4944	40.18	-33.82	74	54.07	34.36	11.22	59.47	100	0	P	H
		7416	41.57	-32.43	74	50.62	35.6	13.95	58.6	100	0	P	H
													H
													H
		4944	40.48	-33.52	74	54.37	34.36	11.22	59.47	100	0	P	V
		7416	41.21	-32.79	74	50.26	35.6	13.95	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.83	59.08	-14.92	74	53.92	32.18	7.31	34.33	217	30	P	H
		2390	47.44	-6.56	54	42.28	32.18	7.31	34.33	217	30	A	H
	*	2412	102.31	-	-	97.1	32.2	7.31	34.3	217	30	P	H
	*	2412	94.86	-	-	89.65	32.2	7.31	34.3	217	30	A	H
													H
													H
		2389.83	61.6	-12.4	74	56.44	32.18	7.31	34.33	257	342	P	V
		2389.83	48.39	-5.61	54	43.23	32.18	7.31	34.33	257	342	A	V
	*	2412	103.17	-	-	97.96	32.2	7.31	34.3	257	342	P	V
	*	2412	95.61	-	-	90.4	32.2	7.31	34.3	257	342	A	V
													V
													V
802.11g CH 06 2437MHz		2335.65	56.82	-17.18	74	51.95	32.11	7.18	34.42	212	32	P	H
		2389.29	44.64	-9.36	54	39.48	32.18	7.31	34.33	212	32	A	H
	*	2437	100.58	-	-	95.23	32.24	7.36	34.25	212	32	P	H
	*	2437	92.94	-	-	87.59	32.24	7.36	34.25	212	32	A	H
		2495.96	55.57	-18.43	74	50.03	32.3	7.4	34.16	212	32	P	H
		2486.76	44.99	-9.01	54	39.48	32.28	7.4	34.17	212	32	A	H
		2327.01	56.22	-17.78	74	51.39	32.09	7.18	34.44	204	344	P	V
		2388.66	44.64	-9.36	54	39.48	32.18	7.31	34.33	204	344	A	V
	*	2437	103.51	-	-	98.16	32.24	7.36	34.25	204	344	P	V
	*	2437	96.14	-	-	90.79	32.24	7.36	34.25	204	344	A	V
		2487.16	56.1	-17.9	74	50.59	32.28	7.4	34.17	204	344	P	V
		2484.76	44.98	-9.02	54	39.48	32.28	7.4	34.18	204	344	A	V



802.11g CH 11 2462MHz	*	2462	100.92	-	-	95.47	32.26	7.4	34.21	145	11	P	H
	*	2462	93.12	-	-	87.67	32.26	7.4	34.21	145	11	A	H
		2483.52	59.72	-14.28	74	54.22	32.28	7.4	34.18	145	11	P	H
		2485.24	46.96	-7.04	54	41.45	32.28	7.4	34.17	145	11	A	H
													H
													H
	*	2462	102.83	-	-	97.38	32.26	7.4	34.21	198	281	P	V
	*	2462	94.88	-	-	89.43	32.26	7.4	34.21	198	281	A	V
		2485.76	60.01	-13.99	74	54.5	32.28	7.4	34.17	198	281	P	V
		2483.52	47.55	-6.45	54	42.05	32.28	7.4	34.18	198	281	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11g CH 12 2467MHz	*	2467	95.44	-	-	89.98	32.26	7.4	34.2	184	6	P	H
	*	2467	87.54	-	-	82.08	32.26	7.4	34.2	184	6	A	H
		2485.24	55.93	-18.07	74	50.42	32.28	7.4	34.17	184	6	P	H
		2483.88	45.27	-8.73	54	39.77	32.28	7.4	34.18	184	6	A	H
													H
													H
	*	2467	99.33	-	74	93.87	32.26	7.4	34.2	200	277	P	V
	*	2467	91.48	-	54	86.02	32.26	7.4	34.2	200	277	A	V
		2497.44	57.15	-16.85	74	51.6	32.3	7.4	34.15	200	277	P	V
		2483.76	45.54	-8.46	54	40.04	32.28	7.4	34.18	200	277	A	V
													V
													V
802.11g CH 13 2472MHz	*	2472	88.58	-	-	83.1	32.28	7.4	34.2	377	357	P	H
	*	2472	81.11	-	-	75.63	32.28	7.4	34.2	377	357	A	H
		2492.44	55.54	-18.46	74	50	32.3	7.4	34.16	377	357	P	H
		2483.52	45.54	-8.46	54	40.04	32.28	7.4	34.18	377	357	A	H
													H
													H
	*	2472	92.89	-	-	87.41	32.28	7.4	34.2	220	277	P	V
	*	2472	85.27	-	-	79.79	32.28	7.4	34.2	220	277	A	V
		2484.08	56.99	-17.01	74	51.49	32.28	7.4	34.18	220	277	P	V
		2483.52	46.47	-7.53	54	40.97	32.28	7.4	34.18	220	277	A	V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	40.79	-33.21	74	54.49	34.26	11.68	59.64	100	0	P	H
													H
													H
													H
		4824	41.1	-32.9	74	54.8	34.26	11.68	59.64	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	39.95	-34.05	74	53.69	34.3	11.53	59.57	100	0	P	H
		7311	40.38	-33.62	74	49.44	35.6	13.81	58.47	100	0	P	H
													H
													H
		4874	40.14	-33.86	74	53.88	34.3	11.53	59.57	100	0	P	V
		7311	40.9	-33.1	74	49.96	35.6	13.81	58.47	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	40.58	-33.42	74	54.37	34.34	11.37	59.5	100	0	P	H
		7386	40.13	-33.87	74	49.16	35.6	13.95	58.58	100	0	P	H
													H
													H
		4924	40.26	-33.74	74	54.05	34.34	11.37	59.5	100	0	P	V
		7386	41.12	-32.88	74	50.15	35.6	13.95	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11g CH 12 2467MHz		4934	40.27	-33.73	74	54.06	34.34	11.37	59.5	100	0	P	H
		7401	41.29	-32.71	74	50.34	35.6	13.95	58.6	100	0	P	H
													H
													H
		4934	41.1	-32.9	74	54.89	34.34	11.37	59.5	100	0	P	V
		7401	41.11	-32.89	74	50.16	35.6	13.95	58.6	100	0	P	V
													V
													V
802.11g CH 13 2472MHz		4944	40.67	-33.33	74	54.56	34.36	11.22	59.47	100	0	P	H
		7416	41.46	-32.54	74	50.51	35.6	13.95	58.6	100	0	P	H
													H
													H
		4944	39.86	-34.14	74	53.75	34.36	11.22	59.47	100	0	P	V
		7416	41.51	-32.49	74	50.56	35.6	13.95	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2390	60.93	-13.07	74	55.77	32.18	7.31	34.33	242	47	P	H
		2390	49.08	-4.92	54	43.92	32.18	7.31	34.33	242	47	A	H
	*	2412	102.71	-	-	97.5	32.2	7.31	34.3	242	47	P	H
	*	2412	94.99	-	-	89.78	32.2	7.31	34.3	242	47	A	H
													H
													H
		2389.65	62.44	-11.56	74	57.28	32.18	7.31	34.33	259	344	P	V
		2390	50.2	-3.8	54	45.04	32.18	7.31	34.33	259	344	A	V
	*	2412	103.67	-	-	98.46	32.2	7.31	34.3	259	344	P	V
	*	2412	96.16	-	-	90.95	32.2	7.31	34.3	259	344	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2357.07	55.34	-18.66	74	50.36	32.13	7.24	34.39	195	32	P	H
		2388.66	44.64	-9.36	54	39.48	32.18	7.31	34.33	195	32	A	H
	*	2437	100.85	-	-	95.5	32.24	7.36	34.25	195	32	P	H
	*	2437	92.6	-	-	87.25	32.24	7.36	34.25	195	32	A	H
		2489.24	55.91	-18.09	74	50.38	32.3	7.4	34.17	195	32	P	H
		2485.6	44.97	-9.03	54	39.46	32.28	7.4	34.17	195	32	A	H
		2359.86	55.14	-18.86	74	50.15	32.13	7.24	34.38	204	344	P	V
		2389.47	44.66	-9.34	54	39.5	32.18	7.31	34.33	204	344	A	V
	*	2437	103.21	-	-	97.86	32.24	7.36	34.25	204	344	P	V
	*	2437	95.54	-	-	90.19	32.24	7.36	34.25	204	344	A	V
		2495.76	55.68	-18.32	74	50.14	32.3	7.4	34.16	204	344	P	V
		2486.16	44.97	-9.03	54	39.46	32.28	7.4	34.17	204	344	A	V



802.11n HT20 CH 11 2462MHz	*	2462	101.47	-	-	96.02	32.26	7.4	34.21	230	40	P	H
	*	2462	93.65	-	-	88.2	32.26	7.4	34.21	230	40	A	H
		2484.08	60.83	-13.17	74	55.33	32.28	7.4	34.18	230	40	P	H
		2485.04	46.94	-7.06	54	41.43	32.28	7.4	34.17	230	40	A	H
													H
													H
	*	2462	102.99	-	-	97.54	32.26	7.4	34.21	369	272	P	V
	*	2462	95.19	-	-	89.74	32.26	7.4	34.21	369	272	A	V
		2484.04	62.76	-11.24	74	57.26	32.28	7.4	34.18	369	272	P	V
		2483.56	48.68	-5.32	54	43.18	32.28	7.4	34.18	369	272	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11n HT20 CH 12 2467MHz	*	2467	96	-	-	90.54	32.26	7.4	34.2	231	43	P	H
	*	2467	87.92	-	-	82.46	32.26	7.4	34.2	231	43	A	H
		2494.88	55.83	-18.17	74	50.29	32.3	7.4	34.16	231	43	P	H
		2484.64	45.05	-8.95	54	39.55	32.28	7.4	34.18	231	43	A	H
													H
													H
	*	2467	96.85	-	-	91.39	32.26	7.4	34.2	370	275	P	V
	*	2467	88.88	-	-	83.42	32.26	7.4	34.2	370	275	A	V
		2487.52	56.18	-17.82	74	50.65	32.3	7.4	34.17	370	275	P	V
		2483.64	45.22	-8.78	54	39.72	32.28	7.4	34.18	370	275	A	V
													V
													V
802.11n HT20 CH 13 2472MHz	*	2472	90.26	-	-	84.78	32.28	7.4	34.2	232	43	P	H
	*	2472	82.43	-	-	76.95	32.28	7.4	34.2	232	43	A	H
		2483.56	55.89	-18.11	74	50.39	32.28	7.4	34.18	232	43	P	H
		2483.52	45.54	-8.46	54	40.04	32.28	7.4	34.18	232	43	A	H
													H
													H
	*	2472	91.67	-	-	86.19	32.28	7.4	34.2	372	270	P	V
	*	2472	83.94	-	-	78.46	32.28	7.4	34.2	372	270	A	V
		2483.6	57.23	-16.77	74	51.73	32.28	7.4	34.18	372	270	P	V
		2483.52	46.16	-7.84	54	40.66	32.28	7.4	34.18	372	270	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	40.57	-33.43	74	54.27	34.26	11.68	59.64	100	0	P	H
													H
													H
													H
		4824	40.27	-33.73	74	53.97	34.26	11.68	59.64	100	0	P	V
													V
													V
													V
802.11n HT20 CH 06 2437MHz		4874	40.88	-33.12	74	54.62	34.3	11.53	59.57	100	0	P	H
		7311	41.37	-32.63	74	50.43	35.6	13.81	58.47	100	0	P	H
													H
													H
		4874	39.95	-34.05	74	53.69	34.3	11.53	59.57	100	0	P	V
		7311	40.16	-33.84	74	49.22	35.6	13.81	58.47	100	0	P	V
													V
													V
802.11n HT20 CH 11 2462MHz		4924	39.59	-34.41	74	53.38	34.34	11.37	59.5	100	0	P	H
		7386	40.52	-33.48	74	49.55	35.6	13.95	58.58	100	0	P	H
													H
													H
		4924	39.84	-34.16	74	53.63	34.34	11.37	59.5	100	0	P	V
		7386	40.79	-33.21	74	49.82	35.6	13.95	58.58	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



802.11n HT20 CH 12 2467MHz		4934	40.1	-33.9	74	53.89	34.34	11.37	59.5	100	0	P	H
		7401	41.41	-32.59	74	50.46	35.6	13.95	58.6	100	0	P	H
													H
													H
		4934	40.74	-33.26	74	54.53	34.34	11.37	59.5	100	0	P	V
		7401	41.24	-32.76	74	50.29	35.6	13.95	58.6	100	0	P	V
													V
													V
802.11n HT20 CH 13 2472MHz		4944	40.05	-33.95	74	53.94	34.36	11.22	59.47	100	0	P	H
		7416	40.89	-33.11	74	49.94	35.6	13.95	58.6	100	0	P	H
													H
													H
		4944	39.9	-34.1	74	53.79	34.36	11.22	59.47	100	0	P	V
		7416	41.15	-32.85	74	50.2	35.6	13.95	58.6	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		30	23.39	-16.61	40	28.65	26	1.07	32.33			P	H
		115.32	18.05	-25.45	43.5	31.07	17.63	1.55	32.2			P	H
		264.09	18.97	-27.03	46	29.02	19.76	2.32	32.13			P	H
		470.1	23.18	-22.82	46	28.76	23.54	3.04	32.16			P	H
		673.1	27.17	-18.83	46	29.56	26.13	3.65	32.17			P	H
		917.4	31.56	-14.44	46	29.33	29.42	4.12	31.31	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
		30.27	28.44	-11.56	40	33.7	26	1.07	32.33	100	0	P	V
		133.95	17.28	-26.22	43.5	29.75	18.18	1.55	32.2			P	V
		291.63	19.55	-26.45	46	29.59	19.72	2.32	32.08			P	V
		424.6	23.42	-22.58	46	29.91	22.75	2.89	32.13			P	V
		723.5	27.48	-18.52	46	29.07	26.78	3.74	32.11			P	V
		923	32.07	-13.93	46	29.64	29.56	4.12	31.25			P	V
													V
													V
													V
													V
													V
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30.54	23.82	-16.18	40	29.62	25.46	1.07	32.33			P	H
		151.5	18.82	-24.68	43.5	31.62	17.63	1.78	32.21			P	H
		289.2	19.02	-26.98	46	29.13	19.66	2.32	32.09			P	H
		435.8	22.61	-23.39	46	28.96	22.9	2.89	32.14			P	H
		717.2	27.49	-18.51	46	29.2	26.67	3.74	32.12			P	H
		944	32.52	-13.48	46	29.44	30.06	4.07	31.05	100	0	P	H
													H
													H
													H
													H
													H
													H
		30.27	28.14	-11.86	40	33.4	26	1.07	32.33	100	0	P	V
		130.71	17.5	-26	43.5	29.88	18.27	1.55	32.2			P	V
		281.64	19.71	-26.29	46	30.15	19.34	2.32	32.1			P	V
		428.1	22.19	-23.81	46	28.64	22.79	2.89	32.13			P	V
		728.4	27.6	-18.4	46	29.11	26.85	3.74	32.1			P	V
		933.5	32.16	-13.84	46	29.4	29.8	4.12	31.16			P	V
													V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

[illegible]



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Ken Wu, James Chiu, and Jesse Wang	Temperature :	20~23°C
		Relative Humidity :	50~66%

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 15	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 15
Avg.	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 15	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 15

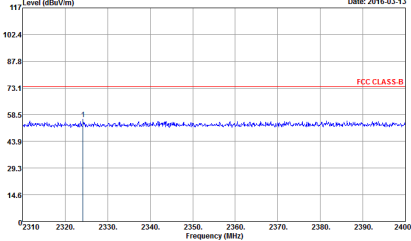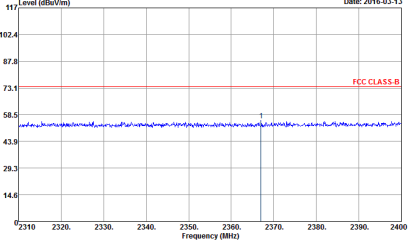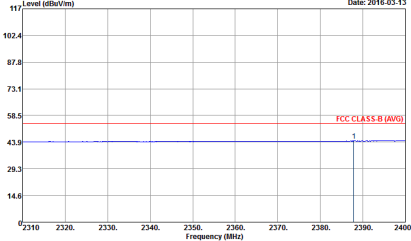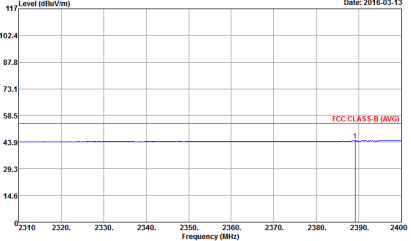

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 621809 Mode : 16	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 621809 Mode : 16
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL Detector : Peak Project : 621809 Mode : 16	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL Detector : Peak Project : 621809 Mode : 16

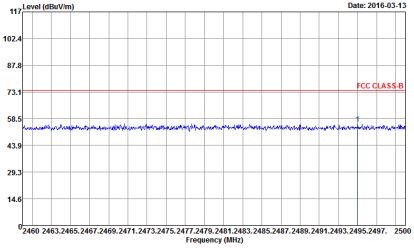
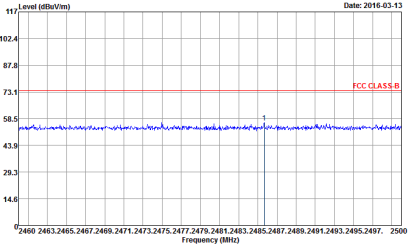
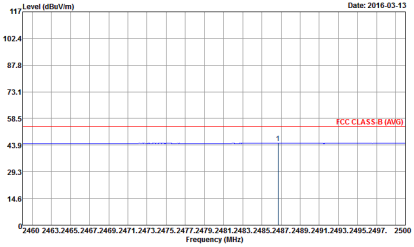
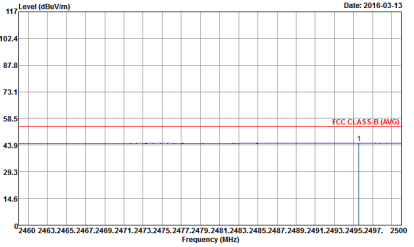


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 16	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 16
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 16	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 16



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 17	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 17
Avg.	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 17	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 17

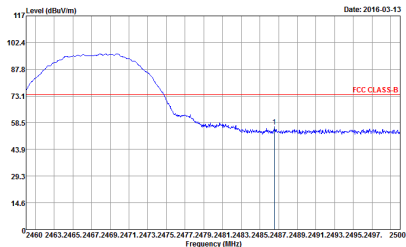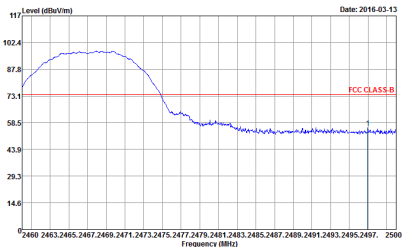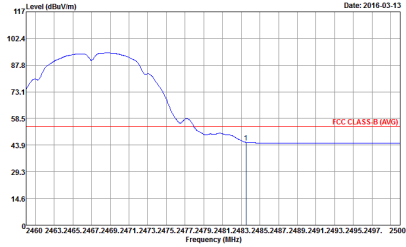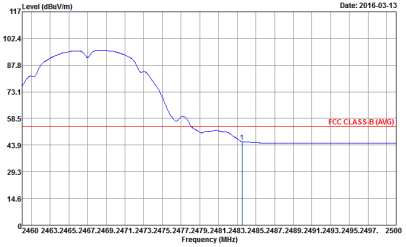

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH12 2467MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 18	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 18
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 18	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 18



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH13 2472MHz	
1	Horizontal	Vertical
Peak	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 19	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 19
Avg.	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 19	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 19







2.4GHz 2400~2483.5MHz





WIFI 802.11g (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak	Site : 03CH07-4Y Condition : FCC CLASS-B 3m HF-ANT, 130829 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-13	Site : 03CH07-4Y Condition : FCC CLASS-B 3m HF-ANT, 130829 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-13
Avg.	Site : 03CH07-4Y Condition : FCC CLASS-B (AVG) 3m HF-ANT, 130829 HORIZONTAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-13	Site : 03CH07-4Y Condition : FCC CLASS-B (AVG) 3m HF-ANT, 130829 VERTICAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-13

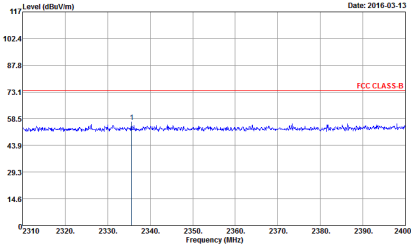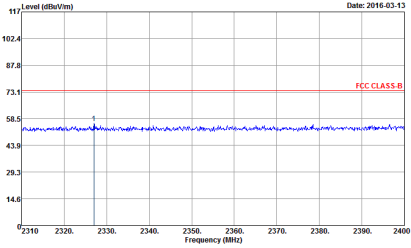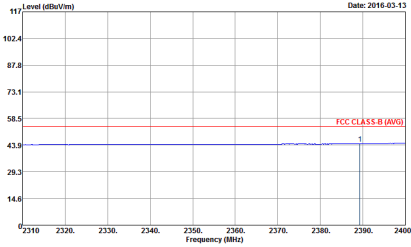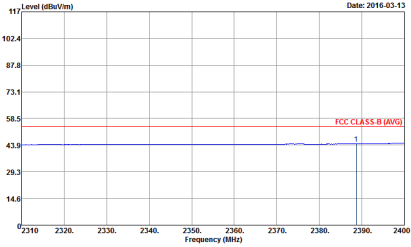

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Horizontal	Vertical
Peak	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-13 FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 22	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-13 FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 22
Avg.	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-13 FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 22	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-13 FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 22

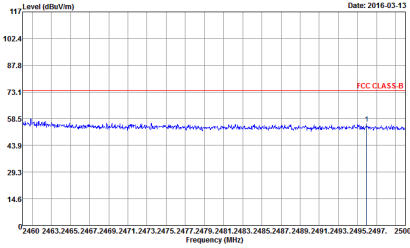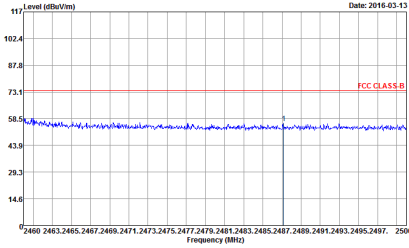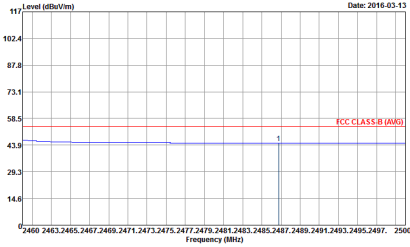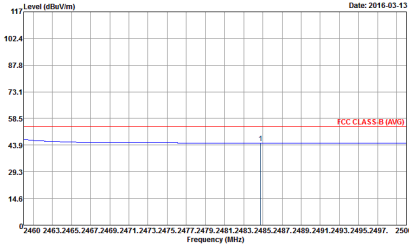

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 22	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 22
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 22	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 22







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The plot shows a blue line representing the measured signal, which starts at approximately 102.4 dBuV/m at 2460 MHz and decreases to about 58.5 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The plot is dated 2016-03-12. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 23	Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The plot shows a blue line representing the measured signal, which starts at approximately 102.4 dBuV/m at 2460 MHz and decreases to about 58.5 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The plot is dated 2016-03-12. Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 23
Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The plot shows a blue line representing the measured signal, which starts at approximately 102.4 dBuV/m at 2460 MHz and decreases to about 58.5 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The plot is dated 2016-03-12. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 23	Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The plot shows a blue line representing the measured signal, which starts at approximately 102.4 dBuV/m at 2460 MHz and decreases to about 58.5 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC CLASS-B (AVG) limit at 73.1 dBuV/m. The plot is dated 2016-03-12. Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 23



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH12 2467MHz	
1	Horizontal	Vertical
Peak	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 24	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 24
Avg.	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 24	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 24

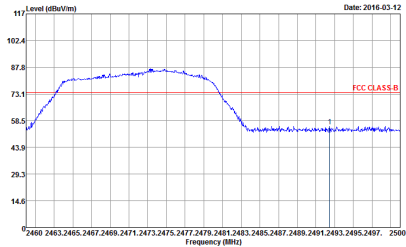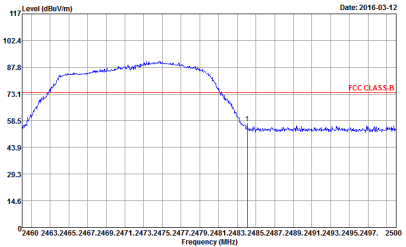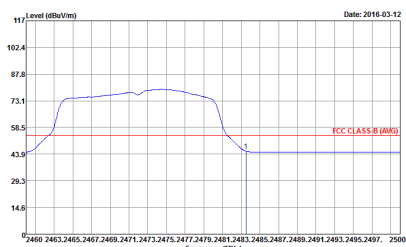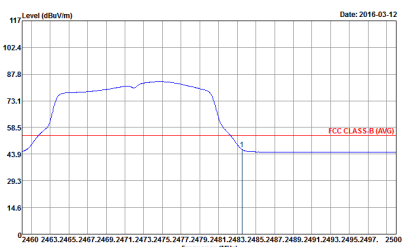

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH13 2472MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 25	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 25
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 25	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 25







2.4GHz 2400~2483.5MHz





WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue line shows the measured signal, which is below the limit until approximately 2390 MHz, where it rises sharply. Site : 03CH07-4Y Condition : FCC CLASS-B 3m HF-ANT, 130829 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-12	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B limit at 73.1 dBuV/m. The blue line shows the measured signal, which is below the limit until approximately 2390 MHz, where it rises sharply. Site : 03CH07-4Y Condition : FCC CLASS-B 3m HF-ANT, 130829 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-12
Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue line shows the measured signal, which is below the limit until approximately 2390 MHz, where it rises sharply. Site : 03CH07-4Y Condition : FCC CLASS-B (AVG) 3m HF-ANT, 130829 HORIZONTAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-12	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 14.6 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A red line indicates the FCC CLASS-B (AVG) limit at 58.5 dBuV/m. The blue line shows the measured signal, which is below the limit until approximately 2390 MHz, where it rises sharply. Site : 03CH07-4Y Condition : FCC CLASS-B (AVG) 3m HF-ANT, 130829 VERTICAL Detector : RBW:1000.000kHz VBW:0.010kHz SWT:Auto Project : Peak Mode : 621809 Date: 2016-03-12

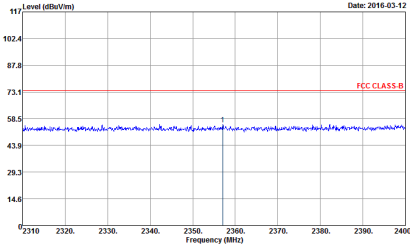
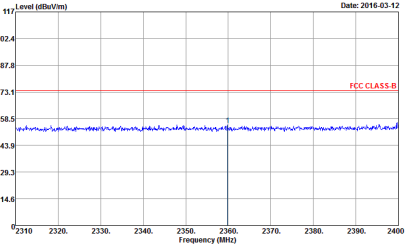
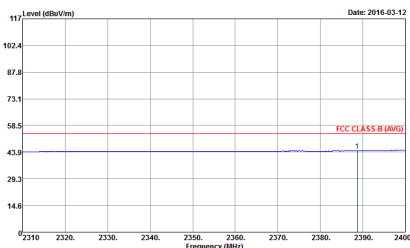
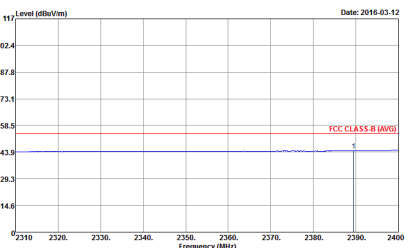


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Horizontal	Vertical
Peak	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-12 FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 27	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-12 FCC CLASS-B Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 3000.000kHz SWT: Auto Detector : Peak Project : 621809 Mode : 27
Avg.	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-12 FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 27	 Level (dBuV/m) Frequency (MHz) Date: 2016-03-12 FCC CLASS-B (AVG) Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW: 1000.000kHz VBW: 0.010kHz SWT: Auto Detector : Peak Project : 621809 Mode : 27

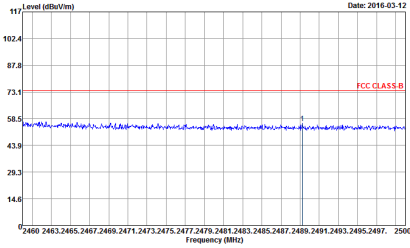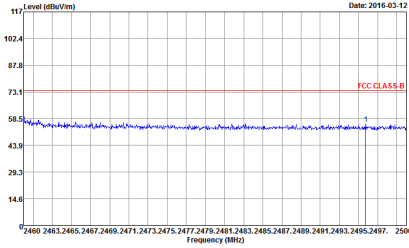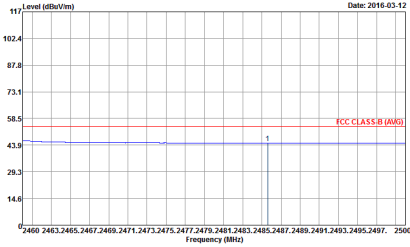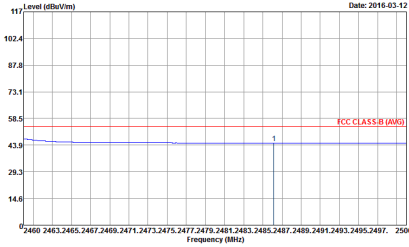

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 27	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 27
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 27	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 27

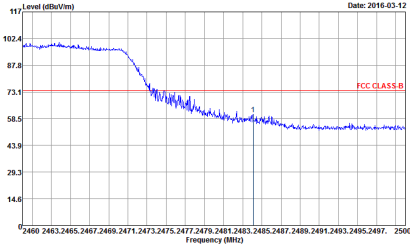
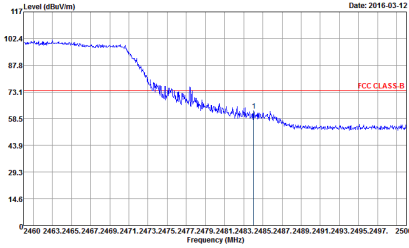
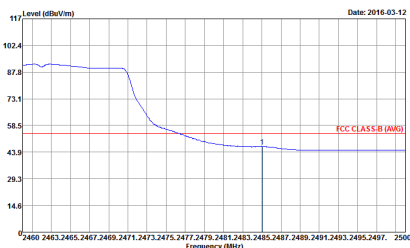
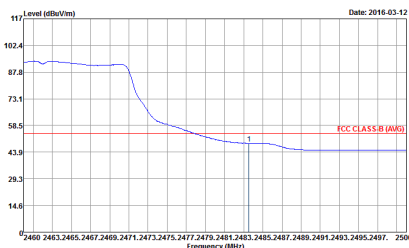


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 28	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 28
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 28	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 28



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH12 2467MHz	
1	Horizontal	Vertical
Peak	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 29	Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 29
Avg.	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 29	Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 29

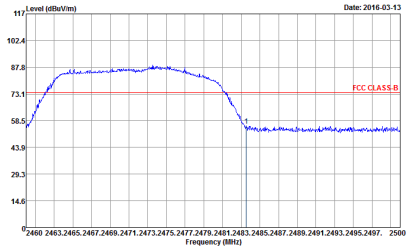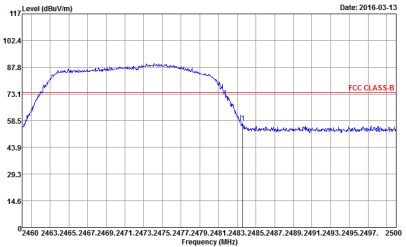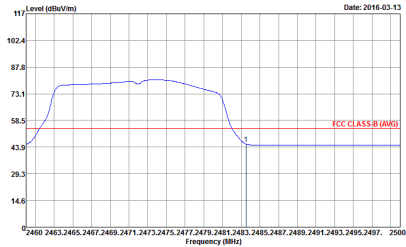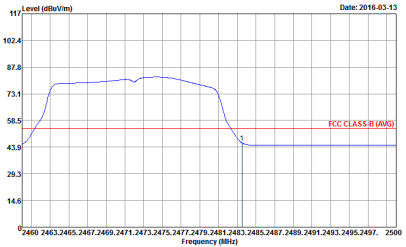

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH13 2472MHz	
1	Horizontal	Vertical
Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 30	 Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak Project : 621809 Mode : 30
Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 30	 Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:0.010kHz SWT:Auto Detector : Peak Project : 621809 Mode : 30



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 15	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 15





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-03-13 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 16	Level (dBuV/m) Date: 2016-03-13 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 16





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-03-13 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 17	Level (dBuV/m) Date: 2016-03-13 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 17



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH12 2467MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 18	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 18



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH13 2472MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 19	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 19



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH07.HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 21	Site : 03CH07.HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 21





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : Z2	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : Z2





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 23	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 23





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH12 2467MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 24	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 24

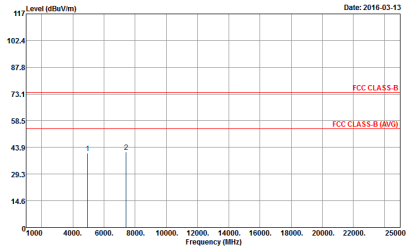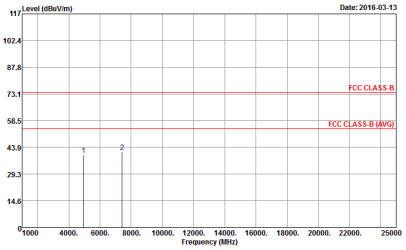

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH13 2472MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 25	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 25



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

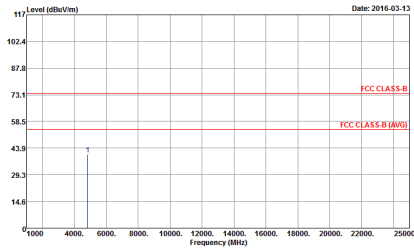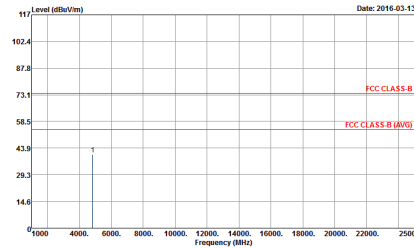WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 26	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 26





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 27	Level (dBuV/m) Date: 2016-03-13 Frequency (MHz) Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 27





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 28	Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 28





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH12 2467MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 29	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 29



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH13 2472MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 621809 Mode : 30	 Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 621809 Mode : 30



Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

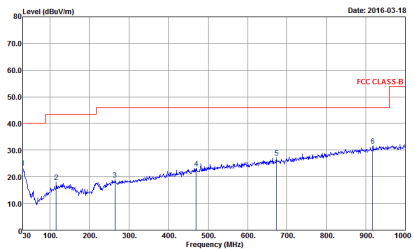
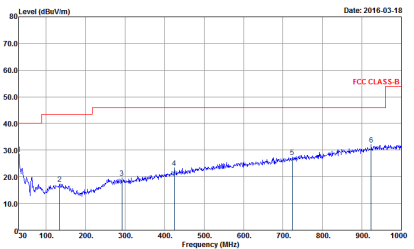
WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11b LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH07.HY Condition : FCC CLASS-B 3m LF-ANT:35419(6) HORIZONTAL Detector : Peak Project : 621809 Mode : 20	 Site : 03CH07.HY Condition : FCC CLASS-B 3m LF-ANT:35419(6) VERTICAL Detector : Peak Project : 621809 Mode : 20



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

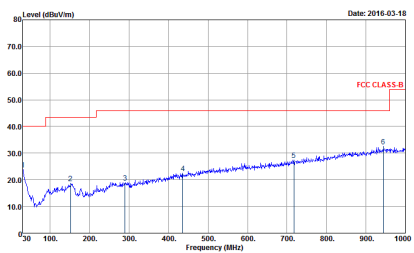
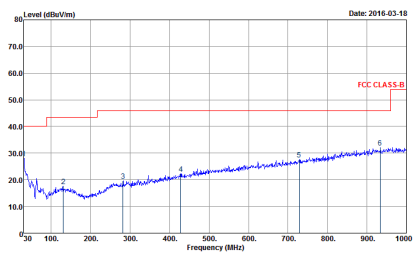
WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 621809 Mode : 31	 Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 621809 Mode : 31



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

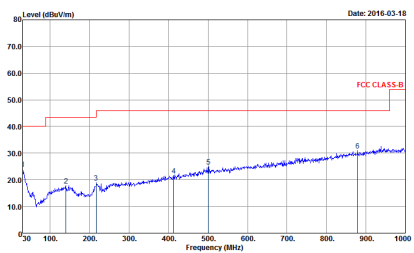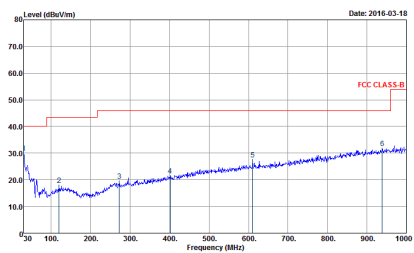WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT20 LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 621809 Mode : 32	 Site : 03CH07-HY Condition : FCC CLASS-B 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 621809 Mode : 32