



Page 95 of 168

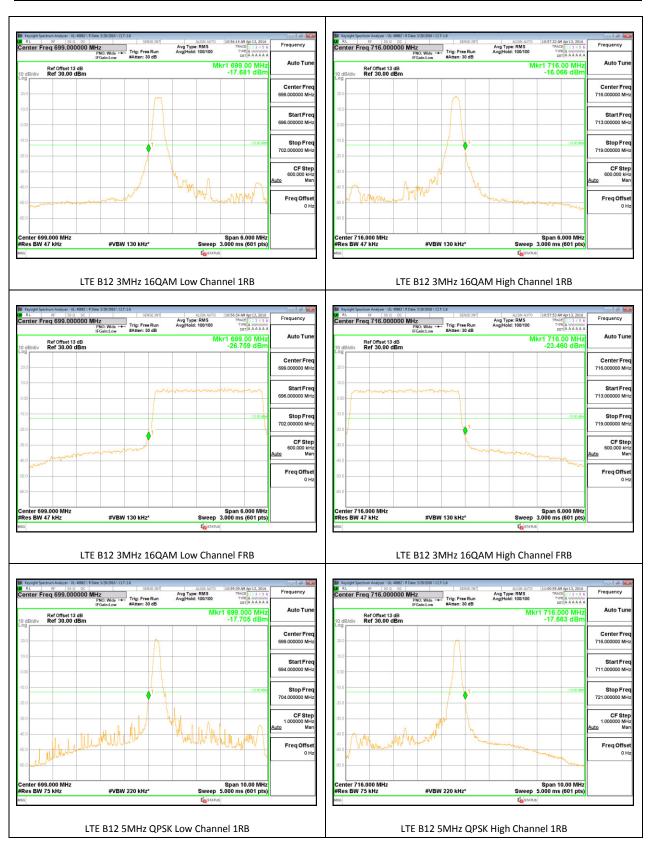

Page 96 of 168

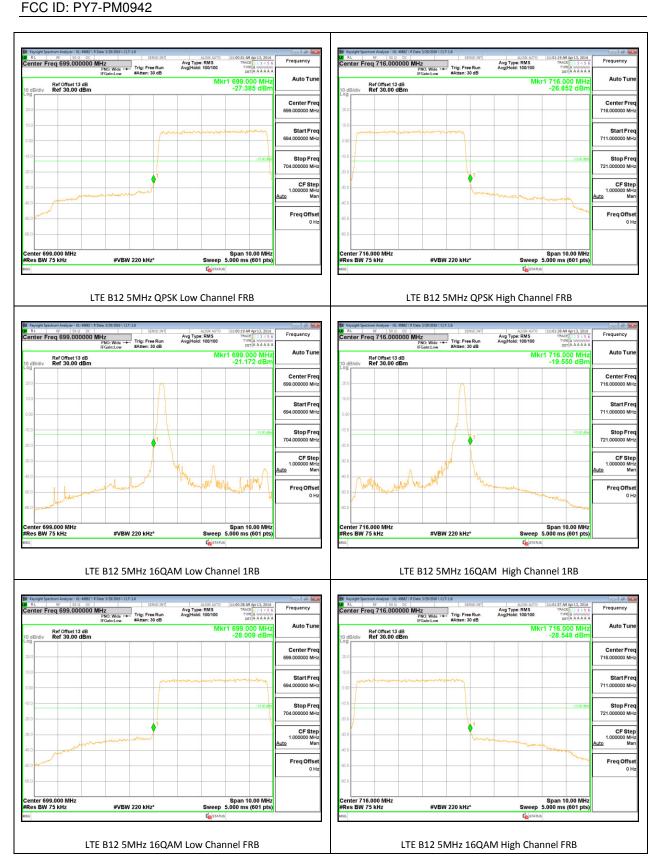


Page 97 of 168



Page 98 of 168

REPORT NO: R11139405C-E1V2


FCC ID: PY7-PM0942

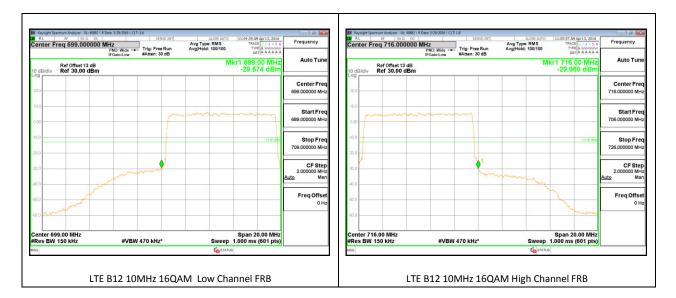


REPORT NO: R11139405C-E1V2


FCC ID: PY7-PM0942

LTE Band 17

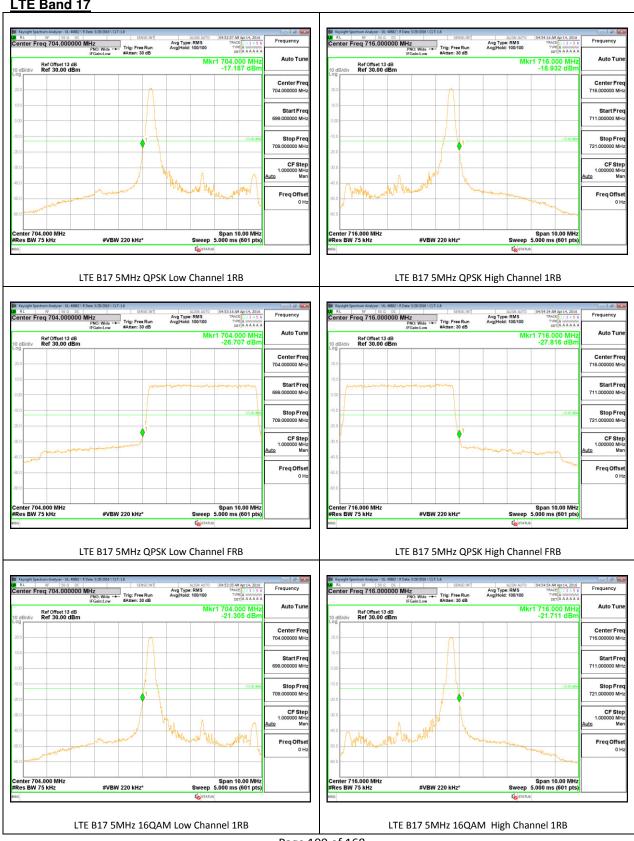

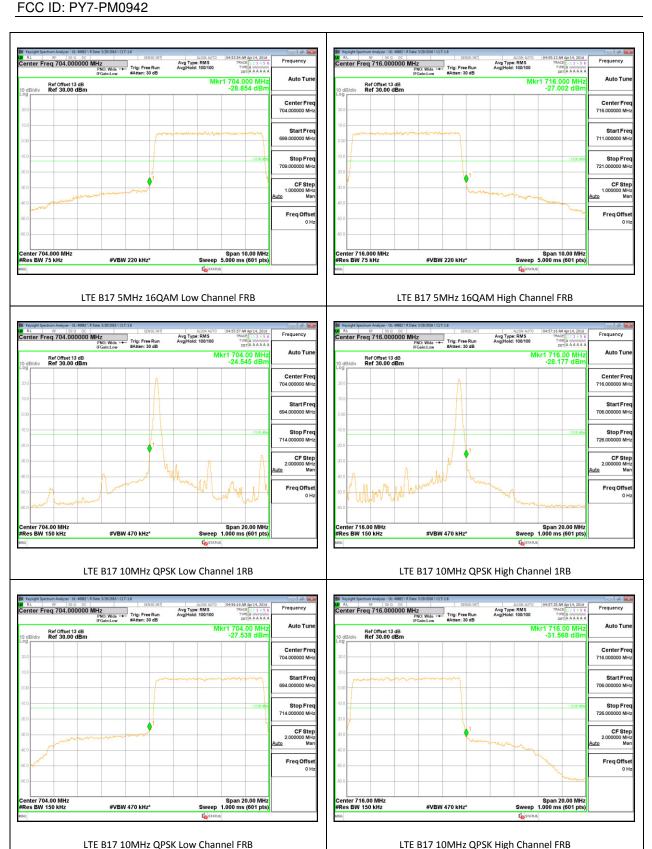

Page 101 of 168

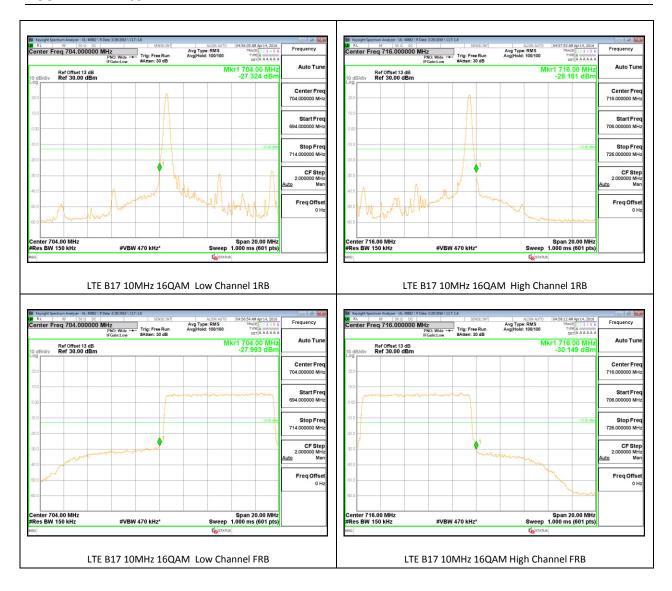


11.2. EMISSION MASK PLOTS

LTE Band 41





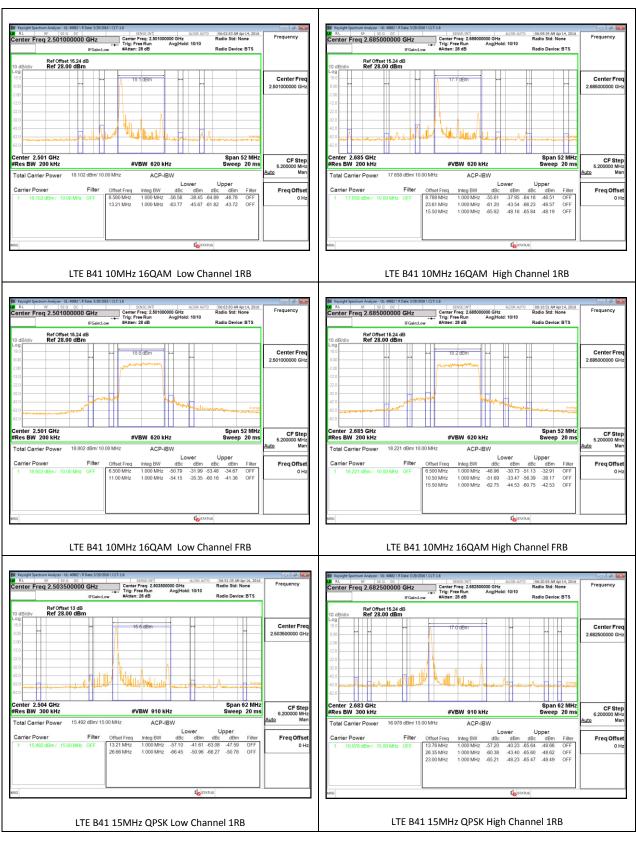




Page 106 of 168



This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

REPORT NO: R11139405C-E1V2

FCC ID: PY7-PM0942

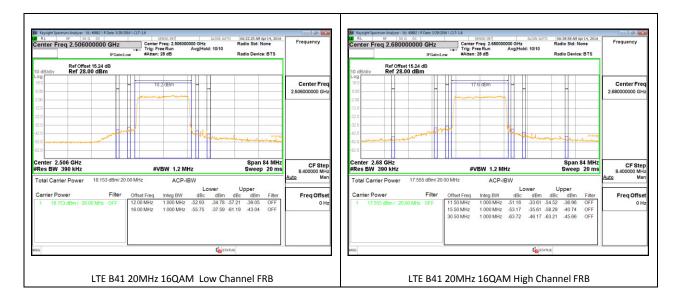

REPORT NO: R11139405C-E1V2 DATE: 5/5/2016

FCC ID: PY7-PM0942

12. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P) dB$.

Part 27: (m)(4) (4) For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in a maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

REPORT NO: R11139405C-E1V2 DATE: 5/5/2016

FCC ID: PY7-PM0942

12.1. OUT OF BAND EMISSIONS RESULT AND PLOTS

GSM

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-22.40	-13	-9.4
GSM850	GPRS	836.6	-22.19	-13	-9.19
GSM850	GPRS	848.8	-23.10	-13	-10.1
GSM850	EGPRS	824.2	-22.56	-13	-9.56
GSM850	EGPRS	836.6	-22.41	-13	-9.41
GSM850	EGPRS	848.8	-22.74	-13	-9.74
GSM1900	GPRS	1850.2	-22.04	-13	-9.04
GSM1900	GPRS	1880	-22.22	-13	-9.22
GSM1900	GPRS	1909.8	-22.13	-13	-9.13
GSM1900	EGPRS	1850.2	-22.09	-13	-9.09
GSM1900	EGPRS	1880	-22.95	-13	-9.95
GSM1900	EGPRS	1909.8	-21.96	-13	-8.96



REPORT NO: R11139405C-E1V2 DATE: 5/5/2016

FCC ID: PY7-PM0942

WCDMA

Band	Mode	f (MHz)	Spur (dBm)	99% BW (MHz)	Delta (dB)
Band 2	REL99	1852.4	-32.835	-13	-19.835
Band 2	REL99	1880	-31.871	-13	-18.871
Band 2	REL99	1907.6	-31.595	-13	-18.595
Band 2	HSDPA	1852.4	-31.981	-13	-18.981
Band 2	HSDPA	1880	-32.391	-13	-19.391
Band 2	HSDPA	1907.6	-31.728	-13	-18.728
Band 4	REL99	1712.4	-31.823	-13	-18.823
Band 4	REL99	1732.6	-32.449	-13	-19.449
Band 4	REL99	1752.6	-32.277	-13	-19.277
Band 4	HSDPA	1712.4	-32.165	-13	-19.165
Band 4	HSDPA	1732.6	-31.847	-13	-18.847
Band 4	HSDPA	1752.6	-32.122	-13	-19.122