



CERTIFICATION TEST REPORT

Report Number. : 12085703-E14V1

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-00718V

EUT Description : GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac & NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

February 13, 2018

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2/13/18	Initial Review	Dan Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST.....	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
6. REUSE OF TEST DATA.....	8
6.1. <i>INTRODUCTION</i>	<i>8</i>
6.2. <i>DEVICES DIFFERENCES.....</i>	<i>8</i>
6.3. <i>SPOT CHECK VERIFICATION RESULTS SUMMARY</i>	<i>8</i>
6.4. <i>REFERENCE DETAIL</i>	<i>8</i>
7. SPOT CHECK DATA.....	9
7.1.1. FUNDAMENTAL EMISSION MASK (11.56 – 15.56MHz).....	9
8. SETUP PHOTOS.....	11

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

SERIAL NUMBER: QV70001516

DATE TESTED: February 8, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc By

Prepared By:



Dan Corona
Operations Leader
UL Verification Services Inc.



Kiya Kedida
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, and FCC CFR 47 Part 15 and KDB 484596 D01 Referencing Test Data DR01-42712.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, & NFC.

6. REUSE OF TEST DATA

6.1. INTRODUCTION

According to the manufacturer, FCC ID: PY7-21831A and FCC ID: PY7-00718V licensed and unlicensed radios (WWAN/WLAN/BT/BLE/NFC) are electrically identical. The FCC ID: PY7-21831A test data shall remain representative of FCC ID: PY7-00718V so, FCC ID: PY7-00718V leverages test data from FCC ID: PY7-21831A.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

6.2. DEVICES DIFFERENCES

Difference between PY7-21831A and PY7-00718V:

- Conducted power all same (i.e. Cellular band and WLAN)
- For cellular band, all cellular bands will change the antenna perspective which is listed as below (i.e. antenna gain, pattern, and matching circuit), Hence RSE and SAR has been tested for all bands.
 - LTE: B2/B4/B5/B7/B12/B13/B17/B26/B41/B66 (*B29 Rx only no impact)
 - UMTS: B2/B4/B5
 - GSM: 850/1900
- For WLAN only 2.4GHz/5GHz chain 1 will change from antenna gain perspective. (i.e. WLAN 2.4GHz and 5GHz WLAN chain 0, PY7-00718V is same as PY7-21831A).

Please refer to operational description for details.

6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY


Spot check verification has been done on device PY7-00718V for radiated harmonic spurious. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.

6.4. REFERENCE DETAIL

Equipment Class	Reference FCC ID	Report Title/Section
DXX (NFC)	PY7-21831A	12073310-E7V4 FCC Report NFC

7. SPOT CHECK DATA

7.1.1. FUNDAMENTAL EMISSION MASK (11.56 – 15.56MHz)

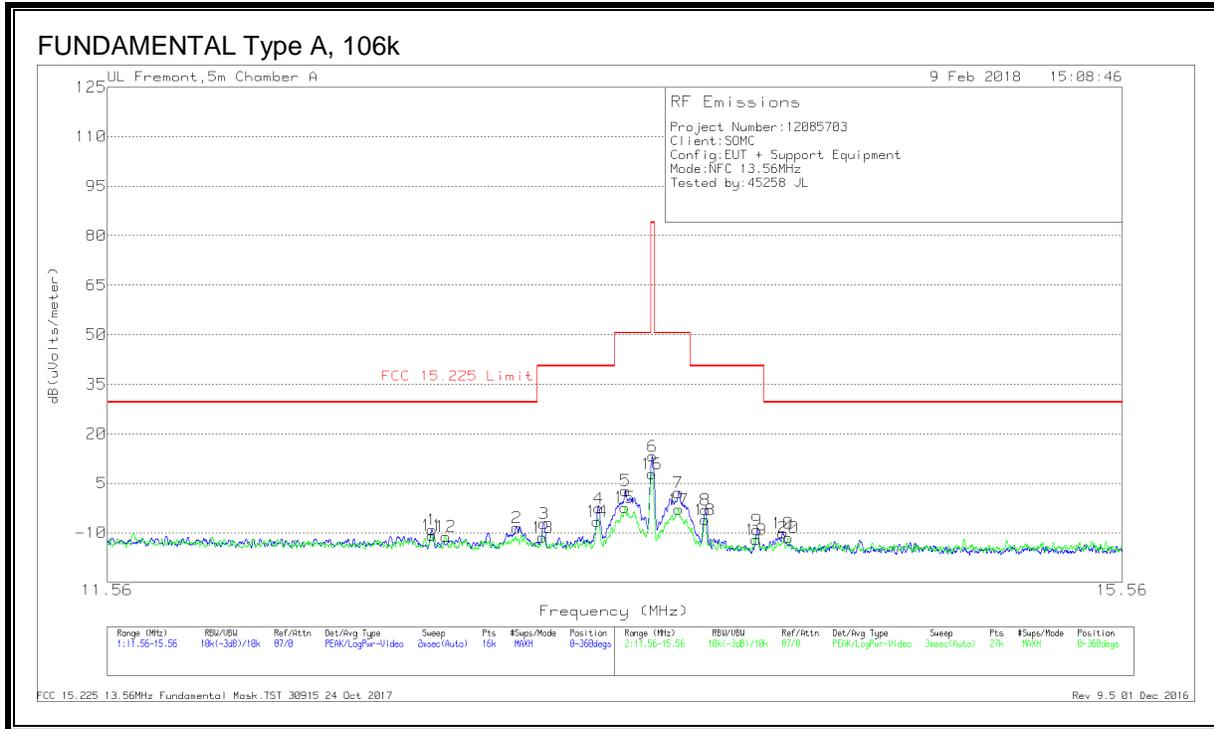

Note: All data rate Field Strength was investigated and Type A, 106k found to have the highest Field Strength results and represents as the worst case data rate.

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)
11	12.71203	13.99	Pk	14.6	.6	-40	-10.81	29.54	-40.35	0-360
1	12.71375	15.71	Pk	14.6	.6	-40	-9.09	29.54	-38.63	0-360
12	12.76383	13.64	Pk	14.6	.6	-40	-11.16	29.54	-40.7	0-360
2	13.03275	16.28	Pk	14.6	.6	-40	-8.52	29.54	-38.06	0-360
13	13.13191	13.42	Pk	14.6	.6	-40	-11.38	40.51	-51.89	0-360
3	13.13675	17.56	Pk	14.6	.6	-40	-7.24	40.51	-47.75	0-360
14	13.34266	18.25	Pk	14.6	.6	-40	-6.55	40.51	-47.06	0-360
4	13.35	22.2	Pk	14.6	.6	-40	-2.6	40.51	-43.11	0-360
15	13.45137	22.43	Pk	14.6	.6	-40	-2.37	50.5	-52.87	0-360
5	13.4545	27.57	Pk	14.6	.6	-40	2.77	50.5	-47.73	0-360
16	*13.55778	32.71	Pk	14.5	.6	-40	7.81	84	-76.19	0-360
6	*13.56	38.04	Pk	14.5	.6	-40	13.14	84	-70.86	0-360
7	13.66325	27	Pk	14.5	.6	-40	2.1	50.5	-48.4	0-360
17	13.66389	21.96	Pk	14.5	.6	-40	-2.94	50.5	-53.44	0-360
18	13.77045	18.92	Pk	14.5	.5	-40	-6.08	40.51	-46.59	0-360
8	13.7725	21.89	Pk	14.5	.5	-40	-3.11	40.51	-43.62	0-360
19	13.97891	12.89	Pk	14.5	.5	-40	-12.11	40.51	-52.62	0-360
9	13.98125	15.79	Pk	14.5	.5	-40	-9.21	40.51	-49.72	0-360
10	14.088	14.86	Pk	14.5	.5	-40	-10.14	29.54	-39.68	0-360
20	14.1113	13.52	Pk	14.5	.5	-40	-11.48	29.54	-41.02	0-360

Pk - Peak detector
 FCC 15.225 13.56MHz Fundamental Mask.TST 30915 24 Oct 2017

Fundamental Frequency

Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dB/m)	Cbl (dB)	Dist Corr 30m	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	PK Margin (dB)	Azimuth (Degs)	Antenna Position
*13.55778	32.71	Pk	14.5	.6	-40	7.81	84	-76.19	0-360	Face-Off
*13.56	38.04	Pk	14.5	.6	-40	13.14	84	-70.86	0-360	Face-On

Pk - Peak detector

APPENDIX A

PY7-00718V SPOT CHECK RESULTS									
Technology	Test Item	Channel	Measured Frequency	PY7-21831A		PY7-00718V		Delta (dB)	
				Peak	Ave	Peak	Ave	Peak	Ave
BT	RBE	1	2439MHz	44.81	34.38	47.08	35.44	-2.27	-1.06
	RSE	39	2759MHz	51.47	38.14	49.51	36.11	1.96	2.03
Note: GFSK is the worst mode									
BLE	RBE	19	2484MHz	52.26	39.02	51.2	40.04	1.06	-1.02
	RSE	19	8141MHz	47.64	38.28	48.06	39.42	-0.42	-1.14
Note:									
DTS	RBE	13	2390MHz	63.44	48.83	66.35	51.39	-2.91	-2.56
	RSE	11	1076.5MHz	51.62	40.66	48.7	38.14	2.92	2.52
Note: 802.11n HT20 is the worst mode									
UNII	RBE	36	5150MHz	57.36	45.37	53.13	46.85	-4.23	1.48
	RSE	36	11679MHz	48.26	36.07	48.48	36.27	0.22	0.2
Note: 802.11a HT20 is the worst mode									
NFC	Fundamental	N/A	13.56 MHz	19.49		13.14		-6.35	
Note: Fundamental is the worst case									
Part15B	RSE	N/A	398.62MHz	42.09		30.7		-11.39	
Note: Below 1GHz is the worst case									

END OF REPORT