



FCC RADIO TEST REPORT

FCC ID : PY7-04605Z
Equipment : GSM/WCDMA/LTE Phone+Bluetooth,
DTS/UNII a/b/g/n/ac and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : 47 CFR Part 2, 22(H), 27

The product was received on Feb. 11, 2019 and testing was started from Apr. 11, 2019 and completed on Apr. 13, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this spot check data report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	6
1.1 Product Feature of Equipment Under Test.....	6
1.2 Modification of EUT	6
1.3 Emission Designator	7
1.4 Testing Location	8
1.5 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	12
3 Conducted Test Items.....	14
3.1 Measuring Instruments	14
3.2 Conducted Output Power and ERP/EIRP	15
3.3 Peak-to-Average Ratio	16
3.4 Occupied Bandwidth.....	17
3.5 Conducted Band Edge	18
3.6 Conducted Spurious Emission	20
3.7 Frequency Stability	21
4 Radiated Test Items	22
4.1 Measuring Instruments	22
4.2 Radiated Spurious Emission Measurement	23
5 List of Measuring Equipment.....	24
6 Uncertainty of Evaluation	26
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG921116-01B	01	Initial issue of report	Apr. 25, 2019
FG921116-01B	02	Revising the remark description and test data	May 13, 2019
FG921116-01B	03	Add the description of accessing spot check test plan in Summary of Test Result	May 17, 2019

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (Band 5)	Pass	
	§27.50 (c)(10)	Effective Radiated Power (Band 12) (Band 17)		
	§27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 41)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)		
3.3	§27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §27.53 (g) §27.53 (h)	Conducted Band Edge Measurement (Band 4) (Band 5) (Band 12) (Band 17)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (Band 41)		
3.6	§2.1051 §22.917 (a) §27.53 (g) §27.53 (h)	Conducted Spurious Emission (Band 4) (Band 5) (Band 12) (Band 17)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (Band 41)		
3.7	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	Pass	-



Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
4.2	§2.1053 §22.917 (a) §27.53 (g) §27.53 (h)	Radiated Spurious Emission (Band 4) (Band 5) (Band 12) (Band 17)	Pass	Under limit 19.56 dB at 10680.000 MHz
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (Band 41)		

Remark:

1. This is a spot check data report except band 4 and band 41 were full test in this report. All the test cases were performed on original report which can be referred to Sporton Report Number FG8O2416-02B.
2. The spot-check data performed in this report are chosen from the worst case of the original FCC ID report and the spot-check data summary is included in the another spot check data report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang**Report Producer: Natasha Hsieh**

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	Monopole / Loop Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.21	BH9200DGGE	Conducted Measurement
		BH920022GE	Radiated Spurious Emission ERP/EIRP Test

Accessory List	
AC Adapter	Model Name : UCH20
	S/N: 3515W45302521
Earphone 1	Model Name.: STH40D
	S/N : N/A
USB Cable	Model Name.: UCB20
	S/N : N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

LTE Band 4		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1710.7 ~ 1754.3	1M09G7D	-	0.0923	1M09W7D	-	0.0957	1M09W7D	-	0.0873
3	1711.5 ~ 1753.5	2M73G7D	-	0.0927	2M75W7D	-	0.0955	2M73W7D	-	0.0877
5	1712.5 ~ 1752.5	4M51G7D	-	0.0942	4M50W7D	-	0.0959	4M50W7D	-	0.0875
10	1715.0 ~ 1750.0	9M07G7D	0.0053	0.0931	9M03W7D	-	0.0959	9M05W7D	-	0.0887
15	1717.5 ~ 1747.5	13M5G7D	-	0.0929	13M5W7D	-	0.0957	13M4W7D	-	0.0871
20	1720.0 ~ 1745.0	17M9G7D	-	0.0962	17M9W7D	-	0.0957	18M0W7D	-	0.0885
LTE Band 5		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	-	-	0.0735	-	-	0.0624	-	-	0.0489
3	825.5 ~ 847.5	-	-	0.0735	-	-	0.0628	-	-	0.0490
5	826.5 ~ 846.5	-	-	0.0733	-	-	0.0634	-	-	0.0492
10	829.0 ~ 844.0	-	-	0.0736	-	-	0.0630	-	-	0.0491
LTE Band 12		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	699.7 ~ 715.3	-	-	0.0396	-	-	0.0406	-	-	0.0327
3	700.5 ~ 714.5	-	-	0.0399	-	-	0.0408	-	-	0.0318
5	701.5 ~ 713.5	-	-	0.0400	-	-	0.0406	-	-	0.0316
10	704.0 ~ 711.0	-	-	0.0415	-	-	0.0411	-	-	0.0321
LTE Band 17		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	706.5 ~ 713.5	-	-	0.0420	-	-	0.0406	-	-	0.0316
10	709.0 ~ 711.0	-	-	0.0423	-	-	0.0407	-	-	0.0316
LTE Band 41		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2498.5~2687.5	4M54G7D	-	0.1932	4M50W7D	-	0.1866	4M51W7D	-	0.1754
10	2501.0~2685.0	9M01G7D	0.0068	0.1959	9M03W7D	-	0.1901	9M03W7D	-	0.1786
15	2503.5~2682.5	13M5G7D	-	0.1977	13M4W7D	-	0.1928	13M4W7D	-	0.1803
20	2506.0~2680.0	17M9G7D	-	0.2037	17M9W7D	-	0.2018	17M9W7D	-	0.1862



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane for band 12, Z plane for band 4, 5, 17, and 41) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	4						v	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	4	v	v	v	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	4	v	v	v	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	4				v			v					v		v	
	41	-	-		v			v					v		v	
E.R.P / E.I.R.P	4	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	12	v	v	v	v	-	-	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	4	Worst Case												v	v	v
	5	Worst Case													v	
	12	Worst Case													v	
	17	Worst Case													v	
	41	Worst Case												v	v	v
Remark	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

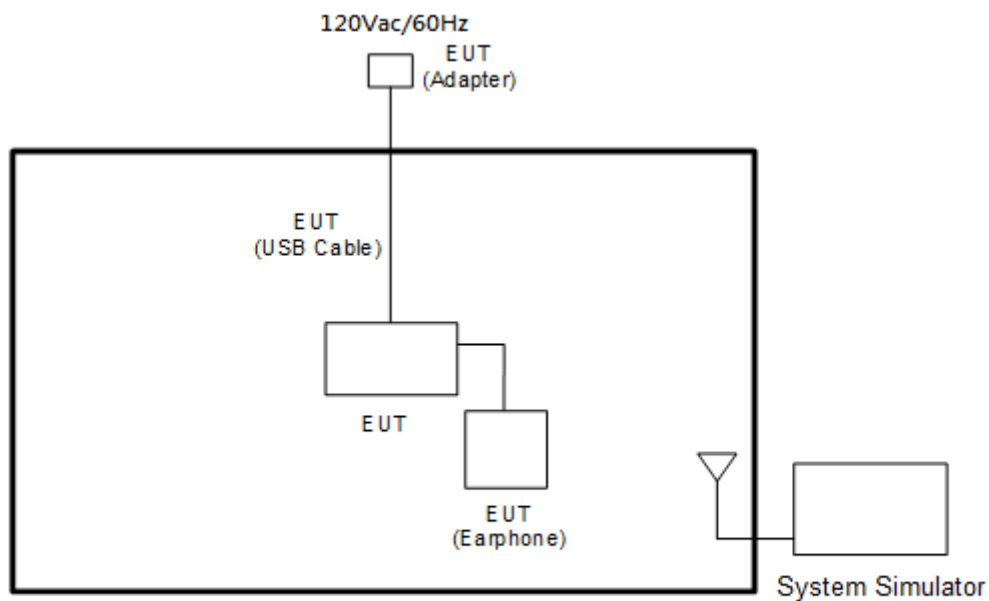



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 4 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20050	20175	20300
	Frequency	1720	1732.5	1745
15	Channel	20025	20175	20325
	Frequency	1717.5	1732.5	1747.5
10	Channel	20000	20175	20350
	Frequency	1715	1732.5	1750
5	Channel	19975	20175	20375
	Frequency	1712.5	1732.5	1752.5
3	Channel	19965	20175	20385
	Frequency	1711.5	1732.5	1753.5
1.4	Channel	19957	20175	20393
	Frequency	1710.7	1732.5	1754.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23060	23095	23130
	Frequency	704	707.5	711
5	Channel	23035	23095	23155
	Frequency	701.5	707.5	713.5
3	Channel	23025	23095	23165
	Frequency	700.5	707.5	714.5
1.4	Channel	23017	23095	23173
	Frequency	699.7	707.5	715.3

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506.0	2593.0	2680.0
15	Channel	39725	40620	41515
	Frequency	2503.5	2593.0	2682.5
10	Channel	39700	40620	41540
	Frequency	2501.0	2593.0	2685.0
5	Channel	39675	40620	41565
	Frequency	2498.5	2593.0	2687.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

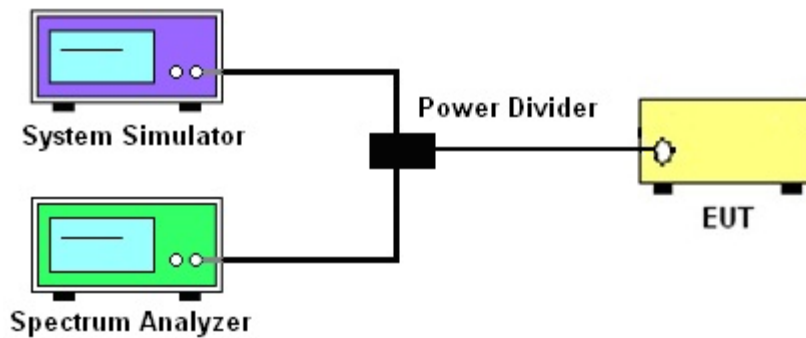

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 12 and Band 17.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 41.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
8. For LTE Band 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
10. For Band 41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

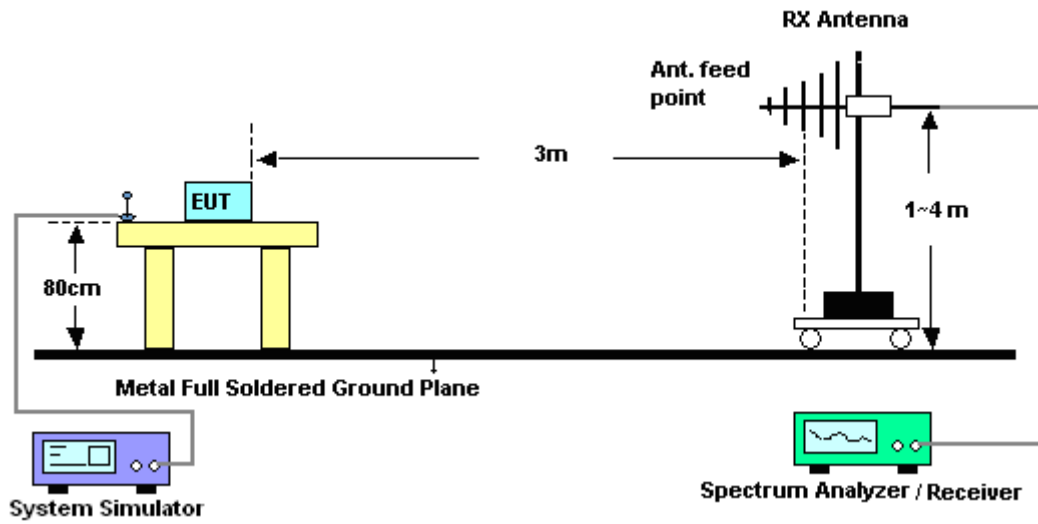

For radiated test above 1GHz

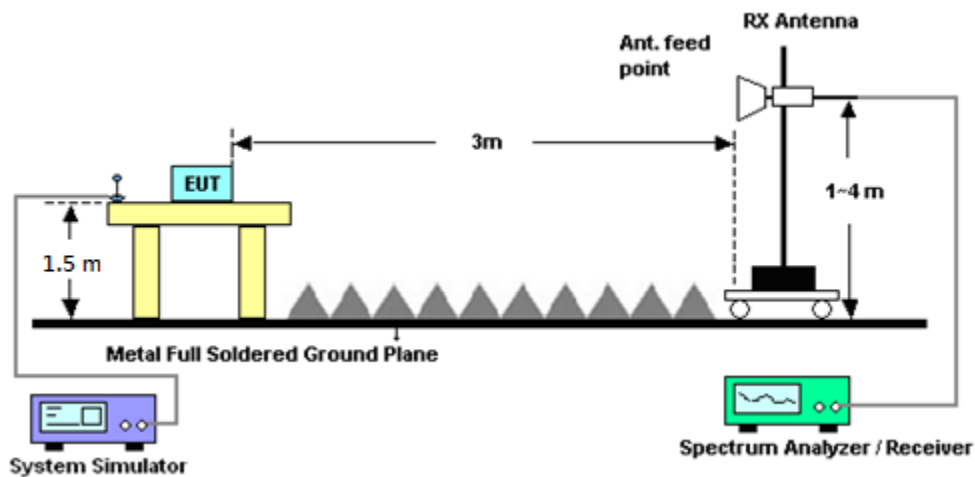

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

11. For Band 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 14, 2018	Apr. 11, 2019~ Apr. 12, 2019	Oct. 13, 2019	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Jul. 30, 2018	Apr. 11, 2019~ Apr. 12, 2019	Jul. 29, 2019	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃~90℃	Aug. 29, 2018	Apr. 11, 2019~ Apr. 12, 2019	Aug. 28, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 02, 2018	Apr. 11, 2019~ Apr. 12, 2019	Oct. 01, 2019	Conducted (TH05-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#A	1-18GHz	Jan. 14, 2019	Apr. 11, 2019~ Apr. 12, 2019	Jan. 13, 2020	Conducted (TH05-HY)
Hygrometer	TECEPEL	HTC-1	2	N/A	Mar. 05, 2019	Apr. 11, 2019~ Apr. 12, 2019	Mar. 04, 2020	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 22, 2018	Apr. 12, 2019~ Apr. 13, 2019	Nov. 21, 2019	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Apr. 12, 2019~ Apr. 13, 2019	Dec. 17, 2018	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Sep. 17, 2018	Apr. 12, 2019~ Apr. 13, 2019	Sep. 16, 2019	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00211469	1GHz~18GHz	Aug. 06, 2018	Apr. 12, 2019~ Apr. 13, 2019	Aug. 05, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz- 40GHz	May 08, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 07, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 20, 2018	Apr. 12, 2019~ Apr. 13, 2019	Nov. 19, 2019	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	May 21, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 20, 2019	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Apr. 12, 2019~ Apr. 13, 2019	Jul. 15, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 28, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 27, 2019	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 23, 2019	Apr. 12, 2019~ Apr. 13, 2019	Jan. 22, 2020	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP157075	N/A	Nov. 05, 2018	Apr. 12, 2019~ Apr. 13, 2019	Nov. 04, 2019	Radiation (03CH07-HY)
Notch Filter	Wainwright	WTRCT5-82 4-849-20-70- 60SSK	SN1	824-849	Mar. 21, 2019	Apr. 12, 2019~ Apr. 13, 2019	Mar. 20, 2020	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCT10-19 20-1980-20- 40-40SSK	SN1	1920-1980	May 22, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 21, 2019	Radiation (03CH07-HY)
Notch Filter	Wainwright	WTRCD10-1 710-1785-20 -40-40SSK	SN1	1710-1785	May 22, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 21, 2019	Radiation (03CH07-HY)
Filter	Wainwright	WLJ4-1000- 1530-6000-4 0ST	SN3	1.53 GHz Lowpass	Mar. 20, 2019	Apr. 12, 2019~ Apr. 13, 2019	Mar. 19, 2020	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Nov. 02, 2018	Apr. 12, 2019~ Apr. 13, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 02, 2018	Apr. 12, 2019~ Apr. 13, 2019	Nov. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 26, 2019	Apr. 12, 2019~ Apr. 13, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 26, 2019	Apr. 12, 2019~ Apr. 13, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 26, 2019	Apr. 12, 2019~ Apr. 13, 2019	Feb. 25, 2020	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Apr. 12, 2019~ Apr. 13, 2019	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF7802083 68	Control Ant Mast	N/A	Apr. 12, 2019~ Apr. 13, 2019	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Apr. 12, 2019~ Apr. 13, 2019	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 12, 2019~ Apr. 13, 2019	N/A	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Apr. 12, 2019~ Apr. 13, 2019	May 21, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8 -24	8050400465 6H	N/A	N/A	Apr. 12, 2019~ Apr. 13, 2019	N/A	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.7
--	-----

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.5
--	-----

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.2
--	-----



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

<Fully testing band>

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	21.83	21.54	21.60
20	1	49		21.73	21.49	21.55
20	1	99		21.70	21.43	21.50
20	50	0		21.72	21.57	21.57
20	50	24		21.73	21.55	21.56
20	50	50		21.65	21.55	21.50
20	100	0		21.67	21.56	21.52
20	1	0	16-QAM	21.74	21.69	21.78
20	1	49		21.81	21.67	21.76
20	1	99		21.77	21.62	21.70
20	50	0		21.32	21.15	21.15
20	50	24		21.30	21.17	21.11
20	50	50		21.28	21.10	21.06
20	100	0		21.29	21.13	21.12
20	1	0	64-QAM	21.42	21.30	21.37
20	1	49		21.47	21.31	21.33
20	1	99		21.46	21.21	21.30
20	50	0		20.33	20.18	20.14
20	50	24		20.35	20.19	20.12
20	50	50		20.29	20.10	20.11
20	100	0		20.31	20.15	20.09
15	1	0	QPSK	21.61	21.56	21.62
15	1	37		21.64	21.50	21.56
15	1	74		21.53	21.47	21.60
15	36	0		21.63	21.55	21.64
15	36	20		21.64	21.60	21.68
15	36	39		21.59	21.53	21.61
15	75	0		21.63	21.54	21.61
15	1	0	16-QAM	21.74	21.73	21.79
15	1	37		21.81	21.66	21.72
15	1	74		21.68	21.62	21.78
15	36	0		21.18	21.15	21.24
15	36	20		21.21	21.19	21.23
15	36	39		21.19	21.13	21.19
15	75	0		21.18	21.15	21.21
15	1	0	64-QAM	21.36	21.35	21.37
15	1	37		21.40	21.30	21.36
15	1	74		21.31	21.24	21.37
15	36	0		20.25	20.19	20.27
15	36	20		20.27	20.23	20.28
15	36	39		20.24	20.19	20.22
15	75	0		20.21	20.16	20.21



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	21.52	21.63	21.69
10	1	25		21.59	21.52	21.59
10	1	49		21.53	21.60	21.64
10	25	0		21.54	21.58	21.62
10	25	12		21.63	21.59	21.63
10	25	25		21.61	21.51	21.57
10	50	0		21.54	21.53	21.60
10	1	0	16-QAM	21.67	21.74	21.79
10	1	25		21.75	21.70	21.76
10	1	49		21.73	21.77	21.82
10	25	0		21.13	21.17	21.21
10	25	12		21.19	21.19	21.23
10	25	25		21.20	21.14	21.21
10	50	0		21.10	21.16	21.21
10	1	0	64-QAM	21.27	21.44	21.48
10	1	25		21.34	21.33	21.37
10	1	49		21.33	21.38	21.42
10	25	0		20.12	20.16	20.27
10	25	12		20.24	20.21	20.26
10	25	25		20.18	20.12	20.21
10	50	0		20.15	20.18	20.22
5	1	0	QPSK	21.47	21.50	21.53
5	1	12		21.58	21.50	21.63
5	1	24		21.53	21.47	21.61
5	12	0		21.55	21.58	21.61
5	12	7		21.64	21.59	21.74
5	12	13		21.61	21.55	21.69
5	25	0		21.50	21.55	21.61
5	1	0	16-QAM	21.65	21.67	21.73
5	1	12		21.76	21.70	21.82
5	1	24		21.72	21.66	21.77
5	12	0		21.10	21.16	21.18
5	12	7		21.23	21.16	21.33
5	12	13		21.23	21.14	21.28
5	25	0		21.09	21.16	21.21
5	1	0	64-QAM	21.25	21.31	21.33
5	1	12		21.34	21.31	21.42
5	1	24		21.29	21.26	21.39
5	12	0		20.21	20.18	20.25
5	12	7		20.29	20.22	20.38
5	12	13		20.25	20.20	20.35
5	25	0		20.10	20.12	20.19



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	21.43	21.47	21.62
3	1	8		21.54	21.48	21.61
3	1	14		21.52	21.45	21.60
3	8	0		21.47	21.52	21.66
3	8	4		21.51	21.55	21.67
3	8	7		21.57	21.51	21.64
3	15	0		21.49	21.52	21.67
3	1	0	16-QAM	21.55	21.63	21.75
3	1	8		21.73	21.64	21.80
3	1	14		21.68	21.63	21.76
3	8	0		21.12	21.14	21.29
3	8	4		21.13	21.17	21.33
3	8	7		21.20	21.17	21.30
3	15	0		21.09	21.13	21.29
3	1	0	64-QAM	21.19	21.25	21.39
3	1	8		21.31	21.28	21.43
3	1	14		21.26	21.26	21.37
3	8	0		20.14	20.16	20.31
3	8	4		20.17	20.20	20.33
3	8	7		20.23	20.15	20.31
3	15	0		20.12	20.12	20.28
1.4	1	0	QPSK	21.40	21.42	21.58
1.4	1	3		21.49	21.49	21.65
1.4	1	5		21.38	21.41	21.54
1.4	3	0		21.44	21.46	21.61
1.4	3	1		21.48	21.48	21.65
1.4	3	3		21.46	21.46	21.60
1.4	6	0		21.44	21.47	21.62
1.4	1	0	16-QAM	21.53	21.58	21.73
1.4	1	3		21.60	21.66	21.81
1.4	1	5		21.54	21.59	21.71
1.4	3	0		21.35	21.40	21.52
1.4	3	1		21.38	21.42	21.58
1.4	3	3		21.33	21.36	21.53
1.4	6	0		21.11	21.13	21.28
1.4	1	0	64-QAM	21.17	21.23	21.35
1.4	1	3		21.22	21.29	21.41
1.4	1	5		21.15	21.20	21.34
1.4	3	0		21.15	21.22	21.37
1.4	3	1		21.22	21.26	21.40
1.4	3	3		21.15	21.21	21.35
1.4	6	0		20.05	20.08	20.23



<Spotcheck band>

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.05	22.99	23.00
10	1	25		22.99	22.98	23.08
10	1	49		22.95	23.04	23.12
10	25	0		22.56	22.57	22.56
10	25	12		22.59	22.58	22.56
10	25	25		22.54	22.60	22.61
10	50	0		22.57	22.59	22.54
10	1	0	16-QAM	22.30	22.32	22.36
10	1	25		22.33	22.32	22.39
10	1	49		22.30	22.44	22.42
10	25	0		21.14	21.14	21.16
10	25	12		21.15	21.19	21.15
10	25	25		21.10	21.13	21.19
10	50	0		21.12	21.16	21.12
10	1	0	64-QAM	21.24	21.26	21.27
10	1	25		21.23	21.24	21.27
10	1	49		21.20	21.36	21.35
10	25	0		20.14	20.14	20.19
10	25	12		20.19	20.21	20.15
10	25	25		20.10	20.14	20.22
10	50	0		20.16	20.16	20.17
5	1	0	QPSK	23.04	22.96	23.06
5	1	12		23.02	22.97	23.10
5	1	24		22.97	23.04	23.10
5	12	0		22.56	22.56	22.61
5	12	7		22.60	22.57	22.62
5	12	13		22.55	22.55	22.70
5	25	0		22.56	22.54	22.60
5	1	0	16-QAM	22.32	22.29	22.38
5	1	12		22.27	22.30	22.47
5	1	24		22.30	22.39	22.40
5	12	0		21.13	21.12	21.19
5	12	7		21.17	21.16	21.23
5	12	13		21.12	21.13	21.25
5	25	0		21.13	21.12	21.20
5	1	0	64-QAM	21.27	21.22	21.30
5	1	12		21.24	21.23	21.37
5	1	24		21.19	21.29	21.31
5	12	0		20.17	20.19	20.23
5	12	7		20.21	20.19	20.27
5	12	13		20.15	20.19	20.30
5	25	0		20.13	20.13	20.19



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.01	22.97	23.05
3	1	8		23.02	22.96	23.11
3	1	14		22.99	22.97	23.09
3	8	0		22.57	22.55	22.59
3	8	4		22.57	22.55	22.71
3	8	7		22.55	22.54	22.69
3	15	0		22.56	22.52	22.58
3	1	0	16-QAM	22.30	22.28	22.34
3	1	8		22.30	22.30	22.43
3	1	14		22.25	22.28	22.39
3	8	0		21.19	21.14	21.22
3	8	4		21.18	21.18	21.31
3	8	7		21.18	21.15	21.31
3	15	0		21.14	21.12	21.20
3	1	0	64-QAM	21.25	21.20	21.25
3	1	8		21.24	21.22	21.35
3	1	14		21.21	21.22	21.33
3	8	0		20.19	20.14	20.23
3	8	4		20.19	20.21	20.32
3	8	7		20.16	20.14	20.31
3	15	0		20.12	20.13	20.20
1.4	1	0	QPSK	22.93	22.90	23.03
1.4	1	3		23.02	22.96	23.11
1.4	1	5		22.93	22.87	23.00
1.4	3	0		22.97	22.92	23.08
1.4	3	1		23.03	22.96	23.10
1.4	3	3		22.97	22.92	23.07
1.4	6	0		22.51	22.46	22.61
1.4	1	0	16-QAM	22.24	22.22	22.35
1.4	1	3		22.30	22.27	22.40
1.4	1	5		22.23	22.22	22.32
1.4	3	0		22.04	22.03	22.15
1.4	3	1		22.08	22.07	22.18
1.4	3	3		22.03	22.01	22.12
1.4	6	0		21.15	21.12	21.25
1.4	1	0	64-QAM	21.19	21.17	21.27
1.4	1	3		21.22	21.23	21.34
1.4	1	5		21.17	21.11	21.25
1.4	3	0		21.20	21.13	21.27
1.4	3	1		21.20	21.19	21.33
1.4	3	3		21.18	21.13	21.27
1.4	6	0		20.06	20.06	20.18



<Spotcheck band>

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.35	22.39	22.33
10	1	25		22.42	22.50	22.36
10	1	49		22.42	22.63	22.49
10	25	0		22.29	22.24	22.21
10	25	12		22.33	22.24	22.21
10	25	25		22.30	22.27	22.19
10	50	0		22.30	22.24	22.20
10	1	0	16-QAM	22.49	22.41	22.47
10	1	25		22.55	22.56	22.49
10	1	49		22.51	22.59	22.12
10	25	0		21.33	21.33	21.29
10	25	12		21.41	21.33	21.28
10	25	25		21.36	21.33	21.25
10	50	0		21.35	21.32	21.27
10	1	0	64-QAM	21.38	21.36	21.40
10	1	25		21.48	21.47	21.41
10	1	49		21.51	21.49	21.17
10	25	0		20.35	20.34	20.29
10	25	12		20.41	20.38	20.31
10	25	25		20.37	20.32	20.27
10	50	0		20.36	20.37	20.28
5	1	0	QPSK	22.36	22.38	22.45
5	1	12		22.38	22.37	22.47
5	1	24		22.36	22.36	22.47
5	12	0		22.21	22.23	22.26
5	12	7		22.24	22.25	21.96
5	12	13		22.21	22.22	21.80
5	25	0		22.21	22.22	22.23
5	1	0	16-QAM	22.53	22.52	22.53
5	1	12		22.50	22.50	22.42
5	1	24		22.43	22.46	22.08
5	12	0		21.27	21.28	21.32
5	12	7		21.31	21.33	21.07
5	12	13		21.27	21.29	20.83
5	25	0		21.28	21.32	21.32
5	1	0	64-QAM	21.45	21.45	21.45
5	1	12		21.43	21.43	21.30
5	1	24		21.41	21.40	21.06
5	12	0		20.32	20.34	20.38
5	12	7		20.37	20.39	20.18
5	12	13		20.34	20.36	19.90
5	25	0		20.30	20.31	20.33



LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.38	22.38	22.46
3	1	8		22.38	22.37	22.45
3	1	14		22.38	22.37	22.45
3	8	0		22.22	22.23	21.83
3	8	4		22.25	22.24	21.77
3	8	7		22.22	22.22	21.76
3	15	0		22.22	22.23	21.78
3	1	0	16-QAM	22.56	22.50	22.34
3	1	8		22.53	22.51	22.06
3	1	14		22.47	22.50	22.09
3	8	0		21.33	21.32	20.99
3	8	4		21.37	21.35	20.95
3	8	7		21.34	21.33	20.87
3	15	0		21.30	21.31	20.83
3	1	0	64-QAM	21.47	21.43	21.38
3	1	8		21.43	21.43	21.02
3	1	14		21.43	21.41	21.06
3	8	0		20.35	20.34	19.98
3	8	4		20.37	20.35	19.97
3	8	7		20.33	20.35	19.94
3	15	0		20.34	20.32	19.95
1.4	1	0	QPSK	22.31	22.29	22.35
1.4	1	3		22.38	22.34	22.42
1.4	1	5		22.28	22.26	22.34
1.4	3	0		22.35	22.32	22.36
1.4	3	1		22.40	22.39	22.43
1.4	3	3		22.37	22.33	22.39
1.4	6	0		22.25	22.14	21.78
1.4	1	0	16-QAM	22.54	22.41	22.12
1.4	1	3		22.50	22.49	22.17
1.4	1	5		22.53	22.42	22.14
1.4	3	0		22.38	22.23	21.93
1.4	3	1		22.42	22.30	21.96
1.4	3	3		22.37	22.21	21.99
1.4	6	0		21.51	21.27	21.02
1.4	1	0	64-QAM	21.55	21.34	21.17
1.4	1	3		21.60	21.42	21.12
1.4	1	5		21.54	21.32	21.13
1.4	3	0		21.57	21.34	21.15
1.4	3	1		21.60	21.43	21.15
1.4	3	3		21.55	21.35	21.12
1.4	6	0		20.46	20.23	20.07



<Spotcheck band>

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.35	22.36	22.36
10	1	25		22.55	22.55	22.54
10	1	49		22.55	22.62	22.71
10	25	0		22.15	22.13	22.32
10	25	12		22.21	22.19	22.32
10	25	25		22.24	22.22	22.34
10	50	0		22.21	22.21	22.31
10	1	0	16-QAM	22.28	22.28	22.38
10	1	25		22.48	22.44	22.55
10	1	49		22.39	22.39	22.33
10	25	0		21.22	21.21	21.39
10	25	12		21.30	21.30	21.40
10	25	25		21.29	21.24	21.34
10	50	0		21.30	21.29	21.40
10	1	0	64-QAM	21.22	21.20	21.27
10	1	25		21.38	21.36	21.44
10	1	49		21.34	21.32	21.30
10	25	0		20.23	20.23	20.44
10	25	12		20.37	20.31	20.42
10	25	25		20.31	20.27	20.37
10	50	0		20.33	20.34	20.40
5	1	0	QPSK	22.40	22.44	22.50
5	1	12		22.39	22.55	22.53
5	1	24		22.46	22.53	22.68
5	12	0		22.08	22.19	22.27
5	12	7		22.20	22.22	22.04
5	12	13		22.14	22.19	21.79
5	25	0		22.13	22.17	22.27
5	1	0	16-QAM	22.29	22.34	22.54
5	1	12		22.34	22.44	22.45
5	1	24		22.38	22.40	22.21
5	12	0		21.13	21.27	21.32
5	12	7		21.29	21.28	21.22
5	12	13		21.21	21.28	20.92
5	25	0		21.21	21.28	21.30
5	1	0	64-QAM	21.24	21.26	21.45
5	1	12		21.24	21.37	21.38
5	1	24		21.28	21.30	21.17
5	12	0		20.20	20.34	20.38
5	12	7		20.32	20.35	20.30
5	12	13		20.28	20.32	19.98
5	25	0		20.22	20.31	20.33



<Fully testing band>

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	20.49	20.13	20.13
20	1	49		20.45	20.00	19.99
20	1	99		20.43	20.00	20.09
20	50	0		20.48	20.15	20.13
20	50	24		20.47	20.09	20.08
20	50	50		20.45	20.03	19.98
20	100	0		20.46	20.07	20.07
20	1	0	16-QAM	20.45	20.11	20.15
20	1	49		20.37	19.93	19.96
20	1	99		20.32	19.92	19.98
20	50	0		20.17	19.77	19.73
20	50	24		20.12	19.69	19.70
20	50	50		20.04	19.65	19.64
20	100	0		20.14	19.84	19.79
20	1	0	64-QAM	19.84	19.52	19.57
20	1	49		19.80	19.38	19.40
20	1	99		19.75	19.33	19.45
20	50	0		20.10	19.71	19.71
20	50	24		20.10	19.66	19.73
20	50	50		20.01	19.61	19.62
20	100	0		20.06	19.74	19.76
15	1	0	QPSK	20.30	20.17	20.10
15	1	37		20.31	20.05	20.01
15	1	74		20.29	20.04	20.08
15	36	0		20.36	20.12	20.10
15	36	20		20.34	20.12	20.06
15	36	39		20.31	20.06	20.12
15	75	0		20.32	20.09	20.02
15	1	0	16-QAM	20.25	20.09	20.06
15	1	37		20.22	20.00	19.97
15	1	74		20.25	19.94	20.00
15	36	0		19.95	19.70	19.67
15	36	20		19.94	19.66	19.61
15	36	39		19.88	19.63	19.69
15	75	0		19.98	19.71	19.65
15	1	0	64-QAM	19.68	19.51	19.49
15	1	37		19.66	19.42	19.42
15	1	74		19.66	19.37	19.45
15	36	0		19.96	19.69	19.72
15	36	20		19.92	19.65	19.65
15	36	39		19.87	19.64	19.73
15	75	0		19.93	19.68	19.68



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	20.22	20.07	20.04
10	1	25		20.19	20.05	20.07
10	1	49		20.27	20.02	20.11
10	25	0		20.21	20.07	20.03
10	25	12		20.18	20.09	19.99
10	25	25		20.27	20.05	20.09
10	50	0		20.32	20.06	19.99
10	1	0	16-QAM	20.19	20.05	20.06
10	1	25		20.12	20.00	20.06
10	1	49		20.14	19.93	20.01
10	25	0		19.86	19.68	19.65
10	25	12		19.86	19.74	19.67
10	25	25		19.90	19.65	19.70
10	50	0		19.93	19.69	19.65
10	1	0	64-QAM	19.59	19.43	19.52
10	1	25		19.55	19.40	19.48
10	1	49		19.59	19.35	19.46
10	25	0		19.86	19.69	19.70
10	25	12		19.87	19.70	19.70
10	25	25		19.92	19.68	19.72
10	50	0		19.87	19.65	19.67
5	1	0	QPSK	20.16	20.02	20.02
5	1	12		20.13	20.01	20.05
5	1	24		20.08	19.95	19.99
5	12	0		20.26	20.05	20.06
5	12	7		20.22	20.07	20.14
5	12	13		20.19	20.01	20.10
5	25	0		20.20	20.02	20.09
5	1	0	16-QAM	20.10	19.95	20.03
5	1	12		20.11	19.98	20.02
5	1	24		20.09	19.94	19.98
5	12	0		19.78	19.64	19.68
5	12	7		19.81	19.67	19.68
5	12	13		19.79	19.64	19.65
5	25	0		19.82	19.67	19.72
5	1	0	64-QAM	19.54	19.39	19.45
5	1	12		19.53	19.40	19.43
5	1	24		19.50	19.38	19.44
5	12	0		19.82	19.68	19.72
5	12	7		19.81	19.68	19.75
5	12	13		19.80	19.63	19.66
5	25	0		19.84	19.67	19.71

<Fully testing band>

LTE Band 4


Peak-to-Average Ratio

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.51	4.64	5.39	5.94	PASS
Middle CH	3.57	4.55	5.39	5.94	
Highest CH	3.57	4.58	4.87	5.91	
Mode	LTE Band 4 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	6.67	6.38	-	-	PASS
Middle CH	6.78	6.52	-	-	
Highest CH	5.45	6.46	-	-	




LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB

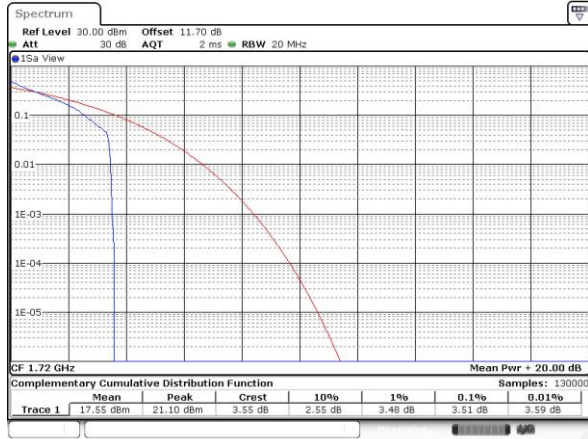

Lowest Channel / Full RB

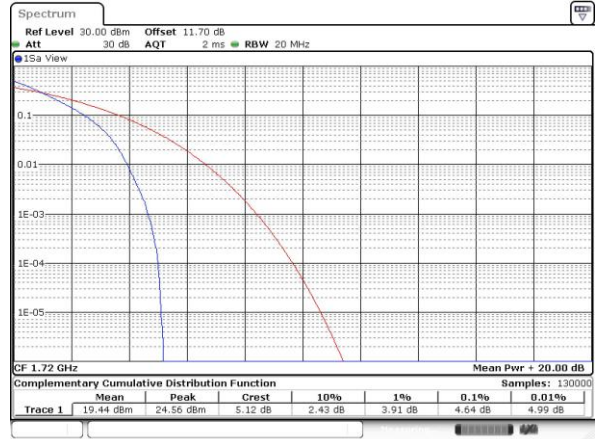

Middle Channel / 1RB




Middle Channel / Full RB



Highest Channel / 1RB




Highest Channel / Full RB

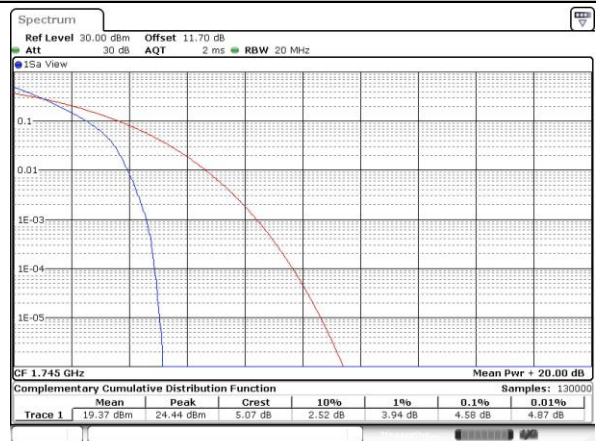




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

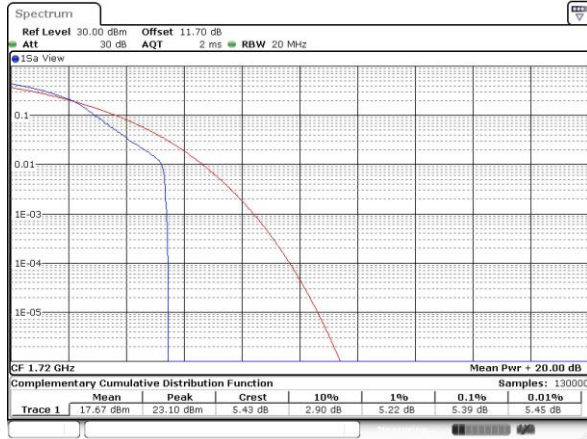

Lowest Channel / Full RB

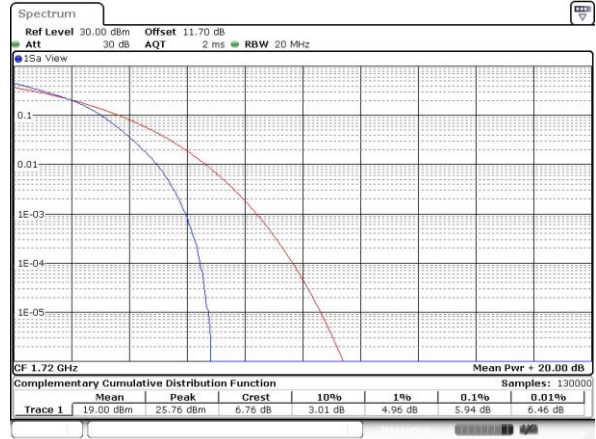

Middle Channel / 1RB




Middle Channel / Full RB



Highest Channel / 1RB




Highest Channel / Full RB

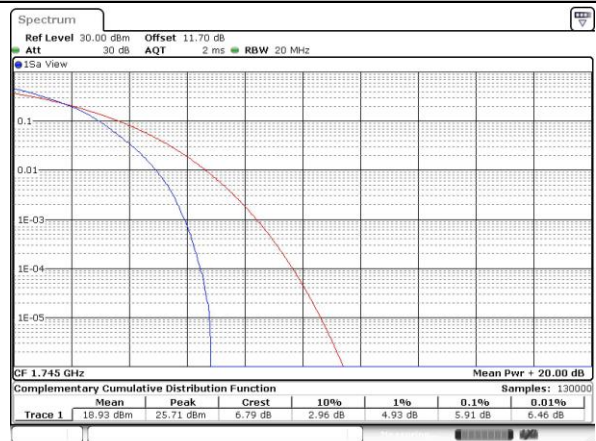




LTE Band 4 / 20MHz / 64QAM

Lowest Channel / 1RB

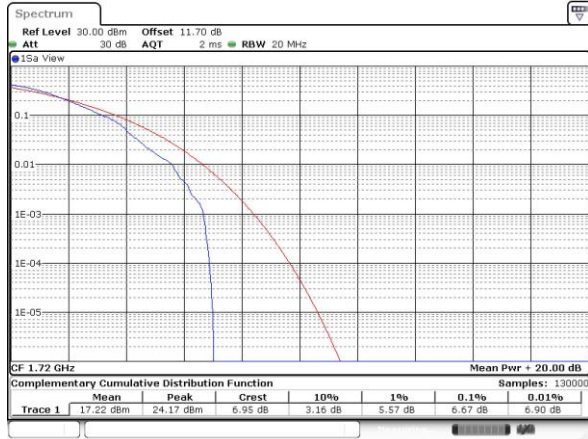


Lowest Channel / Full RB

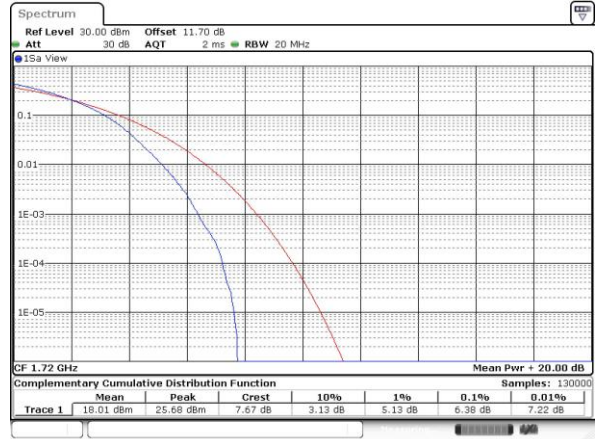


Middle Channel / 1RB



Middle Channel / Full RB

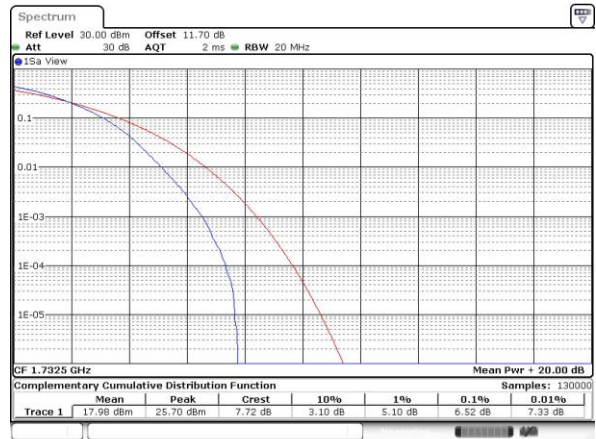

Highest Channel / 1RB

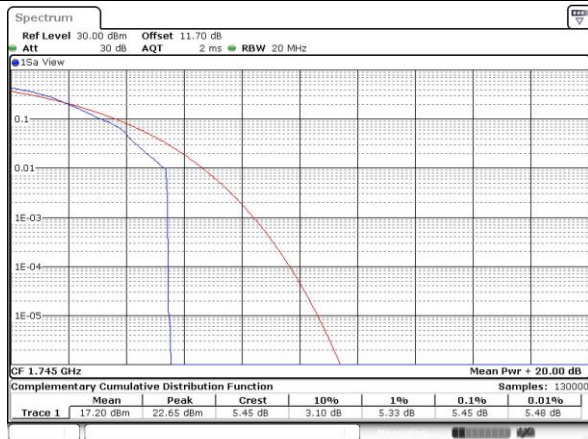

Highest Channel / Full RB




**26dB Bandwidth**

Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.21	3.06	2.99	4.92	4.97	9.97	9.89	14.42	14.30	19.26	18.94
Middle CH	1.23	1.24	3.02	2.99	4.97	4.86	9.85	9.85	14.33	14.57	19.18	18.78
Highest CH	1.24	1.24	3.02	3.05	4.94	4.92	9.81	9.73	14.24	14.66	19.02	18.74
Mode	LTE Band 4 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22	-	3.04	-	4.94	-	9.81	-	14.36	-	18.66	-
Middle CH	1.21	-	3.03	-	4.89	-	9.89	-	14.48	-	18.82	-
Highest CH	1.23	-	3.00	-	4.94	-	9.63	-	14.54	-	18.90	-




LTE Band 4

Lowest Channel / 1.4MHz / QPSK

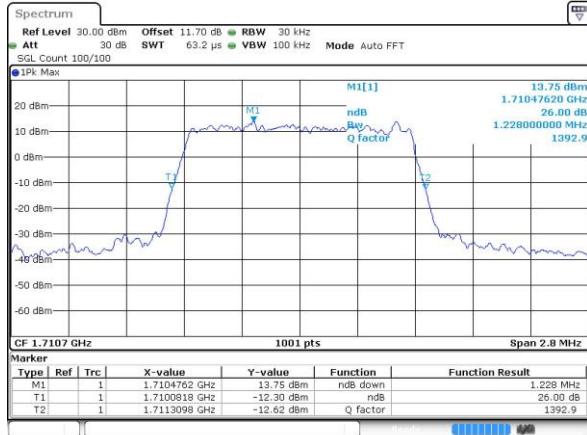


Date: 11 APR 2019 19:43:42

Lowest Channel / 1.4MHz / 16QAM

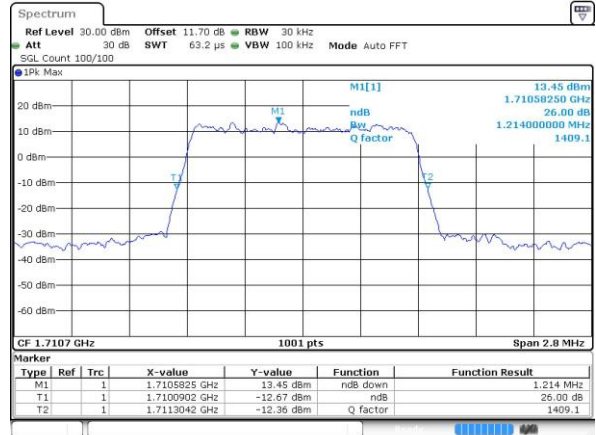


Date: 11 APR 2019 19:43:54

Middle Channel / 1.4MHz / QPSK

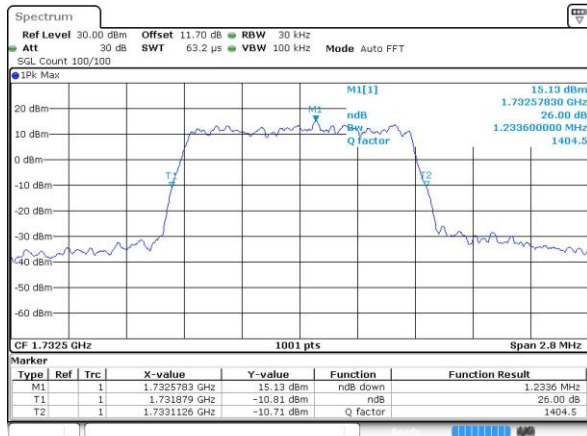


Date: 11 APR 2019 19:50:09

Middle Channel / 1.4MHz / 16QAM

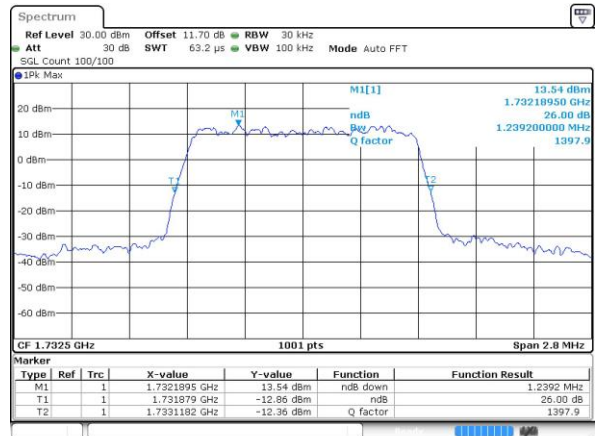


Date: 11 APR 2019 19:50:21

Highest Channel / 1.4MHz / QPSK

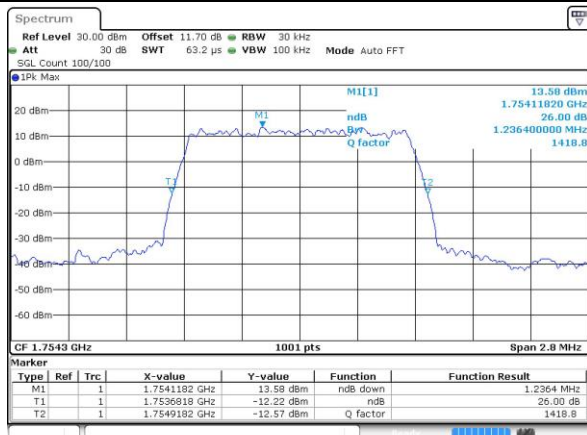

Date: 11 APR 2019 19:52:19

Highest Channel / 1.4MHz / 16QAM

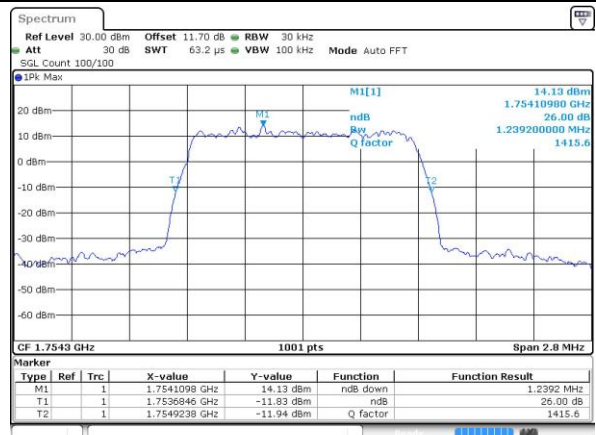


Date: 11 APR 2019 19:52:32




LTE Band 4

Lowest Channel / 3MHz / QPSK

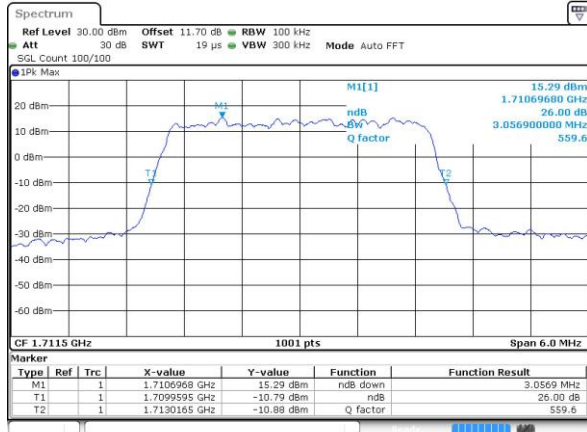


Date: 11 APR 2019 16:58:01

Lowest Channel / 3MHz / 16QAM

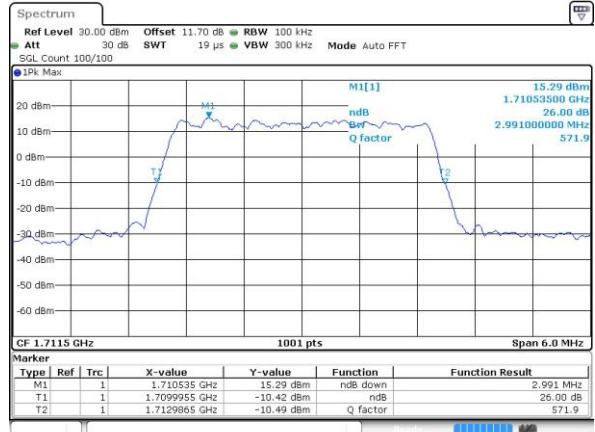


Date: 11 APR 2019 16:58:13

Middle Channel / 3MHz / QPSK

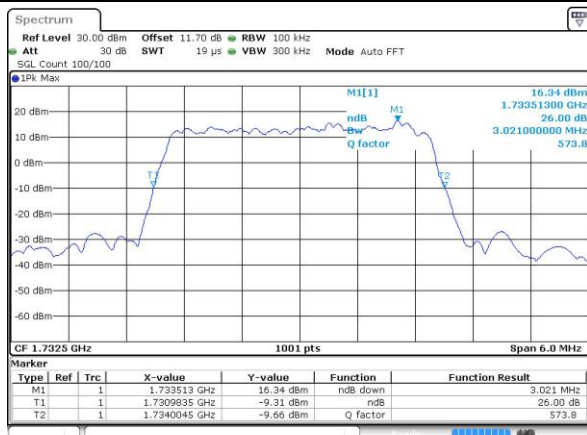


Date: 11 APR 2019 17:04:16

Middle Channel / 3MHz / 16QAM

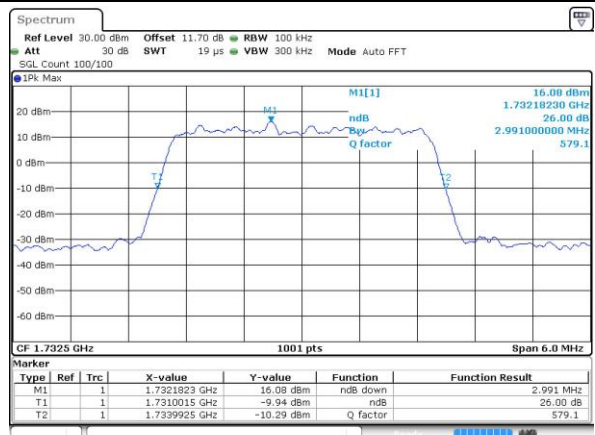


Date: 11 APR 2019 17:04:28

Highest Channel / 3MHz / QPSK

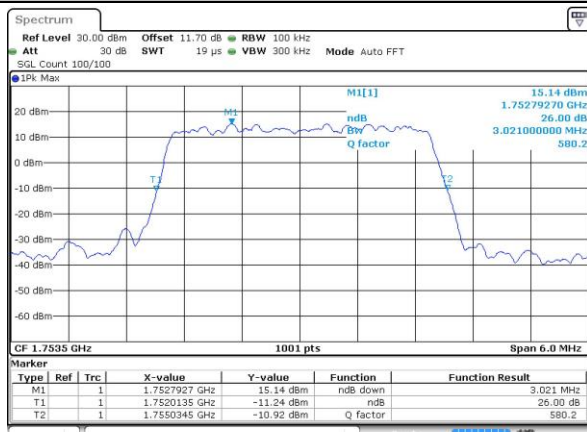

Date: 11 APR 2019 17:06:28

Highest Channel / 3MHz / 16QAM

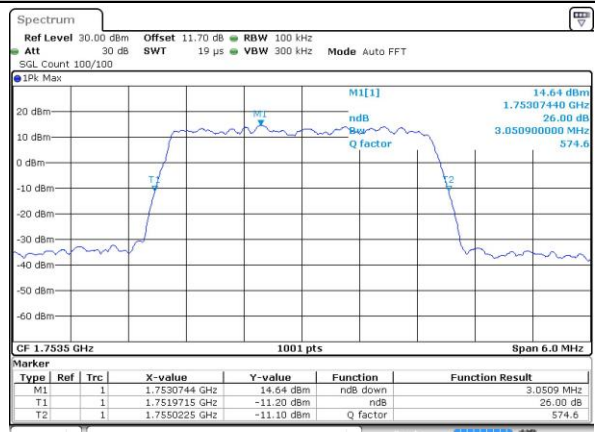


Date: 11 APR 2019 17:06:40




LTE Band 4


Lowest Channel / 5MHz / QPSK

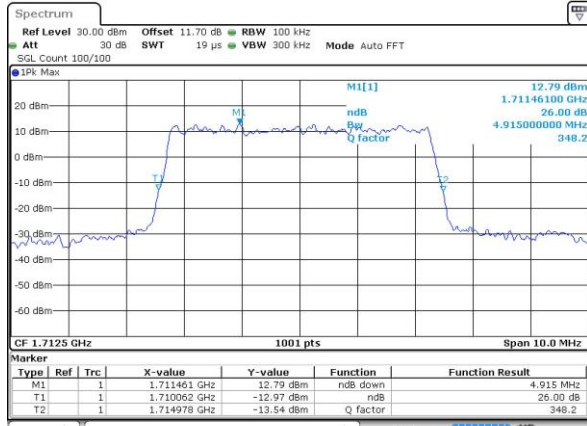


Lowest Channel / 5MHz / 16QAM

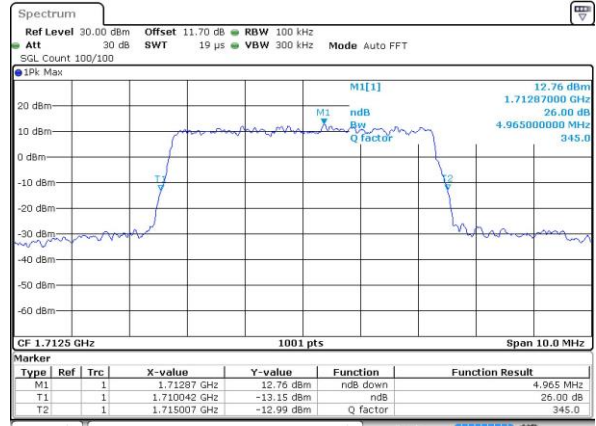


Middle Channel / 5MHz / QPSK

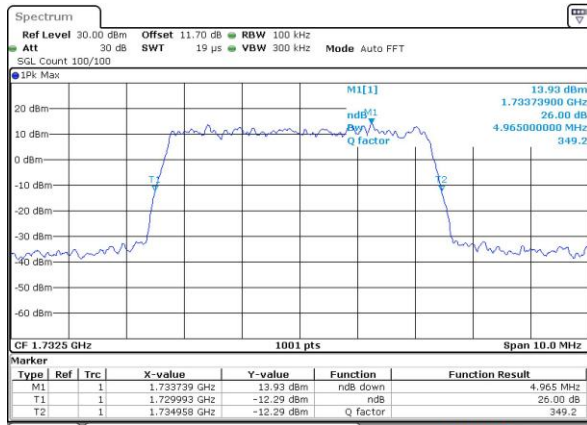


Middle Channel / 5MHz / 16QAM

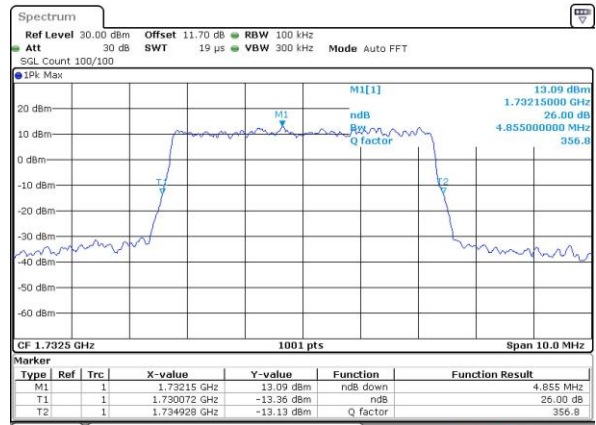

Highest Channel / 5MHz / QPSK

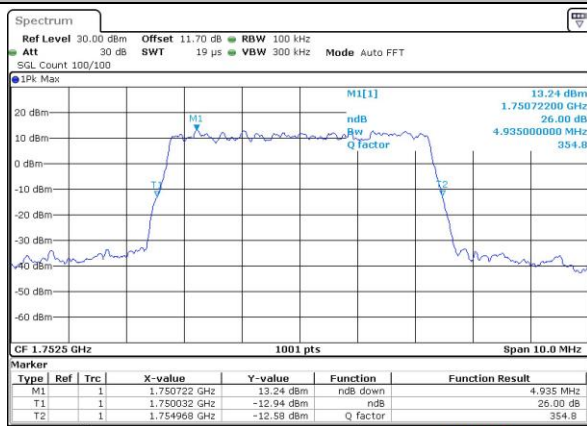


Highest Channel / 5MHz / 16QAM

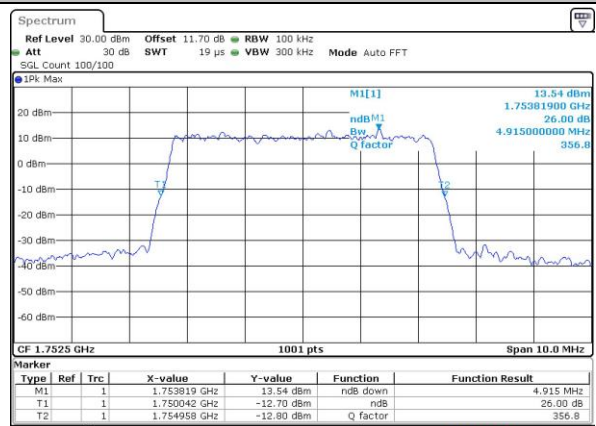




LTE Band 4

Lowest Channel / 10MHz / QPSK

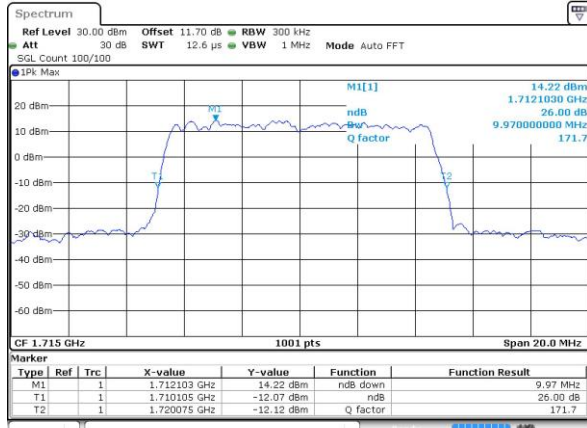


Date: 11 APR 2019 17:27:28

Lowest Channel / 10MHz / 16QAM

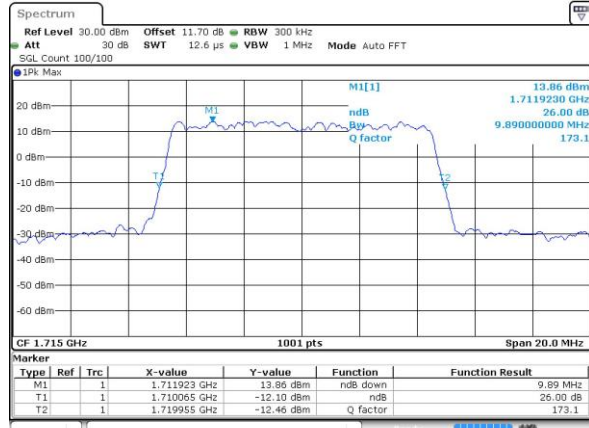


Date: 11 APR 2019 17:27:40

Middle Channel / 10MHz / QPSK

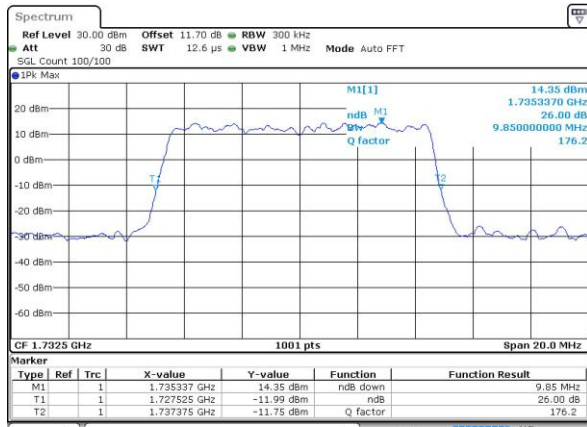


Date: 11 APR 2019 17:33:43

Middle Channel / 10MHz / 16QAM

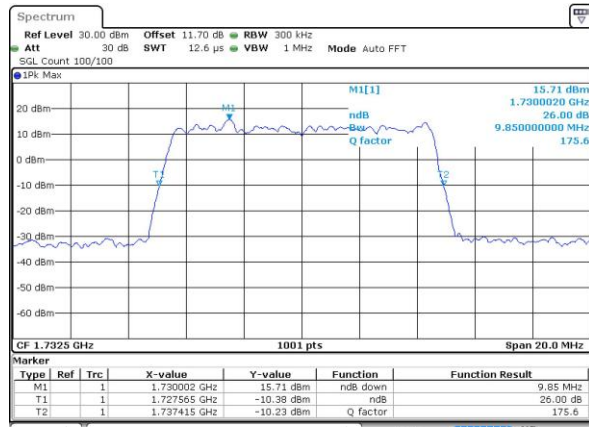


Date: 11 APR 2019 17:33:55

Highest Channel / 10MHz / QPSK

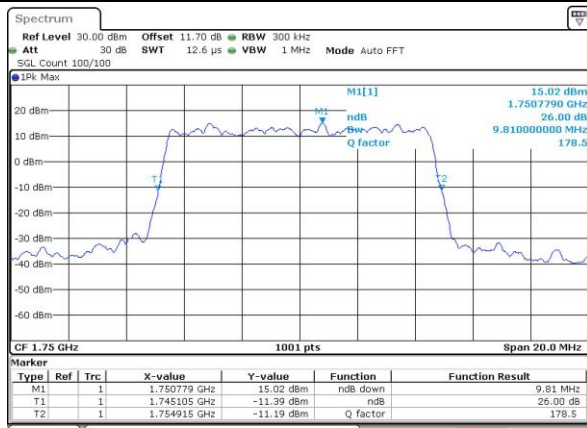

Date: 11 APR 2019 17:35:53

Highest Channel / 10MHz / 16QAM

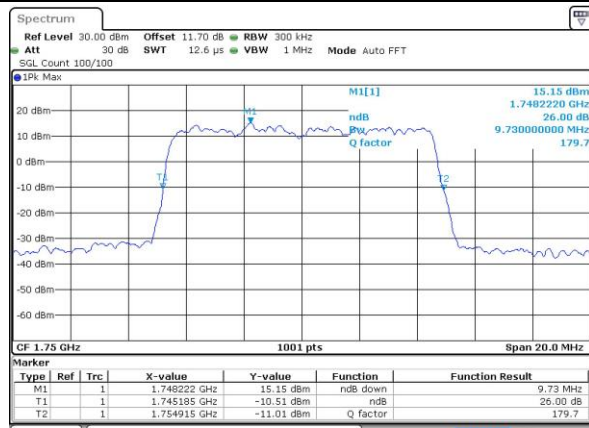


Date: 11 APR 2019 17:36:05




LTE Band 4

Lowest Channel / 15MHz / QPSK

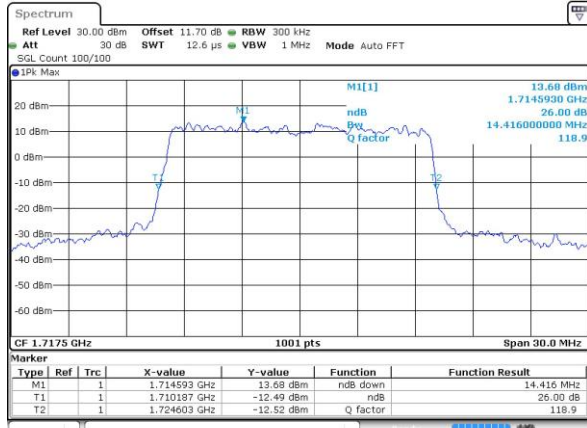


Date: 11 APR 2019 17:42:10

Lowest Channel / 15MHz / 16QAM

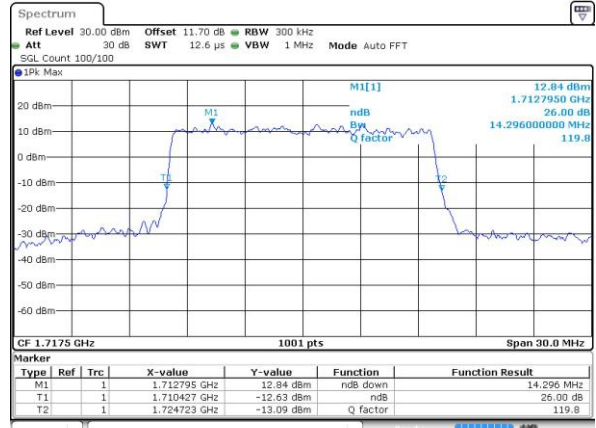


Date: 11 APR 2019 17:42:22

Middle Channel / 15MHz / QPSK

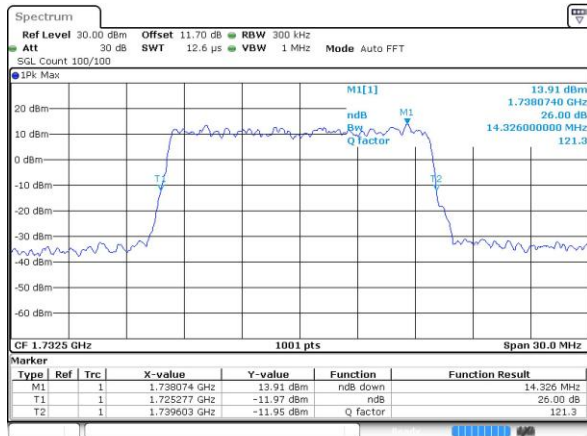


Date: 11 APR 2019 17:48:25

Middle Channel / 15MHz / 16QAM

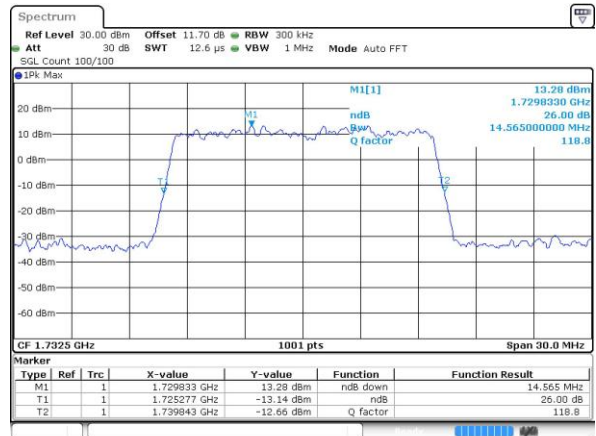


Date: 11 APR 2019 17:48:37

Highest Channel / 15MHz / QPSK

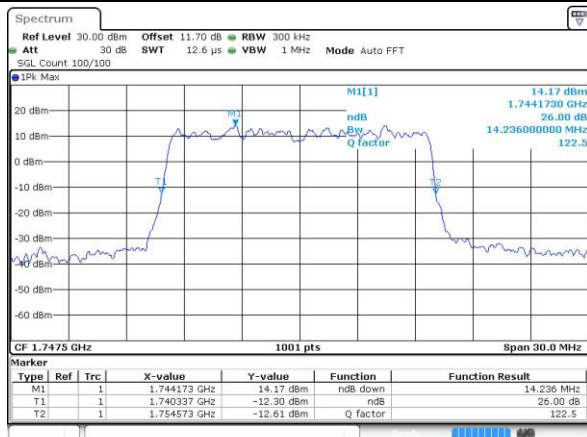

Date: 11 APR 2019 17:50:35

Highest Channel / 15MHz / 16QAM

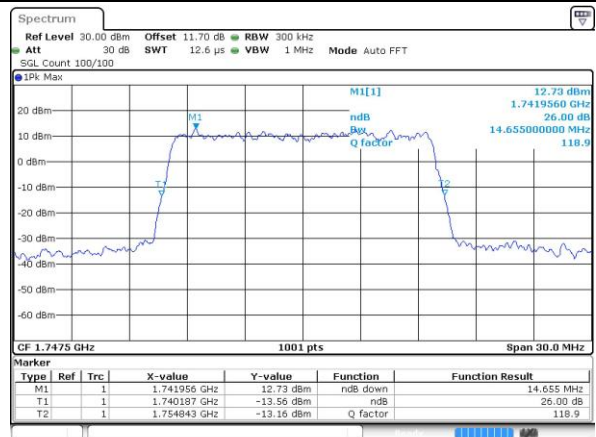


Date: 11 APR 2019 17:50:47




LTE Band 4

Lowest Channel / 20MHz / QPSK

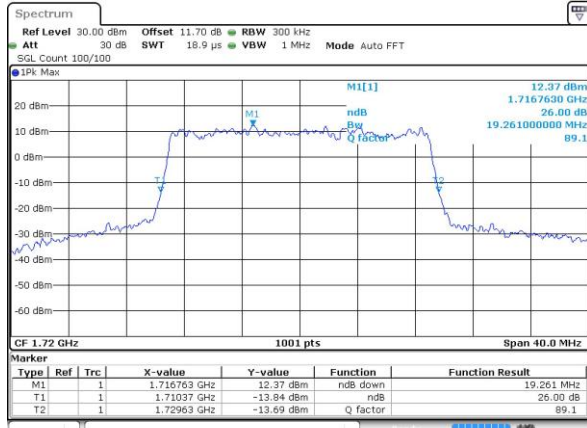


Date: 11 APR 2019 17:56:52

Lowest Channel / 20MHz / 16QAM

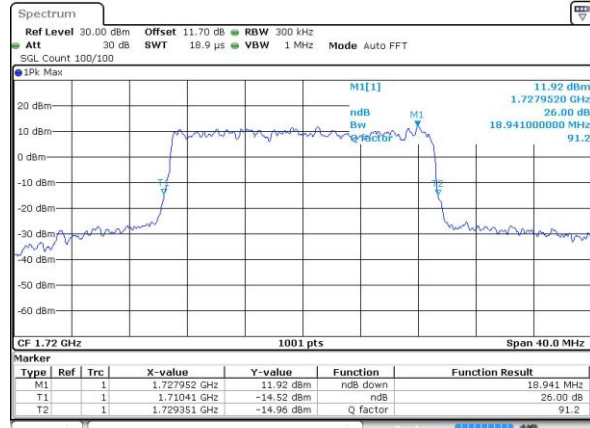


Date: 11 APR 2019 17:57:05

Middle Channel / 20MHz / QPSK

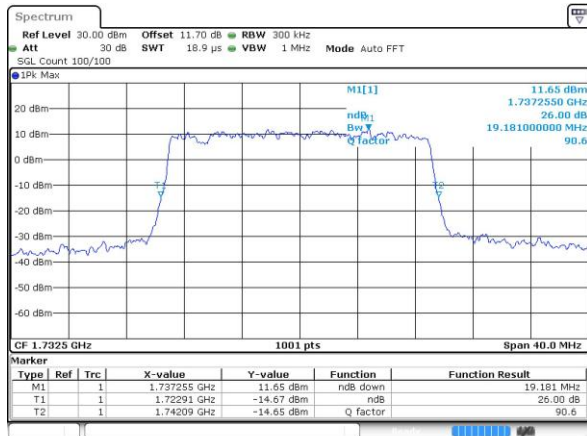


Date: 11 APR 2019 18:03:09

Middle Channel / 20MHz / 16QAM

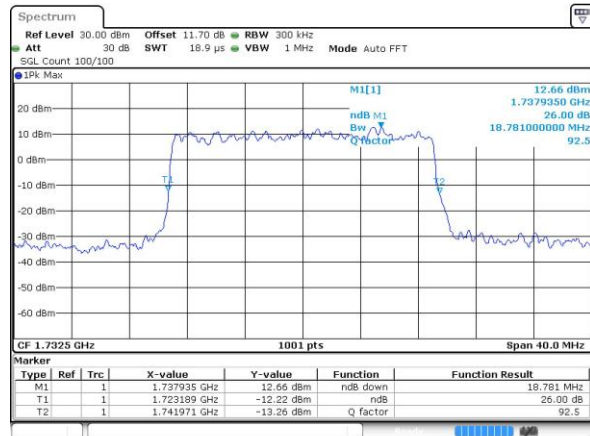


Date: 11 APR 2019 18:03:21

Highest Channel / 20MHz / QPSK

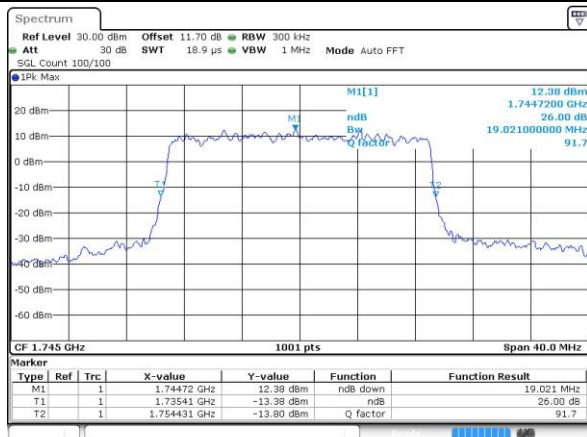

Date: 11 APR 2019 18:05:20

Highest Channel / 20MHz / 16QAM

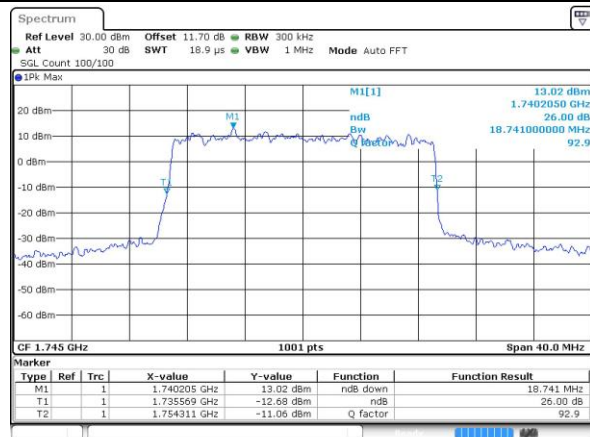


Date: 11 APR 2019 18:05:32




LTE Band 4

Lowest Channel / 1.4MHz / 64QAM

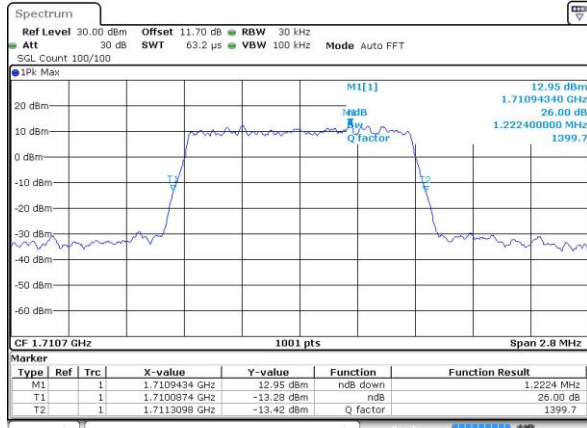


Date: 11 APR 2019 19:35:56

Lowest Channel / 3MHz / 64QAM

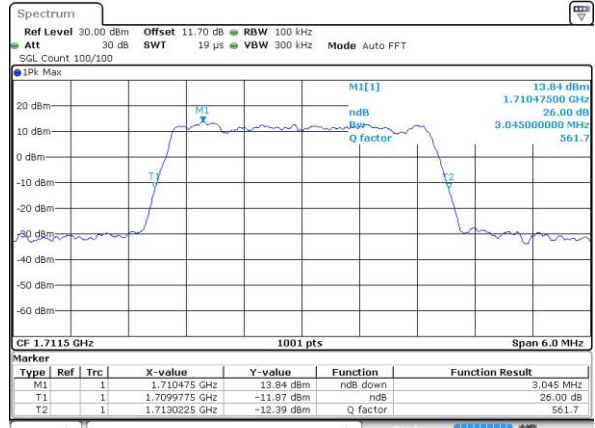


Date: 11 APR 2019 18:11:24

Middle Channel / 1.4MHz / 64QAM

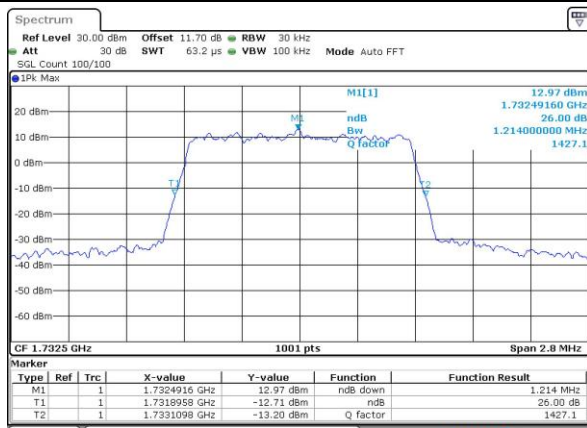


Date: 11 APR 2019 19:39:09

Middle Channel / 3MHz / 64QAM

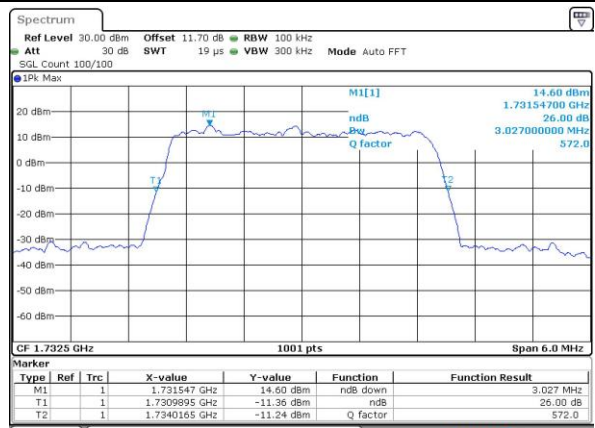


Date: 11 APR 2019 18:14:32

Highest Channel / 1.4MHz / 64QAM

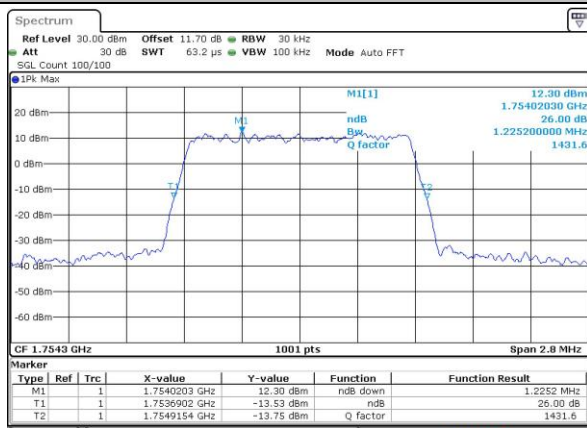

Date: 11 APR 2019 19:40:14

Highest Channel / 3MHz / 64QAM

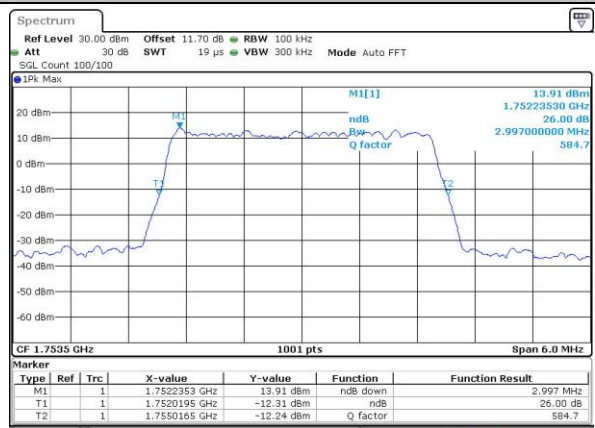


Date: 11 APR 2019 18:15:37




LTE Band 4

Lowest Channel / 5MHz / 64QAM

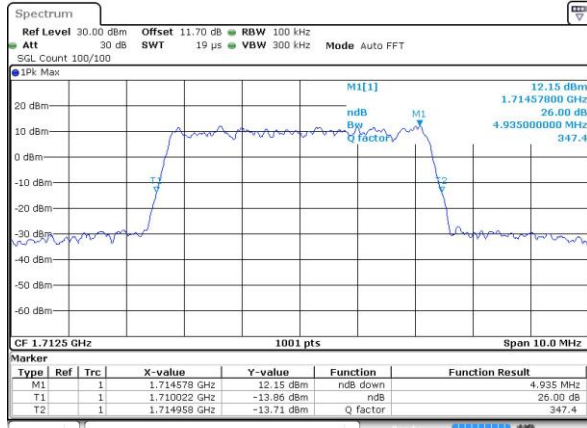


Date: 11 APR 2019 18:18:46

Lowest Channel / 10MHz / 64QAM

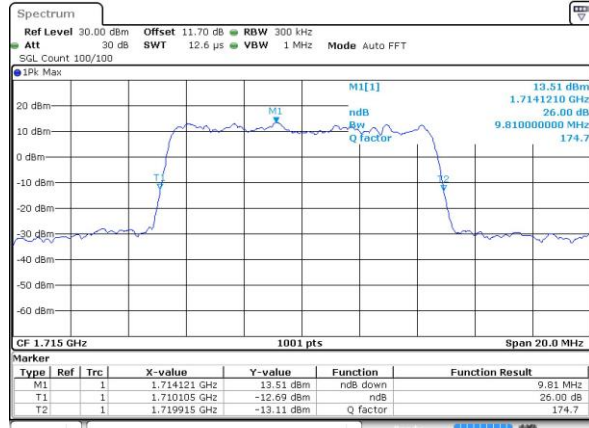


Date: 11 APR 2019 18:26:07

Middle Channel / 5MHz / 64QAM

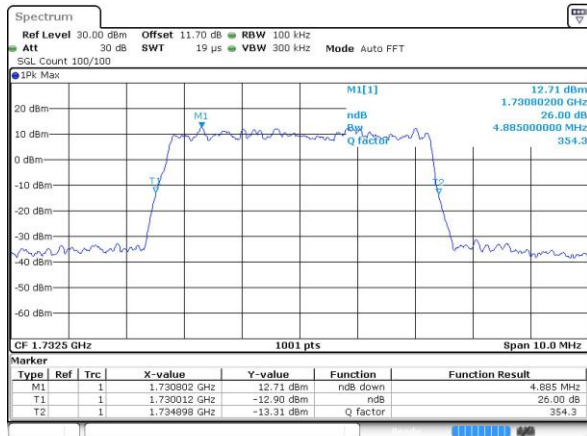


Date: 11 APR 2019 18:21:53

Middle Channel / 10MHz / 64QAM

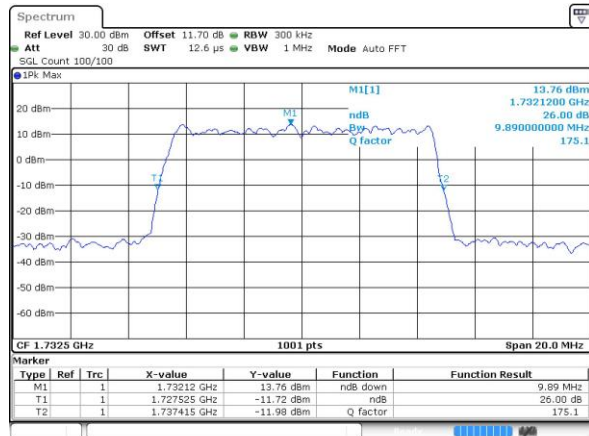


Date: 11 APR 2019 18:29:14

Highest Channel / 5MHz / 64QAM

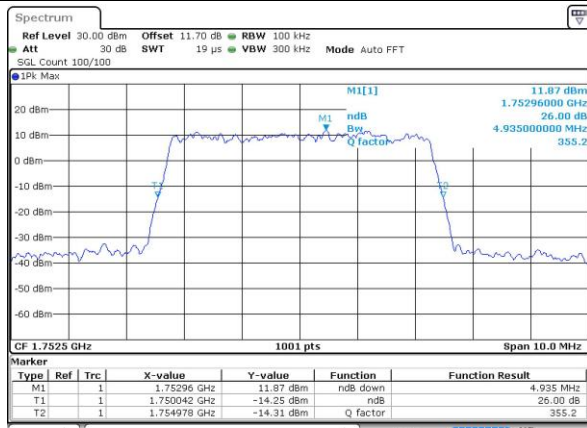

Date: 11 APR 2019 18:22:58

Highest Channel / 10MHz / 64QAM

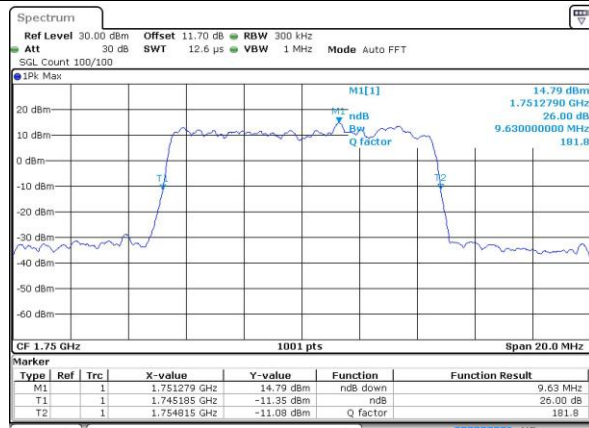


Date: 11 APR 2019 18:30:19




LTE Band 4

Lowest Channel / 15MHz / 64QAM

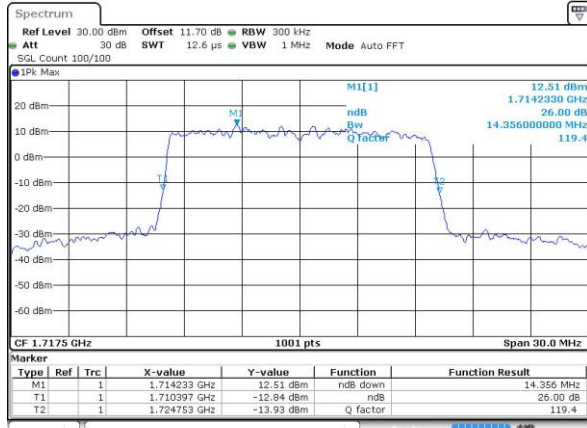


Date: 11 APR 2019 18:33:27

Lowest Channel / 20MHz / 64QAM

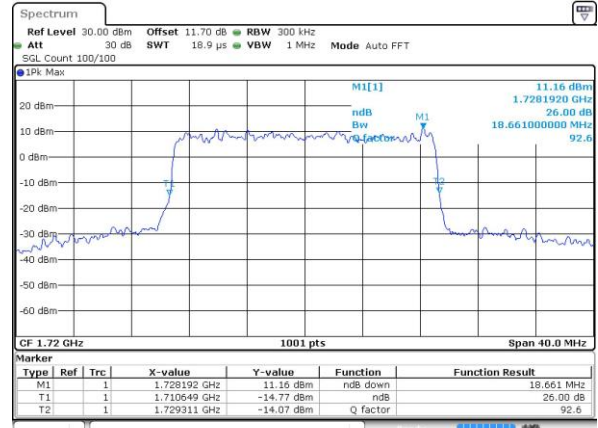


Date: 11 APR 2019 18:40:48

Middle Channel / 15MHz / 64QAM

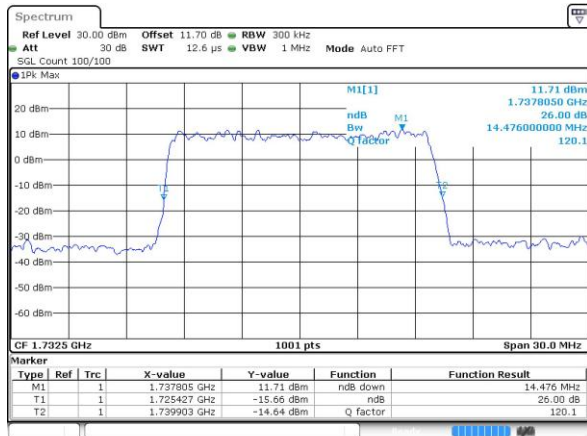


Date: 11 APR 2019 18:36:35

Middle Channel / 20MHz / 64QAM

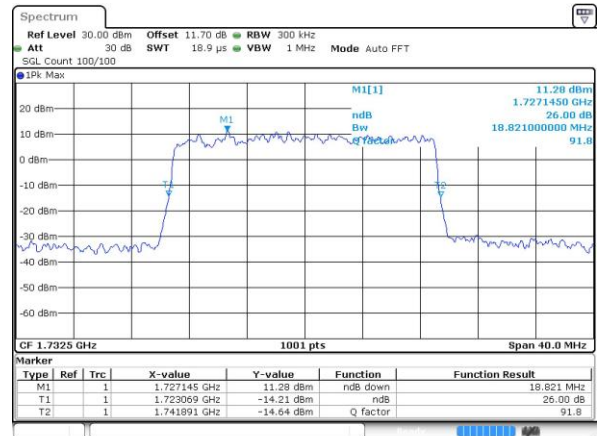


Date: 11 APR 2019 18:43:55

Highest Channel / 15MHz / 64QAM

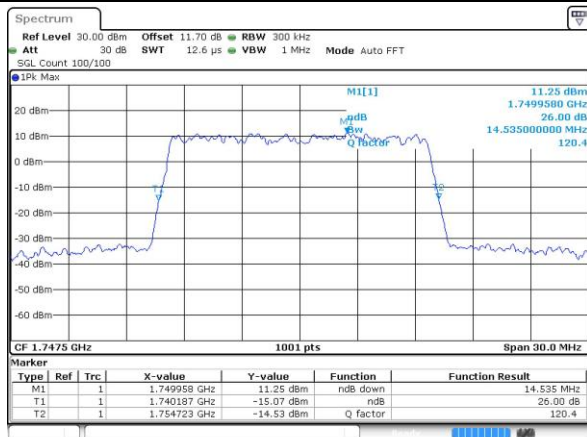

Date: 11 APR 2019 18:37:40

Highest Channel / 20MHz / 64QAM

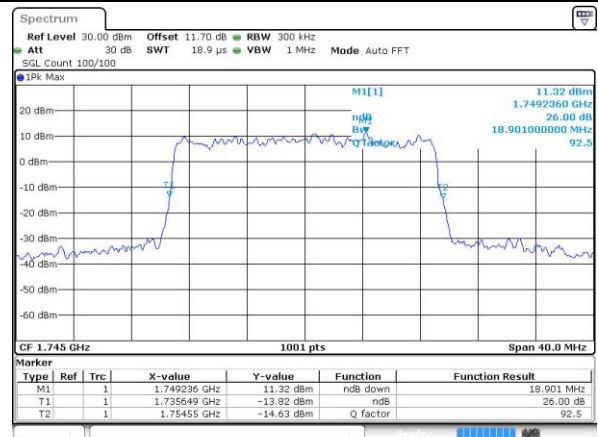

Date: 11 APR 2019 19:30:39


**Occupied Bandwidth**

Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.73	2.73	4.48	4.5	9.01	9.03	13.43	13.43	17.86	17.9
Middle CH	1.09	1.09	2.73	2.75	4.5	4.48	8.99	8.99	13.46	13.49	17.86	17.86
Highest CH	1.09	1.09	2.7	2.72	4.51	4.49	9.07	8.99	13.46	13.49	17.9	17.86
Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.70	-	4.50	-	8.99	-	13.43	-	17.94	-
Middle CH	1.09	-	2.73	-	4.49	-	9.05	-	13.43	-	17.86	-
Highest CH	1.09	-	2.73	-	4.50	-	9.01	-	13.40	-	17.98	-




LTE Band 4


Lowest Channel / 1.4MHz / QPSK

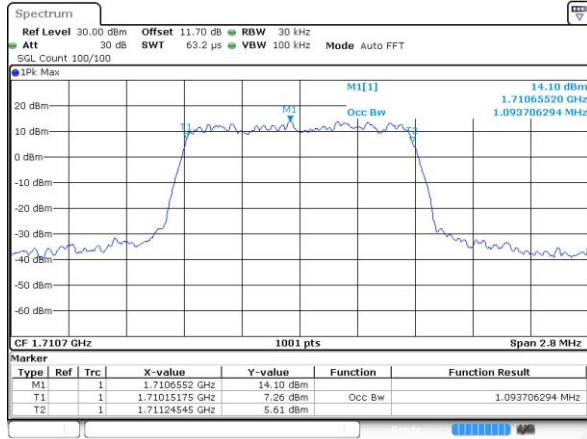


Lowest Channel / 1.4MHz / 16QAM

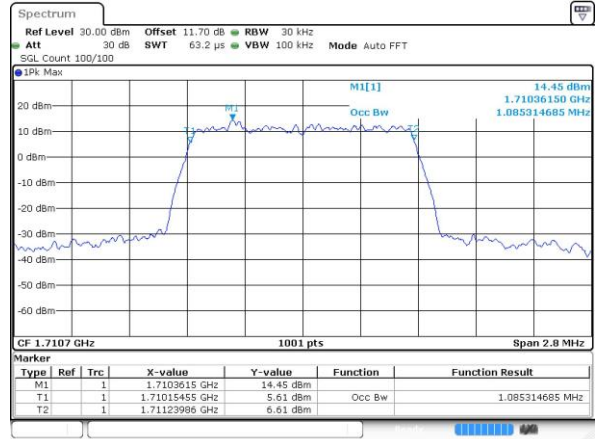


Middle Channel / 1.4MHz / QPSK

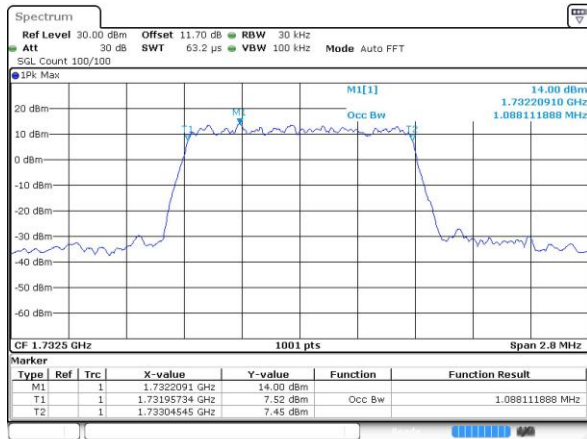

Middle Channel / 1.4MHz / 16QAM

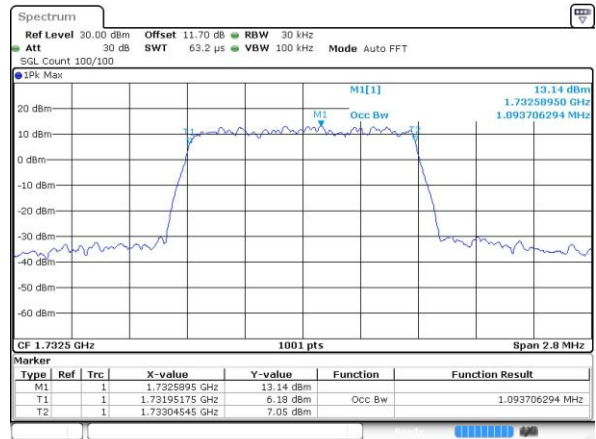

Highest Channel / 1.4MHz / QPSK

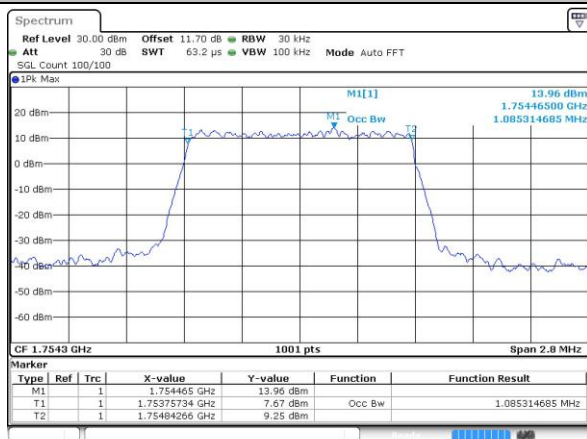

Highest Channel / 1.4MHz / 16QAM

