



Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

SecurityClass
REPORT

No.

GTX/FG 02:009

Date

020912

Rev

B

Reference

File

SAR Test Report: T600 (PY71130402)

Date of test: Juni 4 and 5, 2002

Laboratory: Electromagnetic Near Field and Radio Frequency Dosimetry Lab
Sonyericsson Mobile Communications AB
Nya Vatentorget
SE-221 82 LUND, Sweden

Test Responsible: Hamid Kami Shirazi
Development Engineer, Terminal Antennas
kami.shirazi@sonyericsson.com
+ 46 46 23 26 44

Statement of Compliance

Sonyericsson Mobile Communications AB declares under its sole responsibility that the product

Sonyericsson Type 1130402-BV/CN (T600); FCC ID: PY71130402

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

© Sonyericsson Mobile Communications AB, 2002

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sonyericsson encourages all feedback, both positive and negative, on this report.



SecurityClass
REPORT

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

1 Table of contents

2 INTRODUCTION 3

3 DEVICE UNDER TEST..... 3

3.1 ANTENNA DESCRIPTION 3

3.2 DEVICE DESCRIPTION 3

4 TEST EQUIPMENT..... 4

4.1 DOSIMETRIC SYSTEM..... 4

4.2 ADDITIONAL EQUIPMENT 4

5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID 4

6 SYSTEM ACCURACY VERIFICATION 5

7 SAR MEASUREMENT UNCERTAINTY 5

8 TEST RESULTS 6

9 REFERENCES..... 7

10 APPENDIX..... 8

10.1 SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION 8

10.2 SAR DISTRIBUTION PLOT 12

10.3 PHOTOGRAPHS OF THE DEVICE UNDER TEST..... 15

10.4 DEVICE POSITION ON SAM TWINS PHANTOM..... 17

10.5 PROBE CALIBRATION PARAMETERS..... 18

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

2 Introduction

In this test report, compliance of the Sonyericsson T600 portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device Under Test

3.1 Antenna Description

| | | |
|----------------------|-------------------------------------|------|
| Type | Internal antenna | |
| Location | Inside the back cover, near the top | |
| Dimensions | Max length | 38mm |
| | Max width | 17mm |
| Configuration | PIFA | |

3.2 Device description

| | |
|---|-----------------------------------|
| Device model | T600 |
| Serial number | KYR0338419 |
| Mode | GSM 1900 |
| Multiple Access Scheme | TDMA |
| Maximum Output Power Setting | 29.4dBm |
| Factory Tolerance in Power Setting | ± 0.5dB |
| Maximum Peak Output Power | 29.9dBm |
| Crest Factor | 8 |
| Transmitting Frequency Range | 1850.2 – 1909.8 MHz |
| Prototype or Production Unit | Preproduction |
| Device Category | Portable |
| RF exposure environment | General population / uncontrolled |

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

SecurityClass
REPORT

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

| <i>Description</i> | <i>Serial Number</i> | <i>Due Date</i> |
|---------------------------------|----------------------|-----------------|
| DASY3 DAE V1 | 433 | 4/2003 |
| E-field probe ETDV6 | 1596 | 4/2003 |
| Dipole Validation Kit, D1900 V2 | 5d002 | 2/2004 |

4.2 Additional equipment

| <i>Description</i> | <i>Inventory Number</i> | <i>Due Date</i> |
|-------------------------------|-------------------------|-----------------|
| Signal generator ESG-D4000A | INV 462934 | 9/2003 |
| Directional coupler HP778D | INV 39656 | 1/2003 |
| Power meter R&S NRVD | INV 483920 | 1/2004 |
| Power sensor R&S NRV-Z5 | INV 2333 | 1/2004 |
| Power sensor R&S NRV-Z5 | INV 2334 | 1/2004 |
| Termination 65N50-0-11 | INV 1625 | 1/2003 |
| Network analyzer HP8753C | INV421671 | 8/2002 |
| S-parameter test set HP85047A | INV 421670 | 8/2002 |
| Dielectric probe kit HP8507D | INV 20000053 | 2/2004 |
| Wavetek STABILOK 4031D | INV 421578 | 7/2002 |
| Fluke Thermometer 51 | INV 2071 | 3/2003 |

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 software is also given. Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

| f (MHz) | Tissue type | Limits / Measured | Dielectric Parameters | | |
|------------|----------------|--------------------|-----------------------|----------------|-----------------------------|
| | | | ϵ_r | σ (S/m) | ρ (g/cm ³) |
| 1900 | Head | Measured, 06/04/02 | 37.5 | 1.46 | 1.0 |
| | | Recommended | 40.0 | 1.4 | 1.0 |
| | Muscle | Measured, 06/05/02 | 49.2 | 1.57 | 1.0 |
| | | Recommended | 53.3 | 1.52 | 1.0 |

Prepared (also subject responsible if other)

No.

Hamid Kami Shirazi

GTX/FG 02:009

Approved

Checked

Date

Rev

Reference

Hamid Kami Shirazi

HKAM

020606

A

File

6 System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 23.4 °C and humidity 40.6%. Conducted power on dipole antenna was 100mW for our measurements and 250mW for reference measurements. The obtained results are displayed in the table below. RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.00 mW/g in 1g mass.

| f (MHz) | Tissue type | Measured / Reference | SAR (W/kg) 1g mass | Dielectric Parameters | | | t (°C) |
|---------|-------------|----------------------|--------------------|-----------------------|----------------|-----------------------------|--------|
| | | | | ϵ_r | σ (S/m) | ρ (g/cm ³) | |
| 1900 | Head | Measured, 06/04/02 | 44.2 | 37.5 | 1.46 | 1.0 | 23.4 |
| | | Reference | 45.2 | 39.1 | 1.47 | 1.0 | ?? |
| | Muscle | Measured, 06/04/02 | 45.5 | 49.2 | 1.57 | 1.0 | 22.9 |
| | | Reference | 44.0 | 51.9 | 1.58 | 1.0 | ?? |

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson T600 phone

| Uncertainty Component | Tol. (± %) | Prob. Dist. | Div. | Measurement on Head | Measurement on Body |
|---|------------|-------------|------------|---------------------|---------------------|
| Measurement System | | | | | |
| Probe Calibration | 2.6 | N | 1 | 2.6 | 2.6 |
| Axial Isotropy | 4.7 | R | $\sqrt{3}$ | 1.9 | 1.9 |
| Hemispherical Isotropy | 9.6 | R | $\sqrt{3}$ | 3.9 | 3.9 |
| Boundary Effect | 11.0 | R | $\sqrt{3}$ | 6.4 | 6.4 |
| Linearity | 4.7 | R | $\sqrt{3}$ | 2.7 | 2.7 |
| System Detection Limits | 1.0 | R | $\sqrt{3}$ | 0.6 | 0.6 |
| Readout Electronics | 1.0 | N | 1 | 1.0 | 1.0 |
| Response Time | 0.8 | R | $\sqrt{3}$ | 0.5 | 0.5 |
| Integration Time | 1.8 | R | $\sqrt{3}$ | 1.1 | 1.1 |
| RF Ambient Conditions | 3.0 | R | $\sqrt{3}$ | 1.7 | 1.7 |
| Probe Positioned Mechanical Tolerance | 0.4 | R | $\sqrt{3}$ | 0.2 | 0.2 |
| Probe Positioning respect to Phantom Shell | 2.9 | R | $\sqrt{3}$ | 1.7 | 1.7 |
| Extrapolation, interpolation and Integration Algorithm for Max. SAR | 3.9 | R | $\sqrt{3}$ | 2.3 | 2.3 |
| Measurement System Uncertainty | | | | 9.4 | 9.4 |
| Test Sample Related | | | | | |
| Test Sample Positioning | | R | $\sqrt{3}$ | 6.7 | 6.7 |
| Device Holder Uncertainty | | R | $\sqrt{3}$ | 5.9 | 5.9 |
| Output Power Variation - Drift | 8.9 | R | $\sqrt{3}$ | 5.1 | 5.1 |
| Test Sample Related Uncertainty | | | | 10.5 | 10.5 |
| Phantom and Tissue Parameters | | | | | |
| Phantom Uncertainty(shape and thickness tolerances) | 4.0 | R | $\sqrt{3}$ | 2.3 | 2.3 |
| Liquid Conductivity-deviation from target values) | 4.3/3.3 | R | $\sqrt{3}$ | 2.5 | 1.9 |
| Liquid Conductivity-measurement uncertainty | 5 | R | $\sqrt{3}$ | 2.9 | 2.9 |
| Liquid Permittivity-deviation from target values | 6.2/7.7 | R | $\sqrt{3}$ | 3.6 | 4.5 |
| Liquid Permittivity-measurement uncertainty | 5 | R | $\sqrt{3}$ | 2.9 | 2.9 |
| Phantom and Tissue Parameters Uncertainty | | | | 6.4 | 6.8 |
| Combined Standard Uncertainty | | RSS | | 15.5 | 15.6 |
| Expanded Uncertainty (95% CONFIDENCE LEVEL) | | | | 31.0 | 31.2 |

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

8 Test results

The measured 1-gram averaged SAR values of the device against the head and the body are provided in Tables 1 and 2 respectively. The humidity and ambient temperature of test facility were 33.5% - 37.5% and 22.7 °C – 24.1 °C respectively. The depth of the head tissue simulating liquid was 15.1cm and of the muscle tissue simulating liquid was 15.5cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg). For GSM 1900 modes, the device was tested at the lowest, middle and highest frequencies in the transmit band.

| Mode | Channel | Peak Output Power(dBm) | Phone Position | Liquid temp(°C) | SAR (W/kg) in 1g mass | |
|----------|---------|------------------------|----------------|-----------------|-----------------------|-----------|
| | | | | | Right-hand | Left-hand |
| 1900 GSM | 512 | 29.9 | Cheek | 22.7/22.9 | 0,74 | 0,72 |
| | | | Tilt | 22.9/23.1 | 0,67 | 0,66 |
| | 661 | 29.9 | Cheek | 22.7/22.9 | 0,58 | 0,67 |
| | | | Tilt | 23.1./23.3 | 0,57 | 0,64 |
| | 810 | 29.9 | Cheek | 23.3/23.5 | 0,34 | 0,38 |
| | | | Tilt | 23.7/23.8 | 0,34 | 0,34 |

Table1: SAR measurement result for Sonyericsson T600 telephone at highest possible output power. Measured against the head.

For body-warm measurements, the device was tested against flat phantom representing the user body. Under measurement the phone was hold Under the Flat position Phantom and with 15mm distance and measurement provides for both front and back part the phone.

| Mode | Channel | Peak Output Power (dBm) | Phone Position | Liquid temp (°C) | SAR(W/kg) in 1g mass |
|----------|---------|-------------------------|------------------------|------------------|----------------------|
| 1900 GSM | 1850 | 29.9 | Back + (15mm-distance) | 22.8 | 0.75 |
| | | | Front+ (15mm-distance) | 22.5 | 0.25 |
| | 1880 | 29.9 | Back + (15mm-distance) | 22.8 | 0.83 |
| | | | Front+ (15mm-distance) | 22.5 | 0.19 |
| | 1910 | 29.9 | Back + (15mm-distance) | 22.8 | 0.50 |
| | | | Front+ (15mm-distance) | 22.5 | 0.11 |

Table 2: SAR measurement result for Sonyericsson T600 telephone at highest possible output power. Measured against the body.



SecurityClass REPORT

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

9 References

[1] M. Douglas, "SAR Measurement Specification of Wireless Handsets" Sonyericsson internal document EUS/CV/R-01:1061/REP

[2] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97- 01).

[3] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-200x, Draft 6.5 – August 20, 2001.

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

10 Appendix

10.1 SAR distribution comparison for system accuracy verification

Sony Ericsson Mobile Communications

Dipole 1900 MHz
 SAM 1800 and 1900 Phantom; Flat Section; Position: (90° 90°); Frequency: 1900 MHz
 Probe: ET3DV6 - SNI569; ConvF5 40.5 40.5 40; Crest factor: 1.0; Head 1900MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 37.5$; $\rho = 1.00$ g/cm³
 Cube: 3x3x7; SAR (1g): 4.42 mW/g; SAR (10g): 2.26 mW/g (Worst-case extrapolation)
 Course: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Powerdft: -40.02 dB



Validation Dipole measured with head simulating tissue



SecurityClass REPORT

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606



Rev

A

Reference

File

Validation Dipole D1900V2 SN:5d002, d = 10 mm
 Frequency: 1900 MHz; Antenna Input Power: 250 [mW]
 SAM Phantom: Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Probe: ET13DV6 - SN:1507; ConvF(5,30,5,30,5,30) at 1800 MHz; IEEE1528 1900 MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.1$ $\rho = 1.00$ g/cm³
 Cubes (2): Peak: 21.7 mW/g \pm 0.02 dB, SAR (1g): 11.3 mW/g \pm 0.01 dB, SAR (10g): 5.76 mW/g \pm 0.03 dB, (Worst-case extrapolation)
 Penetration depth: 7.9 (7.5, 8.8) [mm]
 Powerdrift: -0.07 dB

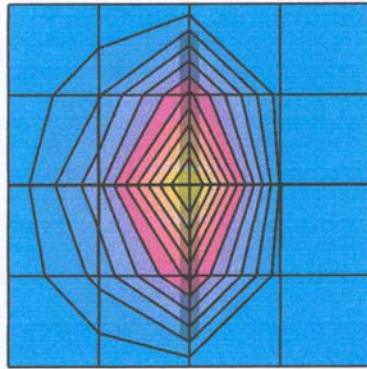

1900MHz SAR distribution of validation dipole from reference measurement in head simulating tissue

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606

Rev


A

Reference

File

Dipole 1900 MHz

SAM 1800 and 1900 Phantom; Flat Section; Position: (90° 90°); Frequency: 1900 MHz
 Probe: ET3DV6 - SNI569; ConvF(5,00,5,00,5,00); Crest factor: 1.0; Muscle 1900: $\sigma = 1.57$ mho/m $\epsilon_r = 49.2$ $\rho = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 4.55 mW/g; SAR (10g): 2.33 mW/g (Worst-case extrapolation)
 Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Powerdir: -0.02 dB
 P=100mW, d=10mm
 Calibrated values: 1g mass 44.0 mW/g, 10g mass 22.4mW/g
 Measured values: 1g mass 45.5 mW/g(+3.4%), 10g mass 23.3 mW/g(+4.0%)

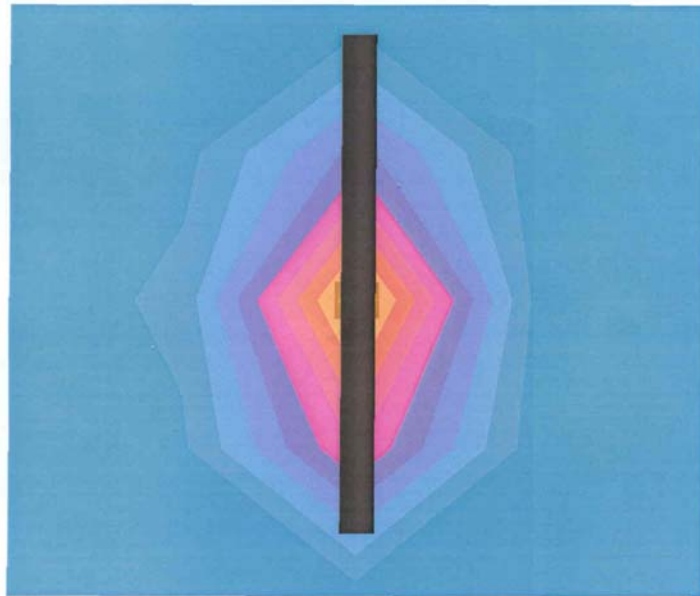

Validation Dipole, measured with muscle simulating tissue

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009


Date

020606

Rev

A

Reference

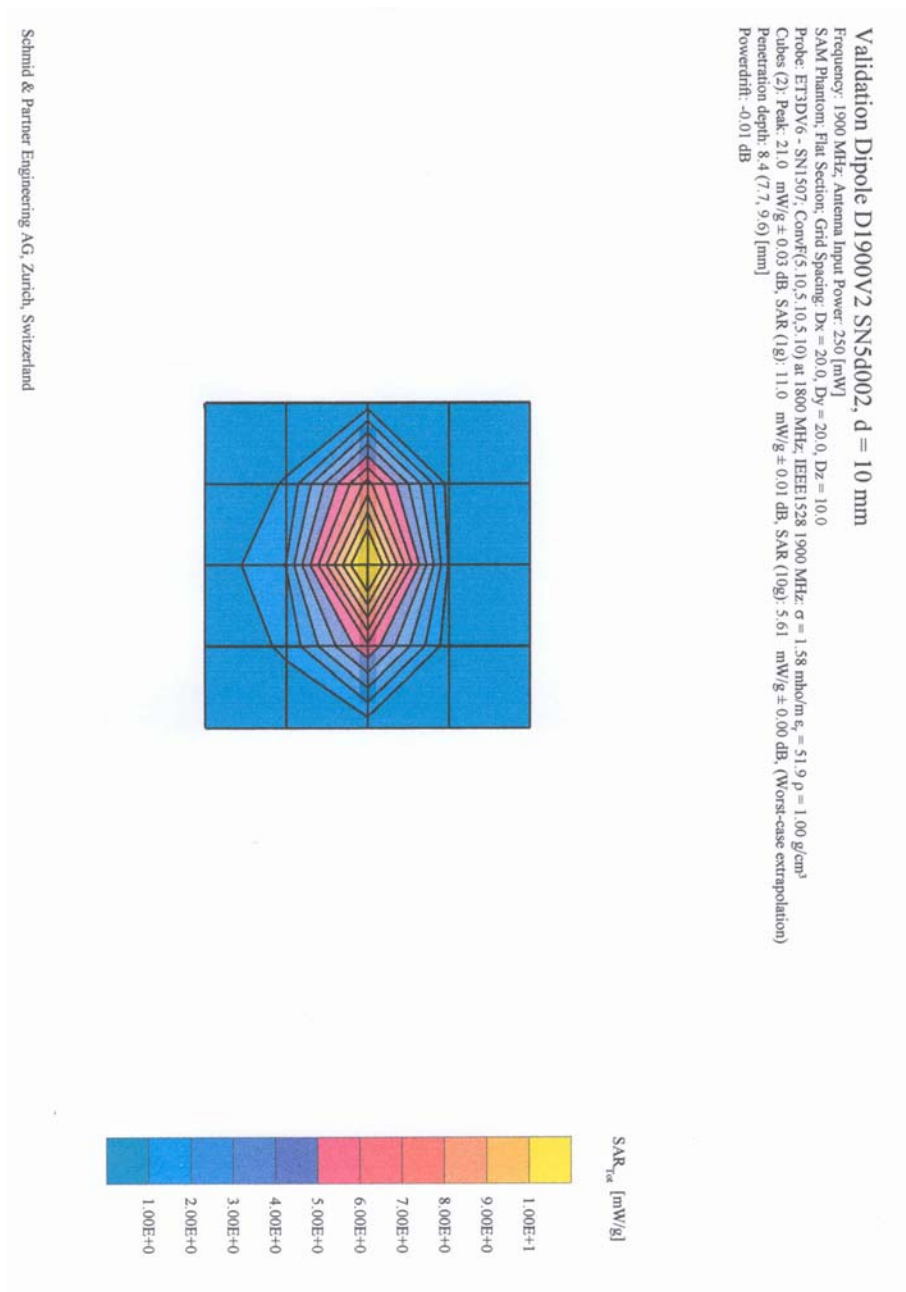File


1900MHz SAR distribution of validation dipole from reference measurement in muscle simulating tissue

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM
**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606


Rev

A

Reference

File

10.2 SAR distribution plot

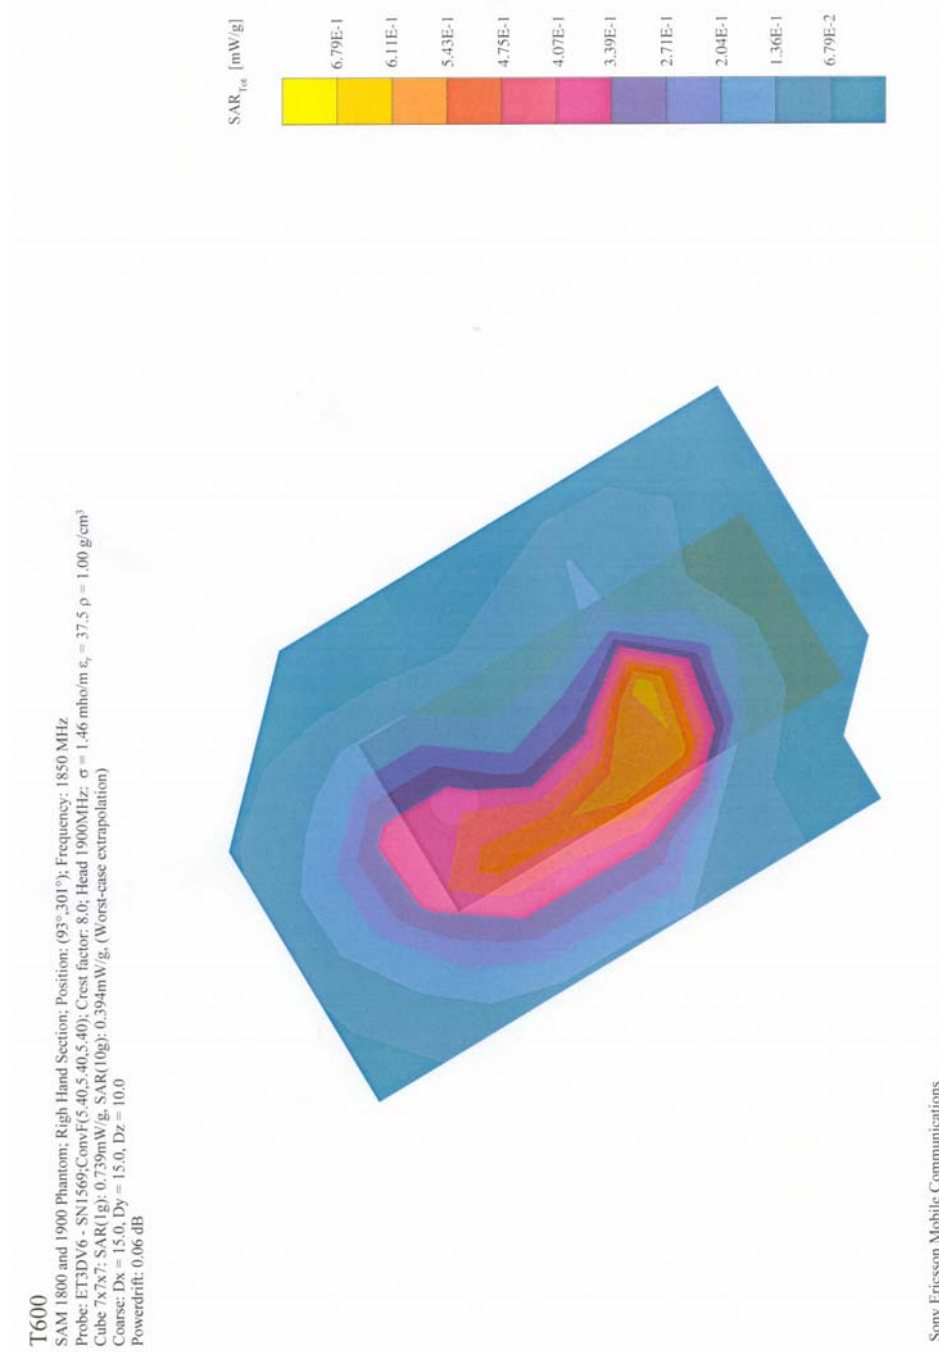

Distribution of max SAR in GSM1900 mode at 1850.2MHz. Measured against the head for cheek phone position

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi
**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference


File

Checked

HKAM

T600

SAM 1800 and 1900 Phantom; Right Hand Section; Position: (93°, 301°); Frequency: 1850 MHz
 Probe: ET3DV6 - SN1569; ConvF(5.40, 5.40); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 37.5$ $\rho = 1.00$ g/cm³
 Cube 7x7x7; SAR(1g): 0.672mW/g; SAR(10g): 0.389mW/g; (Worst-case extrapolation)
 Course: Dx = 15.0, Dy = 15.0, Dz = 10.0
 Powerdrift: -0.37 dB

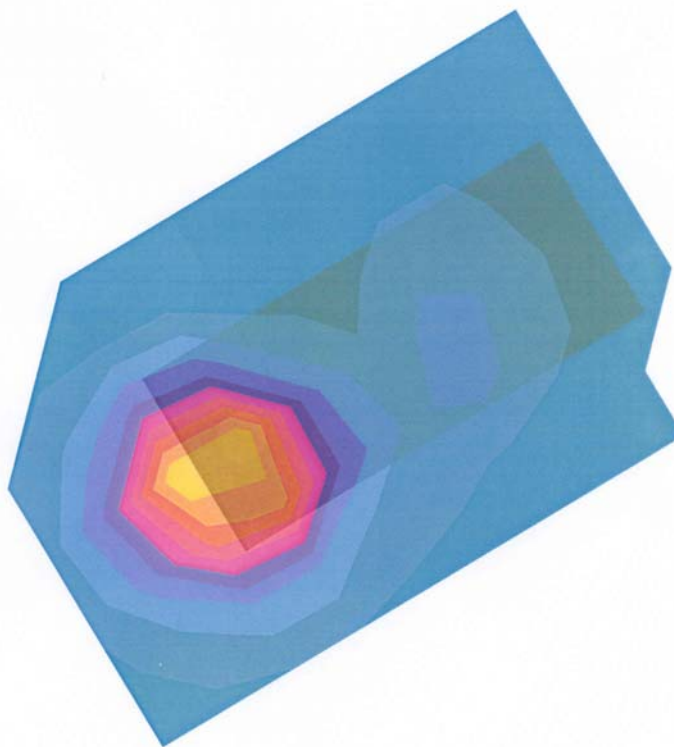

Sony Ericsson Mobile Communications

Distribution of max SAR in GSM1900 mode at 1850.2MHz. Measured against the head for tilt phone position

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date


020606

Rev

A

Reference

File

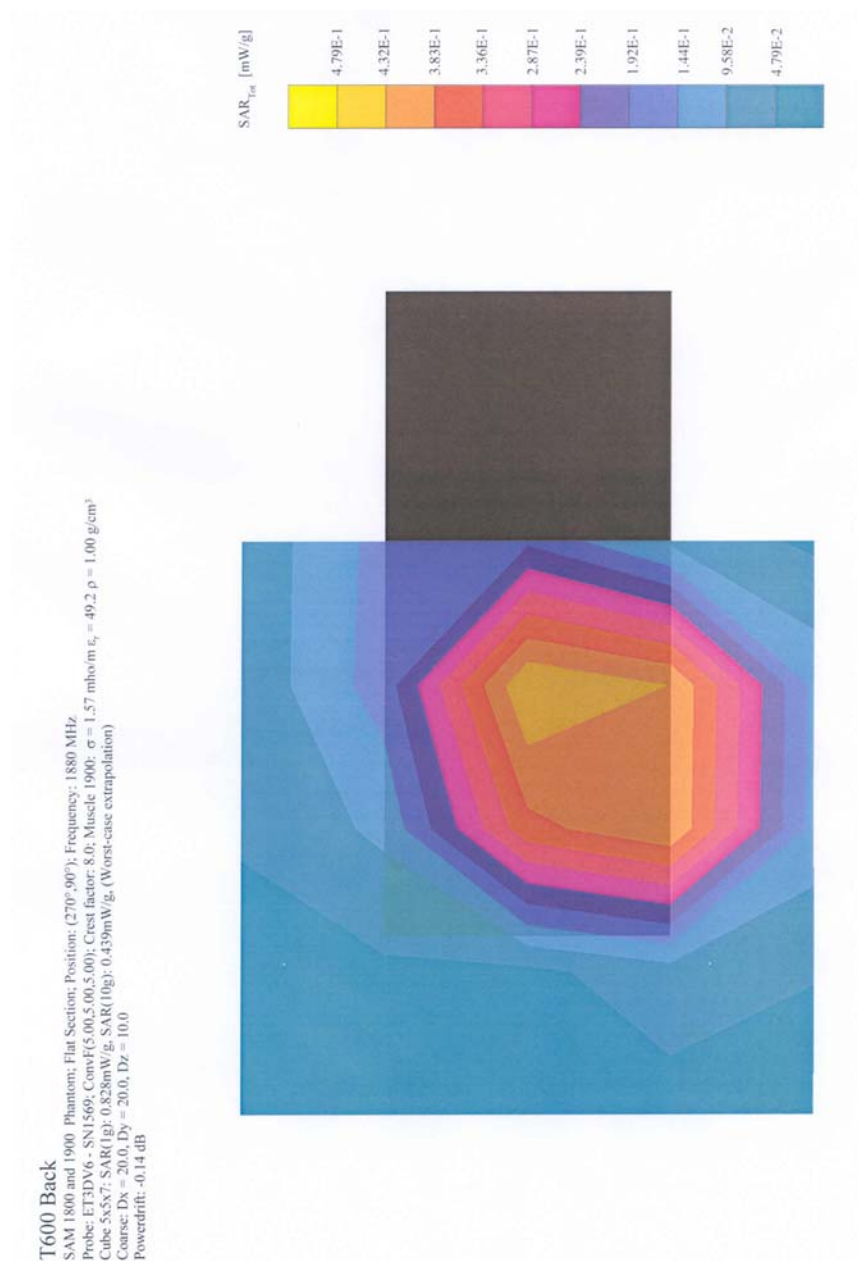

Distribution of max SAR in GSM1900 mode at 1880MHz. Measured against the body for back phone position to the phantom

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File


10.3 Photographs of the device under test



Front Side



Backside with battery

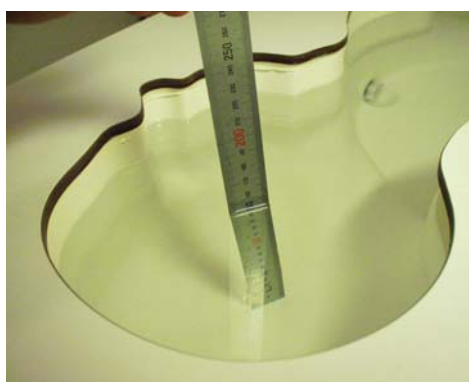

Liquid level

SecurityClass
REPORT

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date

020606

Rev

A

Reference

File

10.4 Device position on SAM Twins Phantom



Device position against the head: Cheek (touch) phone position



Device position against the head: Tilt (cheek+15deg) phone position

SecurityClass
REPORT

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM

No.

GTX/FG 02:009

Date


020606

Rev

A

Reference

File

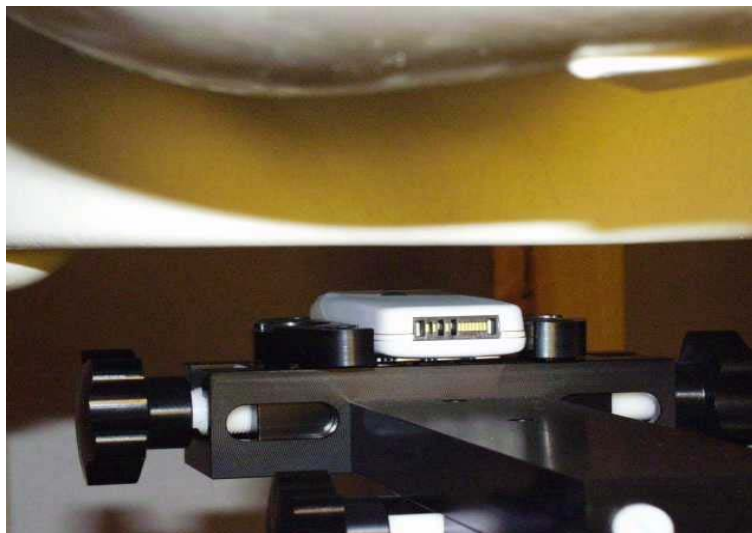

Device position against the body: 15 mm gap between Phone and phantom

Prepared (also subject responsible if other)

Hamid Kami Shirazi

Approved

Hamid Kami Shirazi

Checked

HKAM
**SecurityClass
REPORT**

No.

GTX/FG 02:009

Date

020606

Rev


A

Reference

File
10.5 Probe calibration parameters

ET3DV6 SN:1569

April 25, 2002

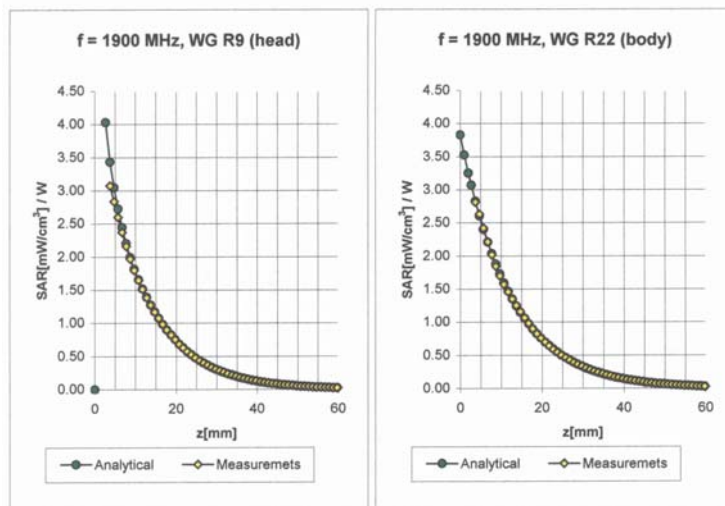Conversion Factor Assessment


| | | | |
|-------------|-----------------|-----------------------------|---------------------------------------|
| Head | 1900 MHz | $\epsilon_r = 40.0 \pm 5\%$ | $\sigma = 1.40 \pm 5\% \text{ mho/m}$ |
| ConvF X | 5.4 | $\pm 8.9\% (k=2)$ | Boundary effect: |
| ConvF Y | 5.4 | $\pm 8.9\% (k=2)$ | Alpha 0.47 |
| ConvF Z | 5.4 | $\pm 8.9\% (k=2)$ | Depth 2.44 |
| Body | 1900 MHz | $\epsilon_r = 53.3 \pm 5\%$ | $\sigma = 1.52 \pm 5\% \text{ mho/m}$ |
| ConvF X | 5.0 | $\pm 8.9\% (k=2)$ | Boundary effect: |
| ConvF Y | 5.0 | $\pm 8.9\% (k=2)$ | Alpha 0.65 |
| ConvF Z | 5.0 | $\pm 8.9\% (k=2)$ | Depth 2.16 |