

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B
		File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc	

EN

SAR Body Worm Test Report: T200 (PY71130501)

Date of test: August 09, 2002

Laboratory: Electromagnetic Near Field and Radio Frequency Dosimetry Laboratory
Sony Ericsson Mobile Communications AB
Nya Vattentornet,
SE-221 83 LUND, Sweden

Test Responsible: Ramadan Plicanic
R & D Engineer, Terminal Antennas
Ramadan.Plicanic@SonyEricsson.com
+ 46 46 19 38 62

Statement of Compliance

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the that the product

Ericsson Type 1130501 (T200); FCC ID: PY 71130501

to which this declaration relates, is in conformity with the appropriate RF exposure standards, recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

© Sony Ericsson Mobile Communications AB, 2002

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this test report.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Table of Contents

1. Introduction	3
2. Device Under Test	3
2.1 Antenna description	3
2.2 Device description	3
3. Test equipment	3
3.1 Dosimetric system	3
3.2 Additional equipment	4
4. Electrical parameters of the tissue simulating liquid	4
5. System accuracy verification	4
6. Test results	5
References	6
Appendix 1: SAR distribution comparison for system accuracy verification	7
Appendix 2: SAR distribution plots	9
Appendix 3: Photographs of the device under test	11
Appendix 4: Position of device on Generic Twin Phantom	13
Appendix 5: Probe calibration parameters for ET3DV6 SN:1569	14

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

1. Introduction

In this test report, compliance of the Ericsson T200 portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specification of Wireless Handsets* [1].

2. Device Under Test

2.1 Antenna description

Type	Internal antenna	
Location	Inside the back cover, near the top	
Dimensions	Max length	25mm
	Max width	40mm
Configuration	PIFA	

2.2 Device description

Device model	T200
Serial number	TV4KYW201A
Mode	1900 TDMA
Multiple Access Scheme	TDMA
Maximum Output Power Setting¹	29.5 dBm
Factory Tolerance in Power Setting	± 0.5dB
Maximum Peak Output Power²	30 dBm
Duty Cycle	1 / 8
Transmitting Frequency Range	1850.2 – 1909.8 MHz
Prototype or Production Unit	Preproduction
Device Category	Portable
RF exposure environment [2]	General population / uncontrolled

3. Test equipment

3.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c) with a SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY3 DAE V1	419	4/2003
E-field probe ETDV6	1569	5/2002
Dipole Validation Kit, D1900V2	5d002	2/2003

¹ This is the conducted power measured at the antenna port when the device is set to its highest power setting. It is measured at the middle of the transmit frequency band. Note that the output power may be different at other frequencies.

² This equals the maximum output power setting plus the factory tolerance.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

3.2 Additional equipment

Description	Serial Number	Due Date
Signal Generator ESG-D4000A	INV 462935	9/2003
Termination 65N50-0-11	NIV 2903	1/2003
Directional coupler 778D	NIV39656	9/2003
Thermocouple probe2290-4	NIV2393	2/2003
Thermocouple probe 51	NIV2071	9/2003
Dielectric probe kit HP 85070D	INV 20000053	2/2004
S-parameter test set	INV 421670	8/2003
Network analyzer HP 8753C	INV 421671	8/2003
Power meter R&S NRVD	INV 483920	1/2004
Power sensor R&S NRV-Z5	INV 2333	1/2004
Power sensor R&S NRV-Z5	INV 2334	1/2004
Wavetek STABLOCK4031D	INV 421578	7/2002

4. Electrical parameters of the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquid was measured with the dielectric probe kit. That value is shown in the table below. The mass density, ρ , entered into the DASY3 program is also given. Recommended limits for maximum permittivity, minimum conductivity and maximum mass density are also shown.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
1900	Muscle	Measured, 08/09/02	50.5	1.57	1.00
		Recommended	53.3	1.52	1.00

5. System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in Section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 23.4 °C, liquids temperature 23.1 °C and humidity 20 %. The obtained results are displayed in the table below. Forward power on dipole was 100mW and 250mW for reference measurement. Both measurement were normalised to 1W forward power. At 1900 MHz, the manufacturer provides reference values. The distributions of SAR compare well with those of the reference measurements (see Appendix 1). RF noise value is 0.003mw/g (1g-mass), when phone is off.

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg), 1 gram	Dielectric Parameters			Temp. (°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
1900	Muscle	Measured, 04/04/02	44.0	50.5	1.57	1.00	23.4
		Reference	43.7	51.9	1.58	1.00	?

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B
File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc			

EN

6. Test results

The measured 1-gram averaged SAR values of the device are provided in Tables 1. The humidity and ambient temperature of test facility were 12%-15% and 23°C – 23.5 °C respectively. The depth of the tissue simulating liquid was 15.0 cm. A base station simulator was used to control the device during the SAR measurements. The phone was supplied with a fully charged battery for the tests.

For body-worn measurements, the device was tested against a flat phantom representing the user body. Phone was 15mm on distance from flat phantom. In Table 1, SAR values are provided for both front and back part of the phone to the phantom.

Mode	Chanel	Output Power (dBm)	Phone Position	SAR, 1g (W/kg)
1900 TDMA	512	30.0	Front	0.11
			Back	0.3
	661	30.0	Front	0.07
			Back	0.2
	810	30.0	Front	0.06
			Back	0.14

Table 1: SAR measurement results for the Sony Ericsson T200 telephone at highest possible output power. Measured against the body.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN


References

- [1] M. Douglas, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson internal document EUS/CV/R-o1: 1061/REP
- [2] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).
- [3] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-200X, Draft 6.5 – August 20, 2001.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenosa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN


Appendix 1: SAR distribution comparison for system accuracy verification

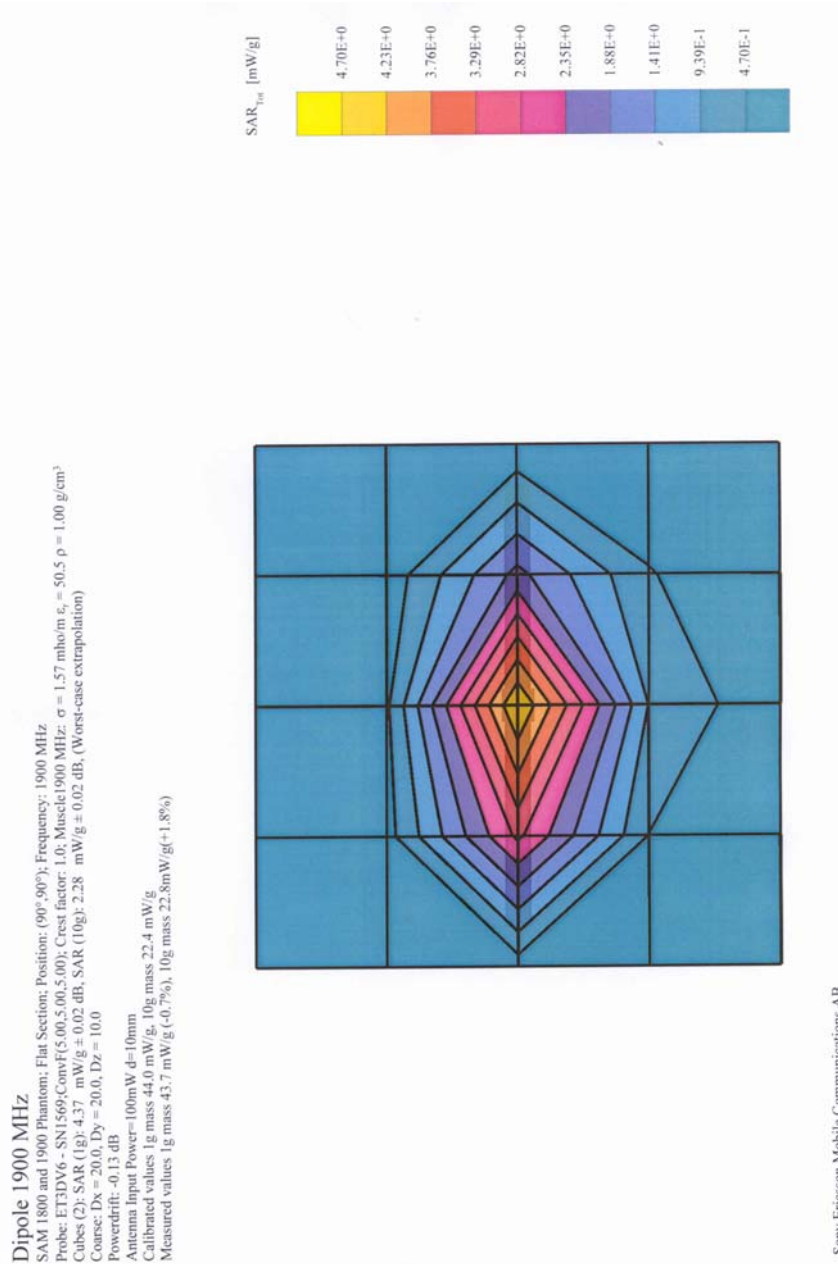

Validation Dipole D1900V2 SN: 5d002, d=10mm. Measured with muscle simulating tissue on 08/09/02.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

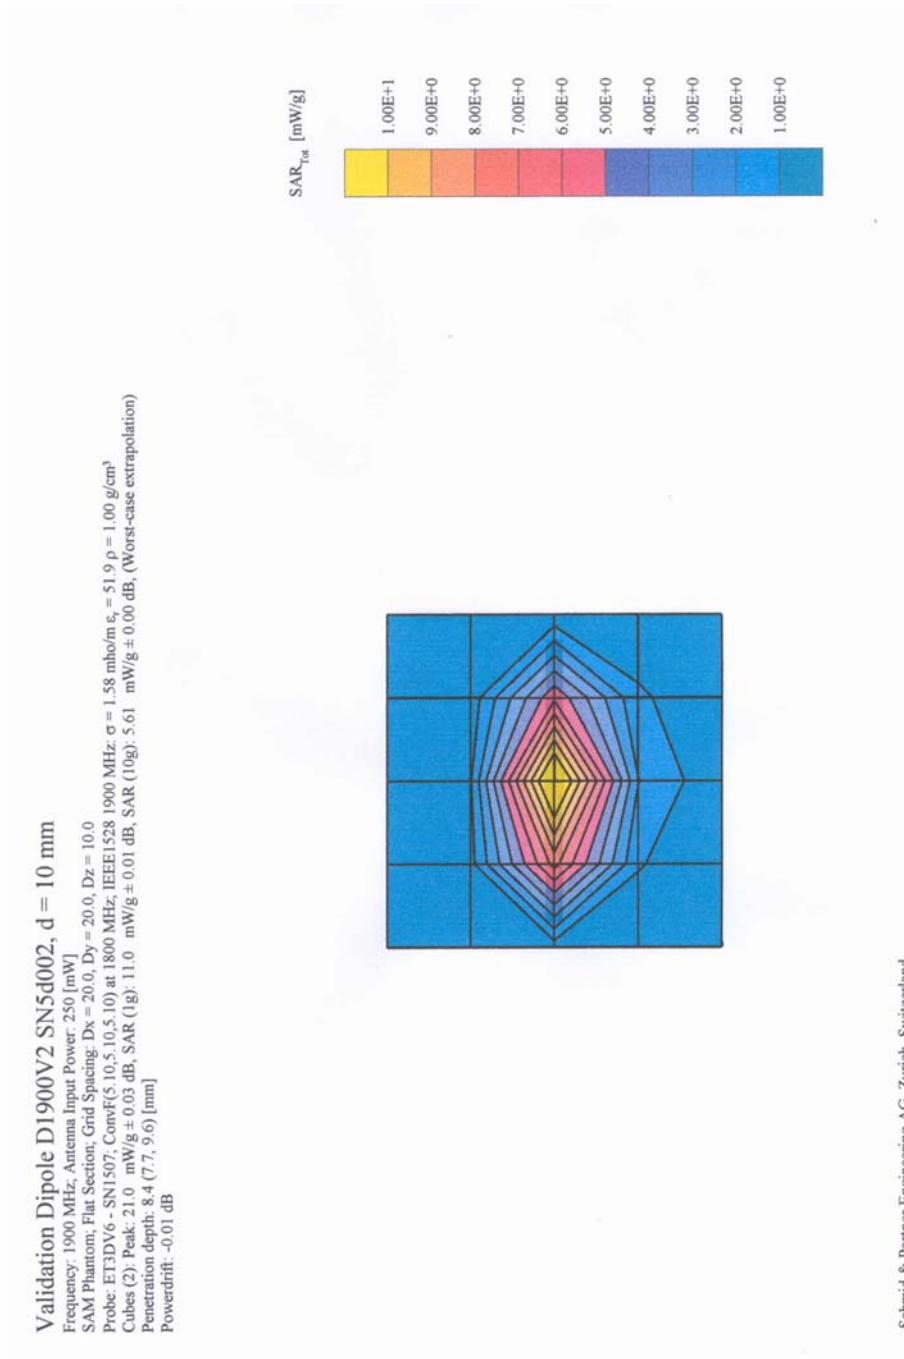


1900 MHz SAR distribution of validation dipole antenna from reference measurement.

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenosa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Appendix 2: SAR distribution plots

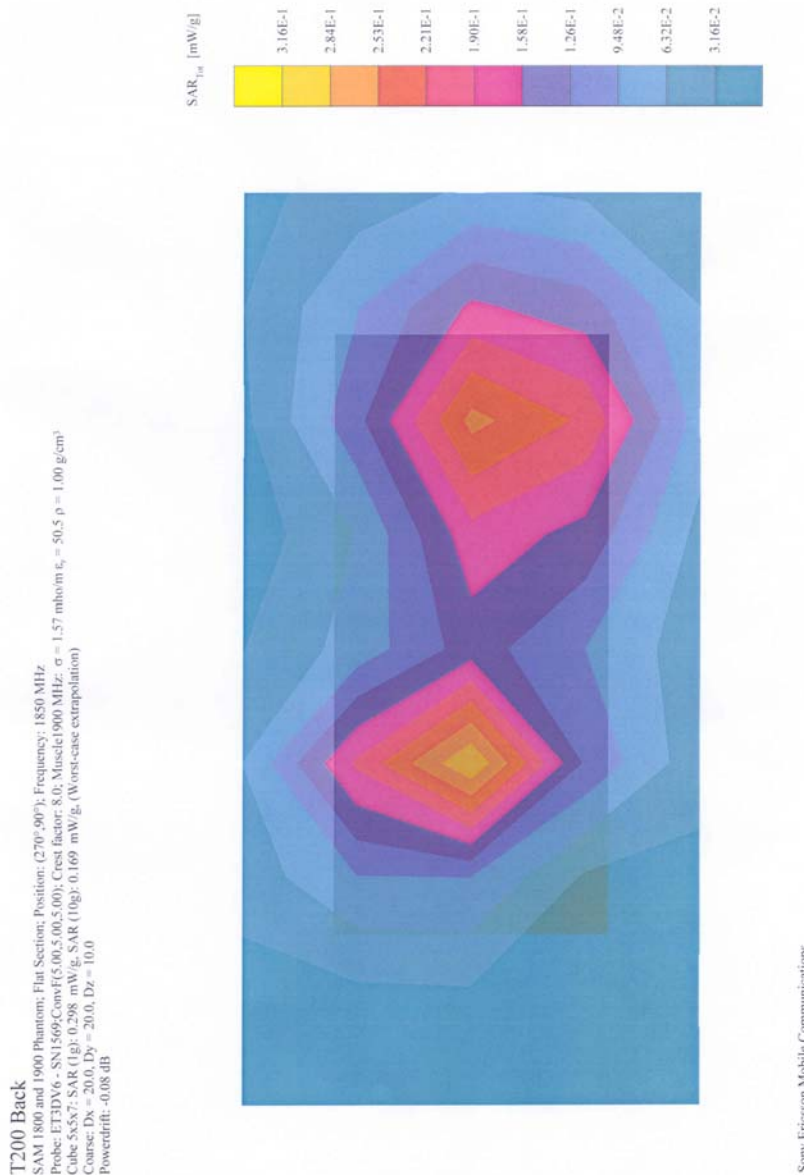

Distribution of maximum SAR on 1850.2MHz TDMA mode. Measured against the body and back side to the phantom

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B
			File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Appendix 3: Photographs of the device under test**Front view**

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN




Side view



Back view

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenosa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

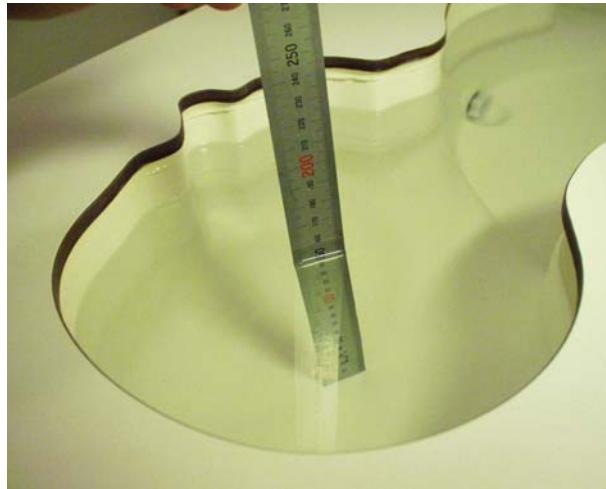**Liquid Level**

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Appendix 4: Position of device on SAM Twin Phantom**Front part of the phone 15mm away from the Flat Phantom****Back part of the phone 15mm away from the Flat Phantom**

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenosa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Appendix 5: Probe calibration parameters for ET3DV4 SN: 1569

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1569

Place of Calibration:

Zurich

Date of Calibration:

April 25, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

D. Vella

Approved by:

Ramadan Plicanic

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

ET3DV6 SN:1569

April 25, 2002

DASY3 - Parameters of Probe: ET3DV6 SN:1569

Sensitivity in Free Space

NormX	1.76 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.99 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.89 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	96	mV
DCP Y	96	mV
DCP Z	96	mV

Sensitivity in Tissue Simulating Liquid

Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
ConvF X	6.9 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.9 $\pm 9.5\%$ (k=2)	Alpha	0.60
ConvF Z	6.9 $\pm 9.5\%$ (k=2)	Depth	1.66
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
ConvF X	5.6 $\pm 8.9\%$ (k=2)	Boundary effect:	
ConvF Y	5.6 $\pm 8.9\%$ (k=2)	Alpha	0.43
ConvF Z	5.6 $\pm 8.9\%$ (k=2)	Depth	2.54

Boundary Effect

Head	900 MHz	Typical SAR gradient: 5 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	7.0	3.6
	SAR _{be} [%] With Correction Algorithm	0.0	0.1
Head	1800 MHz	Typical SAR gradient: 10 % per mm	
	Probe Tip to Boundary	1 mm	2 mm
	SAR _{be} [%] Without Correction Algorithm	10.8	7.4
	SAR _{be} [%] With Correction Algorithm	0.2	0.2

Sensor Offset

Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.5 \pm 0.2	mm


Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1	
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

ET3DV6 SN:1569

April 25, 2002

Conversion Factor Assessment

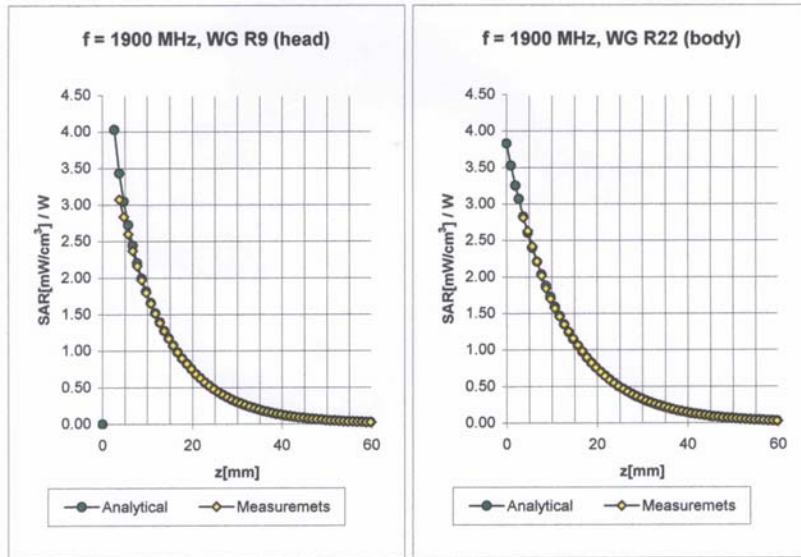

Head	1900 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
ConvF X	5.4	$\pm 8.9\% (k=2)$	Boundary effect:
ConvF Y	5.4	$\pm 8.9\% (k=2)$	Alpha 0.47
ConvF Z	5.4	$\pm 8.9\% (k=2)$	Depth 2.44
Body	1900 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\% \text{ mho/m}$
ConvF X	5.0	$\pm 8.9\% (k=2)$	Boundary effect:
ConvF Y	5.0	$\pm 8.9\% (k=2)$	Alpha 0.65
ConvF Z	5.0	$\pm 8.9\% (k=2)$	Depth 2.16

Prepared (also subject responsible if other) LD/ECS/GUF/KG Ramadan Plicanic		No. GTX/FG 02:005/1		
Approved GUF/KG Ramadan Plicanic	Checked ECSRAPL	Date 2002-09-03	Rev B	File \\SELDNT01\ECSRAPL\$\Prenos sa C drive\SAR dokument\Reports\FCC Report\T200_FCC_report_Body_edit_020904.doc

EN

Appendix 6: Uncertainty budget

SAR measurement uncertainty evaluation for Sonyericsson T200 phone

Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	Measurement on Body
Measurement System				
Probe Calibration	2.6	N	1	2.6
Axial Isotropy	4.7	R	√3	1.9
Hemispherical Isotropy	9.6	R	√3	3.9
Boundary Effect	11.0	R	√3	6.4
Linearity	4.7	R	√3	2.7
System Detection Limits	1.0	R	√3	0.6
Readout Electronics	1.0	N	1	1.0
Response Time	0.8	R	√3	0.5
Integration Time	1.8	R	√3	1.1
RF Ambient Conditions	3.0	R	√3	1.7
Probe Positioned Mechanical Tolerance	0.4	R	√3	0.2
Probe Positioning respect to Phantom Shell	2.9	R	√3	1.7
Extrapolation, interpolation and Integration Algorithm for Max. SAR	3.9	R	√3	2.3
<i>Measurement System Uncertainty</i>				9.4
Test Sample Related				
Test Sample Positioning		R	√3	6.7
Device Holder Uncertainty		R	√3	5.9
Output Power Variation - Drift	1.74	R	√3	1.01
<i>Test Sample Related Uncertainty</i>				9.0
Phantom and Tissue Parameters				
Phantom Uncertainty(shape and thickness tolerances)	4.0	R	√3	2.3
Liquid Conductivity-deviation from target values)	3.3	R	√3	1.9
Liquid Conductivity-measurement uncertainty	5	R	√3	2.9
Liquid Permittivity-deviation from target values	5.25	R	√3	3.0
Liquid Permittivity-measurement uncertainty	5	R	√3	2.9
<i>Phantom and Tissue Parameters Uncertainty</i>				5.9
<i>Combined Standard Uncertainty</i>		RSS		14.3
<i>Expanded Uncertainty (95% CONFIDENCE LEVEL)</i>				28.6