


VERTICAL RESULT

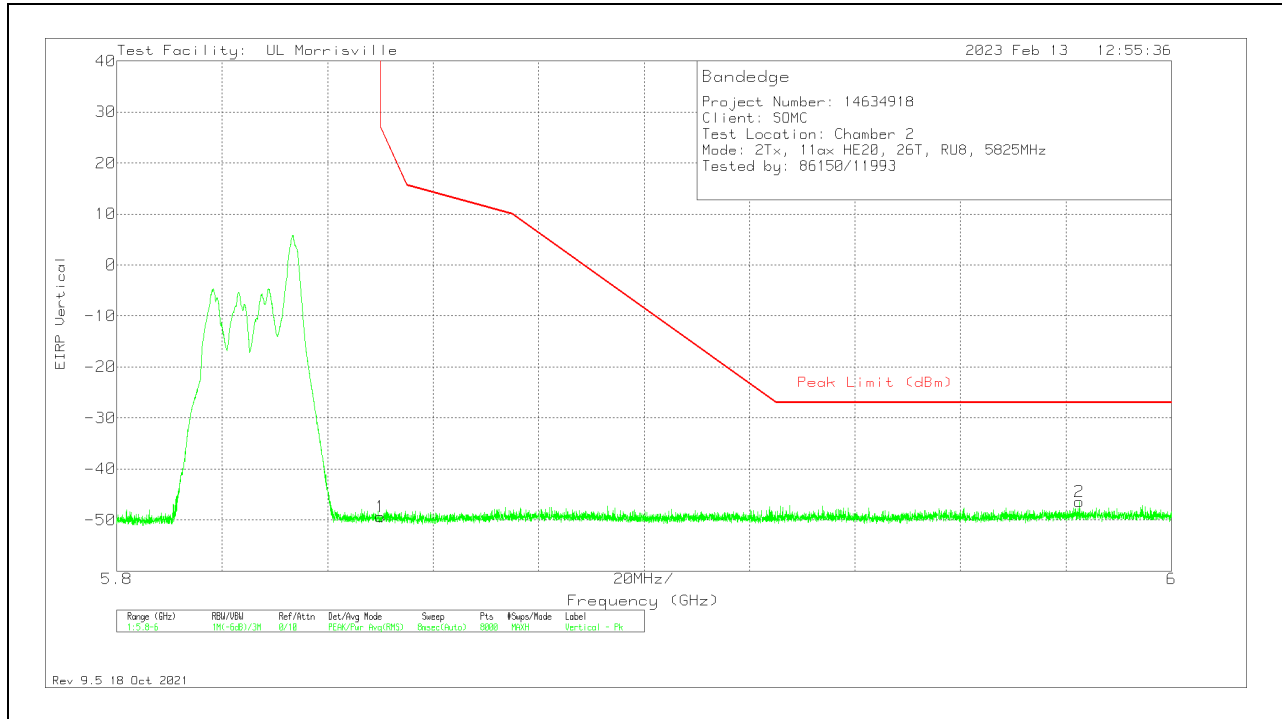


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-73.15	Pk	34.9	-22.9	11.8	0	-49.35	26.99	-76.34	74	313	V
2	5.98255	-70.98	Pk	35.1	-22.4	11.8	0	-46.48	-27	-19.48	74	313	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

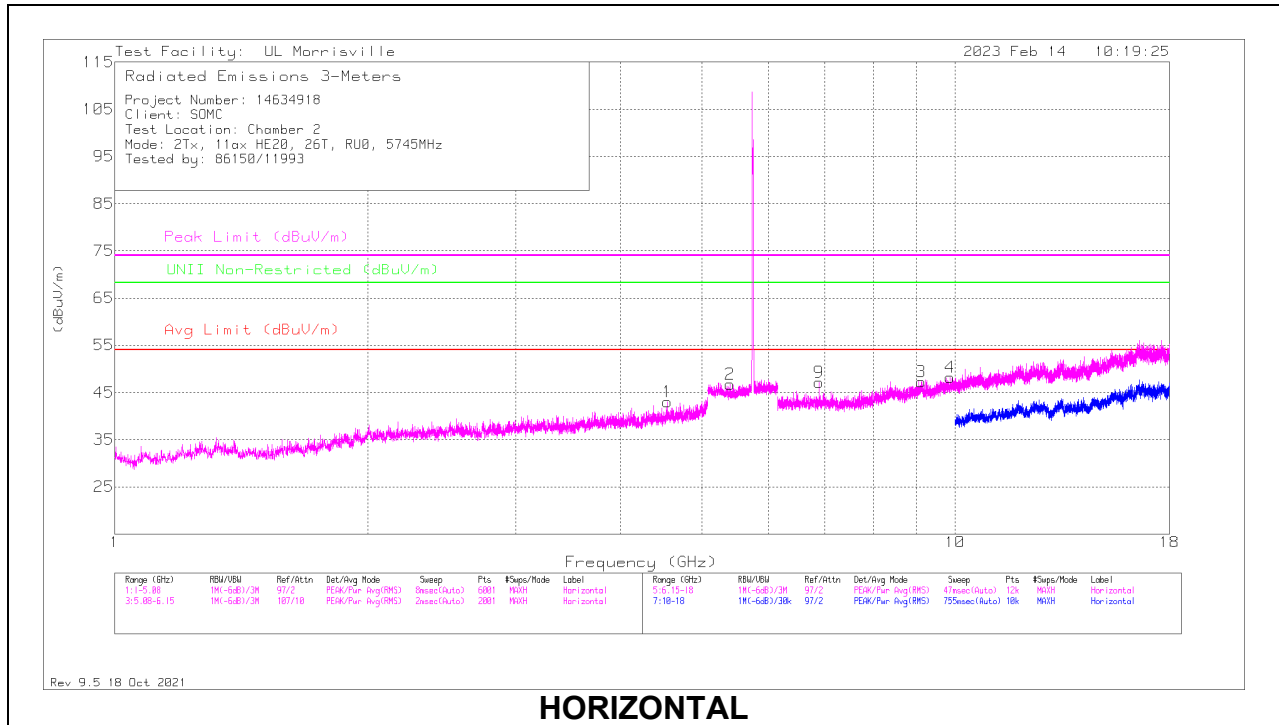

HORIZONTAL

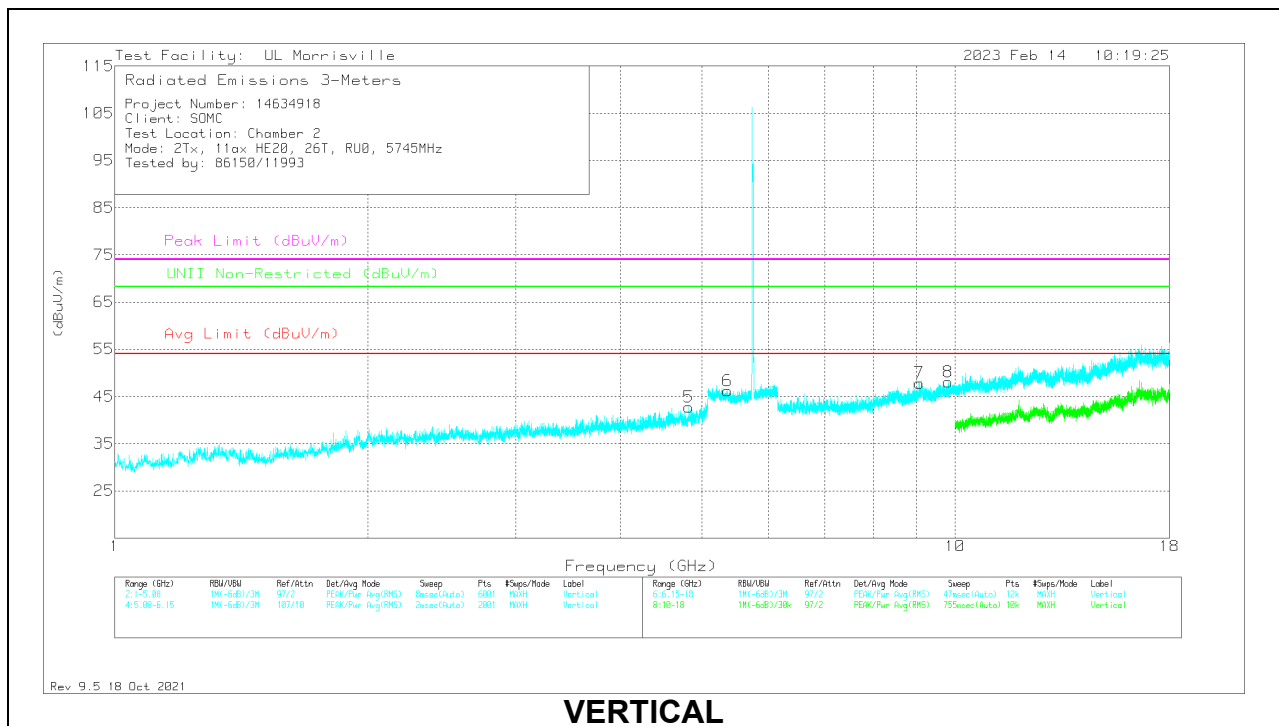

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* ** 4.54858	40.73	Pk	34.1	-31.8	0	43.03	54	-10.97	74	-30.97	-	-	0-360	101	H
5	* ** 4.82364	39	Pk	34	-30.2	0	42.8	54	-11.2	74	-31.2	-	-	0-360	199	V
2	* ** 5.39565	35.46	Pk	34.5	-23.2	0	46.76	54	-7.24	74	-27.24	-	-	0-360	199	H
6	* ** 5.36569	34.84	Pk	34.5	-23.1	0	46.24	54	-7.76	74	-27.76	-	-	0-360	101	V
3	* ** 9.12238	36.94	Pk	36.2	-25.9	0	47.24	54	-6.76	74	-26.76	-	-	0-360	101	H
7	* ** 9.07103	37.86	Pk	36.1	-26.1	0	47.86	54	-6.14	74	-26.14	-	-	0-360	199	V
9	6.89359	39.58	Pk	35.6	-28	0	47.18	-	-	-	-	68.2	-21.02	0-360	199	H
8	9.81053	37.53	PK-U	36.8	-25.2	0	49.13	-	-	-	-	68.2	-19.07	157	113	V
4	9.86121	38.38	PK-U	36.9	-25.6	0	49.68	-	-	-	-	68.2	-18.52	188	324	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

MID CHANNEL

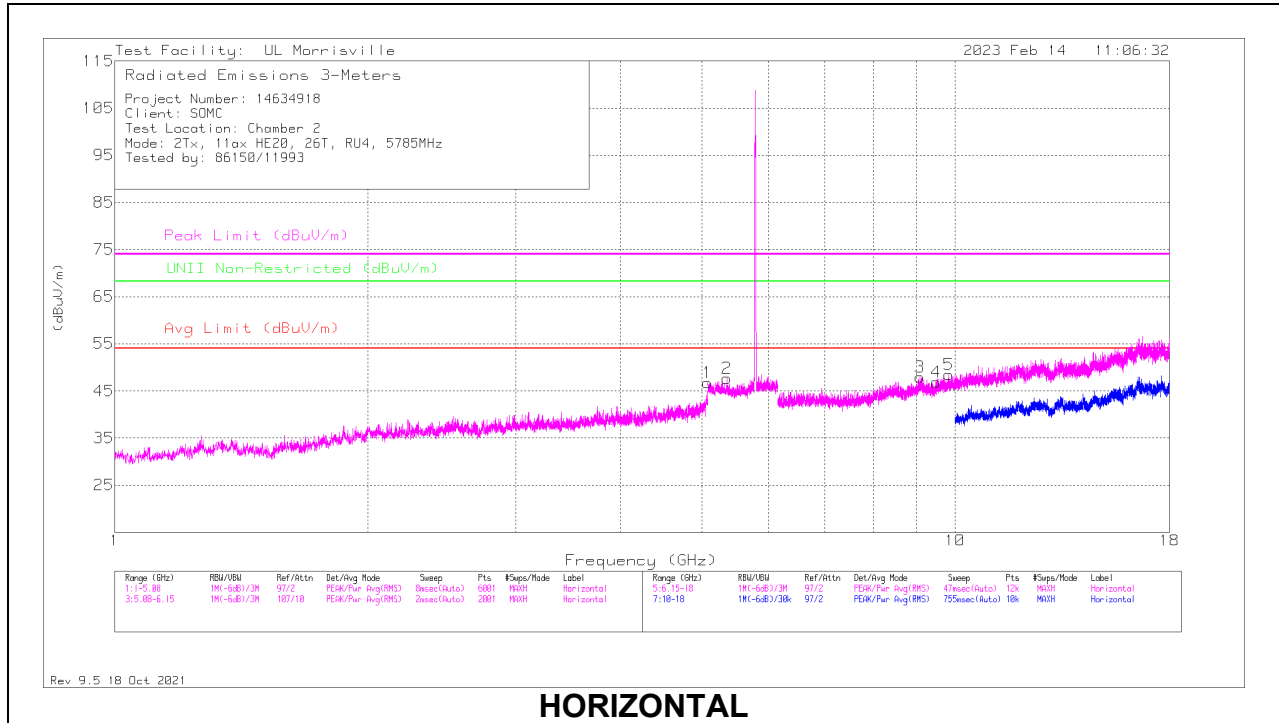

HORIZONTAL

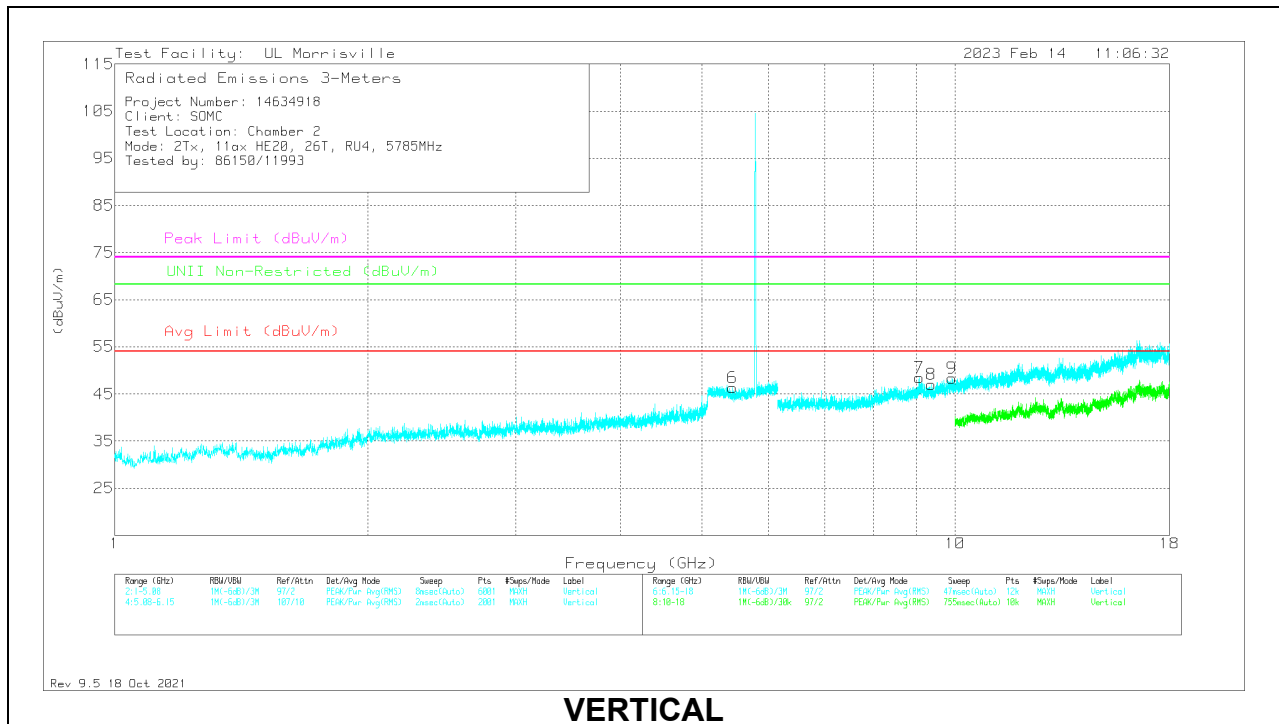

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.08	34.86	Pk	34.1	-22.2	0	46.76	54	-7.24	74	-27.24	-	-	0-360	199	H
2	*** 5.35339	35.77	Pk	34.6	-22.7	0	47.67	54	-6.33	74	-26.33	-	-	0-360	101	H
6	*** 5.43631	35.45	Pk	34.4	-23.5	0	46.35	54	-7.65	74	-27.65	-	-	0-360	101	V
3	*** 9.09078	37.79	Pk	36.1	-26	0	47.89	54	-6.11	74	-26.11	-	-	0-360	101	H
4	*** 9.49664	36.12	Pk	36.6	-25.8	0	46.92	54	-7.08	74	-27.08	-	-	0-360	199	H
7	*** 9.06117	38.7	PK-U	36.1	-26	0	48.8	-	-	74	-25.2	-	-	131	378	V
	*** 9.06392	26.23	ADV	36.1	-25.8	.47	37	54	-17	-	-	-	-	131	378	V
8	*** 9.3653	36.11	Pk	36.5	-25.6	0	47.01	54	-6.99	74	-26.99	-	-	0-360	199	V
5	9.82421	37.82	PK-U	36.9	-25.2	0	49.52	-	-	-	-	68.2	-18.68	343	301	H
9	9.9261	38.13	PK-U	37	-25.1	0	50.03	-	-	-	-	68.2	-18.17	193	331	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector


PK-U - Maximum Peak

ADV - Linear Voltage Average

HIGH CHANNEL

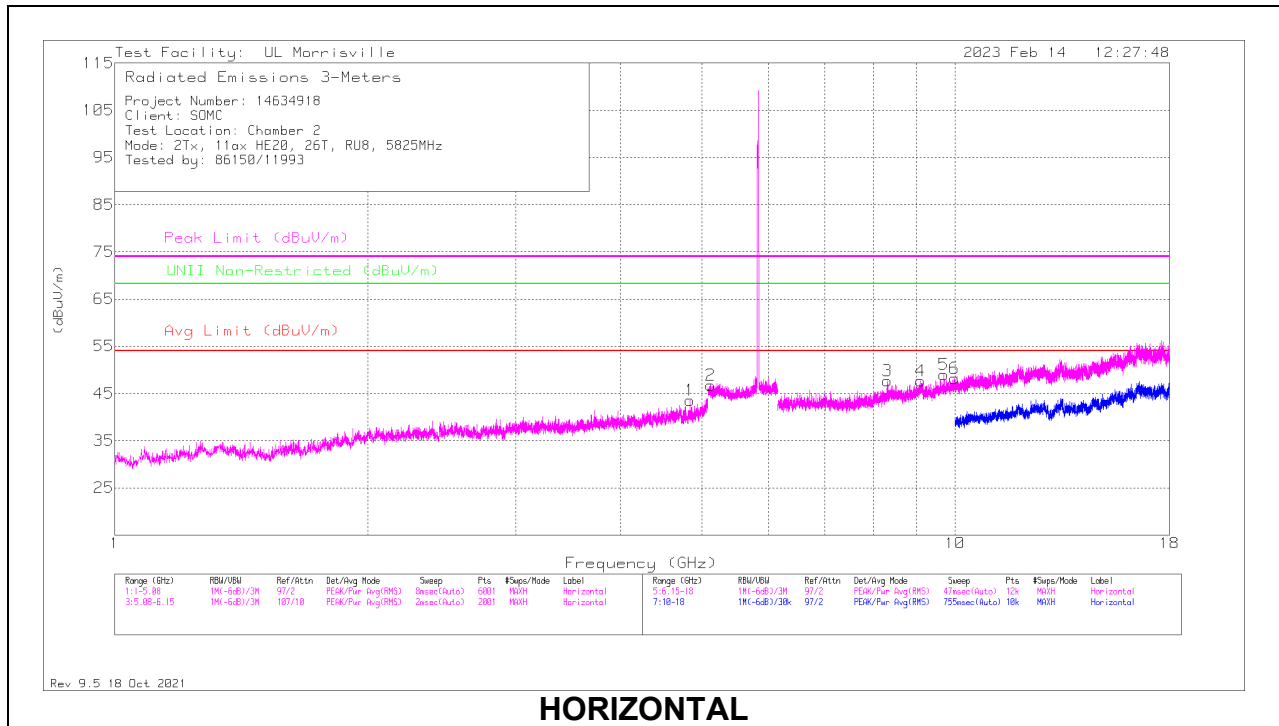

HORIZONTAL

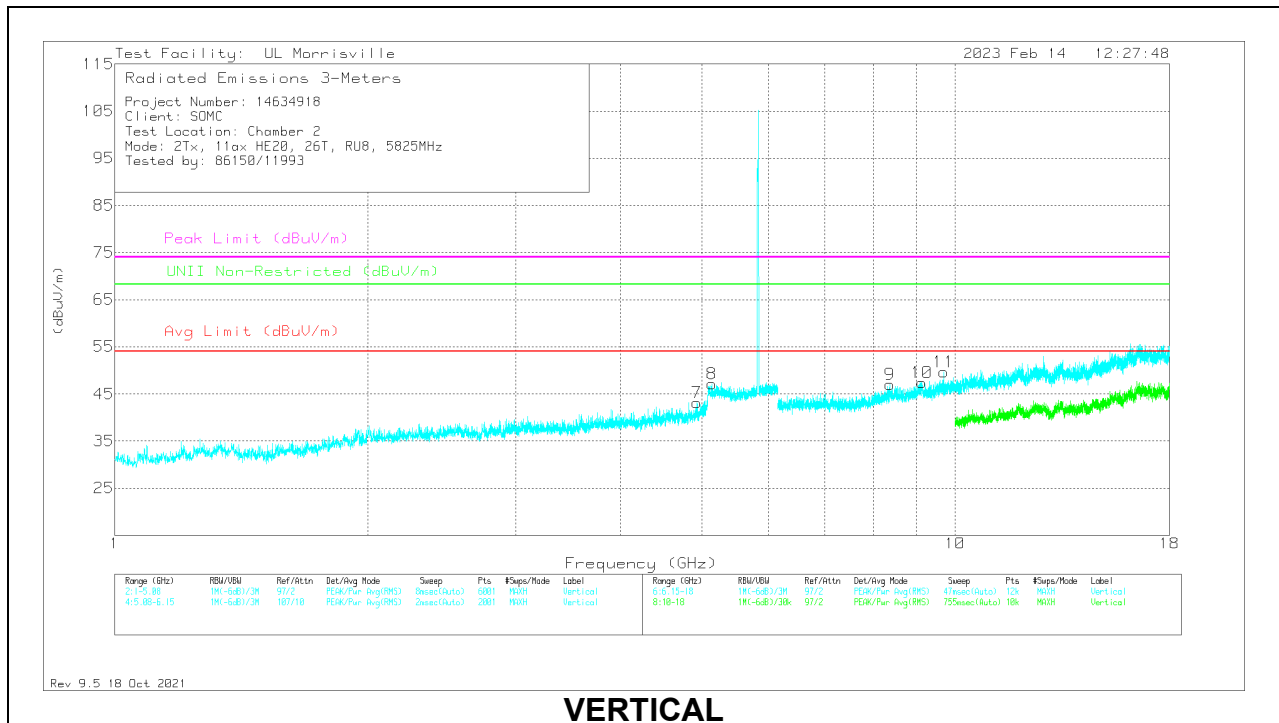

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.83996	39.81	Pk	34	-30.3	0	43.51	54	-10.49	74	-30.49	-	-	0-360	101	H
7	*** 4.9338	38.33	Pk	33.9	-29.1	0	43.13	54	-10.87	74	-30.87	-	-	0-360	200	V
2	*** 5.12227	35.17	Pk	34.2	-22.6	0	46.77	54	-7.23	74	-27.23	-	-	0-360	101	H
8	*** 5.13725	35.37	Pk	34.2	-22.4	0	47.17	54	-6.83	74	-26.83	-	-	0-360	199	V
3	*** 8.31658	38.43	Pk	35.8	-26.6	0	47.63	54	-6.37	74	-26.37	-	-	0-360	199	H
4	*** 9.09571	37.54	Pk	36.1	-26	0	47.64	54	-6.36	74	-26.36	-	-	0-360	101	H
9	*** 8.36694	37.79	Pk	35.8	-26.6	0	46.99	54	-7.01	74	-27.01	-	-	0-360	101	V
10	*** 9.13126	37.05	Pk	36.2	-25.8	0	47.45	54	-6.55	74	-26.55	-	-	0-360	199	V
11	9.70571	37.9	PK-U	36.8	-25.5	0	49.2	-	-	-	-	68.2	-19	346	200	V
5	9.70496	37.7	PK-U	36.8	-25.5	0	49	-	-	-	-	68.2	-19.2	73	111	H
6	9.98022	37.38	PK-U	37.1	-25.2	0	49.28	-	-	-	-	68.2	-18.92	41	172	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

2TX 52T MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

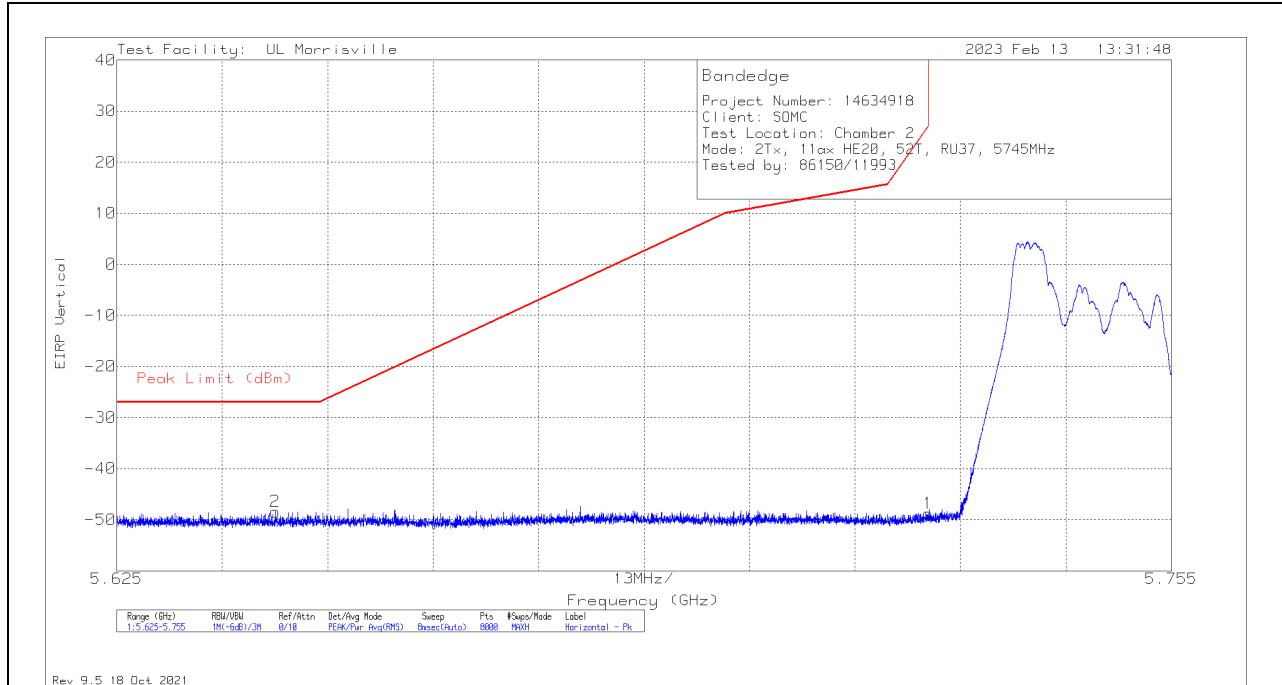

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64457	-71.35	Pk	34.5	-23.4	11.8	0	-48.45	-27	-21.45	209	144	H
1	5.725	-71.79	Pk	34.6	-23.4	11.8	0	-48.79	27	-75.79	209	144	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

VERTICAL RESULT

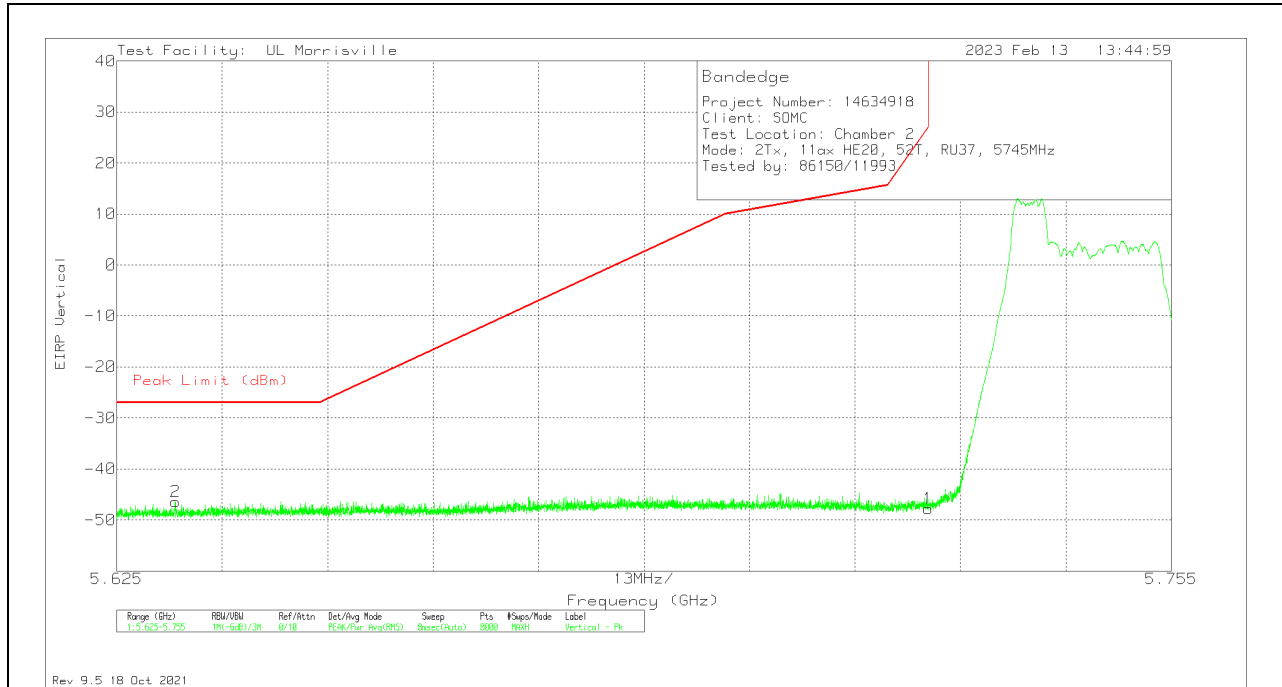


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63223	-69.24	Pk	34.5	-23.5	11.8	0	-46.44	-27	-19.44	127	285	V
1	5.725	-70.75	Pk	34.6	-23.4	11.8	0	-47.75	27	-74.75	127	285	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

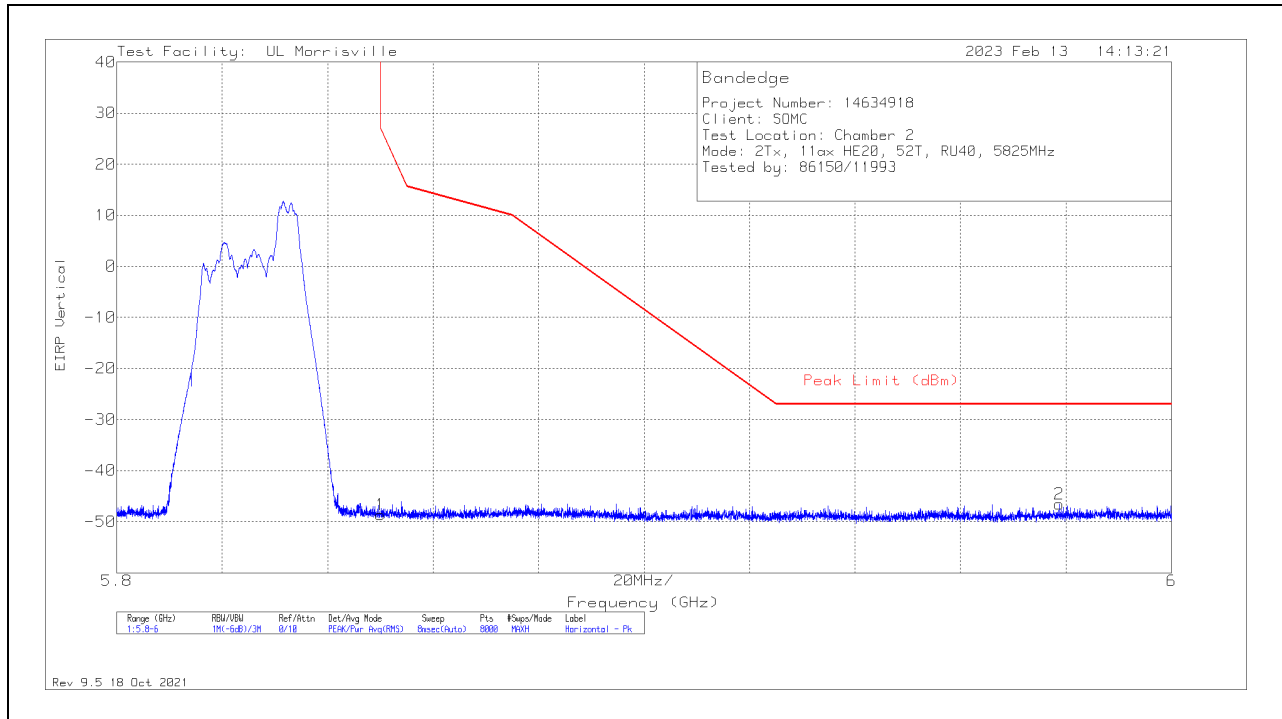


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-72.47	Pk	34.9	-22.9	11.8	0	-48.67	26.99	-75.66	345	105	H
2	5.9787	-71.04	Pk	35.1	-22.4	11.8	0	-46.54	-27	-19.54	345	105	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

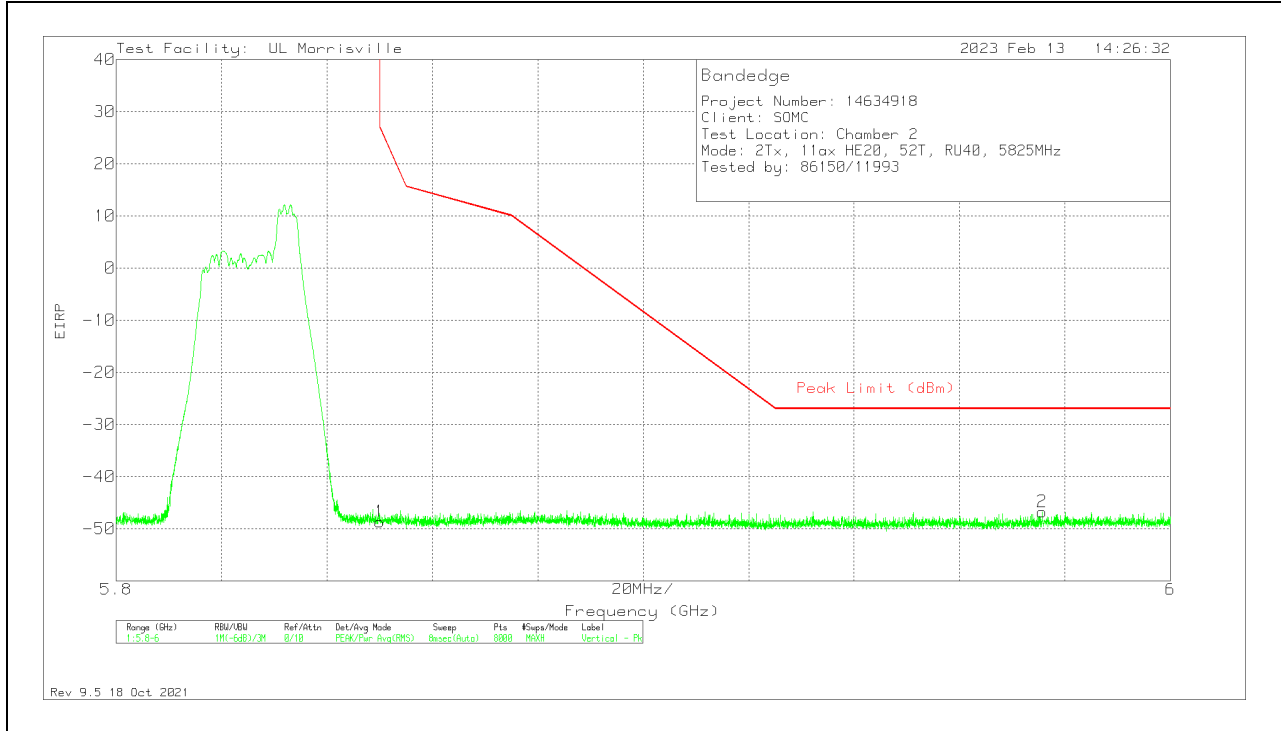

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-72.43	Pk	34.9	-22.9	11.8	0	-48.63	26.99	-75.62	130	264	V
2	5.97567	-71.22	Pk	35.1	-22.4	11.8	0	-46.72	-27	-19.72	130	264	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

2TX 106T MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

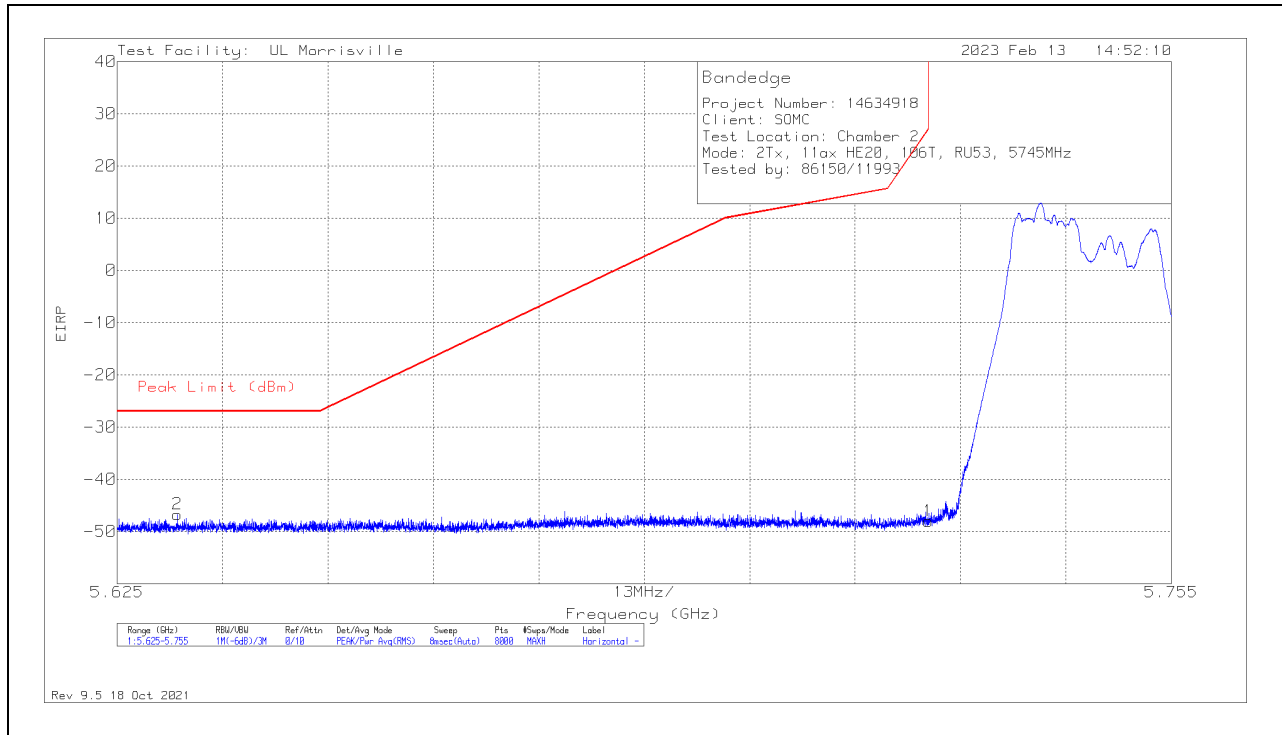


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63241	-69.51	Pk	34.5	-23.5	11.8	0	-46.71	-27	-19.71	95	138	H
1	5.725	-71.01	Pk	34.6	-23.4	11.8	0	-48.01	27	-75.01	95	138	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

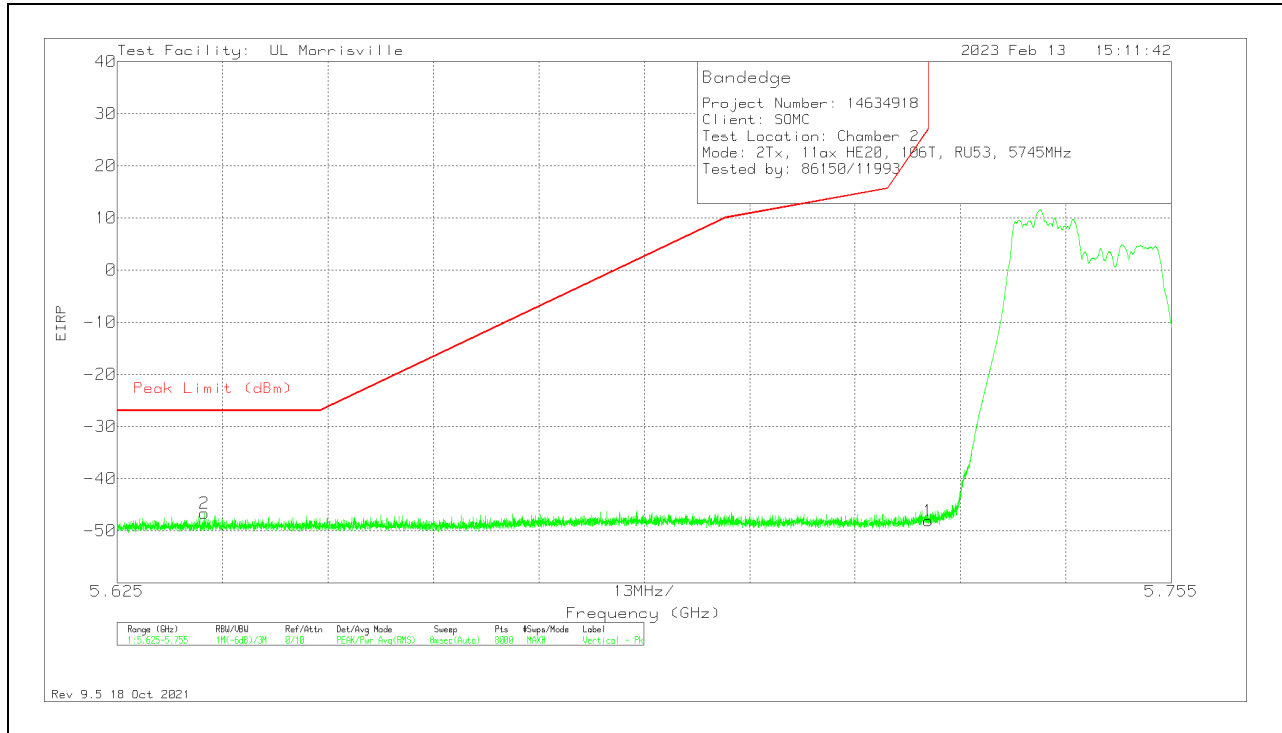

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63574	-69.56	Pk	34.5	-23.4	11.8	0	-46.66	-27	-19.66	115	286	V
1	5.725	-71.12	Pk	34.6	-23.4	11.8	0	-48.12	27	-75.12	115	286	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

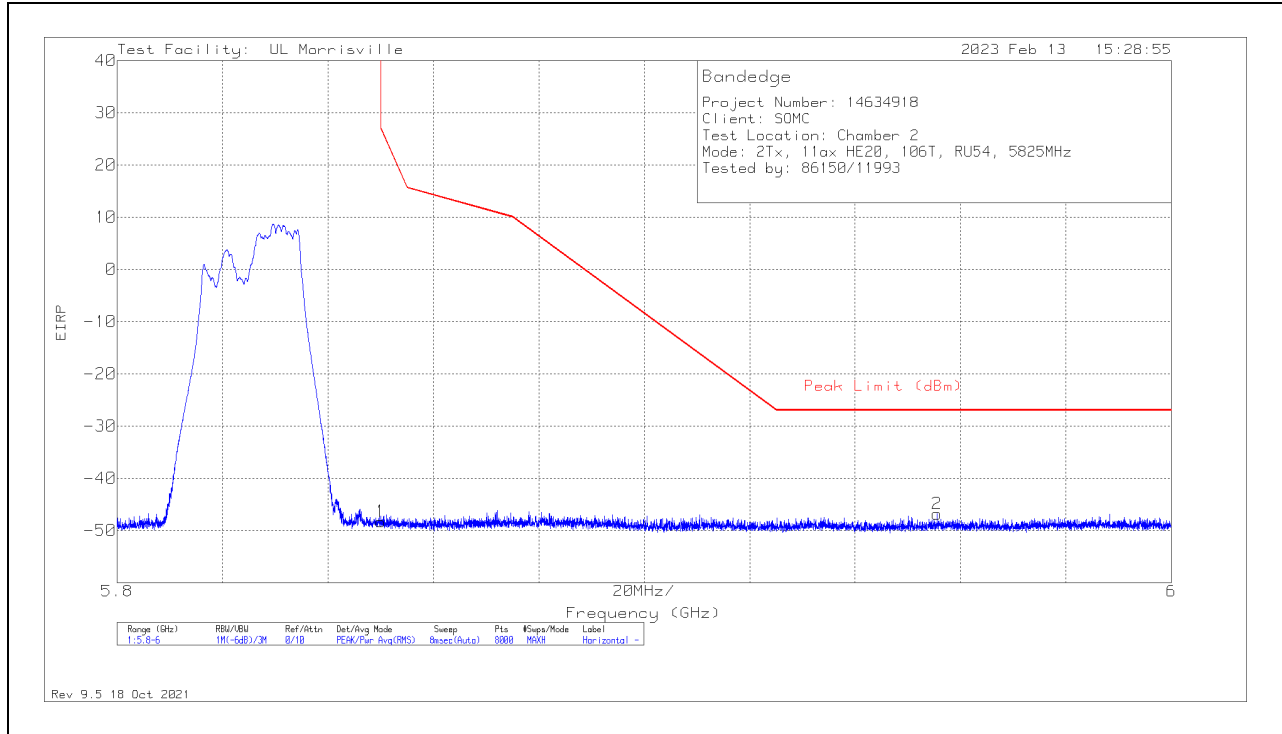


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-72.1	Pk	34.9	-22.9	11.8	0	-48.3	26.99	-75.29	344	203	H
2	5.95552	-71.21	Pk	35.1	-22.5	11.8	0	-46.81	-27	-19.81	344	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

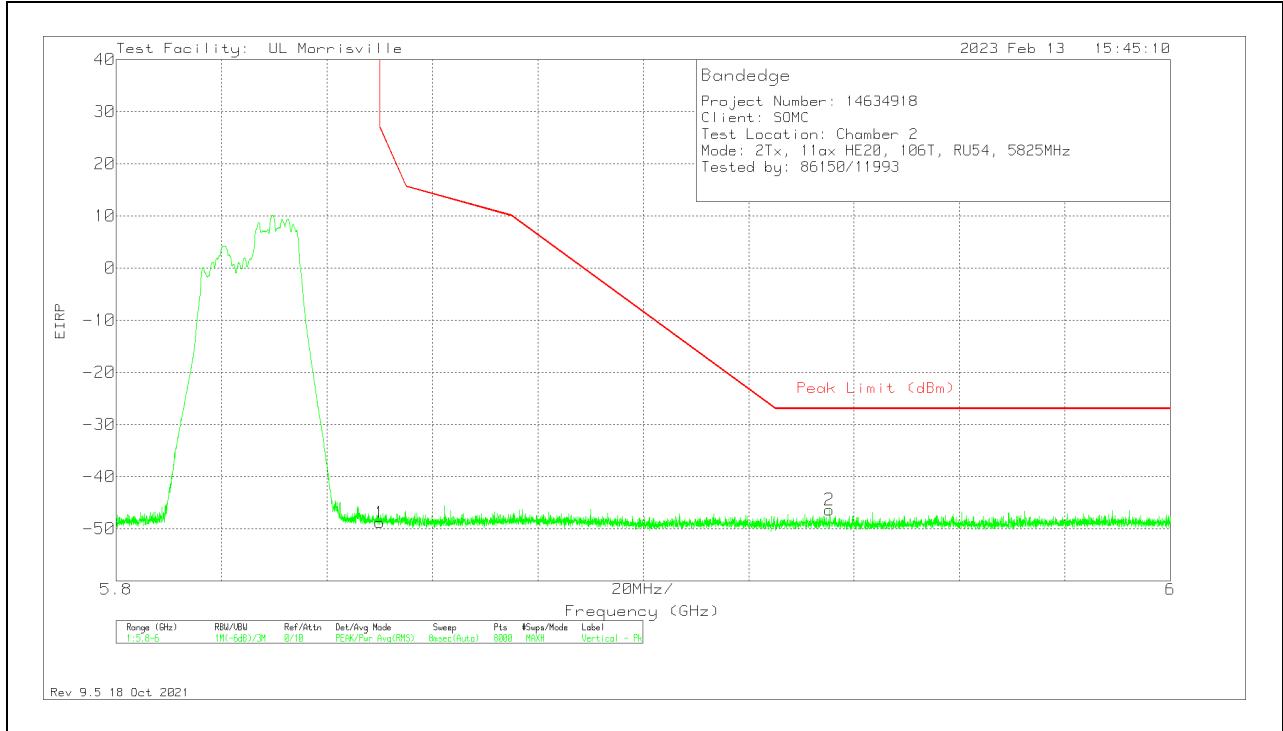

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-72.63	Pk	34.9	-22.9	11.8	0	-48.83	26.99	-75.82	113	334	V
2	5.93527	-70.59	Pk	35.1	-22.7	11.8	0	-46.39	-27	-19.39	113	334	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

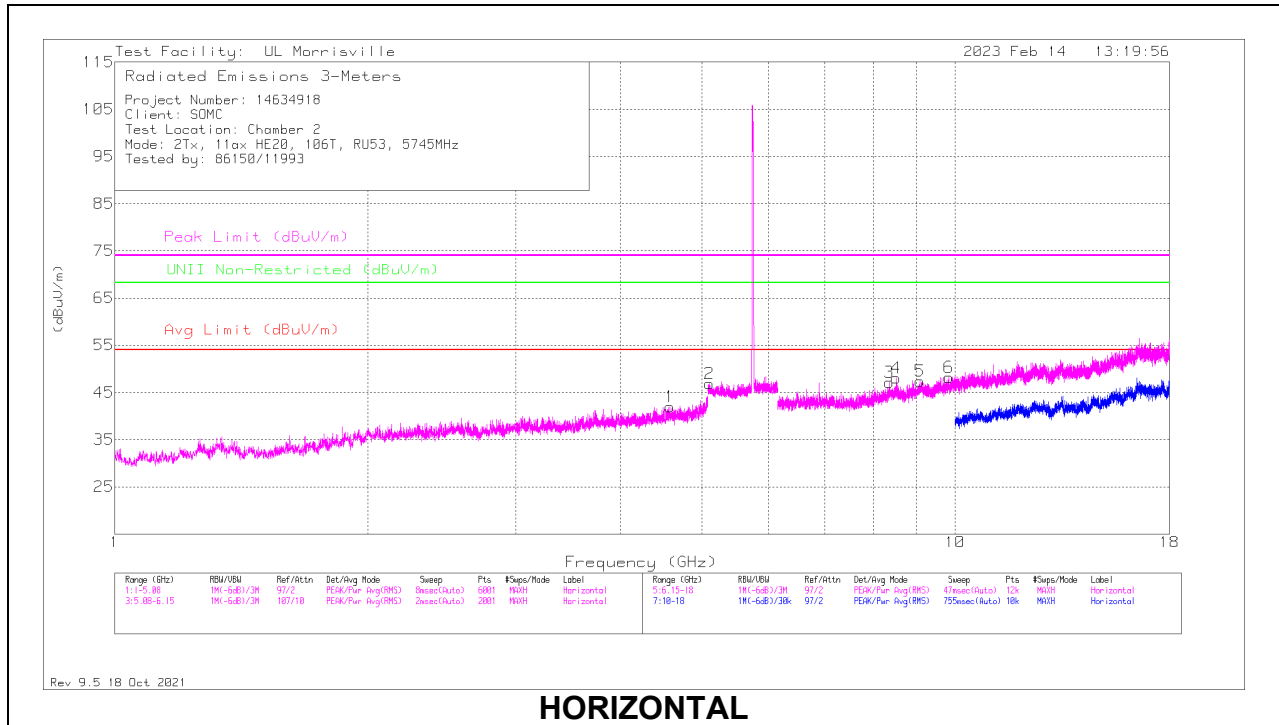

HORIZONTAL

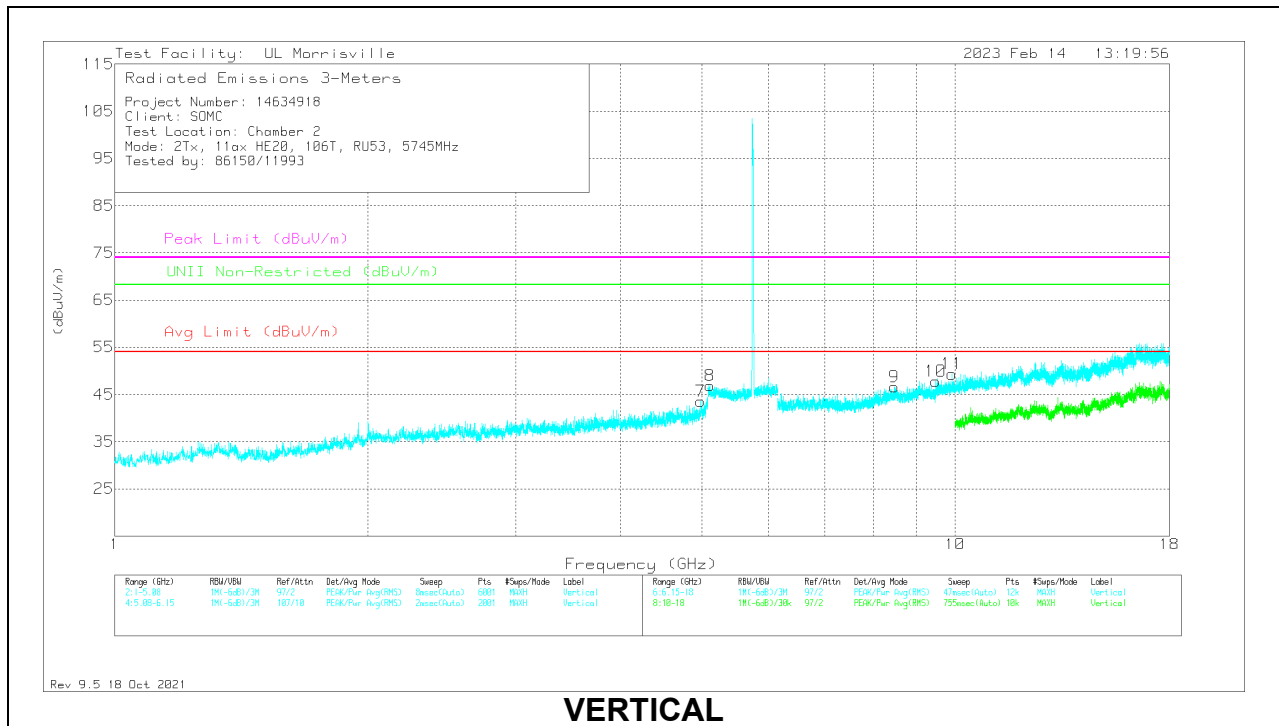

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 4.57748	38.9	Pk	34.2	-31.2	0	41.9	54	-12.1	74	-32.1	-	-	0-360	101	H
7	*** 4.98072	38.81	Pk	33.9	-29.2	0	43.51	54	-10.49	74	-30.49	-	-	0-360	101	V
2	*** 5.10194	34.98	Pk	34.2	-22.3	0	46.88	54	-7.12	74	-27.12	-	-	0-360	101	H
8	*** 5.11424	35.04	Pk	34.2	-22.4	0	46.84	54	-7.16	74	-27.16	-	-	0-360	200	V
3	*** 8.3462	38.05	Pk	35.8	-26.7	0	47.15	54	-6.85	74	-26.85	-	-	0-360	101	H
5	*** 9.0888	37.34	Pk	36.1	-26	0	47.44	54	-6.56	74	-26.56	-	-	0-360	101	H
9	*** 8.47359	37.83	Pk	35.9	-27.1	0	46.63	54	-7.37	74	-27.37	-	-	0-360	200	V
10	*** 9.48775	36.84	Pk	36.6	-25.6	0	47.84	54	-6.16	74	-26.16	-	-	0-360	200	V
4	8.51632	38.95	PK-U	35.9	-27	0	47.85	-	-	-	-	68.2	-20.35	258	282	H
6	9.83101	37.67	PK-U	36.9	-25.2	0	49.37	-	-	-	-	68.2	-18.83	248	300	H
11	9.91667	37.84	PK-U	37	-25.4	0	49.44	-	-	-	-	68.2	-18.76	300	294	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

MID CHANNEL

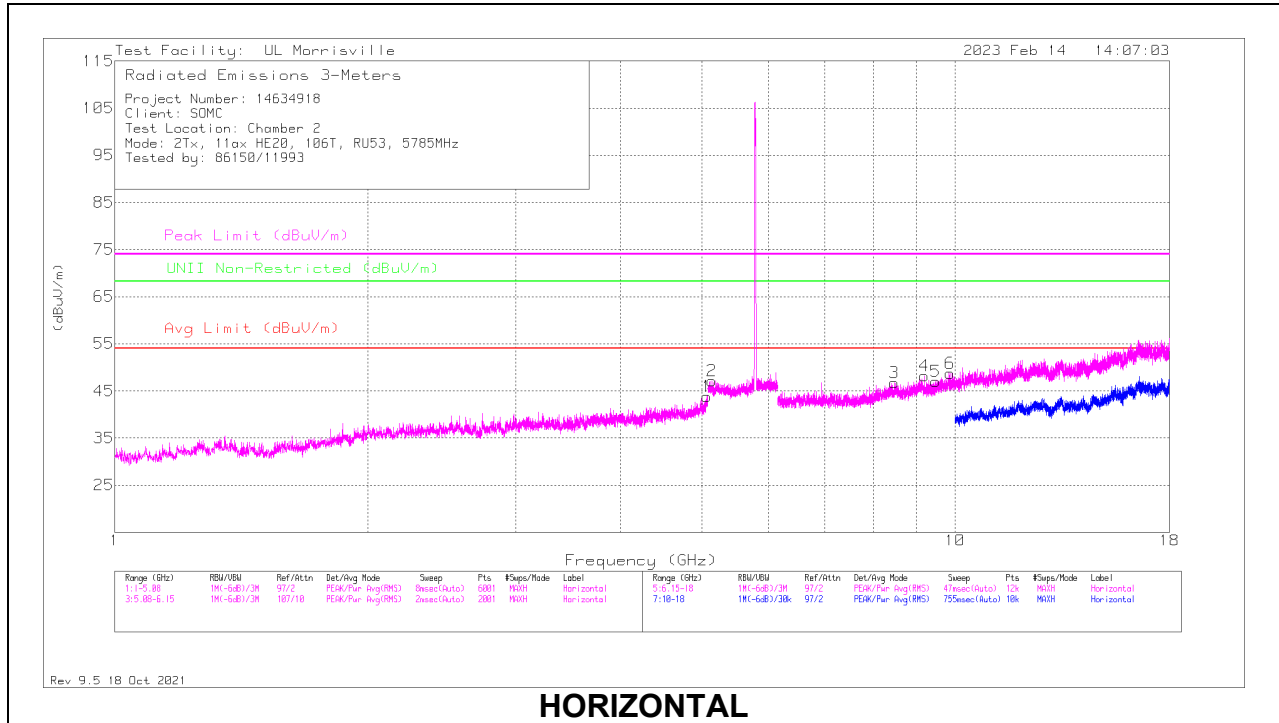

HORIZONTAL

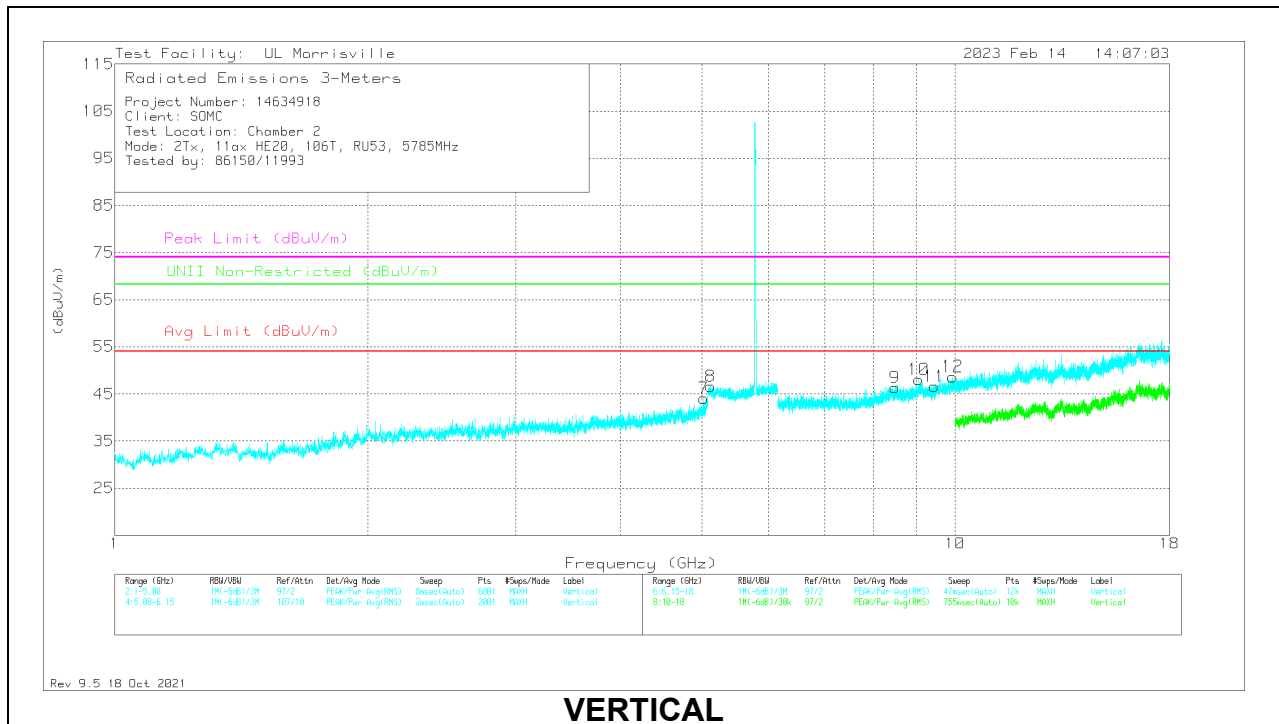


VERTICAL


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.06436	38.57	Pk	34.1	-28.8	0	43.87	54	-10.13	74	-30.13	-	-	0-360	101	H
7	*** 5.0256	39.79	Pk	34	-29.7	0	44.09	54	-9.91	74	-29.91	-	-	0-360	199	V
2	*** 5.13885	35.32	Pk	34.2	-22.4	0	47.12	54	-6.88	74	-26.88	-	-	0-360	101	H
8	*** 5.12227	35.06	Pk	34.2	-22.6	0	46.66	54	-7.34	74	-27.34	-	-	0-360	101	V
3	*** 8.46766	38.1	Pk	35.9	-27.3	0	46.7	54	-7.3	74	-27.3	-	-	0-360	200	H
5	*** 9.48775	36.01	Pk	36.6	-25.6	0	47.01	54	-6.99	74	-26.99	-	-	0-360	101	H
9	*** 8.48939	37.4	Pk	35.9	-27	0	46.3	54	-7.7	74	-27.7	-	-	0-360	200	V
10	*** 9.06031	38.64	PK-U	36.1	-26	0	48.74	-	-	74	-25.26	-	-	84	366	V
	*** 9.05977	26.11	ADV	36.1	-26.1	.53	36.64	54	-17.36	-	-	-	-	84	366	V
11	*** 9.44825	36.36	Pk	36.5	-26.3	0	46.56	54	-7.44	74	-27.44	-	-	0-360	200	V
4	9.20418	38.61	PK-U	36.3	-26.4	0	48.51	-	-	74	-25.49	68.2	-19.69	200	389	H
6	9.86749	37.4	PK-U	36.9	-25.6	0	48.7	-	-	74	-25.3	68.2	-19.5	106	237	H
12	9.92925	37.86	PK-U	37.1	-25.1	0	49.86	-	-	74	-24.14	68.2	-18.34	91	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector
 PK-U - Maximum Peak
 ADV - Linear Voltage Average

HIGH CHANNEL

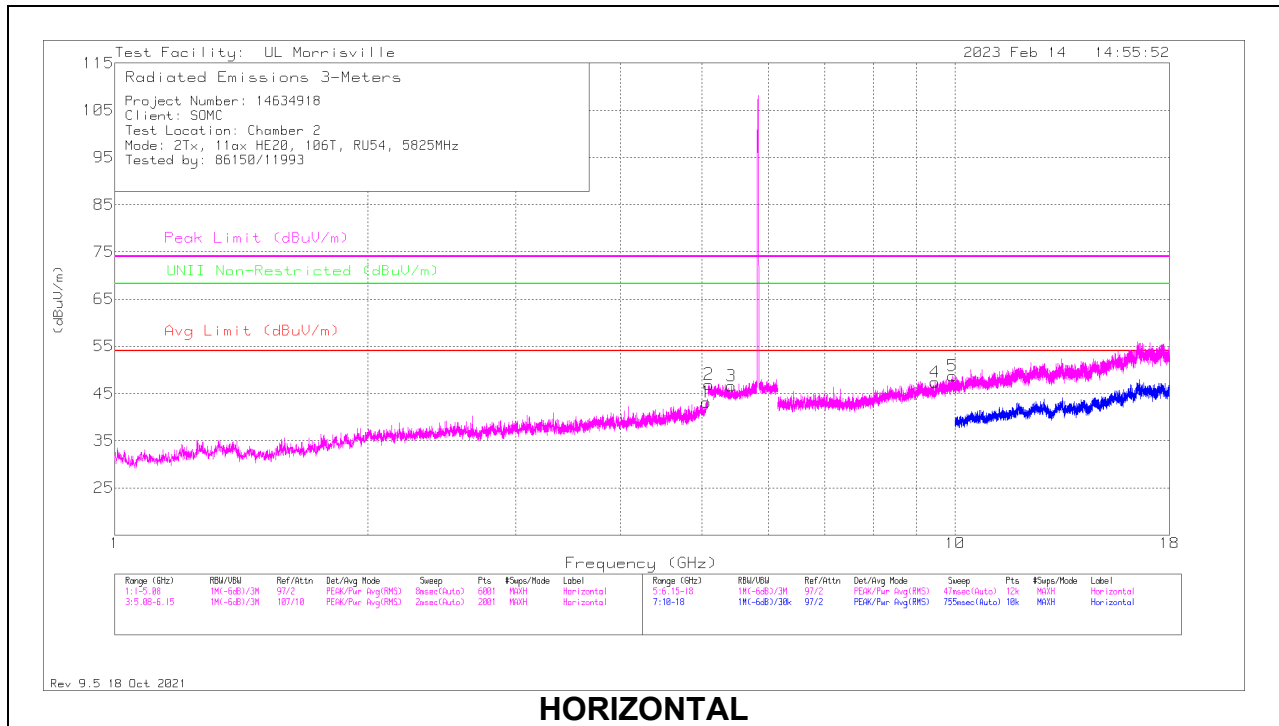

HORIZONTAL

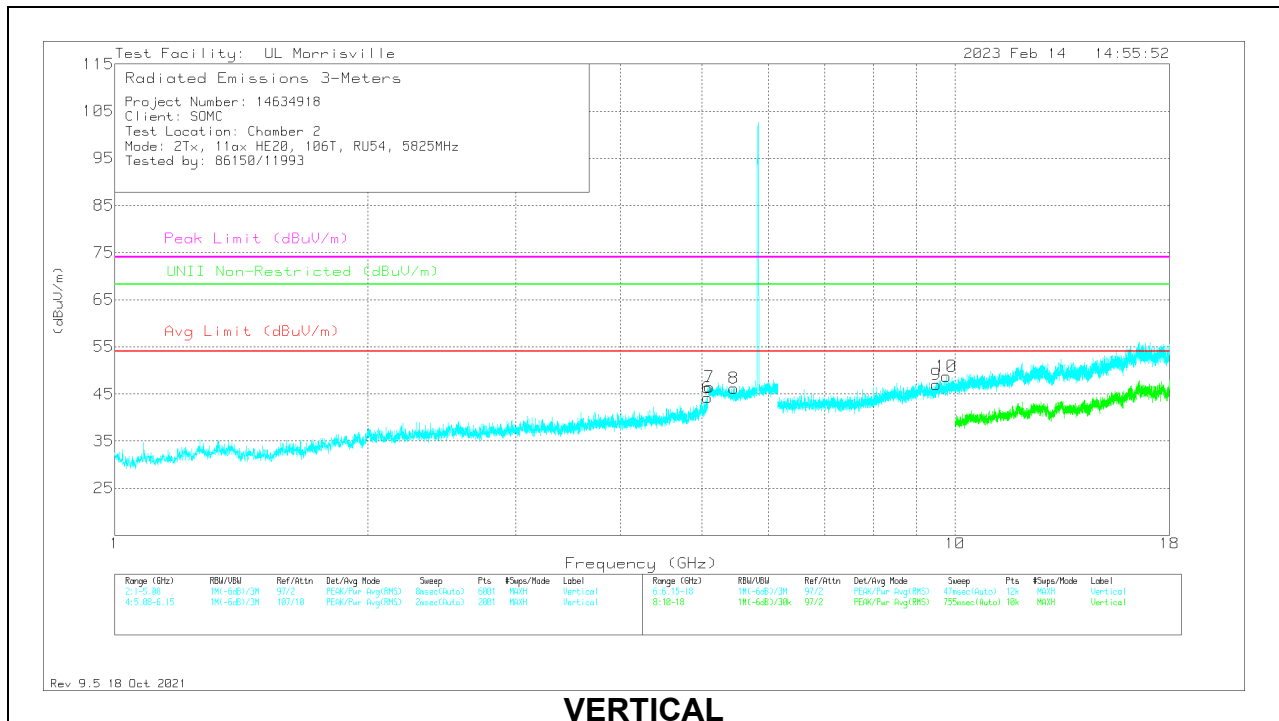

VERTICAL

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	206211 (dB/m)	Gain/Loss (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*** 5.06028	37.84	Pk	34.1	-28.8	0	43.14	54	-10.86	74	-30.86	-	-	0-360	199	H
6	*** 5.07184	38.92	Pk	34.1	-28.8	0	44.22	54	-9.78	74	-29.78	-	-	0-360	199	V
2	*** 5.09338	35.53	Pk	34.1	-22.7	0	46.93	54	-7.07	74	-27.07	-	-	0-360	199	H
3	*** 5.41866	35.79	Pk	34.4	-23.6	0	46.59	54	-7.41	74	-27.41	-	-	0-360	101	H
7	*** 5.10087	34.71	Pk	34.2	-22.4	0	46.51	54	-7.49	74	-27.49	-	-	0-360	199	V
8	*** 5.45397	35.07	Pk	34.4	-23.3	0	46.17	54	-7.83	74	-27.83	-	-	0-360	199	V
4	*** 9.47393	37.05	Pk	36.6	-26.2	0	47.45	54	-6.55	74	-26.55	-	-	0-360	200	H
9	*** 9.49565	36.04	Pk	36.6	-25.7	0	46.94	54	-7.06	74	-27.06	-	-	0-360	200	V
10	9.77209	37.73	PK-U	36.8	-25.6	0	48.93	-	-	-	-	68.2	-19.27	112	204	V
5	9.93726	37.81	PK-U	37.1	-25.3	0	49.61	-	-	-	-	68.2	-18.59	195	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

PK-U - Maximum Peak

2TX 242T MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

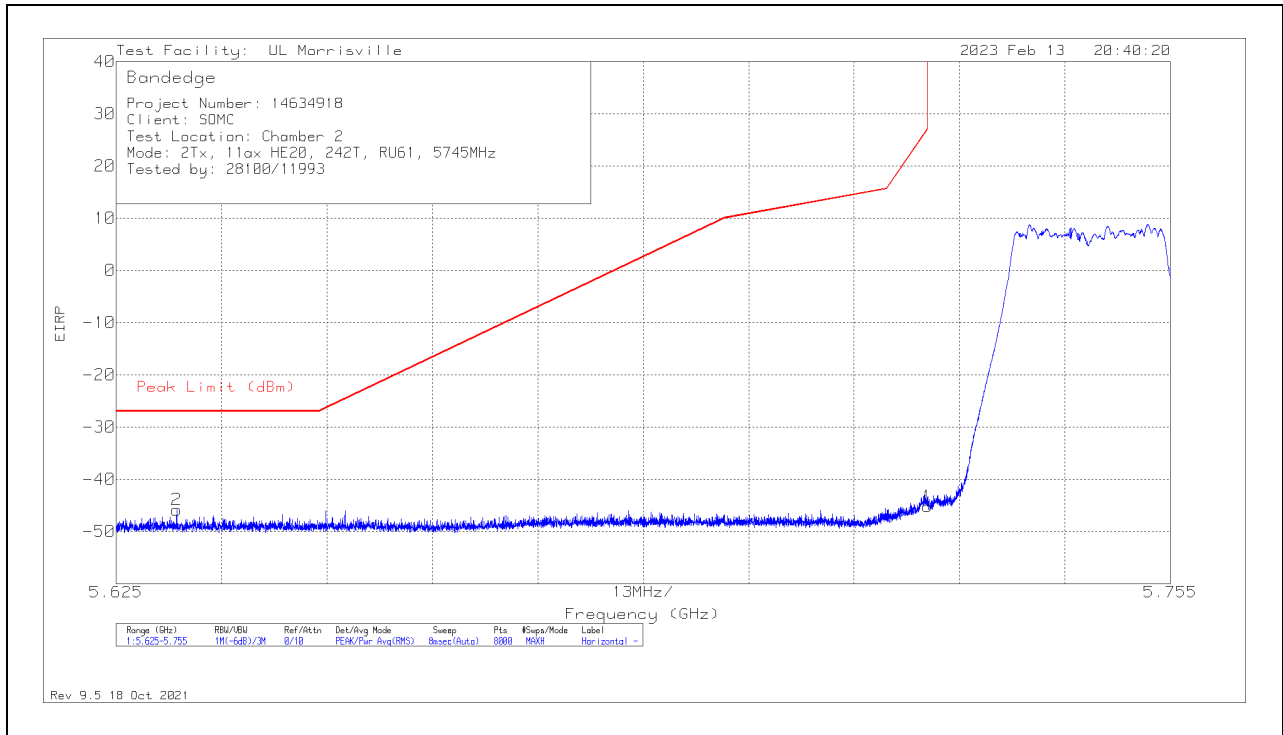


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63246	-68.65	Pk	34.5	-23.5	11.8	0	-45.85	-27	-18.85	334	121	H
1	5.725	-68.22	Pk	34.6	-23.4	11.8	0	-45.22	27	-72.22	334	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

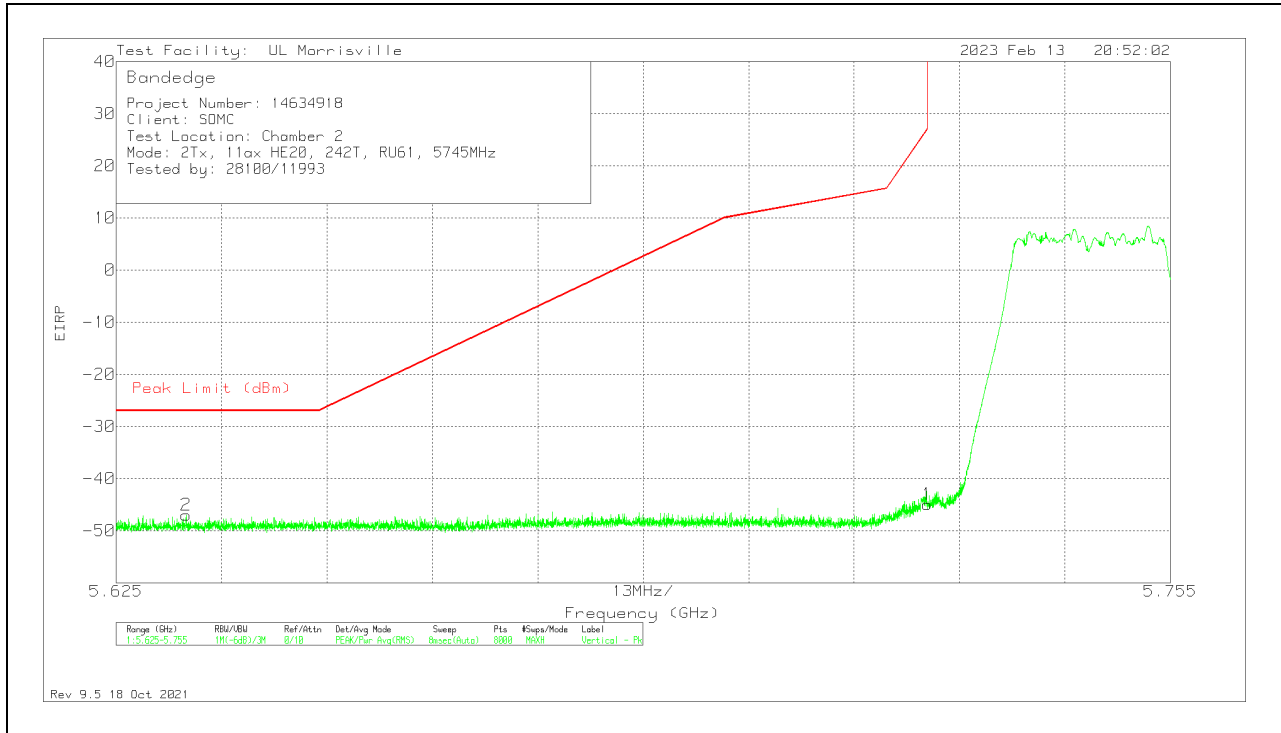

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.63363	-69.76	Pk	34.5	-23.5	11.8	0	-46.96	-27	-19.96	323	104	V
1	5.725	-67.91	Pk	34.6	-23.4	11.8	0	-44.91	27	-71.91	323	104	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

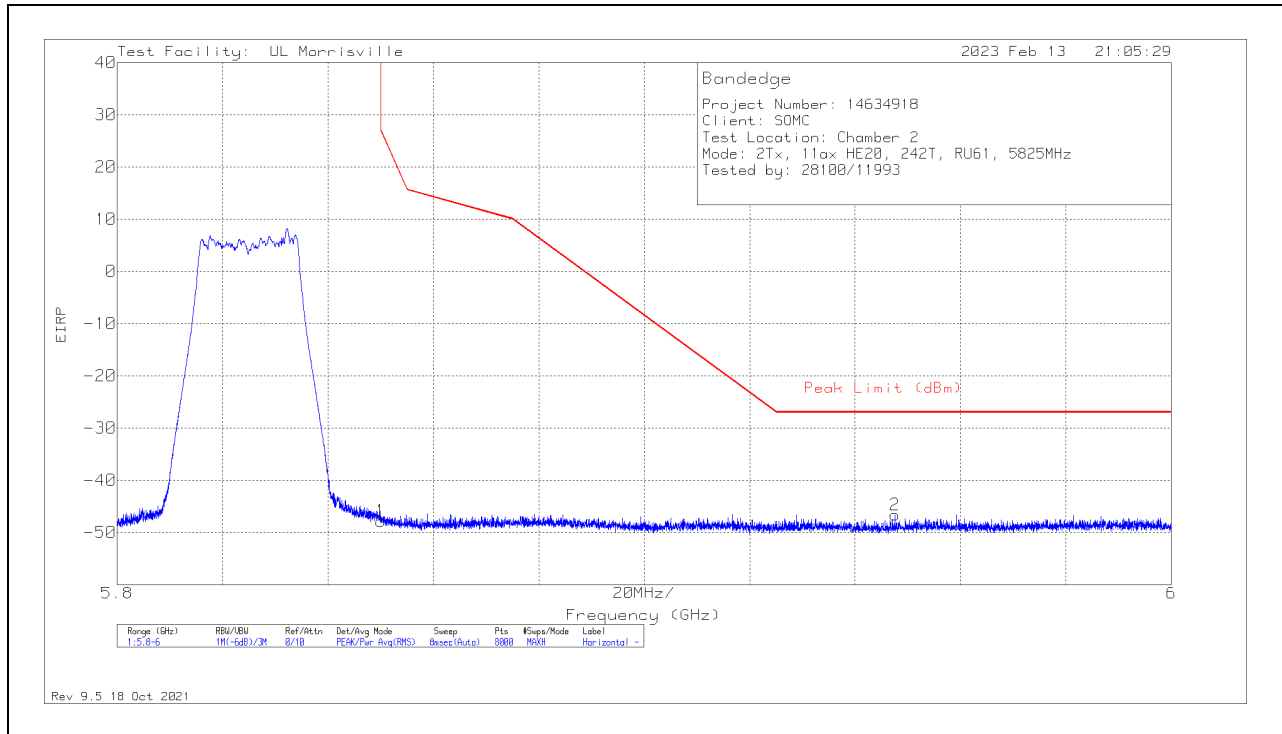


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-71.59	Pk	34.9	-22.9	11.8	0	-47.79	26.99	-74.78	344	116	H
2	5.94754	-70.74	Pk	35.1	-22.8	11.8	0	-46.64	-27	-19.64	344	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

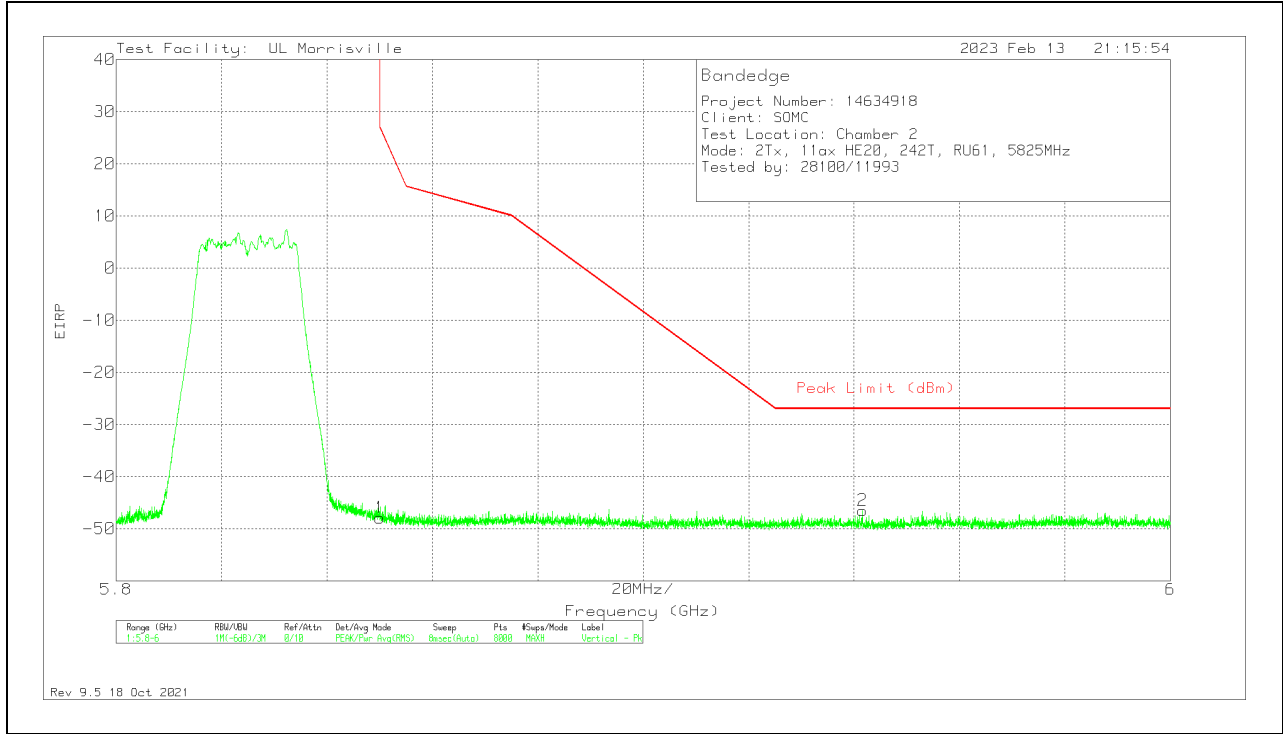

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85001	-71.7	Pk	34.9	-22.9	11.8	0	-47.9	26.99	-74.89	324	104	V
2	5.94159	-70.51	Pk	35.1	-22.9	11.8	0	-46.51	-27	-19.51	324	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band


Pk - Peak detector

10.1.2. 802.11ax HE40 MODE IN THE 5.8GHz BAND

2TX 484T MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

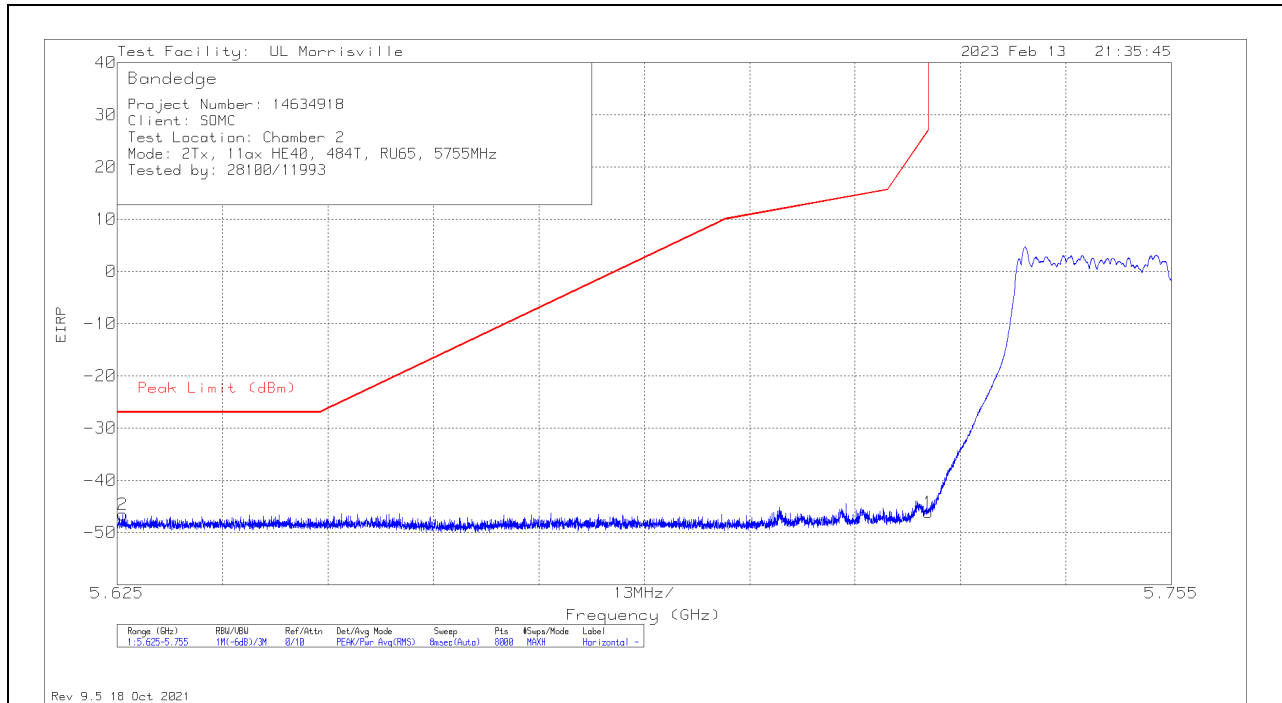


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.62567	-69.36	Pk	34.5	-23.5	11.8	0	-46.56	-27	-19.56	344	114	H
1	5.725	-69.16	Pk	34.6	-23.4	11.8	0	-46.16	27	-73.16	344	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

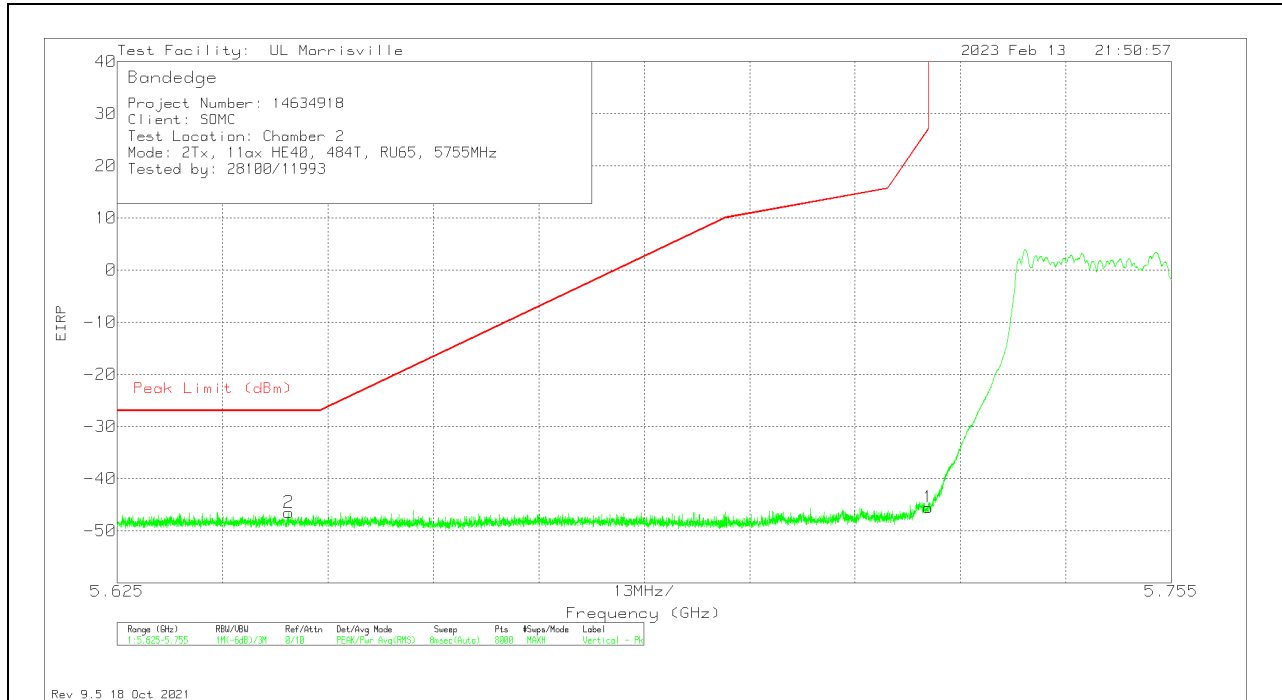


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64616	-69.39	Pk	34.5	-23.4	11.8	0	-46.49	-27	-19.49	324	101	V
1	5.725	-68.5	Pk	34.6	-23.4	11.8	0	-45.5	27	-72.5	324	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

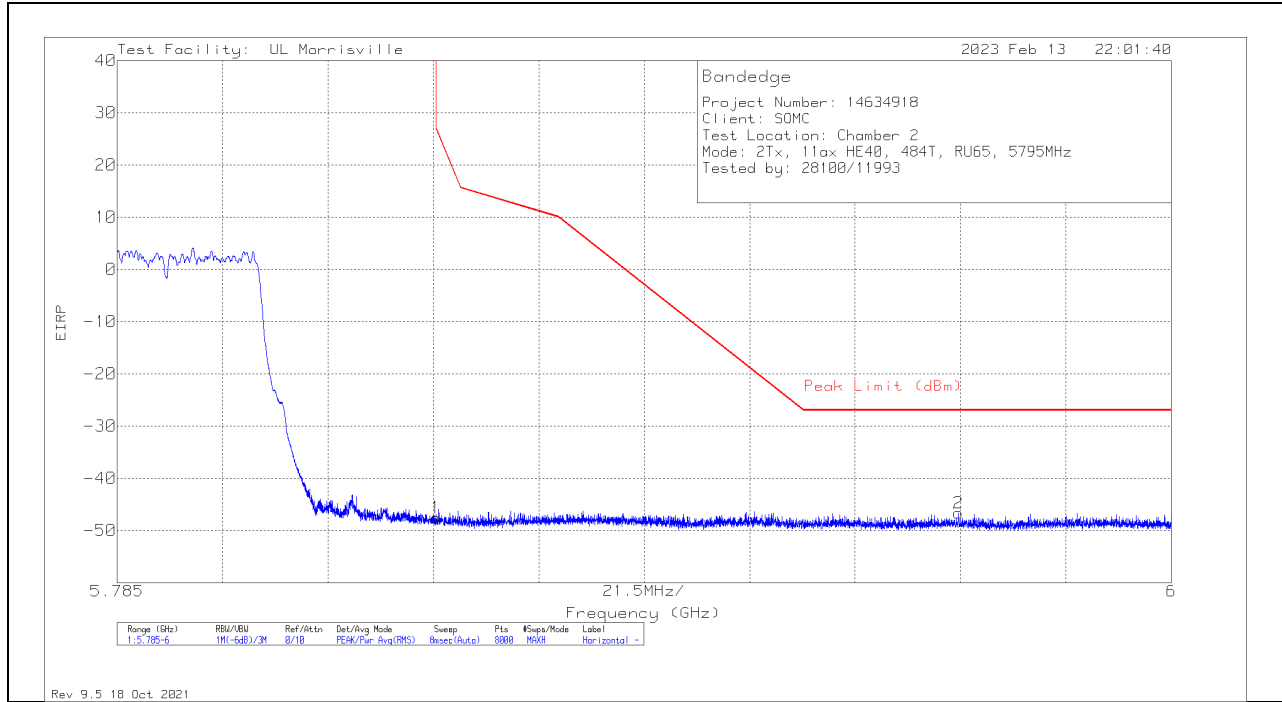


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-71.38	Pk	34.9	-22.9	11.8	0	-47.58	26.96	-74.54	336	113	H
2	5.95656	-71.05	Pk	35.1	-22.5	11.8	0	-46.65	-27	-19.65	336	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

** - indicates frequency in Taiwan NCC LP0002 Restricted Band

Pk - Peak detector

VERTICAL RESULT

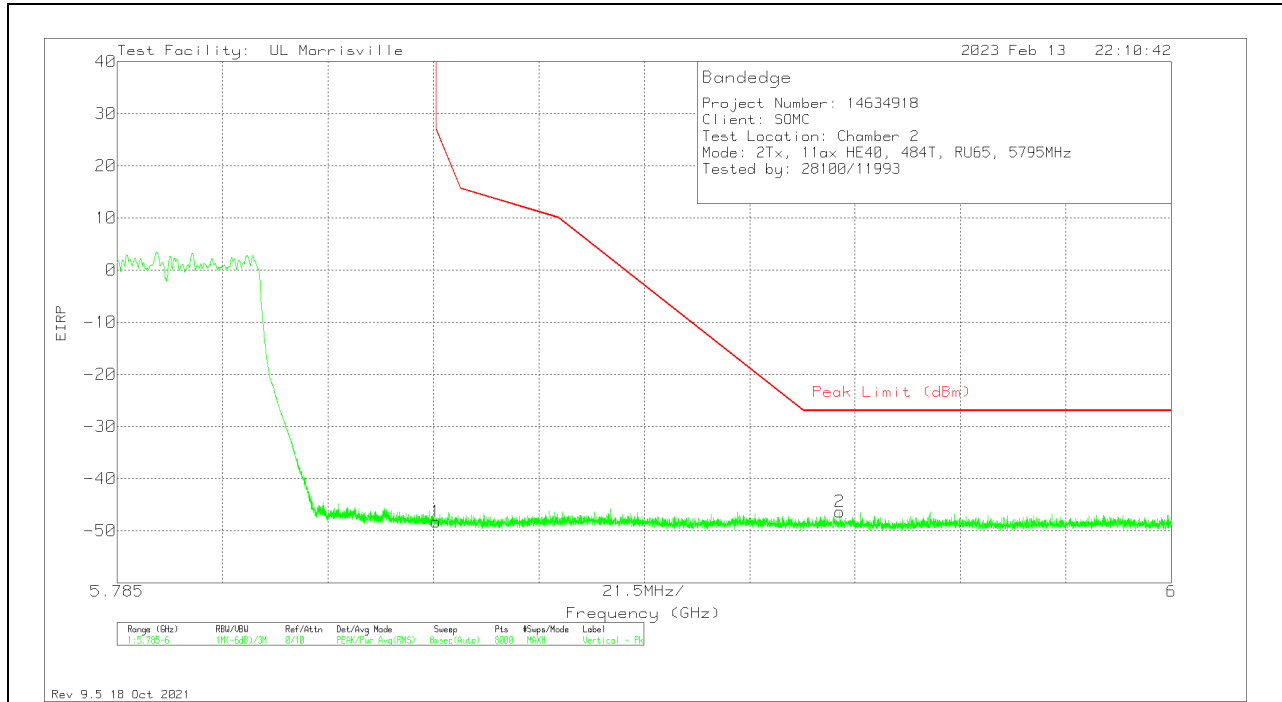

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	206211 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-72.05	Pk	34.9	-22.9	11.8	0	-48.25	26.96	-75.21	322	114	V
2	5.93237	-70.44	Pk	35.1	-22.8	11.8	0	-46.34	-27	-19.34	322	114	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 ** - indicates frequency in Taiwan NCC LP0002 Restricted Band
 Pk - Peak detector

10.1.3. 802.11ax HE80 MODE IN THE 5.8GHz BAND

2TX 996T MODE

BANDEDGE (CHANNEL 155 LOW EDGE)


HORIZONTAL RESULT

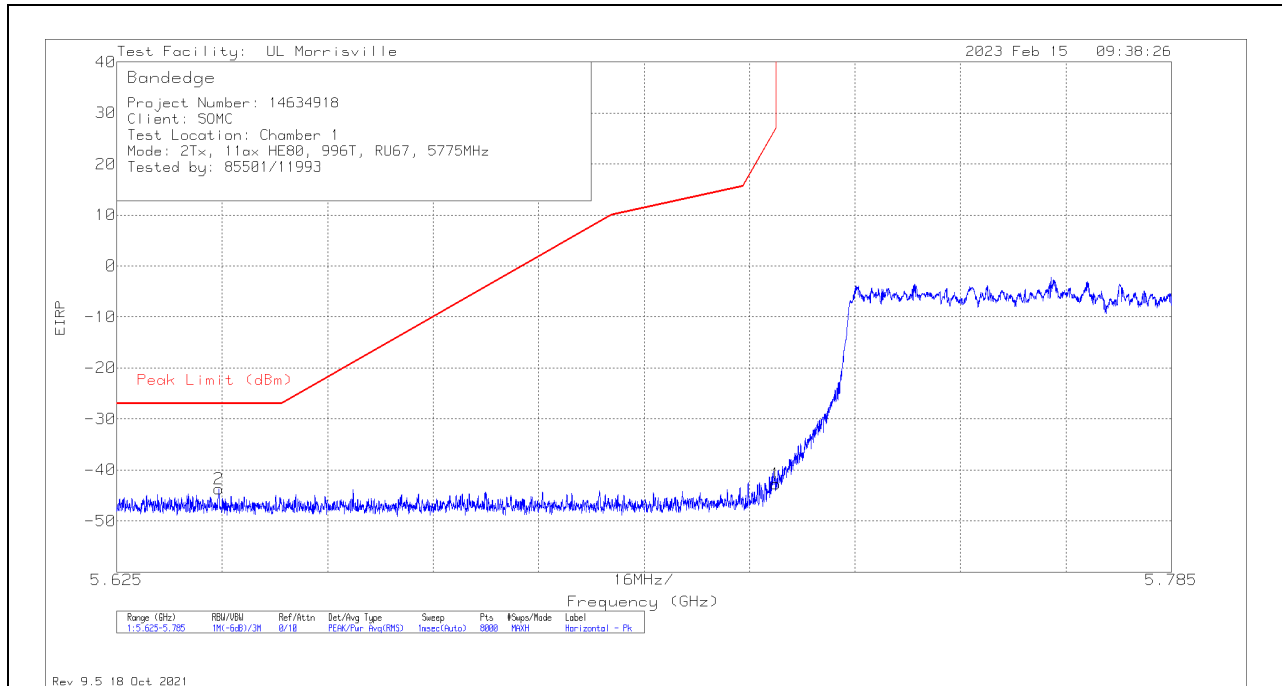

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64048	-67.65	Pk	34.7	-22.6	11.8	0	-43.75	-27	-16.75	196	290	H
1	5.725	-66.87	Pk	34.7	-22.4	11.8	0	-42.77	26.99	-69.76	196	290	H

Pk - Peak detector

VERTICAL RESULT

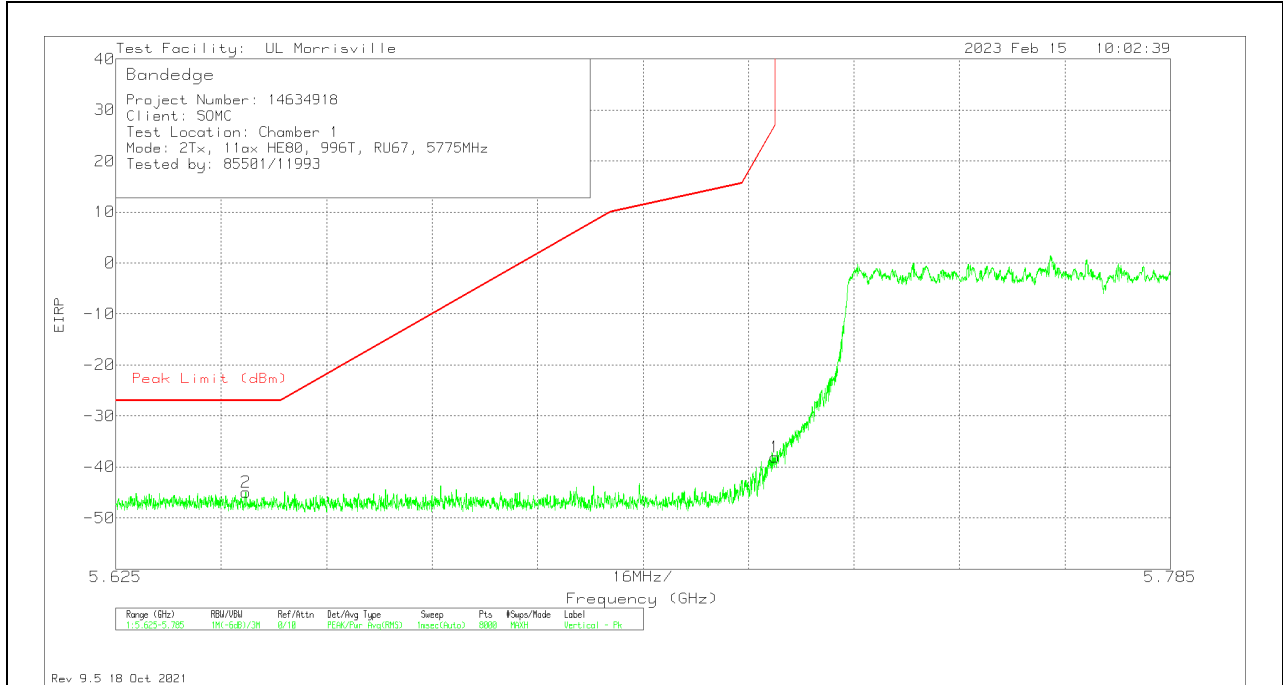


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	5.64472	-68.86	Pk	34.7	-22.6	11.8	0	-44.96	-27	-17.96	45	244	V
1	5.725	-62.12	Pk	34.7	-22.4	11.8	0	-38.02	26.99	-65.01	45	244	V

Pk - Peak detector

BANDEDGE (CHANNEL 155 HIGH EDGE)


HORIZONTAL RESULT

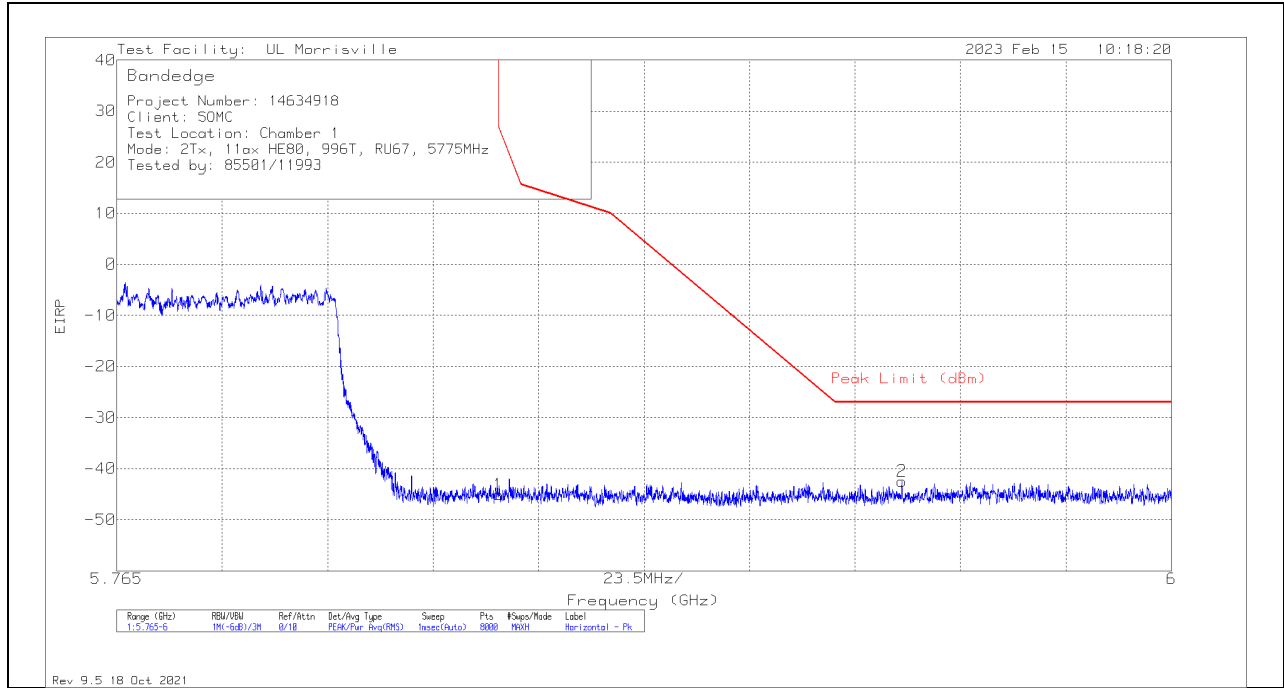

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-70.16	PK	34.9	-21.6	11.8	0	-45.06	26.95	-72.01	185	346	H
2	5.93995	-67.24	PK	35	-22	11.8	0	-42.44	-27	-15.44	185	346	H

Pk - Peak detector

VERTICAL RESULT

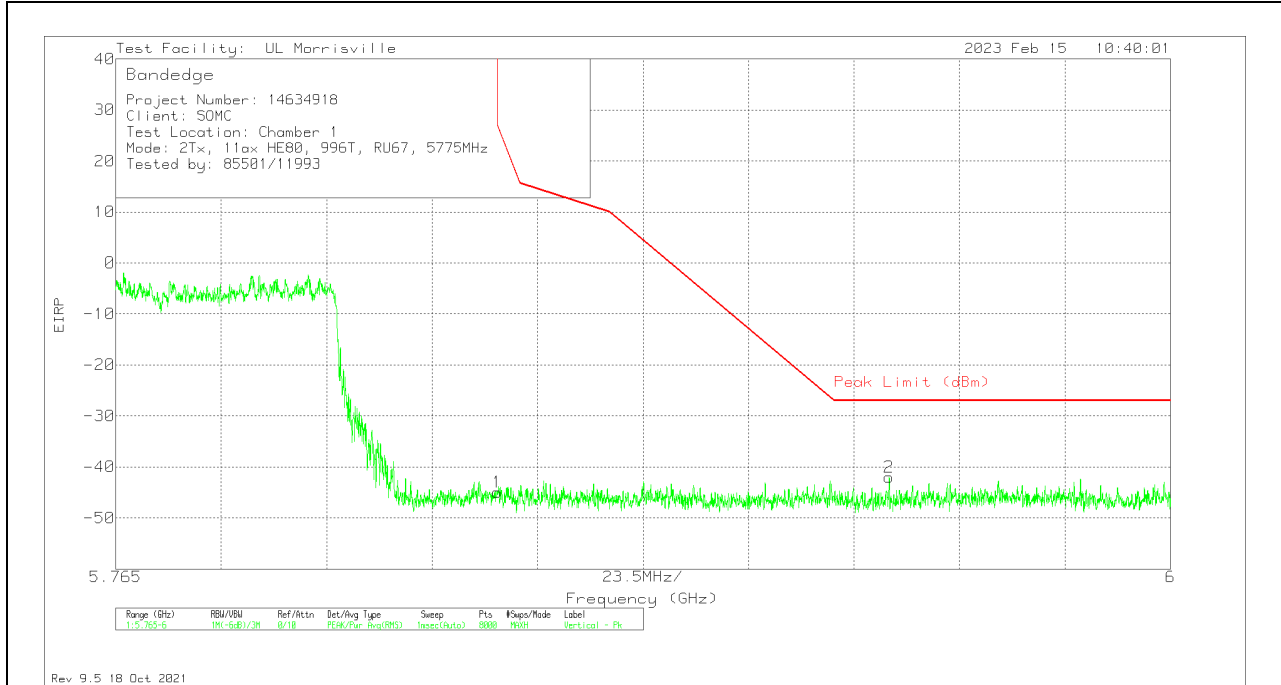

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AT0072 (dB/m)	Gain/Loss (dB)	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-70.04	Pk	34.9	-21.6	11.8	0	-44.94	26.95	-71.89	42	240	V
2	5.93734	-66.79	Pk	35	-22	11.8	0	-41.99	-27	-14.99	42	240	V

Pk - Peak detector

11. SETUP PHOTOS

Please refer to R14634918-EP5 for setup photos

END OF TEST REPORT