



SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

SAR Test Report: PY7A1021021

Date of test: Sep. 22 and 29, 2003

Laboratory: Electromagnetic Near Field and Radio Frequency Dosimetry Lab
Sonericsson Mobile Communications AB
Nya Vatentorget
SE-221 82 LUND, Sweden

Test Responsible: Hamid Kami Shirazi
Test Engineer, EMF & Safety
kami.shirazi@sonyericsson.com
+ 46 46 23 26 44

Statement of Compliance

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type AAB-1021021-BV ; FCC ID: PY7A1021021

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

© Sony Ericsson Mobile Communications AB, 2003

This test report shall not be reproduced except in full, without written approval of the laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.



Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

1 Table of contents

2 INTRODUCTION 3

3 DEVICE UNDER TEST 3

3.1 ANTENNA DESCRIPTION 3

3.2 DEVICE DESCRIPTION 3

4 TEST EQUIPMENT..... 4

4.1 DOSIMETRIC SYSTEM 4

4.2 ADDITIONAL EQUIPMENT 4

5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID 4

6 SYSTEM ACCURACY VERIFICATION 5

7 SAR MEASUREMENT UNCERTAINTY 6

8 TEST RESULTS 7

9 REFERENCES 8

10 APPENDIX..... 9

10.1 SAR DISTRIBUTION COMPARISON FOR SYSTEM ACCURACY VERIFICATION 9

10.2 SAR DISTRIBUTION PLOT 12

10.3 PHOTOGRAPHS OF THE DEVICE UNDER TEST..... 18

10.4 DEVICE POSITION ON SAM TWINS PHANTOM..... 22

10.5 PROBE CALIBRATION PARAMETERS..... 26

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

2 Introduction

In this test report, compliance of the Sony Ericsson PY7A1021021 portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR-measurement specifications used for the test are described in the *SAR Measurement of Wireless Specifications Handsets* [1].

3 Device Under Test

3.1 Antenna Description

Type	Internal antenna	
Location	Inside back, at the middle	
Dimensions	Max length	38mm
	Max width	14mm
Configuration	PIFA	

3.2 Device description

Device model	Z200
Serial number	TP8100026P
Mode	GSM 1900
Multiple Access Scheme	TDMA
Maximum Output Power Setting	29.7dBm
Factory Tolerance in Power Setting	± 0.3dB
Maximum Peak Output Power	30dBm
Crest Factor	8
Transmitting Frequency Range	1850.2 – 1909.8 MHz
Prototype or Production Unit	Preproduction
Device Category	Portable
RF exposure environment	General population / uncontrolled

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

<i>Description</i>	<i>Serial Number</i>	<i>Due Date</i>
DASY3 DAE V1	428	4/2004
E-field probe ETDV6	1585	4/2004
E-field probe ETDV6	1582	4/2004
Dipole Validation Kit, D1900 V2	5d002	2/2006

4.2 Additional equipment

<i>Description</i>	<i>Inventory Number</i>	<i>Due Date</i>
Signal generator ESG-D4000A	INV 462935	9/2004
Directional coupler HP778D	INV 2903	1/2004
Power meter R&S NRVD	INV 483920	1/2004
Power sensor R&S NRV-Z5	INV 2333	1/2004
Power sensor R&S NRV-Z5	INV 2334	1/2004
Termination 65N50-0-11	INV 2903	1/2004
Network analyzer HP8753C	INV421671	8/2004
S-parameter test set HP85047A	INV 421670	9/2004
Dielectric probe kit HP8507D	INV 2000053	2/2004

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 software is also given. Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

Application Note: The head and body tissue dielectric parameter recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table is prepared according to the following receipts. **For 1900MHz Head: Water 54.9%, Salt 0.18% and DGBE 44.92%, For 1900MHz Body: Water 56.1%, DGBE 33.4%, Salt 0.5%,**

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
1900	Head	Measured, 22/09/03	38.0	1.47	1.0
		Recommended	40.0	1.4	1.0
	Muscle	Measured, 29/09/03	50.4	1.52	1.0
		Recommended	53.3	1.52	1.0

6 System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature (24.4-24.8 °C) and humanity 40%. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.0008mW/g in 1g mass.

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g mass	Dielectric Parameters			t (°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
1900	Head	Measured, 15/09/03	44.9	38.0	1.47	1.0	22.4
		Reference	41.6	38.8	1.44	1.0	-
	Muscle	Measured, 16/09/03	43.3	50.4	1.52	1.0	22.4
		Reference	43.2	51.2	1.59	1.0	-



Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

7 SAR measurement uncertainty

Error description	Uncertainty (%)	Distribution	Divisor	c_i 1g	Standard Uncertainty Head	Standard Uncertainty Body
Measurement system						
Probe calibration	±4.4	Normal	1	1	±4.4	±4.4
Axial isotropy	±4.7	Rectangular	√3	$(1-c_p)^{1/2}$	±1.9	±1.9
Spherical isotropy	±9.6	Rectangular	√3	$(c_p)^{1/2}$	±3.9	±3.9
Spatial resolution	±0.0	Rectangular	√3	1	±0.0	±0.0
Boundary effects	±5.5	Rectangular	√3	1	±3.2	±3.2
Probe linearity	±4.7	Rectangular	√3	1	±2.7	±2.7
Detection limit	±1.0	Rectangular	√3	1	±0.6	±0.6
Readout electronics	±1.0	Normal	1	1	±1.0	±1.0
Response time	±0.8	Rectangular	√3	1	±0.5	±0.5
Integration time	±1.4	Rectangular	√3	1	±0.8	±0.8
RF ambient conditions	±3.0	Rectangular	√3	1	±1.7	±1.7
Mech. Constraints of robot	±0.4	Rectangular	√3	1	±0.2	±0.2
Probe positioning	±2.9	Rectangular	√3	1	±1.7	±1.7
Extrap. and integration	±3.9	Rectangular	√3	1	±2.3	±2.3
					±8.3	±8.3
Test sample related						
Device positioning	±6.0	Normal	0.89	1	±6.7	±6.7
Device holder	±5.0	Normal	0.84	1	±5.9	±5.9
Power drift	±3.3/1.6	Rectangular	√3	1	±1.9	±0.9
					±9.1	±9
Phantom and setup						
Phantom uncertainty	±4.0	Rectangular	√3	1	±2.3	±2.3
Liquid conductivity (target)	±5.0	Rectangular	√3	0.6	±1.7	±1.7
Liquid conductivity (meas)	-5/0	Rectangular	√3	0.6	±1.7	0
Liquid permittivity (target)	±5.0	Rectangular	√3	0.6	±1.7	±1.7
Liquid permittivity (meas)	-5/-5	Rectangular	√3	0.6	±1.7	±1.7
Phantom and Tissue parameter Uncertainty					±4.2	±3.7
Combined standard uncertainty					±13	±12.8
Extended standard uncertainty(k=2)					±26	±25.6



SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

8 Test results

The measured 1-gram averaged SAR values of the device against the head and the body are provided in Tables 1 and 2 respectively. The humidity and ambient temperature of test facility were 40% - 45.8% and 24.5 °C – 24.8 °C respectively. The depth of the head tissue simulating liquid was 15.2cm and of the muscle tissue simulating liquid was 15.3cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg). For GSM 1900 modes, the device was tested at the lowest, middle and highest frequencies in the transmit band.

Mode	Channel	Peak Output Power (dBm)	Phone Position	Liquid temp(°C)	SAR (W/kg) in 1g mass	
					Right-hand	Left-hand
1900 GSM	512	30	Cheek	22.5/22.5	1.34	1.06
			Tilt	22.4/22.5	0.36	0.39
	661	30	Cheek	22.6/22.6	1.11	1.02
			Tilt	22.5/22.3	0.39	0.30
	810	30	Cheek	22.5/22.3	1.09	0.34
			Tilt	22.3/22.3	0.35	0.96

Table1: SAR measurement result for Sony Ericsson PY7A1021021 telephone. Measured against the head.

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put in a belt holder Sony Ericsson product and measurement provides for both front and back part the phone to the phantom, and also the same measurements has done without belt holder but with 15mm distance from the flat section of the phantom.

Mode	Channel	Peak Output Power(dBm)	Phone Position	Liquid temp(°C)	SAR(W/kg) in 1g mass
1900 GSM	512	30	Front to Ph Belt holder	22.4	0.12
			Back to Ph Belt holder	22.8	0.35
			Front to Ph 15mm distance	22.4	0.14
			Back to Ph 15mm distance	22.4	0.29
	661	30	Front to Ph Belt holder	22.8	0.10
			Back to Ph Belt holder	22.8	0.24
			Front to Ph 15mm distance	22.4	0.11
			Back to Ph 15mm distance	22.4	0.24
	810	30	Front to Ph Belt holder	22.8	0.07
			Back to Ph Belt holder	22.8	0.26
			Front to Ph 15mm distance	22.4	0.11
			Back to Ph 15mm distance	22.4	0.20

Table 2: SAR measurement result for Sony Ericsson PY7A1021021 telephone. Measured against the body.



Sony Ericsson

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

9 References

[1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson internal document LD/SEMC/GUG/N 03:141

[2] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97- 01).

[3] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wirelles Communications Devices: Experimental Techniques," Std 1528-200x, Draft 6.5 – August 20, 2001.

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev


A

Reference

File

10 Appendix

10.1 SAR distribution comparison for system accuracy verification

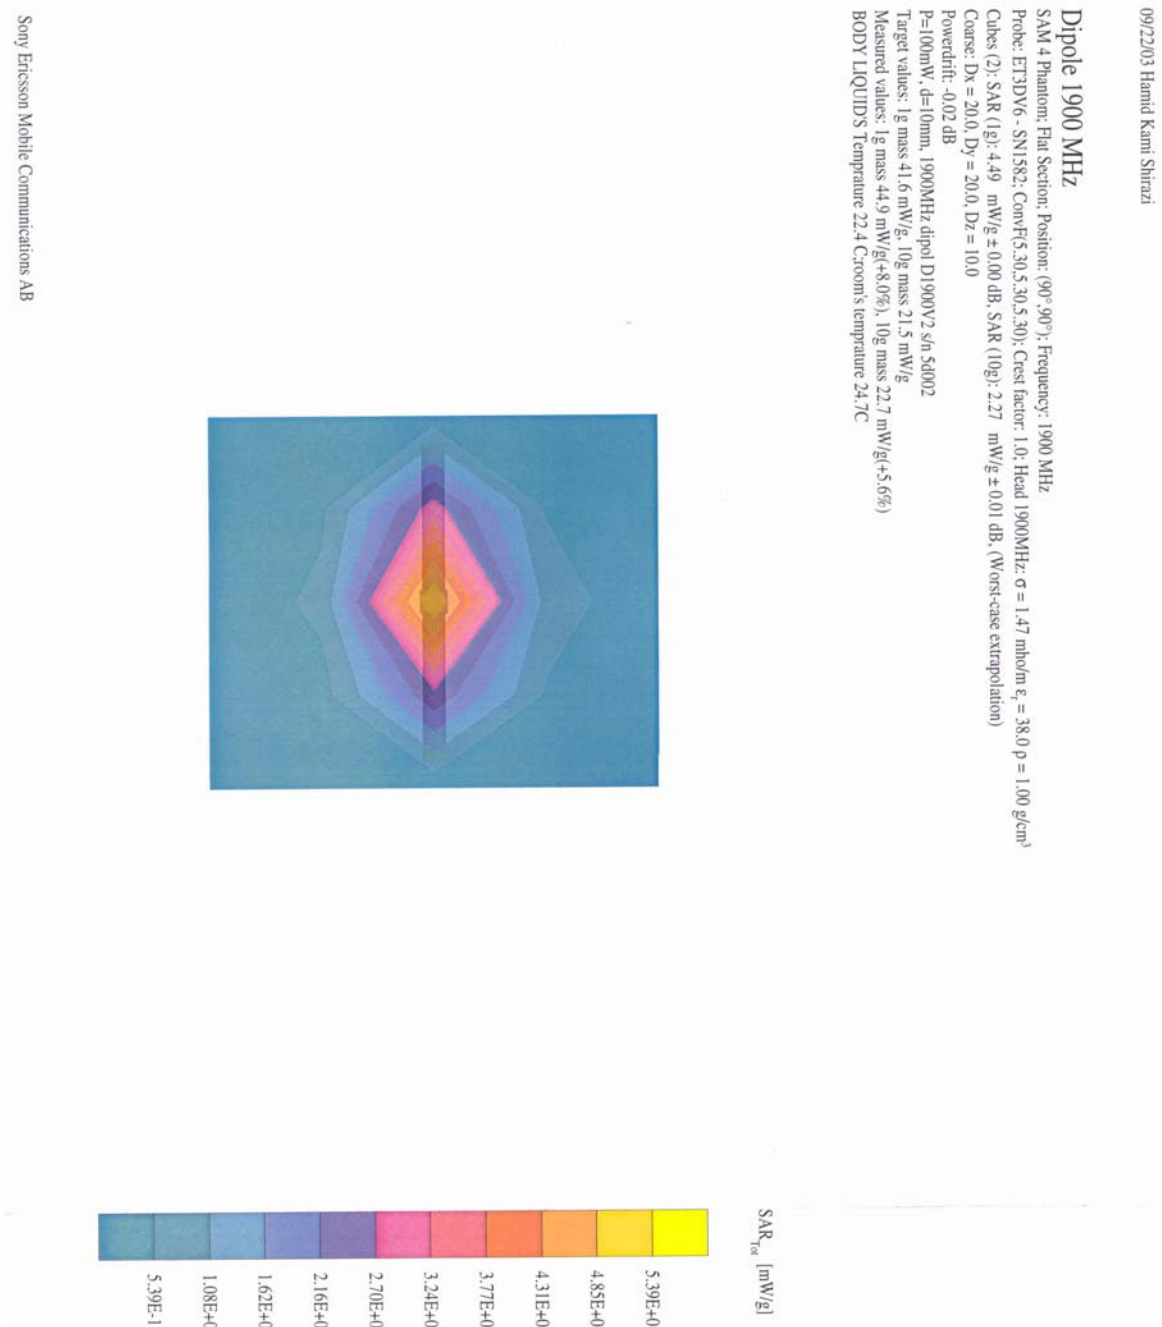

Validation Dipole, measured with head simulating tissue on 22/09/03

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson
031003
031001
A
File

Date/Time: 04/09/03 18:49:39


 Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: [SN5d002_SN1507_HSL1900_090403.da4](#)
DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN5d002
Program: Dipole Calibration

 Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium: HSL 1900 MHz ($\sigma = 1.44$ mho/m, $\epsilon_r = 38.78$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.2, 5.2, 5.2); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 95.2 V/m
 Peak SAR = 18.2 W/kg
 SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.38 mW/g
 Power Drift = 0.01 dB

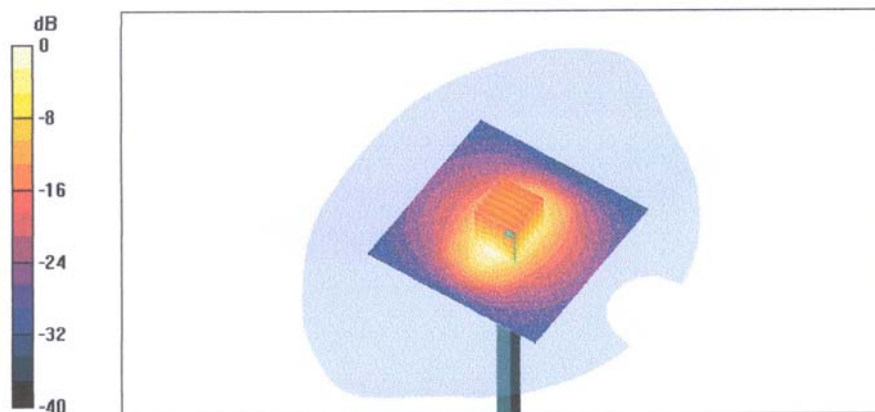
1900MHz SAR distribution of validation dipole from reference measurement with head simulating tissue.

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A


Reference

File

09/29/03 Hamid Kami Shirazi

Dipole 1900 MHz

SAMI 4 Phantom; Flat Section; Position: (90°, 90°); Frequency: 1900 MHz
 Probe: ET3DY6 - SN1582; ConvF(5.00,5.00,5.00); Crest factor: 1.0; Muscle 1900: $\sigma = 1.52$ mho/m; $\epsilon_r = 50.4$; $p = 1.00$ g/cm³
 Cubes (2): SAR (1g): 4.33 mW/g ± 0.00 dB, SAR (10g): 2.24 mW/g ± 0.00 dB, (Worst-case extrapolation)
 Coarse: Dx = 20.0, Dy = 20.0, Dz = 10.0
 Powerdrit: -0.02 dB
 P=100mW, d=10mm, 1900MHz dipol D1900V2 s/n 54002
 Target values: 1g mass 43.2 mW/g, 10g mass 22.4 mW/g
 Measured values: 1g mass 43.3 mW/g($\pm 0.2\%$), 10g mass 22.4 mW/g($\pm 0\%$)
 BODY LIQUIDS Temperature 22.4 C ; Room's Temperature 24.7

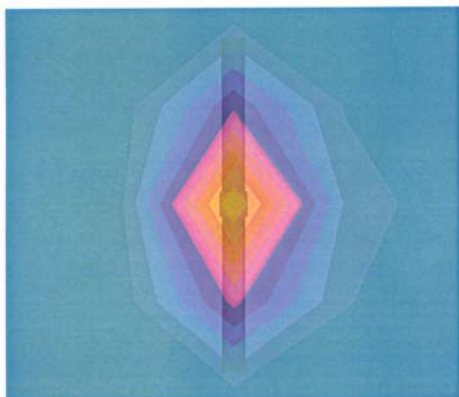
Validation Dipole, measured with muscle simulating tissue on 29/09/03

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

Date/Time: 04/08/03 12:31:50

 Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: [SN5d002_SN1507_M1900_080403.da4](#)
DUT: Dipole 1900 MHz; Serial: D1900V2 - SN5d002
Program: Dipole Calibration

 Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium: Muscle 1900 MHz; ($\sigma = 1.59$ mho/m, $\epsilon_r = 51.2$, $\rho = 1000$ kg/m³)
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.8, 4.8, 4.8); Calibrated: 1/18/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 33; Postprocessing SW: SEMCAD, V1.6 Build 109


Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.8 V/m

Peak SAR = 18.9 W/kg

SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.6 mW/g

Power Drift = 0.02 dB

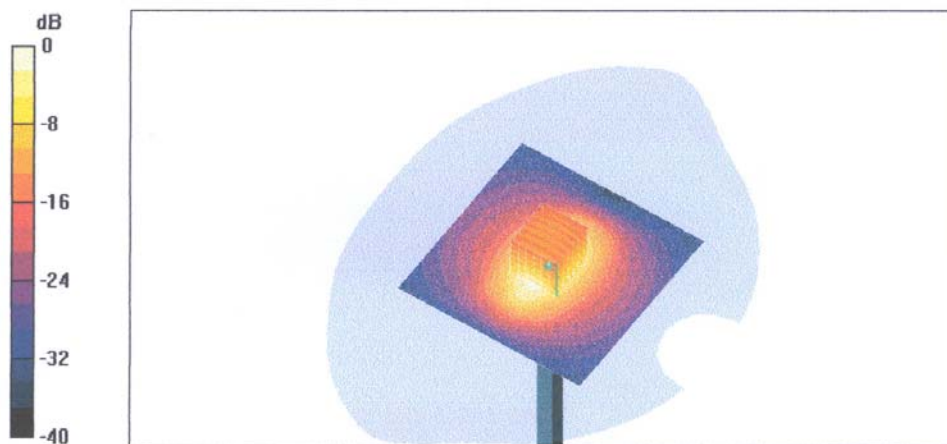
1900MHz SAR distribution of validation dipole from reference measurement with muscle simulating tissue.

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

No.

LD/SEMC/BGUG/NM Hamid Kami Shirazi

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson


031003

031001

A

File

10.2 SAR distribution plot

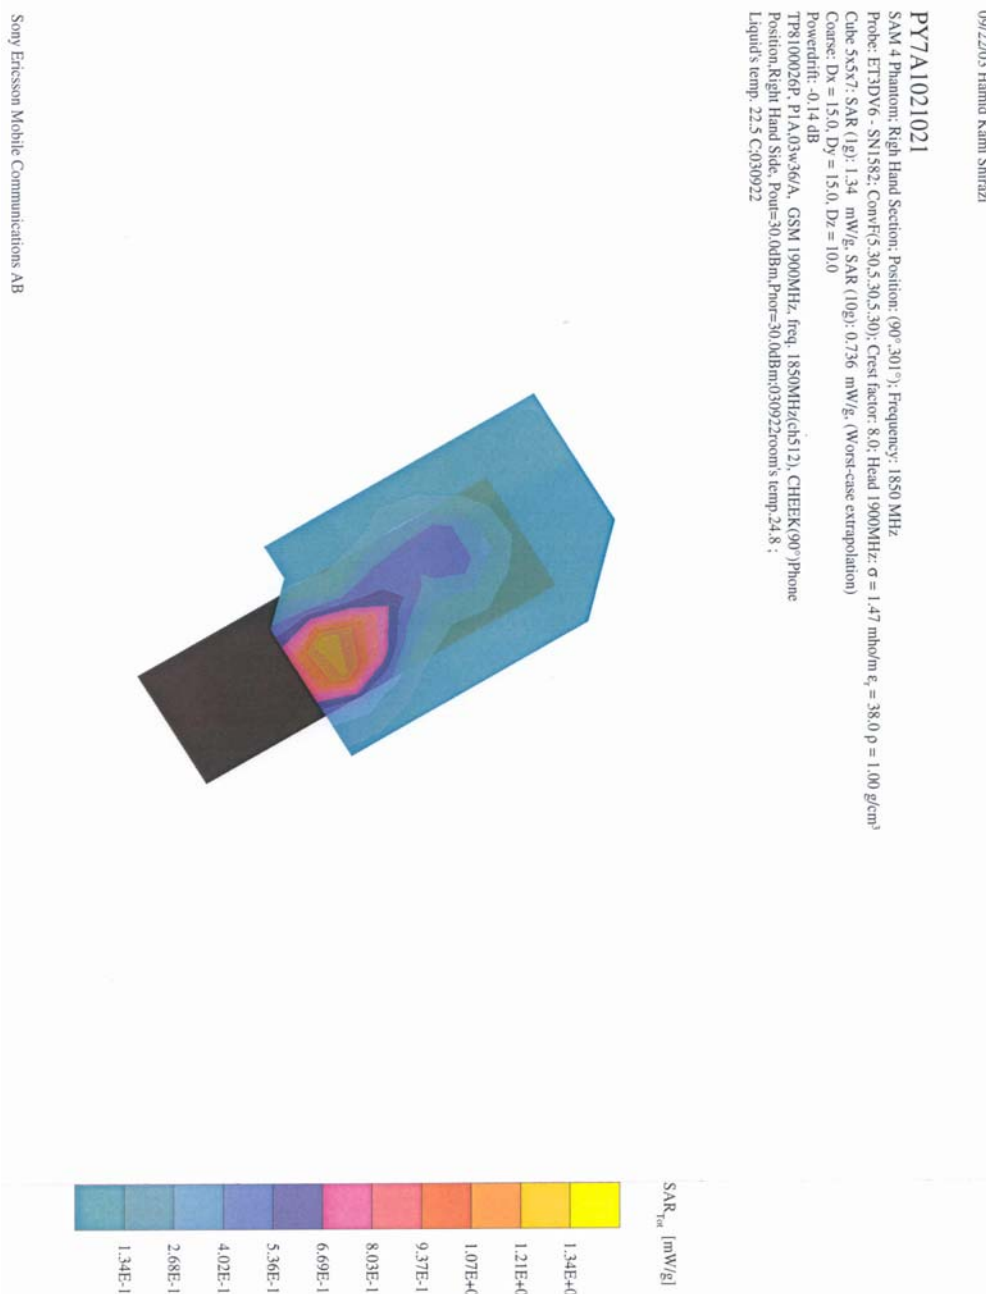

Distribution of max SAR in GSM 1900 mode at ch512. Measured against the head for Cheek phone position.

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

No.

LD/SEMC/BGUG/NM Hamid Kami Shirazi

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson


031003

031001

A

File

Sony Ericsson Mobile Communications AB

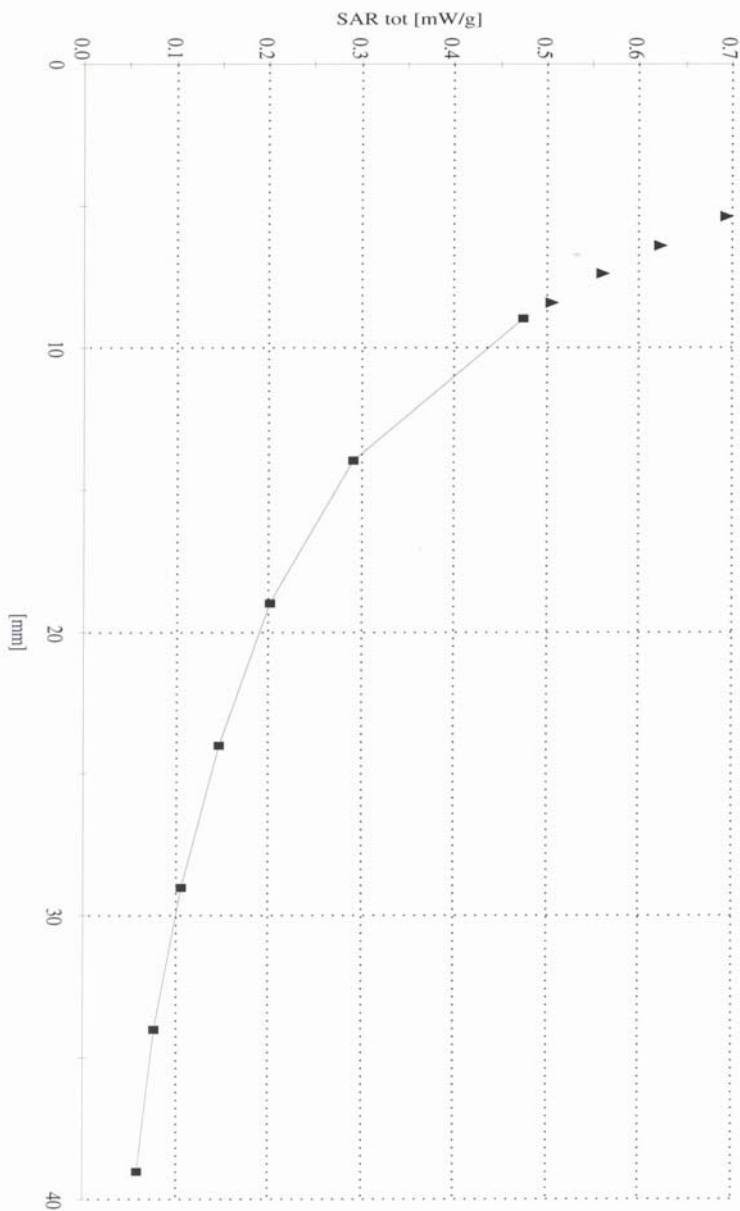

PY7A1021021
 SAM 4 Phantom; Right Hand Section; Position: (90°, 301°); Frequency: 1850 MHz
 Probe: ET3DV6 - SNI582; ConvF(5, 30, 5, 30, 5, 30); Crest factor: 8.0; Head 19000MHz; $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 1.34 mW/g; SAR (10g): 0.736 mW/g. (Worst-case extrapolation)
 Cube 5x5x7; Dx = 8.0, Dy = 8.0, Dz = 5.0

09/22/03 Hamid Kami Shirazi

Z(x) distribution of max SAR in GSM1900 mode at ch512. Measured against the head for Cheek phone position.

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A


Reference

File

09/29/03 Hamid Kami Shirazi

PY7A1021021

SAM 4 Phantom; Flat Section; Position: (90° 270°); Frequency: 1850 MHz
 Probe: ET3DV6 - SNI582; ConvF(5.00,5.00,5.00); Crest Factor: 8.0; Muscle 1900; $\sigma = 1.52$ mho/m $\epsilon_r = 50.4$ $\rho = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 0.353 mW/g; SAR (10g): 0.209 mW/g; (Worst-case extrapolation)
 Course: Dx = 10.0, Dy = 20.0, Dz = 10.0
 Powerdft: -0.07 dB
 TP8100026F; P1A03w36/A; GSM 1900MHz; freq: 1850MHz/ch512; Flat Phantom
 Position: Back Side Phone; in the Bellholder; Powe=30.0dBm; Proj=30.0dBm;030929
 Room's temp: 24.4 ; Liquid's temp: 22.8 C

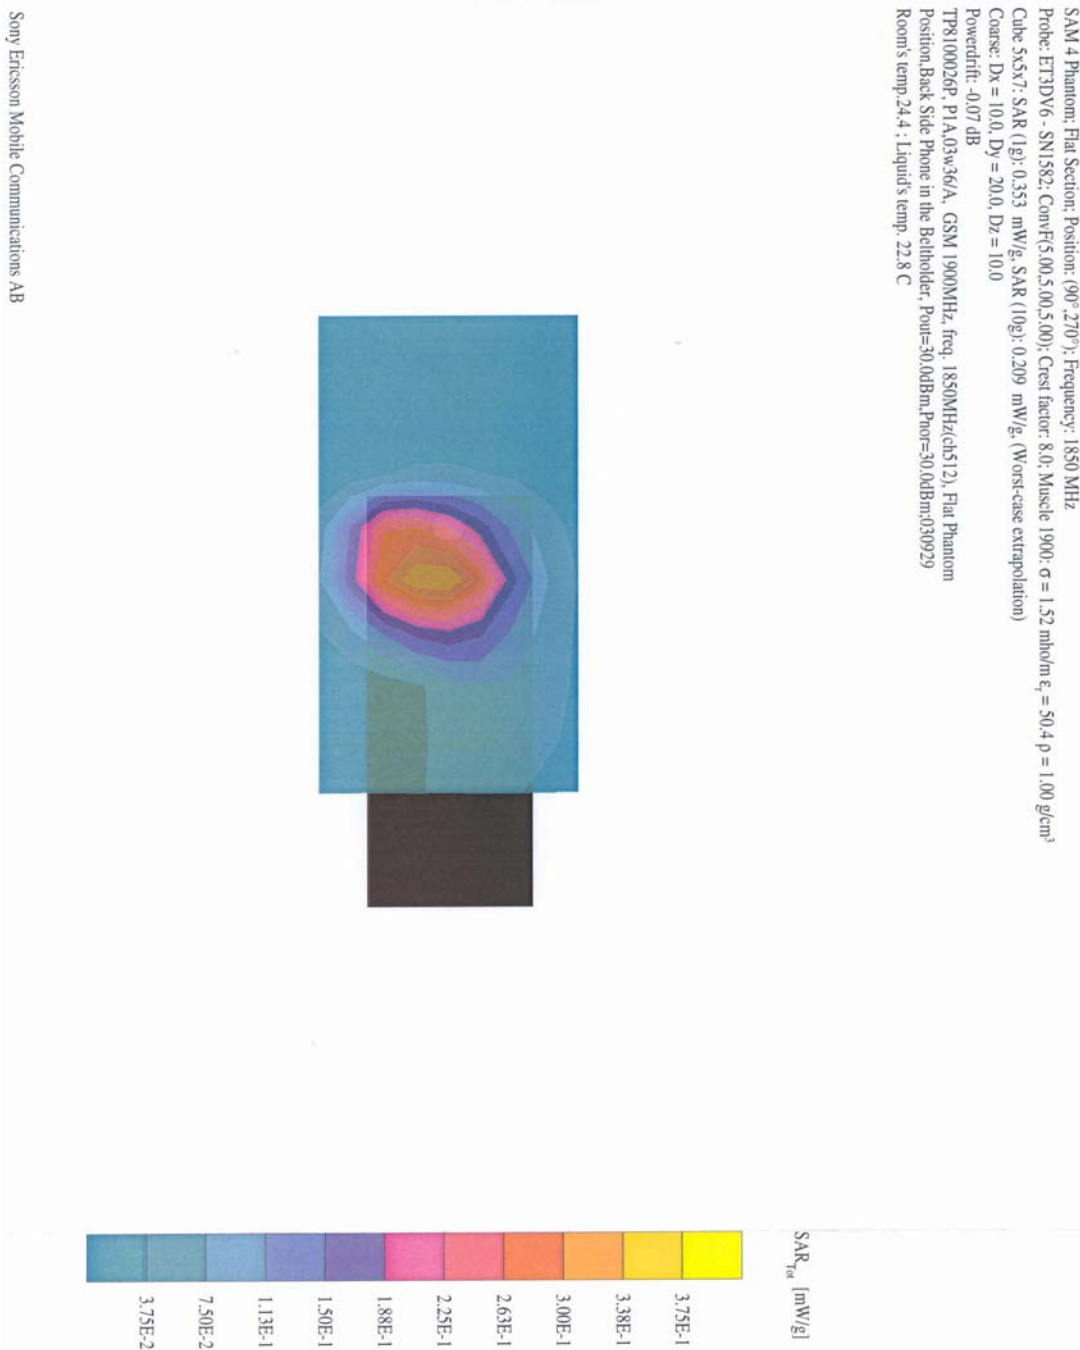

Sony Ericsson Mobile Communications AB

Distribution of max SAR in GSM1900 mode at ch512. Measured against the body for back phone side to the phantom .

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A


Reference

File

09/29/03 Hamid Kami Shirazi

PY7A1021021

SAM 4 Phantom; Flat Section; Position: (90° 270°); Frequency: 1850 MHz
 Probe: ET3DV6 - SNI582; ConvF(5.00,5.00,5.00); Crest factor: 8.0; Muscle 1900; $\sigma = 1.52$ mho/m; $\epsilon_r = 50.4$ $\rho = 1.00$ g/cm³
 Cube 5x5x7; SAR (1g): 0.353 mW/g; SAR (10g): 0.209 mW/g; (Worst-case extrapolation)
 Cube 5x5x7; Dx = 8.0; Dy = 8.0; Dz = 5.0

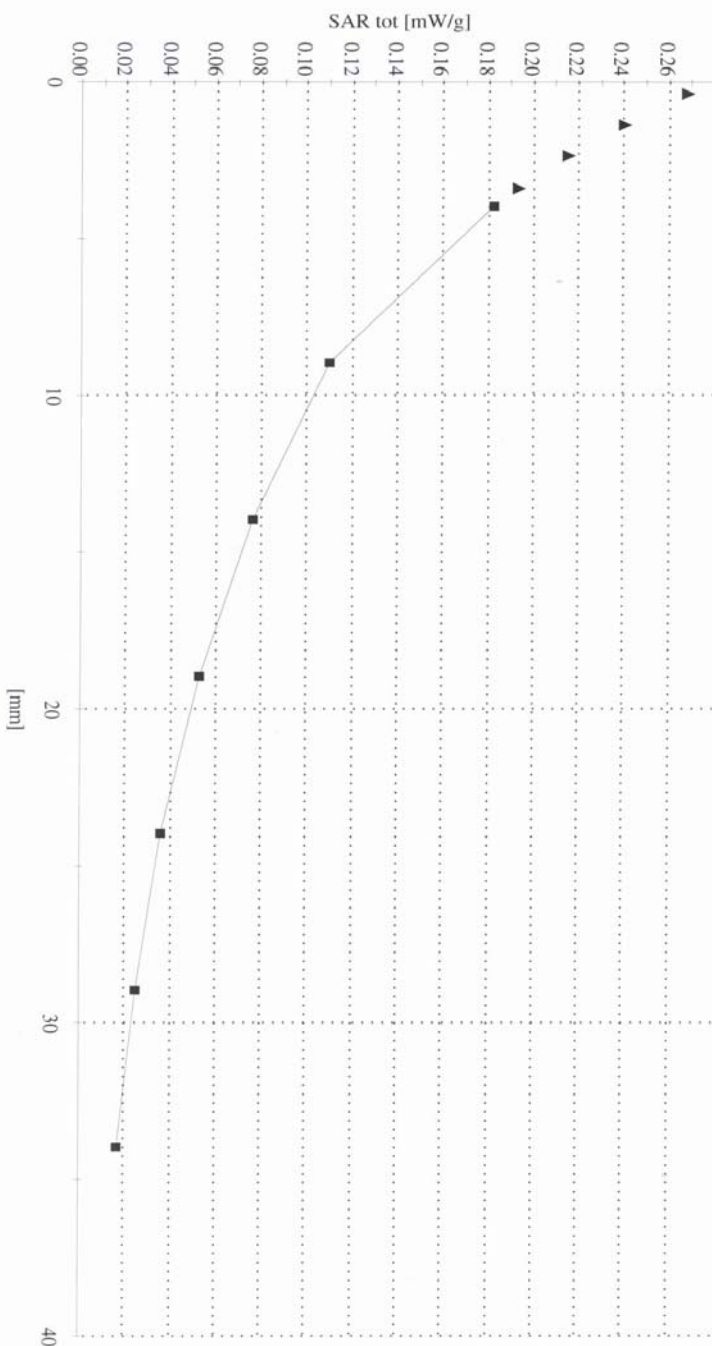

Sony Ericsson Mobile Communications AB

Z(x) distribution of max SAR in GSM1900 mode at ch512. Measured against the body .

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

10.3 Photographs of the device under test



1-Front and Back side

**SecurityClass
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File



2-Front and Back side

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File



Left and Right side

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File



Battery and
Back side

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File

10.4 Device position on SAM Twins Phantom



Device position against the head: Cheek (touch) phone position

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File



Device position against the head: Tilt (cheek+15deg) phone position

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date

031001

Rev

A

Reference

File



Device position against the body: Phone with belt holder under phantom and hand free connection.

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference


LD/SEMC/BGUG/NMC Mats Hansson

031003

031001

A

File

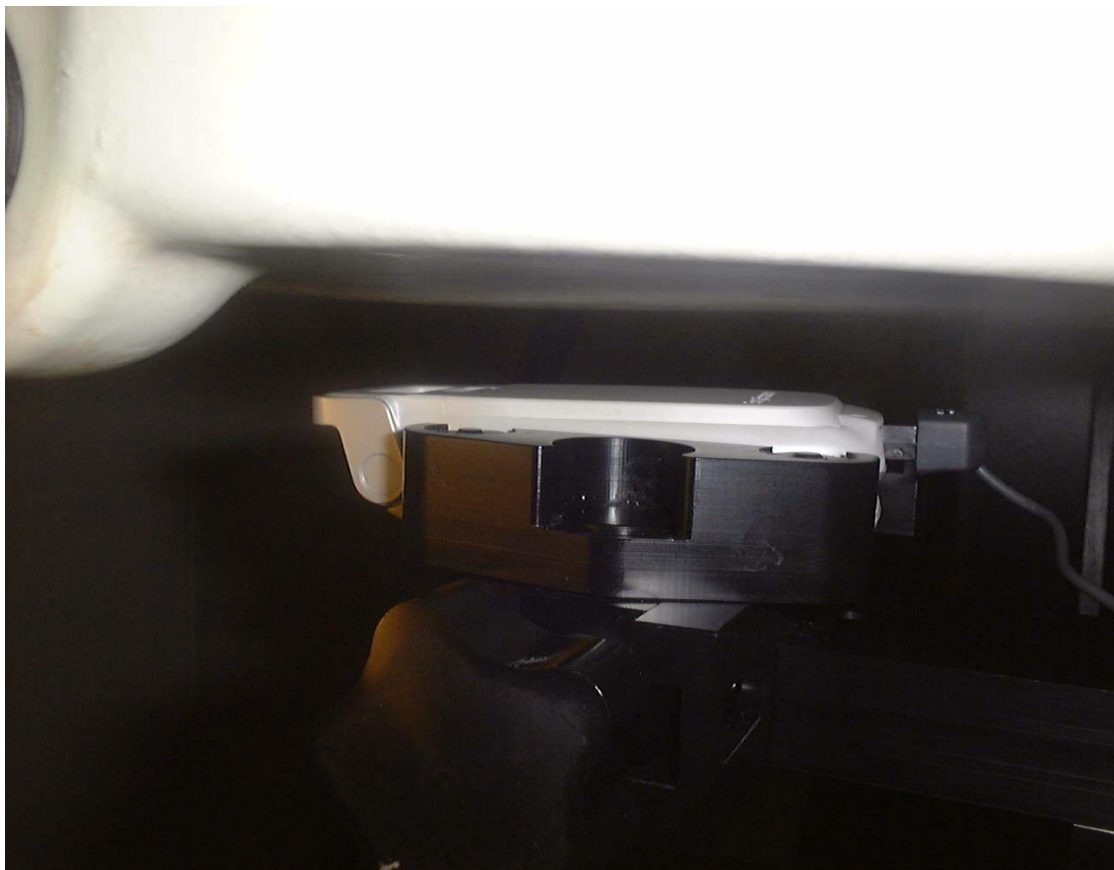

Device position against the body: Back side Phone with 15mm distance under phantom and hand free connection.

SecurityClass
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

Approved

LD/SEMC/BGUG/NMC Mats Hansson

Checked

031003

No.

GUG/N 03:314

Date


031001

Rev

A

Reference

File

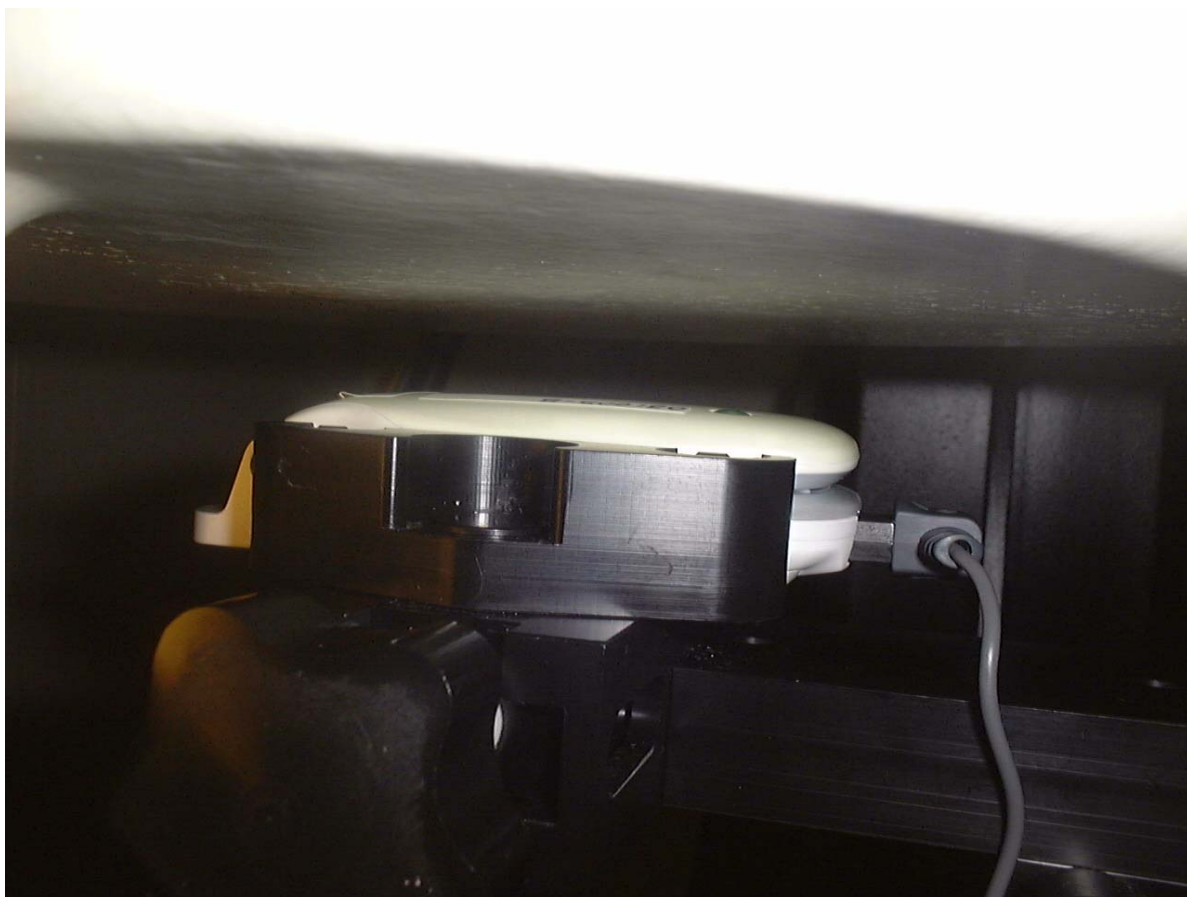

Device position against the body: Front side Phone with 15mm distance under phantom and hand free connection.



Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson


031003

031001

A

File

10.5 Probe calibration parameters

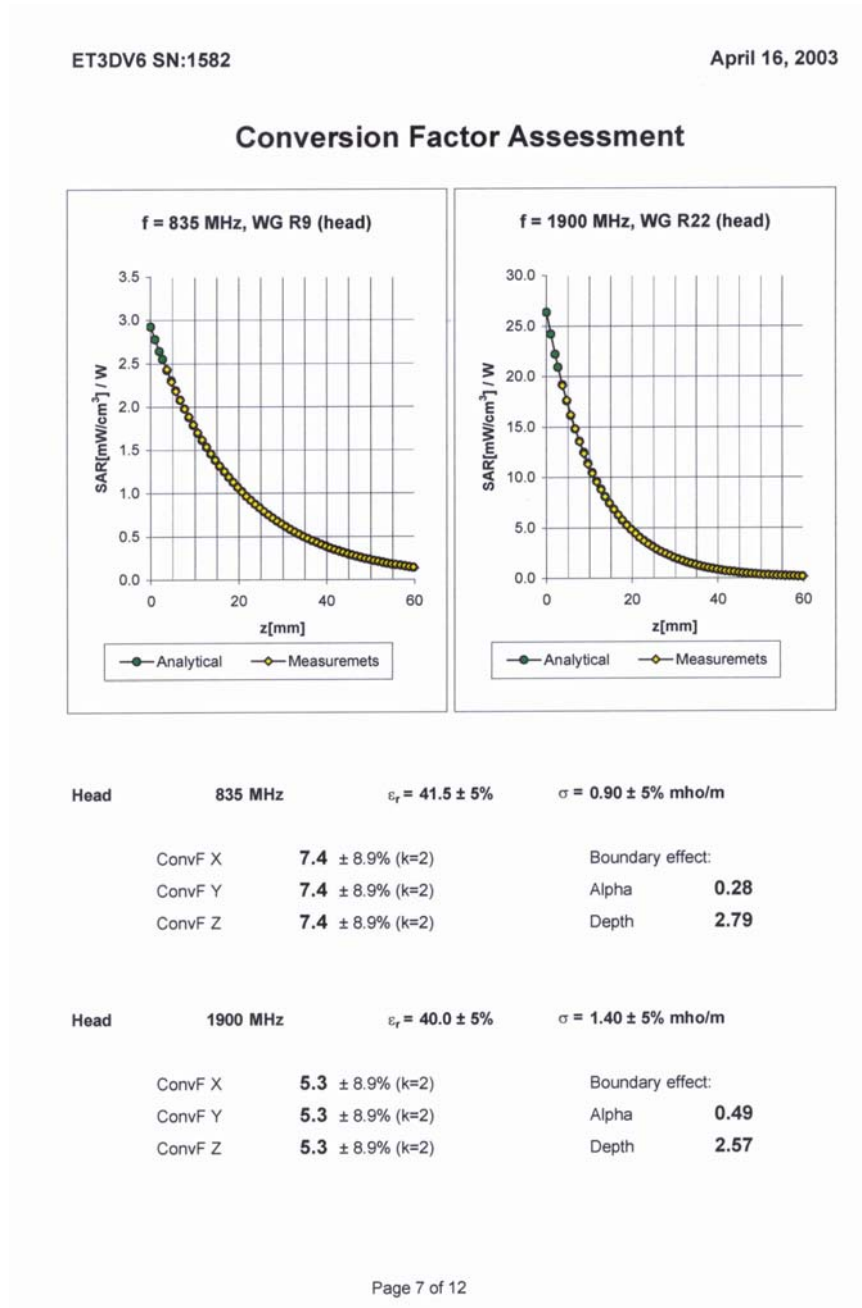



Prepared (also subject responsible if other)

LD/SEMC/BGUG/NM Hamid Kami Shirazi

No.

GUG/N 03:314

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGUG/NMC Mats Hansson

031003

031001


A

File

ET3DV6 SN:1585

April 16, 2003

Conversion Factor Assessment

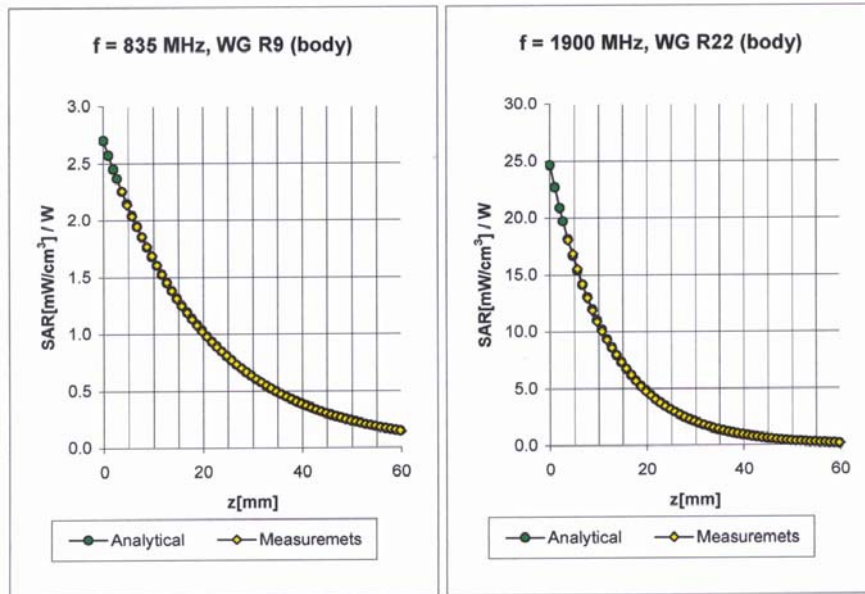

Body 835 MHz $\epsilon_r = 55.2 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	6.7 \pm 9.5% (k=2)	Boundary effect:
ConvF Y	6.7 \pm 9.5% (k=2)	Alpha 0.34
ConvF Z	6.7 \pm 9.5% (k=2)	Depth 2.48

Body 1900 MHz $\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m

Valid for f=1710-1910 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	4.8 \pm 9.5% (k=2)	Boundary effect:
ConvF Y	4.8 \pm 9.5% (k=2)	Alpha 0.59
ConvF Z	4.8 \pm 9.5% (k=2)	Depth 2.55