

DASY4 Validation Report for Body TSL

Date/Time: 14.03.2005 10:51:59

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M900;

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.98, 5.98, 5.98); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.57 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

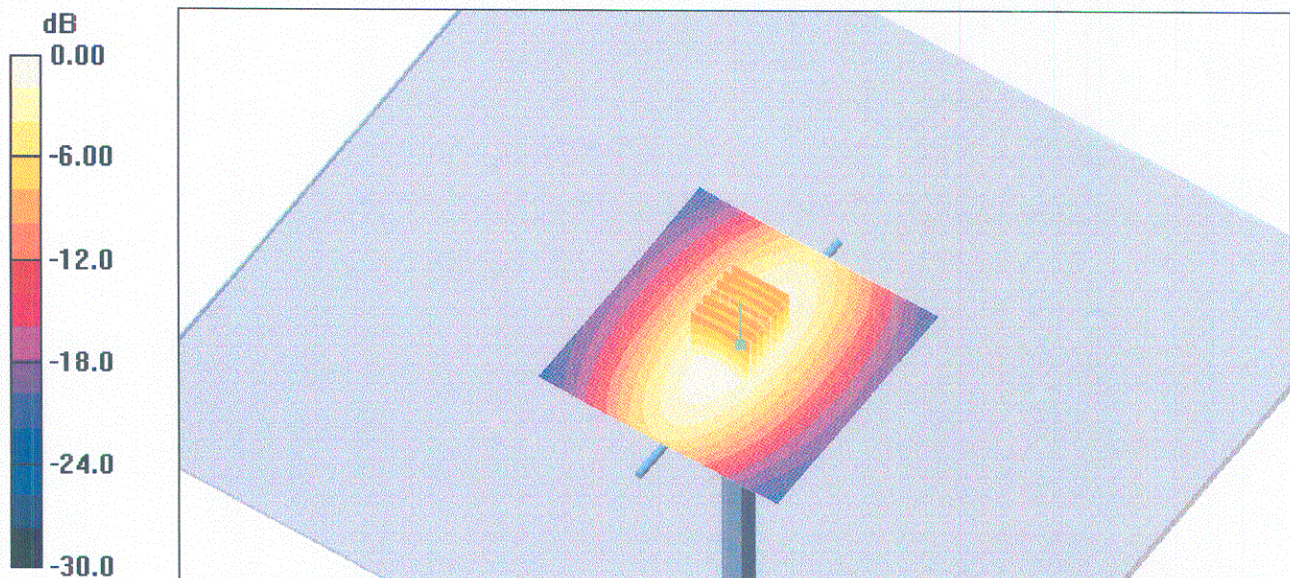

Date/Time: 2006-05-03 14:36:34

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch190_R_Cheek_060503.da4](#)

DUT: PY7A1032012; Type: GSM 850; Serial: 4671
Program Name: (Right-Hand Side)

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.864$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 3; Type: SAM; Serial: 1137
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.10 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid:
 dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.6 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.697 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.07 mW/g

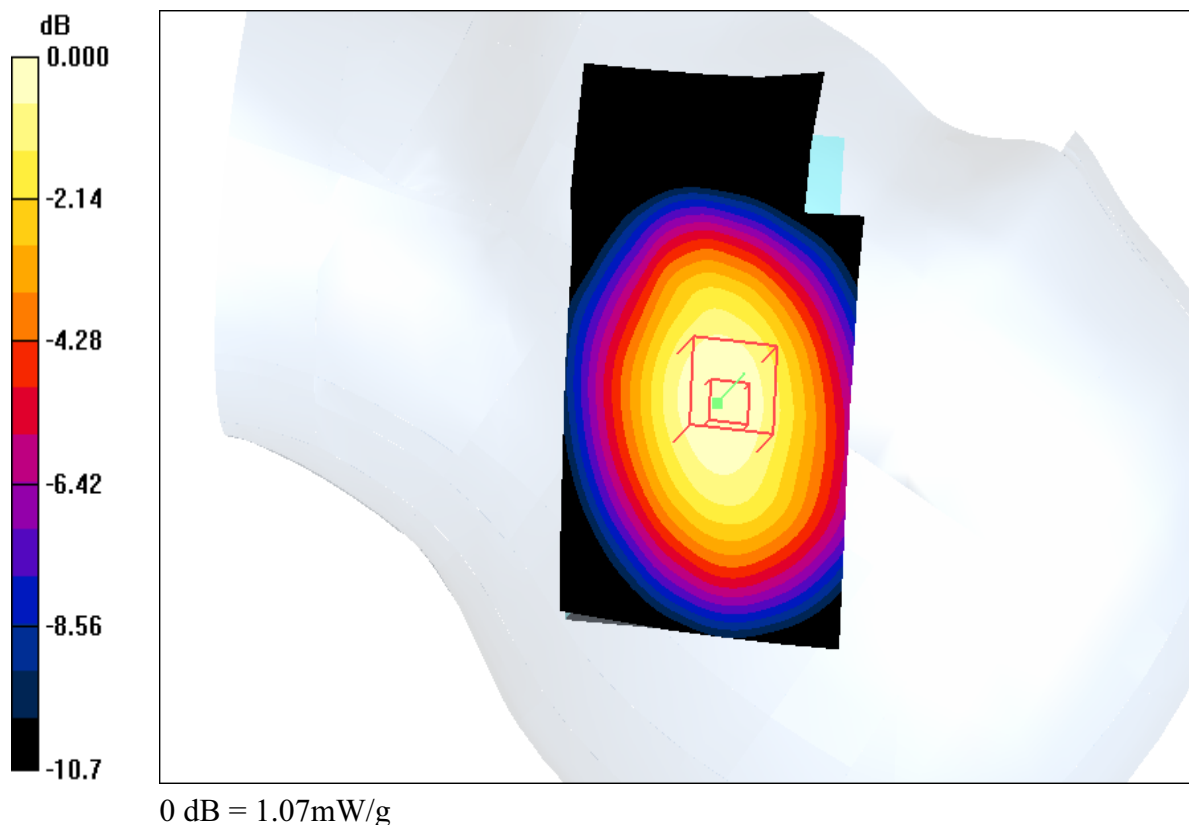

Date/Time: 2006-05-08 14:23:54

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch190_Body_HandsFree_060508.da4](#)

DUT: PY7A1032012; Type: GSM 850; Serial: #4671

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.53, 6.53, 6.53); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.604 mW/g

d=15mm, Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.0 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.748 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.398 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.589 mW/g

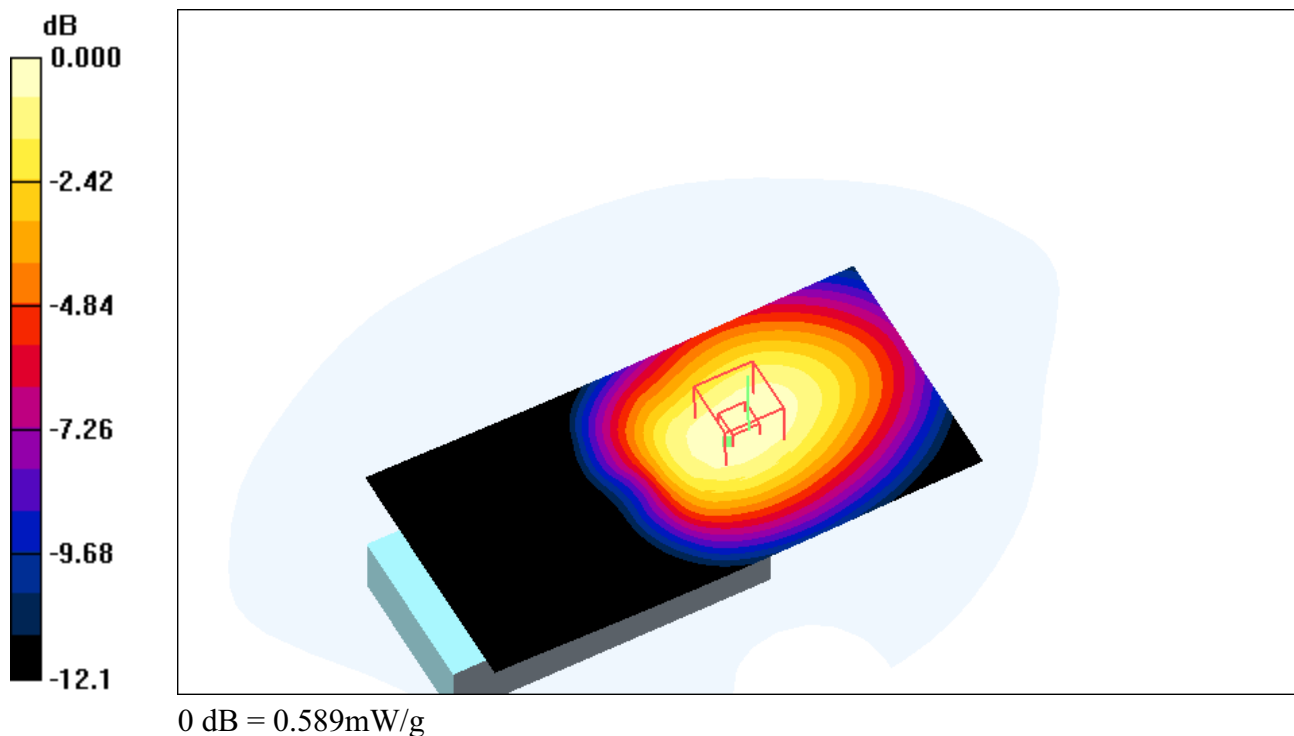

Date/Time: 2006-05-03 15:34:16

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [Ch128_R_Tilt_060503.da4](#)**DUT: PY7A1032012; Type: GSM 850; Serial:# 4671**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.853$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.524 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.671 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.520 mW/g

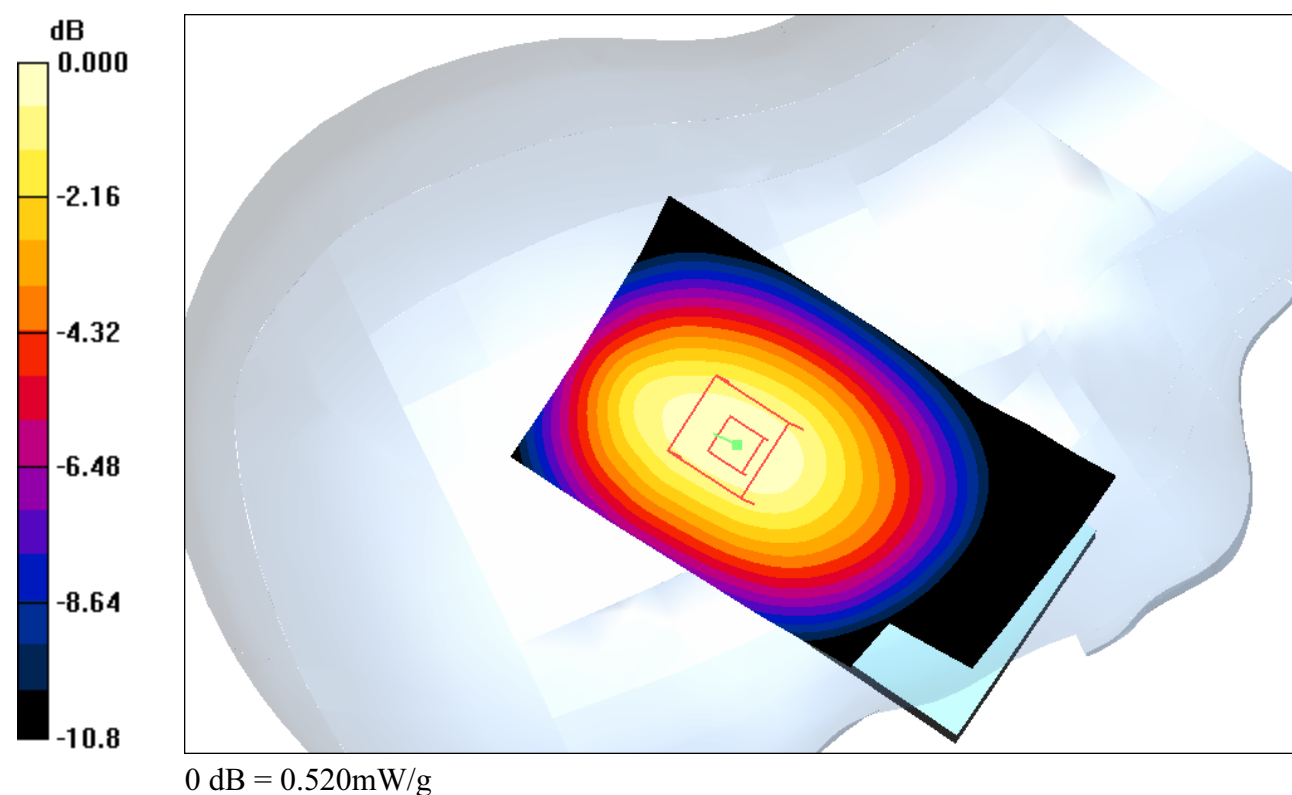

Date/Time: 2006-05-03 09:29:55

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch128_L_Cheek_060503.da4](#)

DUT: PY7A1032012; Type: GSM 850; Serial:# 4671

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825$ MHz; $\sigma = 0.853$ mho/m; $\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.859 mW/g


Touch position - Low/Zoom Scan (7x7x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.0 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.550 mW/g

Maximum value of SAR (measured) = 0.833 mW/g

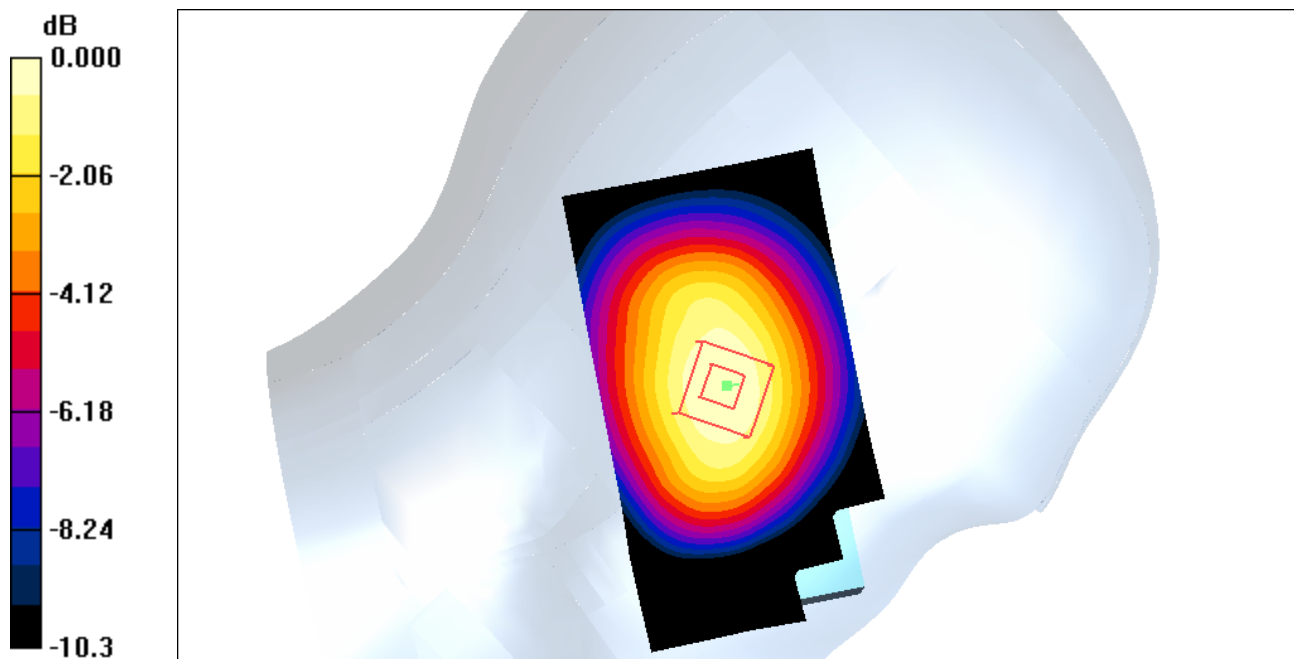

0 dB = 0.833mW/g

Date/Time: 2006-05-08 15:51:30

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch128_Body_GPRS2TX_060508.da4](#)

DUT: PY7A1032012; Type: GSM 850; Serial:# 4671

Communication System: GSM850 GPRS2TX; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.53, 6.53, 6.53); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 3; Type: SAM; Serial: 1137
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm,Low GPRS2TX/Area Scan (61x101x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 1.18 mW/g

d=15mm,Low GPRS2TX/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.5 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.773 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.13 mW/g

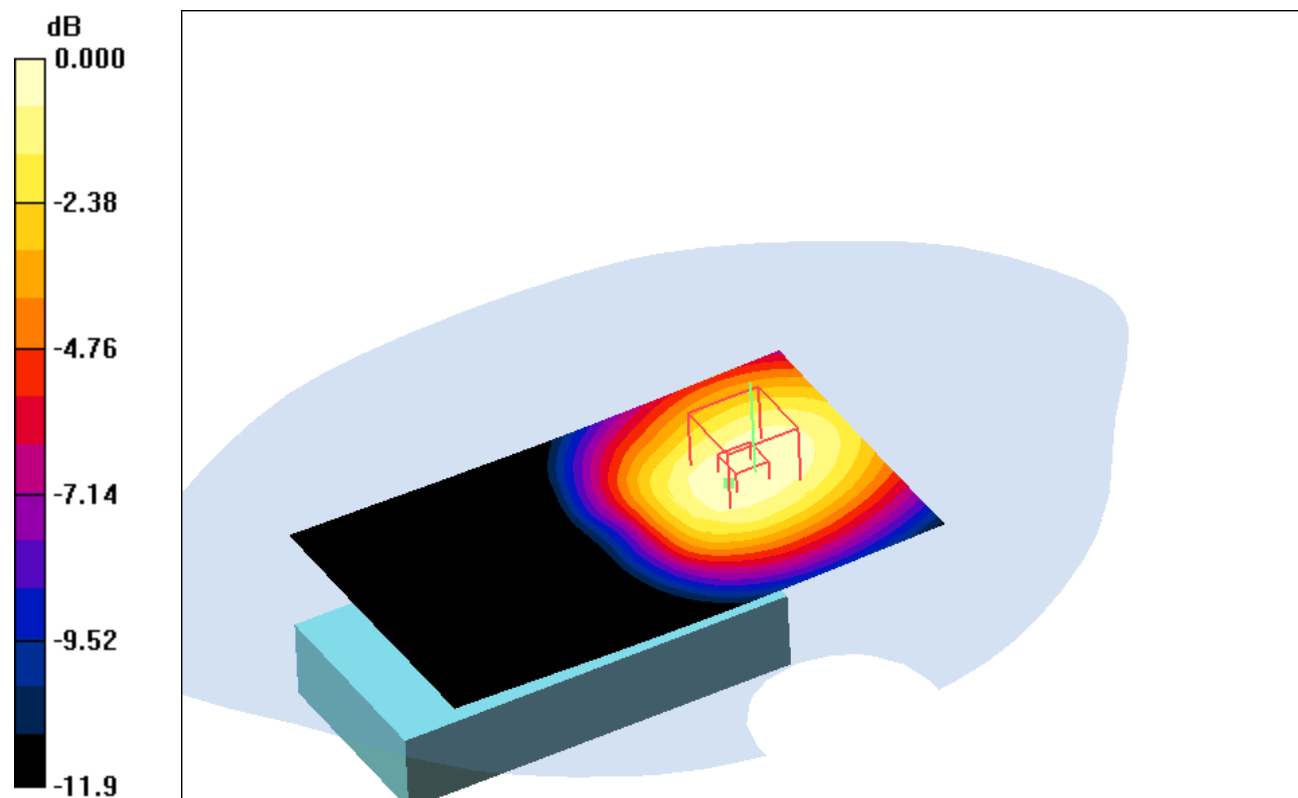

0 dB = 1.13mW/g

Date/Time: 2006-05-03 11:58:08

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [SystemPerformanceCheck-D1900Head_060503.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW/Area Scan (41x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.46 mW/g

d=10mm, Pin=100mW /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.8 V/m; Power Drift = 0.037 dB


Peak SAR (extrapolated) = 6.27 W/kg

SAR(1 g) = 3.49 mW/g; SAR(10 g) = 1.83 mW/g

Maximum value of SAR (measured) = 3.90 mW/g

d=10mm, Pin=100mW 2 2/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 1.31 mW/g

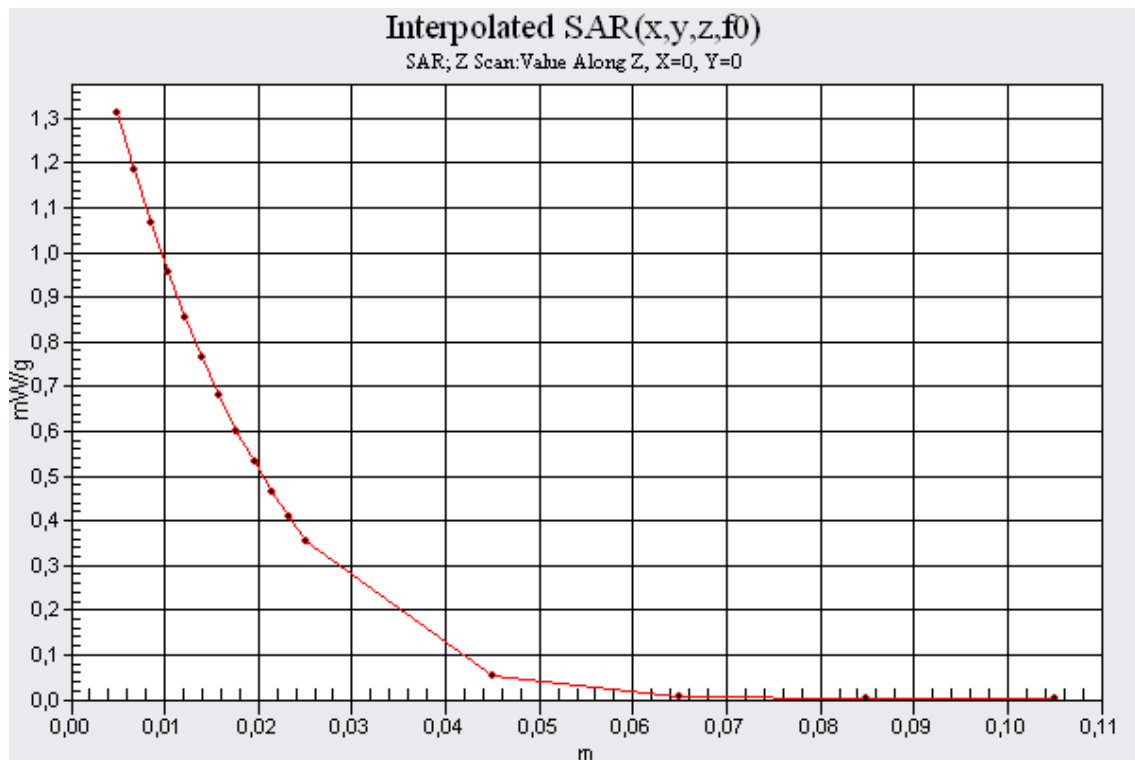

DASY4 Validation Report for Head TSL

Date/Time: 09.03.2005 15:20:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

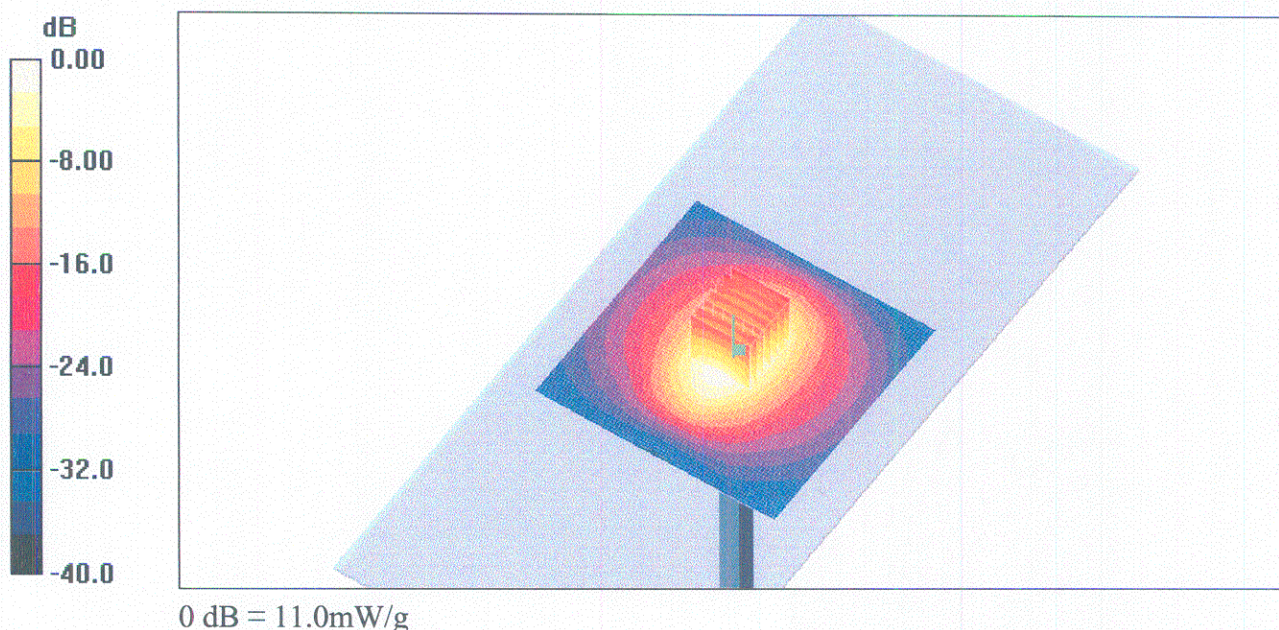

Date/Time: 2006-05-03 11:58:08

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [SystemPerformanceCheck-D1900Body_060503.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002



Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16
 - Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
 - Electronics: DAE3 Sn419; Calibrated: 2006-03-08
 - Phantom: SAM 4; Type: SAM; Serial: 1053
 - Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161
- d=15mm, Pin=100mW /Area Scan (41x51x1):** Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 5.24 mW/g
- d=15mm, Pin=100mW /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 56.9 V/m; Power Drift = 0.037 dB
 Peak SAR (extrapolated) = 7.09 W/kg
SAR(1 g) = 4.08 mW/g; SAR(10 g) = 2.16 mW/g
 Maximum value of SAR (measured) = 4.58 mW/g
- d=15mm, Pin=100mW 2 2/Z Scan (1x1x16):** Measurement grid: dx=20mm, dy=20mm, dz=20mm
 Maximum value of SAR (interpolated) = 1.57 mW/g

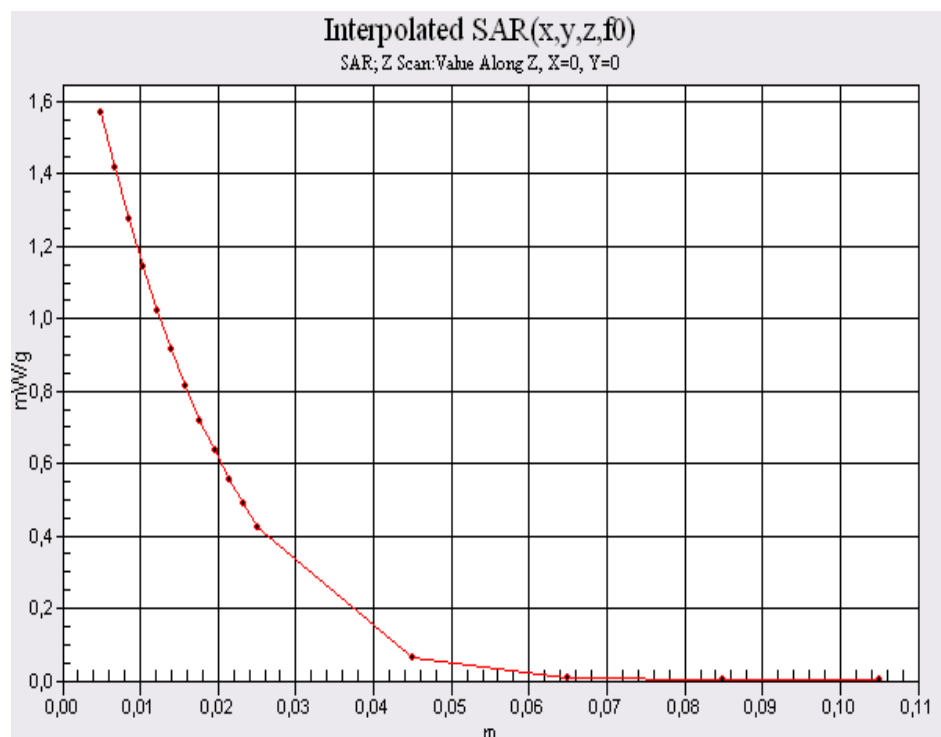

DASY4 Validation Report for Body TSL

Date/Time: 15.03.2005 15:20:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.23 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

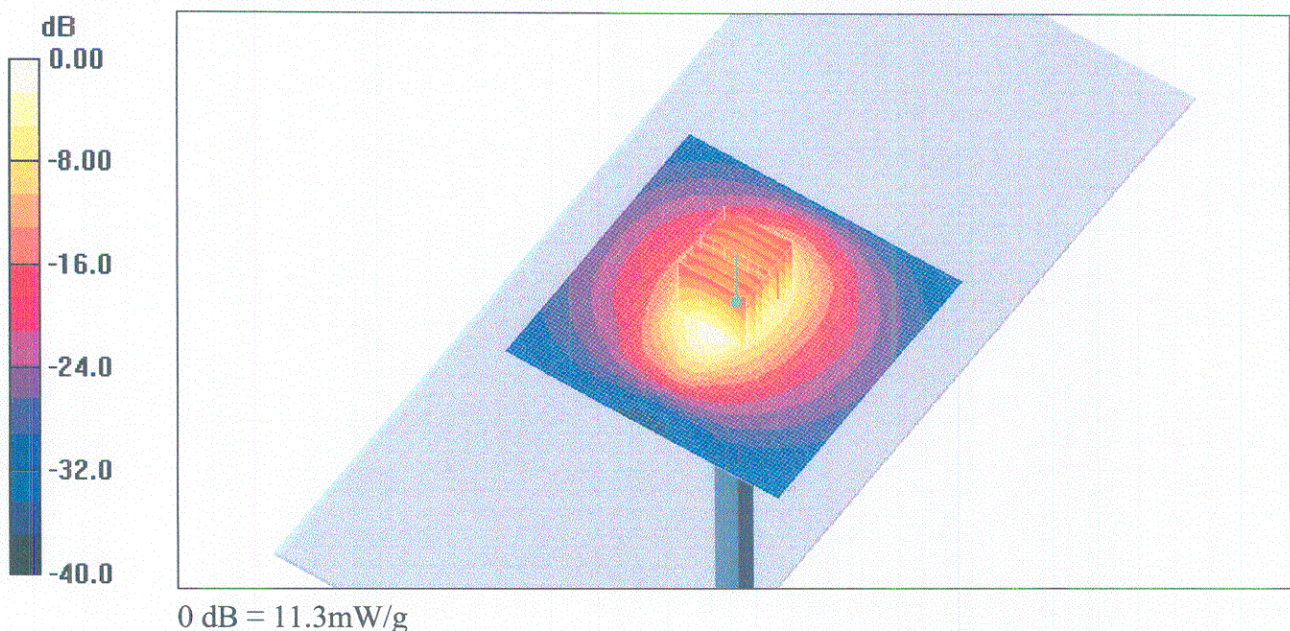

Date/Time: 2006-05-02 13:34:16

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [SystemPerformanceCheck-D835_060503.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484
Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.862$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.456 mW/g

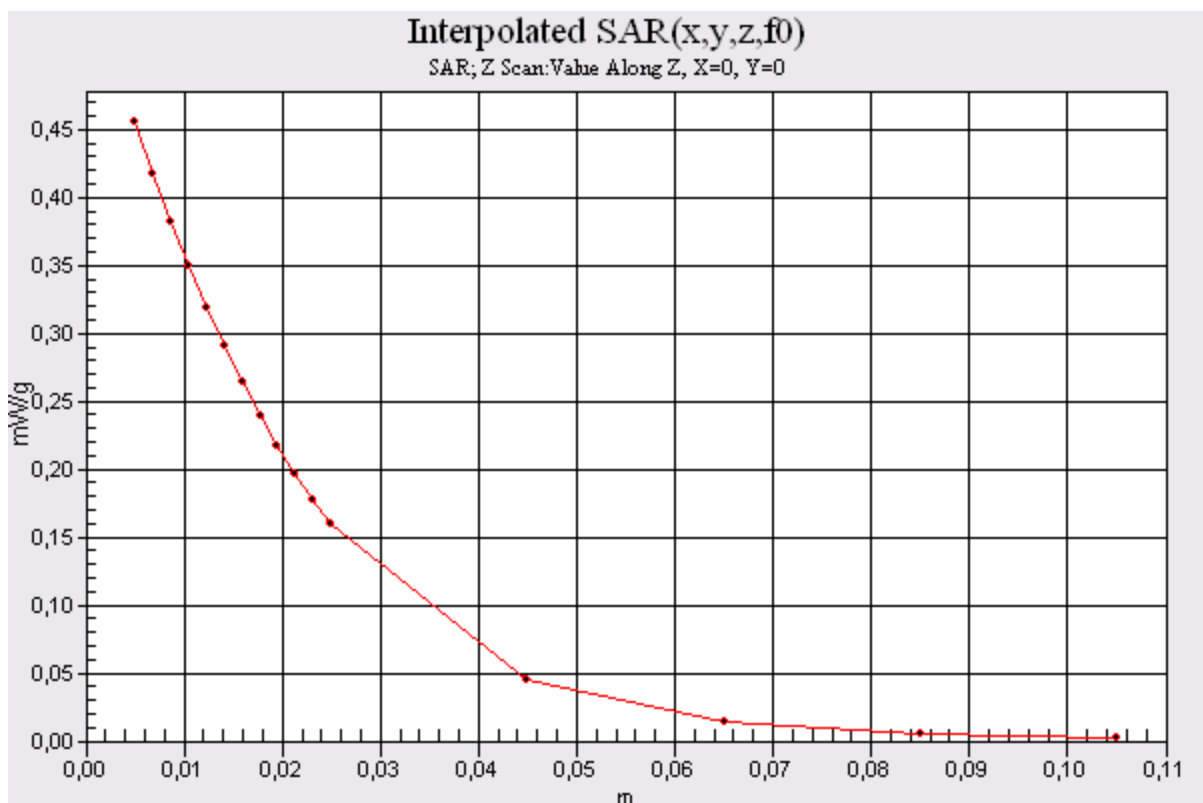

Date/Time: 2006-05-08 13:22:46

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [SystemPerformanceCheck-D835_Body_060508.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484****Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.53, 6.53, 6.53); Calibrated: 2006-03-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW/Z Scan (1x1x16): Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.503 mW/g

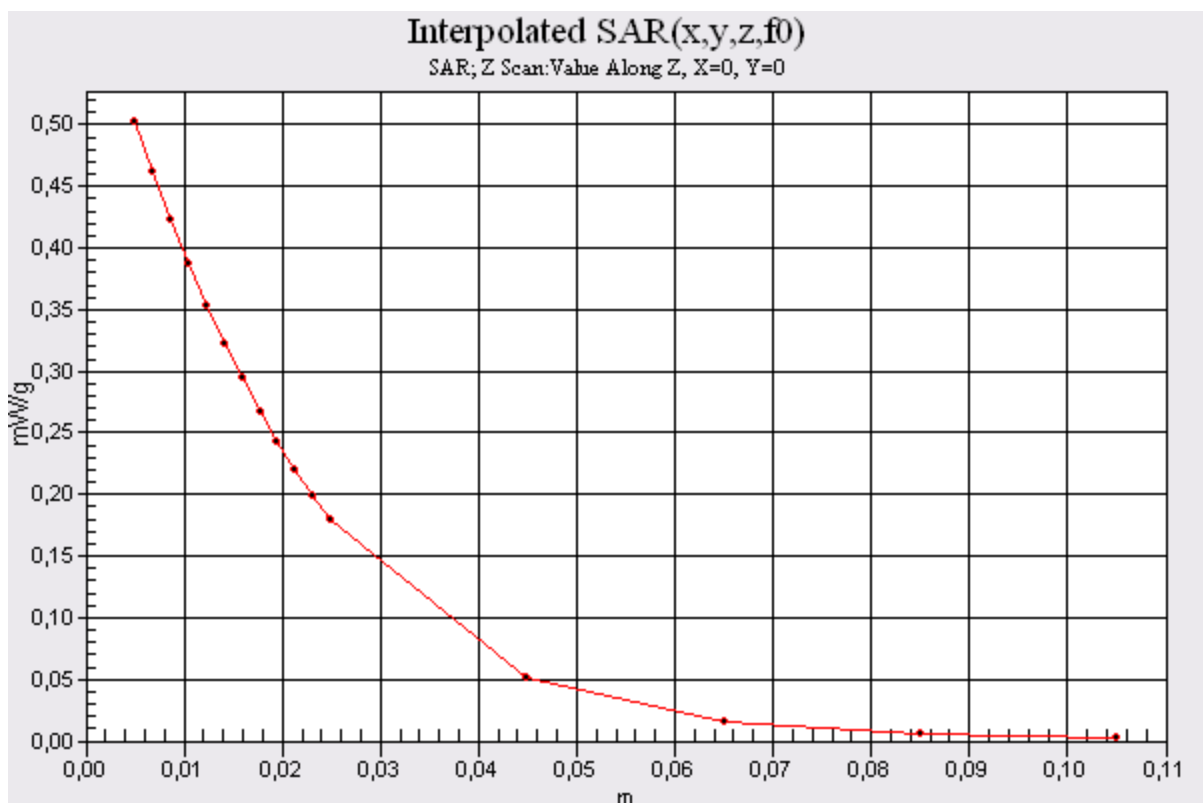

DASY4 Validation Report for Head TSL

Date/Time: 08.03.2005 10:35:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.24, 6.24, 6.24); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 144

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.46 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.0 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.44 mW/g

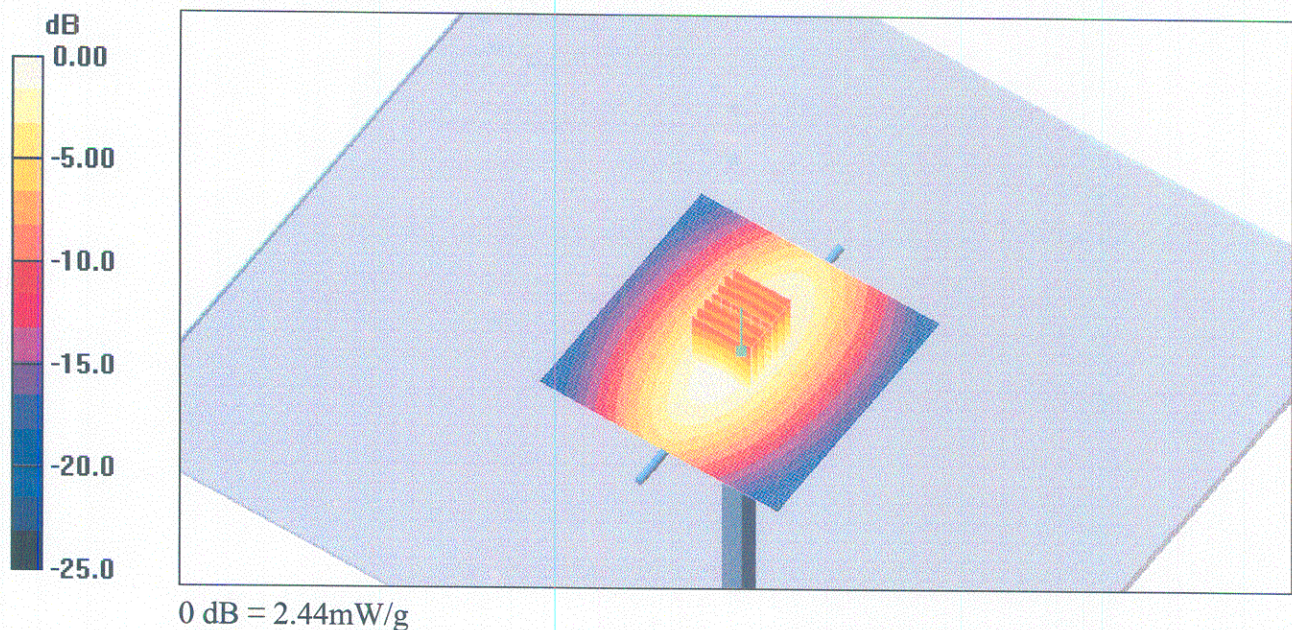

Date/Time: 2006-05-03 11:09:26

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch251_L_Tilt_060503.da4](#)

DUT: PY7A1032012; Type: GSM 850; Serial: #4671

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 3; Type: SAM; Serial: 1137
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position /Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.578 mW/g

Tilt position /Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.9 V/m; Power Drift = -0.138 dB

Peak SAR (extrapolated) = 0.715 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.375 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.570 mW/g

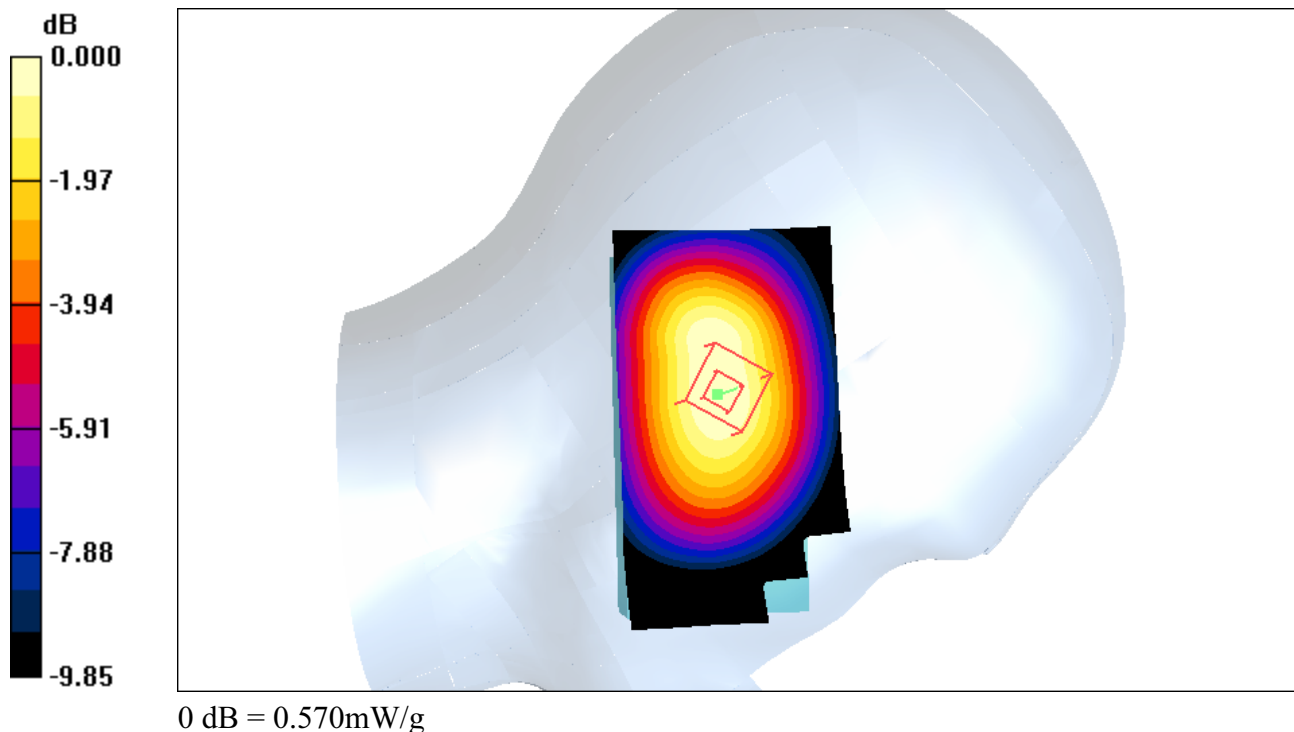

Date/Time: 2006-05-08 10:48:08

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch661_R_Tilt_060508.da4](#)

DUT: PY7A1032012; Type: GSM 1900; Serial: #4671

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.559 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.517 mW/g

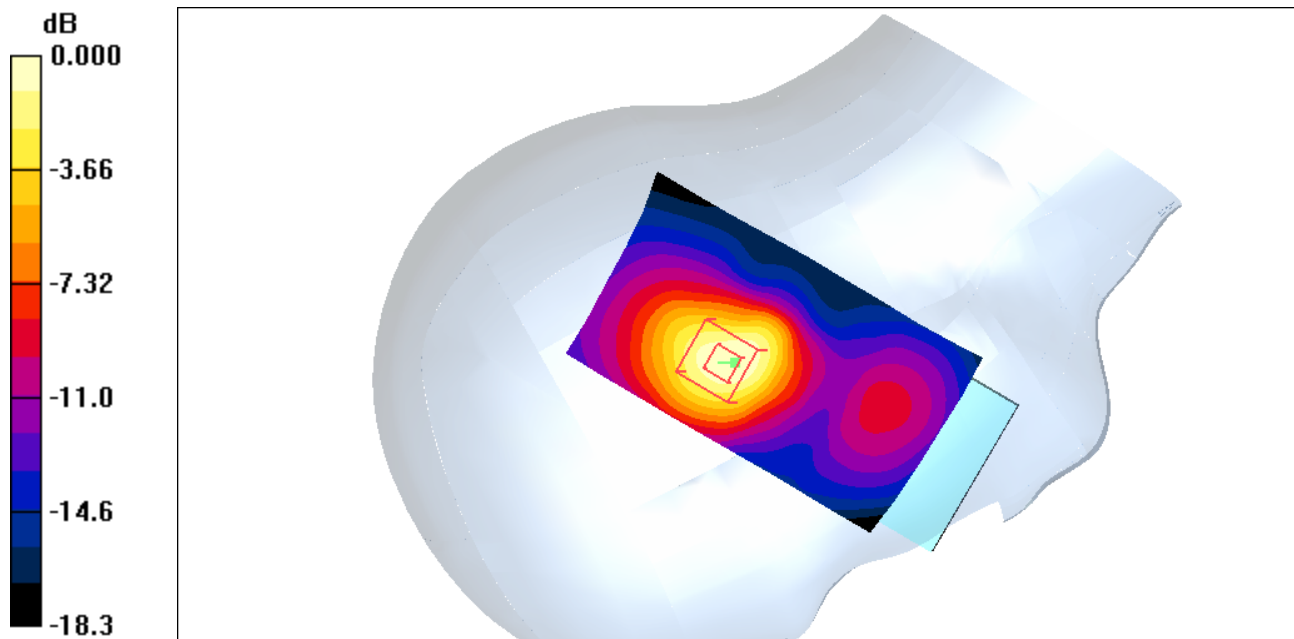

0 dB = 0.517mW/g

Date/Time: 2006-05-08 09:53:34

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [Ch661_R_Cheek_060508.da4](#)**DUT: PY7A1032012; Type: GSM 1900; Serial: #4671**

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position - MiddleRcheek 2/Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.524 mW/g

Touch position - MiddleRcheek 2/Zoom Scan(5x5x7)/Cube 0: Measurement grid:


dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.9 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 0.816 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.513 mW/g

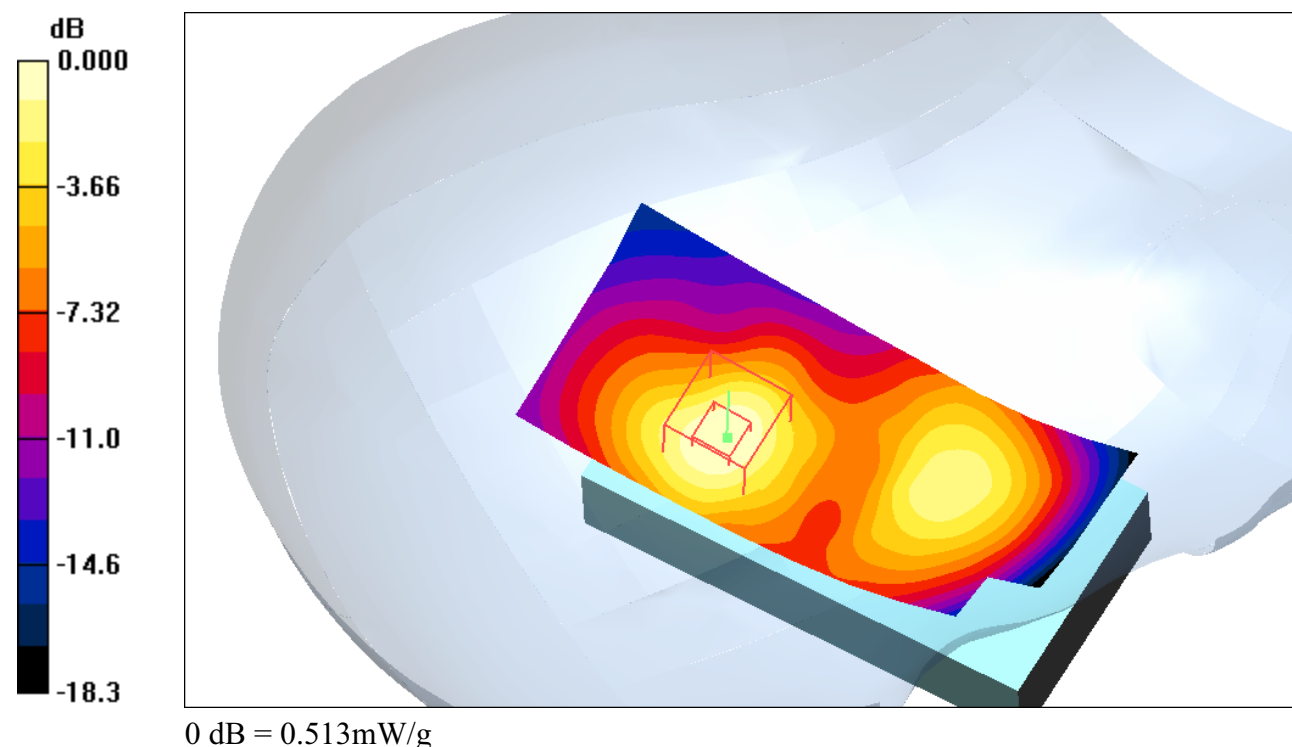

Date/Time: 2006-05-03 14:55:04

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch661_Back_GPRS2TX_060503.da4](#)

DUT: PY7A1032012; Type: GSM 1900; Serial: #4671

Communication System: GSM1900 GPRS2TX; Frequency: 1880 MHz; Duty Cycle: 1:4.15
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 4; Type: SAM; Serial: 1053
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.506 mW/g


d=15mm, /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.844 W/kg

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.611 mW/g

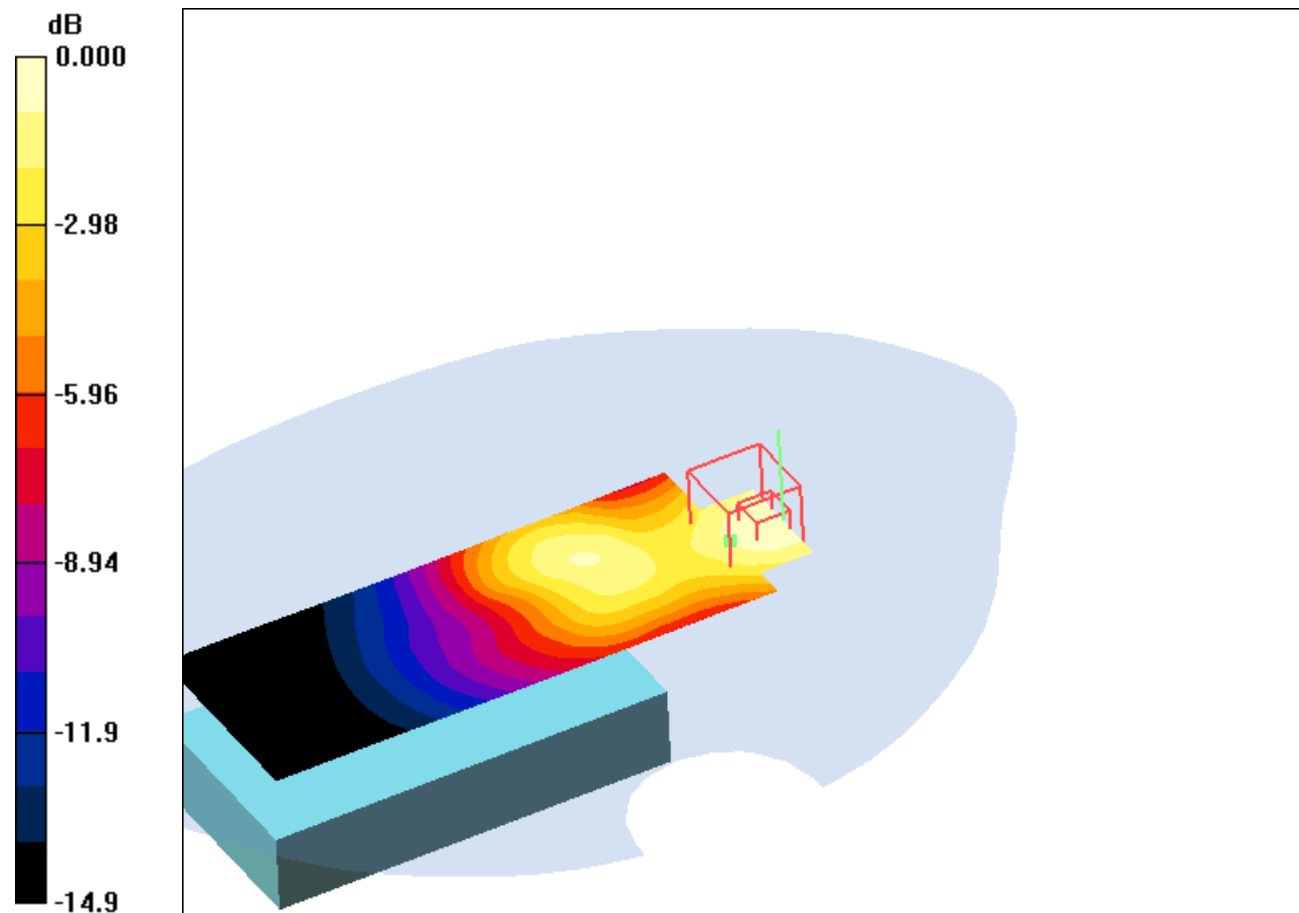

0 dB = 0.611mW/g

Date/Time: 2006-05-03 14:15:49

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch661_Back_Speech_060503.da4](#)

DUT: PY7A1032012; Type: GSM 1900; Serial: #4671

Communication System: GSM1900 GPRS2TX; Frequency: 1880 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 4; Type: SAM; Serial: 1053
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, /Area Scan (41x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.069 mW/g


d=15mm, /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.29 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

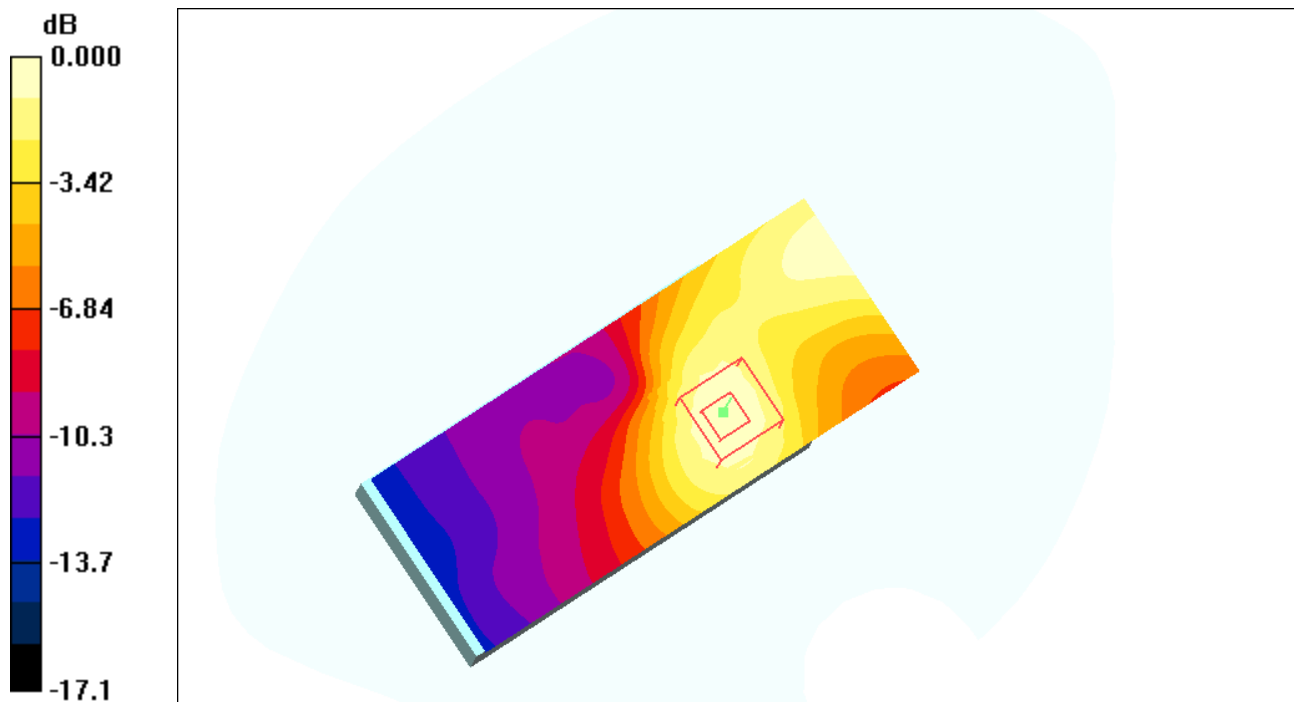

0 dB = 0.066mW/g

Date/Time: 2006-05-05 11:47:39

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [Ch512_L_Cheek_060505.da4](#)

DUT: PY7A1032012; Type: GSM 1900; Serial: #4671

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Touch position /Area Scan (41x91x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.343 mW/g

Touch position - LowLcheek/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.7 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.172 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.349 mW/g

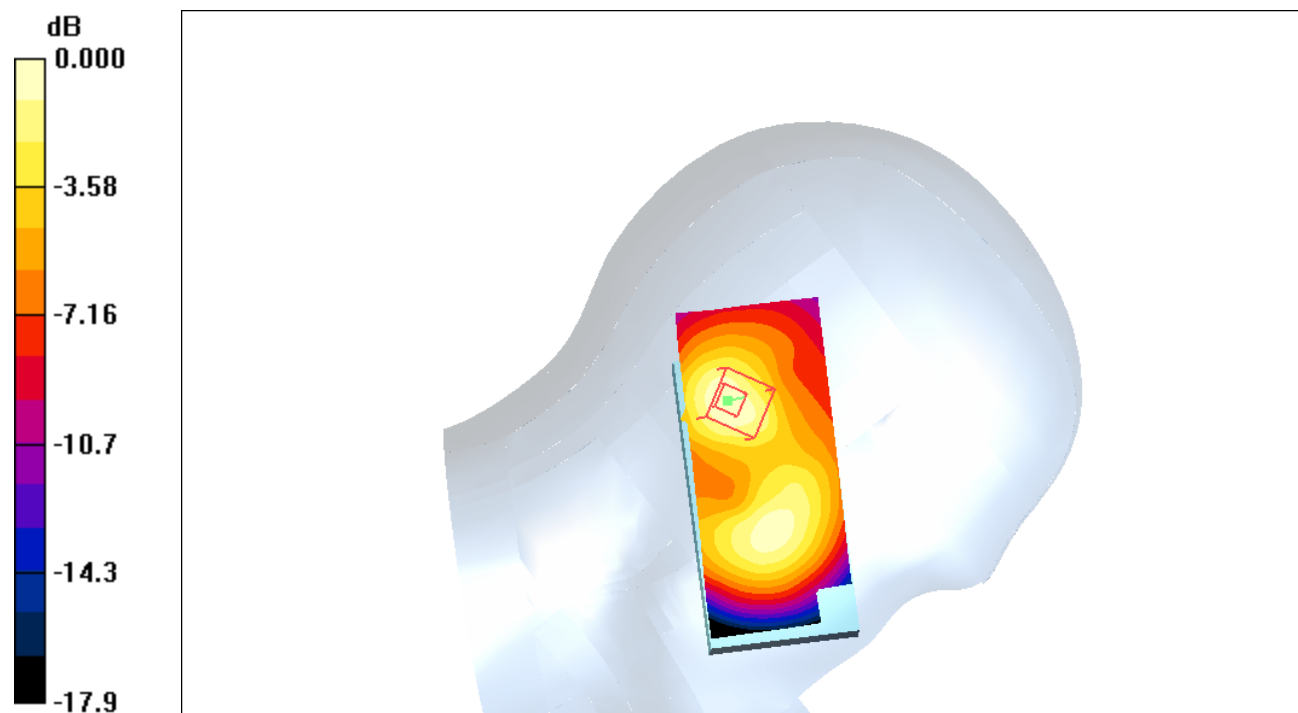

0 dB = 0.349mW/g

Date/Time: 2006-05-05 14:24:02

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [Ch810_L_Tilt_060505.da4](#)**DUT: PY7A1032012; Type: GSM 850; Serial: #4671**

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Tilt position -/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.449 mW/g


Tilt position -/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

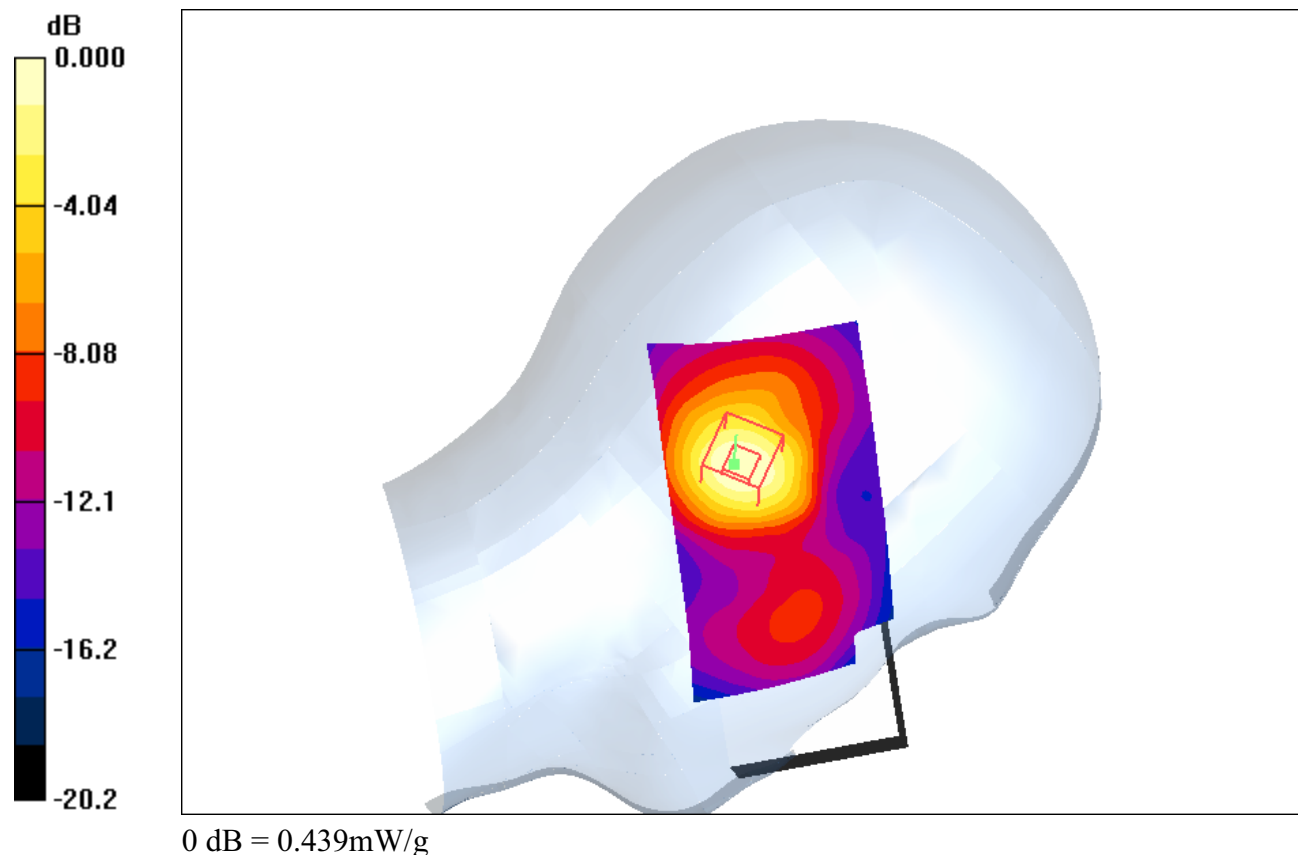

Date/Time: 2006-05-08 09:12:34

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [SystemPerformanceCheck-D1900Head_060508.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002
Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(5.11, 5.11, 5.11); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 4; Type: SAM; Serial: 1053
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=10mm, Pin=100mW Head 2/Area Scan (41x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 4.87 mW/g


d=10mm, Pin=100mW Head 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.7 V/m; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 7.06 W/kg

SAR(1 g) = 3.99 mW/g; SAR(10 g) = 2.09 mW/g

Maximum value of SAR (measured) = 4.46 mW/g

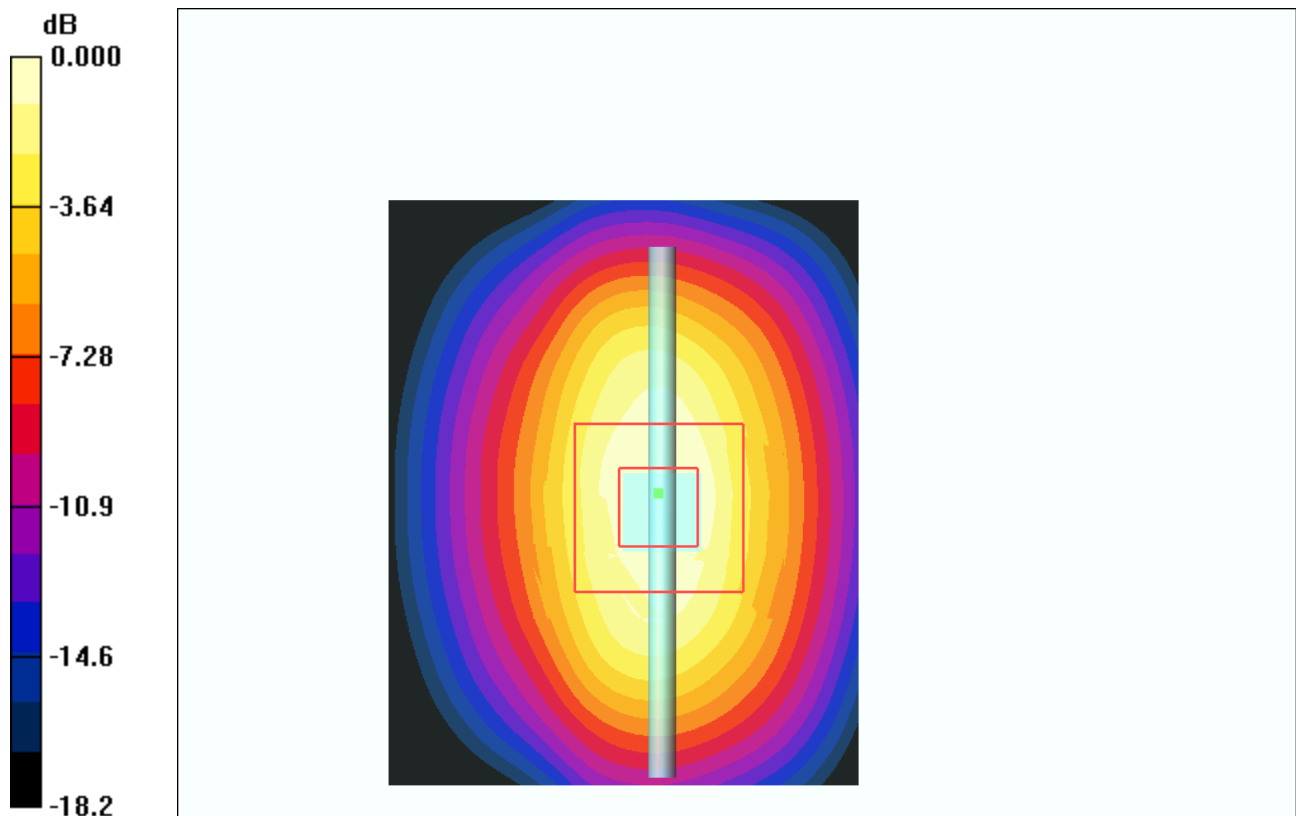

0 dB = 4.46mW/g

Date/Time: 2006-05-03 11:58:08

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [SystemPerformanceCheck-D1900Body_060503.da4](#)

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002
Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 50.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(4.56, 4.56, 4.56); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW 2 2/Area Scan (41x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.24 mW/g


d=15mm, Pin=100mW 2 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.9 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 7.09 W/kg

SAR(1 g) = 4.08 mW/g; SAR(10 g) = 2.16 mW/g

Maximum value of SAR (measured) = 4.58 mW/g

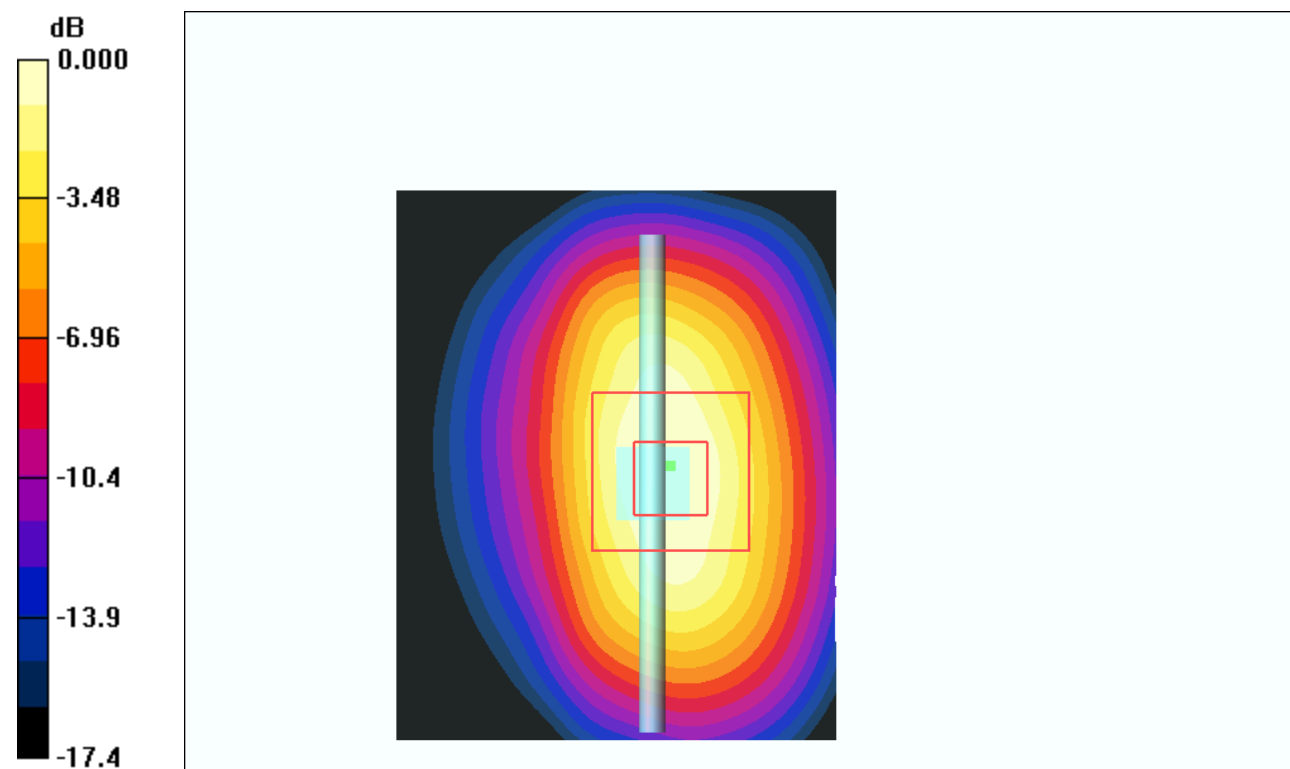

0 dB = 4.58mW/g

Date/Time: 2006-05-03 08:59:44

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [SystemPerformanceCheck-D835_060503.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484
Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.862$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW 2/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g


d=15mm, Pin=100mW 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.2 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.618 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

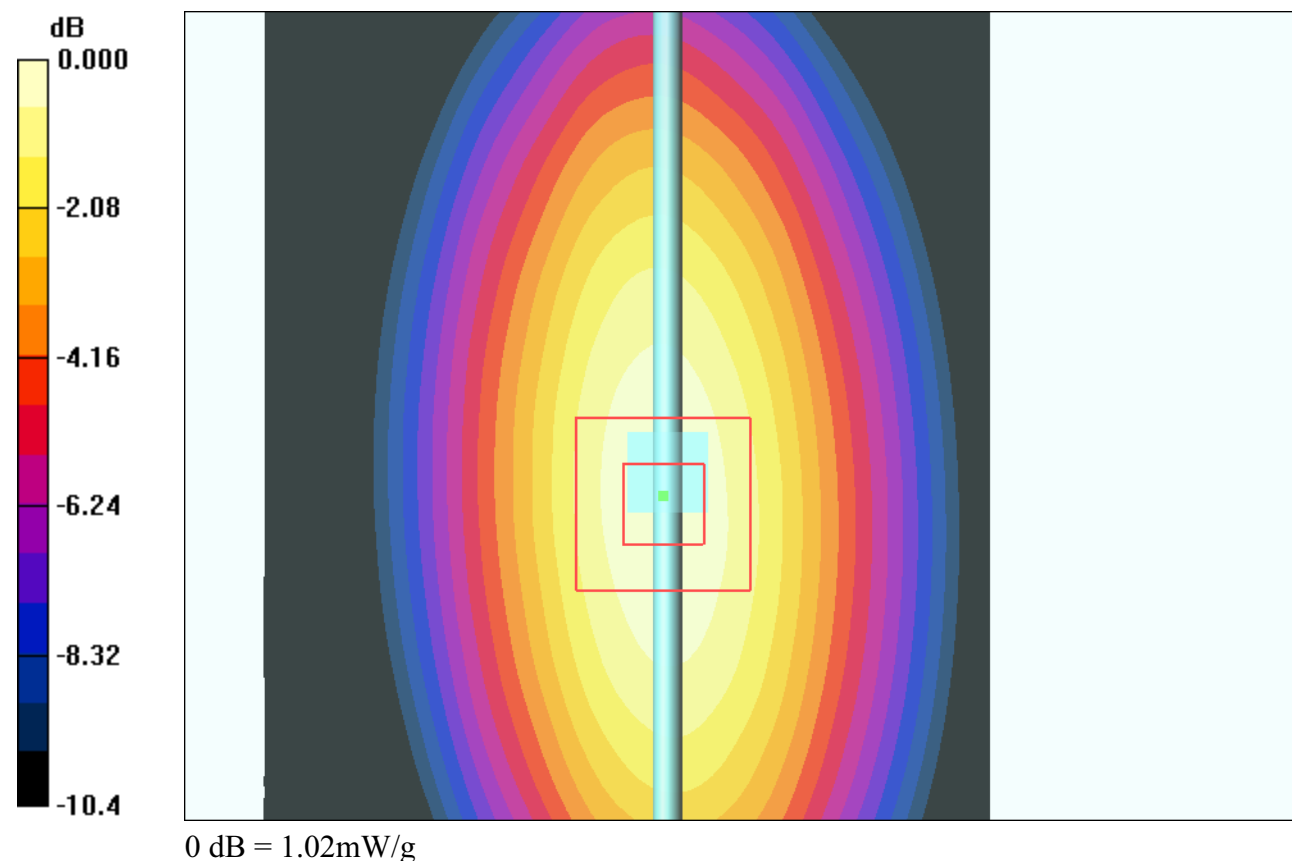

Date/Time: 2006-05-02 13:19:24

Test Laboratory: Sony Ericsson Mobile Communications
 File Name: [SystemPerformanceCheck-D835.da4](#)

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484
Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.862 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.77, 6.77, 6.77); Calibrated: 2006-03-16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn419; Calibrated: 2006-03-08
- Phantom: SAM 3; Type: SAM; Serial: 1137
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.01 mW/g


d=15mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.4 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

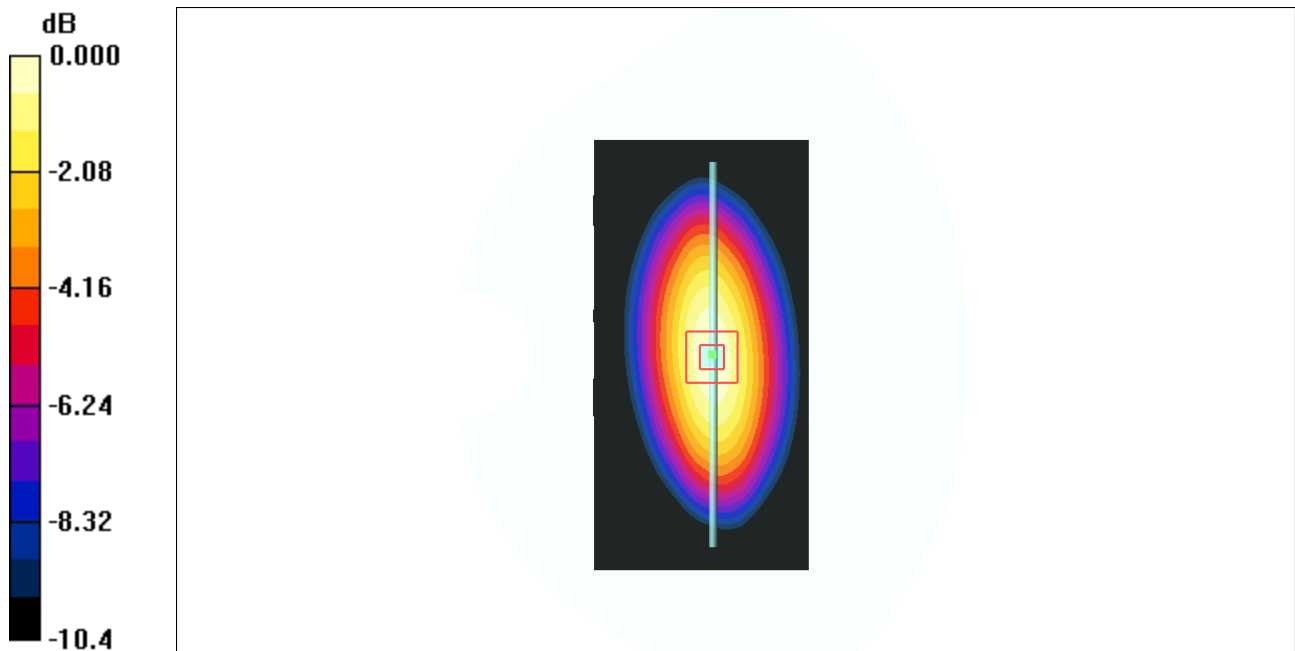

0 dB = 1.02mW/g

Date/Time: 2006-05-08 13:08:01

Test Laboratory: Sony Ericsson Mobile Communications

File Name: [SystemPerformanceCheck-D835_Body_060508.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:484****Program Name: System Performance Check at 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1585; ConvF(6.53, 6.53, 6.53); Calibrated: 2006-03-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn419; Calibrated: 2006-03-08

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

d=15mm, Pin=100mW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

d=15mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.9 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.660 mW/g

Maximum value of SAR (measured) = 1.09 mW/g

