



Prepared (also subject responsible if other)

SEM/BGNU DP THOMAS NILSSON

Approved

Checked

Confidential

MARKING DRAWINGS SPECIFICATION

No.

8/159 35-1/FCP 119 0191 Uen

Date

Rev

Reference

2007-09-03

PA2

5

Approved according to 000 21-LXE 107 42/1

Z250a Marking Drawing Type: AAB-1032042-BV

1 General information

The format of the label is based on a label SVF 930 2639.

If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.

All bar codes, when applicable, are according to Ericsson corporate standard 102 01-109 Uen. All bar codes shall fulfil minimum print quality C according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01-1003 Uen. No bar codes are allowed to be closer to a label edge than 2 mm! (quiet zone).

“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

The label shall be placed on the back of the telephone according to the Assembly Drawing (151 88-) for the KRH.

2 Printing information

	Content	Format
Line 1a (2,3/1,0)	Sony Ericsson stylized name.	Graphics, height 1,5 mm. According to 190 89-EN/LZT 108 5347
Line 1b (2,3/16,0)	Model name, “Z250a”	Text, height 1,2 mm.
Line 1c (2,3/22,0)	Product number of the DPY kit in which the phone is packed. Printed without R-state. “DPY 101 0000/000”	Text, height 1,2 mm.
Line 2a (4,5/1,0)	Type number of the phone (KRH), “Type: AAB-1032042-BV”.	Text, height 1,2 mm.
Line 2b (4,5/16,0)	HW & SW fields, “FG”	Text, height 1,2 mm. According to the 3/151 86- document in the 1095- for the SVV.
Line 3a (6,5/1,0)	Country approval mark 1 “FCC ID: PY7A1032042”	Text, height 1,2 mm.
Line 3b (6,5/16,0)	Production week (flash), “yy'W'ww” (yy = year, ww = week)	Text, height 1,2 mm.
Line 4 (7,8/22,0)	CE approval symbol.	Graphics, height 5 mm. According to 1424-SVF 930 52.



Prepared (also subject responsible if other)

SEM/BGNUDP THOMAS NILSSON

Approved

Checked

Confidential

MARKING DRAWINGSPECIFICATION

No.

8/159 35-1/FCP 119 0191 Uen

Date

Rev

Reference

2007-09-03

PA2

5

	Content	Format
Line 5a (8,5/1,0)	Country approval mark 2 "IC: 4170B-A1032042"	Text, height 1,2 mm.
Line 5b (8,5/16,0)	Repair week, if applicable. "Ry'W'ww" (y = year, ww = week)	Text, height 1,2 mm.
Line 6 (10,4/22,9)	The Notified body number. "0682"	Text, height 2,3 mm.
Line 7a (9,6/1,0)	Marking of origin. The line shall be printed as stated in chapter 3 in this document.	Text, height 1,2 mm.
Line 7b (9,6/16,0)	Location code of where the phone is flashed, if applicable, "FFF"	Text, height 1,2 mm.
Line 8 (13/1,0)	Line 7a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 sybology).
Line 9a (14,8/1,0)	Supplier's identification for trace- ability of the telephone, as desired by supplier (e.g. "S/N: nnn...." for serial number).	Text, height 1,2 mm. Defined by supplier.
Line 9b (14,8/13,0)	Actual electronic serial number (IMEI) of the phone (KRH), "00000000-000000-0"	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from the 3/151 86- document in the 1095- for the SVV. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Line 10 (17,0/1,0)	Line 7b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 sybology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.

Prepared (also subject responsible if other)

SEM/BGNDP THOMAS NILSSON

Approved

Checked

Confidential

MARKING DRAWINGSPECIFICATION

No.

8/159 35-1/FCP 119 0191 Uen

Date

Rev

Reference

2007-09-03

PA2

5

3 Marking of Origin

3.1 Content


“Made in Xxx”;

“Xxx” = actual country of production of the included telephone, in English

4 Layout

The conceptual picture (for Zebra 90XiII printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

4.1 Conceptual picture

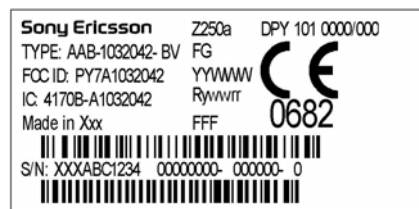

double underlined = major changes since last revision.

Prepared (also subject responsible if other)

SEM/BGNU DP THOMAS NILSSON

Approved

Checked

Confidential
MARKING DRAWINGS SPECIFICATION

No.

8/159 35-1/FCP 119 0191 Uen

Date

Rev

Reference

2007-09-03

PA2

5

4.1 Label placement

To find the label follow these steps:

1. Remove the cover on the rear side of the product.
2. Remove the battery.
3. The label is located under the battery.

