

# CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100 Telefax: -9075

RSC11

issue test report consist of 121 Pages

Page 1 (121)

Recognized by the  
Federal Communications Commission  
**FCC-Identification Number: 90462**  
**TCB ID: DE 0001**



Accredited by the  
German Accreditation Council  
**DAR-Registration Number**  
**TTI-P-G 166/98**



Independent ETSI  
compliance test house



## Accredited Bluetooth™ Test Facility (BQTF)

**Test report no.: 2\_3287-01-01/03**  
**FCC Part 24/22/15**  
**AAB-1041011-BV**  
**FCC ID: PY7A1041011**  
**IC: 4170B-A1041011**

CETECOM – ICT Services GmbH  
Untertürkheimerstr. 6-10  
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0  
Fax: + 49 (0) 681 / 9075

## Table of Contents

### **1 General information**

- 1.1 Notes**
- 1.2 Testing laboratory**
- 1.3 Details of applicant**
- 1.4 Application details**
- 1.5 Test item**
- 1.6 Test standards**

### **2 Technical test**

- 2.1 Summary of test results**
- 2.2 Test report**

### **1 General information**

#### **1.1 Notes**

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### **1.2 Testing laboratory**

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telefone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

#### **Accredited testing laboratory**

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-166/98

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

**Accredited Bluetooth™ Test Facility (BQTF)**

**BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM**

## 1.3 Details of applicant

Name : Sony Ericsson Mobile Communication AB  
Street : Nya Vattentornet  
City : 22188 Lund  
Country : Sweden  
Telephone : +46-46-193-242  
Telefax : +46-46-193-295  
Contact : Mr. Bo Johansson  
Telephone : +46-46-193-242  
e-mail :

## 1.4 Application details

Date of receipt of application : 2003-05-14  
Date of receipt of test item : 2003-05-16  
Date of test : 2003-05-16/19/20

## 1.5 Test item

Type of equipment : **Triple Band GSM Mobile Phone (PCS 850/1800/1900 MHz)  
with Bluetooth® transmitter**  
Type designation : AAB-1041011-BV  
Manufacturer : Applicant  
Street :  
City :  
Country :  
Serial number : IMEI : 001003.00.064406.5  
**Additional informations:** :  
Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz  
Type of modulation : 300KGXW  
Number of channels : 300 (PCS1900) and 125 (PCS850)  
Antenna : Integral antenna  
Power supply : 3,7V DC NiMH  
Output power GSM 850 : cond.: 32.72 dBm Peak , ERP: 23.7 dBm (Burst);  
EIRP: 25.8 dBm (Burst)  
Output power GSM 1900 : cond : 30.77 dBm Peak , ERP: 30.22 dBm (Burst);  
EIRP: 32.32 dBm (Burst)  
Type of equipment : Temperature range : -30°C - +60°C  
FCC – ID : **PY7A1041011**  
IC : **4170B-A1041011**  
Hardware : P3  
Software : R1A034

## 1.6 Test standards:

**FCC Part 24, 22  
FCC Part 15**

## 2      Technical test

For Part 24/22 we use the substitution method ( TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also (GPRS class 4 (3+1), that means 3 Down-Link and 1 Up-Link). But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible.

### 2.1      Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

#### FINAL VERDICT: PASS


Technical responsibility for area of testing :

<u>2003-06-10</u>	<u>RSC 8411</u>	<u>Berg M.</u>
Date	Section	Name



Technical responsibility for area of testing :

<u>2003-06-10</u>	<u>RSC8412</u>	<u>Hausknecht D.</u>
Date	Section	Name



**2.2 Test report**

**TEST REPORT**

**Test report no. : 2\_3287-01-01/03**

**TEST REPORT REFERENCE**

<b>PARAMETER TO BE MEASURED</b>	<b>PAGE</b>
<b><u>Part 24 PCS 1900</u></b>	
POWER OUTPUT SUBCLAUSE § 24.232	7
FREQUENCY STABILITY SUBCLAUSE § 24.235	9
AFC FREQ ERROR vs. VOLTAGE	10
AFC FREQ ERROR vs. TEMPERATURE	10
EMISSIONS LIMITS §24.238	12
CONDUCTED SPURIOUS EMISSIONS	29
BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F	38
OCCUPIED BANDWIDTH §2.989	50
<b><u>PART 22/24 PCS 850</u></b>	
POWER OUTPUT SUBCLAUSE § 24.232	57
FREQUENCY STABILITY SUBCLAUSE § 24.235	59
AFC FREQ ERROR vs. VOLTAGE	60
AFC FREQ ERROR vs. TEMPERATURE	60
EMISSIONS LIMITS §24.238	62
CONDUCTED SPURIOUS EMISSIONS	79
OCCUPIED BANDWIDTH §2.989	88
EMISSION LIMITATIONS FOR CELLULAR §22.917(F)	95
CONDUCTED EMISSIONS § 15.107/207	103
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	108
TEST SETUP	110
Photographs of the equipment	112

**POWER OUTPUT****SUBCLAUSE § 24.232****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 ( peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

**Limits:**

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

**Power Measurements:****Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	30.77	30.67
1880.0	0	30.37	30.25
1909.8	0	30.61	30.52
Measurement uncertainty		±0.5 dB	

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

**Method of Measurement:**

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as Pin + 2.1 - Pr.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB.

**Limits:**

<b>Power Step</b>	<b>Burst Average EIRP (dBm)</b>	
	<b>0</b>	<b>&lt;33</b>

**Power Measurements:****Radiated:**

<b>Frequency (MHz)</b>	<b>Power Step</b>	<b>BURST AVERAGE (dBm)</b>		<b>MODULATION AVERAGE (dBm)</b>	
		<b>EIRP</b>	<b>ERP</b>	<b>EIRP</b>	<b>ERP</b>
<b>1850.2</b>	<b>0</b>	<b>31.32</b>	<b>29.21</b>		
<b>1880.0</b>	<b>0</b>	<b>32.32</b>	<b>20.22</b>		
<b>1909.8</b>	<b>0</b>	<b>32.08</b>	<b>29.98</b>		
<b>Measurement uncertainty</b>		<b>±3 dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**FREQUENCY STABILITY****SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 12 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V dc Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

**Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.6 V dc.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)**

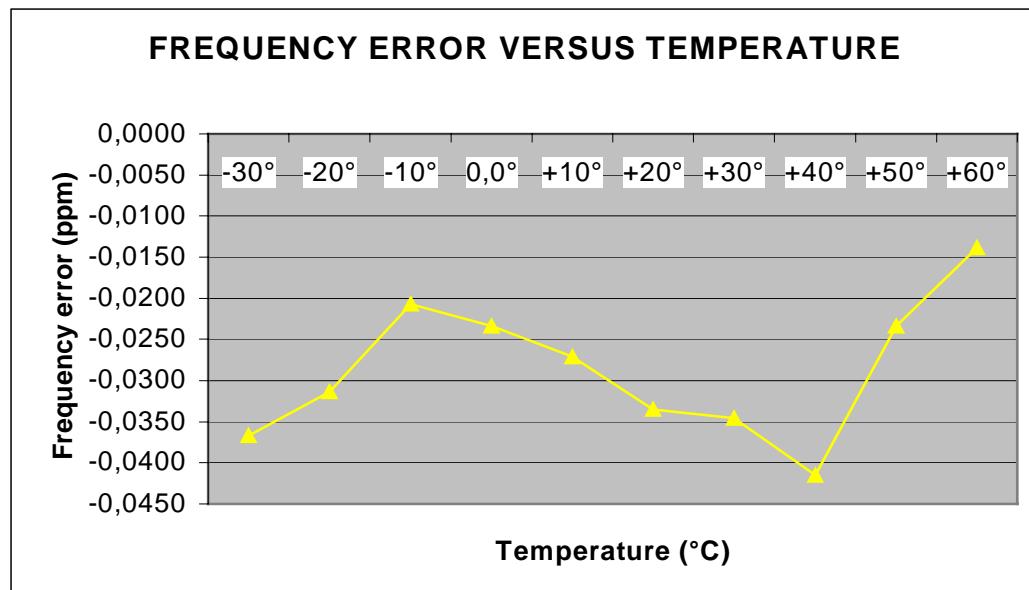
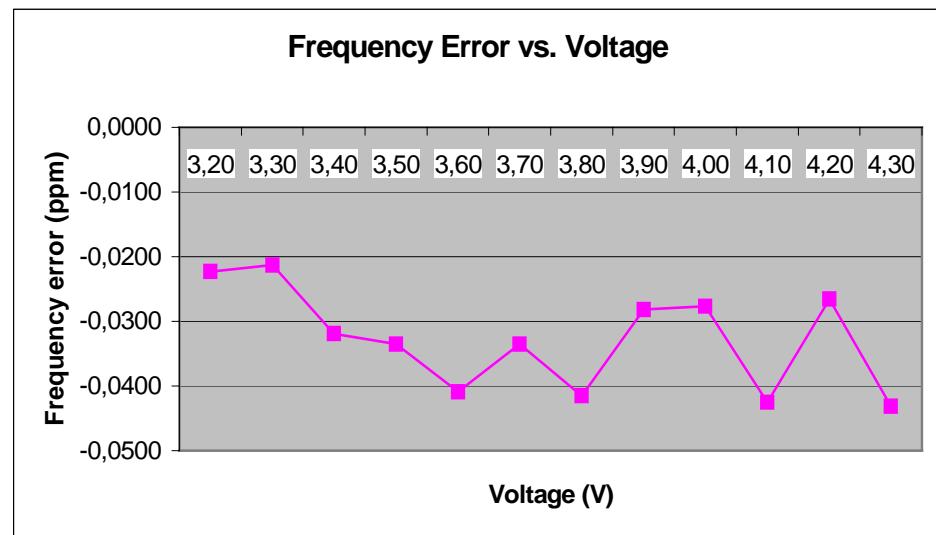
**AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.2	-51	-0,00000271	-0,0271
3.3	-42	-0,00000223	-0,0223
3.4	-40	-0,00000213	-0,0213
3.5	-60	-0,00000319	-0,0319
3.6	-63	-0,00000335	-0,0335
3.7	-77	-0,00000410	-0,0410
3.8	-63	-0,00000335	-0,0335
3.9	-78	-0,00000415	-0,0415
4.0	-53	-0,00000282	-0,0282
4.1	-52	-0,00000277	-0,0277
4.2	-80	-0,00000426	-0,0426
4.3	-50	-0,00000266	-0,0266
4.4	-81	-0,00000431	-0,0431

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-69	-0,00000367	-0,0367
-20	-59	-0,00000314	-0,0314
-10	-39	-0,00000207	-0,0207
±0.0	-44	-0,00000234	-0,0234
+10	-51	-0,00000271	-0,0271
+20	-63	-0,00000335	-0,0335
+30	-65	-0,00000346	-0,0346
+40	-78	-0,00000415	-0,0415
+50	-44	-0,00000234	-0,0234
+60	-26	-0,00000138	-0,0138

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)



**EMISSIONS LIMITS****§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

**The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0. 8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

**Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

### Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

### RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

EMISSION LIMITATIONS						
f (MHz)		amplitude of emission (dBm)	limit max. allowed emmision power (dBm)	actual attenuation below frequency of operation (dBc)	results	
<b>CH 512</b>						
1850.2		31.32	-13.0 (44.32 dBc)		carrier	
<b>no traceable signal found</b>						
<b>CH 661</b>						
1880.0		32.32	-13.0 (45.32 dBc)		carrier	
15932.9		-36.14		68.46	complies	
<b>CH 810</b>						
1909.8		32.08	-13.0 (45.08 dBc)		carrier	
15953.9		-36.21		68.29	complies	
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>				

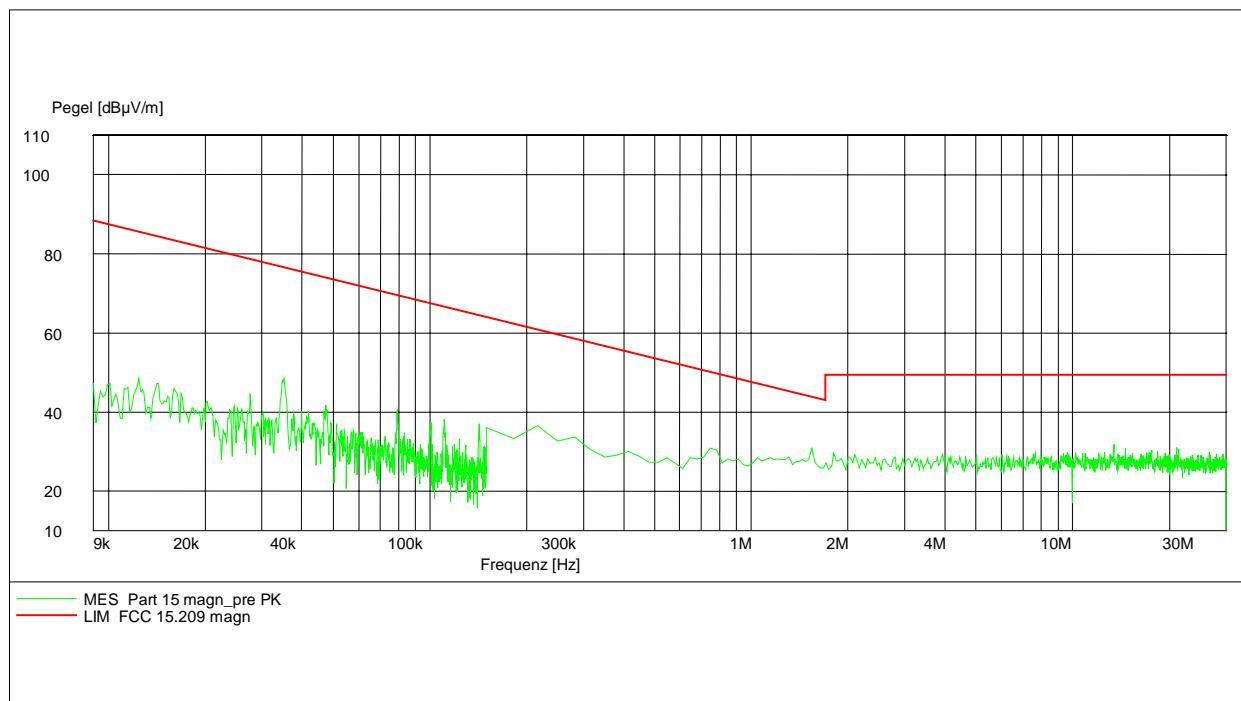
### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

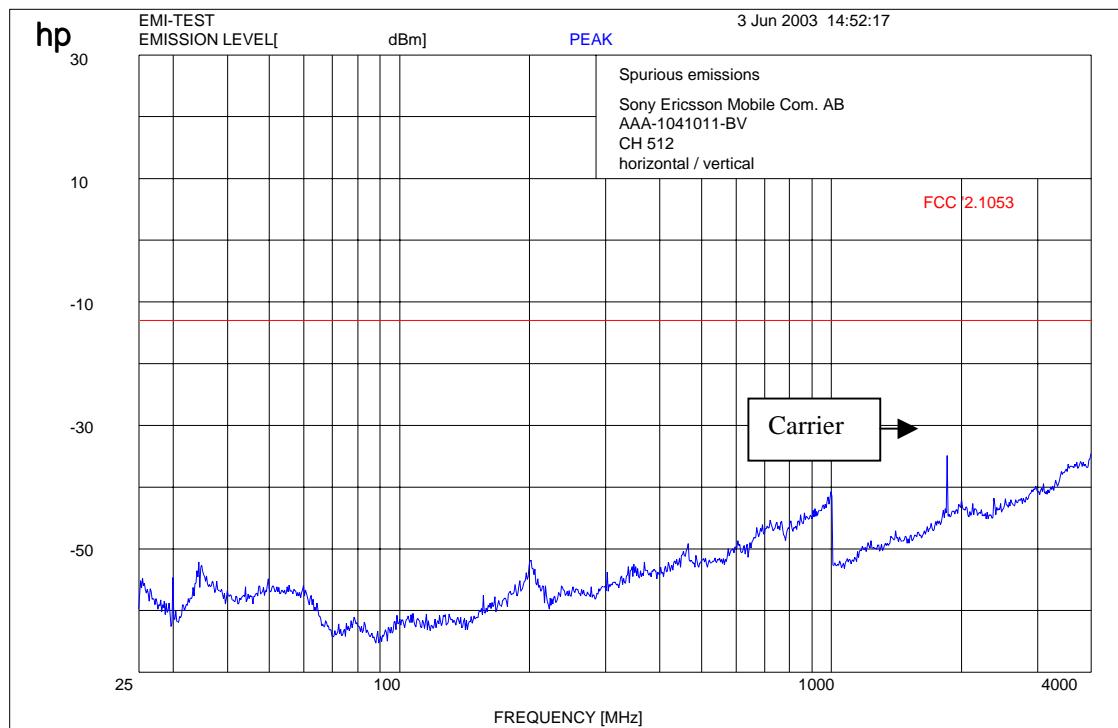
**9 kHz – 30 MHz (valid for all 3 channels)****Part 15.209 Magnetics**

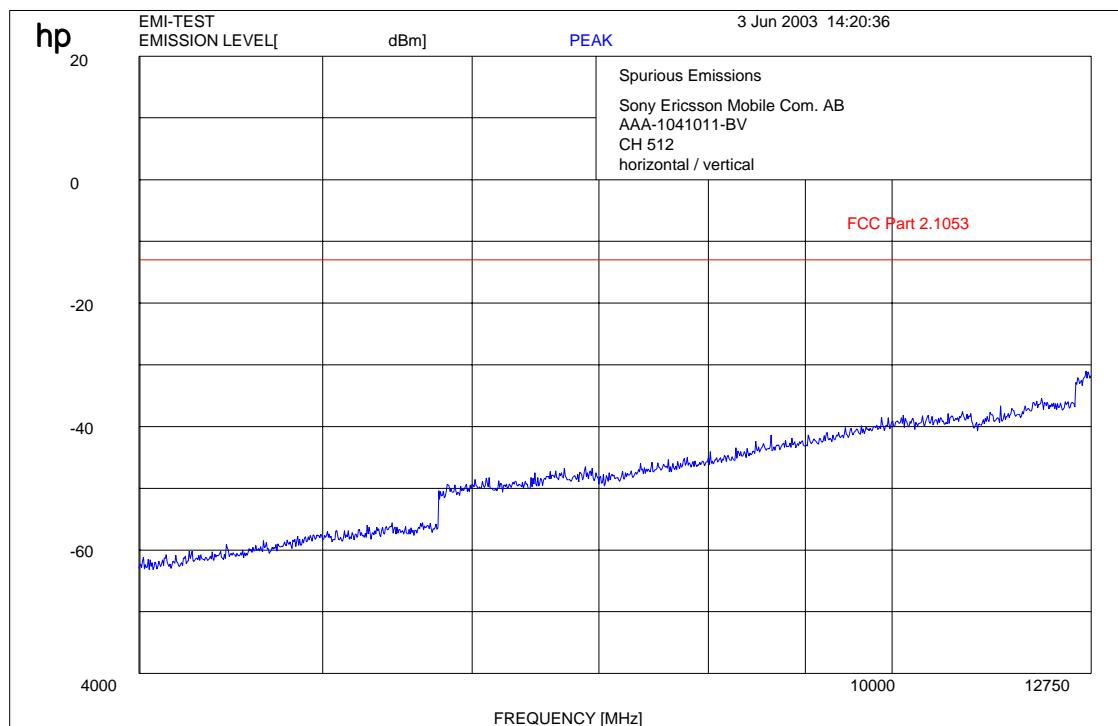
EUT: AAB-1041011-BV  
Manufacturer: Sony Ericsson  
Operating Condition: Traffic mode with charger 4020073-BV  
Test Site: Cetecom, Room 6  
Operator: Berg  
Test Specification: 115V / 60 Hz  
Comment:  
Start of Test: 04.06.03 / 09:08:59

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

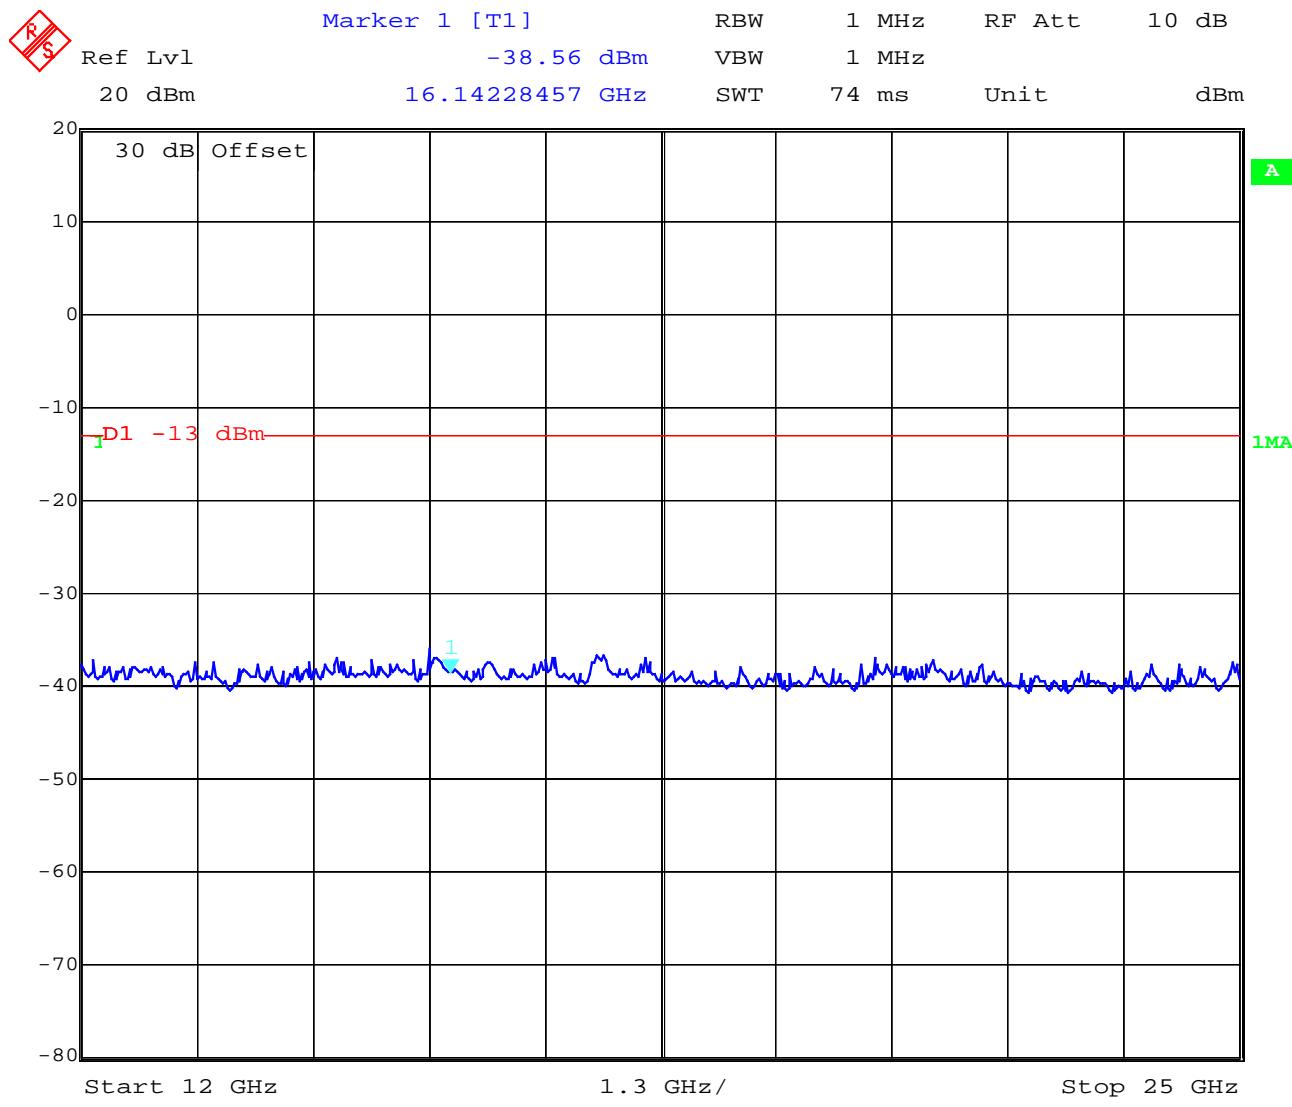
**Channel 512 (up to 4 GHz )** **$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz** **$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz****Carrier suppressed with a rejection filter****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24; 64**

**Channel 512 (up to 12 GHz )****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW / VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

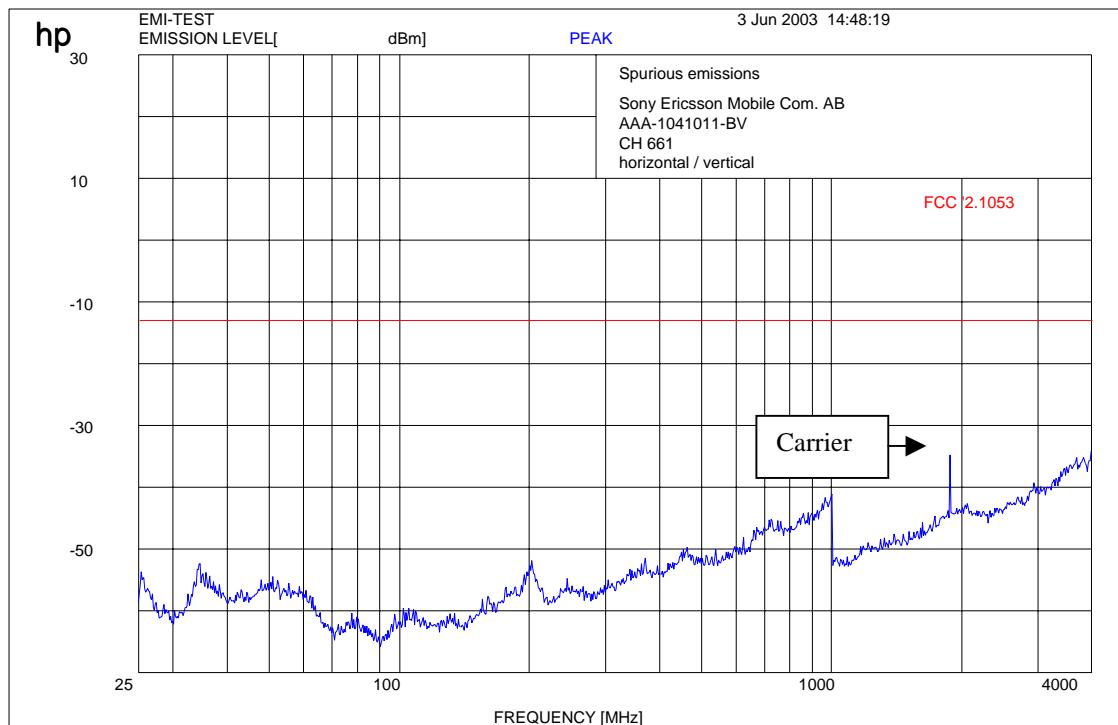
## Channel 512 :- 25 GHz



## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24; 64

**Channel 661 (up to 4 GHz )**

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

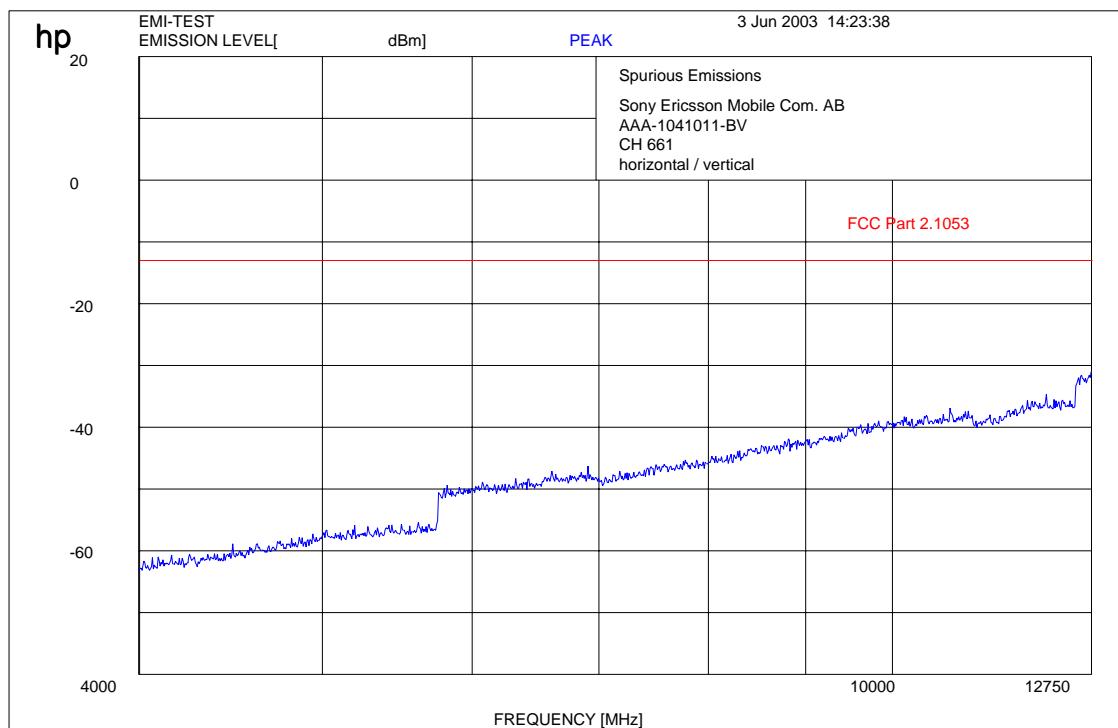
$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

**Carrier suppressed with a rejection filter**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

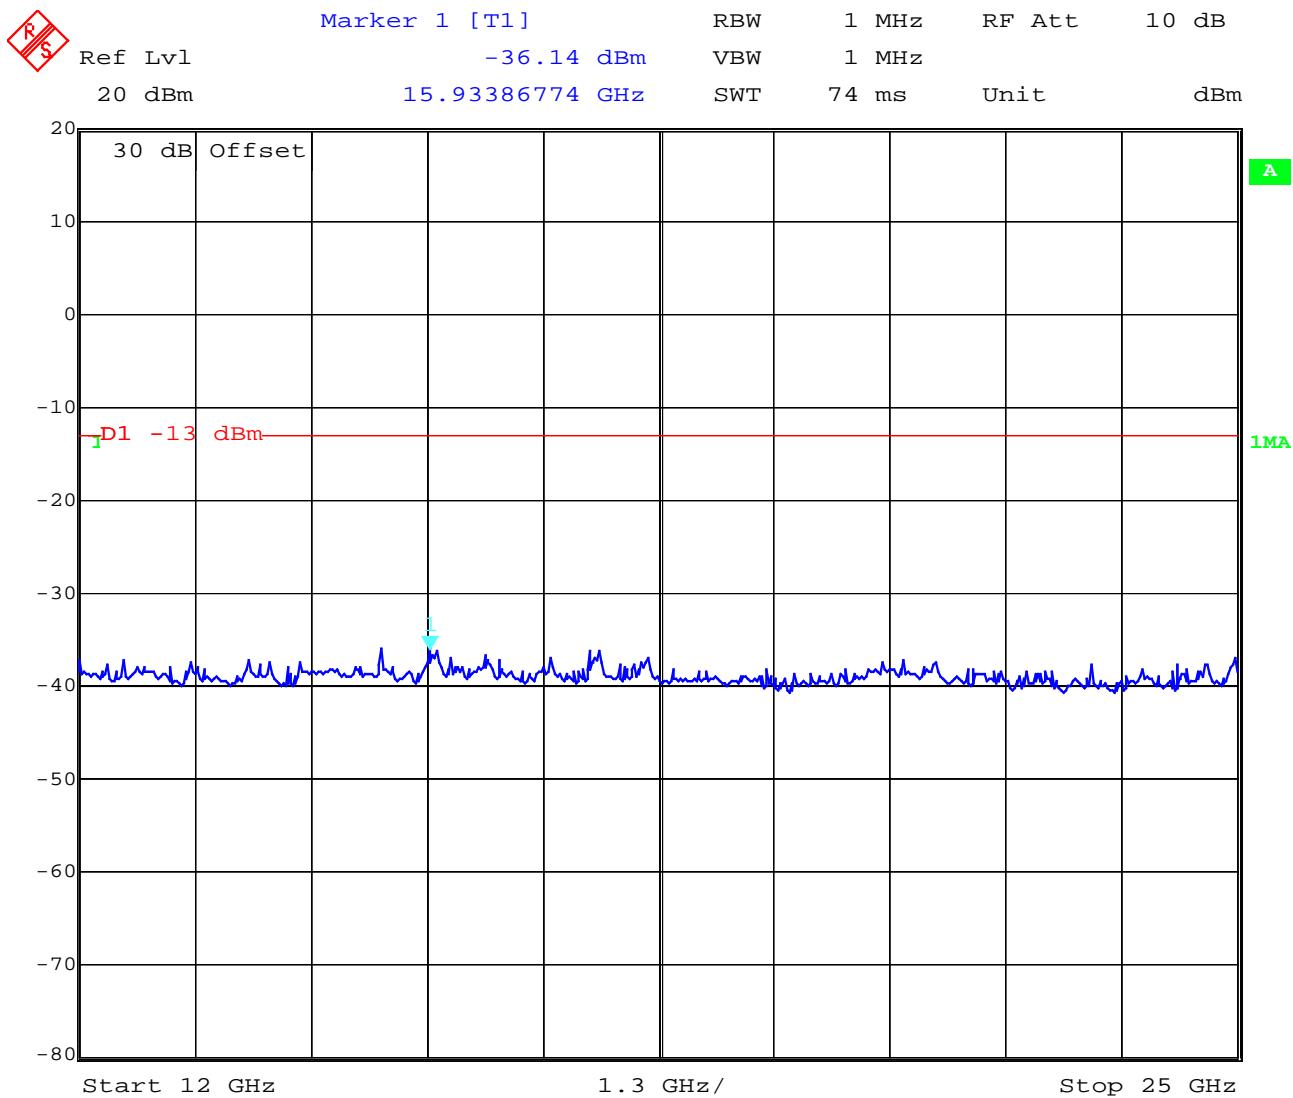
(for reference numbers see test equipment listing)

17 – 24; 64

**Channel 661 (up to 12 GHz )****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW / VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

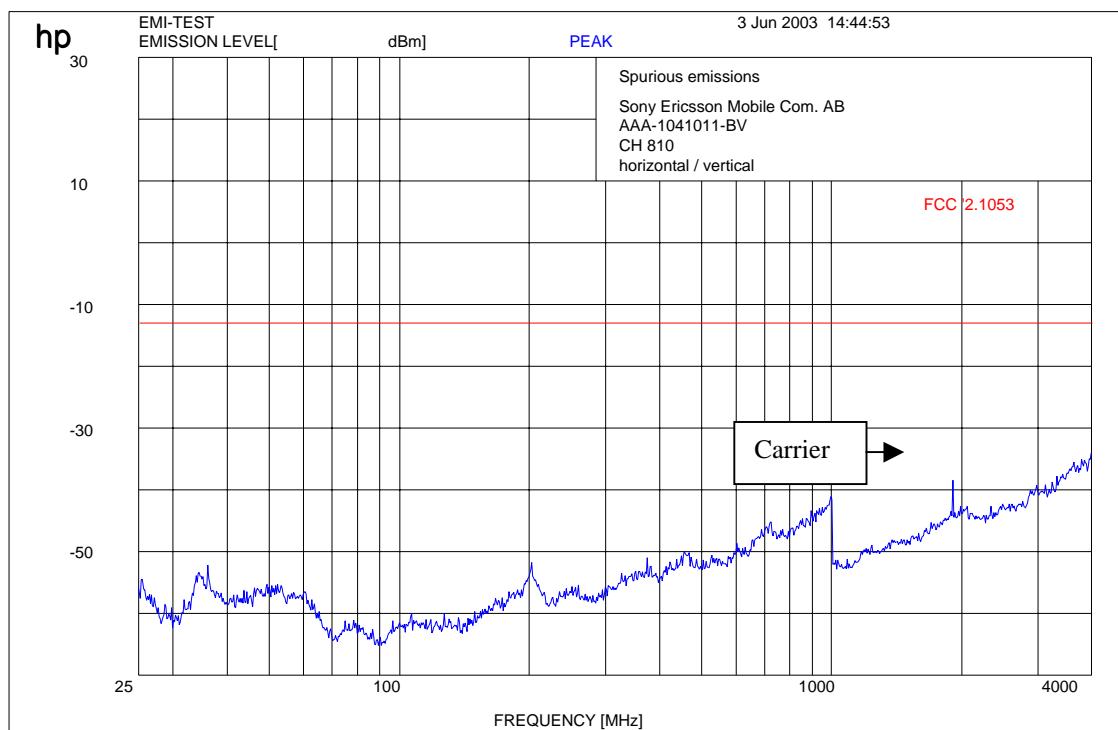
**Channel 661 : -25 GHz**

Date: 6.JUN.2003 09:13:20

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24; 64

**Channel 810 up to 4 GHz**

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

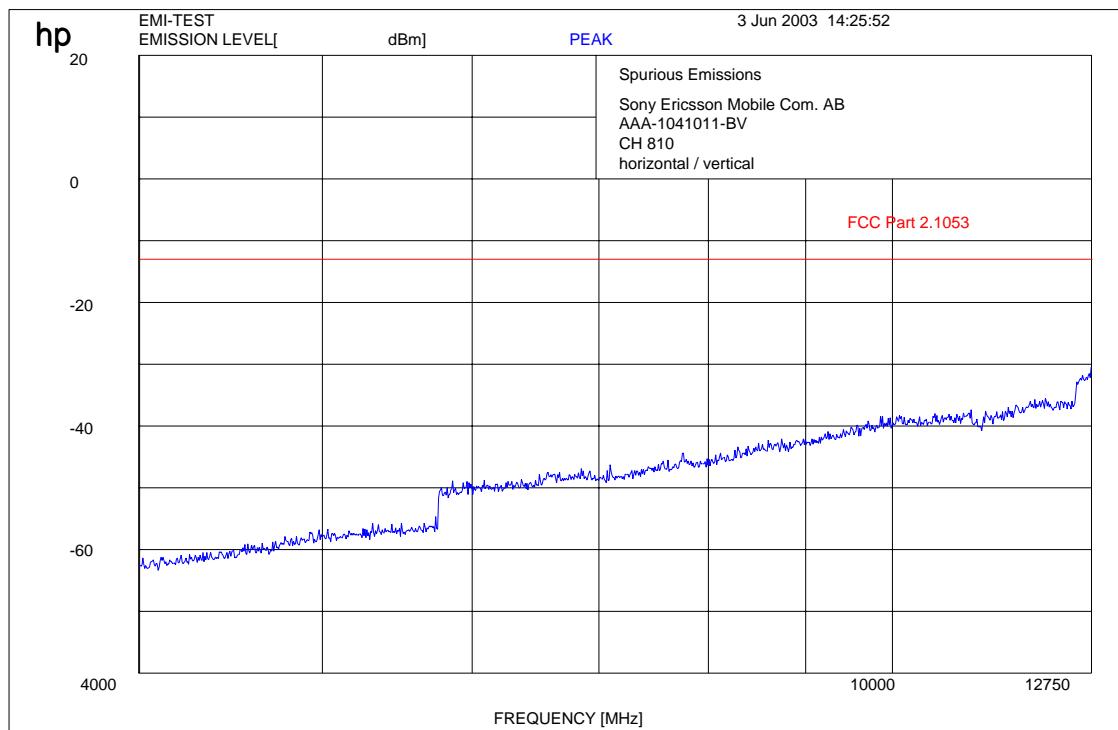
$f \geq 1 \text{ GHz}$  : RBW / VBW 1 MHz

Carrier suppressed with a rejection filter

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

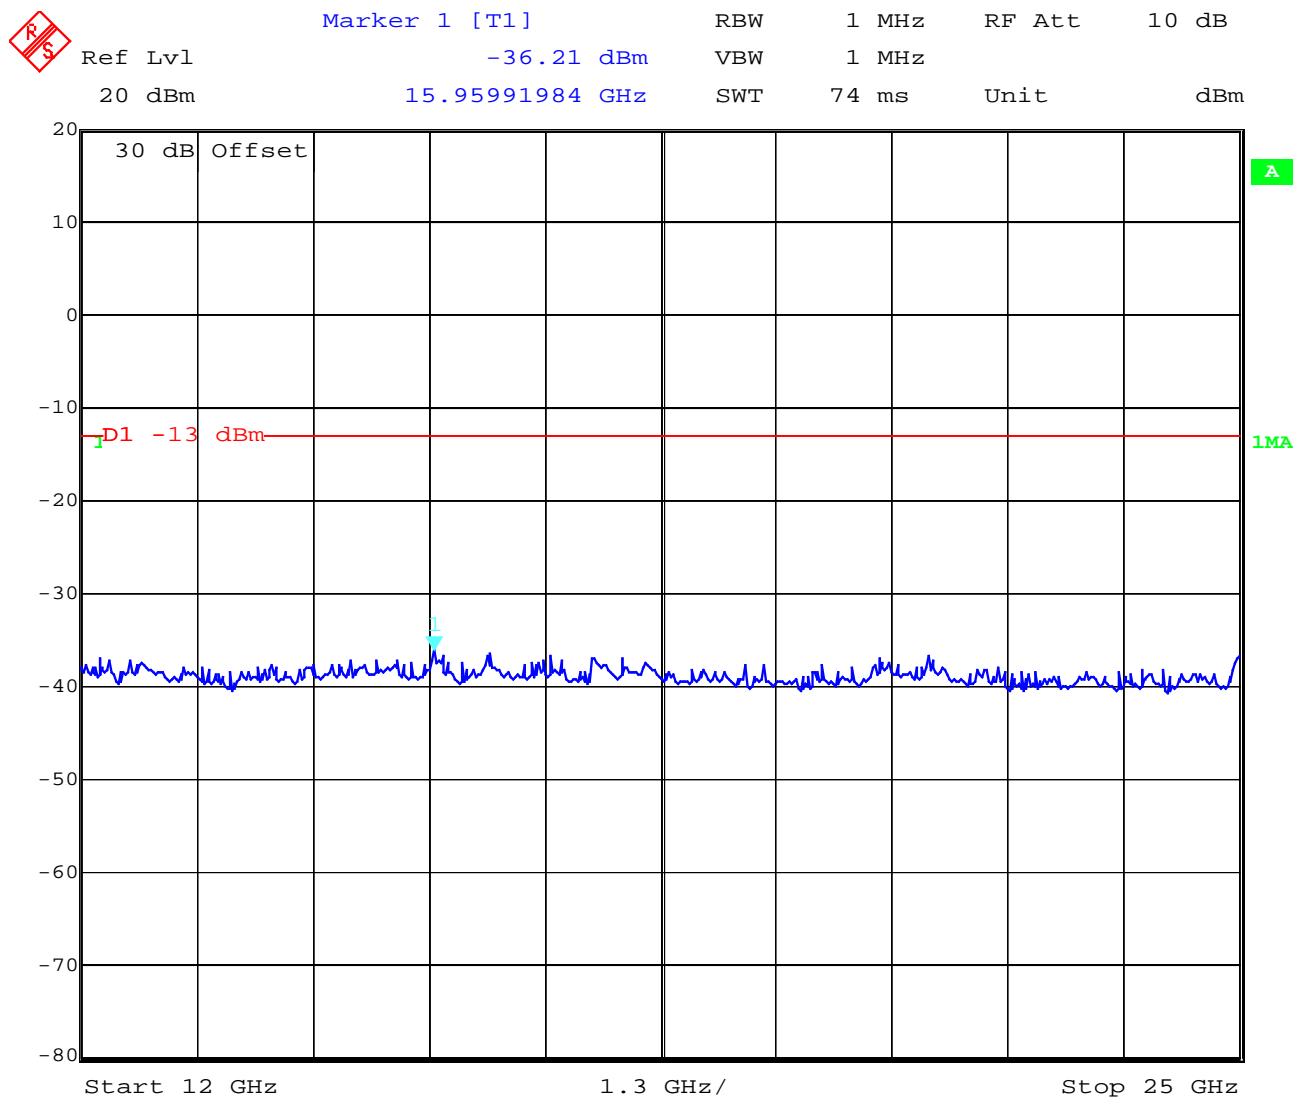
17 – 24, 64

**Channel 810 up to 12 GHz****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**17 – 24, 64**

**Channel 810 : -25 GHz**



Date: 6.JUN.2003 09:13:48

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

## **RECEIVER SPURIOUS RADIATION Radiated**

## § 15.109

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
35.6	QP	24.8						
45.23	QP	6.1						
52.12	QP	7.4						
84.15	QP	6.0						
Measurement uncertainty			±3 dB					

**f < 1 GHz : RBW/VBW: 100 kHz**

**f ≥ 1GHz : RBW/VBW: 1 MHz**

**see above plots**

## Measurement distance see table

## Limits

## **SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 - 88	100 (40 dB $\mu$ V/m)	3
88 - 216	150 (43.5 dB $\mu$ V/m)	3
216 - 960	200 (46 dB $\mu$ V/m)	3
above 960	500 (54 dB $\mu$ V/m)	3

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT**  
(for reference numbers see test equipment listing)

17 - 24, 64

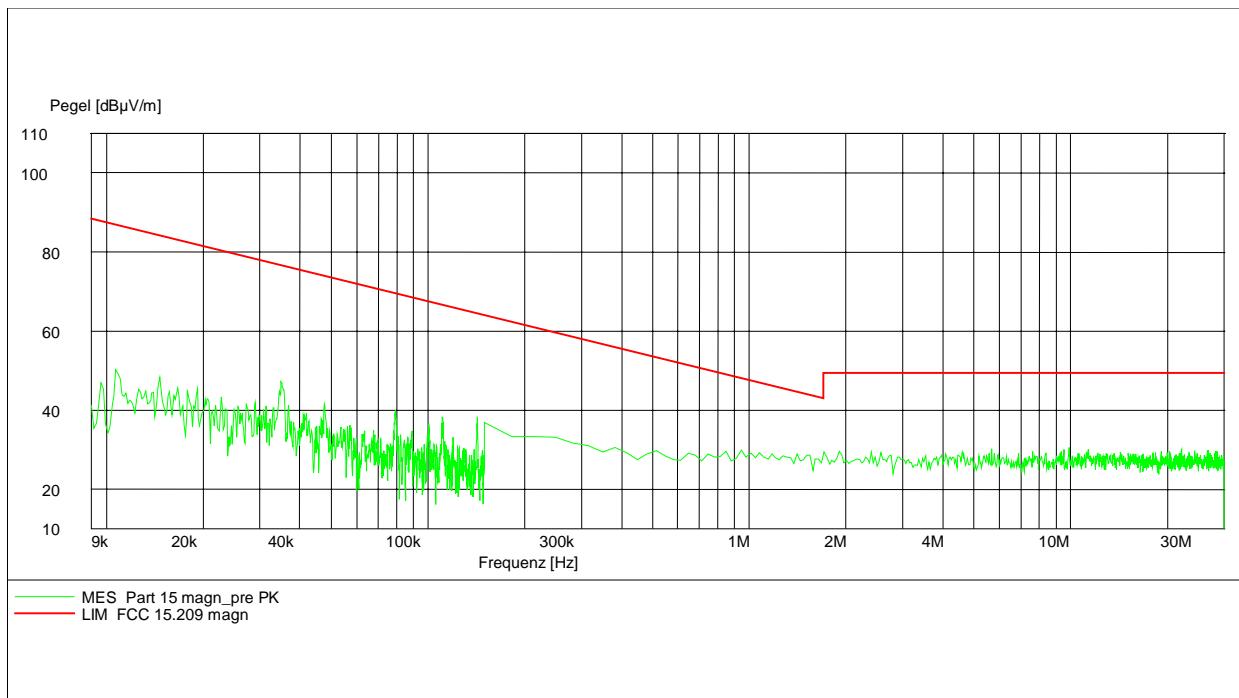
## Idle mode

**Channel 661 (this is valid for all 3 channels )**

**9 kHz –30 MHz**

### *Part 15.209 Magnetics*

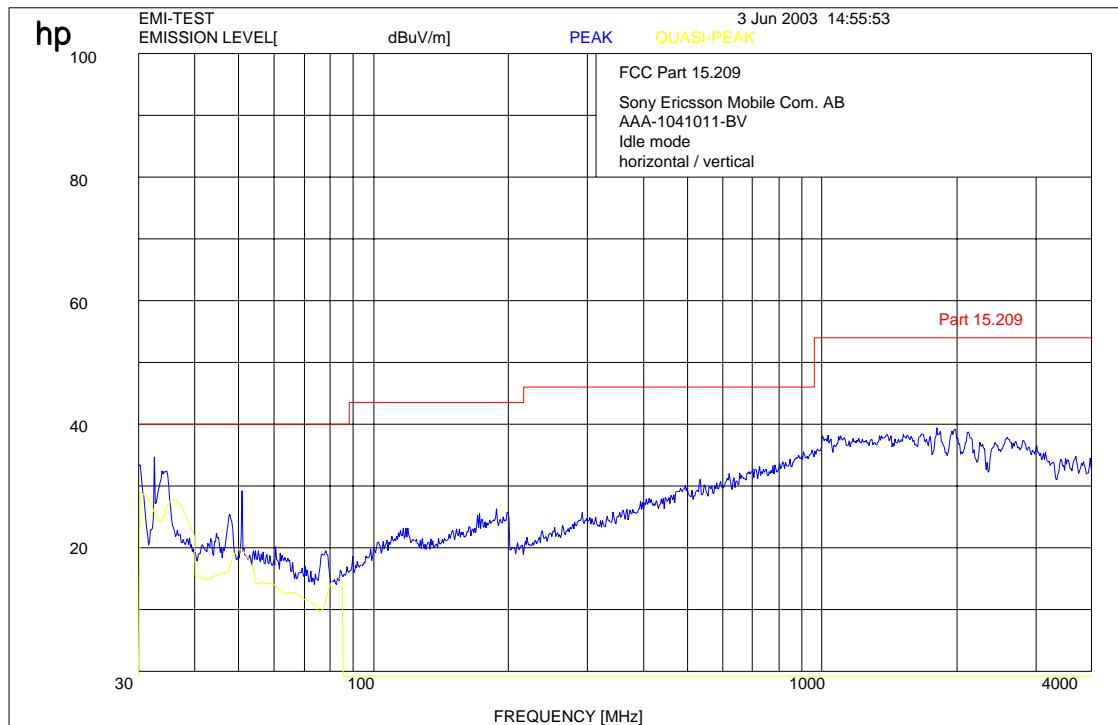
EUT: AAB-1031011-BV  
Manufacturer: Sony Ericsson  
Operating Condition: Idle mode with charger 4020069-BV  
Test Site: Cetecom, Room 6  
Operator: Berg  
Test Specification: 115V / 60 Hz  
Comment:  
Start of Test: 04.06.03 / 09:03:32



## REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

**Channel 661 (this is valid for all 3 channels and up to 4 GHz)  
Idle-Mode**

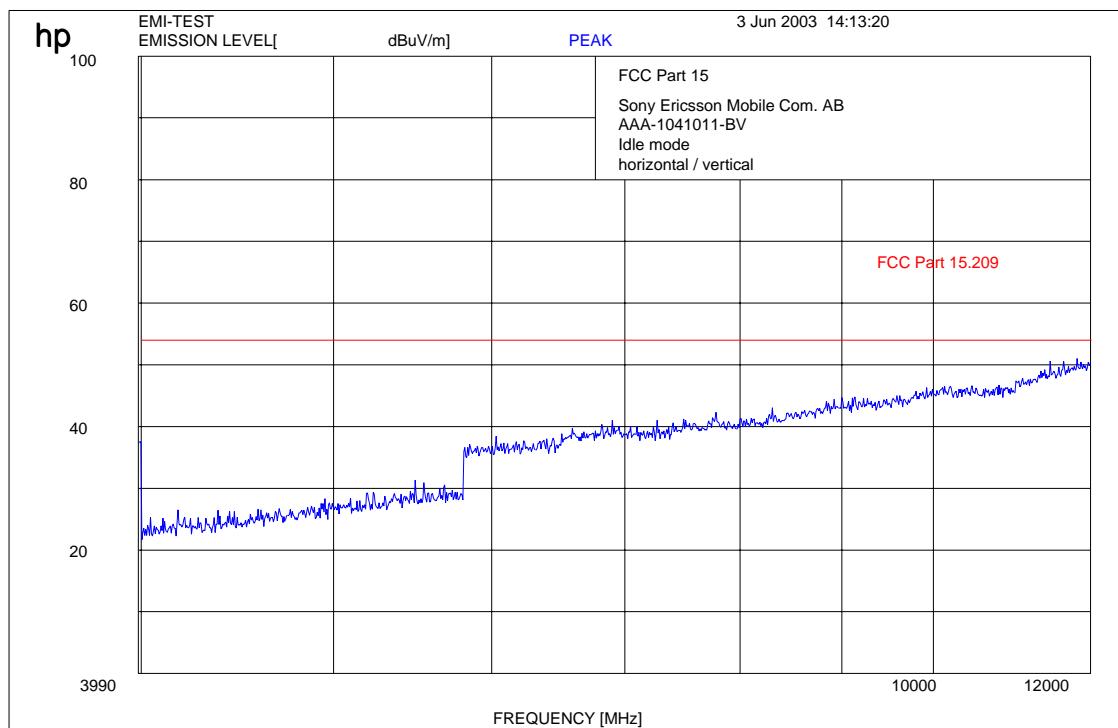
**f < 1 GHz : RBW/VBW: 100 kHz**

**f ≥ 1GHz : RBW/VBW 1 MHz**

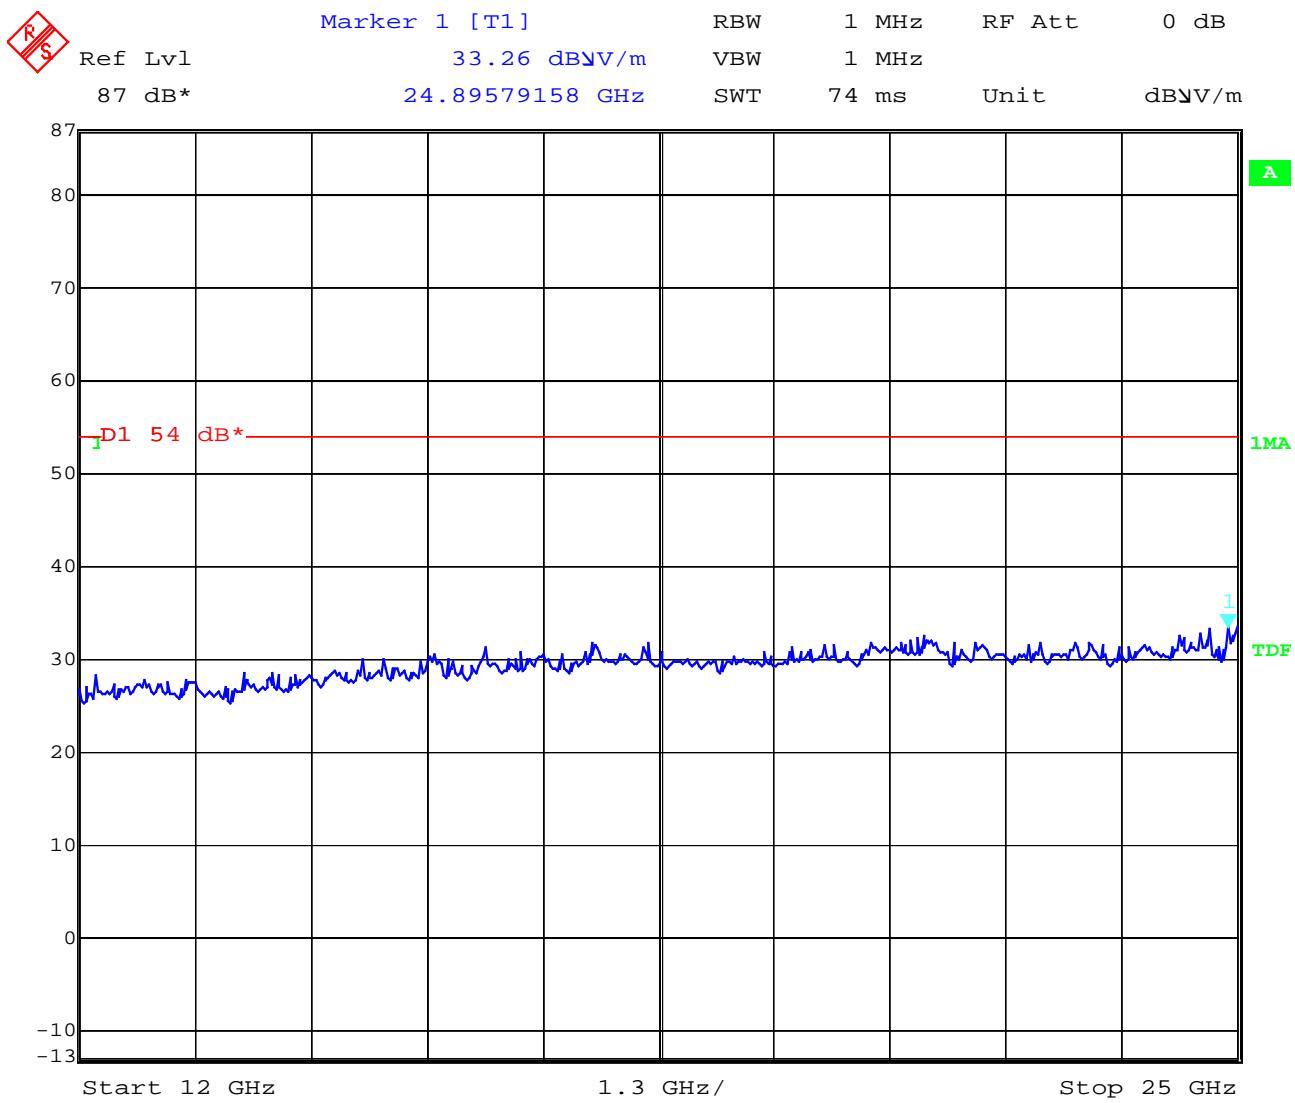
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

**Channel 661 (this is valid for all 3 channels and up to 12 GHz)  
Idle-Mode****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz**

**Channel 661 (this is valid for all 3 channels and up to 25 GHz)**  
**Idle-Mode**



Date: 6.JUN.2003 09:04:06

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

**CONDUCTED SPURIOUS EMISSIONS****Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**USPCS Transmitter****Channel Frequency**

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz

**Measurement Limit:**

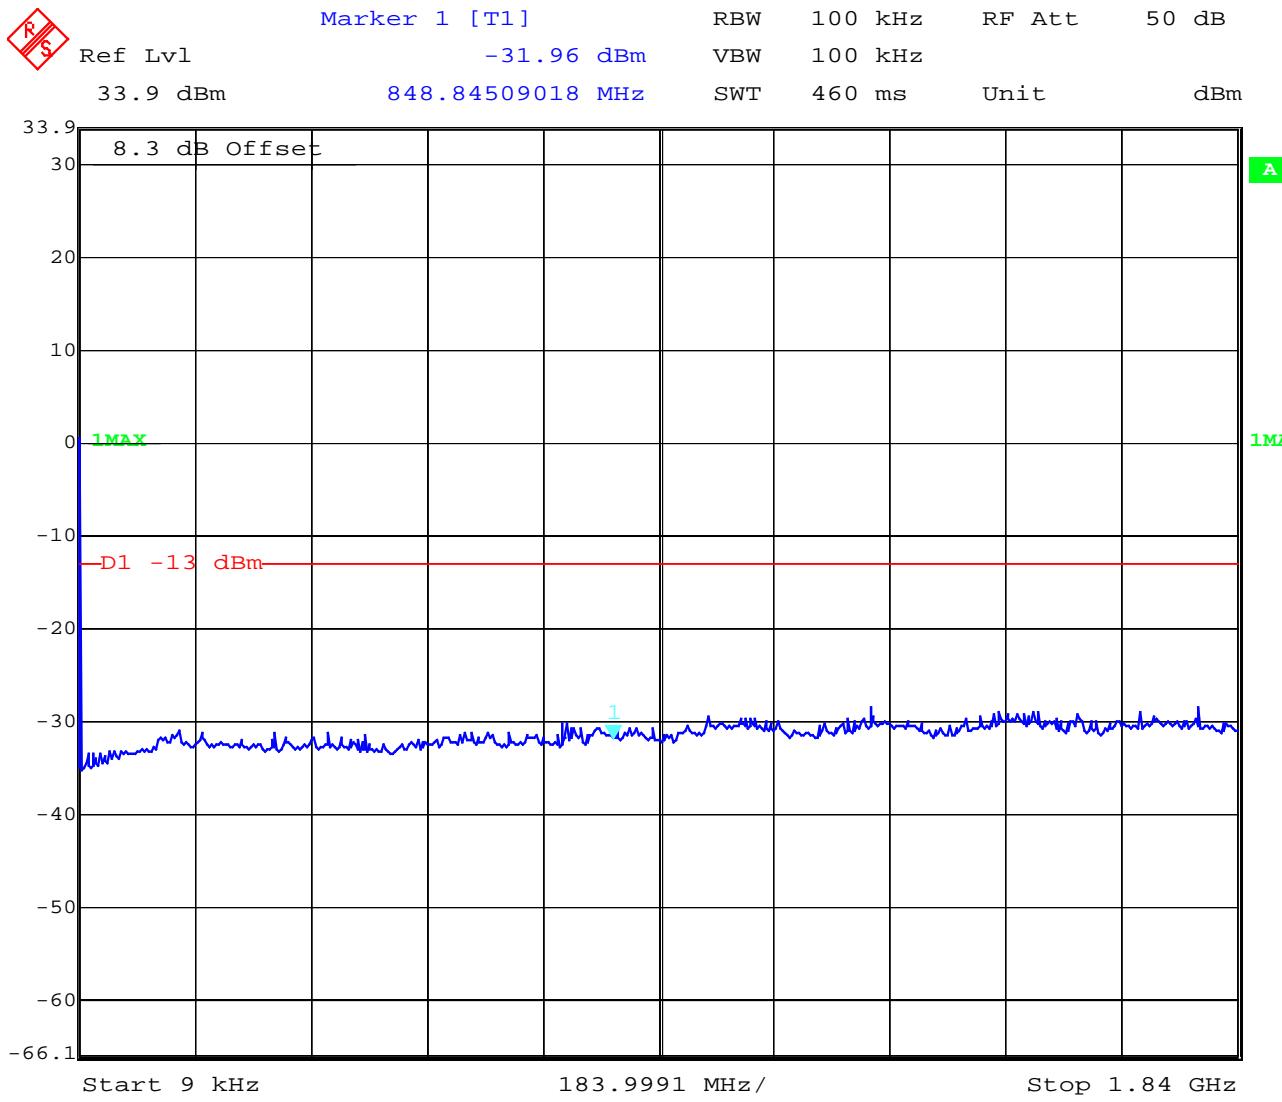
Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 512</b>					
1850.2		30.77	-13.0 (43.77 dBc)		carrier
1849.98		-14.35		45.12	complies
<b>CH 661</b>					
1880.0		30.37	-13.0 (43.37 dBc)		carrier
1879.0		-26.40		56.77	complies
<b>CH 810</b>					
1909.8		30.61	-13.0 (43.61 dBc)		carrier
1910.02		-15.59		46.20	complies
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

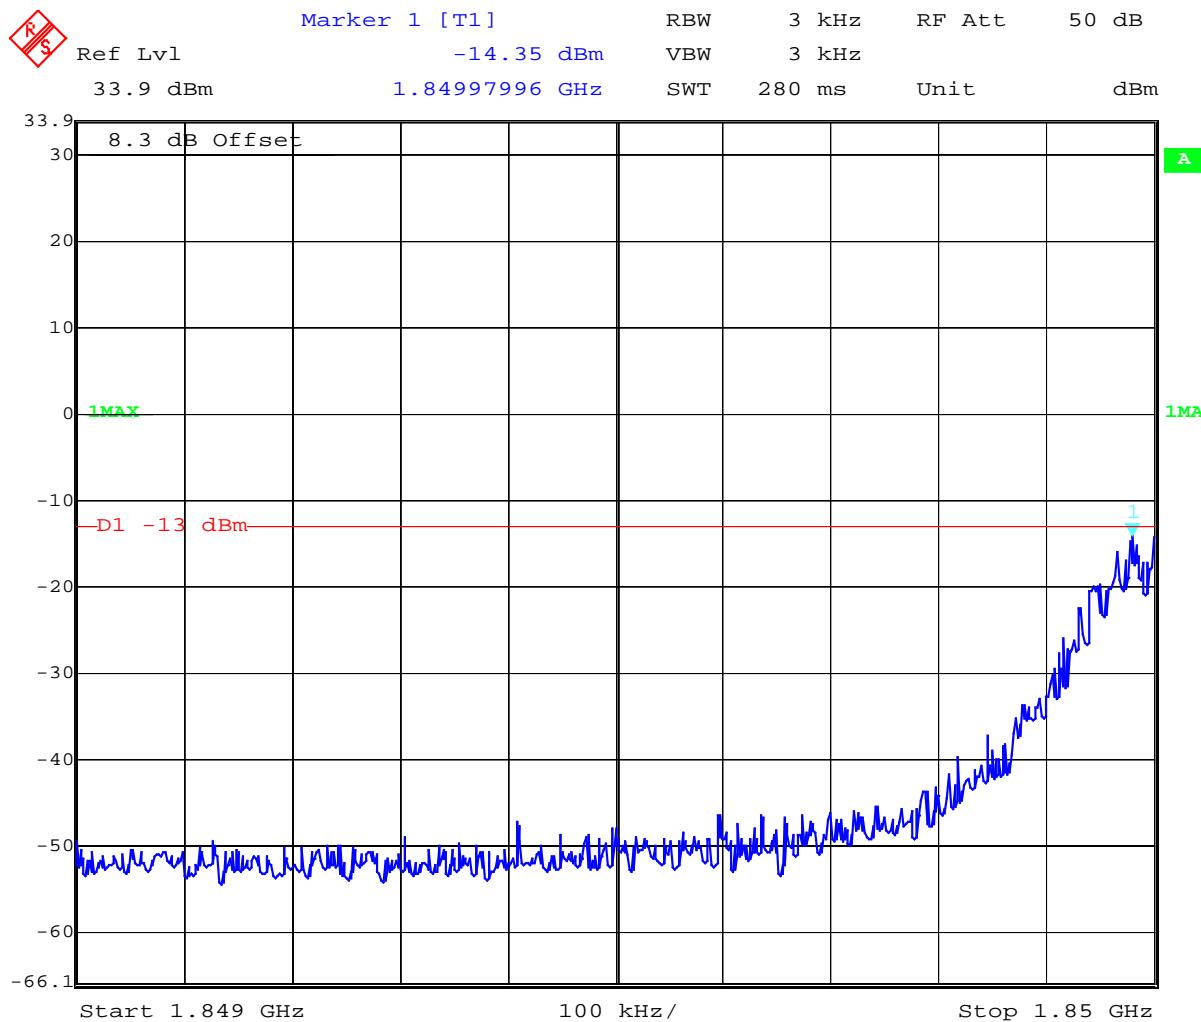
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**Measurements:****Channel: 512**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 512**



Date: 6.JUN.2003 07:24:40

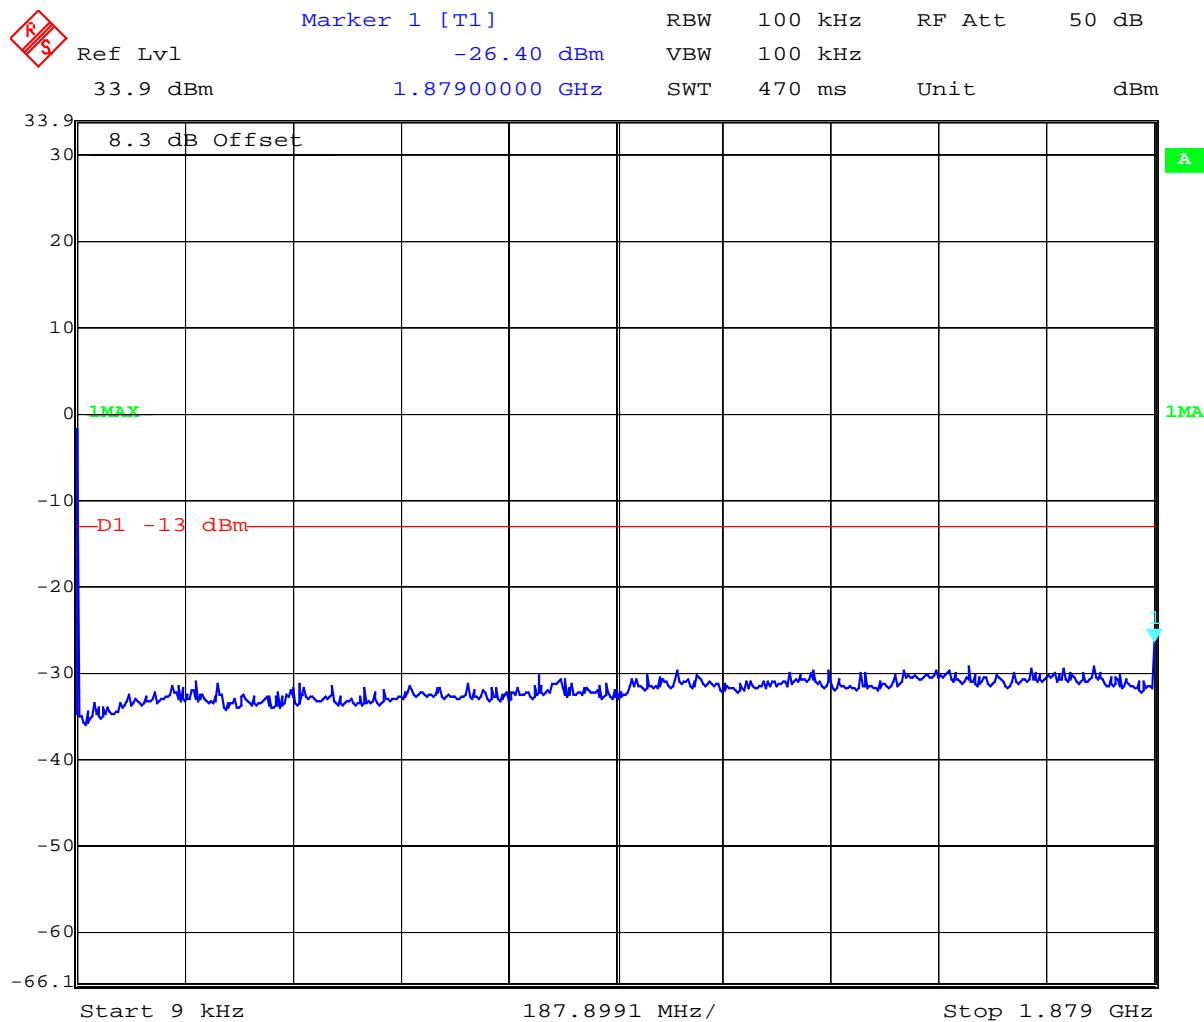
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 512**



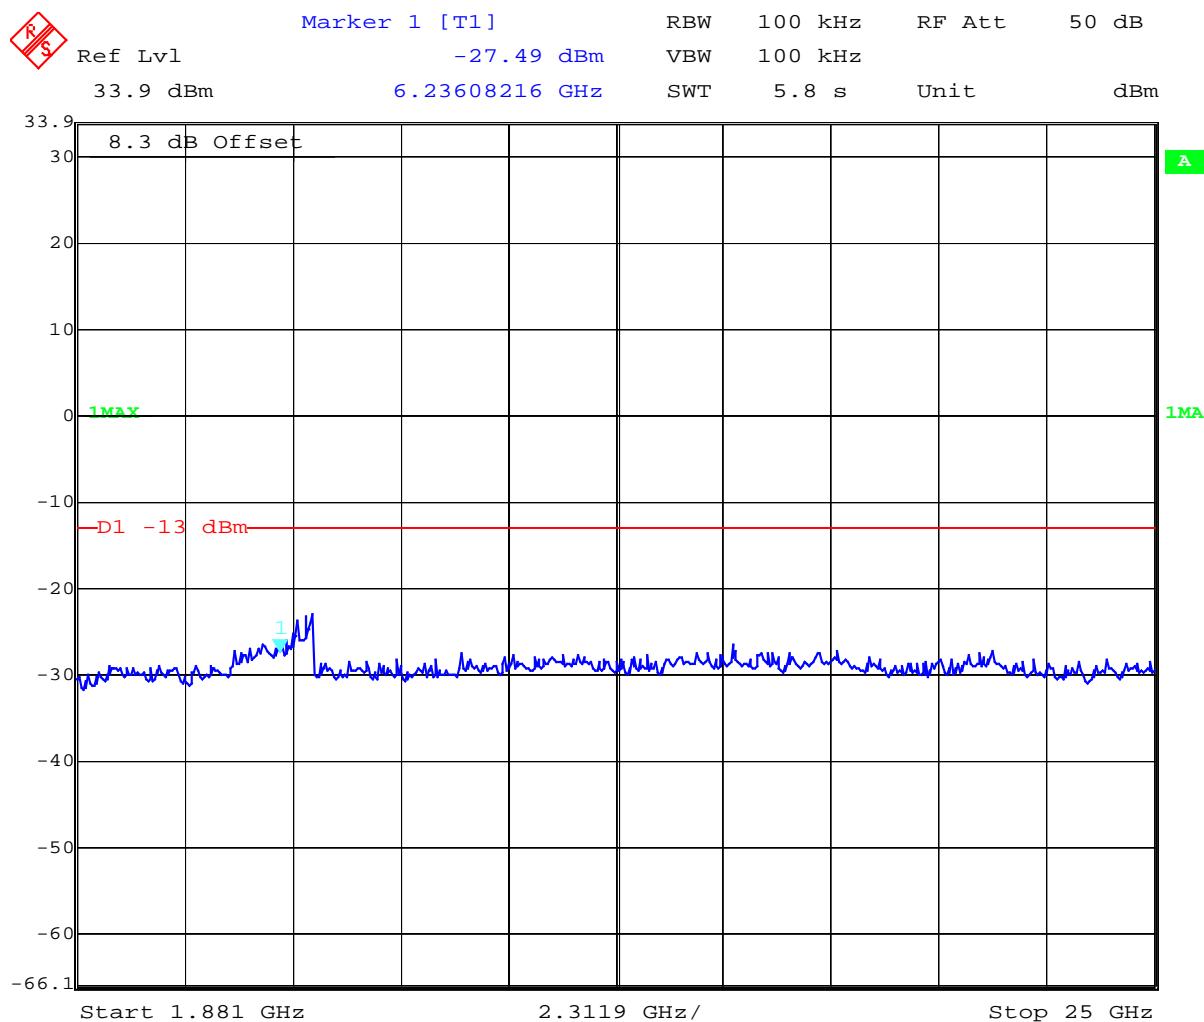
Date: 6.JUN.2003 07:26:10

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

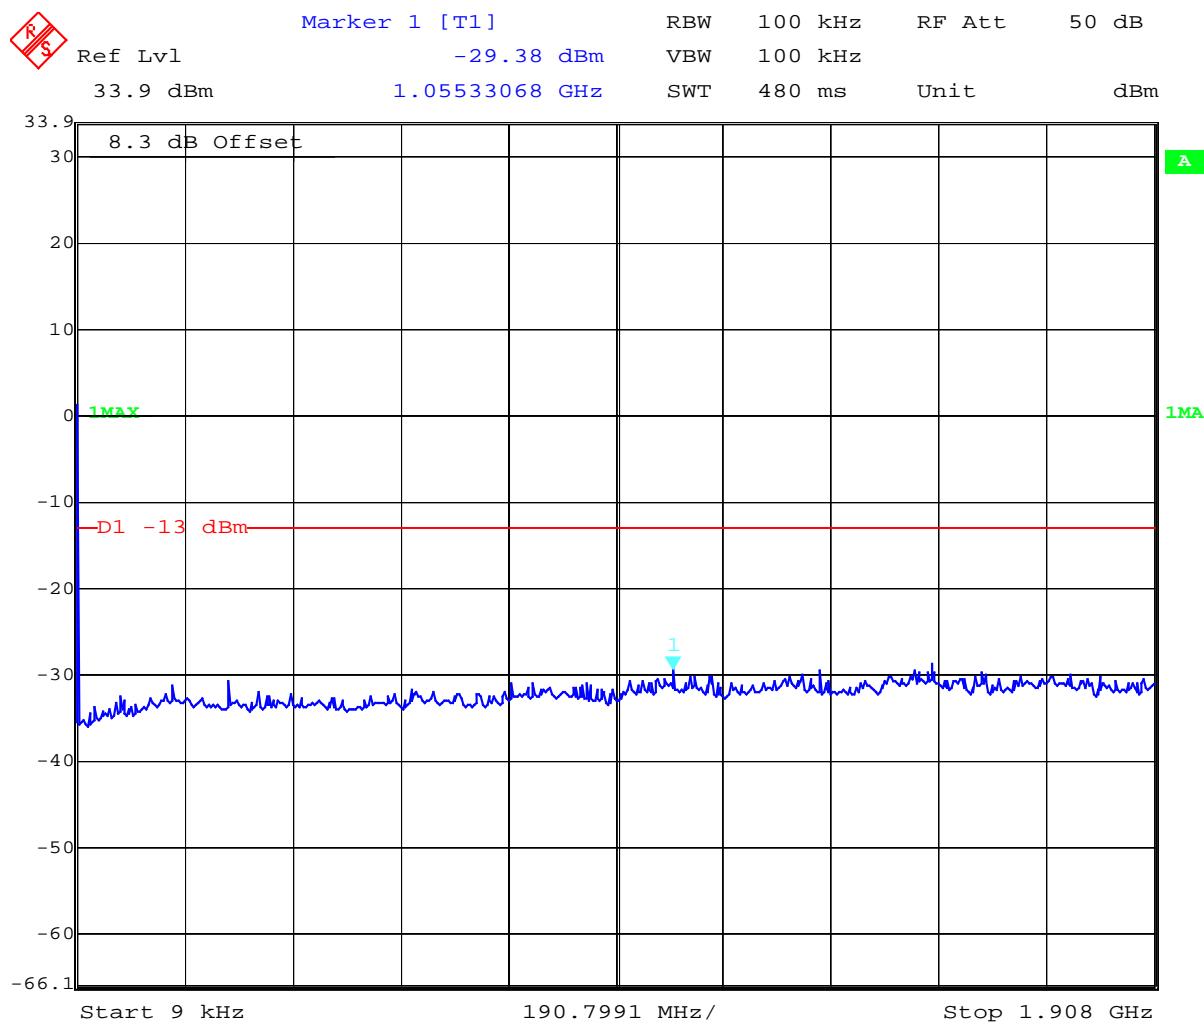
**Channel 661**

Date: 6.JUN.2003 07:28:20

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

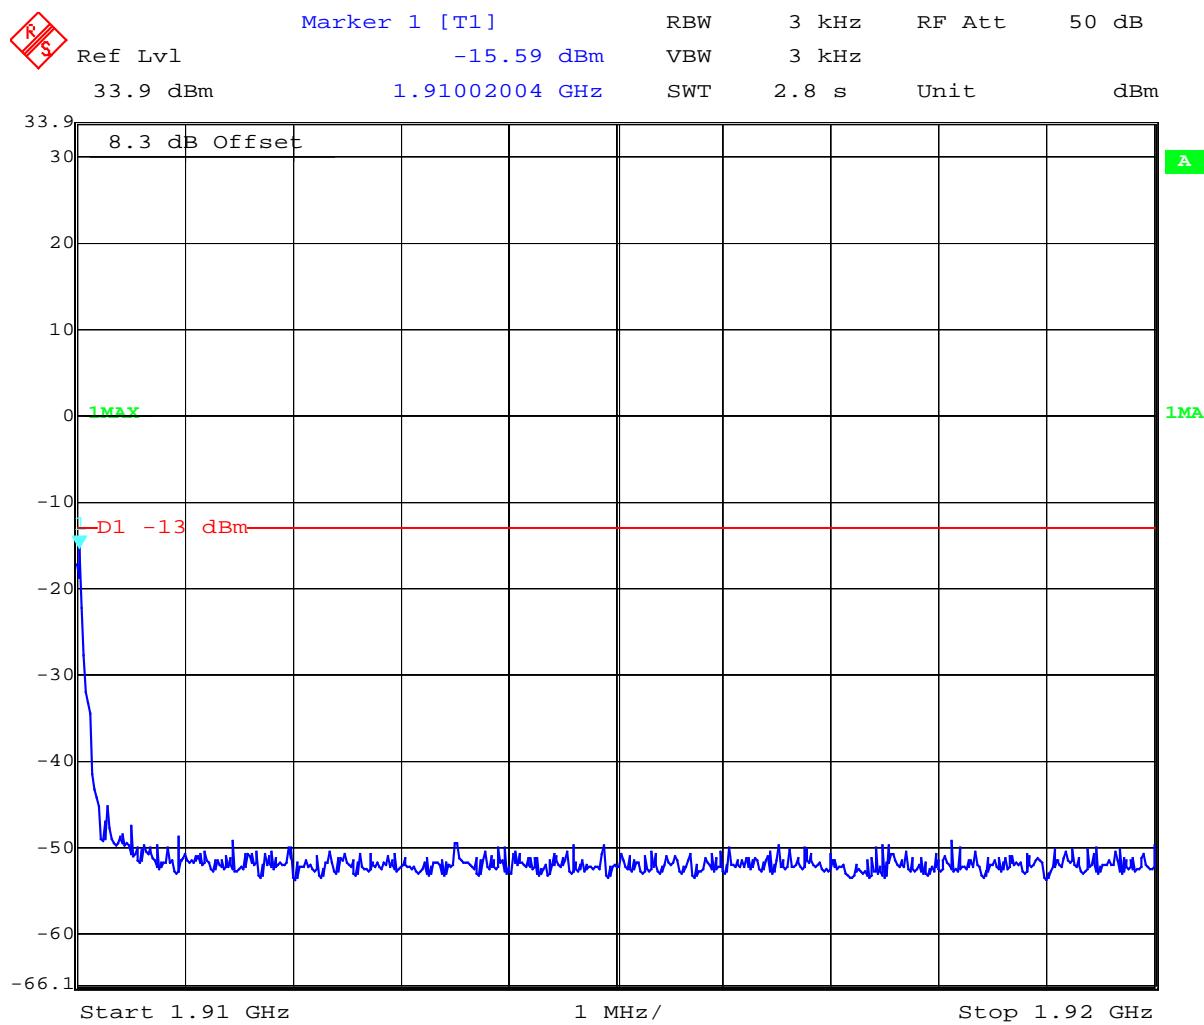
**Channel 661**

Date: 6.JUN.2003 07:29:37

**Channel 810**

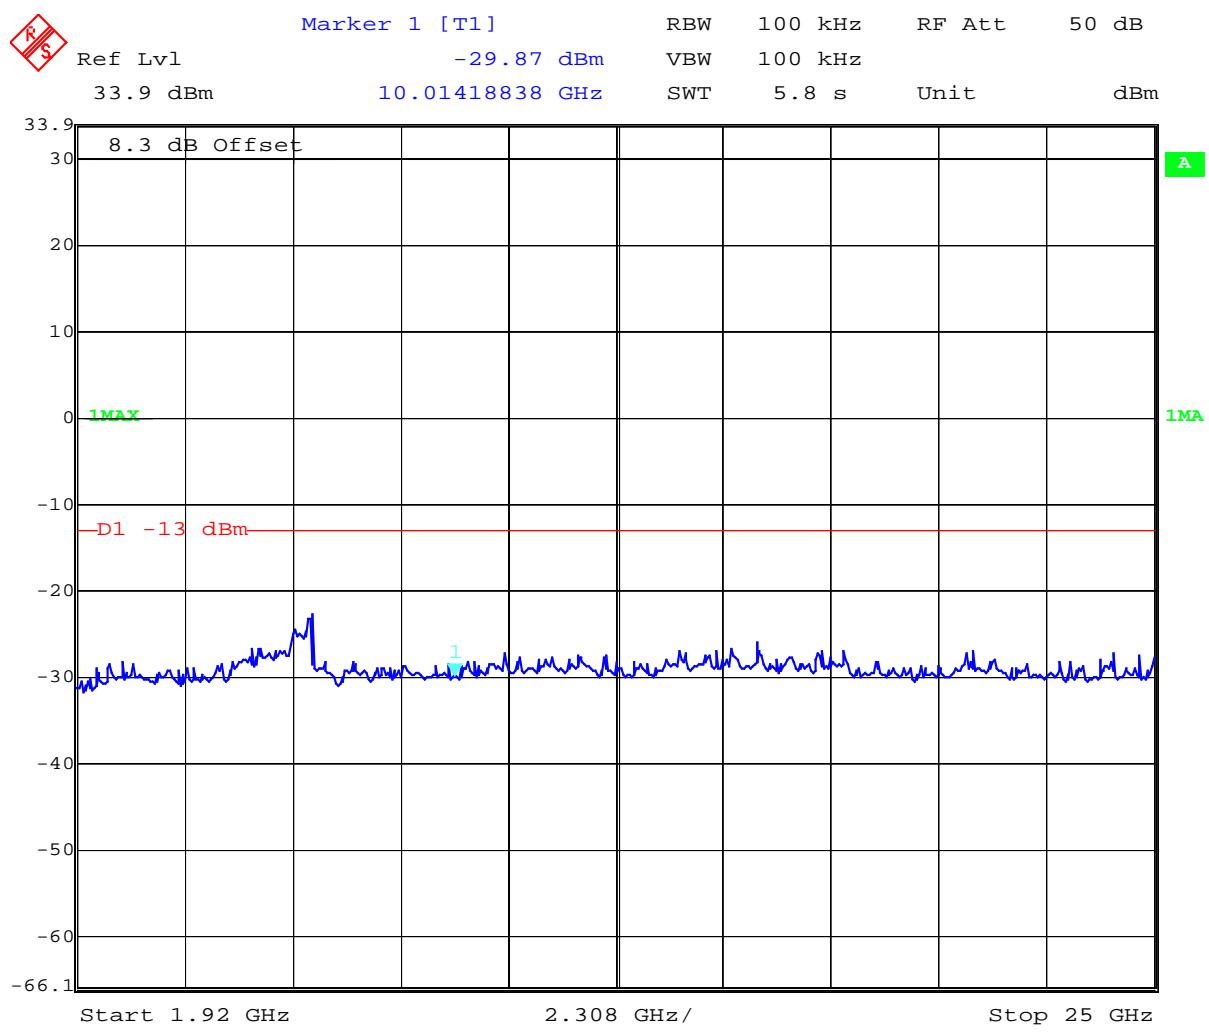
Date: 6.JUN.2003 07:30:36

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 810**

Date: 6.JUN.2003 07:31:38

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 810**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**BLOCK EDGE COMPLIANCE FOR BLOCK A, B, C, D, E AND F**

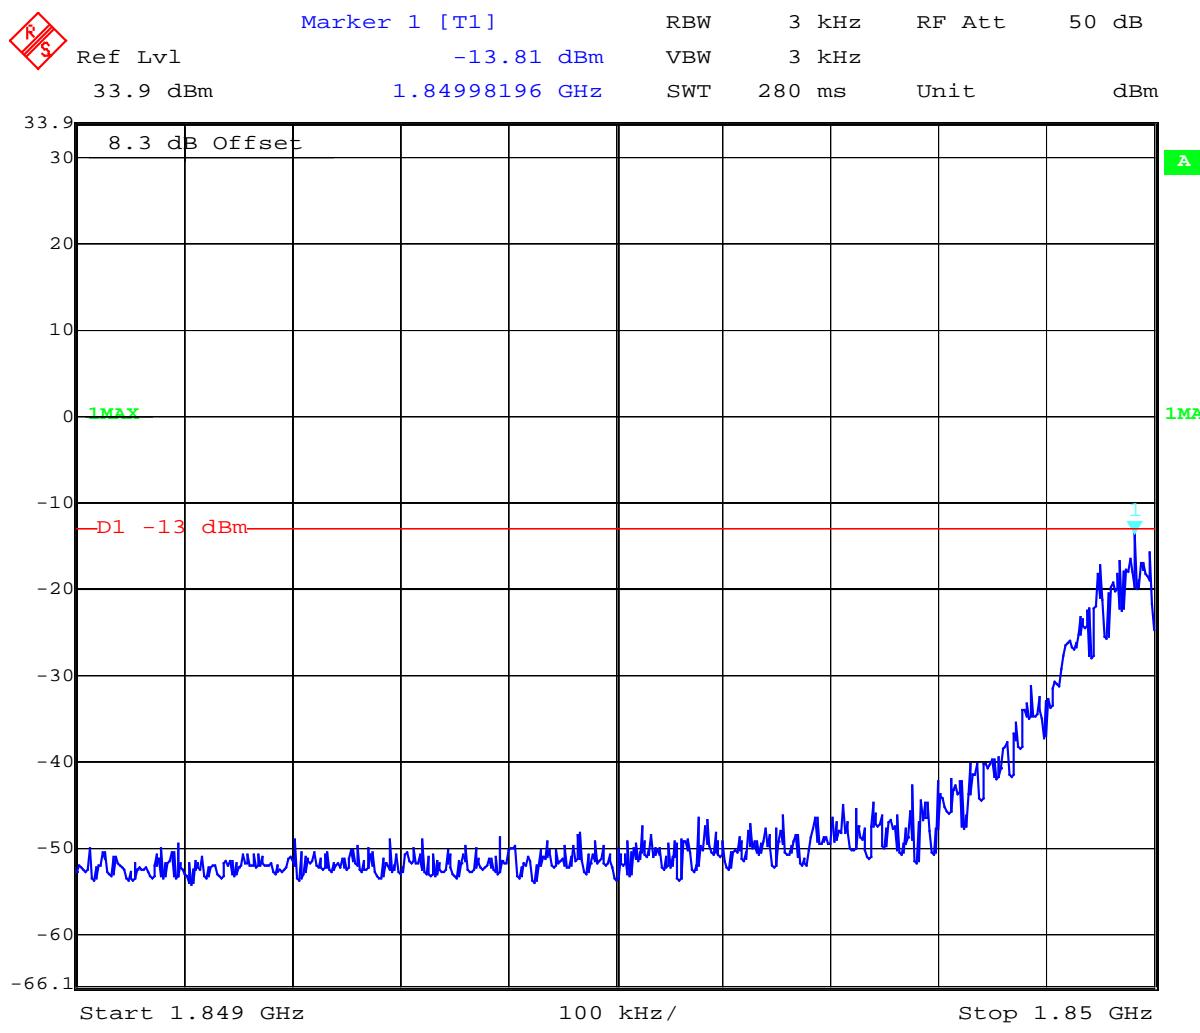
**Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**Measurements:**

**Block A Channel 512**

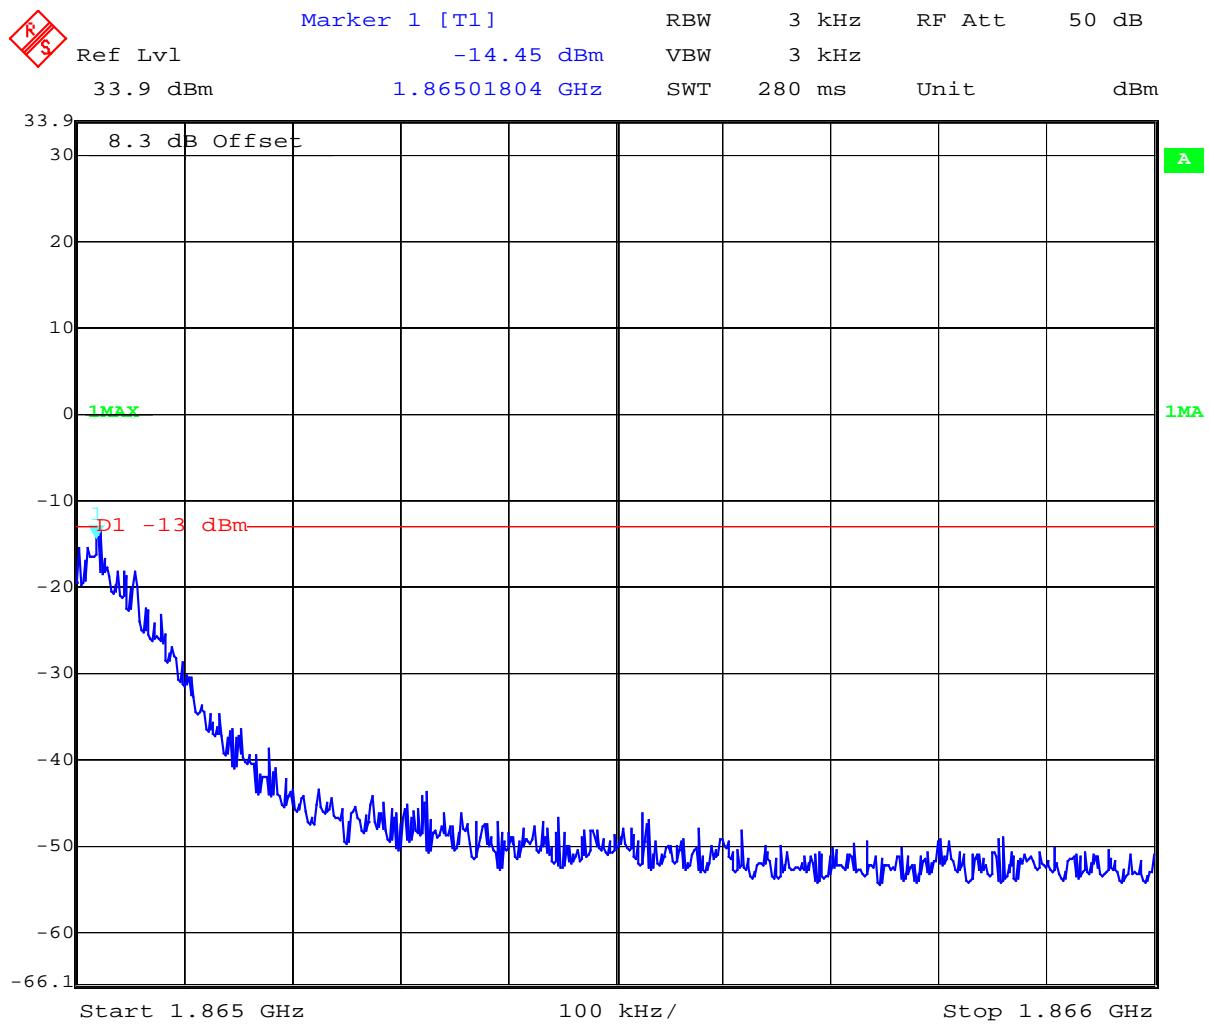


Date: 6.JUN.2003 07:38:44

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

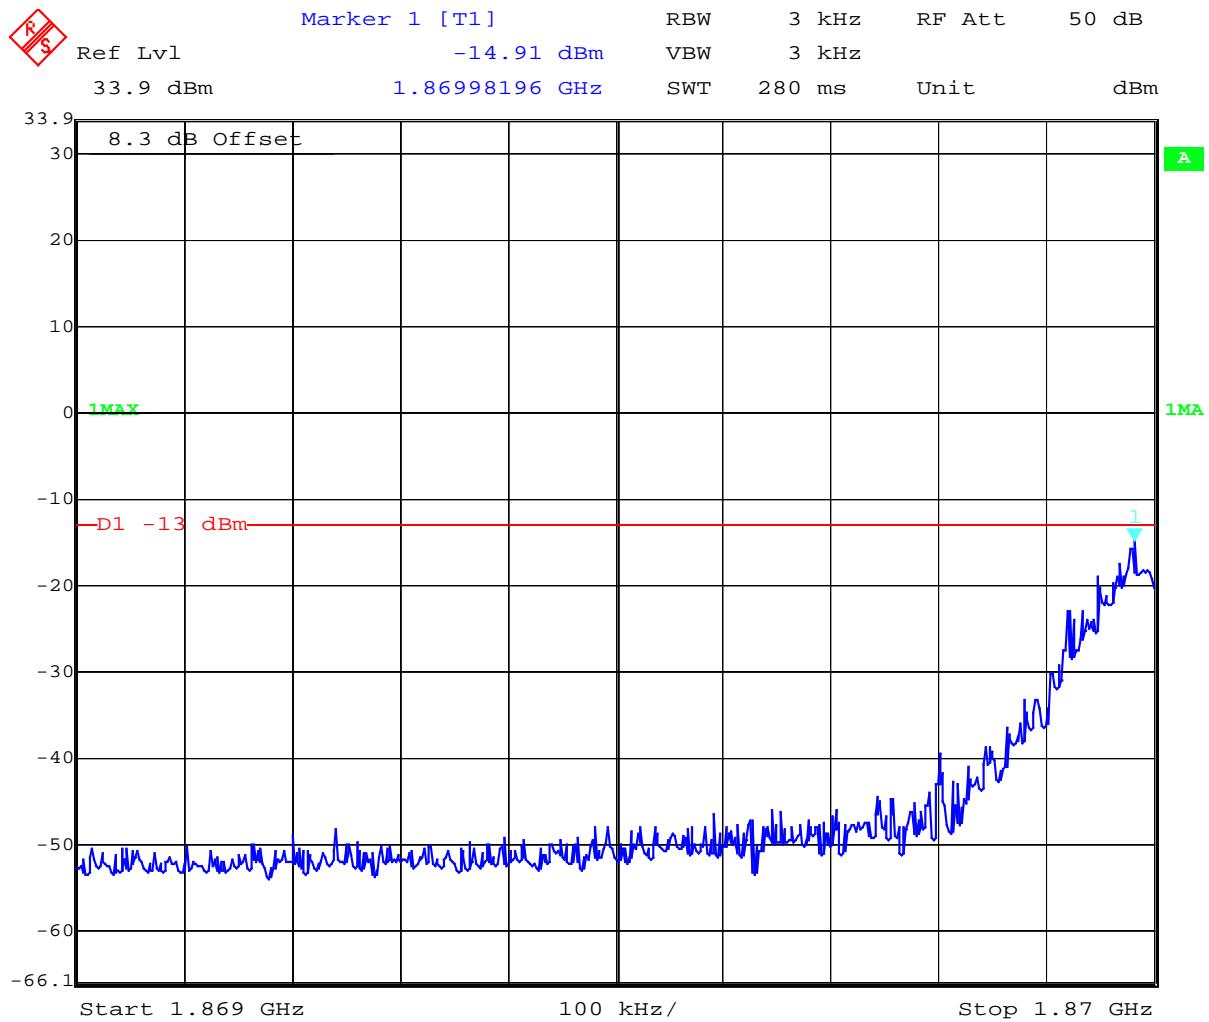
**Block A Channel 585**



Date: 6.JUN.2003 07:44:27

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

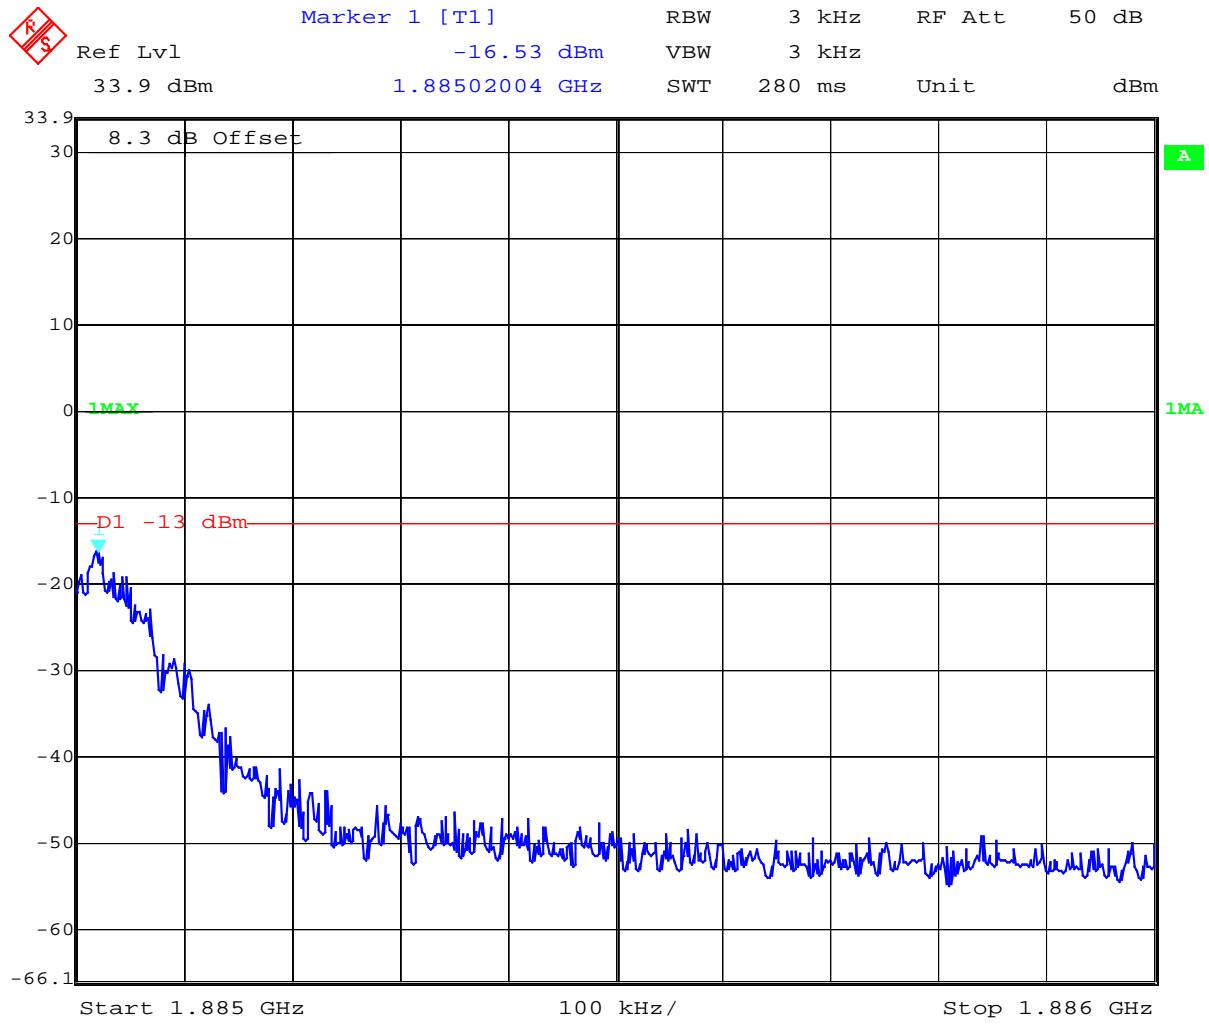
**Block B Channel 612**



Date: 6.JUN.2003 07:45:08

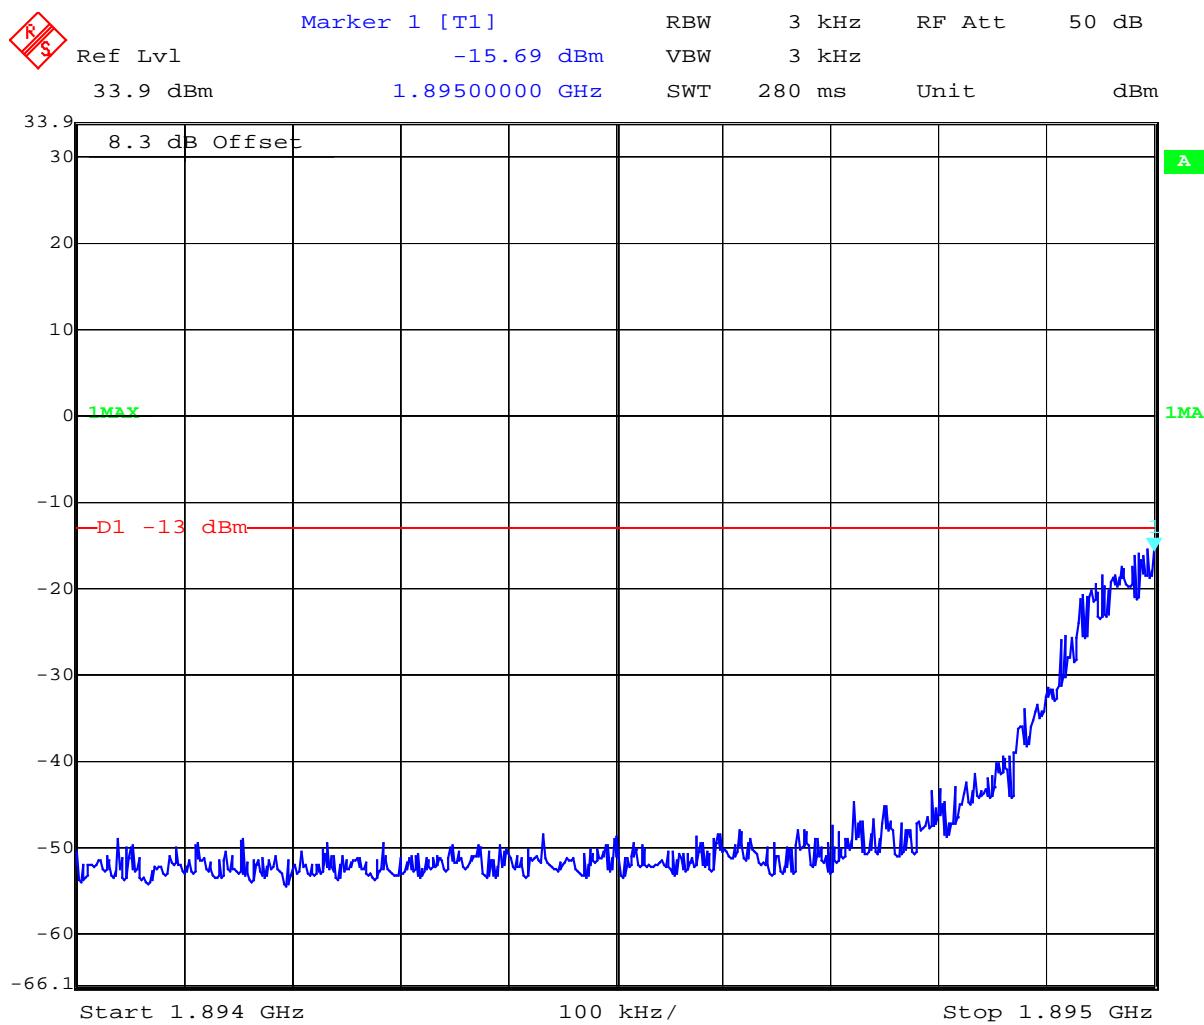
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block B Channel 685**

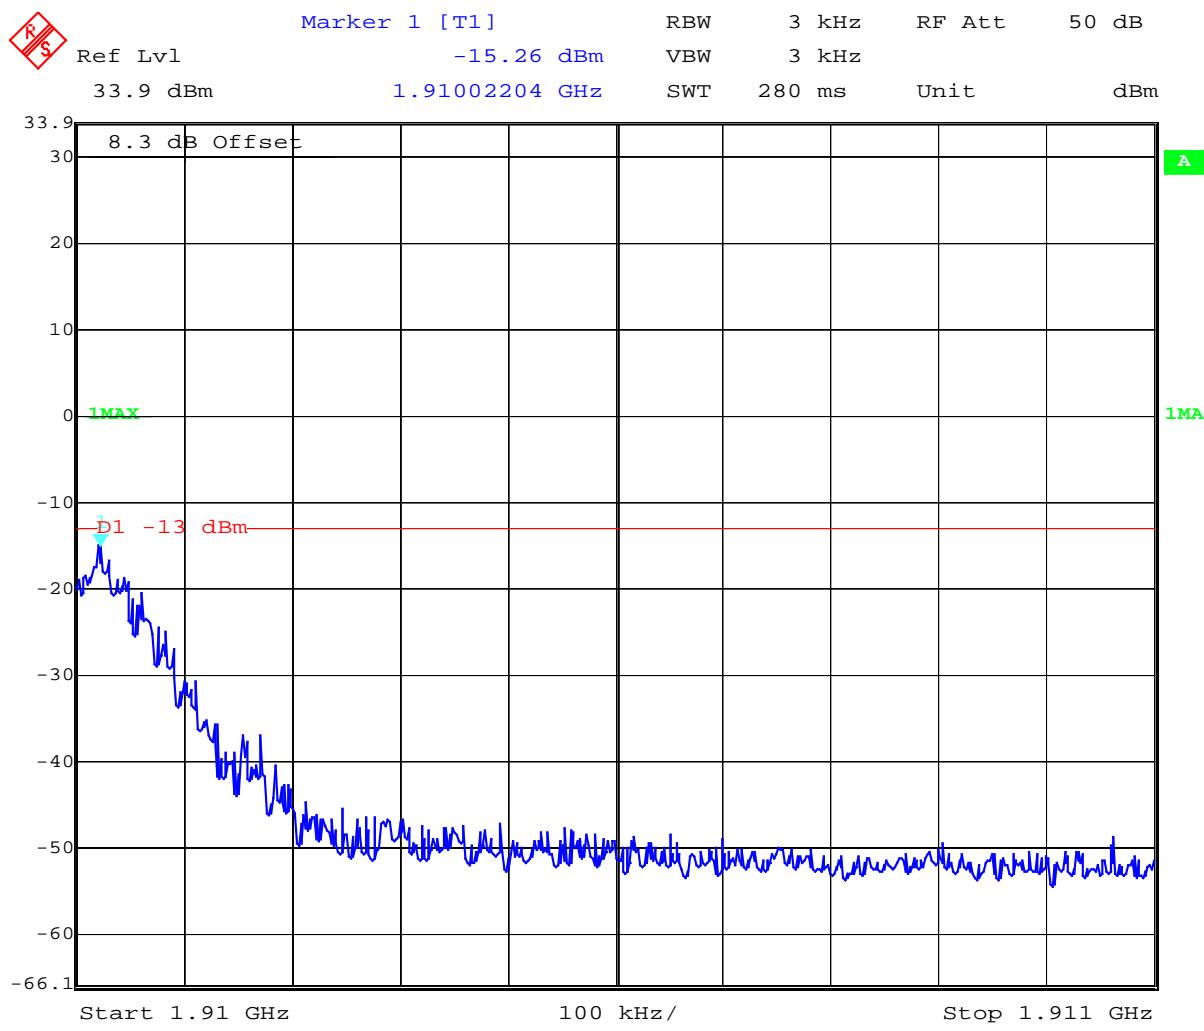


Date: 6.JUN.2003 07:45:53

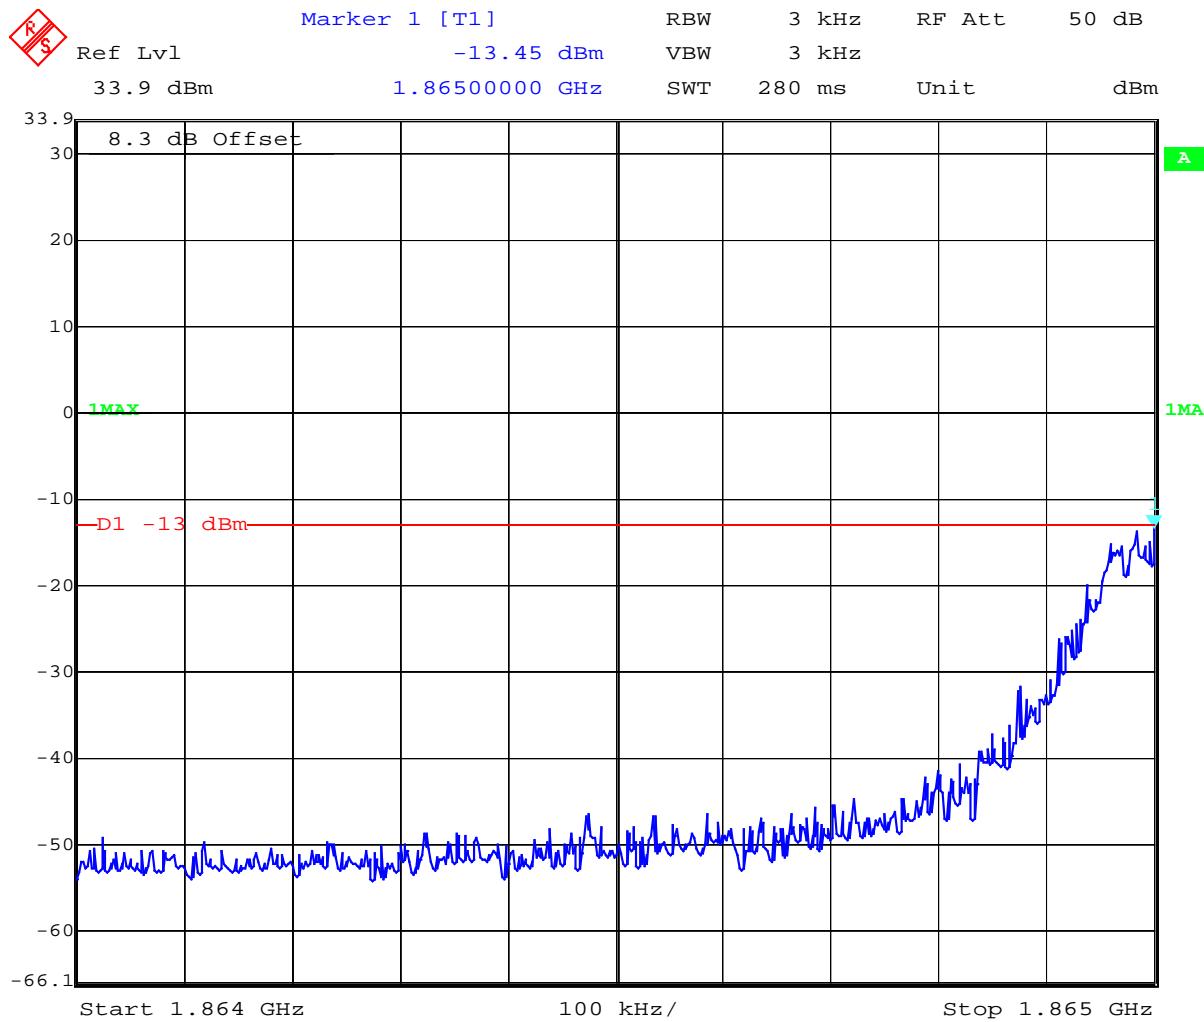
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block C Channel 737**

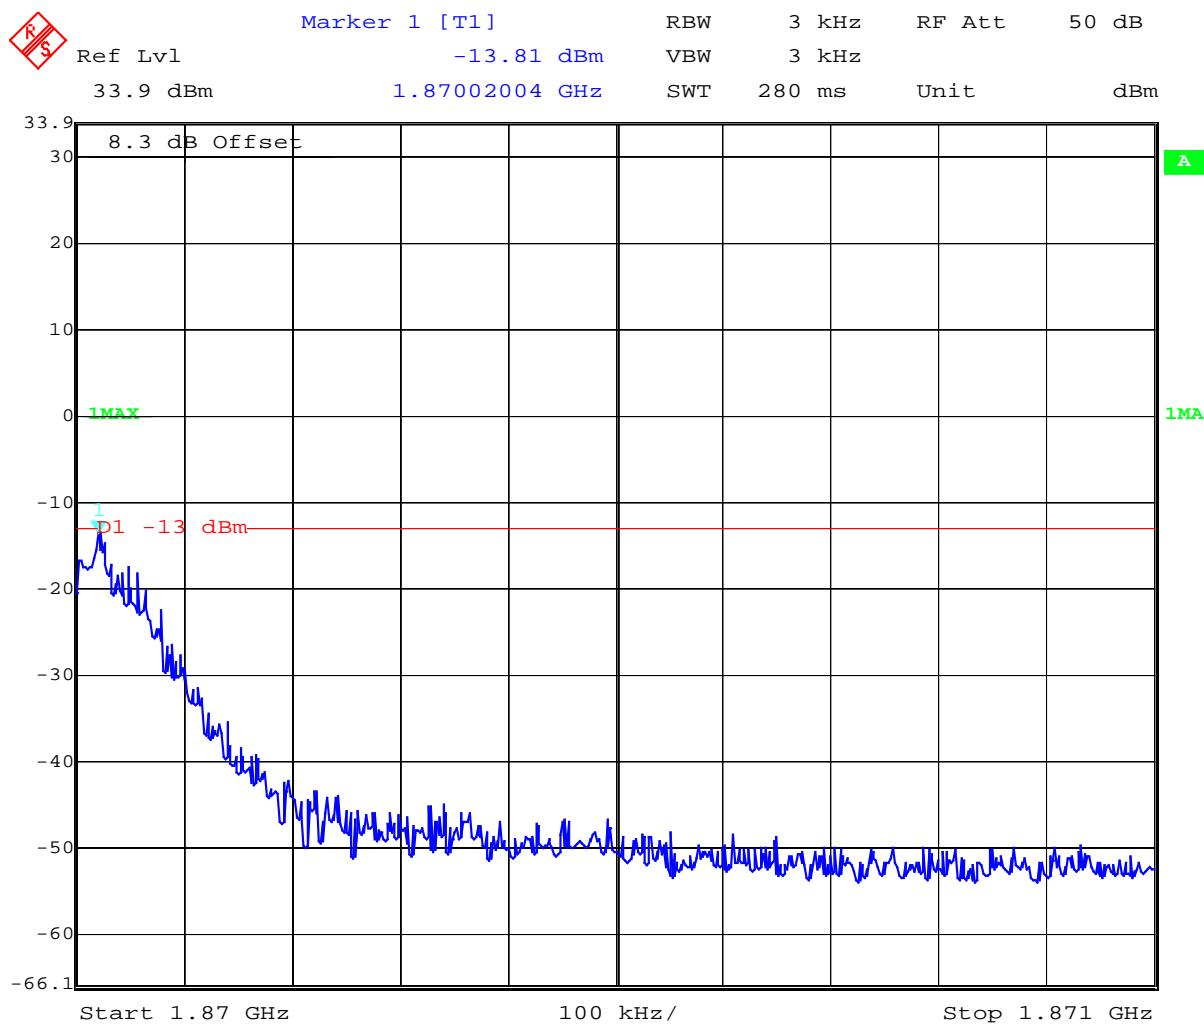
Date: 6.JUN.2003 07:46:54

**Block C Channel 810**

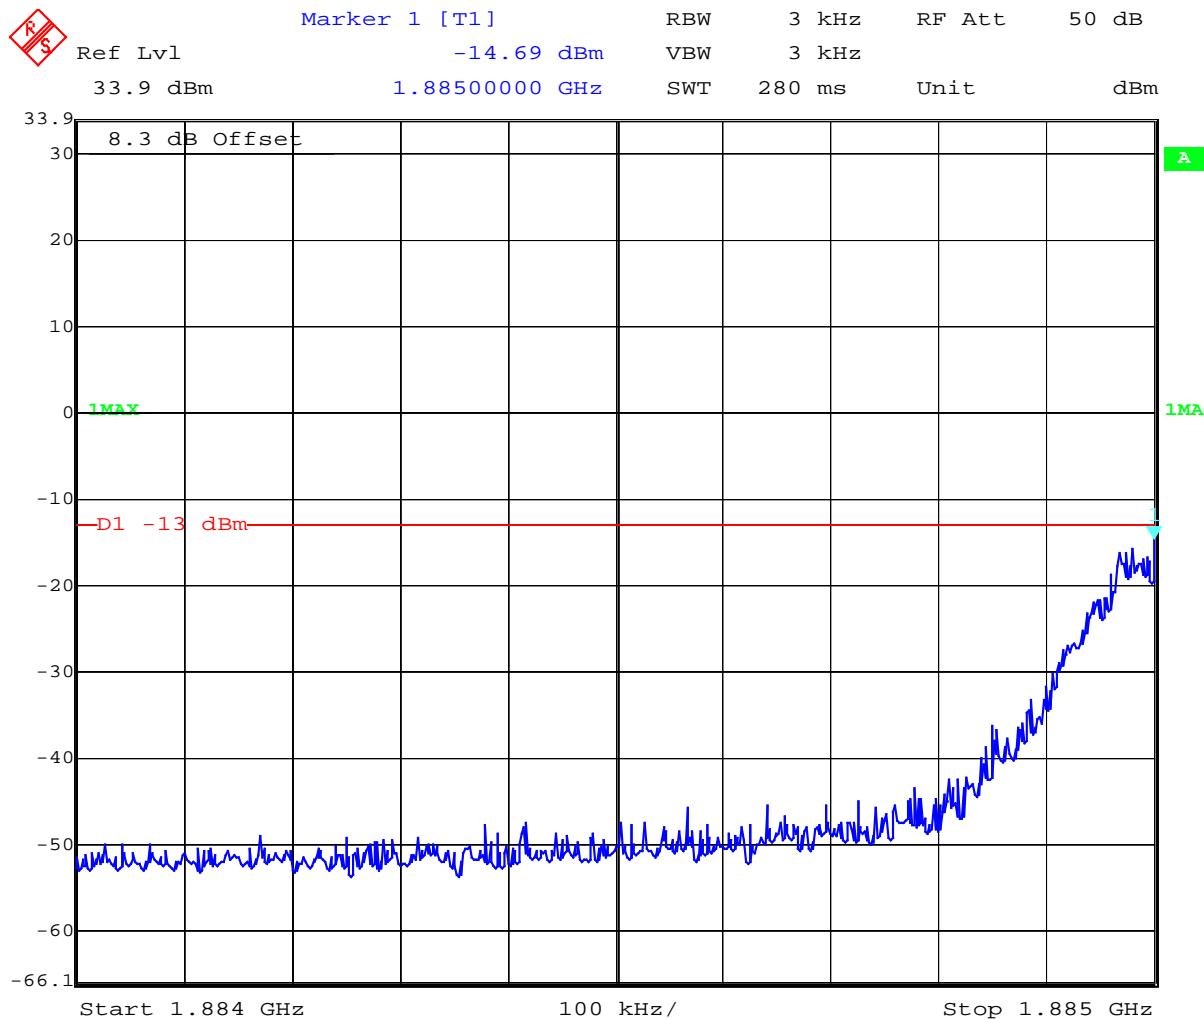
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block D Channel 587**

Date: 6.JUN.2003 07:48:29

**Block D Channel 610**

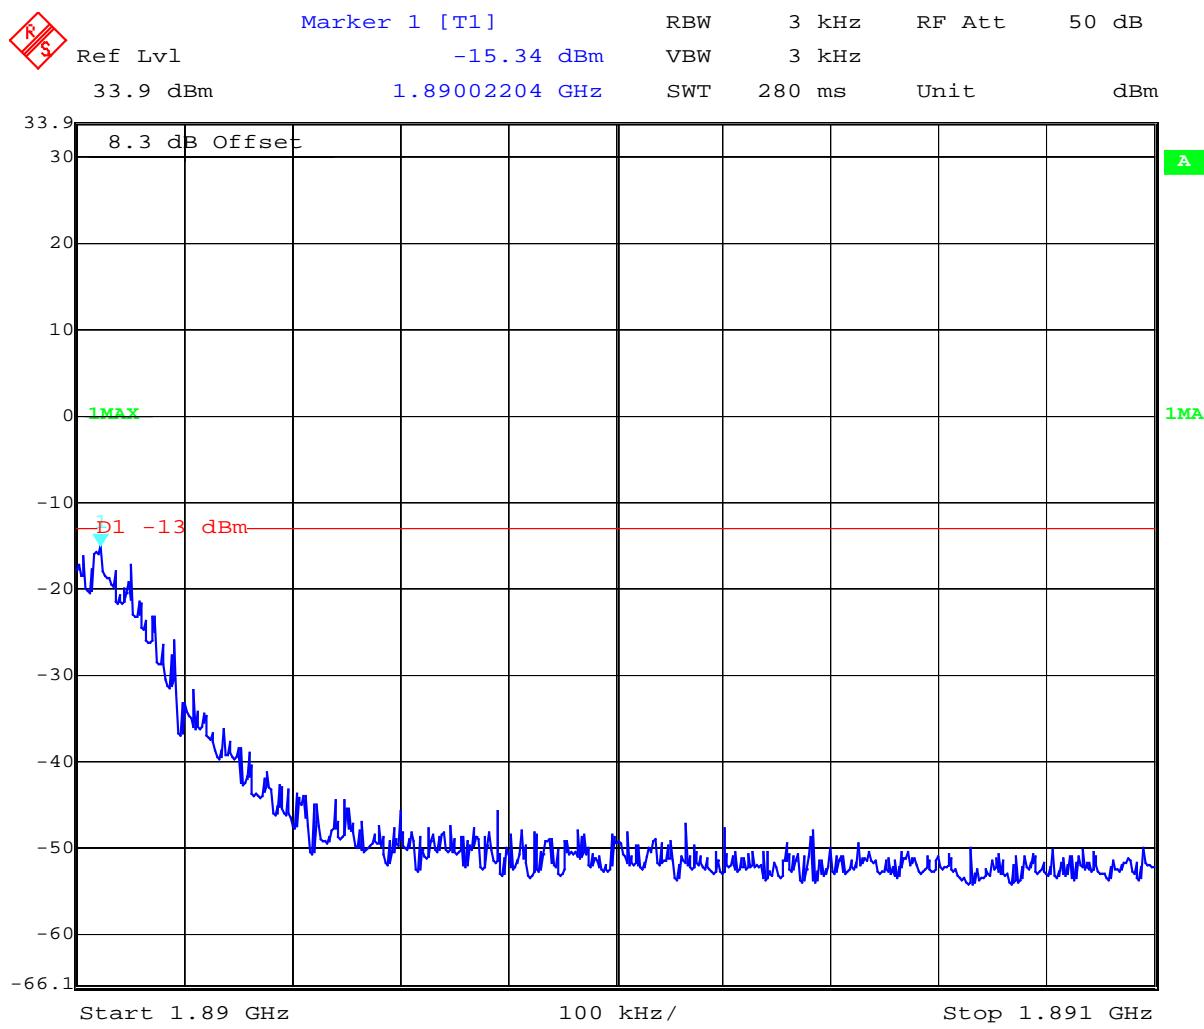
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block E Channel 687**

Date: 6.JUN.2003 07:50:01

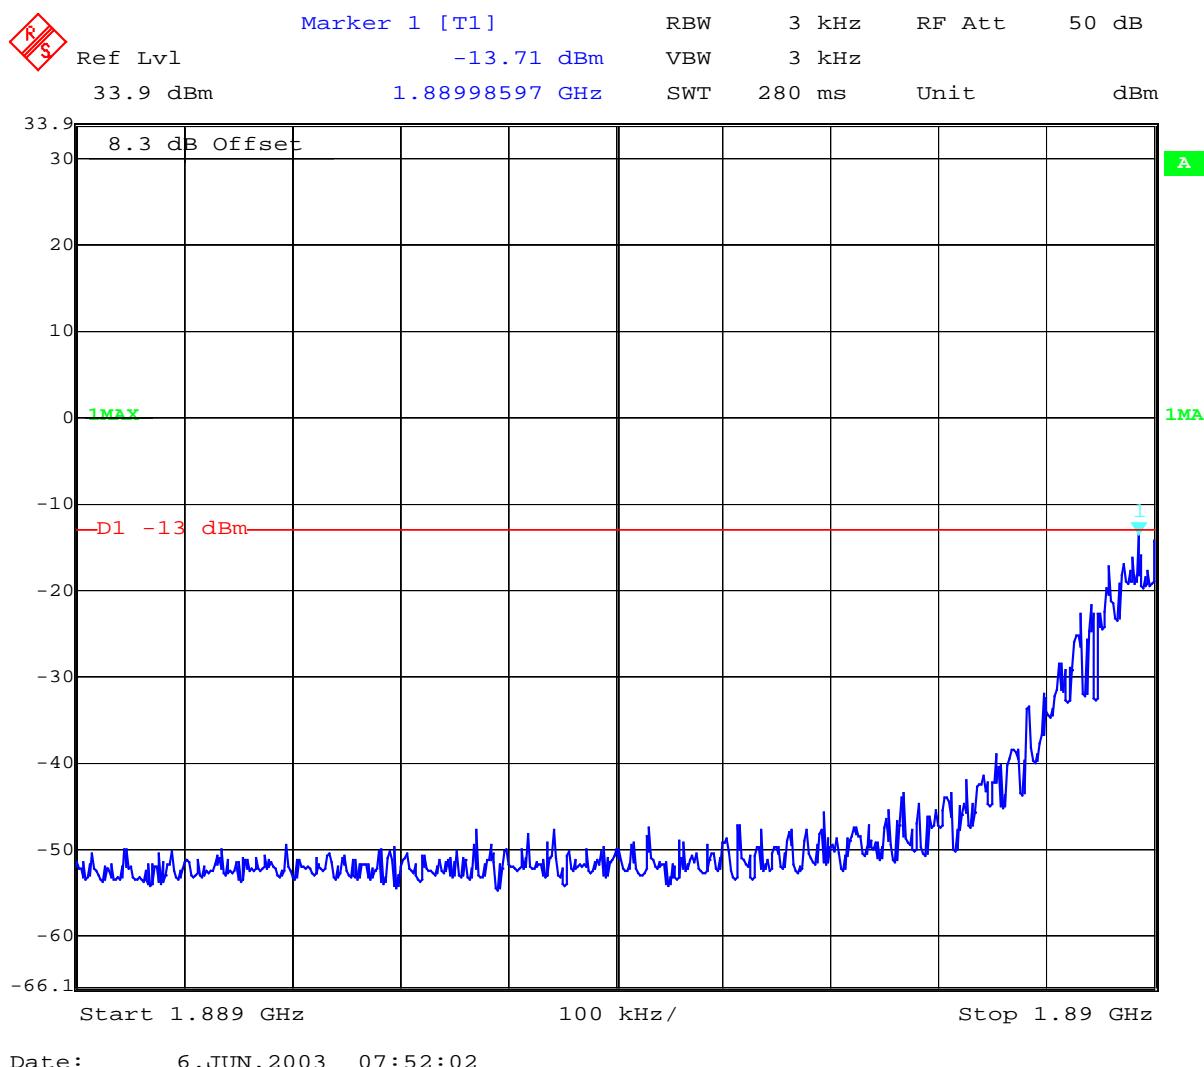
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

## Block E Channel 710



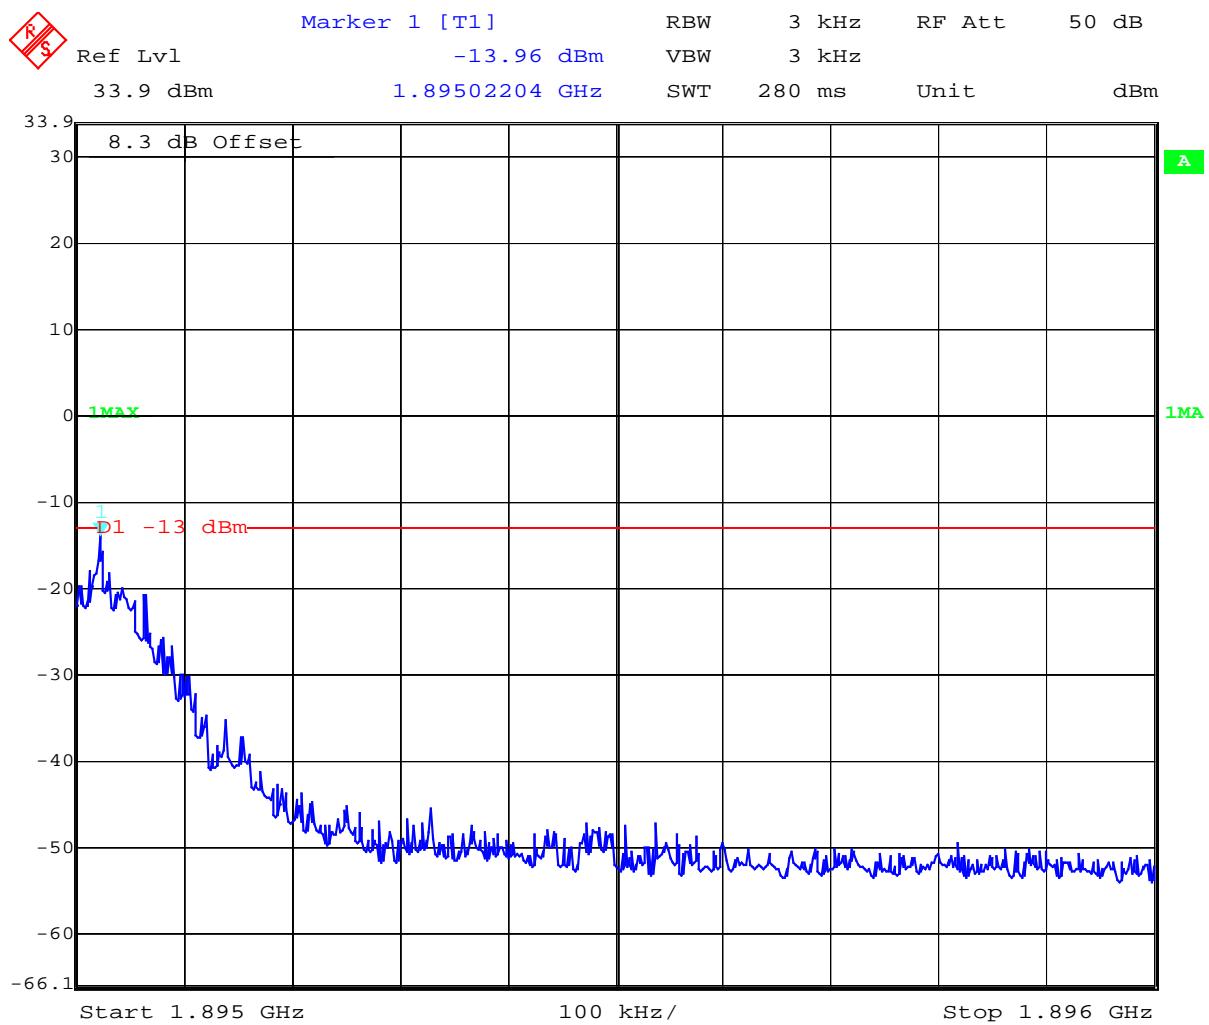
Date: 6.JUN.2003 07:51:17

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block F Channel 712**

Date: 6.JUN.2003 07:52:02

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Block F Channel 735**

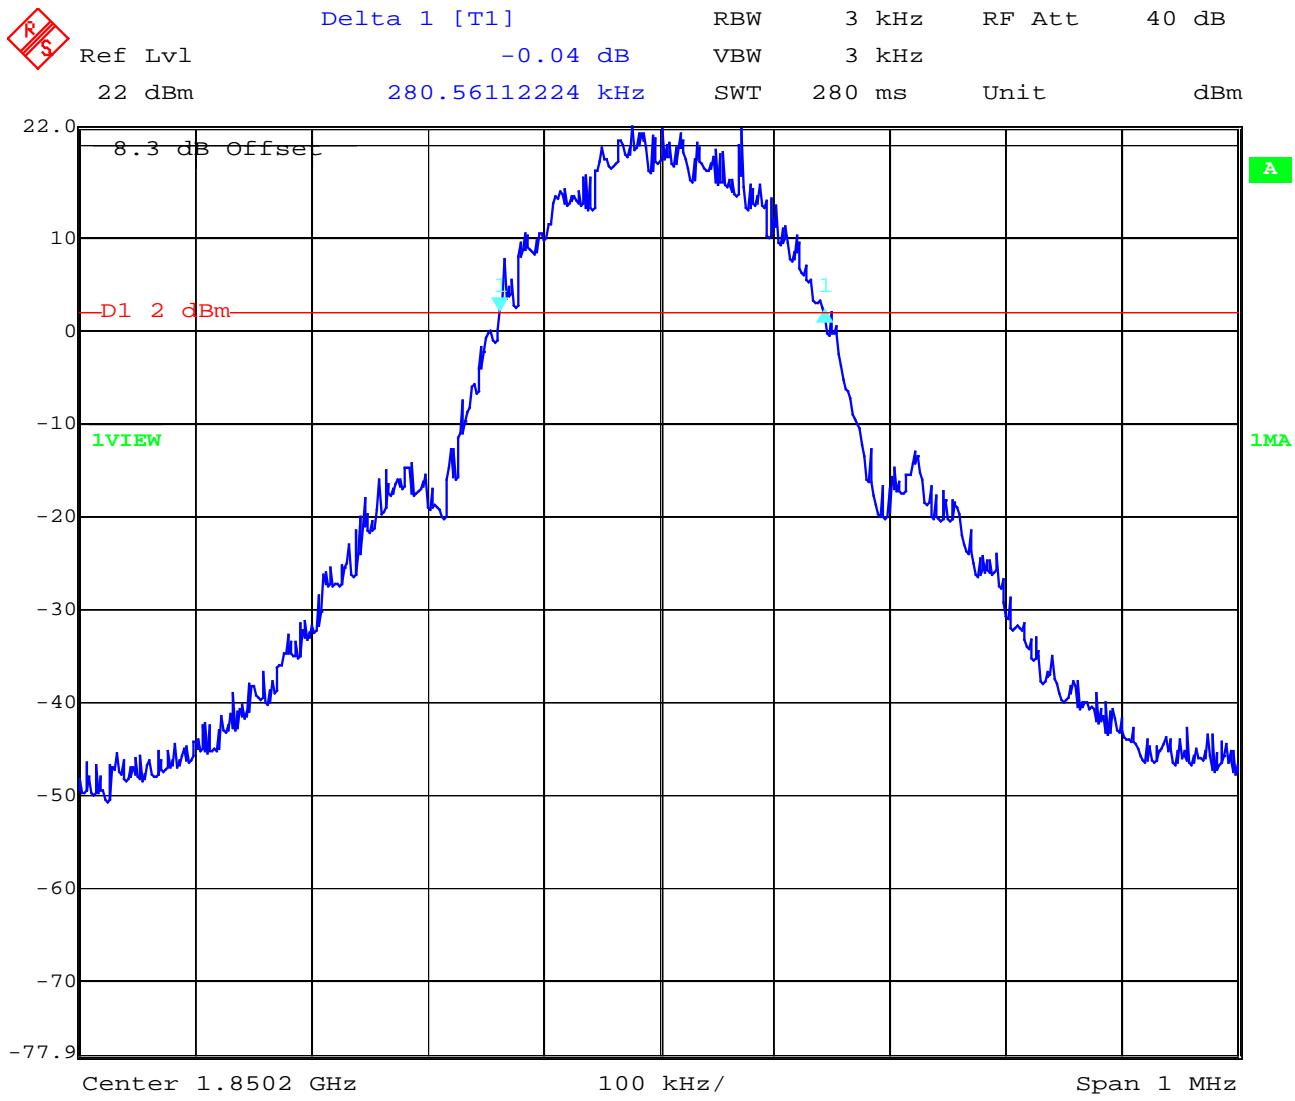
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**OCCUPIED BANDWIDTH****§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	280.561	314.629
1880.0 MHz	278.557	318.632
1909.8 MHz	274.549	320.621

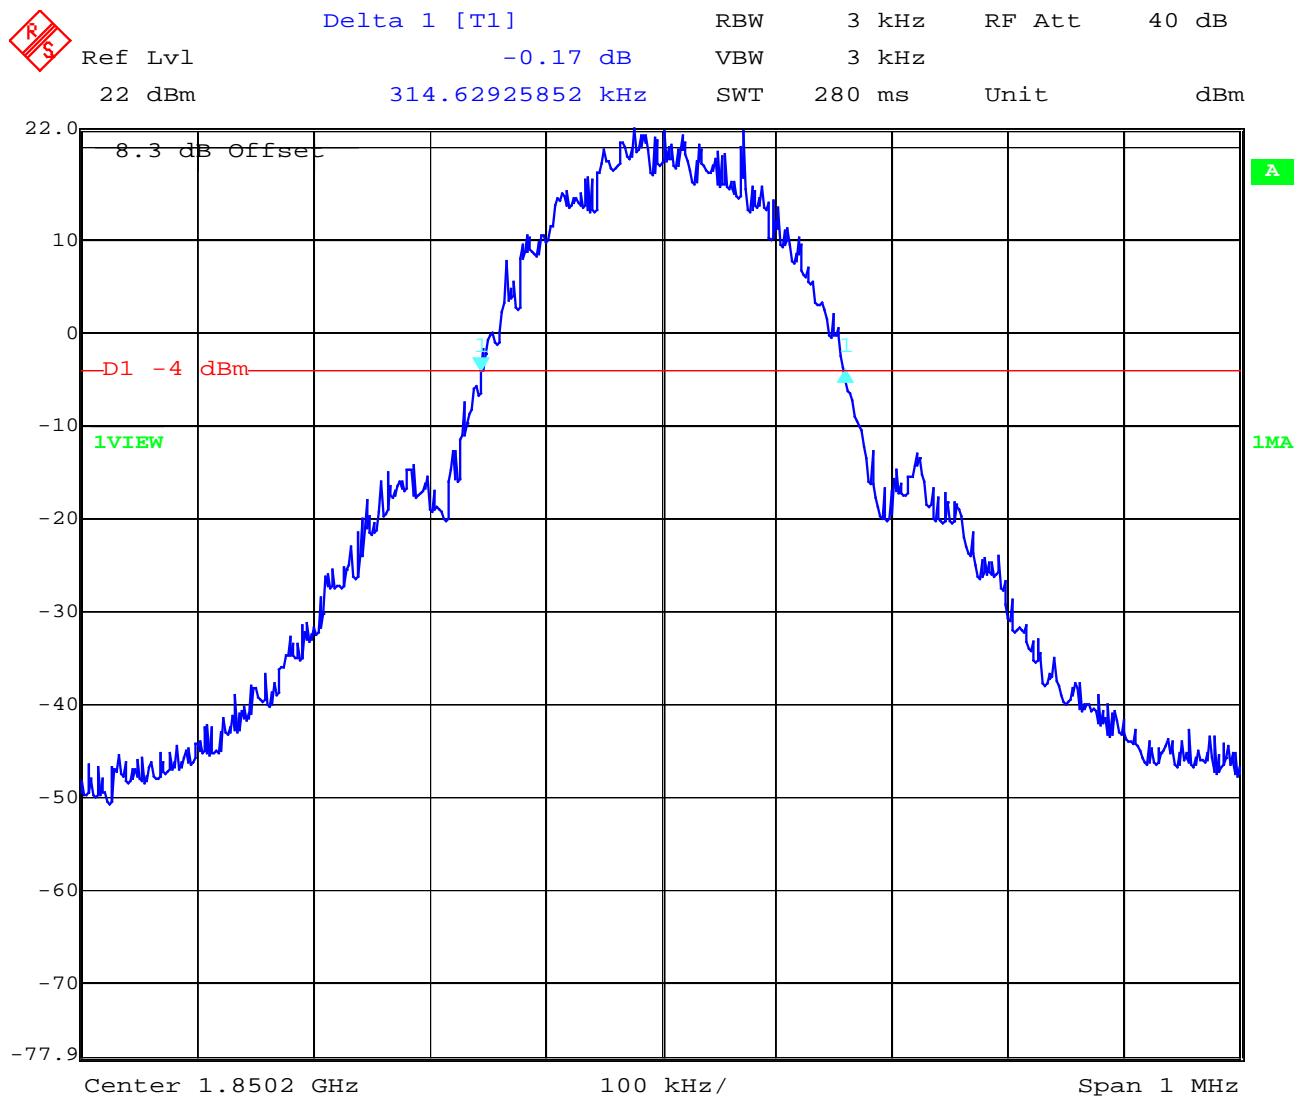
Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 281 kHz, this equates to a resolution bandwidth of at least 3.0 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

**Channel 512**  
**99% Occupied Bandwidth**

Date: 6.JUN.2003 07:55:12

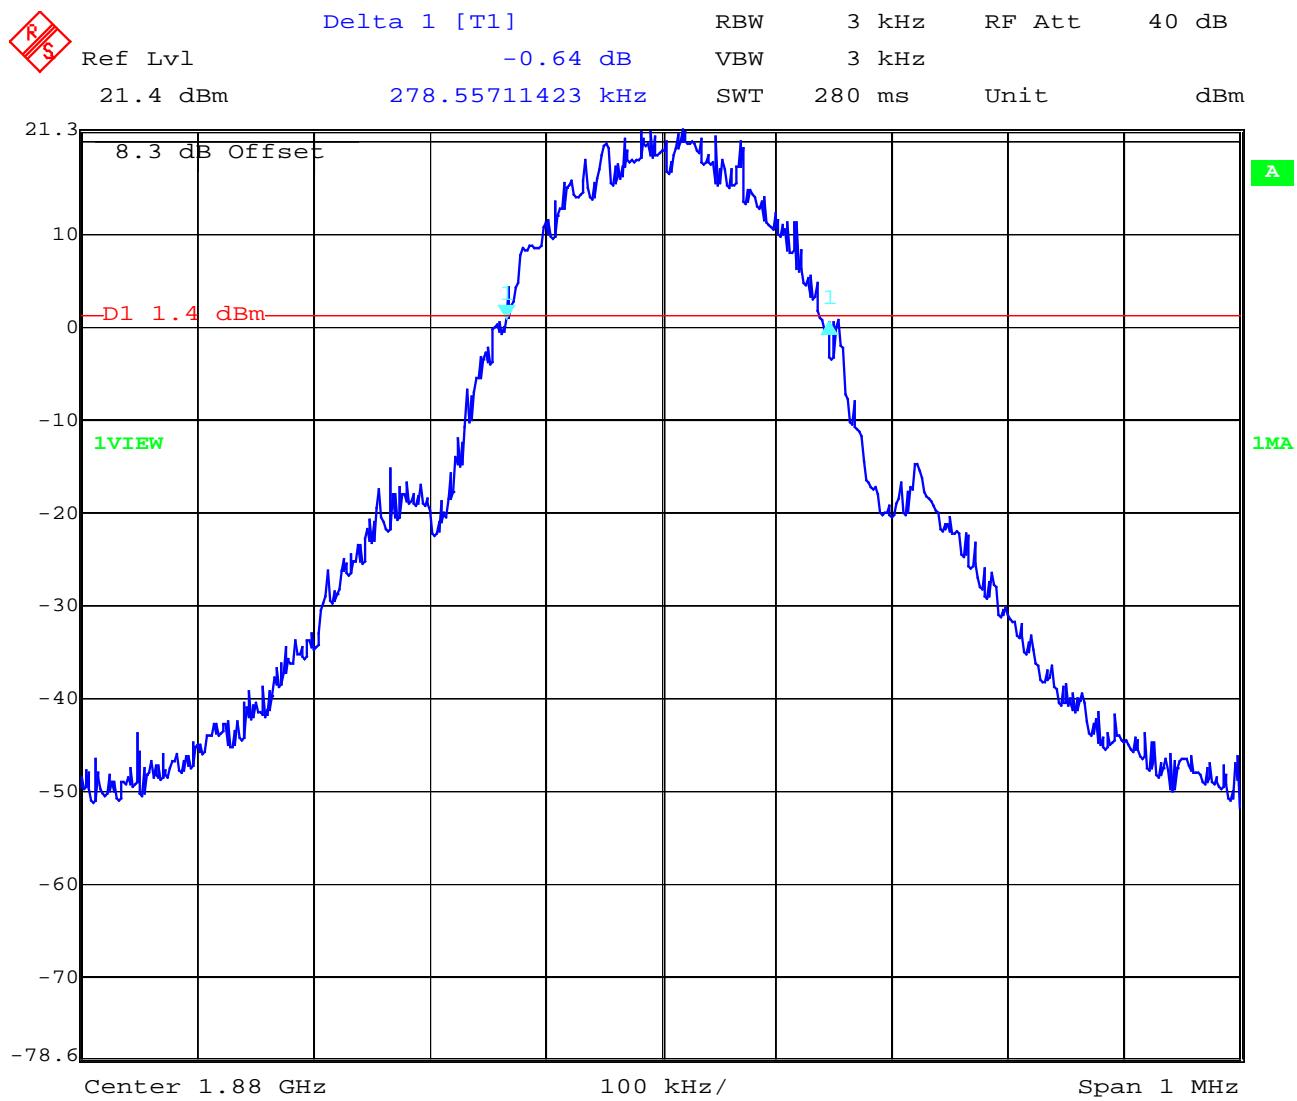
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 512**  
**-26 dBc Bandwidth**



Date: 6.JUN.2003 07:55:43

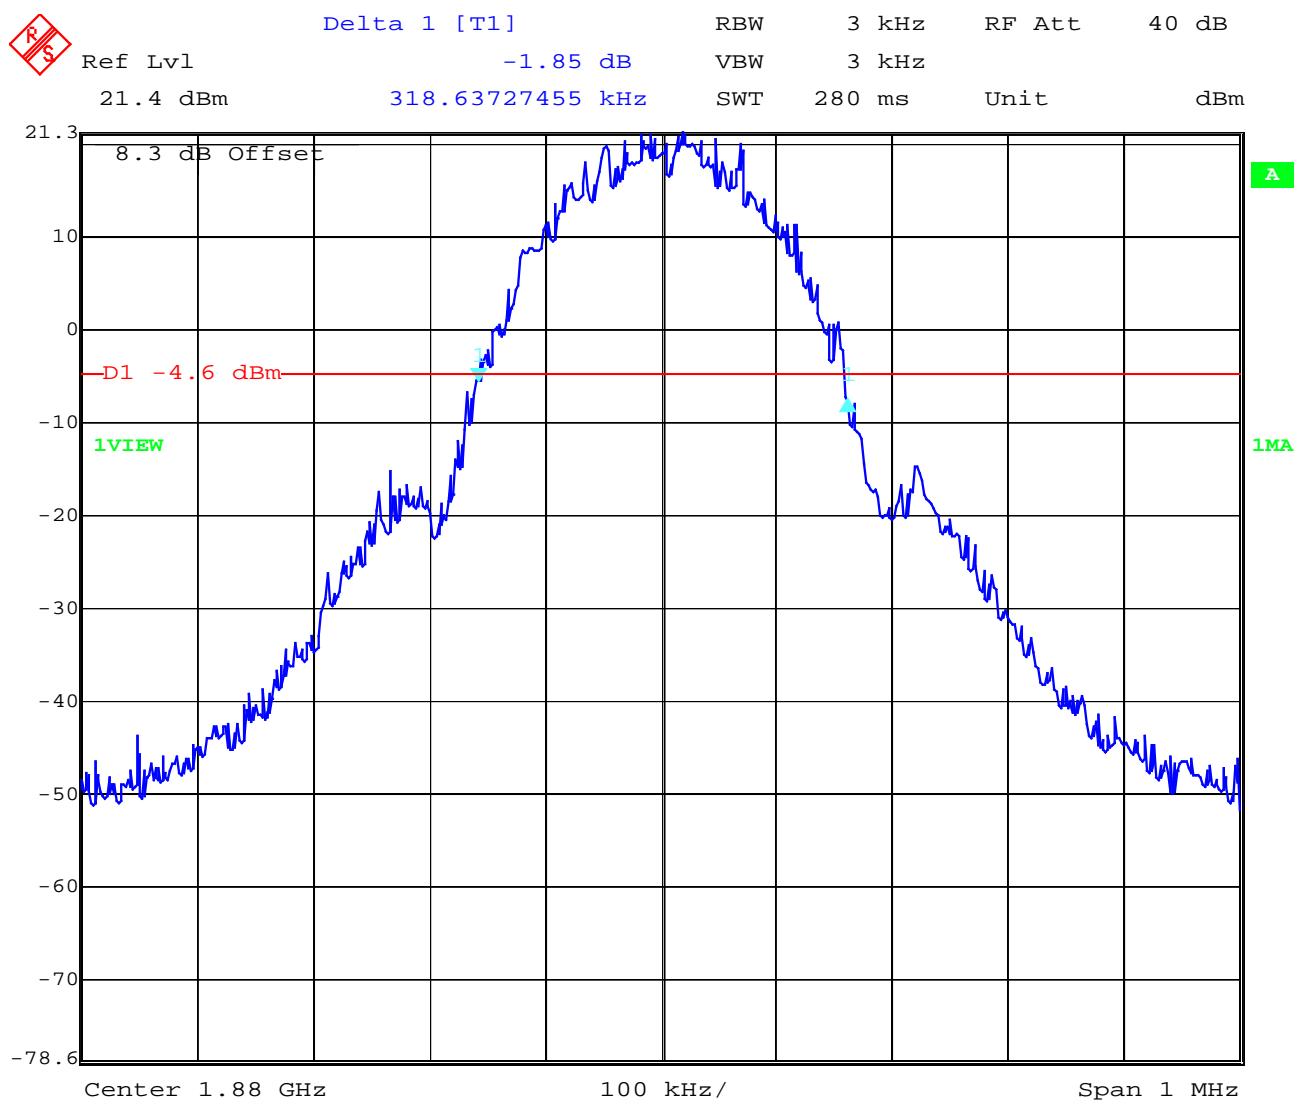
**Channel 661**  
**99% Occupied Bandwidth**



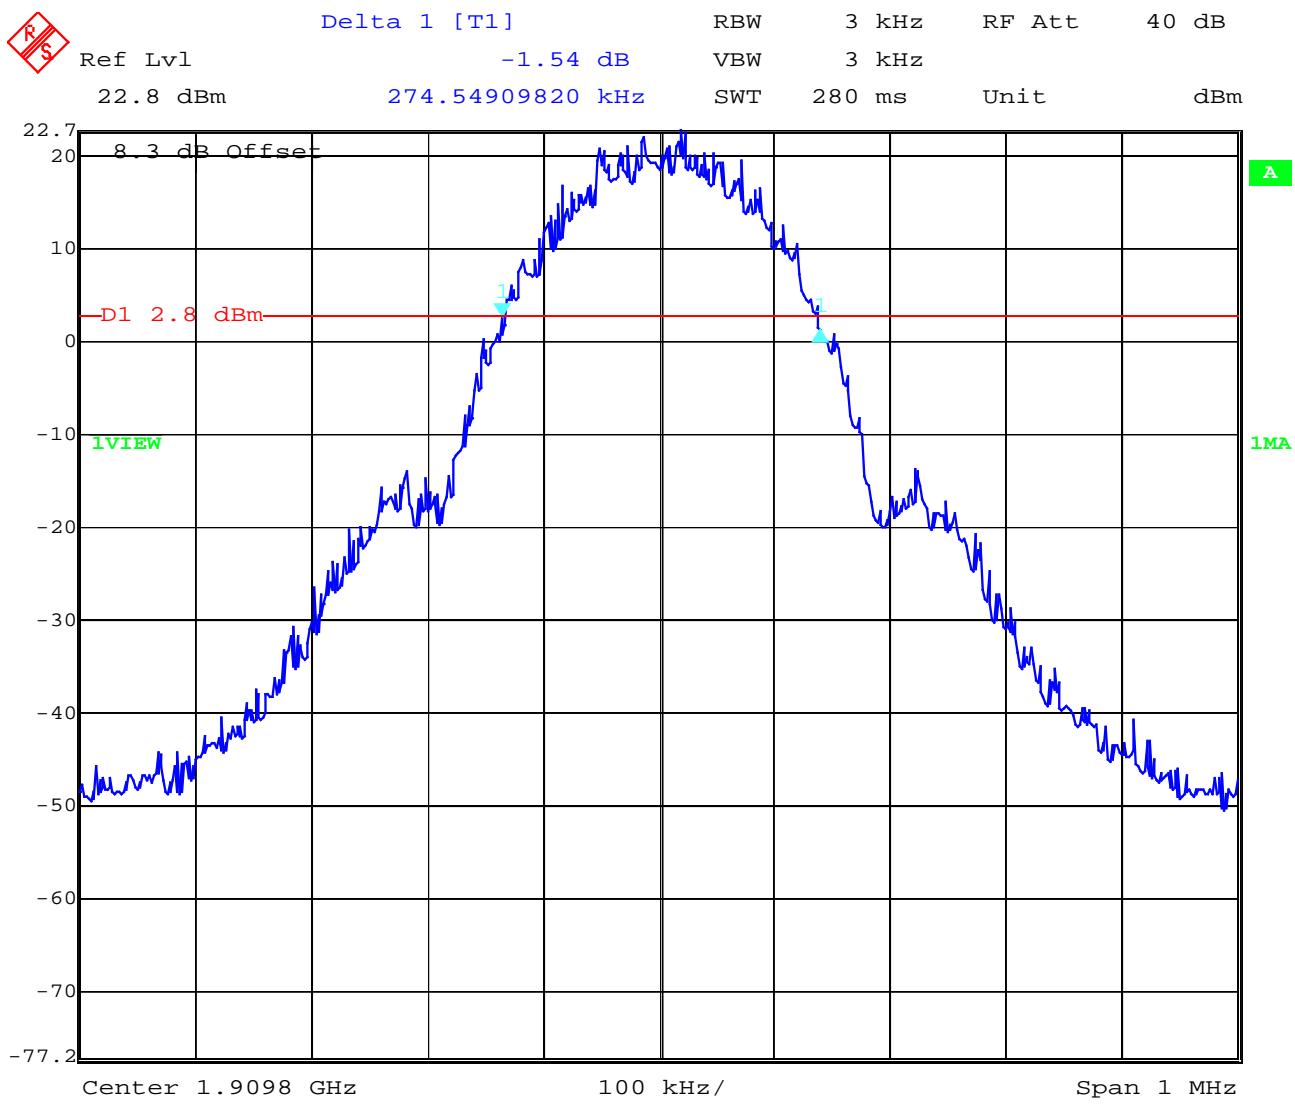
Date: 6.JUN.2003 07:57:19

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

**Channel 661**  
**-26 dBc Bandwidth**

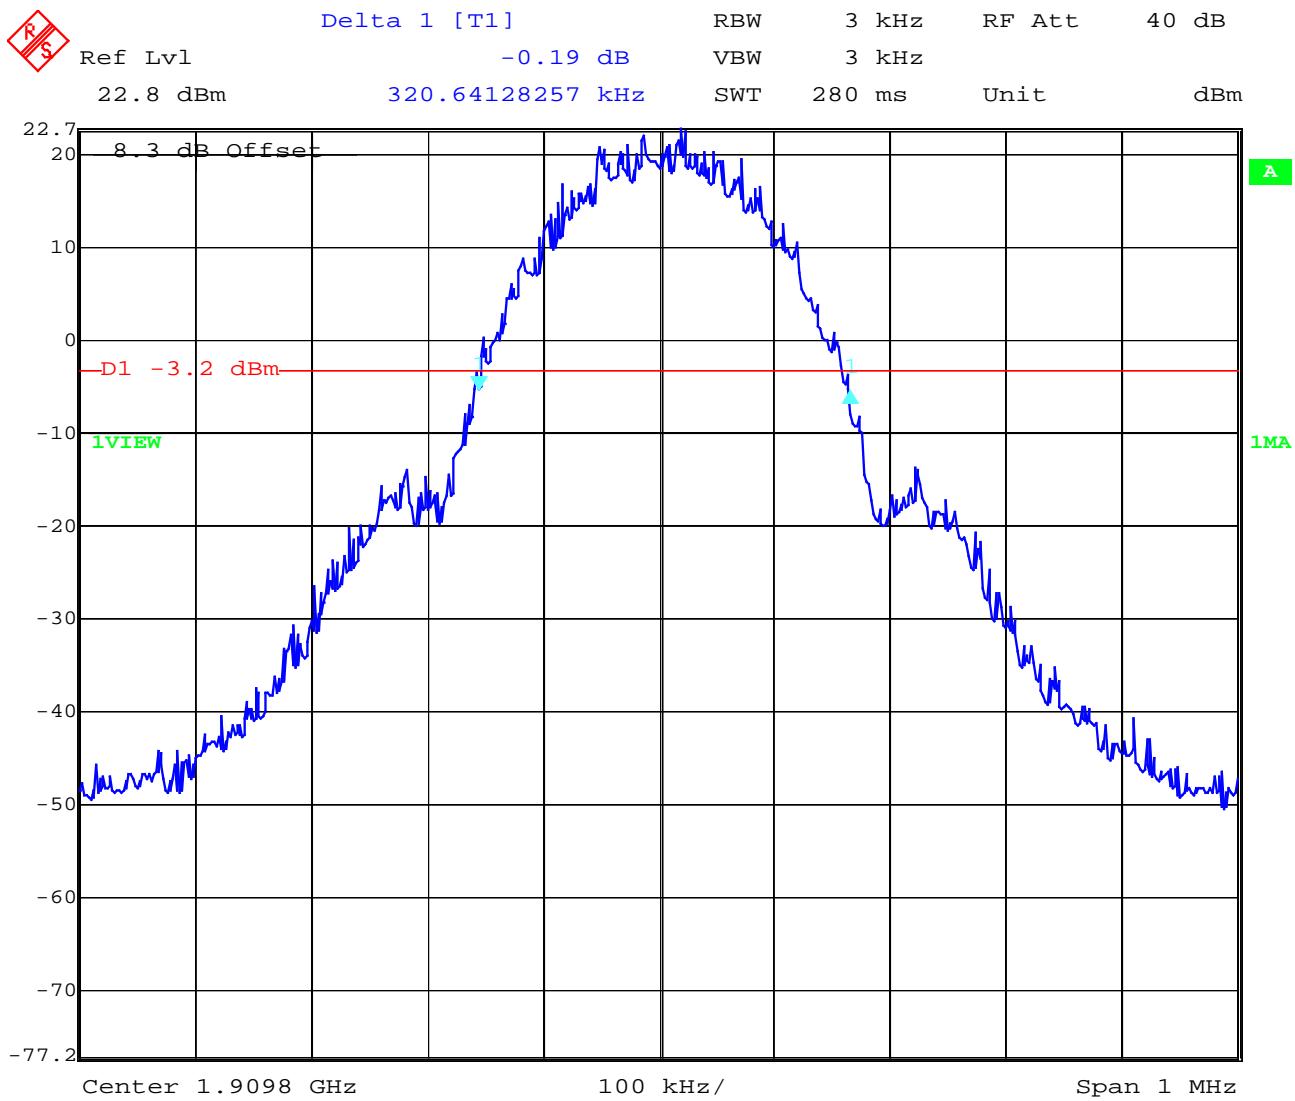


Date: 6.JUN.2003 07:58:17

**Channel 810**  
**99% Occupied Bandwidth**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 810**  
**-26 dBc Bandwidth**



Date: 6.JUN.2003 08:00:37

**PART PCS850****POWER OUTPUT****SUBCLAUSE § 24.232****Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 ( peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

**Limits:**

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+33	± 2

**Power Measurements:****Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	0	32.01	31.90
836.4	0	32.72	32.61
848.8	0	32.35	32.35
Measurement uncertainty		±0.5 dB	

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

**EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

**Method of Measurement:**

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as Pin + 2.1 - Pr.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dB.

**Limits:**

Power Step	Burst Average EIRP (dBm)	
	0	<33

**Power Measurements:****Radiated:**

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
824.2	0	25.6	23.5		
836.2	0	25.6	23.5		
848.8	0	25.8	23.7		
<b>Measurement uncertainty</b>		<b>±3 dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**FREQUENCY STABILITY****SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

**Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)**

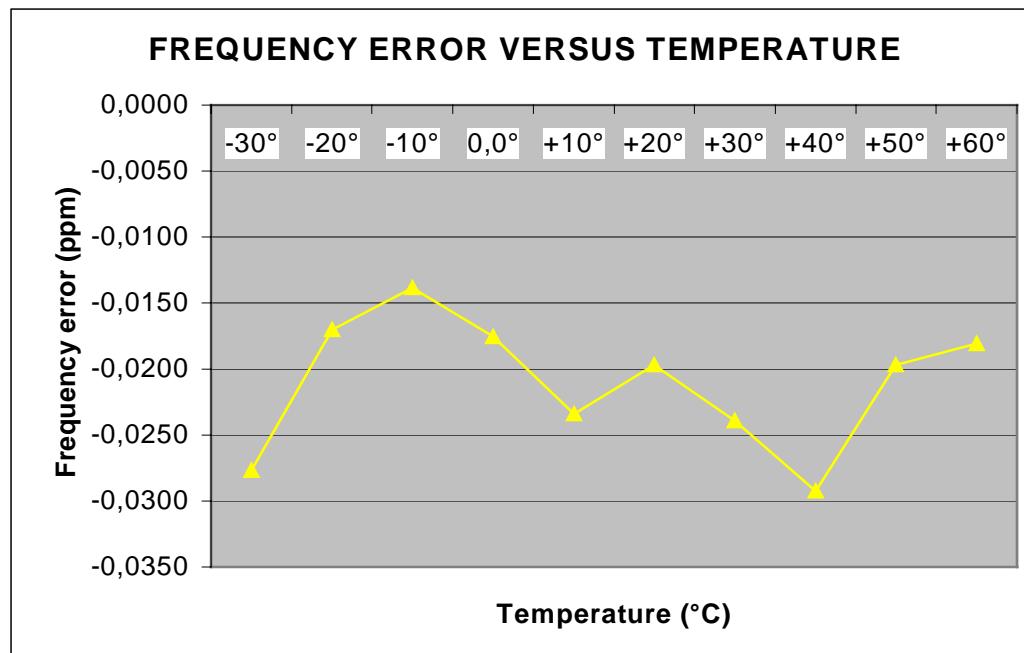
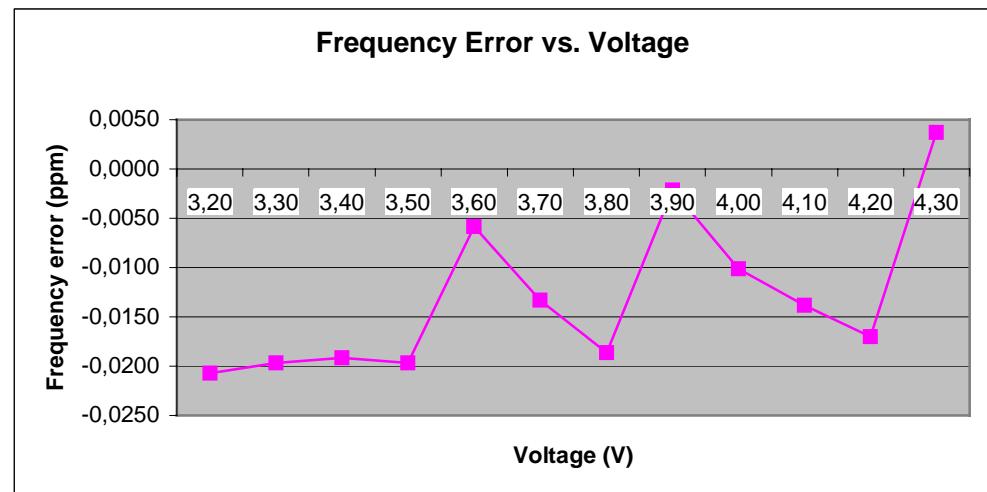
**AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.2	-40	-0,00000213	-0,0213
3.3	-39	-0,00000207	-0,0207
3.4	-37	-0,00000197	-0,0197
3.5	-36	-0,00000191	-0,0191
3.6	-37	-0,00000197	-0,0197
3.7	-11	-0,00000059	-0,0059
3.8	-25	-0,00000133	-0,0133
3.9	-35	-0,00000186	-0,0186
4.0	-4	-0,00000021	-0,0021
4.1	-19	-0,00000101	-0,0101
4.2	-26	-0,00000138	-0,0138
4.3	-32	-0,00000170	-0,0170
4.4	+7	0,00000037	0,0037

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-52	-0,00000277	-0,0277
-20	-32	-0,00000170	-0,0170
-10	-26	-0,00000138	-0,0138
±0.0	-33	-0,00000176	-0,0176
+10	-44	-0,00000234	-0,0234
+20	-37	-0,00000197	-0,0197
+30	-45	-0,00000239	-0,0239
+40	-55	-0,00000293	-0,0293
+50	-37	-0,00000197	-0,0197
+60	-34	-0,00000181	-0,0181

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)



**EMISSIONS LIMITS****§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

**The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

**Measurement Limit:****Sec. 24.238 Emission Limits.**

- (a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)**

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:**

The final open field radiated levels are presented on the next pages.

**All measurements were done in horizontal and vertical polarization, the plots shows the worst case.**

As can be seen from this data, the emissions from the test item were within the specification limit.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 128</b>					
824.2		25.6	-13.0 (38.6 dBc)		carrier
1648.4		-25.0		50.6	complies
4945.2		-52.3		77.9	complies
<b>CH 189</b>					
836.4		25.6	-13.0 (38.6 dBc)		carrier
1672.8		-24.3		49.9	complies
5018.4		-52.6		78.2	complies
18304.6		-35.41		61.01	complies
<b>CH 251</b>					
848.8		25.8	-13.0 (38.8 dBc)		carrier
1697.6		-26.4		52.2	complies
4244.0		-56.2		82.0	complies
16142.3		-36.27		62.07	complies
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

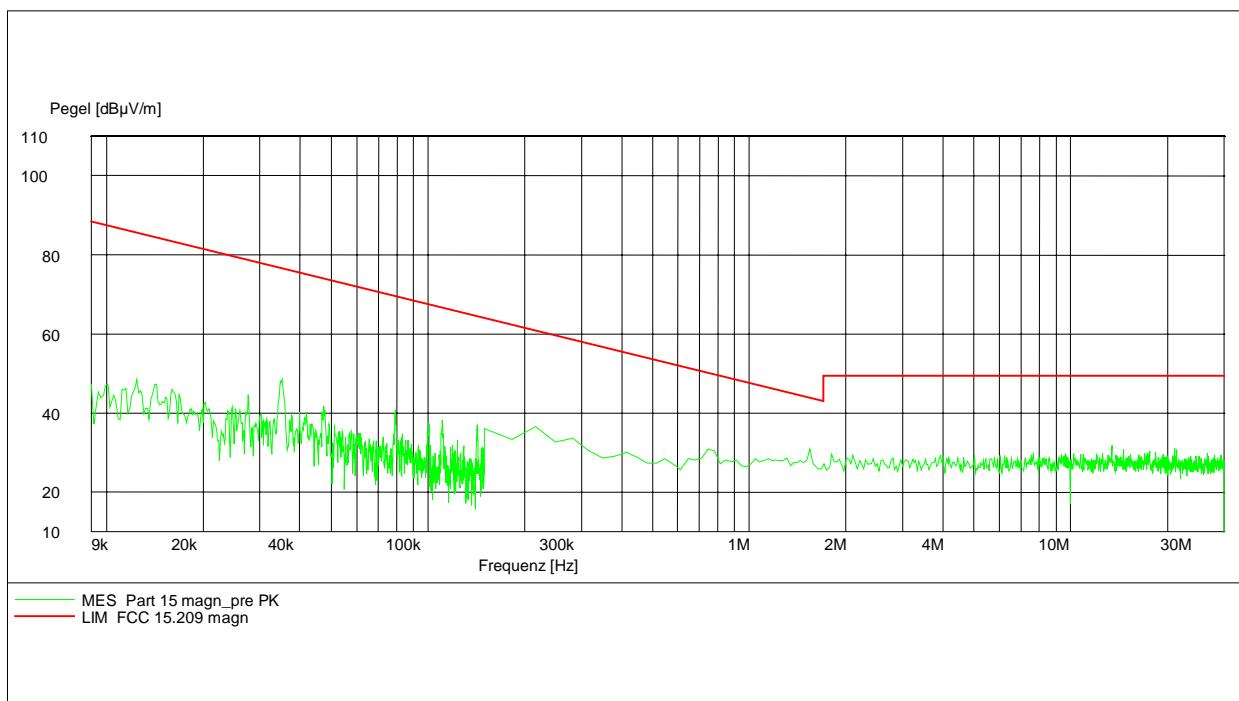
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## 9 kHz – 30 MHz (valid for all 3 channels)

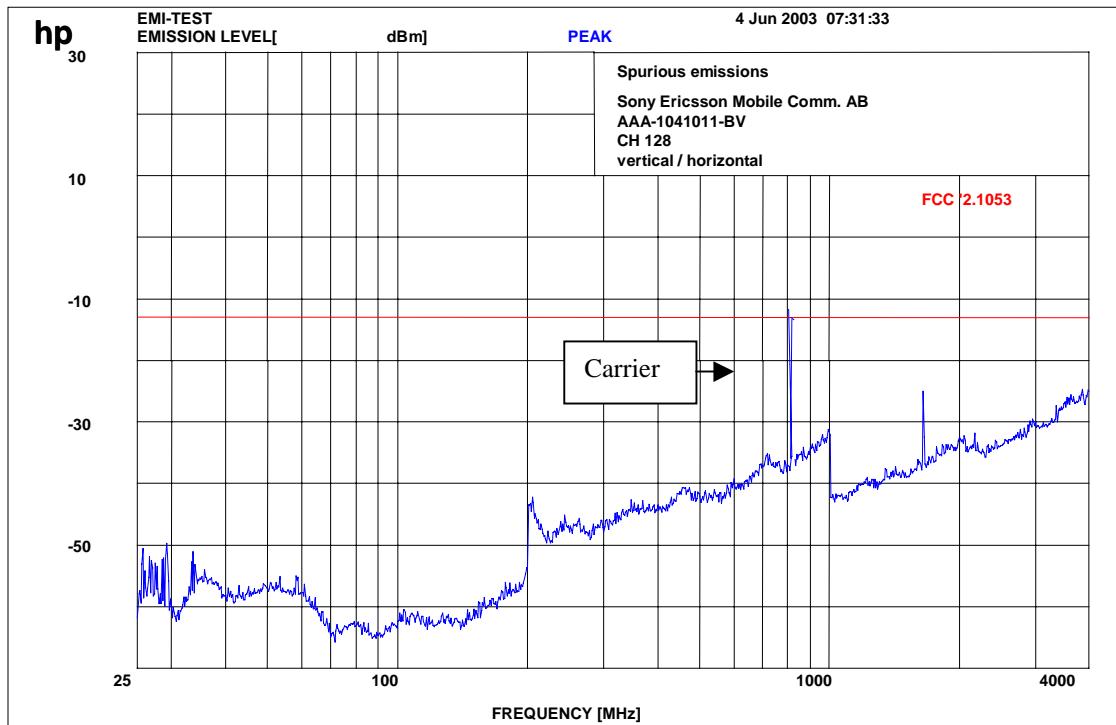
### *Part 15.209 Magnetics*

EUT: AAB-1041011-BV  
Manufacturer: Sony Ericsson  
Operating Condition: Traffic mode with charger 4020073-BV  
Test Site: Cetecom, Room 6  
Operator: Berg  
Test Specification: 115V / 60 Hz  
Comment:  
Start of Test: 04.06.03 / 09:18:12



### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

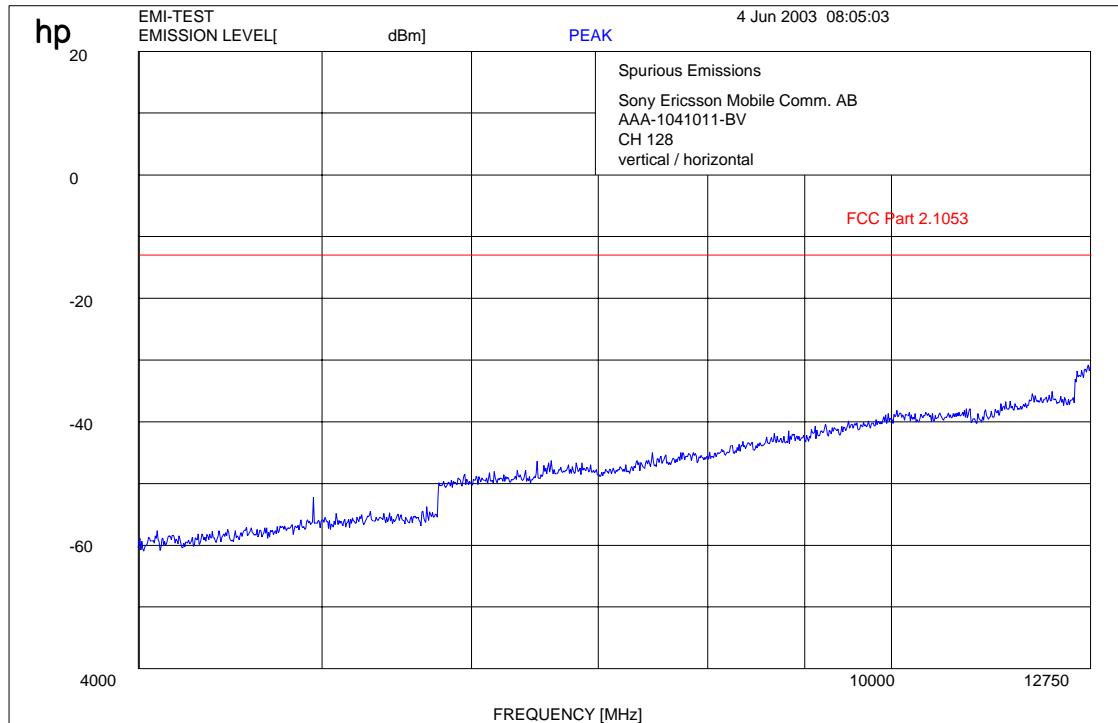
(for reference numbers see test equipment listing)

**Channel 128 (up to 4 GHz )**

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

**Channel 128 (up to 12 GHz )**

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

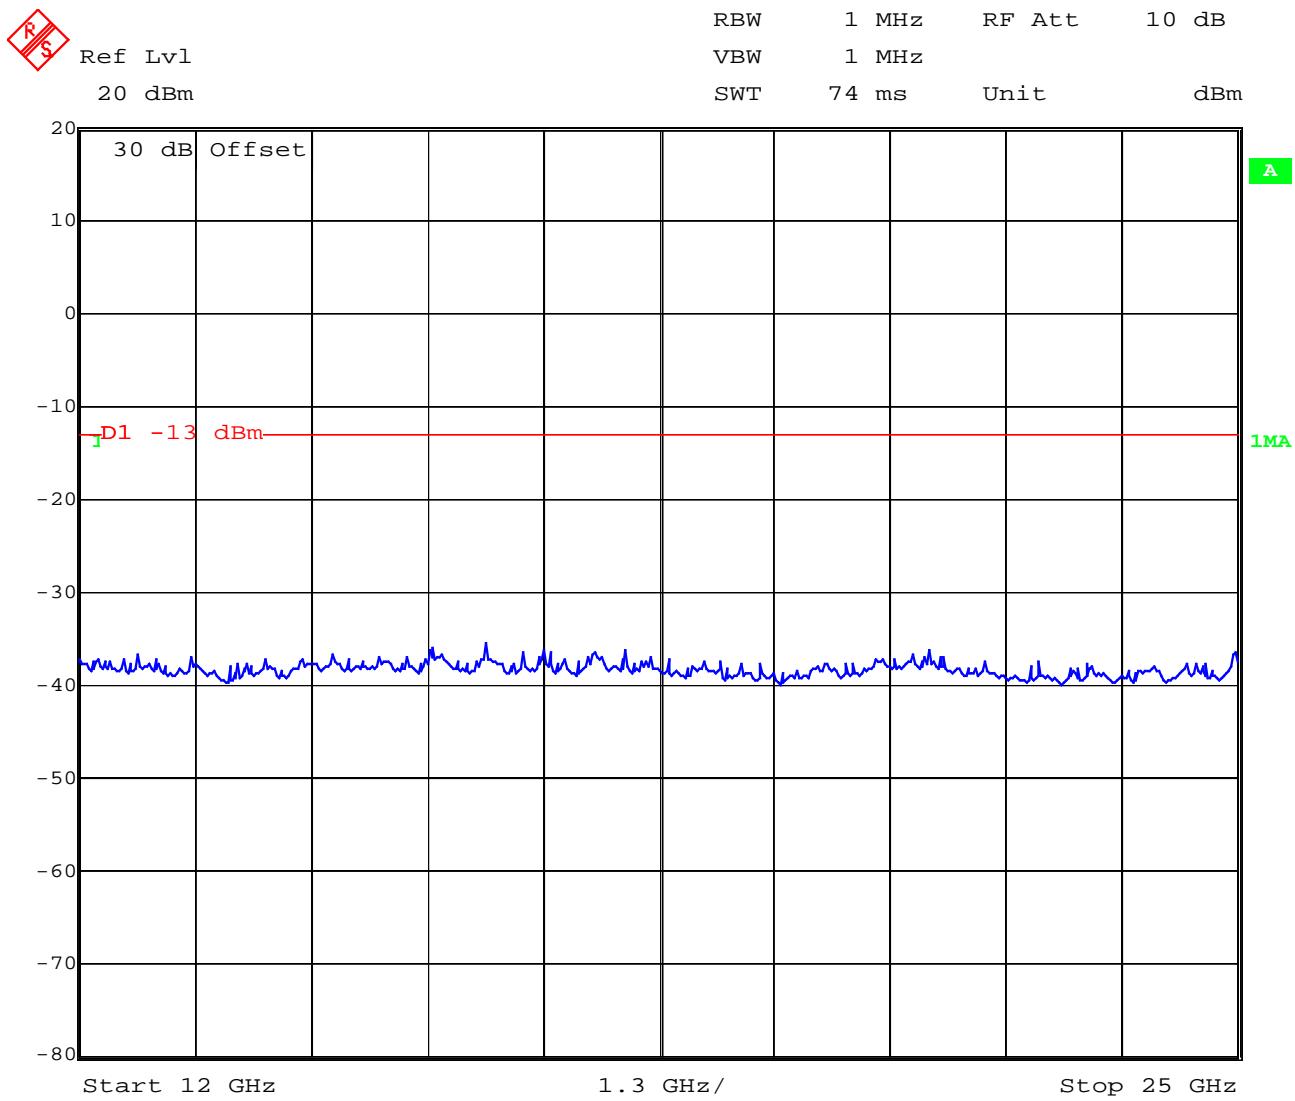
$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

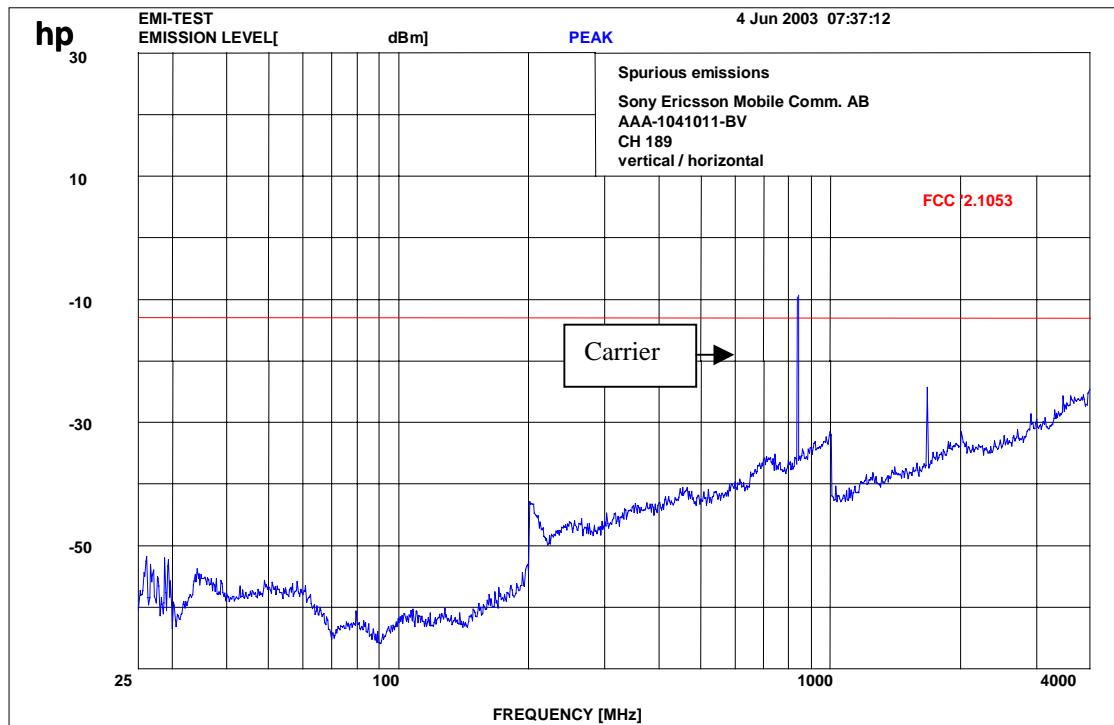
Carrier suppressed with a rejection filter

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## Channel 128 :- 25 GHz



**Channel 189 (up to 4 GHz )**

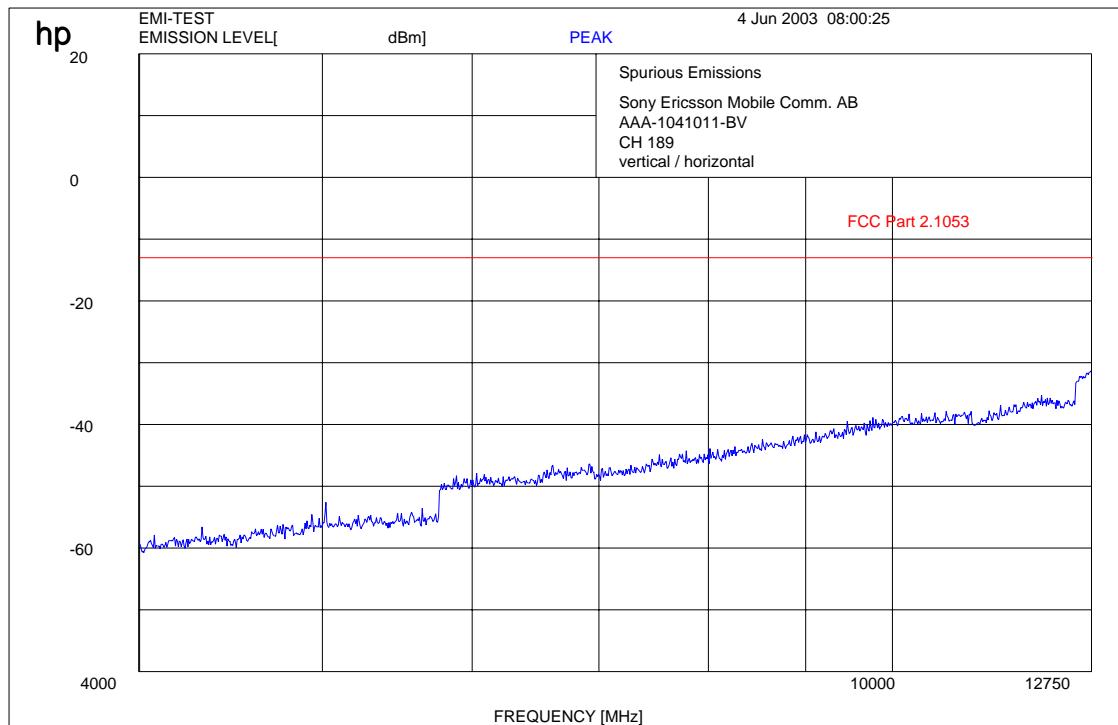
$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**Channel 189 (up to 12 GHz )**

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

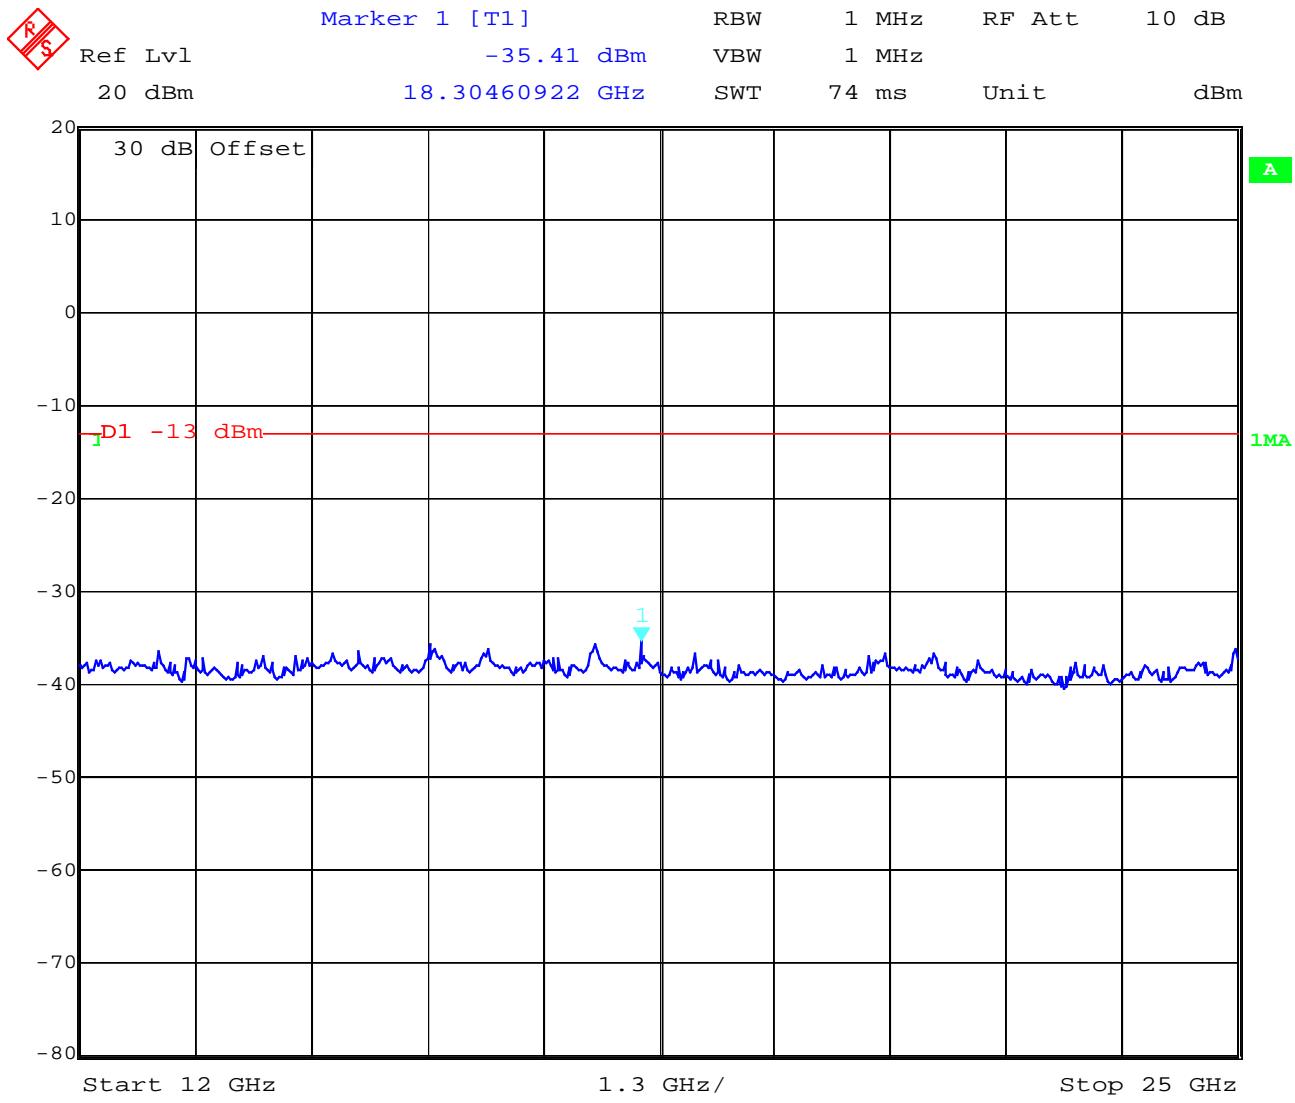
$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

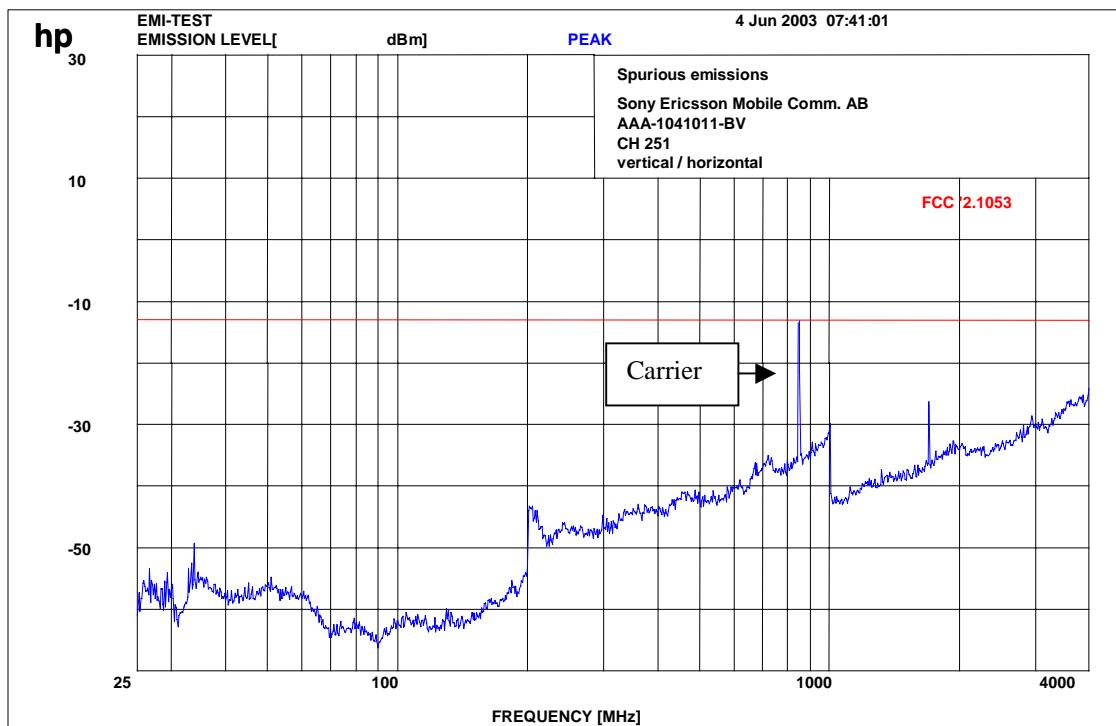
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## Channel 189 : -25 GHz



Date: 6.JUN.2003 09:08:30

**Channel 251 up to 4 GHz**

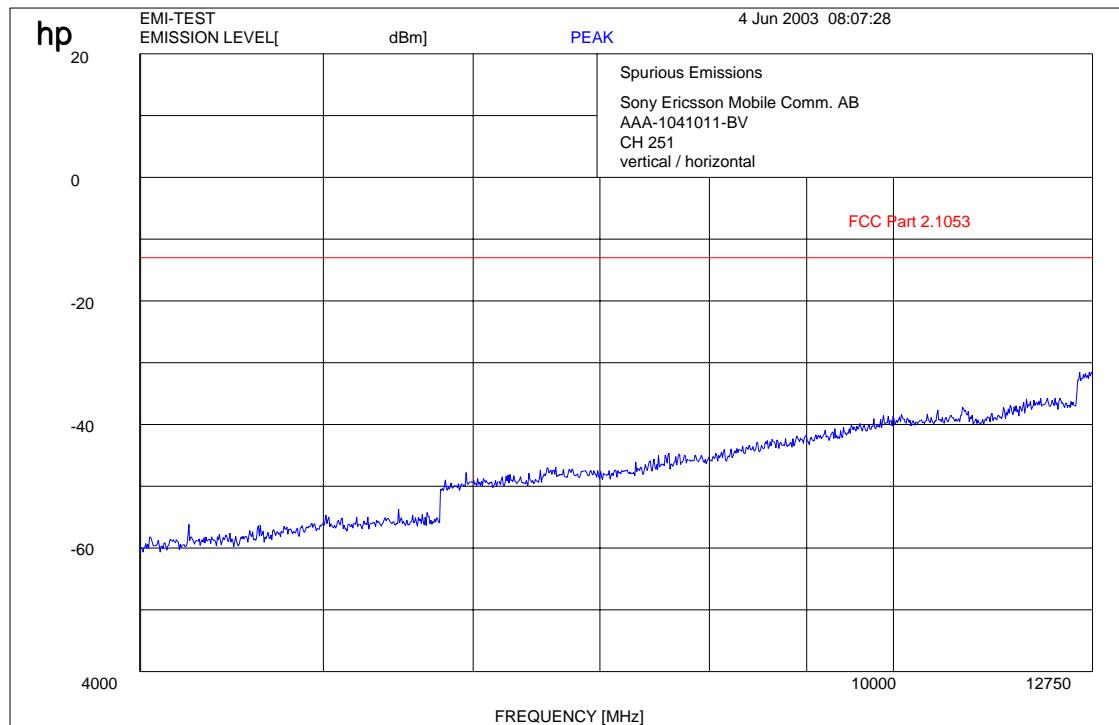
$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter

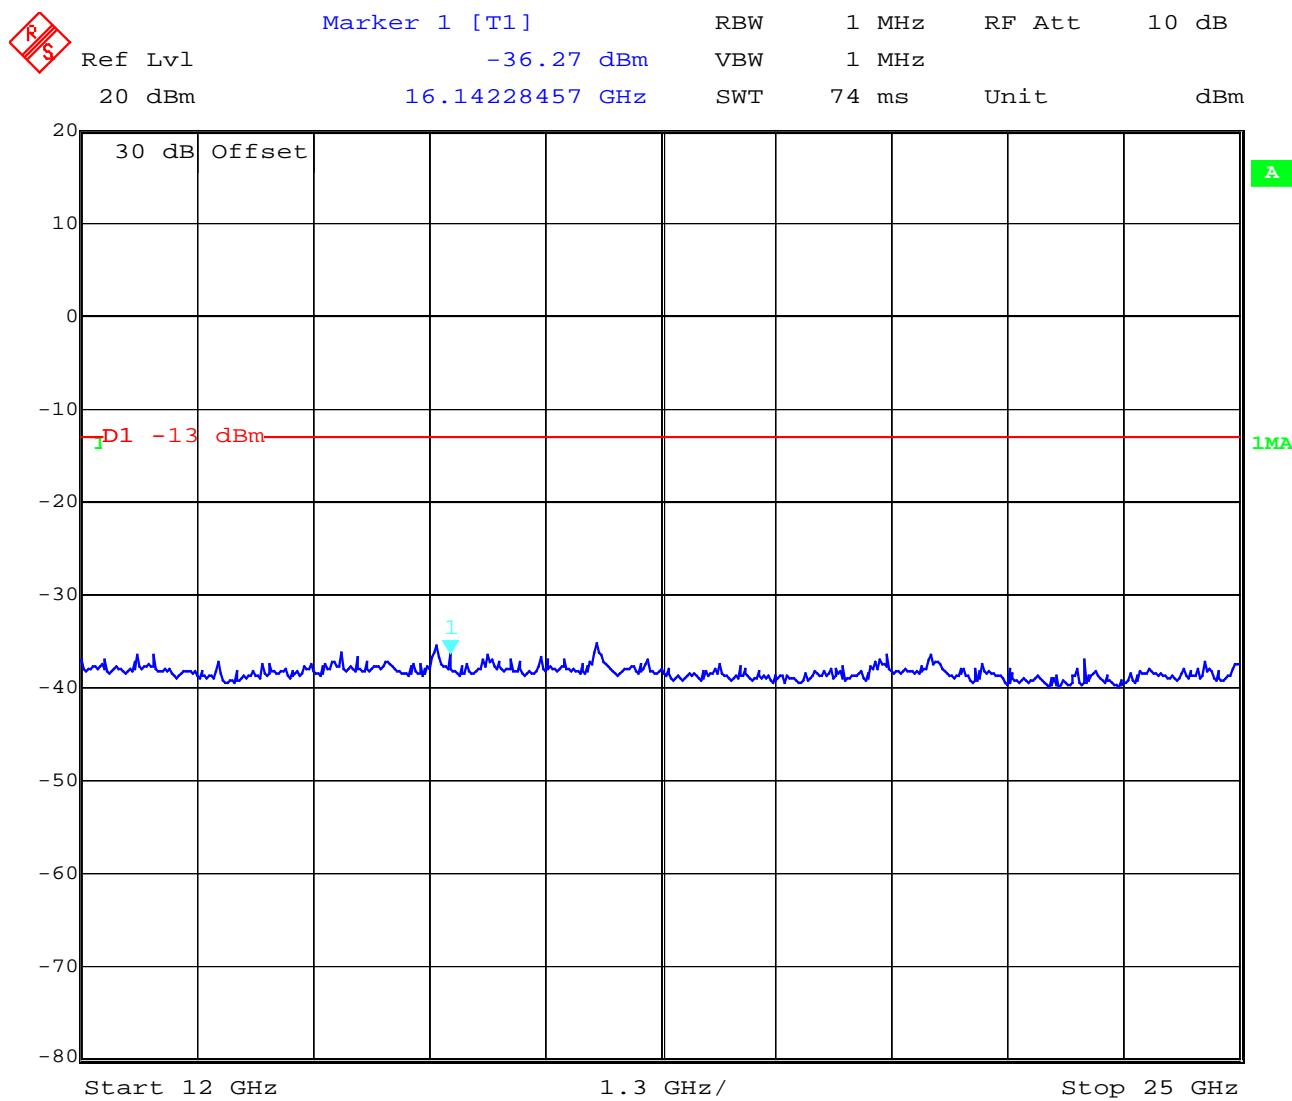
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**Channel 251 up to 12 GHz** **$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz** **$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz****Carrier suppressed with a rejection filter****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**Channel 251 : -25 GHz**



Date: 6.JUN.2003 09:09:47

**Idle-Mode****RECEIVER SPURIOUS RADIATION****§ 15.109****Radiated**

SPURIOUS EMISSIONS LEVEL ( $\mu\text{V}/\text{m}$ )								
CH 1 / 2 / 3								
f (MHz)	Detector	Level ( $\mu\text{V}/\text{m}$ )	f (MHz)	Detector	Level ( $\mu\text{V}/\text{m}$ )	f (MHz)	Detector	Level ( $\mu\text{V}/\text{m}$ )
<b>35.6</b>	<b>QP</b>	<b>24.8</b>						
<b>45.23</b>	<b>QP</b>	<b>6.1</b>						
<b>52.12</b>	<b>QP</b>	<b>7.4</b>						
<b>84.15</b>	<b>QP</b>	<b>6.0</b>						
<b>Measurement uncertainty</b>			<b><math>\pm 3</math> dB</b>					

f &lt; 1 GHz : RBW/VBW: 100 kHz

f  $\geq$  1 GHz : RBW/VBW: 1 MHz

see above plots

**Measurement distance see table****Limits****SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
<b>0.009 – 0.490</b>	<b>2400/F(kHz)</b>	<b>300</b>
<b>0.490 – 1.705</b>	<b>24000/F(kHz)</b>	<b>30</b>
<b>1.705 – 30.0</b>	<b>30</b>	<b>30</b>
<b>30 - 88</b>	<b>100 (40 dB<math>\mu\text{V}/\text{m}</math>)</b>	<b>3</b>
<b>88 - 216</b>	<b>150 (43.5 dB<math>\mu\text{V}/\text{m}</math>)</b>	<b>3</b>
<b>216 - 960</b>	<b>200 (46 dB<math>\mu\text{V}/\text{m}</math>)</b>	<b>3</b>
<b>above 960</b>	<b>500 (54 dB<math>\mu\text{V}/\text{m}</math>)</b>	<b>3</b>

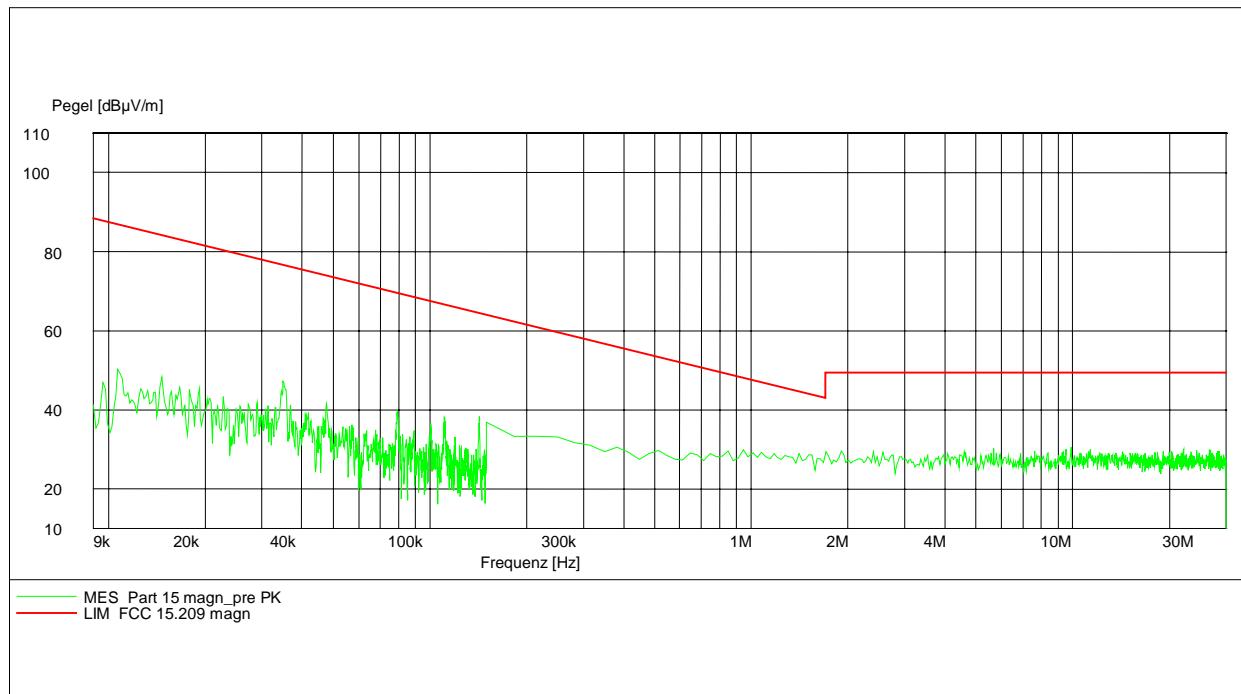
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64; 52-63

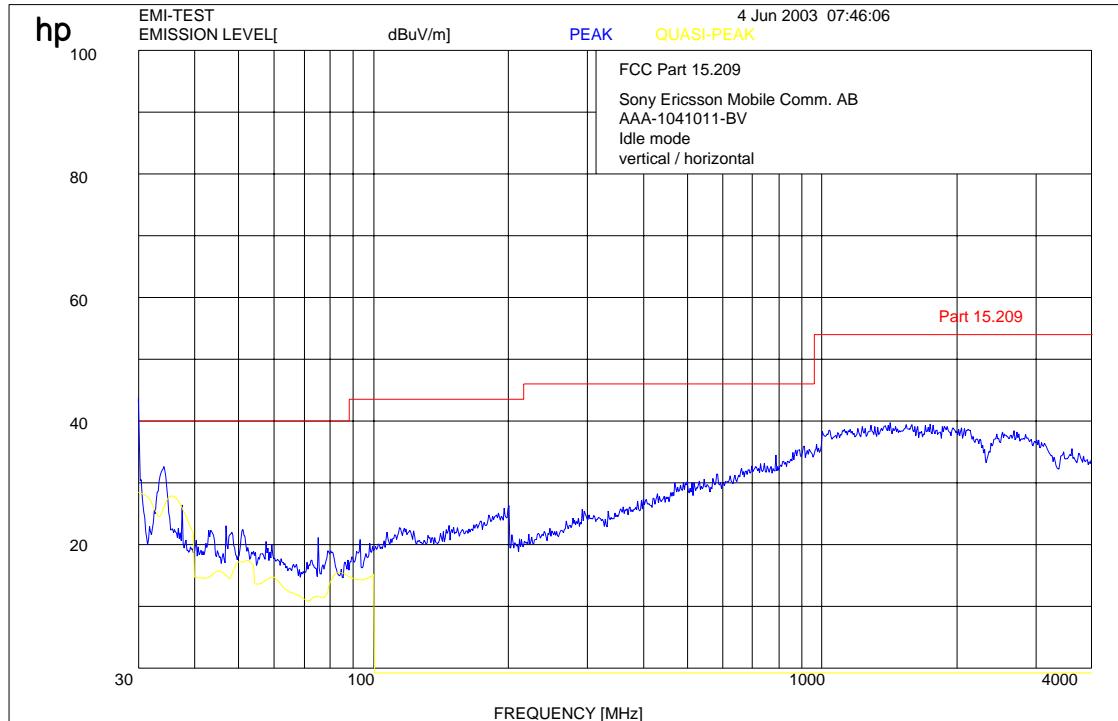
**9 kHz – 30 MHz****Part 15.209 Magnetics**

EUT: AAB-1031011-BV  
Manufacturer: Sony Ericsson  
Operating Condition: Idle mode with charger 4020069-BV  
Test Site: Cetecom, Room 6  
Operator: Berg  
Test Specification: 115V / 60 Hz  
Comment:  
Start of Test: 04.06.03 / 09:15:31

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

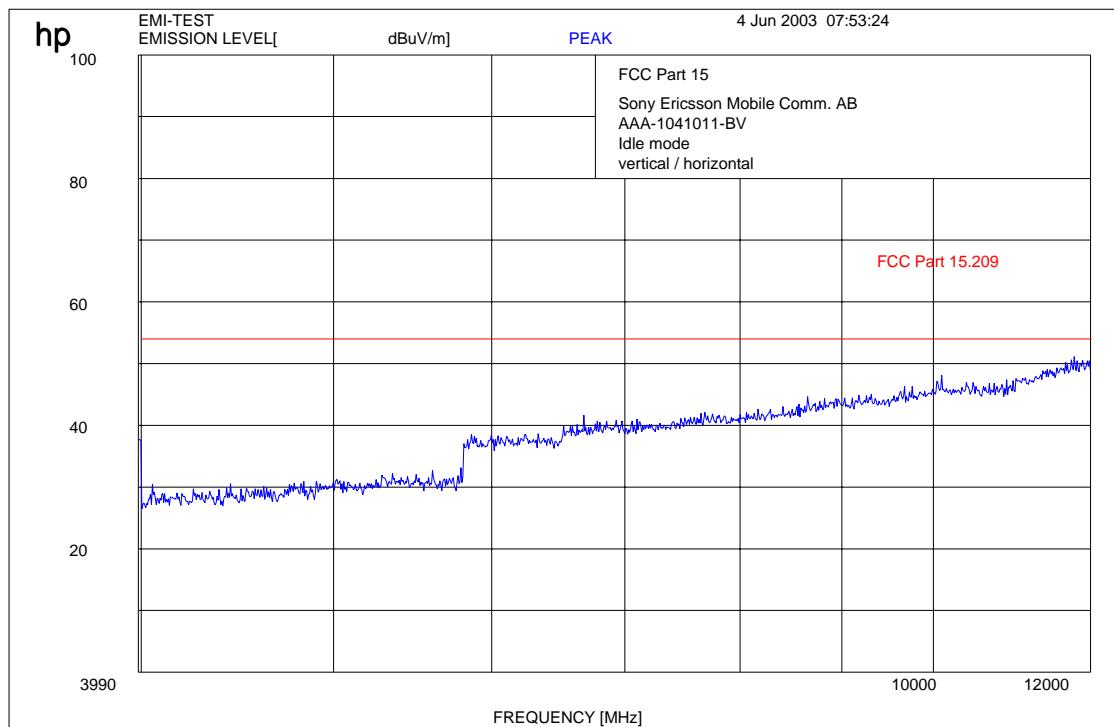
(for reference numbers see test equipment listing)

17 – 24, 64; 52-63

**Channel 189 (this is valid for all 3 channels and up to 4 GHz)  
Idle-Mode**

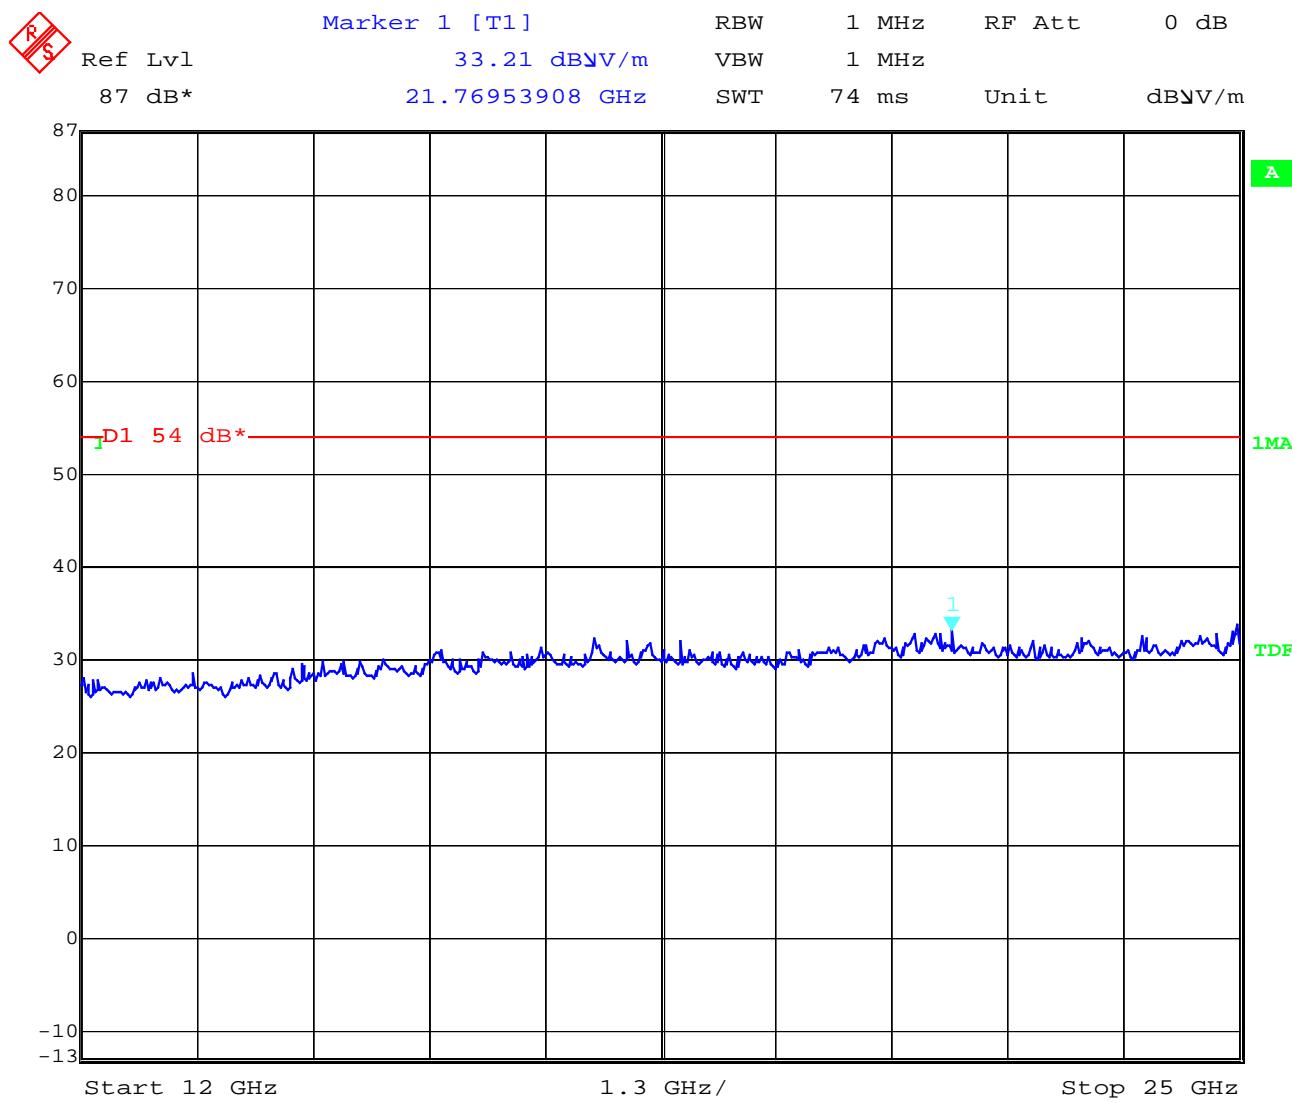
$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz

**Channel 189 (this is valid for all 3 channels and up to 12 GHz)  
Idle-Mode****f < 1 GHz : RBW/VBW: 100 kHz****f ≥ 1GHz : RBW/VBW 1 MHz****REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****17 – 24, 64; 52-63**

**Channel 189 (this is valid for all 3 channels and up to 25 GHz)**

**Idle-Mode**



Date: 6.JUN.2003 09:03:45

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64; 52-63

**CONDUCTED SPURIOUS EMISSIONS****Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**USPCS Transmitter****Channel Frequency**

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

**Measurement Limit:**

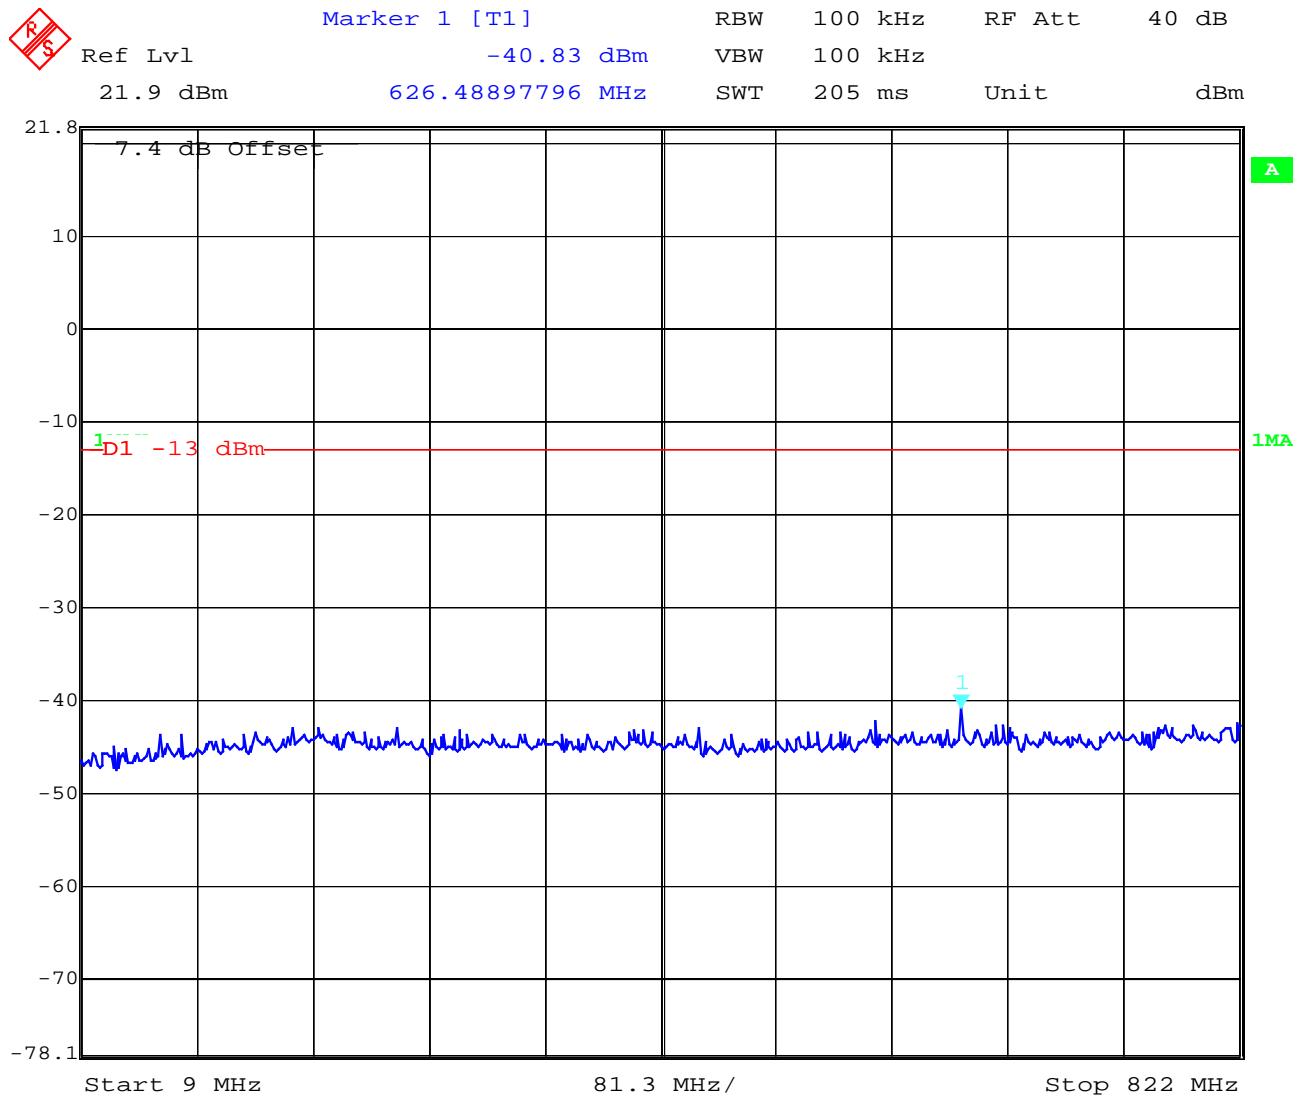
Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 128</b>					
824,2		32.01	-13.0 (45.01 dBc)		carrier
626.49		-40.83		72.84	complies
824.00		-14.66		46.67	complies
16473.3		-37.0		69.01	complies
<b>CH 189</b>					
836,4		32.72	-13.0 (45.72 dBc)		carrier
656.84		-41.80		54.80	complies
1661.15		-36.75		79.47	complies
<b>CH 251</b>					
848.8		-32.35	-13.0 (45.35 dBc)		carrier
807.75		-41.38		73.73	complies
8498.02		-13.65		46.00	complies
15950.5		-37.57		69.92	complies
<b>Measurement uncertainty</b>		$\pm 0.5\text{dB}$			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

**Measurements:****Channel: 128**

Date: 6.JUN.2003 08:16:48

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

**Channel 128**

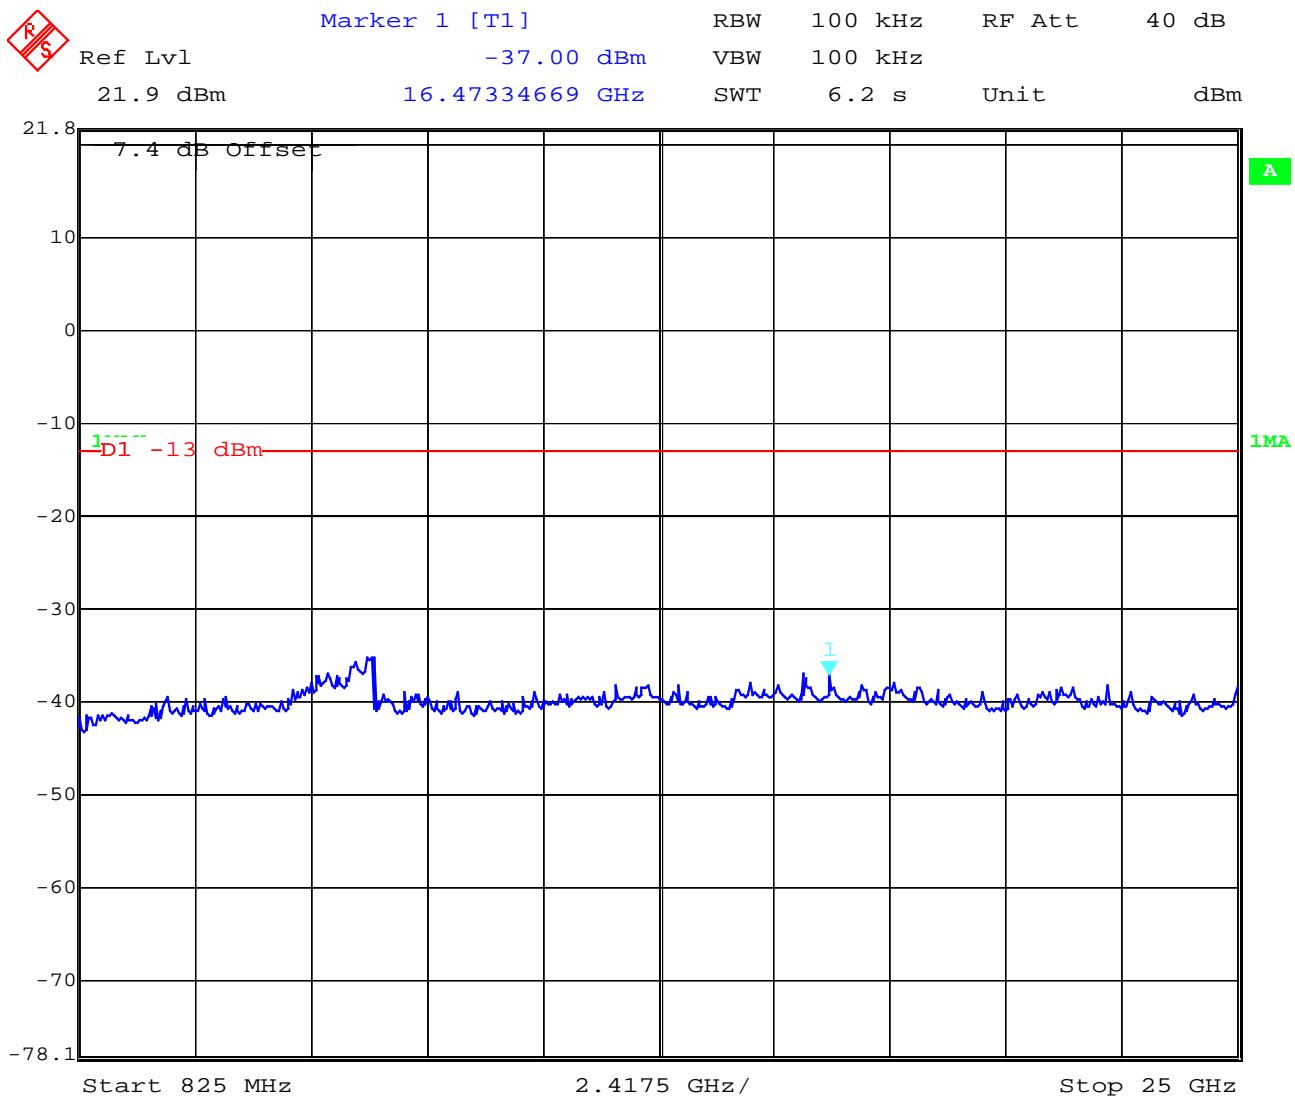


Date: 6.JUN.2003 08:17:56

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

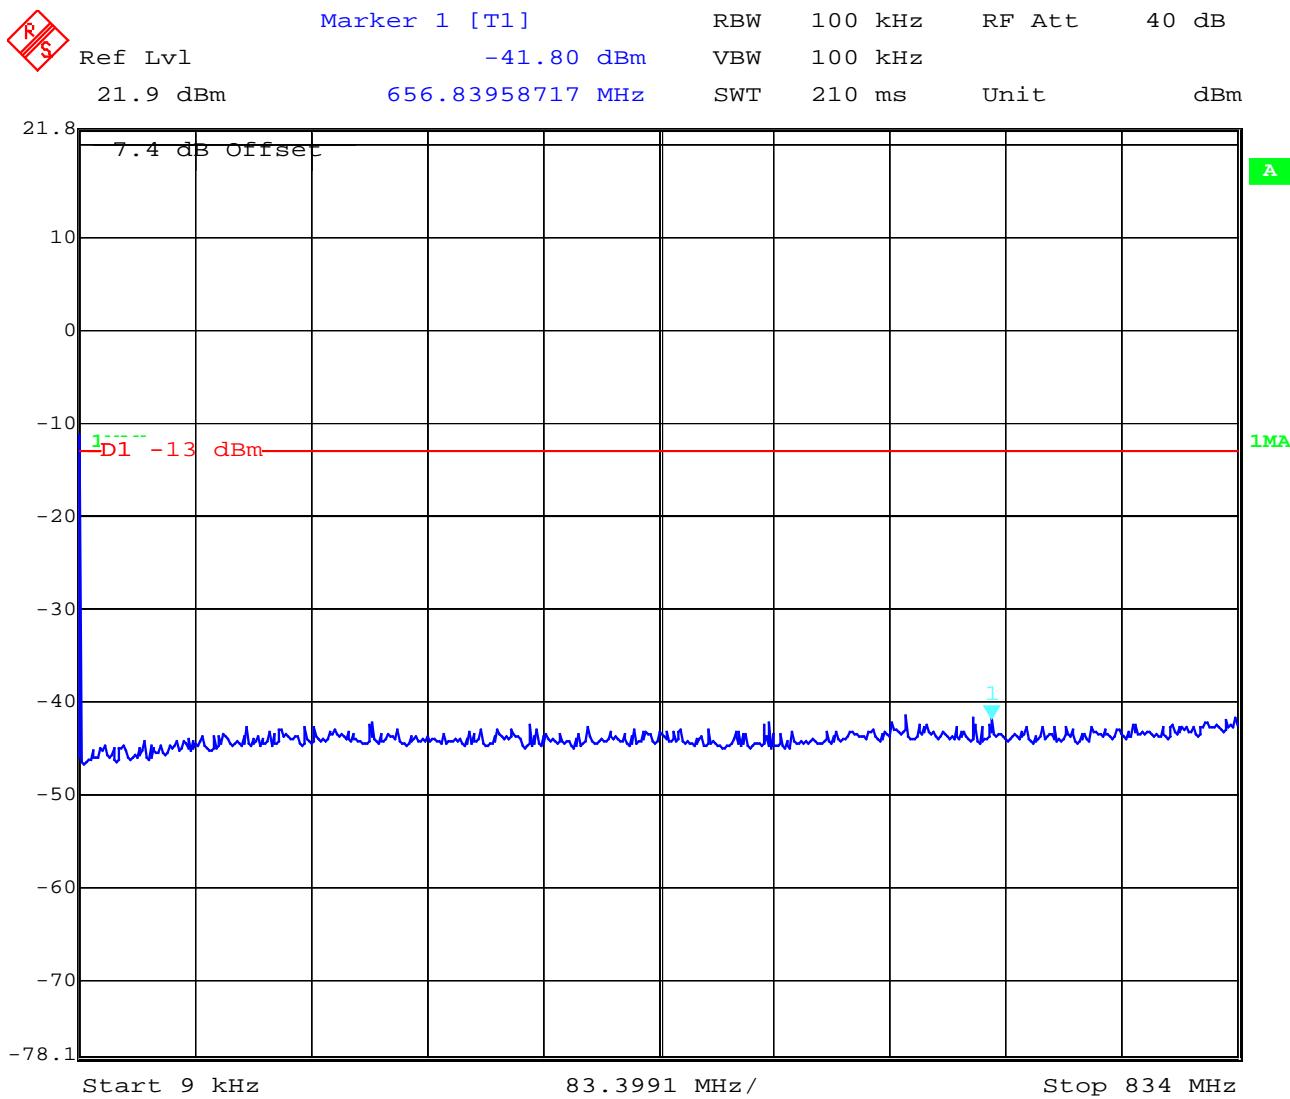
**Channel 128**

Date: 6.JUN.2003 08:19:22

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

**Channel 189**

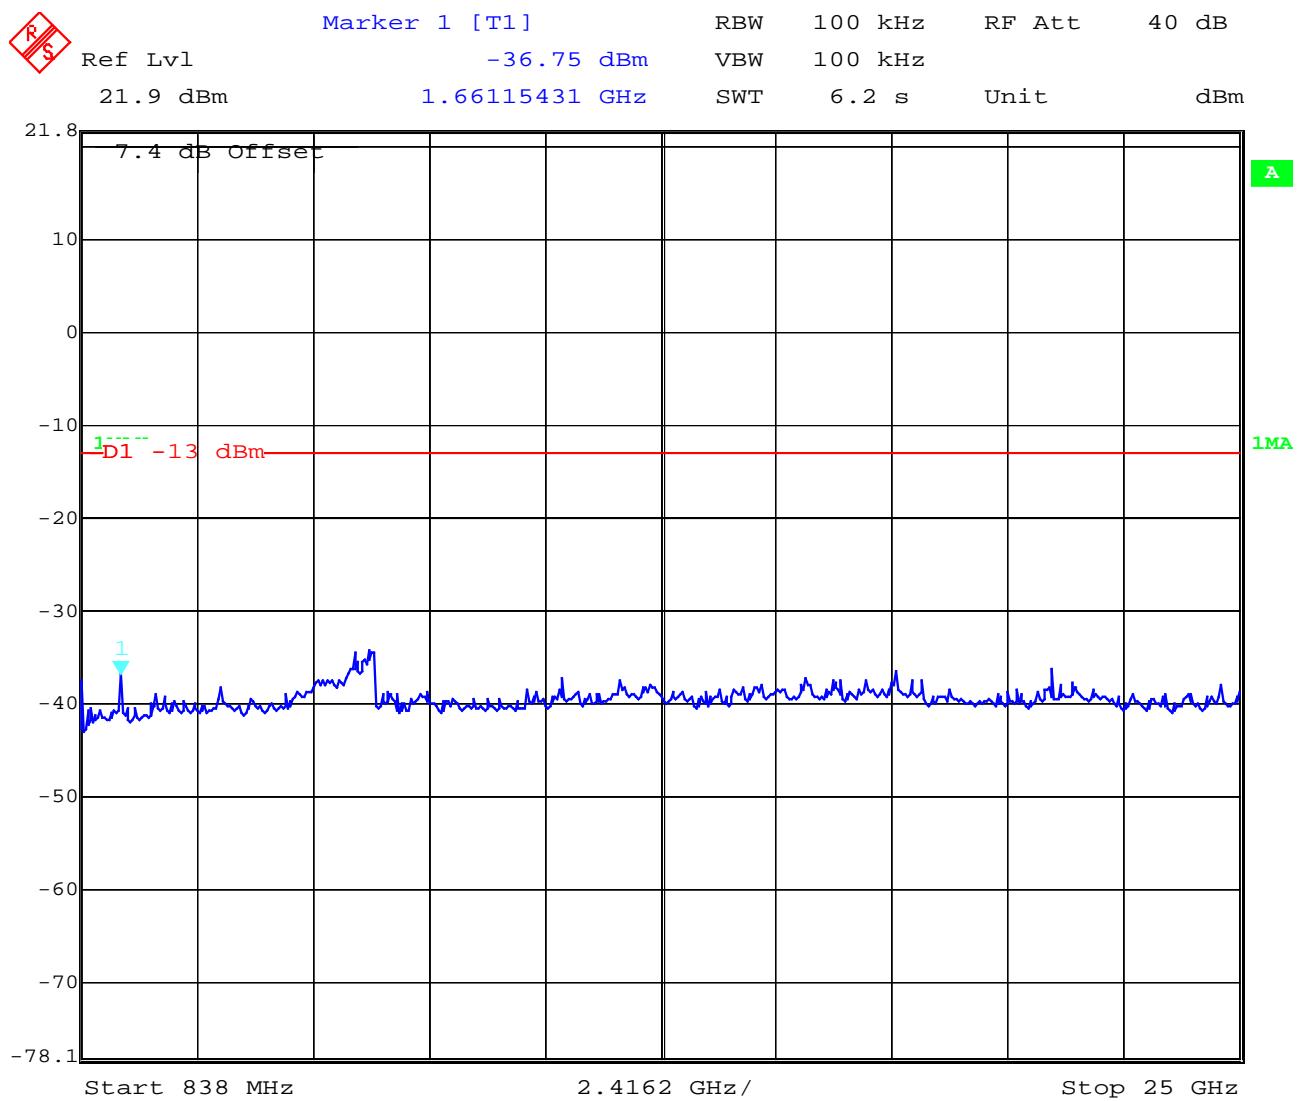
Date: 6.JUN.2003 08:20:24

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

**Channel 189**

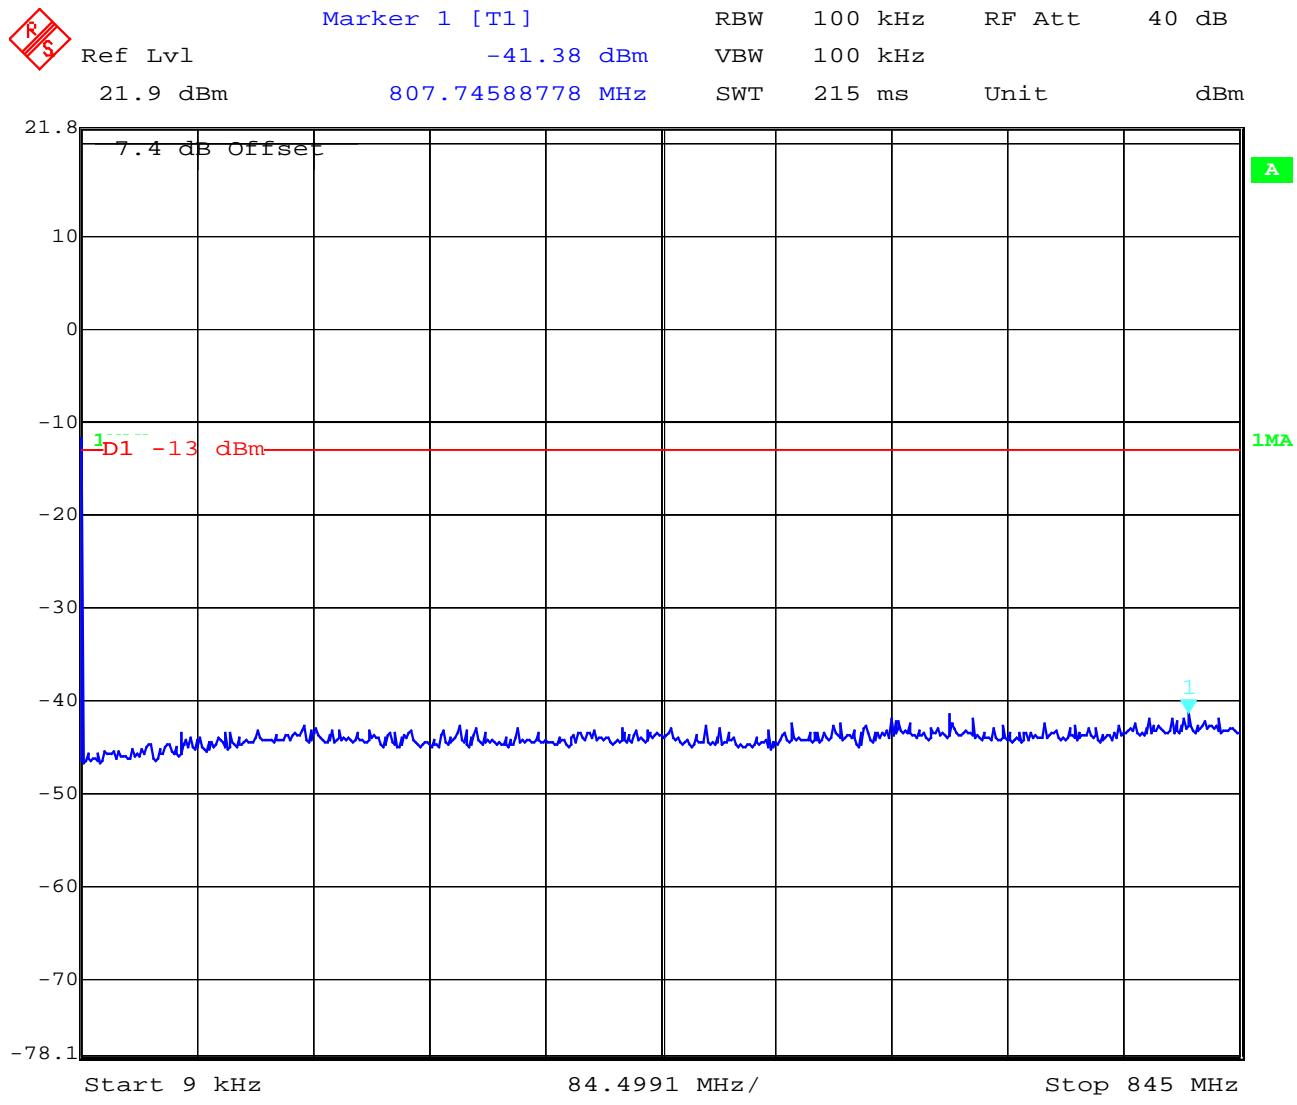


Date: 6.JUN.2003 08:24:02

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

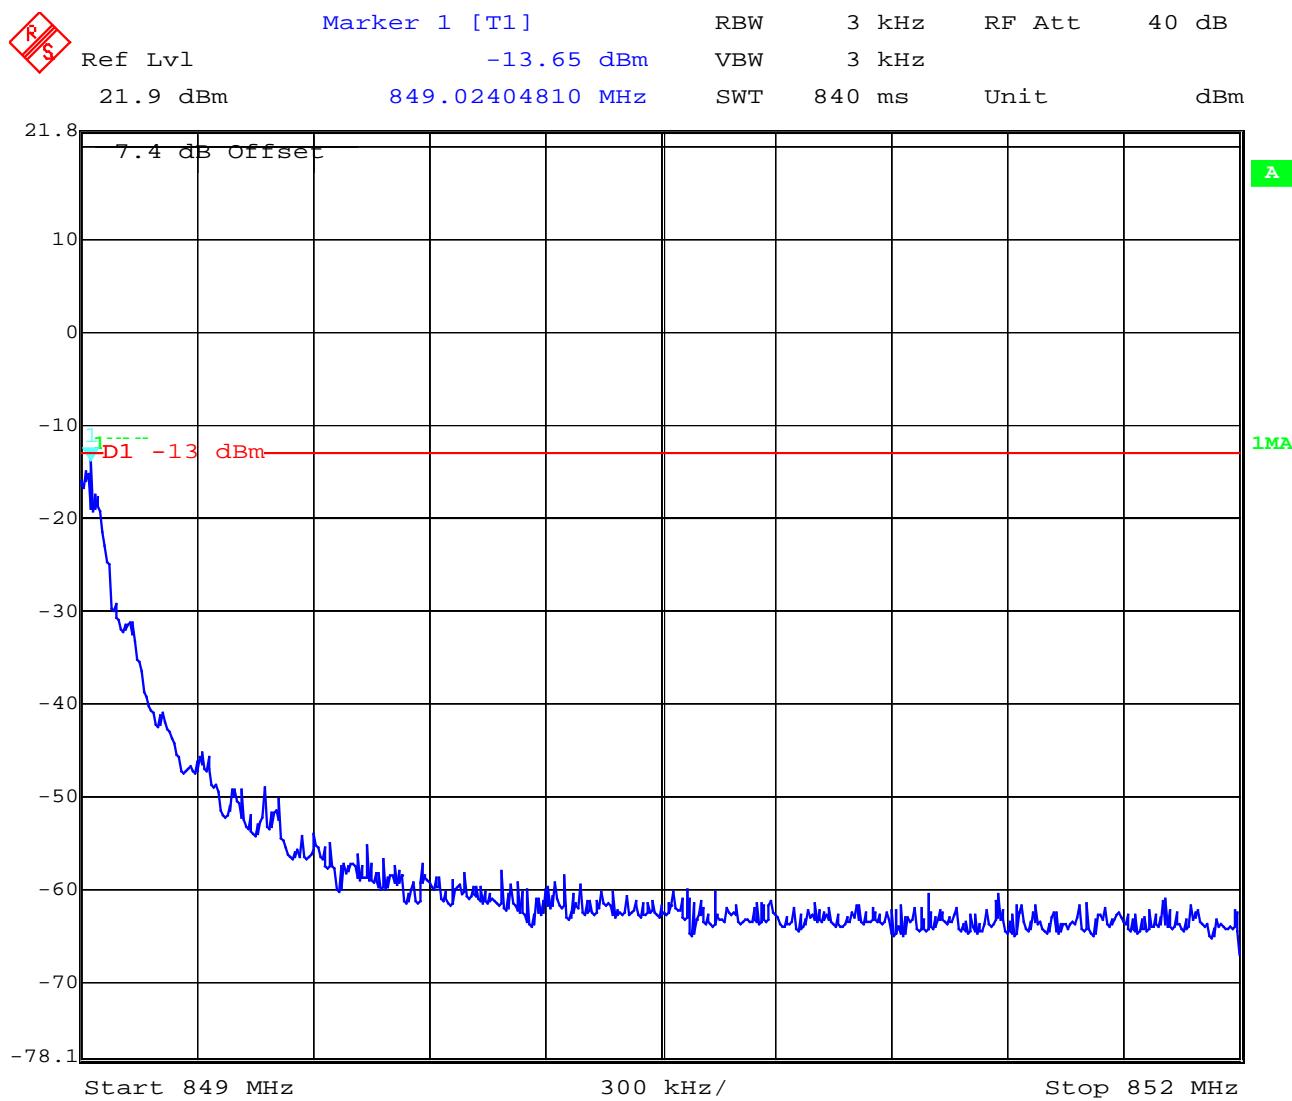
**Channel 251**

Date: 6.JUN.2003 08:25:19

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

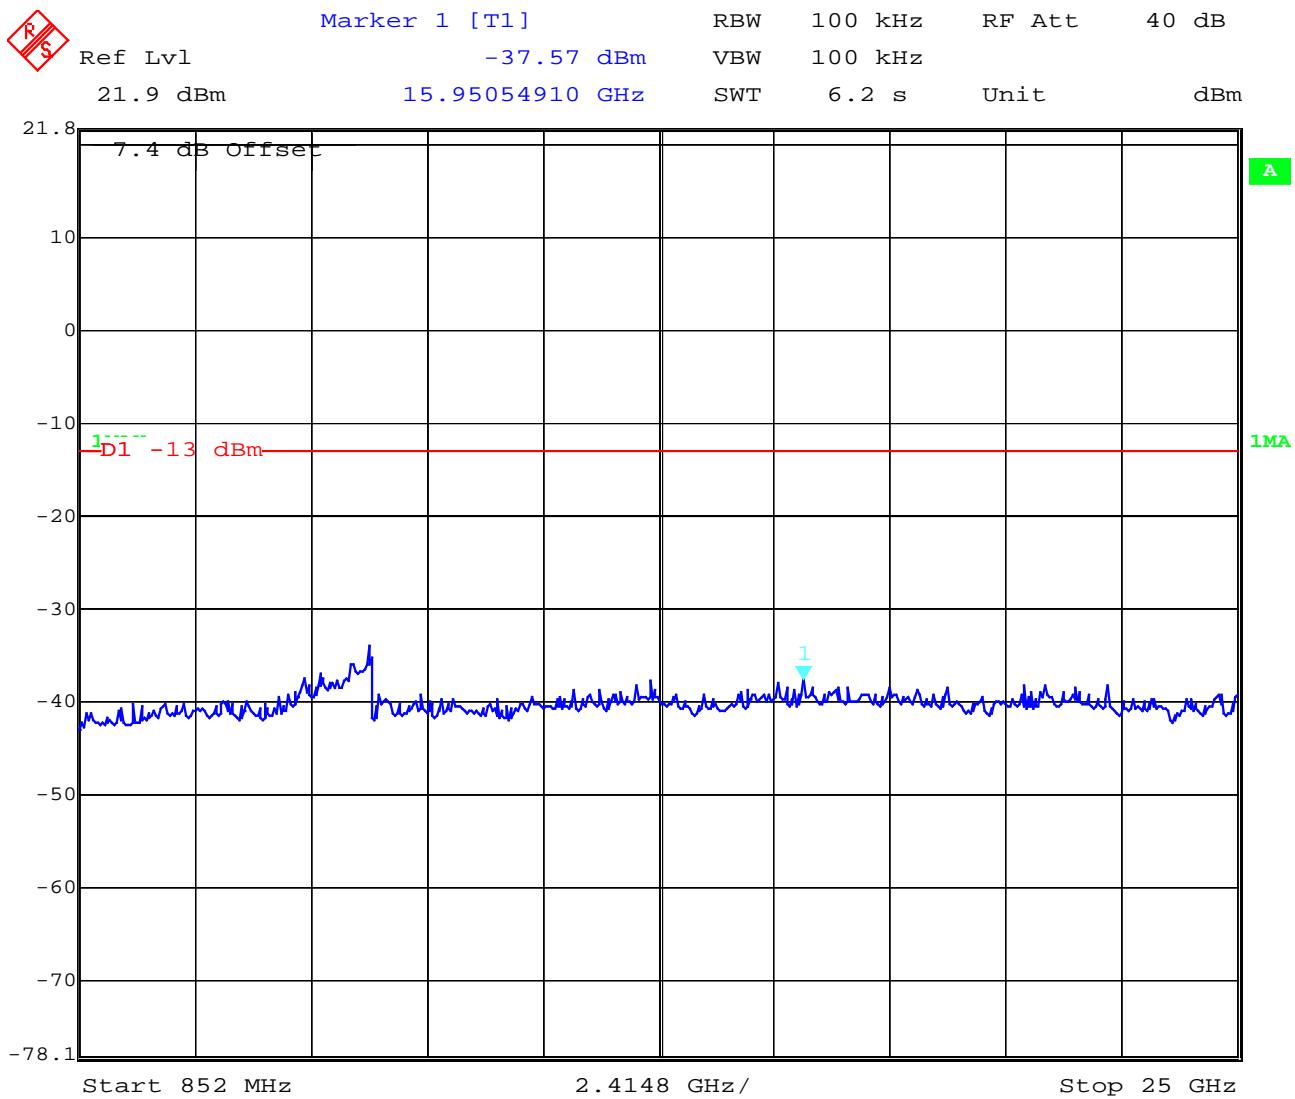
**Channel 251**

Date: 6.JUN.2003 08:29:23

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

**Channel 251**

Date: 6.JUN.2003 08:28:15

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

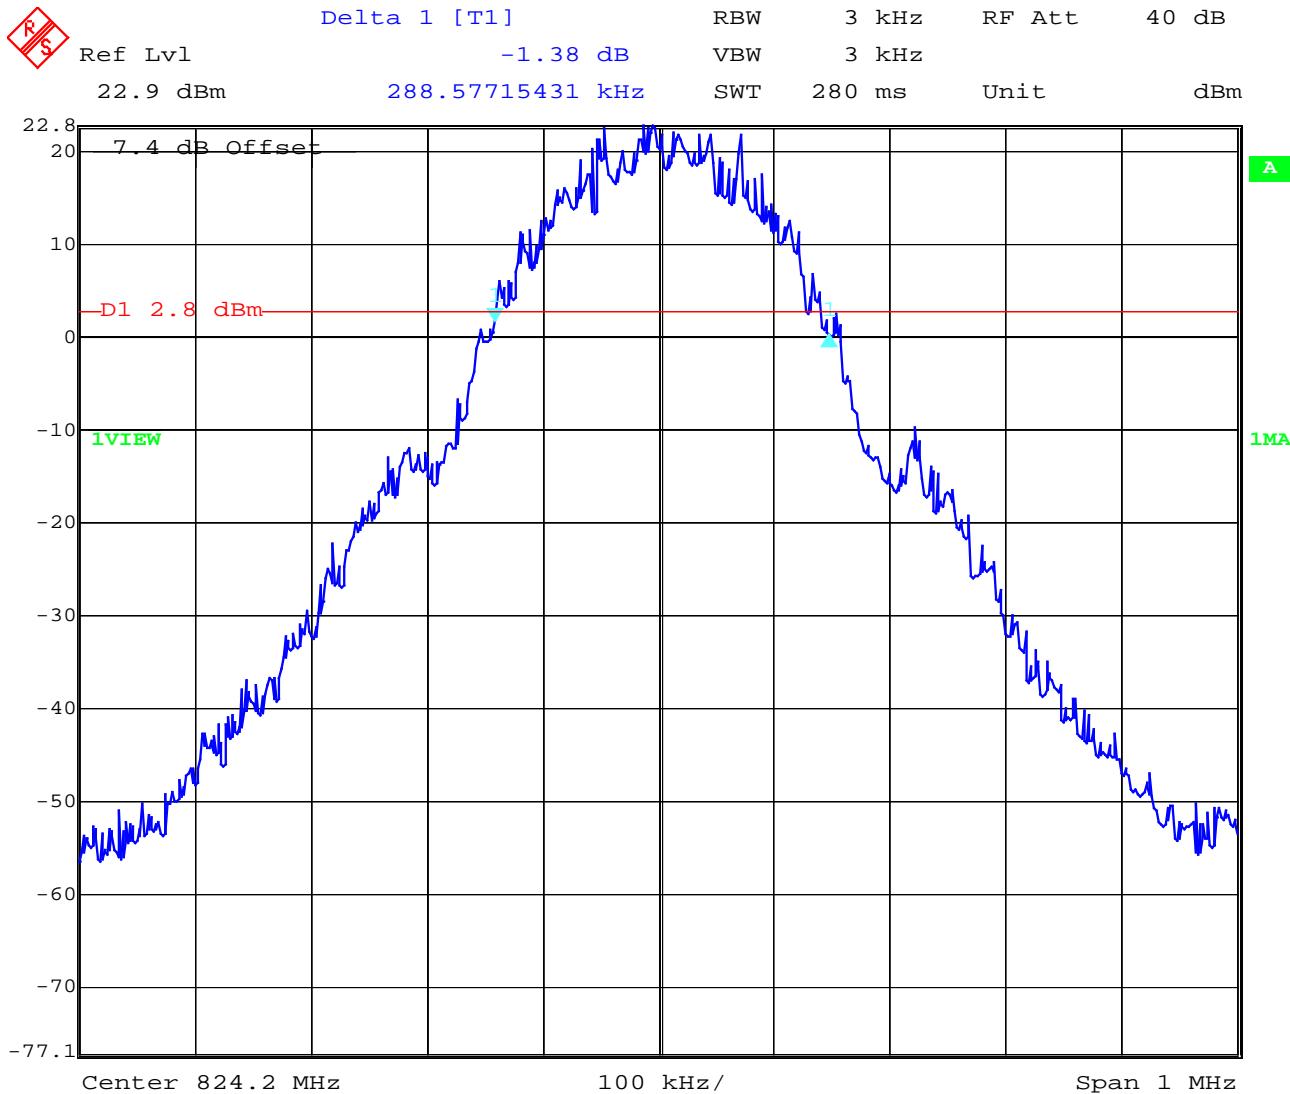
17 - 24, 64

**OCCUPIED BANDWIDTH****§2.989****Occupied Bandwidth Results**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

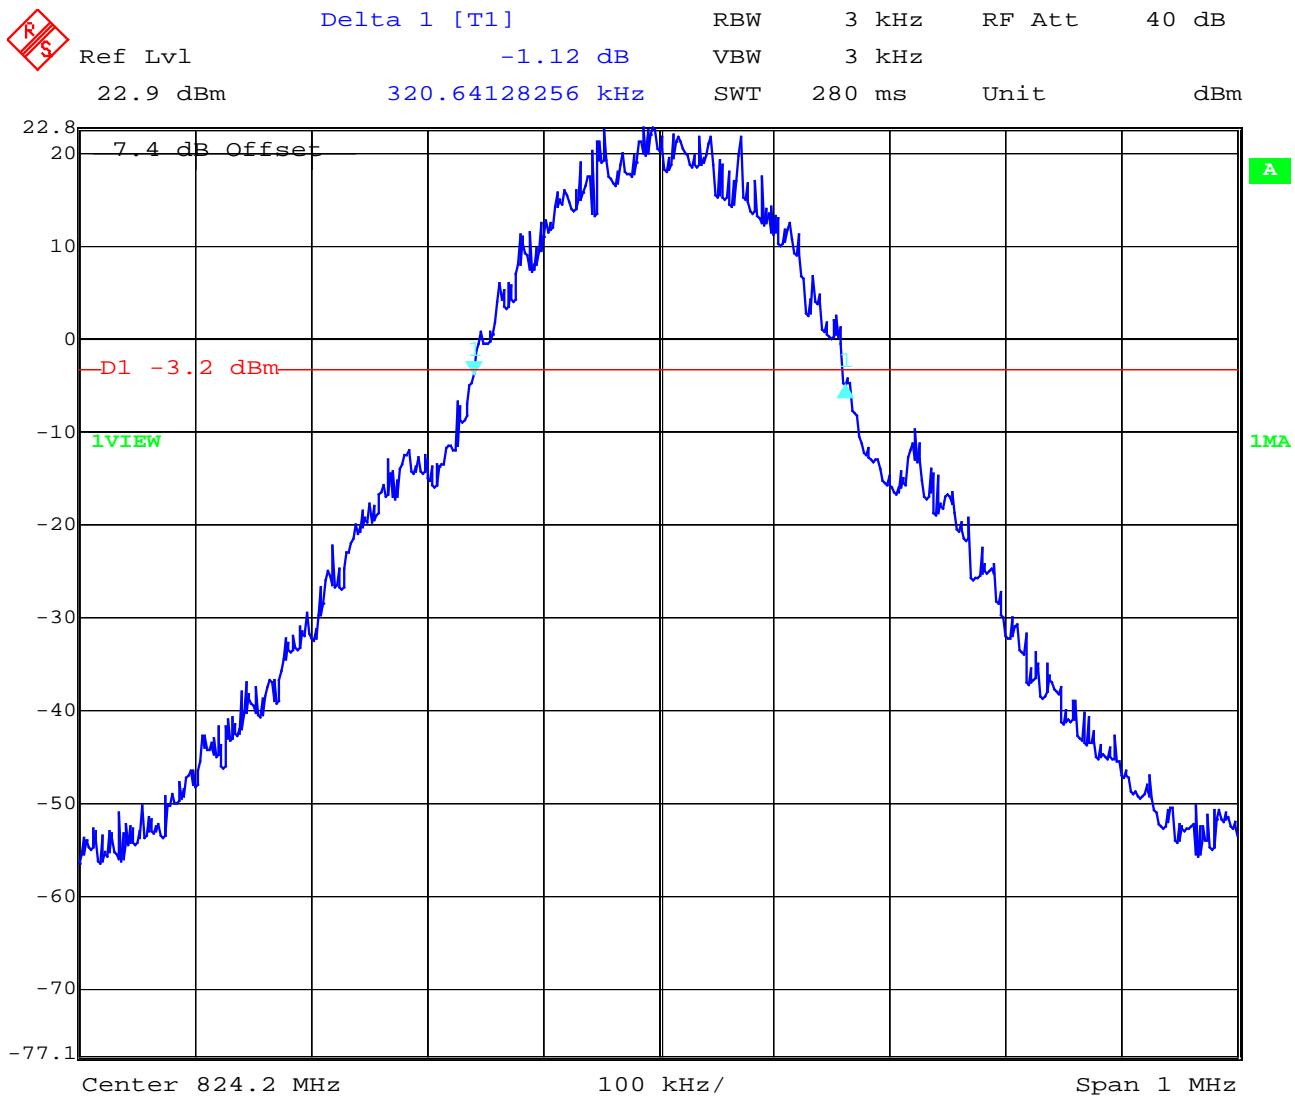
Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
824.2 MHz	288.577	320.641
836.4 MHz	278.557	324.649
848.8 MHz	286.573	314.629

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 290 kHz, this equates to a resolution bandwidth of at least 2.9 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

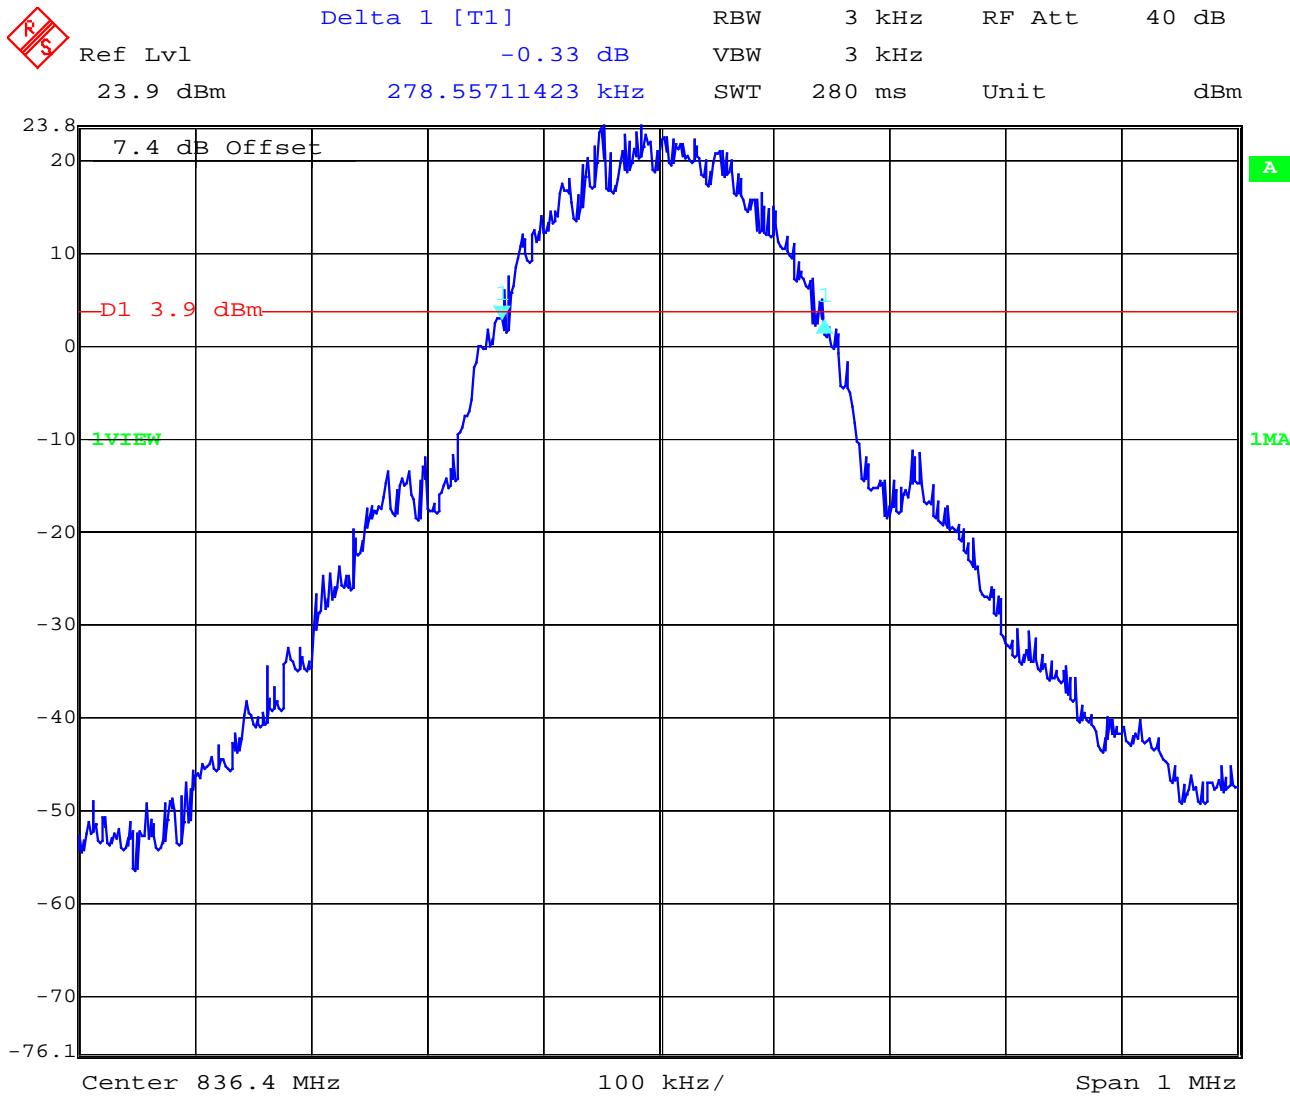
**Channel 128****99% Occupied Bandwidth**

Date: 6.JUN.2003 08:32:34

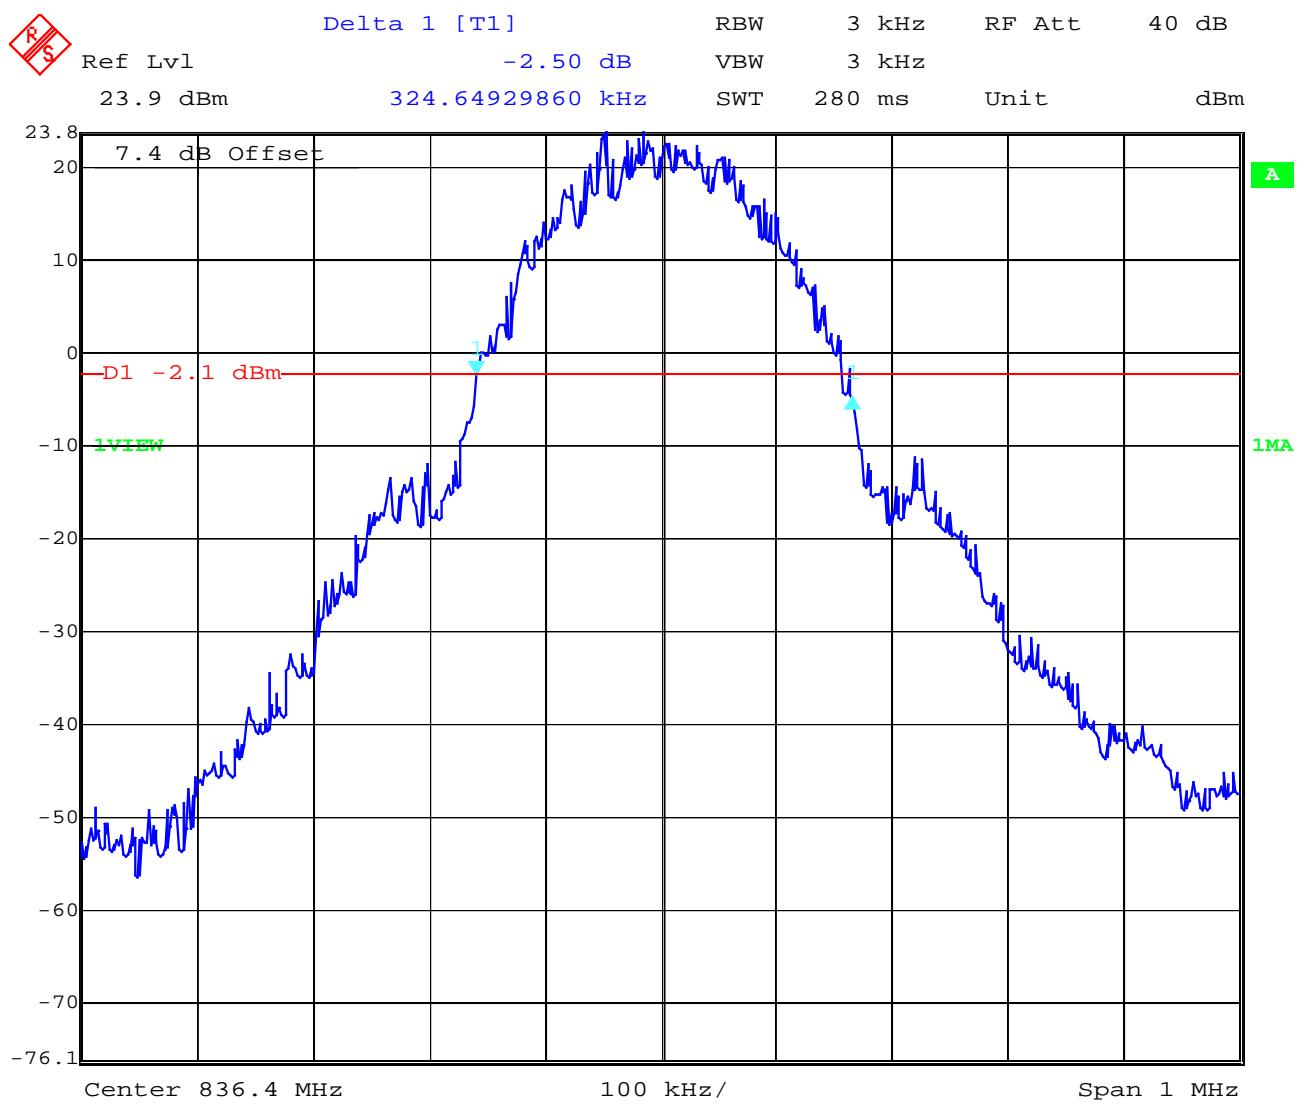
**Channel 128**  
**-26 dBc Bandwidth**



Date: 6.JUN.2003 08:33:09

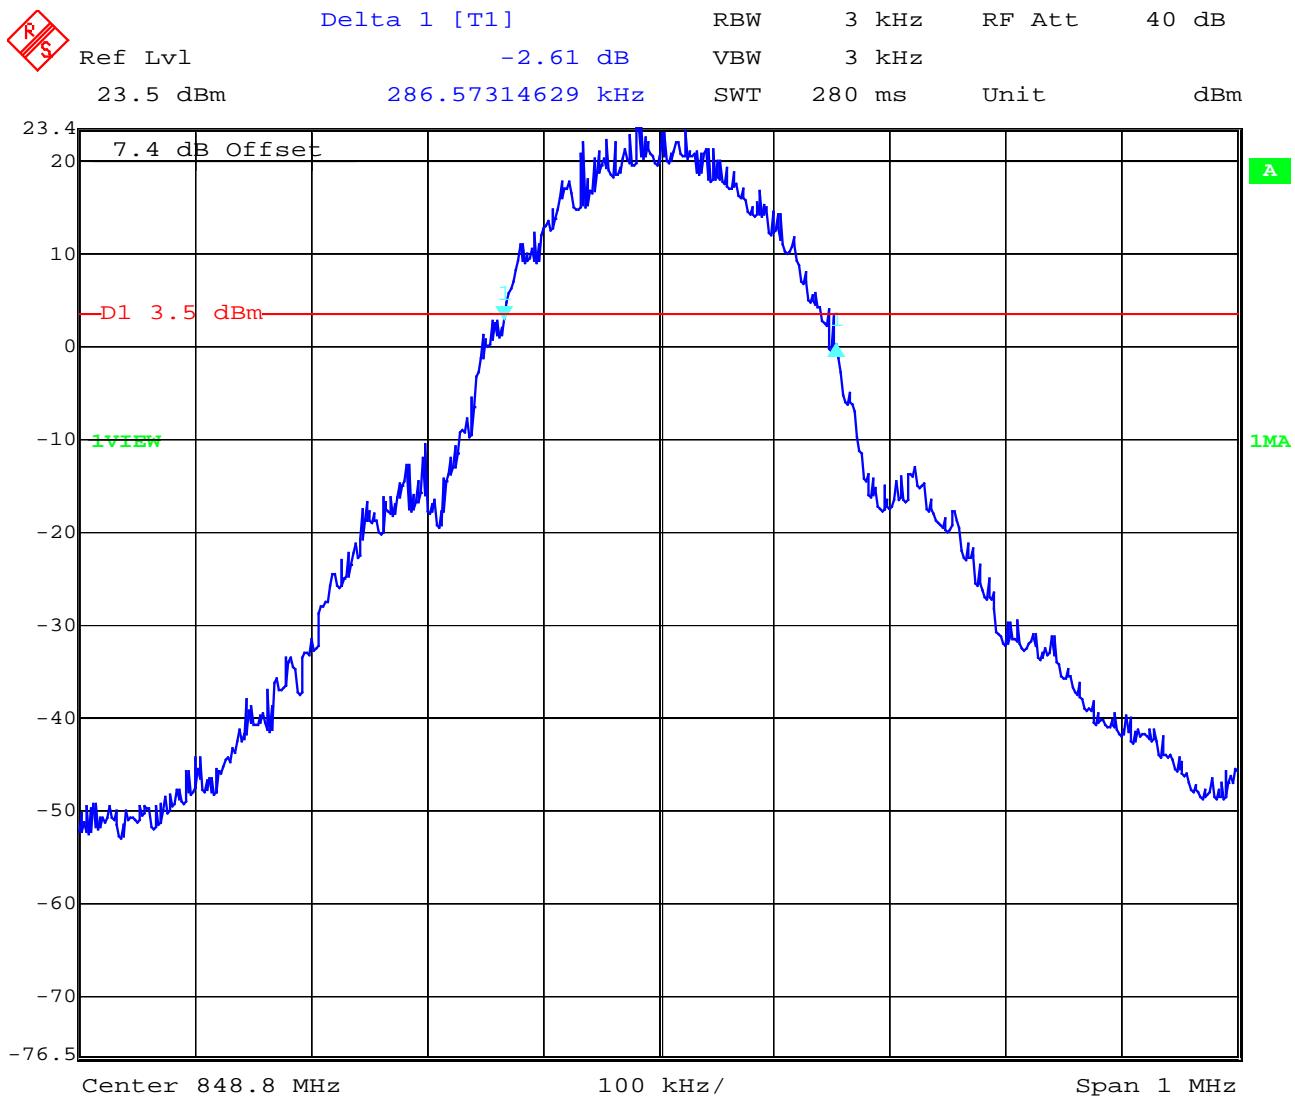
**Channel 189****99% Occupied Bandwidth**

Date: 6.JUN.2003 08:35:39

**Channel 189**  
**-26 dBc Bandwidth**

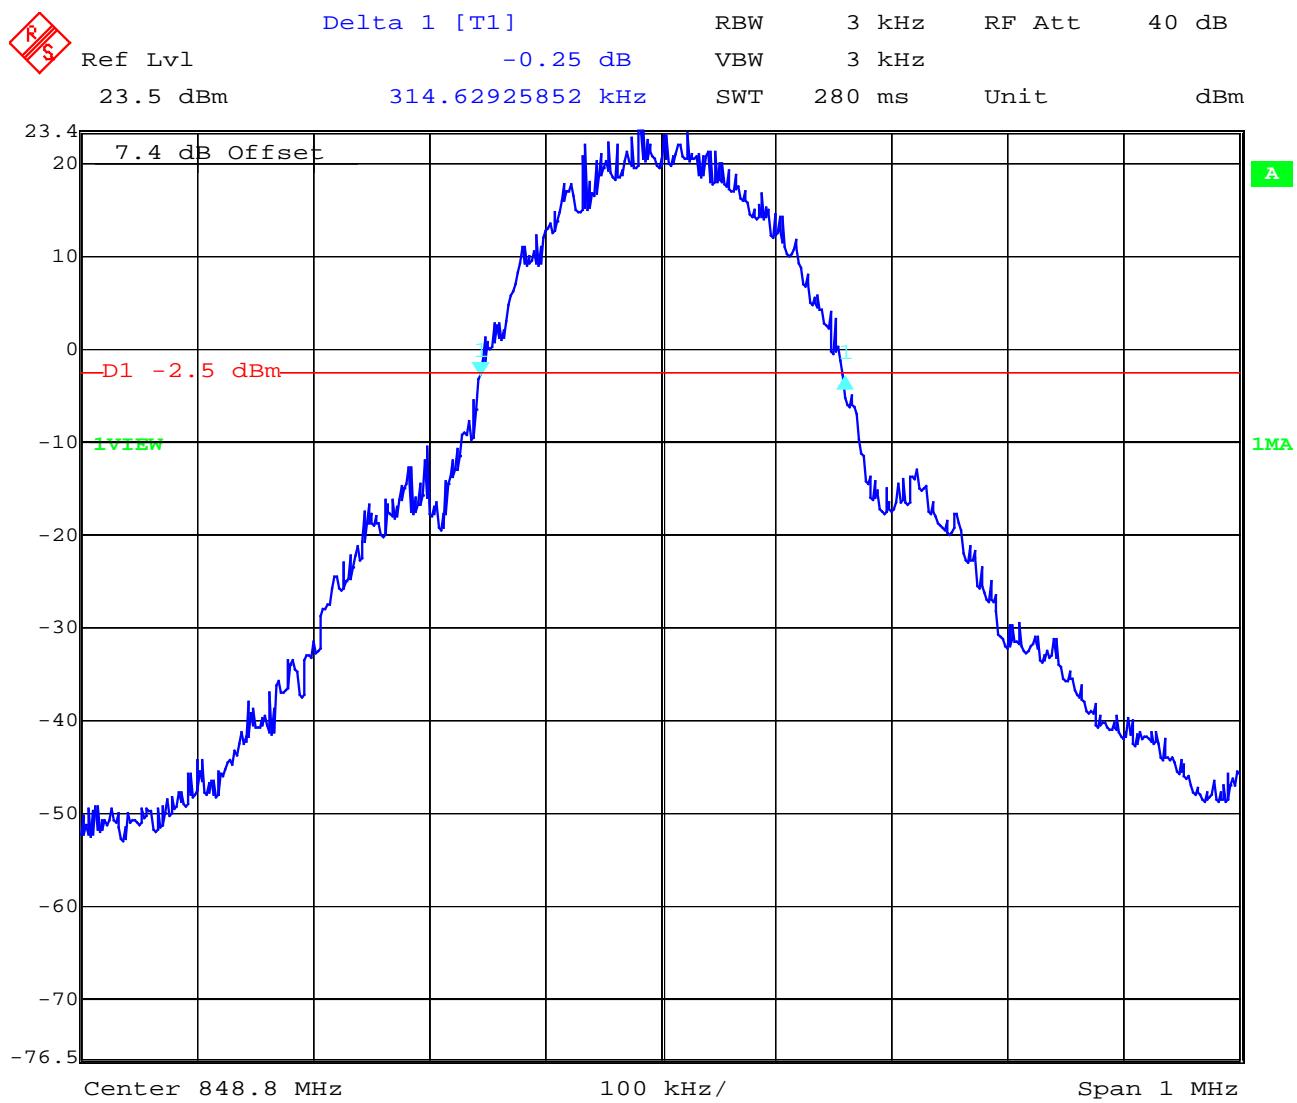
**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 251**  
**99% Occupied Bandwidth**



Date: 6.JUN.2003 08:37:56

**Channel 251**  
**-26 dBc Bandwidth**



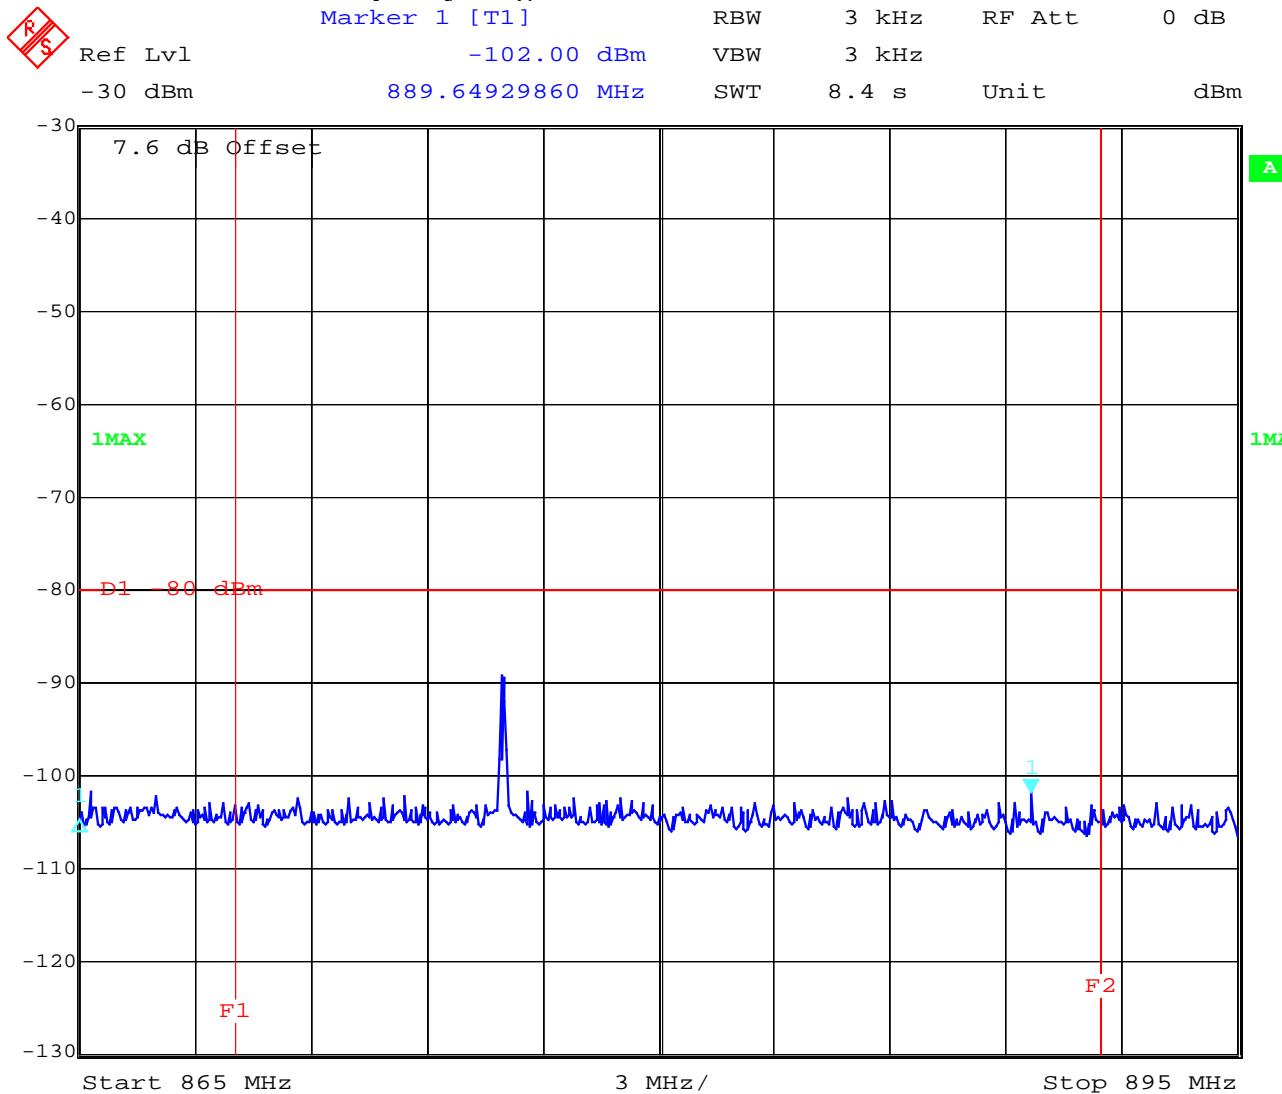
Date: 6.JUN.2003 08:38:30

**EMISSION LIMITATIONS FOR CELLULAR      §22.917(F)**

**Mobile emissions in the base frequency range**

**As you can see in the following plots, all peaks are below -80 dBm in the base frequency range.**

**Idle Mode base station frequency range A**



Date: 6.JUN.2003 08:56:30

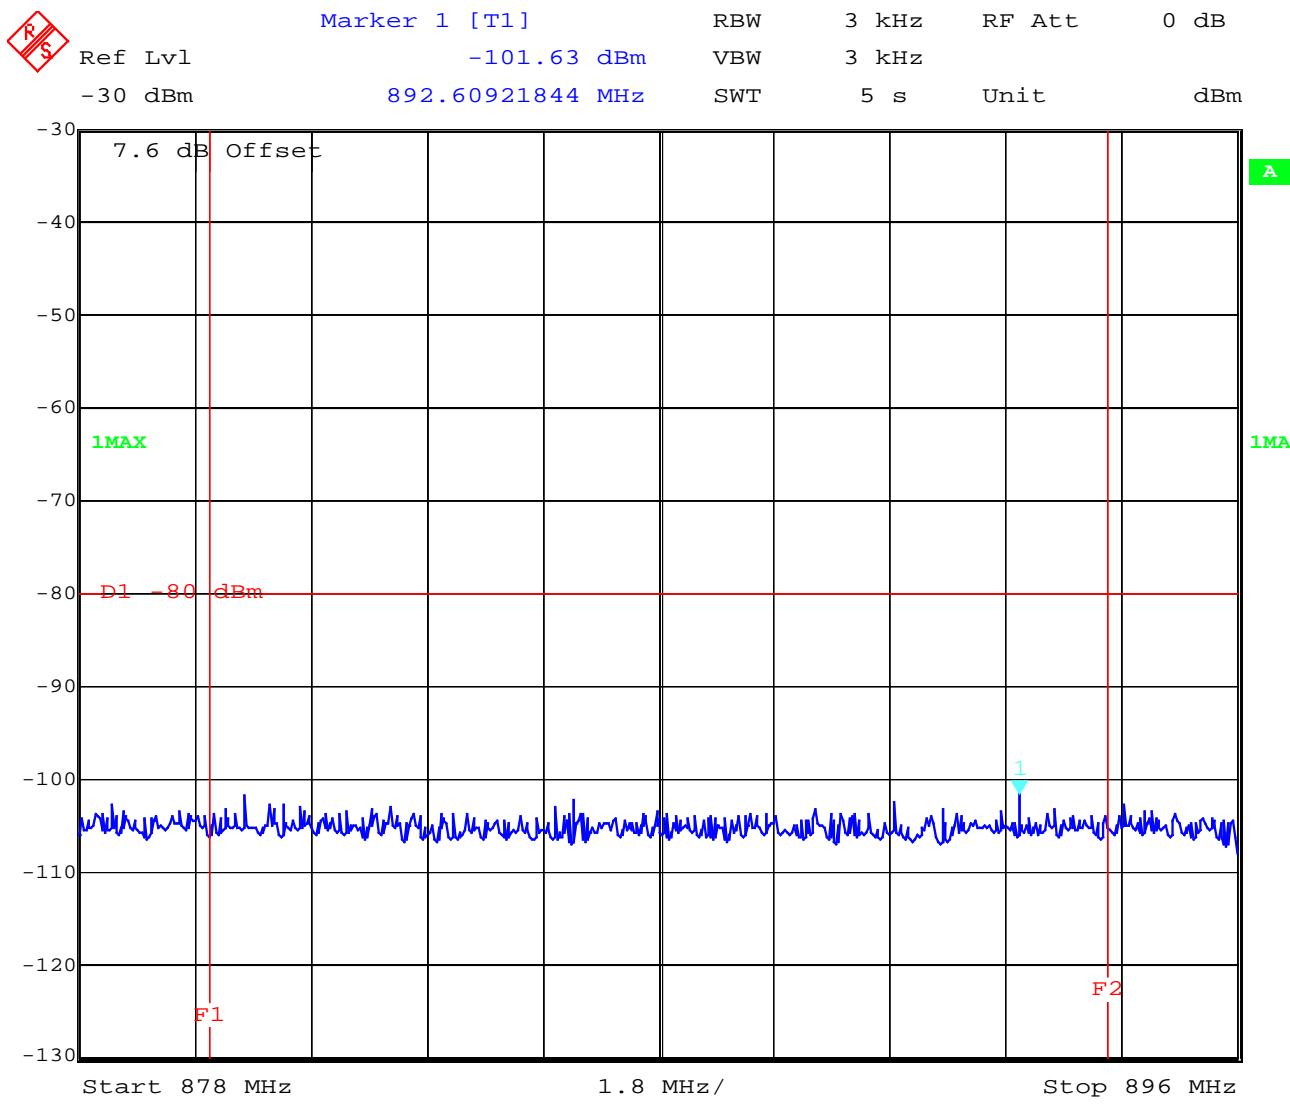
**LIMITS**

**§22.917(f)**

**The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector**

Mobile emissions in the base frequency range

**Idle Mode base station frequency range B**



Date: 6.JUN.2003 08:54:38

**LIMITS**

§22.917(f)

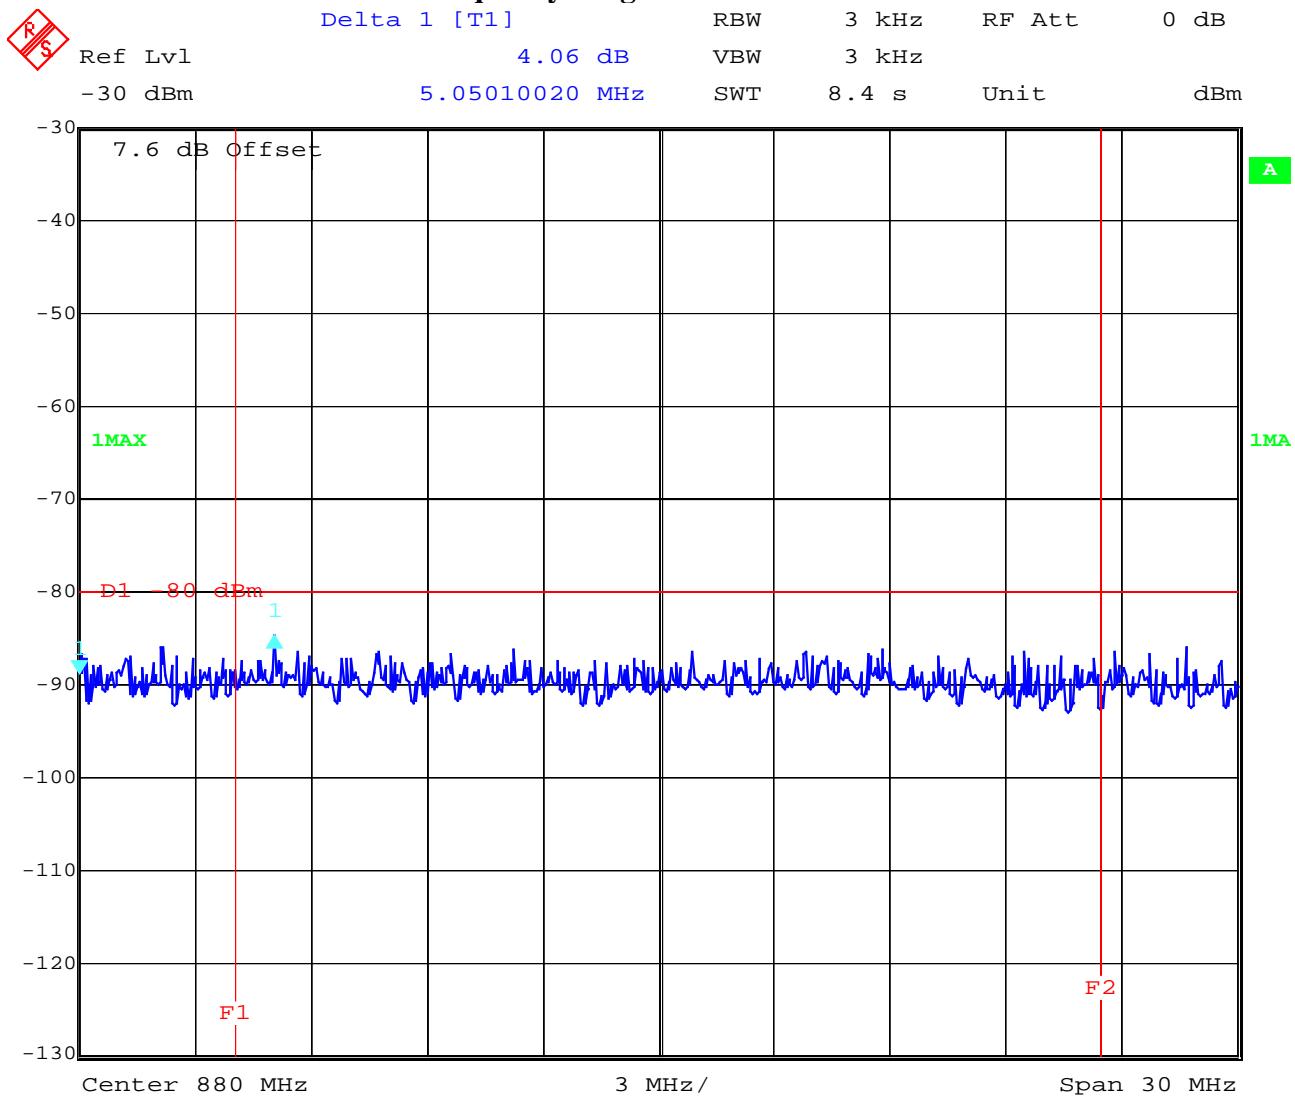
The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

## Mobile emissions in the base frequency range

## **TX Mode CH 128 base station frequency range A**



Date: 6.JUN.2003 08:44:54

## LIMITS

**§22.917(f)**

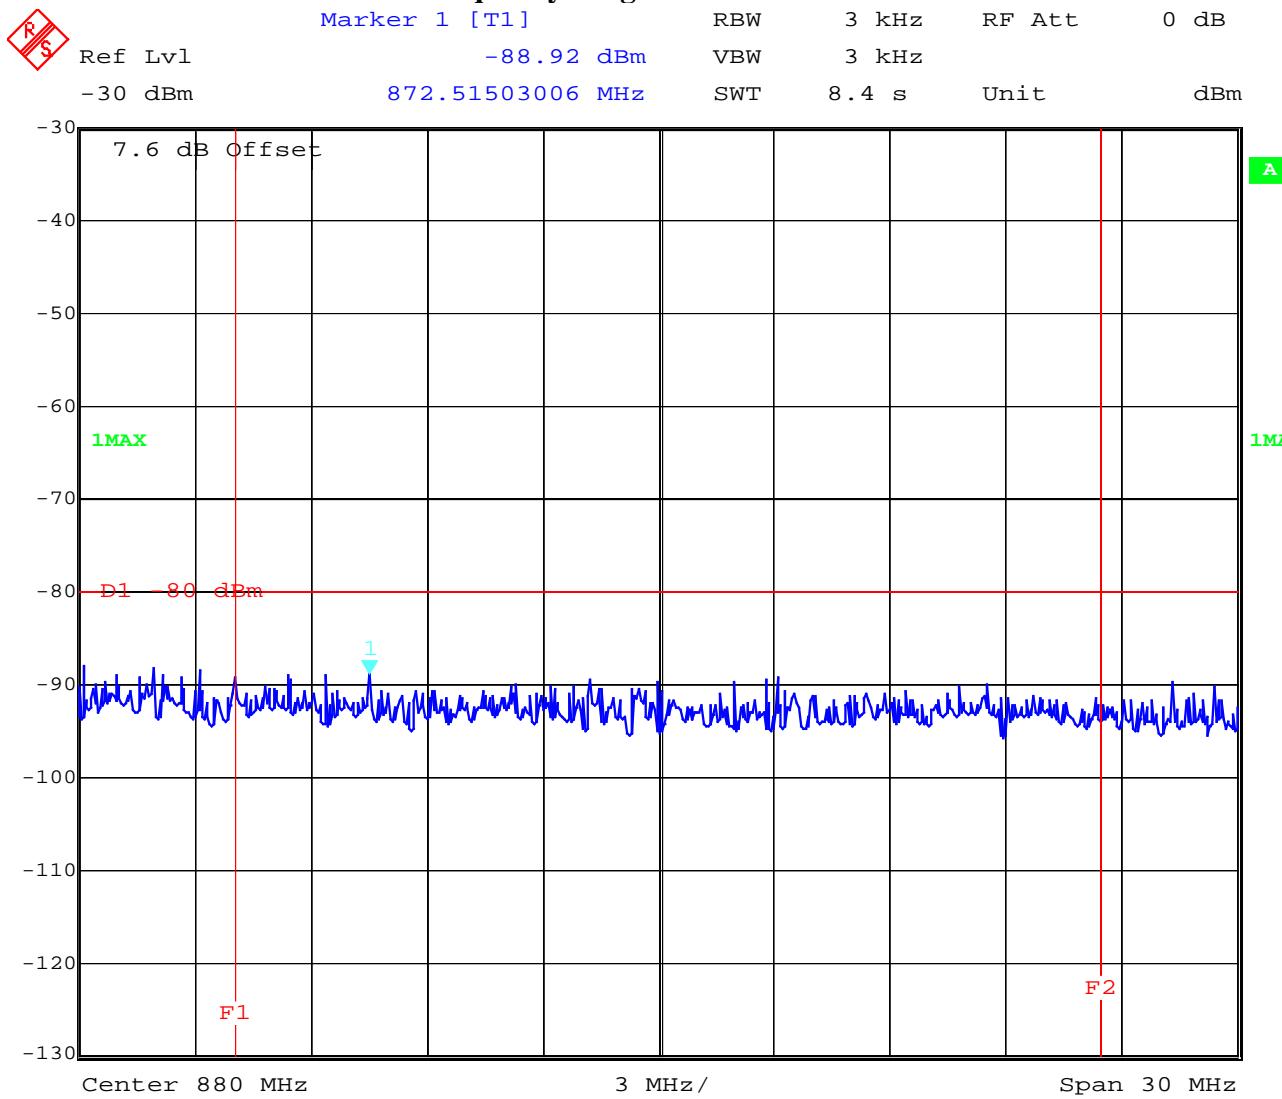
The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed  $-80\text{dBm}$  at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT  
(for reference numbers see test equipment listing)**

Mobile emissions in the base frequency range

**TX Mode CH 189 base station frequency range A**



Date: 6.JUN.2003 08:49:53

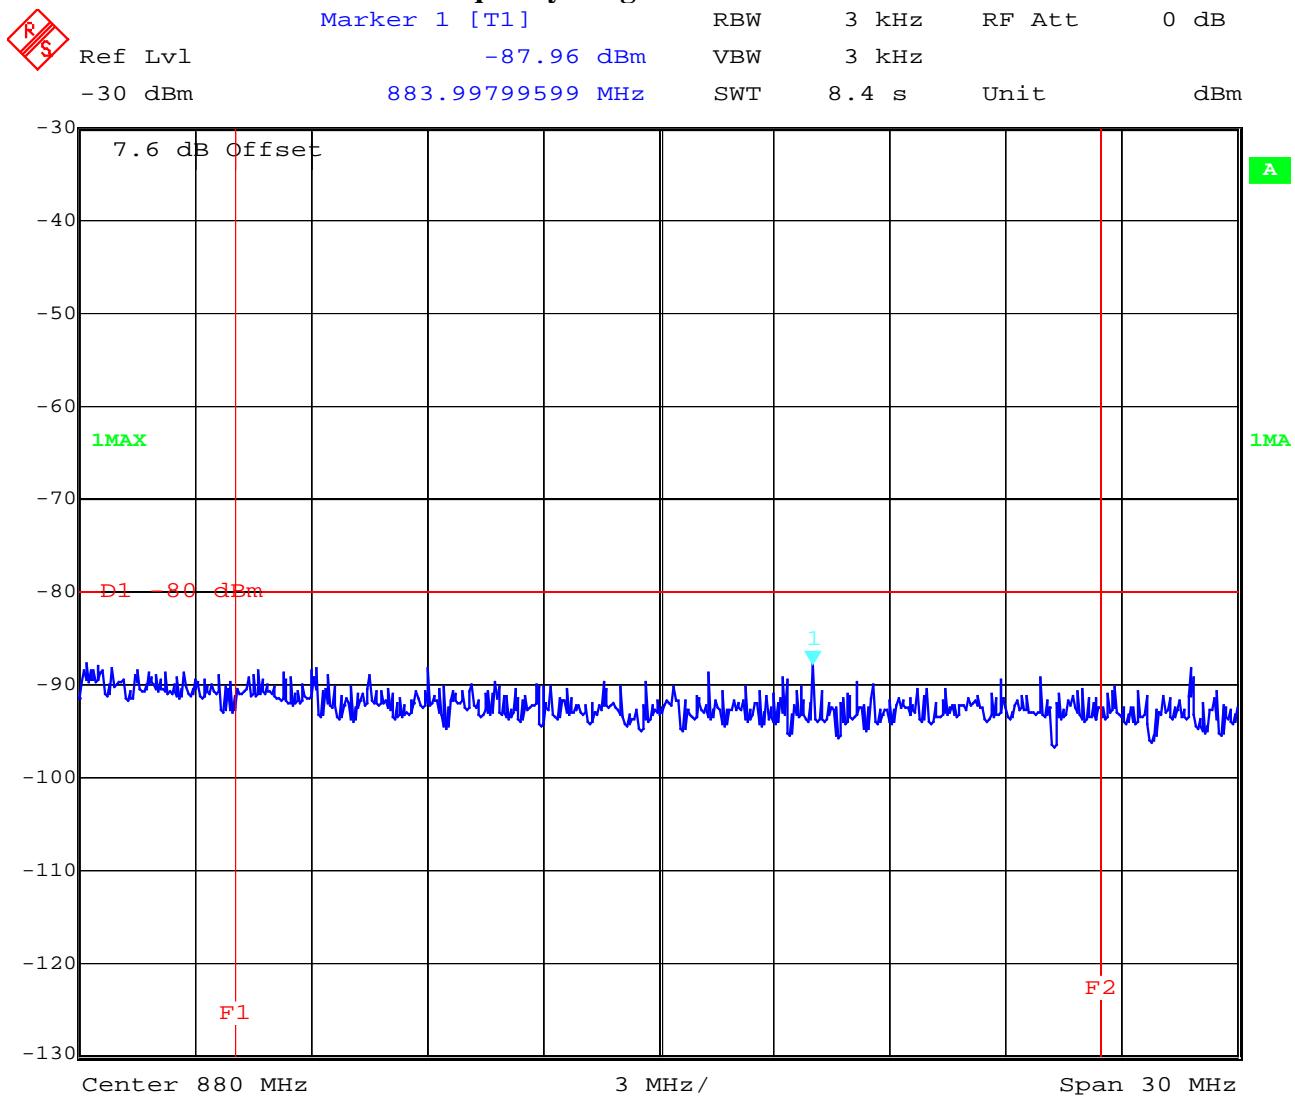
**LIMITS**

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

## Mobile emissions in the base frequency range

## TX Mode CH 251 base station frequency range A



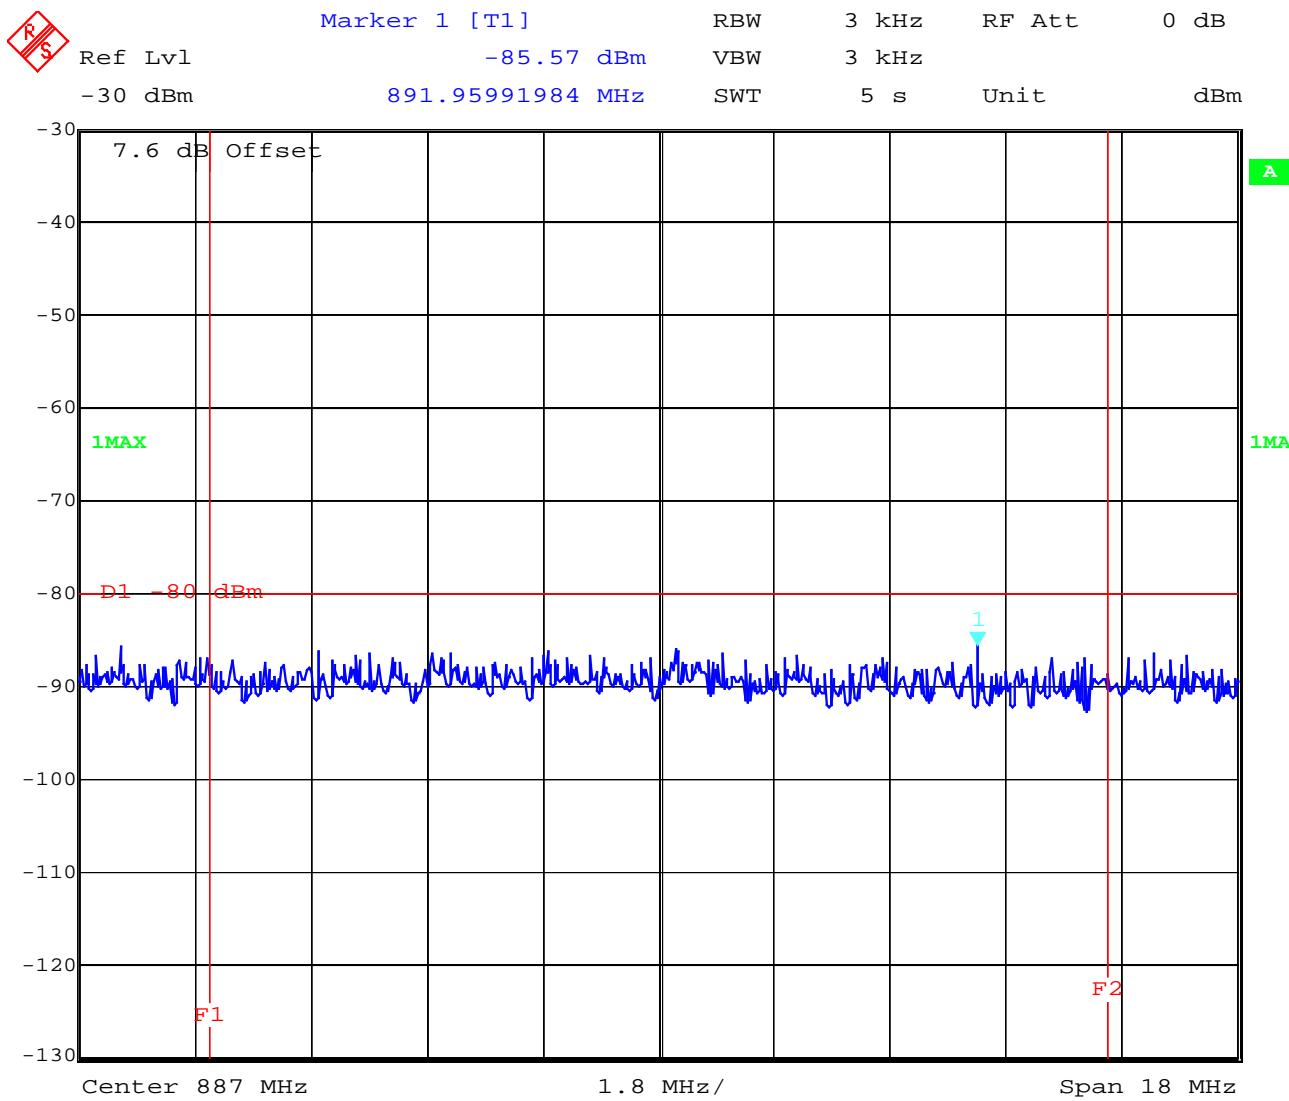
Date: 6.JUN.2003 08:51:28

## LIMITS

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed  $-80\text{dBm}$  at the transmitter antenna connector

Mobile emissions in the base frequency range

**TX Mode CH 128 base station frequency range B**

Date: 6.JUN.2003 08:46:19

§22.917(f)

**LIMITS**

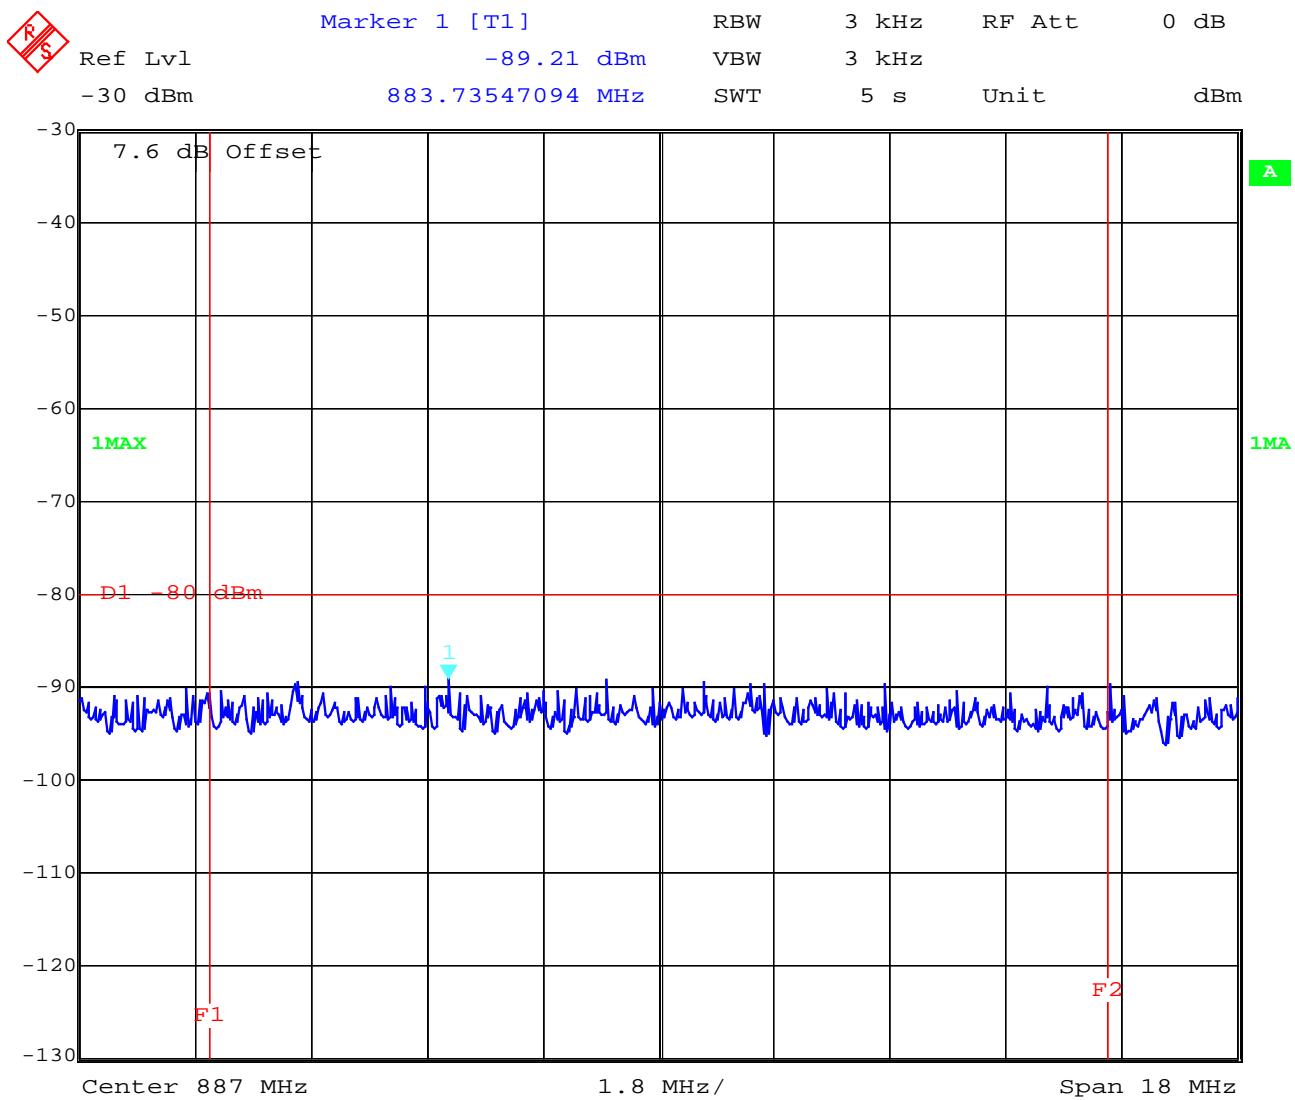
The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

**TX Mode CH 189 base station frequency range B**



Date: 6.JUN.2003 08:48:48

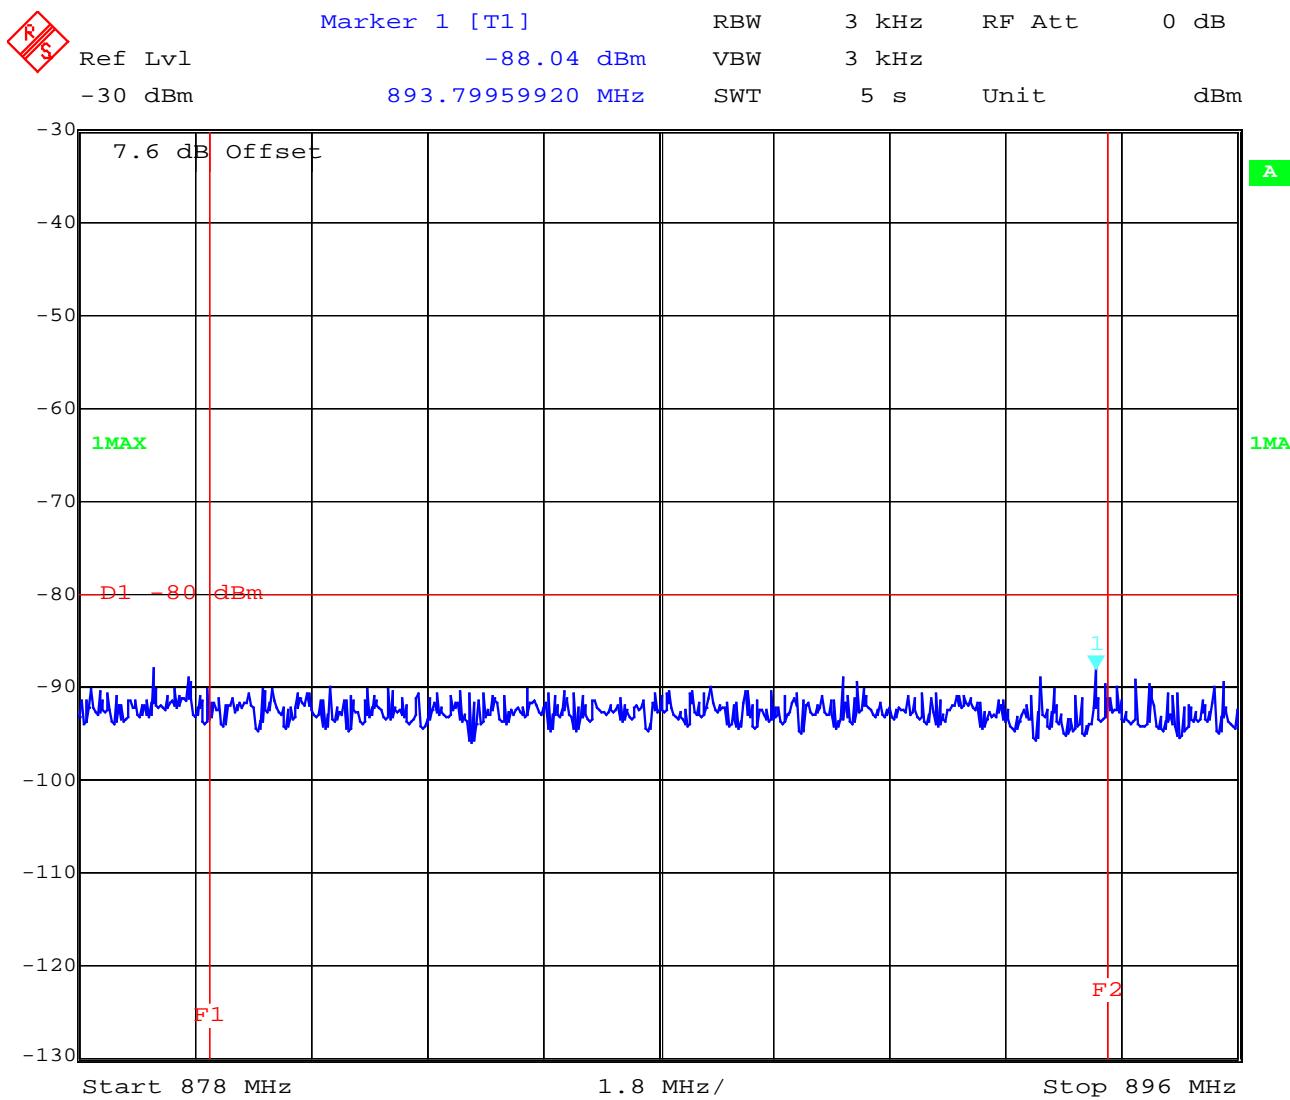
**LIMITS**

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

Mobile emissions in the base frequency range

**TX Mode CH 251 base station frequency range B**



Date: 6.JUN.2003 08:52:21

**LIMITS**

§22.917(f)

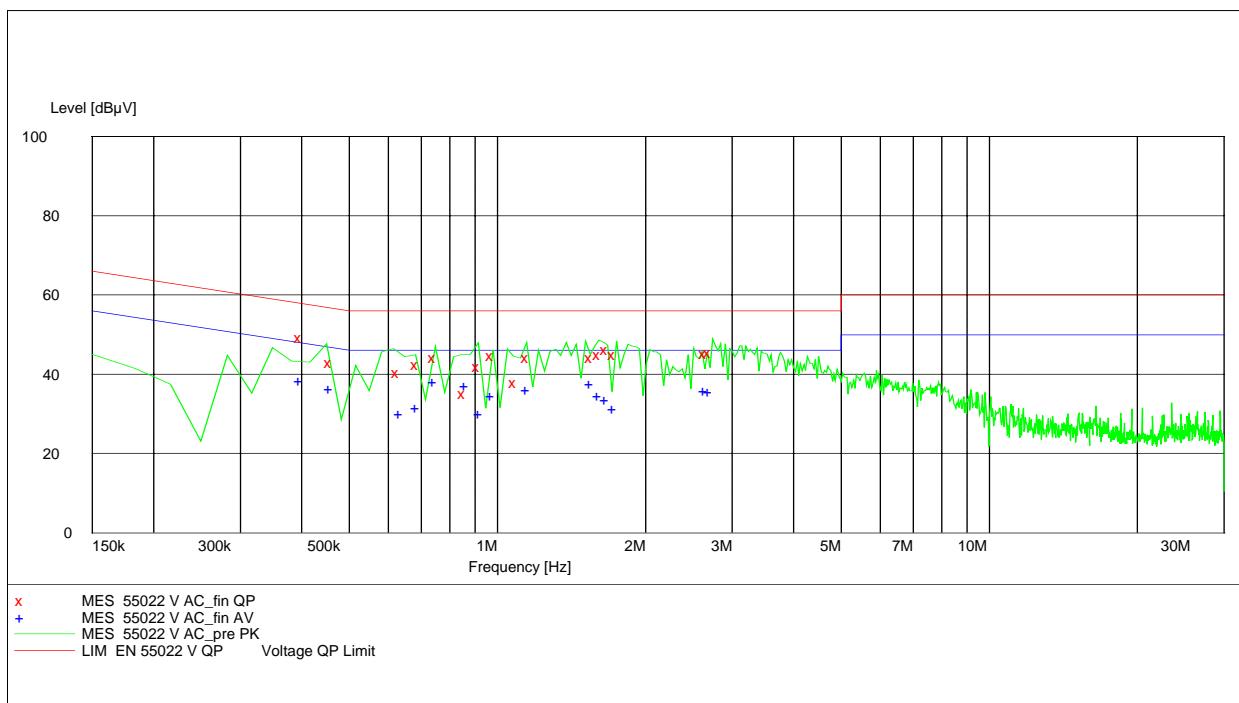
The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**CONDUCTED EMISSIONS****§ 15.107/207****FCC Part 15****CISPR 22**

EUT: AAA-1041011-BV  
Manufacturer: Sony Ericsson Mbile Communications AB  
Operating Condition: With charging unit, idle mode GSM 850  
Test Site: Room 006  
Operator: Berg  
Test Specification: EN 55022  
Comment: 115V / 60 Hz  
Start of Test: 04.06.03 / 08:28:29

**SCANTABELLE: "EN 55022 V"**

Kurzbeschreibung: Voltage Mains 1.60  
Start- Stop- Schritt- Detektor Meß- ZF- Transducer  
Frequenz Frequenz weite zeit Bandbr.  
150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458

**Measured with Charger 4020073-BV**

**MEASUREMENT RESULT: "55022 V AC\_fin QP"**

04.06.03 08:59

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.405000	40.40	10.6	58	17.4	L1	FLO
0.412500	38.30	10.6	58	19.3	L1	FLO
0.645000	40.80	10.4	56	15.2	N	FLO
0.697500	36.60	10.4	56	19.4	N	FLO
0.937500	44.80	10.4	56	11.2	N	FLO
0.997500	38.10	10.4	56	17.9	N	FLO
1.170000	46.40	10.3	56	9.6	N	FLO
1.230000	46.50	10.3	56	9.5	N	FLO
1.402500	40.10	10.3	56	15.9	N	GND
1.455000	38.50	10.3	56	17.5	N	GND
1.695000	42.10	10.4	56	13.9	N	FLO
1.755000	40.10	10.4	56	15.9	N	FLO
3.150000	39.60	10.5	56	16.4	N	GND
3.210000	41.50	10.5	56	14.5	N	GND

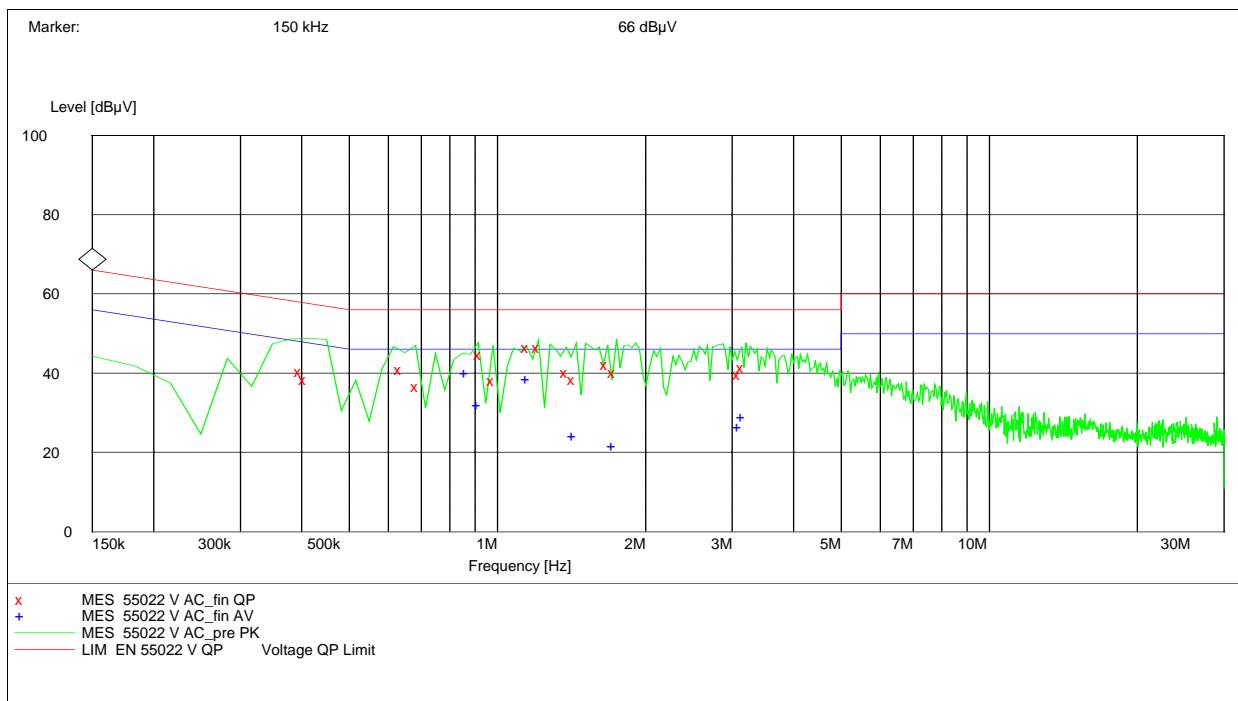
**MEASUREMENT RESULT: "55022 V AC\_fin AV"**

04.06.03 08:59

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.877500	40.20	10.5	46	5.8	N	GND
0.930000	32.00	10.4	46	14.0	N	GND
1.170000	38.70	10.3	46	7.3	N	FLO
1.455000	24.20	10.3	46	21.8	N	GND
1.747500	21.70	10.4	46	24.3	N	FLO
3.150000	26.50	10.5	46	19.5	N	GND
3.210000	29.00	10.5	46	17.0	N	GND

EUT: AAA-1041011-BV  
 Manufacturer: Sony Ericsson Mobile Communications AB  
 Operating Condition: With charging unit, idle mode 1900  
 Test Site: Room 006  
 Operator: Berg  
 Test Specification: EN 55022  
 Comment: 115V / 60 Hz  
 Start of Test: 04.06.03 / 08:53:06

Kurzbeschreibung: Voltage Mains 1.60  
 Start- Stop- Schritt- Detektor Meß- ZF- Transducer  
 Frequenz Frequenz weite zeit Bandbr.  
 150.0 kHz 30.0 MHz 7.5 kHz MaxPeak 100.0 ms 10 kHz ESH3-Z5 L1 1458



**MEASUREMENT RESULT: "55022 V AC\_fin QP"**

04.06.03 08:35

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.405000	49.20	10.6	58	8.6	N	FLO
0.465000	43.00	10.3	57	13.6	N	FLO
0.637500	40.30	10.4	56	15.7	N	FLO
0.697500	42.40	10.4	56	13.6	N	GND
0.757500	44.10	10.4	56	11.9	N	GND
0.870000	35.10	10.5	56	20.9	N	FLO
0.930000	42.00	10.4	56	14.0	N	FLO
0.990000	44.80	10.4	56	11.2	N	FLO
1.102500	38.00	10.3	56	18.0	N	FLO
1.170000	44.20	10.3	56	11.8	N	FLO
1.575000	44.30	10.3	56	11.7	N	GND
1.635000	45.00	10.4	56	11.0	N	GND
1.695000	46.30	10.4	56	9.7	N	FLO
1.755000	44.90	10.4	56	11.1	N	FLO
2.685000	45.30	10.4	56	10.7	N	GND

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

2.745000 45.60 10.4 56 10.4 N GND

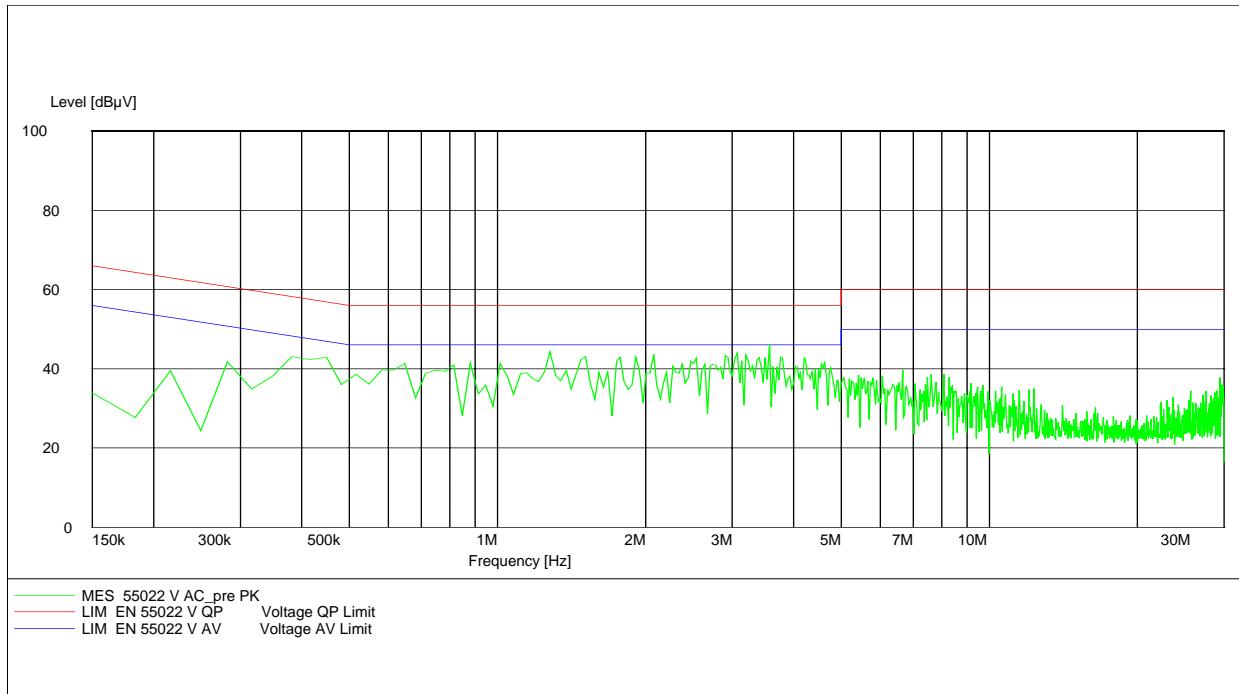
**MEASUREMENT RESULT: "55022 V AC\_fin AV"**

04.06.03 08:35

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.405000	38.30	10.6	48	9.5	N	FLO
0.465000	36.30	10.3	47	10.3	N	FLO
0.645000	30.00	10.4	46	16.0	N	FLO
0.697500	31.70	10.4	46	14.3	N	GND
0.757500	38.20	10.4	46	7.8	N	GND
0.877500	37.10	10.5	46	8.9	N	FLO
0.937500	30.20	10.4	46	15.8	N	FLO
0.990000	34.70	10.4	46	11.3	N	FLO
1.170000	36.10	10.3	46	9.9	N	FLO
1.575000	37.60	10.3	46	8.4	N	GND
1.635000	34.60	10.4	46	11.4	N	GND
1.695000	33.70	10.4	46	12.3	N	FLO
1.755000	31.40	10.4	46	14.6	N	FLO
2.685000	35.80	10.4	46	10.2	N	GND
2.745000	35.50	10.4	46	10.5	N	GND

### Tx-mode

EUT: AAA1041011-BV  
 Manufacturer: Sony Ericsson Mobile Communications AB  
 Operating Condition: With charging unit, traffic mode 850  
 Test Site: Room 006  
 Operator: Berg  
 Test Specification: EN 55022  
 Comment: 115V / 60 Hz  
 Start of Test: 04.06.03 / 08:40:30



### REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

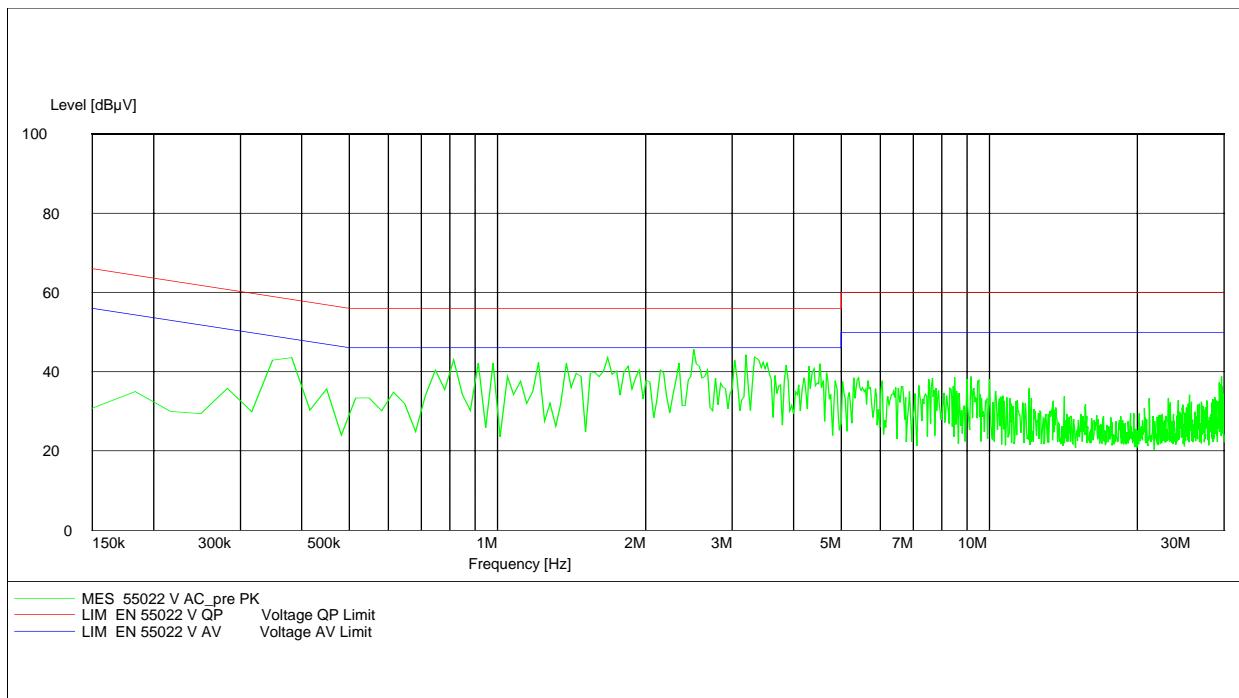
(for reference numbers see test equipment listing)

EUT: AAA-1041011-BV  
Manufacturer: Sona Ericsson Mobile Communications AB  
Operating Condition: With charging unit, traffic mode 1900  
Test Site: Room 006  
Operator: Berg  
Test Specification: EN 55022  
Comment: 115V / 60 Hz  
Start of Test: 04.06.03 / 08:47:58

**SCAN TABLE: "EN 55022 V"**

Kurzbeschreibung: Voltage Mains 1.60

Start- Frequenz	Stop- Frequenz	Schritt- weite	Detektor	Meß- zeit	ZF- Bandbr.	Transducer
150.0 kHz	30.0 MHz	7.5 kHz	MaxPeak	100.0 ms	10 kHz	ESH3-Z5 L1 1458

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED****(for reference numbers see test equipment listing)****52-63**

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

**TEST SETUP**



**Test site**

**Conducted emissions**



**Photographs of the equipment**



**PHOTOGRAPH OF THE EQUIPMENT**



## **PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**



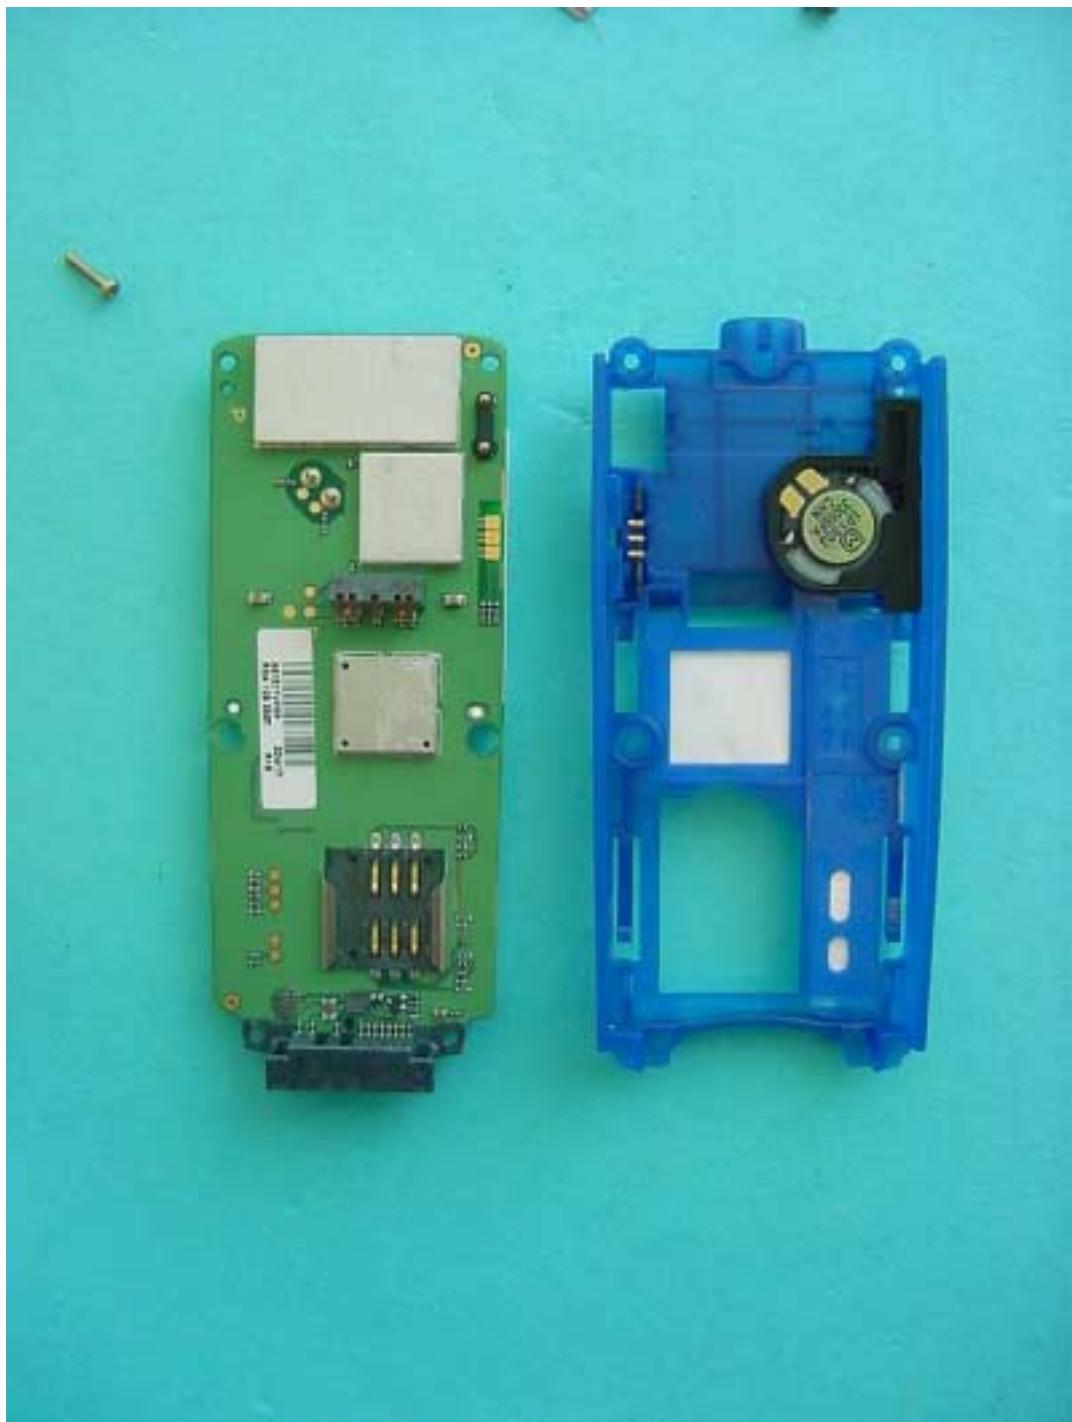
**PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**



**PHOTOGRAPH OF THE EQUIPMENT**

