



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic*

Checked

060202

Company Internal
REPORT

No.

BGGIN06:023

Date

060126

Rev

A

Reference

File

Report issued by Accredited SAR Laboratory

For

PY7A1042021 (J100a)

Date of test: *17 to 20, Jan, 2006*

Laboratory: Sony Ericsson SAR Test Laboratory
Sonericsson Mobile Communications AB
Nya Vattentornet
SE-221 82 LUND, Sweden

Testing Engineer: *Hamid Kami Shirazi*
Kami.shirazi@sonyericsson.com
+46 46232644

Testing Approval *Ramadan Plicanic*
Ramadan.Plicanic@sonyericsson.com
+46 46 19 38 62

Statement of Compliance

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type AAA-1042021-BV; FCC ID: PY7A1042021; IC:4170B-A1042021

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2000). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.

© Sony Ericsson Mobile Communication AB, 2006



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

Checked

No.

BGGIN06:023

Date

060126

Rev

A

Reference

File

1 Table of contents

2 INTRODUCTION.....3

3 DEVICE UNDER TEST.....3

3.1 ANTENNA DESCRIPTION3

3.2 DEVICE DESCRIPTION3

4 TEST EQUIPMENT.....4

4.1 DOSIMETRIC SYSTEM.....4

4.2 ADDITIONAL EQUIPMENT4

5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID4

6 SYSTEM ACCURACY VERIFICATION.....5

7 SAR MEASUREMENT UNCERTAINTY6

8 TEST RESULTS7

9 REFERENCES.....8

10 APPENDIX9

10.1 PHOTOGRAPHS OF THE DEVICE UNDER TEST9

10.2 DEVICE POSITION ON SAM TWINS PHANTOM11

10.3 ATTACHMENTS.....12



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

Rev

Reference

060126

A

File

2 Introduction

In this test report, compliance of the Sony Ericsson PY7A1042021 (J100a) portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device under Test

3.1 Antenna Description

Type	Internal antenna	
Location	Inside, Back, at the Top	
Dimensions	Max length	38mm
	Max width	16mm
Configuration	PIFA	

3.2 Device description

Device model	PY7A1042021(J100a)					
Serial number	108939932					
Mode	GSM 850			GSM1900		
Crest Factor	8			8		
Multiple Access Scheme	TDMA			TDMA		
Maximum Output Power Setting dBm	Ch128	Ch190	Ch251	Ch512	Ch661	Ch810
	32.3	32.3	32.3	29.4	29.4	29.4
Factory Tolerance in Power Setting	±0.5dB			±0.5dB		
Maximum Peak Output Power dBm	32.8	32.8	32.8	29.9	29.9	29.9
Transmitting Frequency Range(MHz)	824.2-848.8			1850.2 – 1909.8		
Prototype or Production Unit	Preproduction					
Device Category	Portable					
RF exposure environment	General population / uncontrolled					



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

060126

Rev

A

Reference

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1d) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY3 DAE V1	419	March 2006
E-field probe ETDV6	1585	March 2006
Dipole Validation Kit, D835V2	484	March 2007
Dipole Validation Kit, D1900V2	5d002	March 2007

4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator ESG-D4000A	INV 462935	Nov. 2006
Directional coupler HP778D	INV 2903	Jan. 2006
Power meter R&S NRVD	INV 483920	Jan. 2006
Power sensor R&S NRV-Z5	INV 2333	Jan. 2006
Power sensor R&S NRV-Z5	INV 2334	Jan. 2006
Termination 65N50-0-11	INV 2903	Jan. 2006
Network analyzer HP8753C	INV421671	Nov. 2006
S-parameter test set HP85047A	INV 421670	Nov. 2006
Dielectric probe kit HP8507D	INV 200 000 53	Self calibrated
CMU200	INV 74510	Mar. 2006



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

Rev

Reference

060126

A

File

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 software is also given.

Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
850	Head	Measured, 18/Jan./2006	42.3	0.87	1.00
		Recommended	41.5	0.90	1.00
	Body	Measured, 17/Jan./2006	56.9	1.02	1.00
		Recommended	55.2	0.97	1.00
1900	Head	Measured, 19/Jan./2006	38.0	1.47	1.00
		Recommended	40.0	1.40	1.00
	Body	Measured, 20/Jan./2006	51.5	1.56	1.00
		Recommended	53.3	1.52	1.00

6 System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in section 3.1. Measurement made in ambient temperature (22-23) °C and humanity (22-23) %. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.0002mW/g in 1g mass

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g/10g	Dielectric Parameters			Liquid t(°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
850	Head	Measured, 18/Jan./2006	9.15/5.90	42.3	0.87	1.00	22±0.2
		Reference	9.08/5.96	42.2	0.91	1.00	22±0.2
	Body	Measured, 17/Jan./2006	10.1/6.51	56.9	1.02	1.00	22±0.2
		Reference	9.48/6.24	54.9	1.01	1.00	22±0.2
1900	Head	Measured, 19/Jan./2006	40.6/20.6	38.0	1.47	1.00	22±0.2
		Reference	39.2/20.6	39.6	1.45	1.00	22±0.2
	Body	Measured, 20/Jan./2006	40.8/21.0	51.5	1.56	1.00	22±0.2
		Reference	39.6/20.9	51.6	1.58	1.00	22±0.2



Prepared (also subject responsible if other)

No.

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

BGGIN06:023

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

060126

A

File

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson PY7A1042021 (J100a) phone

Uncertainty Component	Uncer. (%)	Prob Dist.	Div.	C _i	GSM 850-Head	GSM 850-Body	GSM 1900-Head	GSM 1900-Body
Measurement System								
Probe Calibration	±4.8	N	1	1	±4.8	±4.8	±4.8	±4.8
Axial Isotropy	±4.7	R	√3	0.7	±1.9	±1.9	±1.9	±1.9
Spherical Isotropy	±9.6	R	√3	0.7	±3.9	±3.9	±3.9	±3.9
Boundary effect	±1.0	R	√3	1	±1.0	±1.0	±1.0	±1.0
Probe linearity	±4.7	R	√3	1	±2.7	±2.7	±2.7	±2.7
Detection limit	±1.0	R	√3	1	±0.6	±0.6	±0.6	±0.6
Readout electronics	±1.0	N	1	1	±1.0	±1.0	±1.0	±1.0
Response time	±0.8	R	√3	1	±0.5	±0.5	±0.5	±0.5
Integration time	±1.4	R	√3	1	±0.8	±0.8	±0.8	±0.8
RF Ambient Conditions	±3.0	R	√3	1	±1.7	±1.7	±1.7	±1.7
Mech. Constraints of robot	±0.4	R	√3	1	±0.2	±0.2	±0.2	±0.2
Probe positioning	±2.9	R	√3	1	±1.7	±1.7	±1.7	±1.7
Extrap, interpolation and integration	±3.9	R	√3	1	±2.3	±2.3	±2.3	±2.3
Measurement System Uncertainty					±8.0	±8.0	±8.0	±8.0
Test Sample Related								
Device positioning	±3.5	N	1	1	±3.5	±3.5	±3.5	±3.5
Device holder uncertainty	±3.5	N	1	1	±3.5	±3.5	±3.5	±3.5
Power drift	-(2.3/1.0/1.0/1.0)	R	√3	1	-1.3	-0.6	-0.6	-0.6
Test Sample Related Uncertainty					±5.1	±5.0	±5.0	±5.0
Phantom and Tissue Parameters								
Phantom uncertainty	±4.0	R	√3	1	±2.3	±2.3	±2.3	±2.3
Liquid conductivity (measurement)	±(3.3/5.0/5.0/2.6)	N	1	0.64	±2.1	±3.2	±3.2	±1.7
Liquid conductivity (target)	±5.0	R	√3	0.64	±1.8	±1.8	±1.8	±1.8
Liquid Permittivity (measurement)	±(1.9/3.1/5.0/3.4)	N	1	0.6	±1.1	±1.9	±3.0	±2.0
Liquid Permittivity (target)	±5.0	R	√3	0.6	±1.7	±1.7	±1.7	±1.7
Phantom and Tissue Parameters Uncertainty					±4.1	±5.3	±5.5	±4.3
Combined standard uncertainty					±10.3	±10.8	±10.9	±10.4
Extended standard uncertainty (k=2)					±20.6	±21.6	±21.8	±20.8



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

Checked

No.

BGGIN06:023

Date

060126

Rev

A

Reference

File

8 Test results

The measured 1-gram and averaged SAR values of the device against the head are provided in Tables 1 and body are provided in Tables 2. The ambient humidity and temperature of test facility were 22%-23% and 22°C–23°C respectively. The depth of the head and body tissue simulating liquid are 15.4cm and 15cm. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two phone position, cheek (touch) and tilt (cheek + 15deg).

For body measurement phone was tested on the antenna (back) and Front to the flat section of phantom with 15mm distance against that. For all modes, the device was tested at the lowest, middle and highest frequencies in the transmit band. For Hand free measurement used Sony Ericsson head set (HPB-60) and measured on worst case speech mode and for body.

Mode	Channel	Power (dB)	Phone Position	Liquid t (°C)	SAR (W/kg)	
					Right-hand	Left-hand
					1g mass	1g mass
1900 GSM Head	512	30.5	Cheek	22±0.2	0.33	0.43
			Tilt	22±0.2	0.39	0.44
	661	29.9	Cheek	22±0.2	0.37	0.49
			Tilt	22±0.2	0.46	0.56
	810	30.4	Cheek	22±0.2	0.36	0.49
			Tilt	22±0.2	0.49	0.60
850 GSM Head	128	33.5	Cheek	22±0.2	0.83	0.77
			Tilt	22±0.2	0.53	0.55
	190	32.8	Cheek	22±0.2	1.26	1.23
			Tilt	22±0.2	0.84	0.82
	251	33.4	Cheek	22±0.2	1.04	0.99
			Tilt	22±0.2	0.68	0.72

Table1: SAR measurement result for Sony Ericsson PY7A1042021 (J100a) telephone at highest possible output power. The phone has measured against the head.

Mode	Channel	Power (dBm)	Phone Position	Liquid t (°C)	SAR (W/kg) in 1 g mass
GSM 1900 Body	512	30.5	Front to phantom	22±0.2	0.10
			Antenna to phantom	22±0.2	0.40
	661	29.9	Front to phantom	22±0.2	0.10
			Antenna to phantom Hand Free	22±0.2	0.47
	810	30.4	Front to phantom	22±0.2	0.13
			Antenna to phantom	22±0.2	0.42
GSM 850 Body	128	33.5	Front to phantom	22±0.2	0.35
			Antenna to phantom hand free	22±0.2	0.93
	190	32.8	Front to phantom	22±0.2	0.53
			Antenna to phantom	22±0.2	0.75
	251	33.4	Front to phantom	22±0.2	0.41
			Antenna to phantom	22±0.2	0.48

Table2: SAR measurement result for Sony Ericsson PY7A1042021 (J100a) telephone at highest possible output power. The phone has measured against the Body.



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

Rev

Reference

060126

A

File

9 References

[1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141

[2] Basic standard for the Measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz-3GHz), European Standard EN 50361, July 2001

[3] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

[4] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-2003, June, 2003.



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

Checked

No.

BGGIN06:023

Date

060126

Rev

A

Reference

File

10 Appendix

10.1 Photographs of the device under test



Front side



Back side



Down Connector



Back side with battery



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

Rev


Reference

060126

A

File

10.2 Device position on SAM Twins Phantom

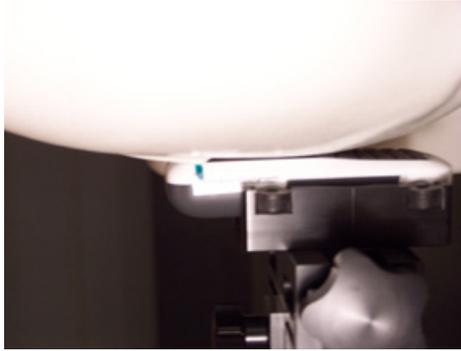

Device position against the head: Cheek (touch) phone position



Device position against the head: Tilt (cheek+15deg) phone position



Device position against the body: Phone on 15mm distance against Phantom



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

Checked

LD/SEMC/BGGI/NM *Ramadan Plicanic* 060202

No.

BGGIN06:023

Date

Rev

Reference

060126

A


File

10.3 Attachment

- Probe & Dipole Calibration
- Measurement plots and system validation
- Annex



PY7A1042021

SAM 3 Phantom; Flat Section; Position: (270°,90°); Frequency: 824 MHz
Probe: ET3DV6 - SNI585; ConvF(6.65,6.65,6.65); Crest factor: 8.3; Muscle 835: $\sigma = 1.02$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.919 mW/g, SAR (10g): 0.627 mW/g, (Worst-case extrapolation)
Coarse: Dx = 10.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.02 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 824.2.6MHz(ch128),Back Phone + 15mm
distance from flat section of phantom, meas. Power=32,8dBm, Nom.Power=32.8dBm;ambien
temperature 22(c-degree)and humidity 22%;. Date:060116

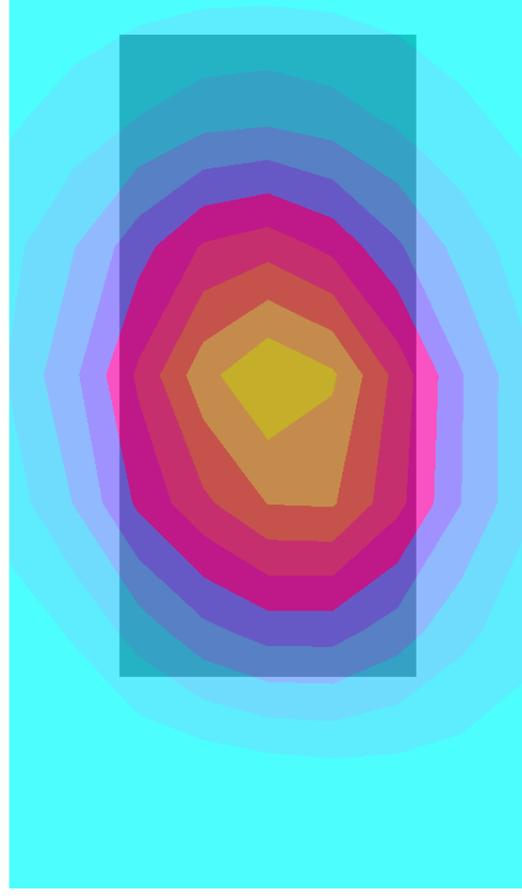


PY7A1042021

SAM 4 Phantom; Righ Hand Section; Position: (108°,301°); Frequency: 1910 MHz
Probe: ET3DV6 - SNI585; ConvF(5.03,5.03,5.03); Crest factor: 8.3; Head 1900MHz: $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.489 mW/g, SAR (10g): 0.258 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.03 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1910MHz(ch810),Right
Hand Side,Tilt(108°) Phone Position, meas. Power=29.9dBm, Nom.Power=29.9dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:051219

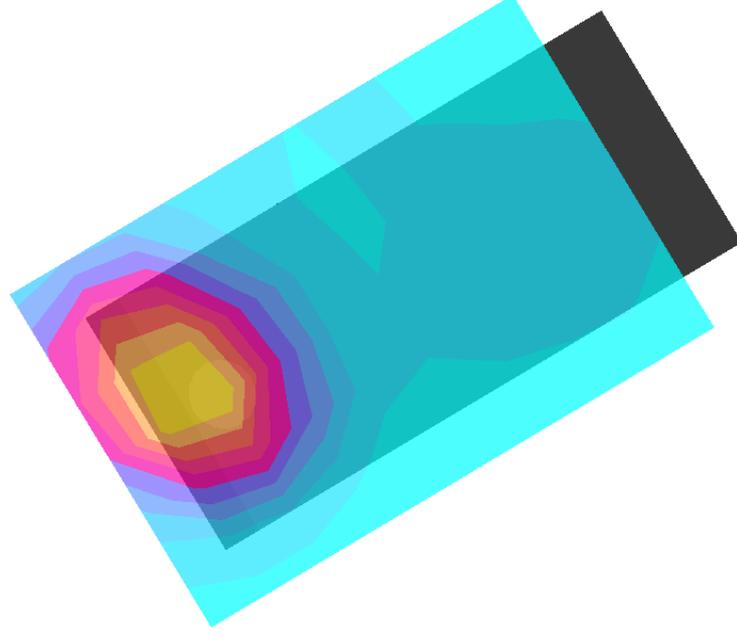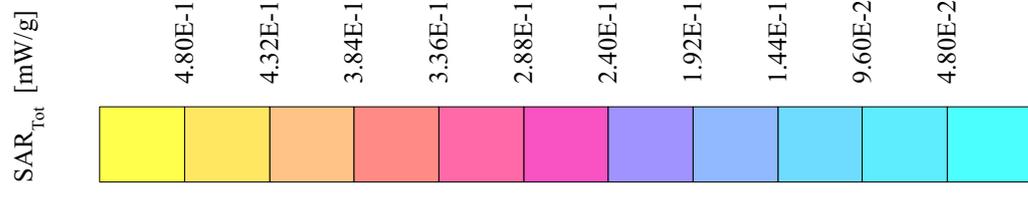


PY7A1042021

SAM 4 Phantom; Righ Hand Section; Position: (93°,301°); Frequency: 1910 MHz
Probe: ET3DV6 - SNI585; ConvF(5.03,5.03,5.03); Crest factor: 8.3; Head 1900MHz: $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.361 mW/g, SAR (10g): 0.195 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.03 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1910MHz(ch810),Right
Hand Side,Cheek(93°) Phone Position, meas. Power=29.9dBm, Nom.Power=29.9dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:051219

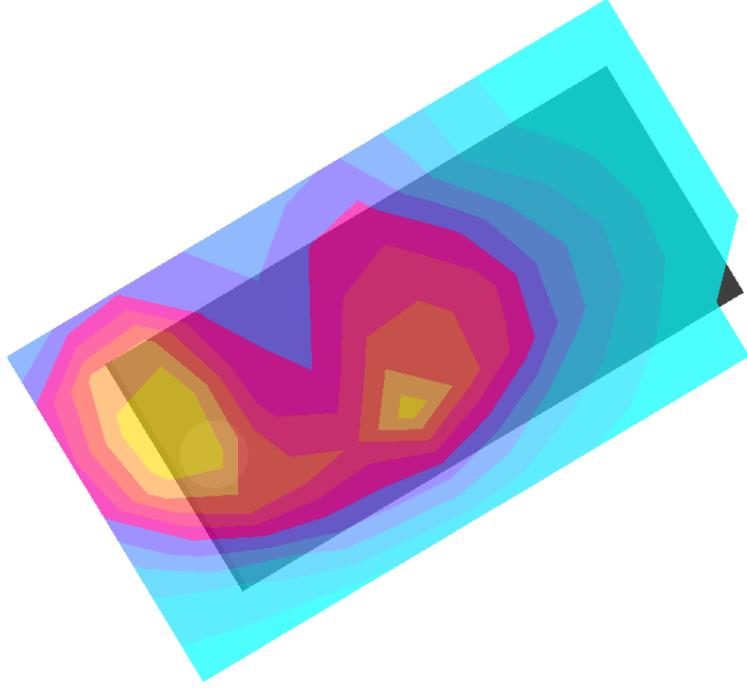


PY7A1042021

SAM 4 Phantom; Left Hand Section; Position: (108°,59°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.3; Head 1900MHz: $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.604 mW/g, SAR (10g): 0.309 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.04 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1910MHz(ch810),Left
Hand Side,Tilt(108°) Phone Position, meas. Power=29.9dBm, Nom.Power=29.9dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:051219

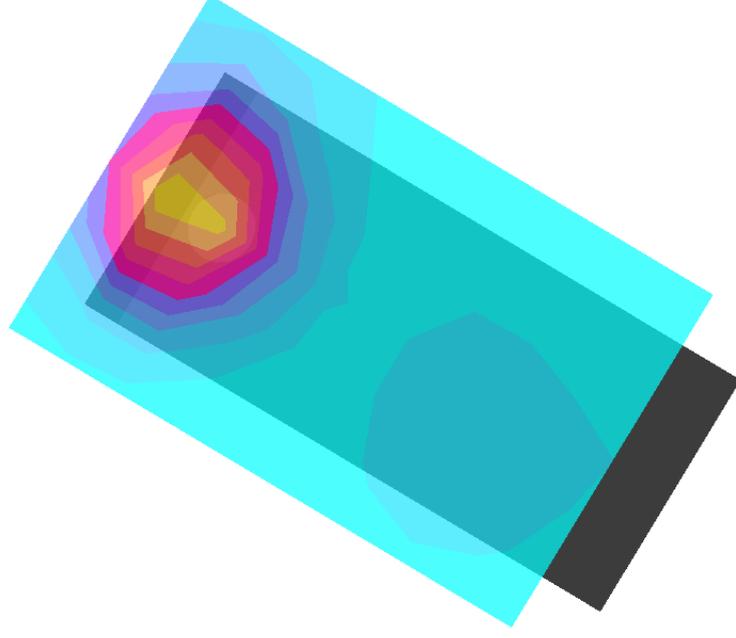


PY7A1042021

SAM 4 Phantom; Left Hand Section; Position: (93°,59°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.3; Head 1900MHz: $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.487 mW/g, SAR (10g): 0.256 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.01 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1910MHz(ch810),Left
Hand Side,Cheek(93°) Phone Position, meas. Power=29.9dBm, Nom.Power=29.9dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:051219

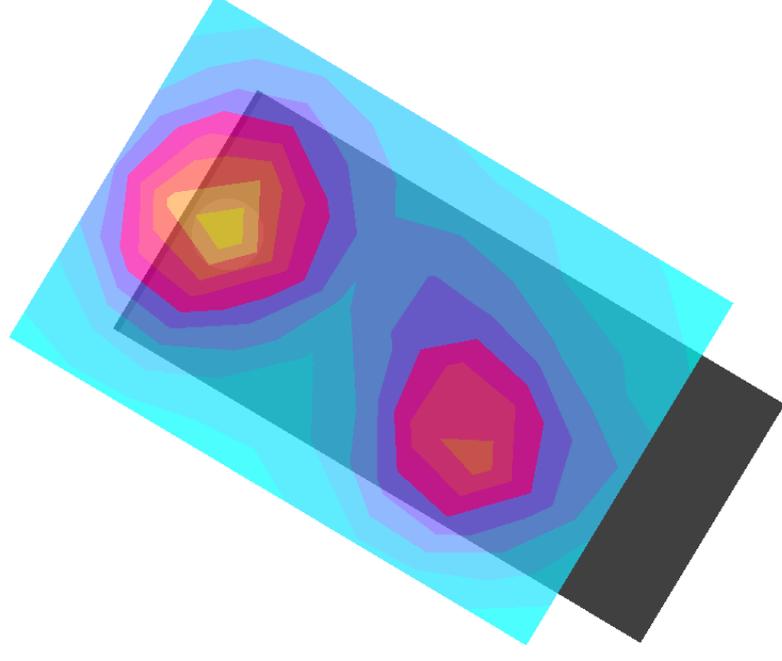



PY7A1042021

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1910 MHz
Probe: ET3DV6 - SNI585; ConvF(4.62,4.62,4.62); Crest factor: 8.3; Muscle 1900: $\sigma = 1.56 \text{ mho/m}$ $\epsilon_r = 51.5$ $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.128 mW/g, SAR (10g): 0.0762 mW/g, (Worst-case extrapolation)
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.11 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1910MHz(ch810), Front Phone + 15mm
distance from flat section of phantom, meas. Power=29.9dBm, Nom.Power=29.9dBm;ambien
temperature 22(c-degree)and humidity 22%;. Date:060120

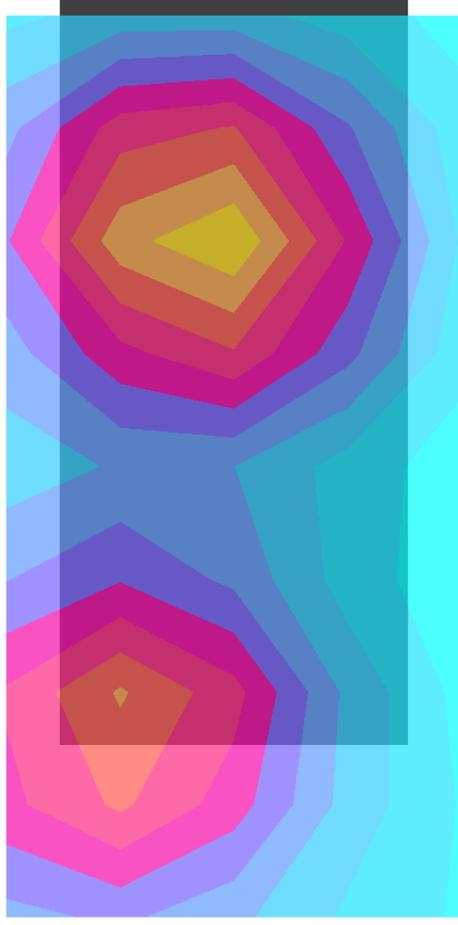



PY7A1042021

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz
Probe: ET3DV6 - SNI585; ConvF(4.62,4.62,4.62); Crest factor: 8.3; Muscle 1900: $\sigma = 1.56 \text{ mho/m}$, $\epsilon_r = 51.5$, $\rho = 1.00 \text{ g/cm}^3$
Cube 5x5x7: SAR (1g): 0.445 mW/g, SAR (10g): 0.241 mW/g, (Worst-case extrapolation)
Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0
Powerdrift: -0.05 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 1880MHz(ch661),Back Phone + 15mm
distance from flat section of phantom, meas. Power=29.9dBm, Nom.Power=29.9dBm;ambien
temperature 22(c-degree)and humidity 22%.; Hand Free Measurement HPB-60 Date:060120

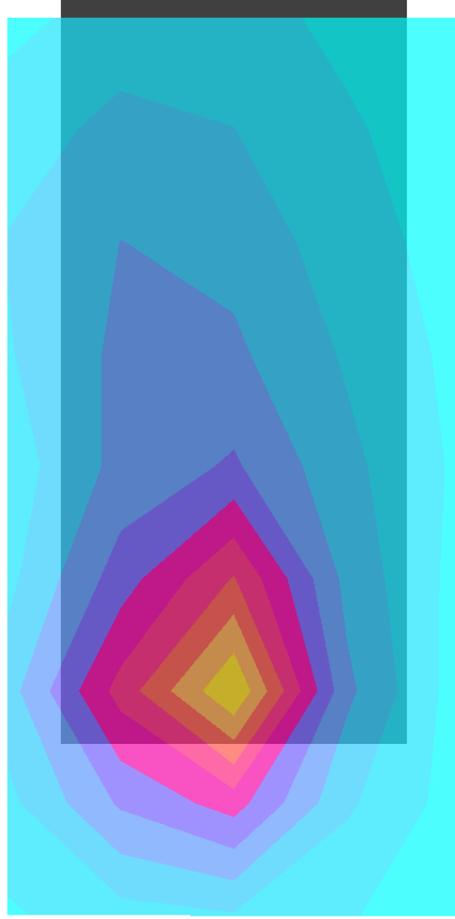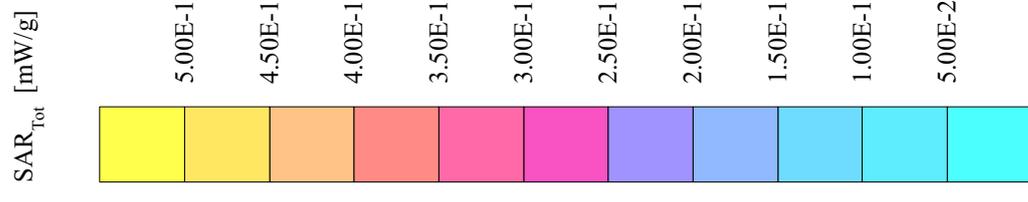


PY7A1042021

SAM 3 Phantom; Flat Section; Position: (270°,90°); Frequency: 849 MHz
Probe: ET3DV6 - SNI585; ConvF(6.65,6.65,6.65); Crest factor: 8.3; Muscle 835: $\sigma = 1.02$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.412 mW/g, SAR (10g): 0.287 mW/g, (Worst-case extrapolation)
Coarse: Dx = 10.0, Dy = 20.0, Dz = 10.0
Powerdrift: -0.02 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 848.6MHz(ch251),Front Phone + 15mm
distance from flat section of phantom, meas. Power=32,8dBm, Nom.Power=32.8dBm;ambien
temprature 22(c-degree)and humidity 22%;. Date:060117

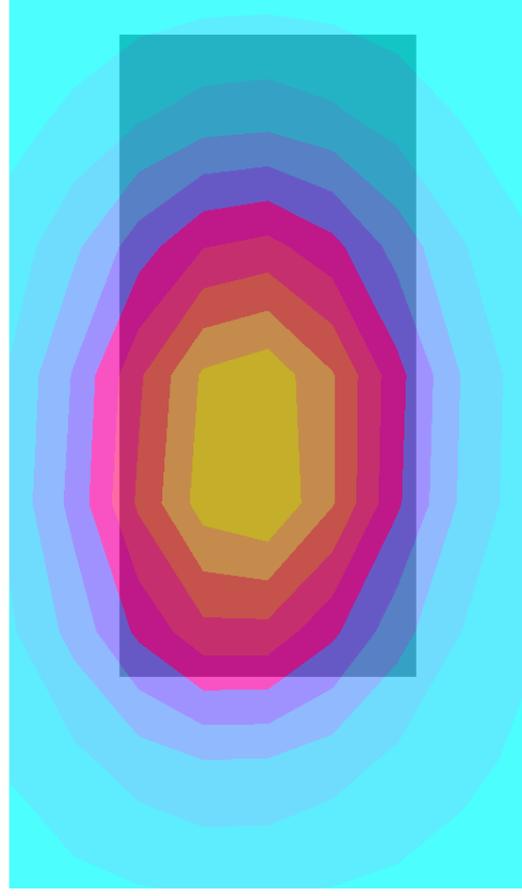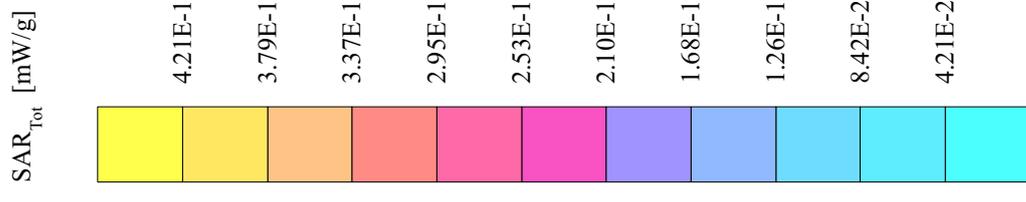



PY7A1042021

SAM 3 Phantom; Righ Hand Section; Position: (108°,301°); Frequency: 837 MHz
Probe: ET3DV6 - SNI585; ConvF(6.95,6.95,6.95); Crest factor: 8.3; Head 835-900MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.843 mW/g, SAR (10g): 0.563 mW/g, (Worst-case extrapolation)
Coarse: Dx = 12.0, Dy = 12.0, Dz = 12.0
Powerdrift: 0.03 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 836.6MHz(ch190),Right
Hand Side, Tilt(108°) Phone Position, meas. Power=32.8dBm, Nom.Power=32.8dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:060118

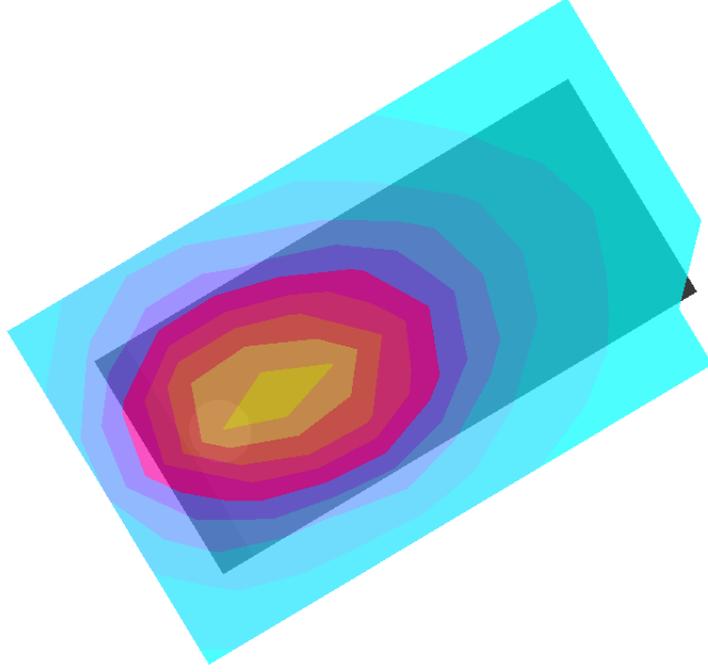


PY7A1042021

SAM 3 Phantom; Left Hand Section; Position: (108°,59°); Frequency: 837 MHz
Probe: ET3DV6 - S/N1585; ConvF(6.95,6.95,6.95); Crest factor: 8.3; Head 835-900MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.824 mW/g, SAR (10g): 0.538 mW/g, (Worst-case extrapolation)
Coarse: Dx = 12.0, Dy = 10.0, Dz = 10.0
Powerdrift: 0.00 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 836.6MHz(ch190),Left
Hand Side, Tilt(108°) Phone Position, meas. Power=32.8dBm, Nom.Power=32.8dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:060118

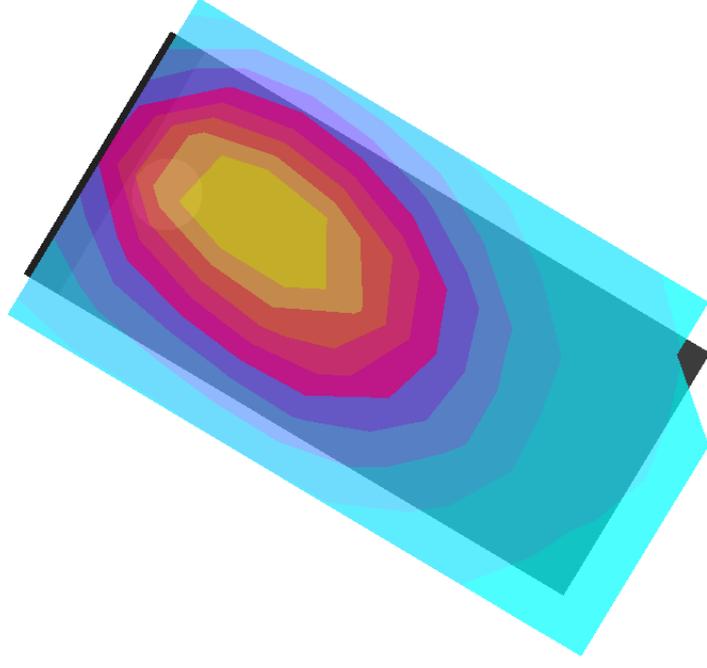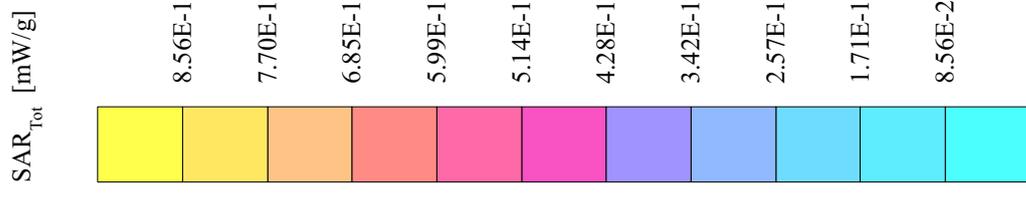



PY7A1042021

SAM 3 Phantom; Left Hand Section; Position: (93°,59°); Frequency: 837 MHz
Probe: ET3DV6 - SNI585; ConvF(6.95,6.95,6.95); Crest factor: 8.3; Head 835-900MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.23 mW/g, SAR (10g): 0.810 mW/g, (Worst-case extrapolation)
Coarse: Dx = 12.0, Dy = 10.0, Dz = 10.0
Powerdrift: -0.01 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 836.6MHz(ch190),Left
Hand Side,Cheek(93°) Phone Position, meas. Power=32.8dBm, Nom.Power=32.8dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:060118

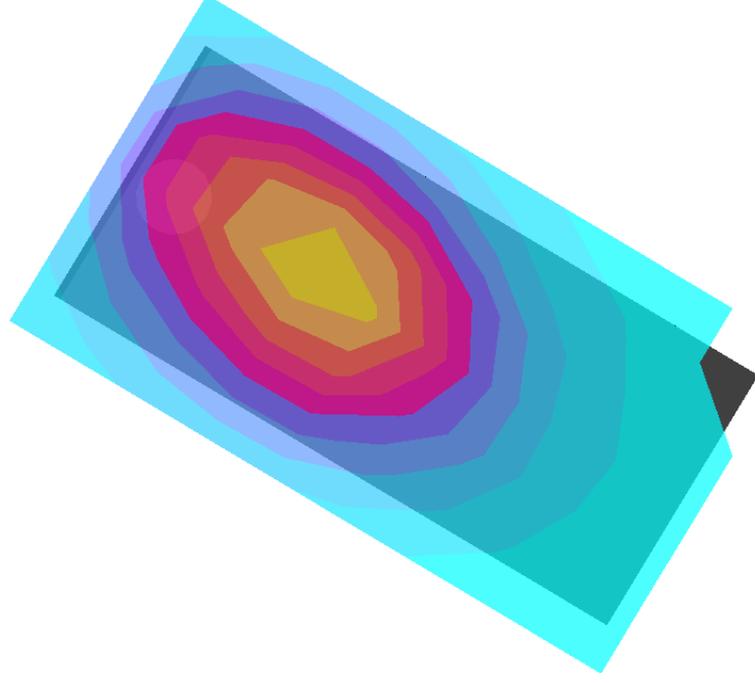


PY7A1042021

SAM 3 Phantom; Righ Hand Section; Position: (93°,301°); Frequency: 837 MHz
Probe: ET3DV6 - SNI585; ConvF(6.95,6.95,6.95); Crest factor: 8.3; Head 835-900MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 1.26 mW/g, SAR (10g): 0.847 mW/g, (Worst-case extrapolation)
Coarse: Dx = 12.0, Dy = 12.0, Dz = 12.0
Powerdrift: -0.10 dB
Lisa;PY7A1042021;S/N:108939932/05w52,EP3.1,Frequency 836.6MHz(ch190),Right
Hand Side,Cheek(93°) Phone Position, meas. Power=32.8dBm, Nom.Power=32.8dBm;
ambien temprature 22(c-degree)and humidity 22%,Date:060118

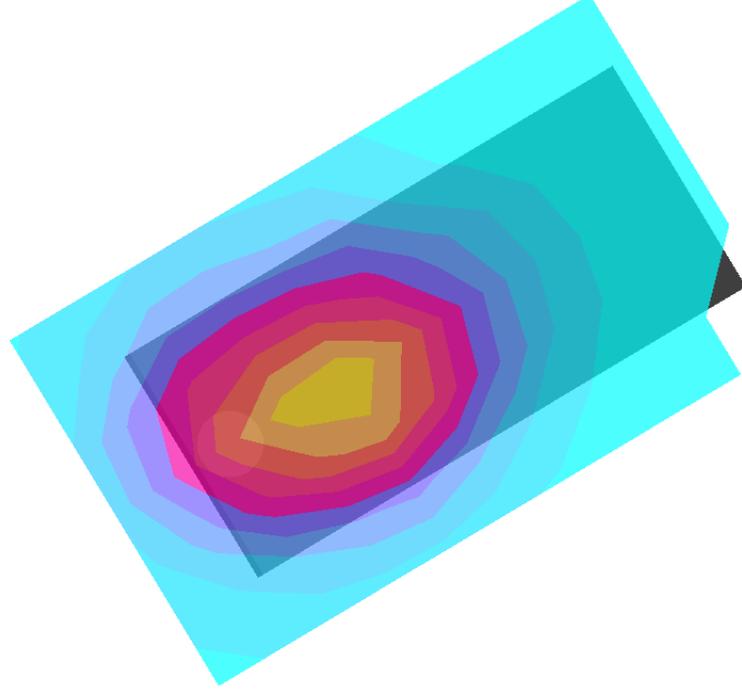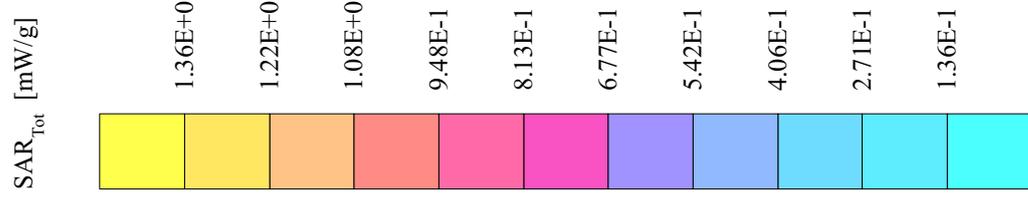

PY7A1042021

SAM 4 Phantom; Left Hand Section; Position: (93°, 59°); Frequency: 1850 MHz
Probe: ET3DV6 - SNI585; ConvF(5.03,5.03,5.03); Crest factor: 8.3; Head 1900MHz: $\sigma = 1.47$ mho/m $\epsilon_r = 38.0$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.430 mW/g, SAR (10g): 0.228 mW/g, SAR (Worst-case extrapolation)
Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

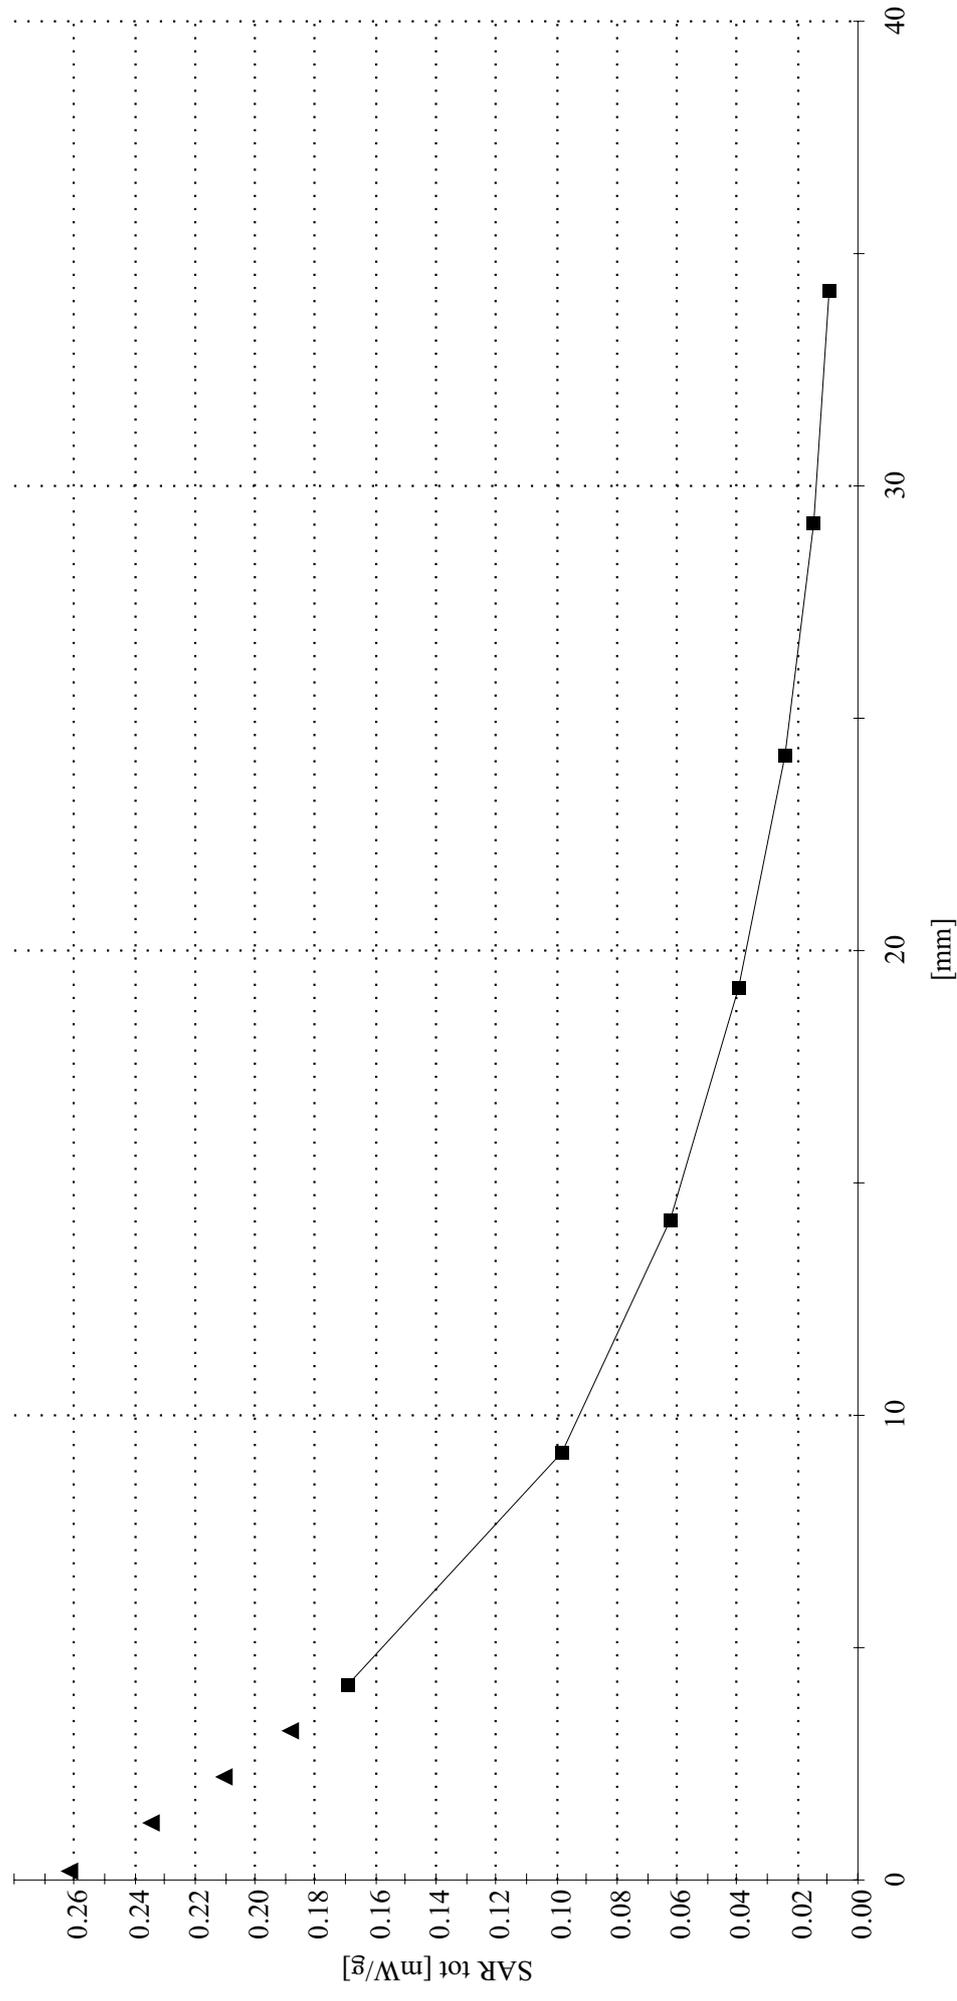


PY7A1042021

SAM 4 Phantom; Flat Section; Position: (270°, 90°); Frequency: 1910 MHz

Probe: ET3DV6 - SNI585; ConvF(4.62,4.62,4.62); Crest factor: 8.3; Muscle 1900: $\sigma = 1.56$ mho/m $\epsilon_r = 51.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.397 mW/g, SAR (10g): 0.223 mW/g, SAR (10g): 0.223 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

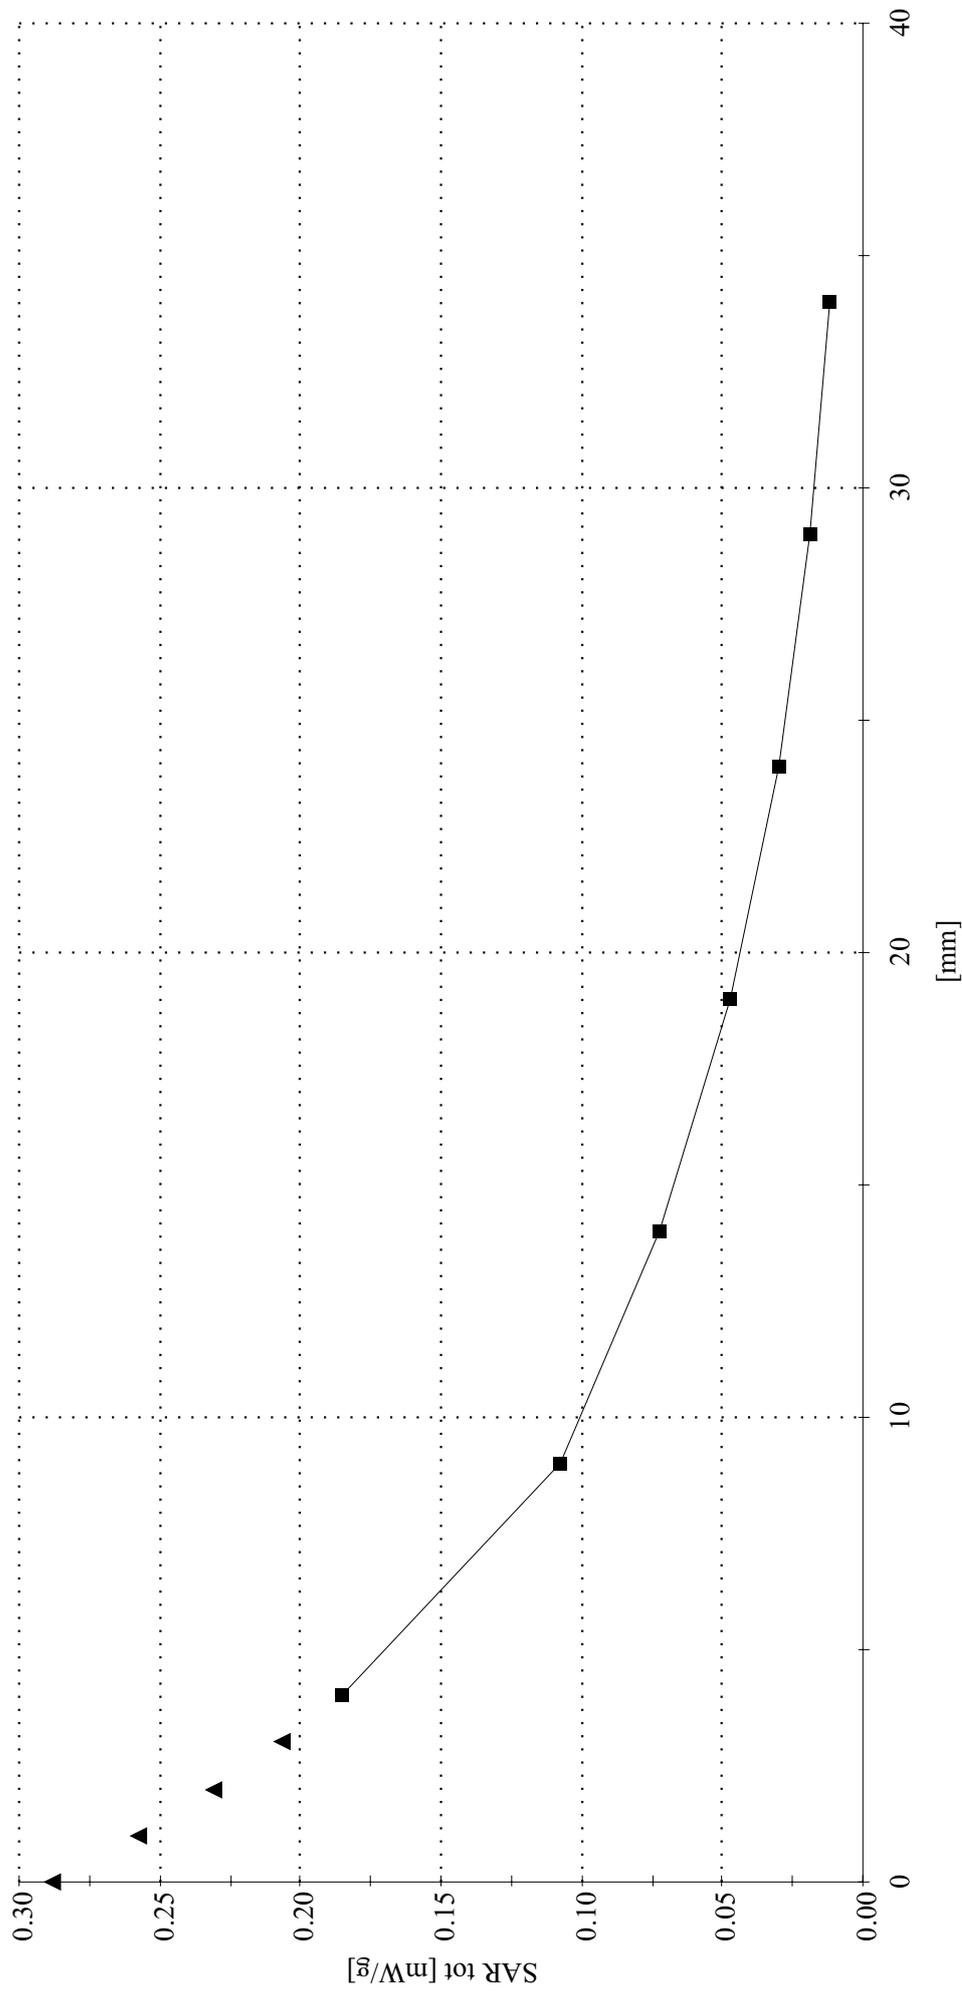


PY7A1042021

SAM 3 Phantom; Flat Section; Position: (270°,90°); Frequency: 824 MHz

Probe: ET3DV6 - SNI585; ConvF(6.65,6.65,6.65); Crest factor: 8.3; Muscle 835: $\sigma = 1.02$ mho/m $\epsilon_r = 56.9$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 0.420 mW/g, SAR (10g): 0.288 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

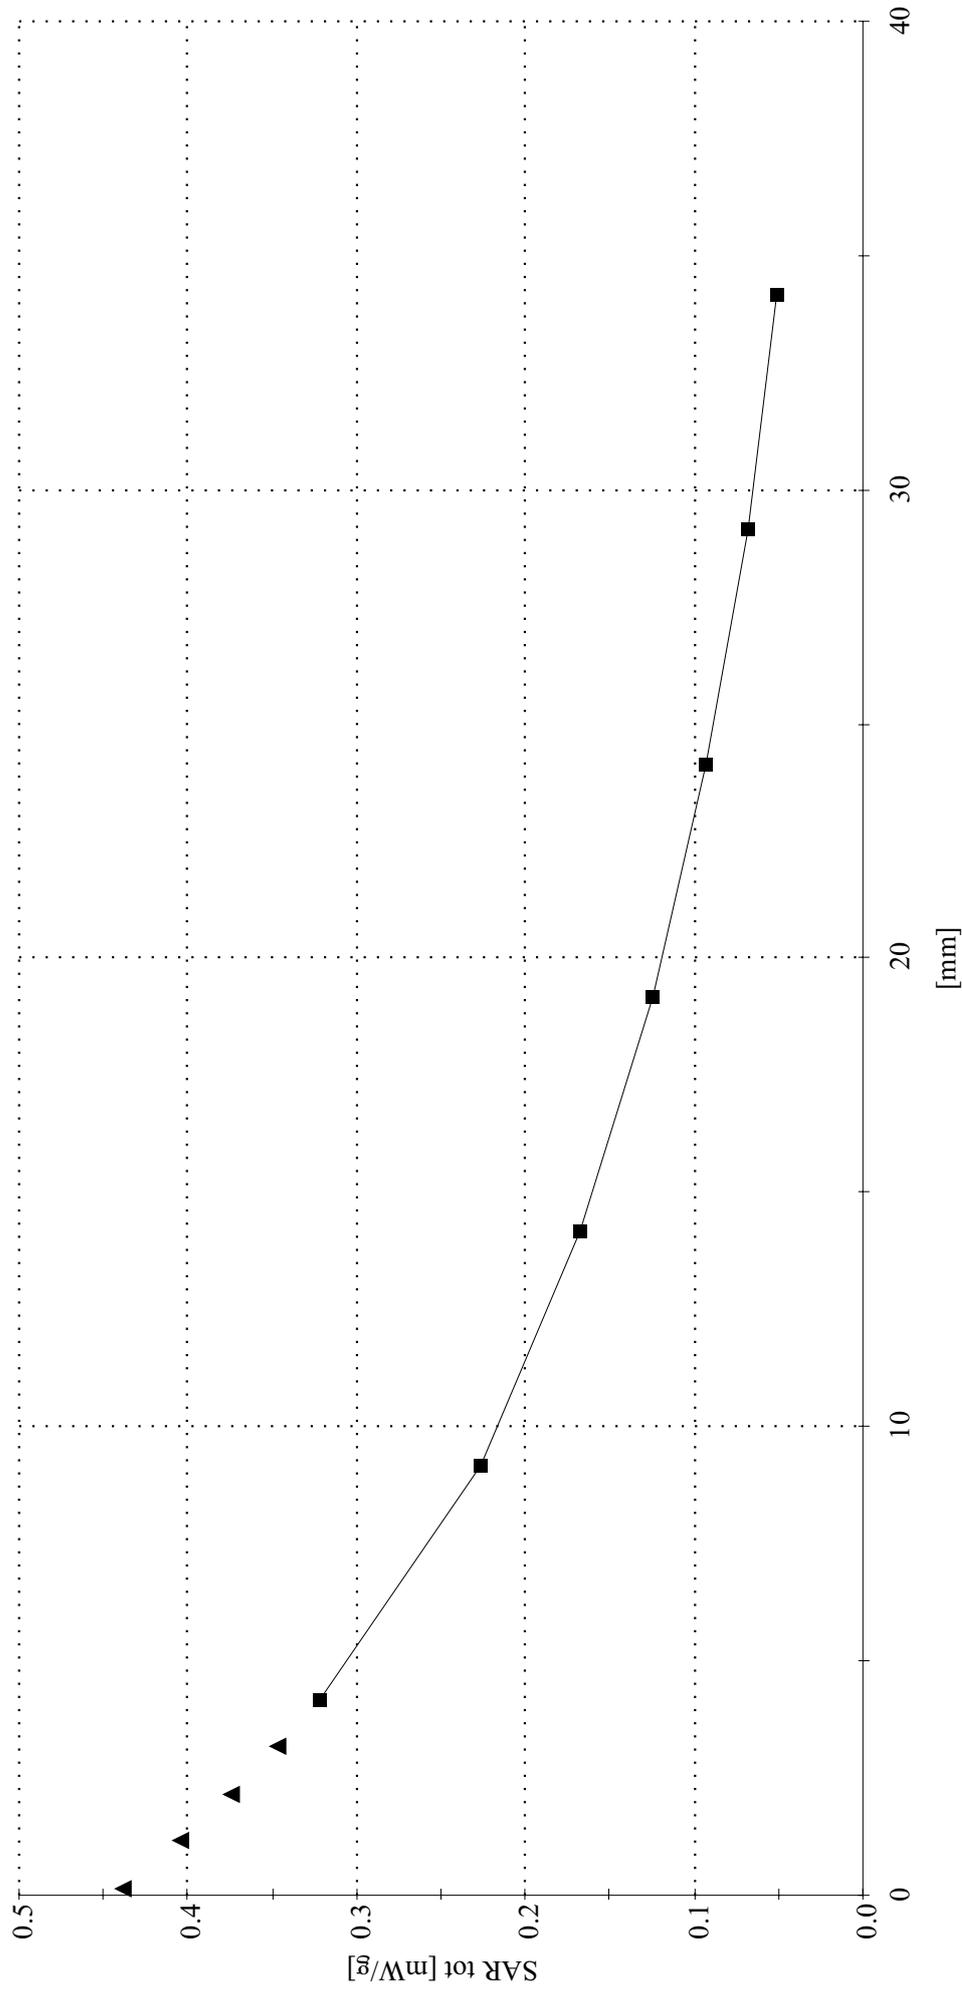

PY7A1042021

SAM 3 Phantom; Left Hand Section; Position: (93°, 59°); Frequency: 824 MHz
Probe: ET3DV6 - SNI585; ConvF(6.95,6.95,6.95); Crest factor: 8.3; Head 835-900MHz: $\sigma = 0.87$ mho/m $\epsilon_r = 42.3$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.772 mW/g, SAR (10g): 0.512 mW/g, SAR (Worst-case extrapolation)
Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

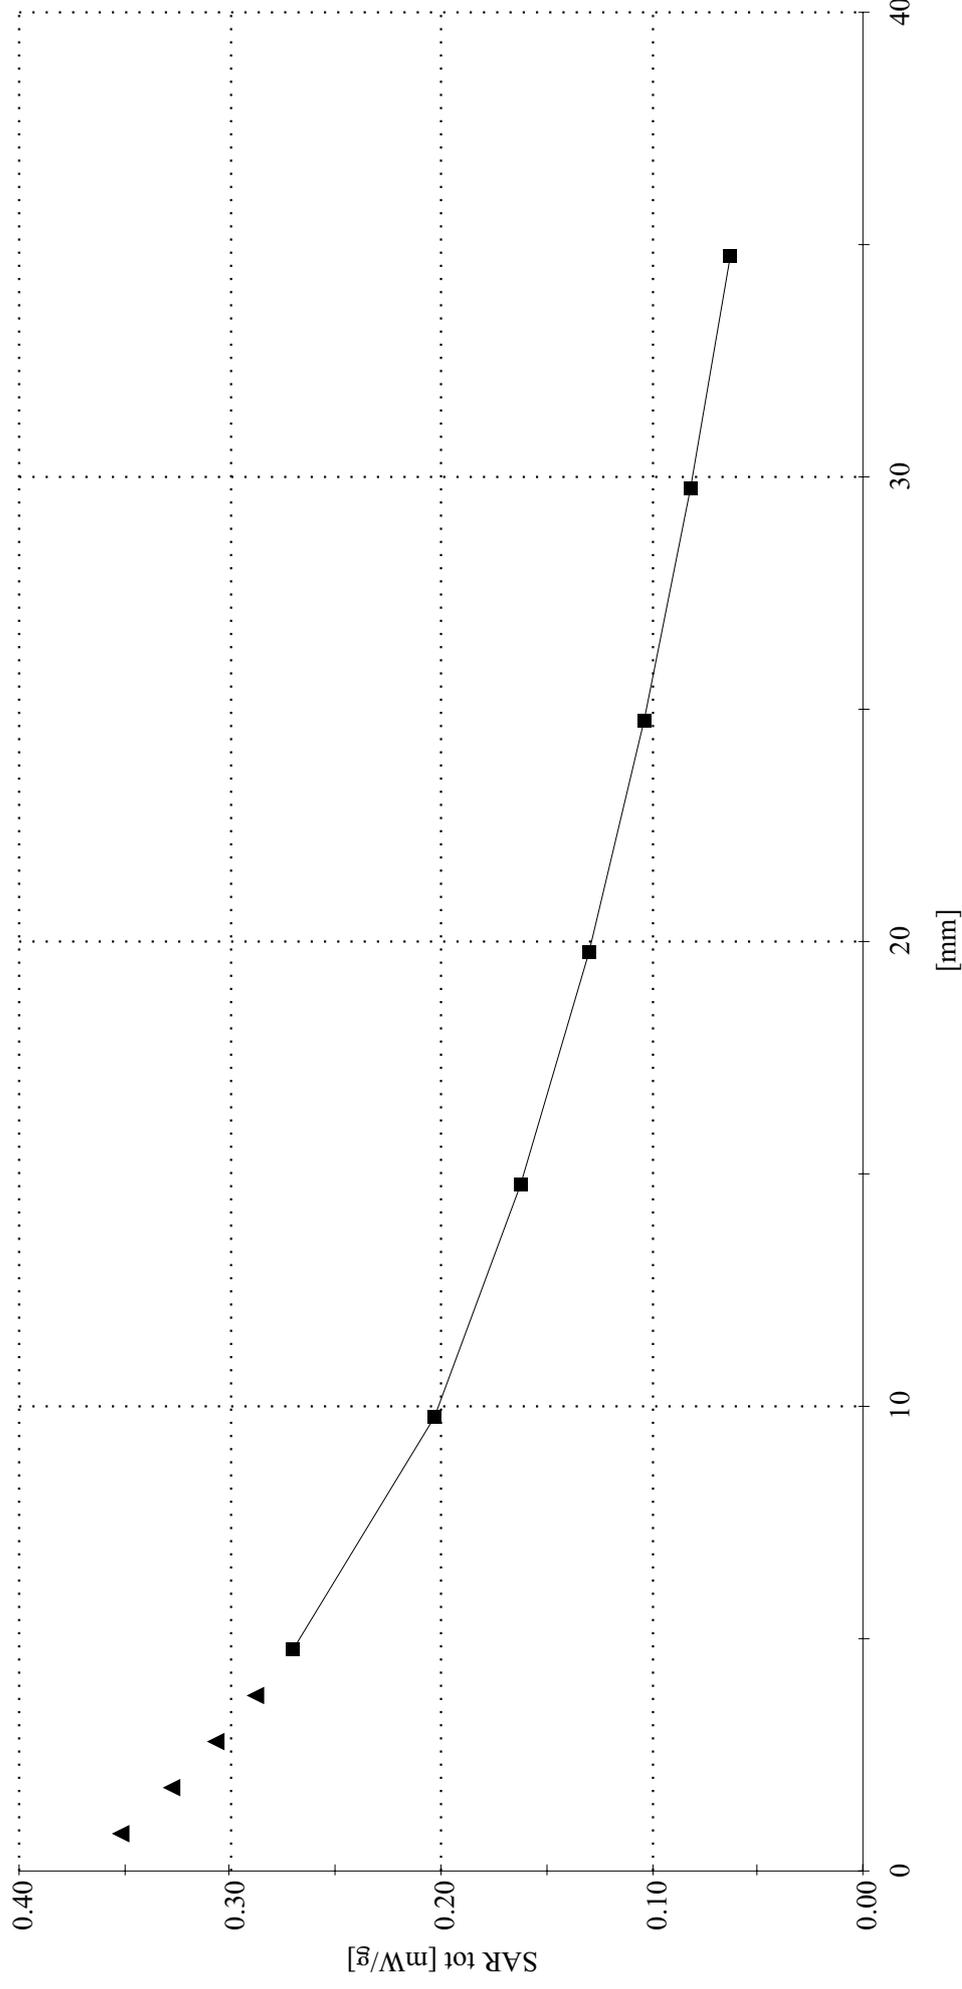



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No: **ET3-1585_Mar05**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1585**

Calibration procedure(s) **QA CAL-01.v5
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 16, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 16, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1585

Manufactured:	May 7, 2001
Last calibrated:	March 18, 2004
Recalibrated:	March 16, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1585

Sensitivity in Free Space^A

			Diode Compression ^B	
NormX	1.85 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	93 mV
NormY	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	93 mV
NormZ	1.90 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL **900 MHz** **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	7.8	4.0
SAR _{be} [%]	With Correction Algorithm	0.4	0.1

TSL **1750 MHz** **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	12.7	8.7
SAR _{be} [%]	With Correction Algorithm	0.4	0.3

Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.



Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

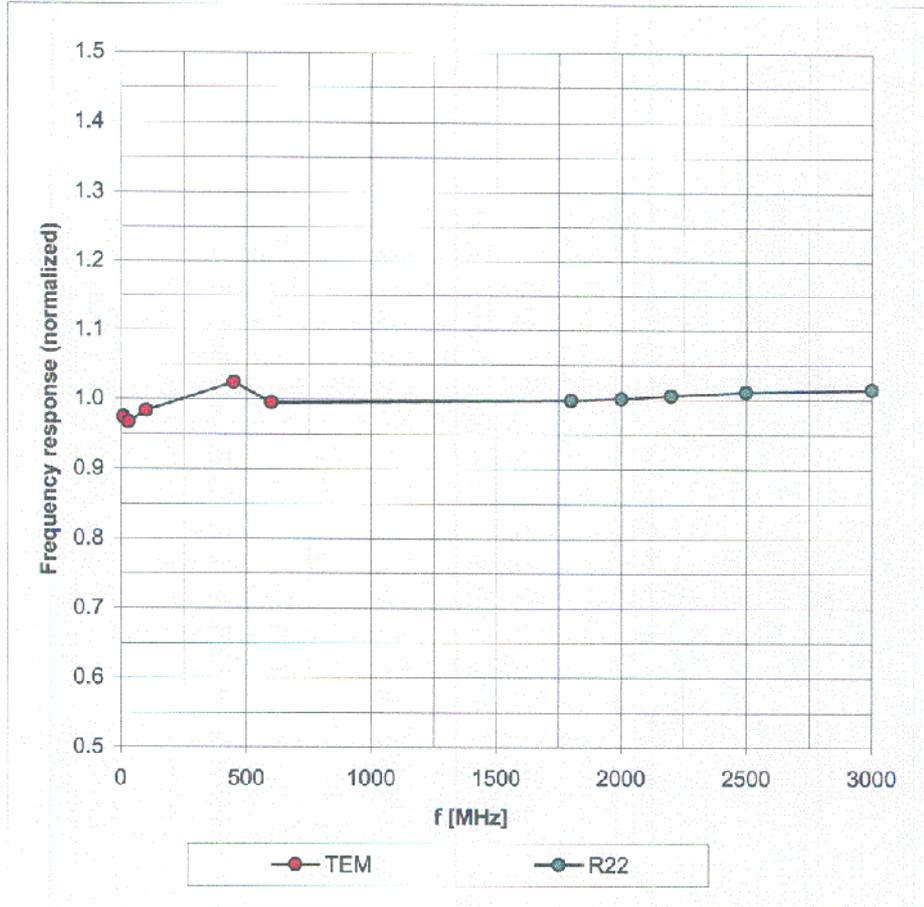

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



Receiving Pattern (ϕ), $\vartheta = 0^\circ$

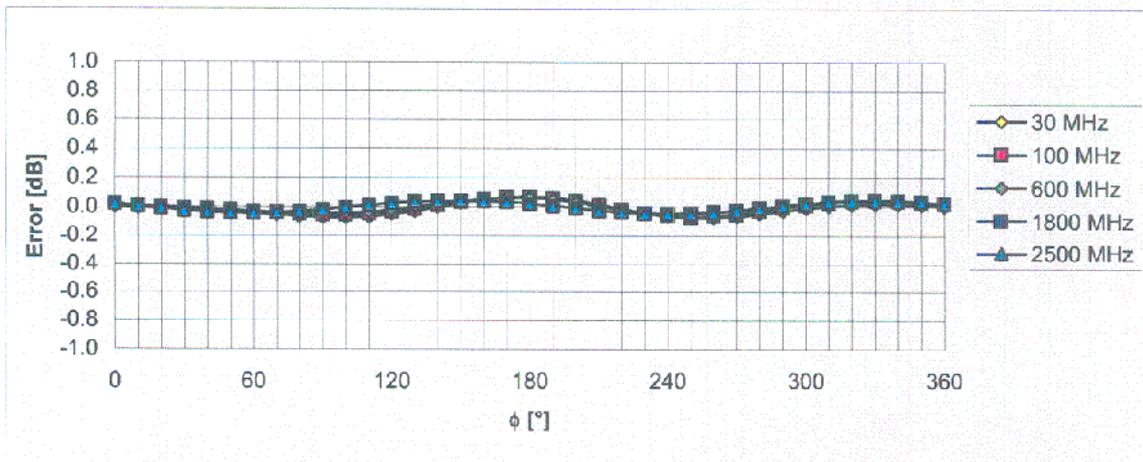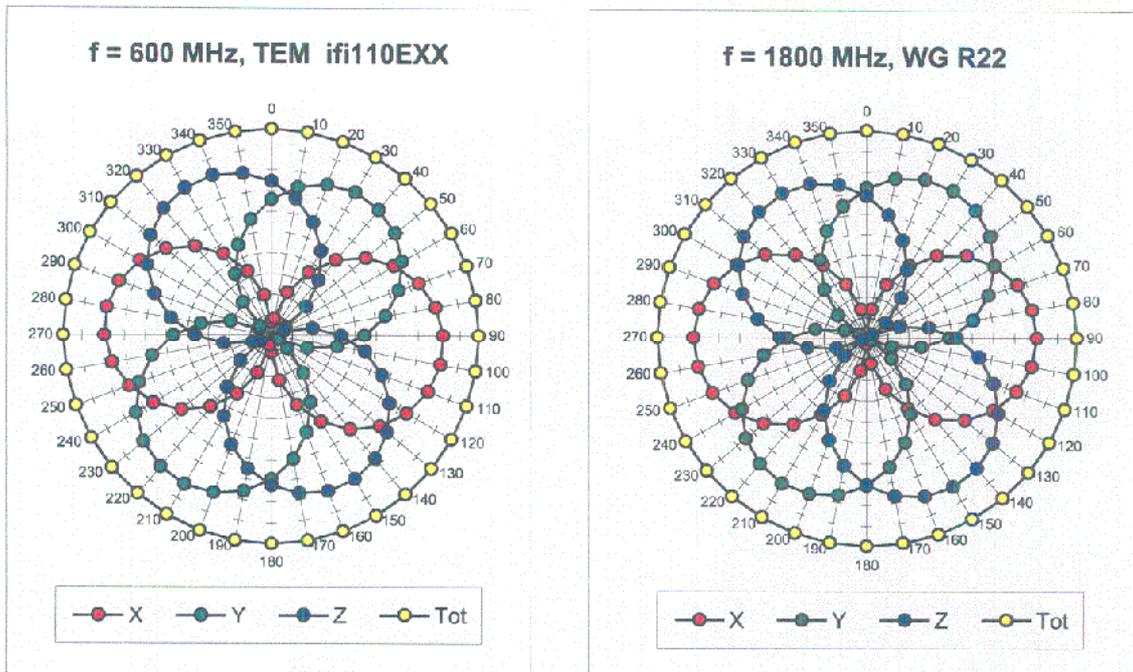

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)



Dynamic Range f(SAR_{head})

(Waveguide R22, f = 1800 MHz)

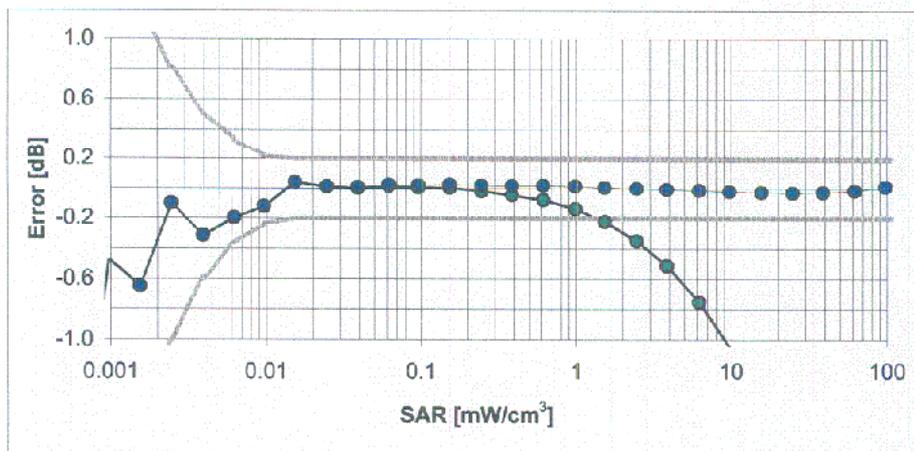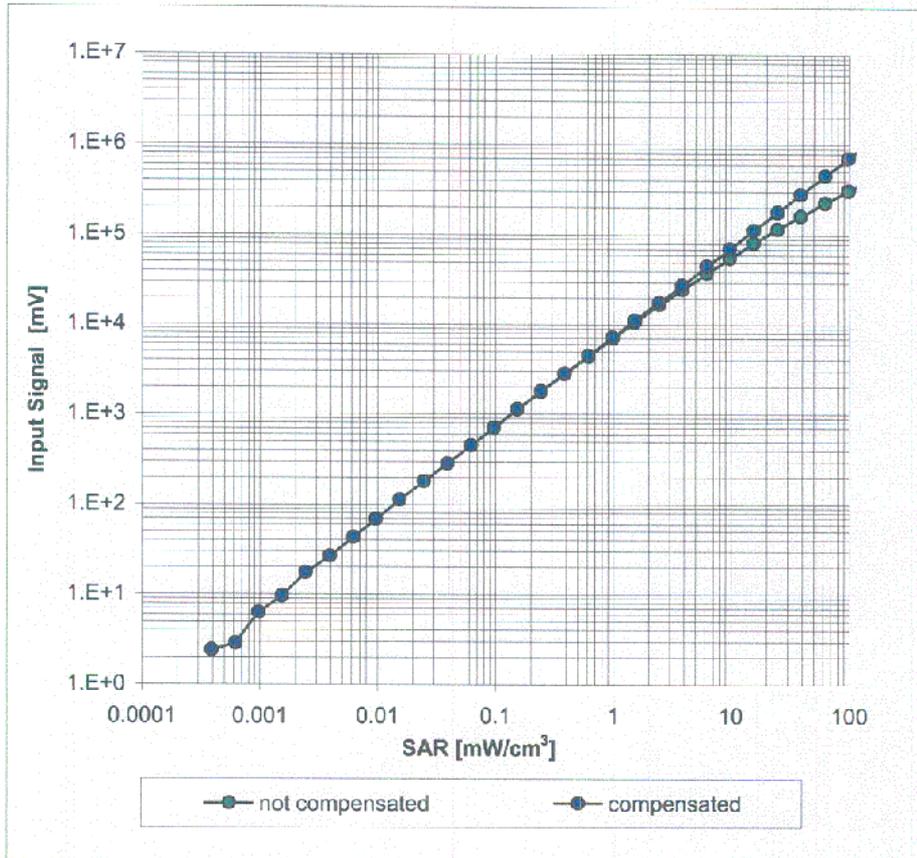

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

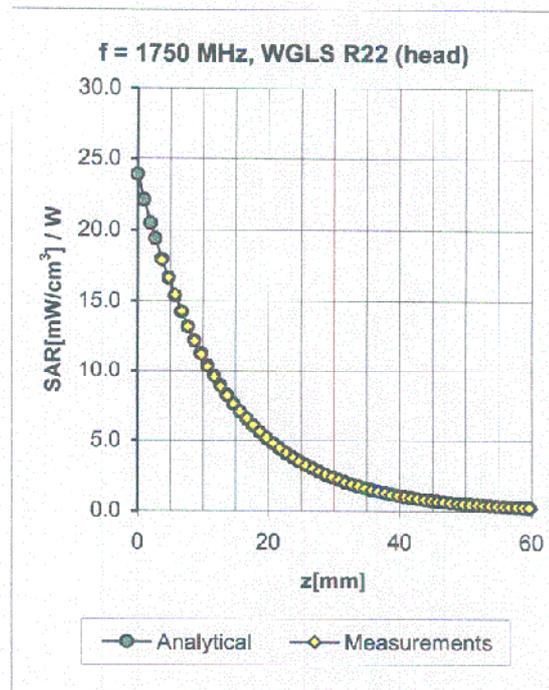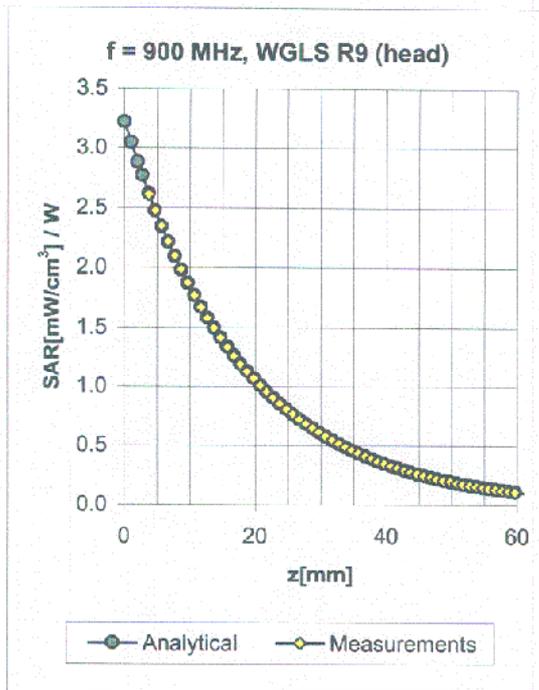


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.99	1.46	6.95 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.91	1.49	6.73 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.53	2.45	5.30 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.64	5.03 ± 11.0% (k=2)
2000	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.51	2.70	4.87 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.59	2.38	4.60 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.96	1.54	6.65 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.50	2.96	4.62 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.58	2.20	4.16 ± 11.8% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

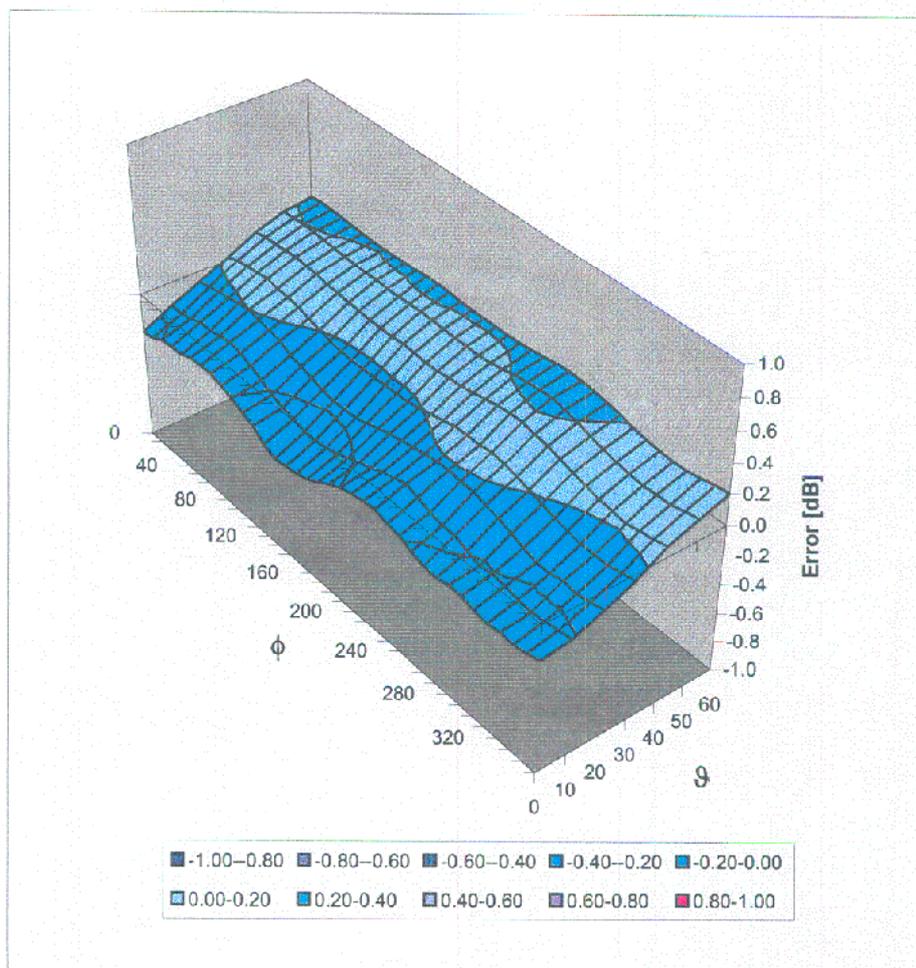

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

DASY4 Validation Report for Body TSL

Date/Time: 14.03.2005 10:51:59

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M900;

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.98, 5.98, 5.98); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.57 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

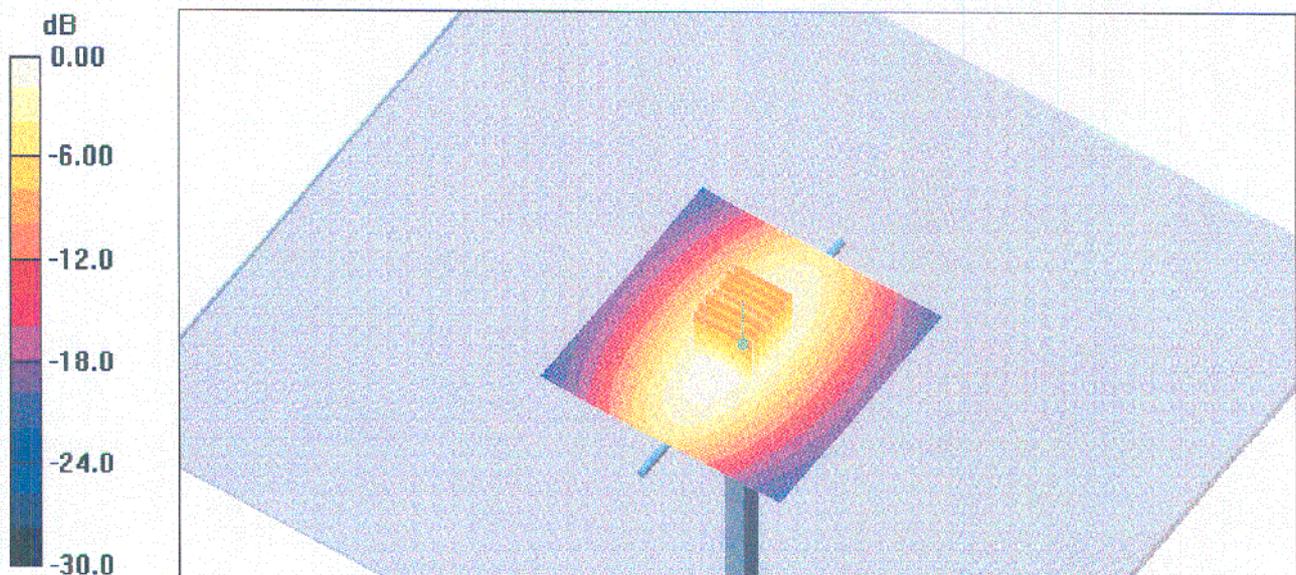

DASY4 Validation Report for Head TSL

Date/Time: 08.03.2005 10:35:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.24, 6.24, 6.24); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 144

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.46 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.0 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.44 mW/g

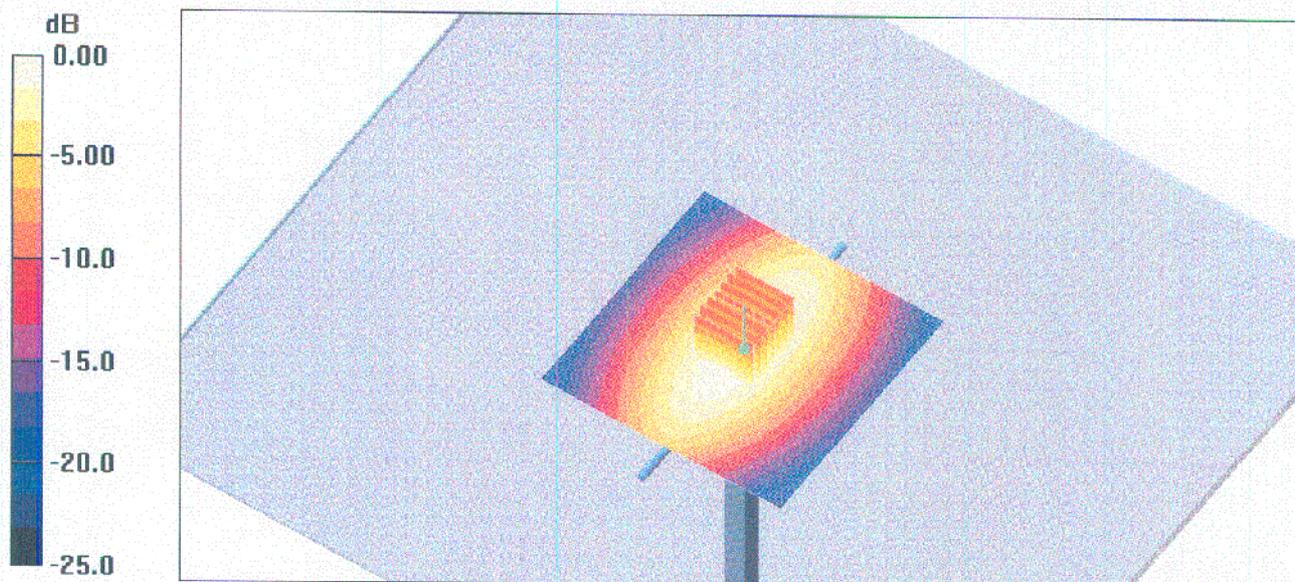

DASY4 Validation Report for Body TSL

Date/Time: 15.03.2005 15:20:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.23 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

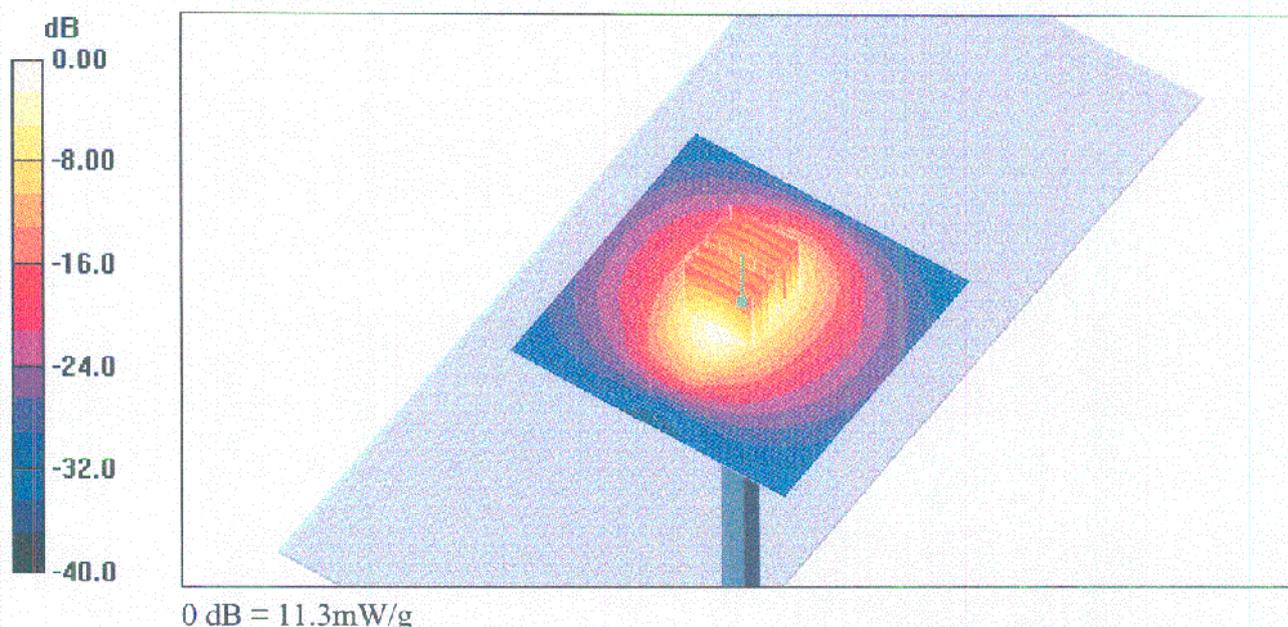

DASY4 Validation Report for Head TSL

Date/Time: 08.03.2005 10:35:22

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 MHz;

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(6.24, 6.24, 6.24); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 144

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.46 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.0 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 3.29 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.44 mW/g

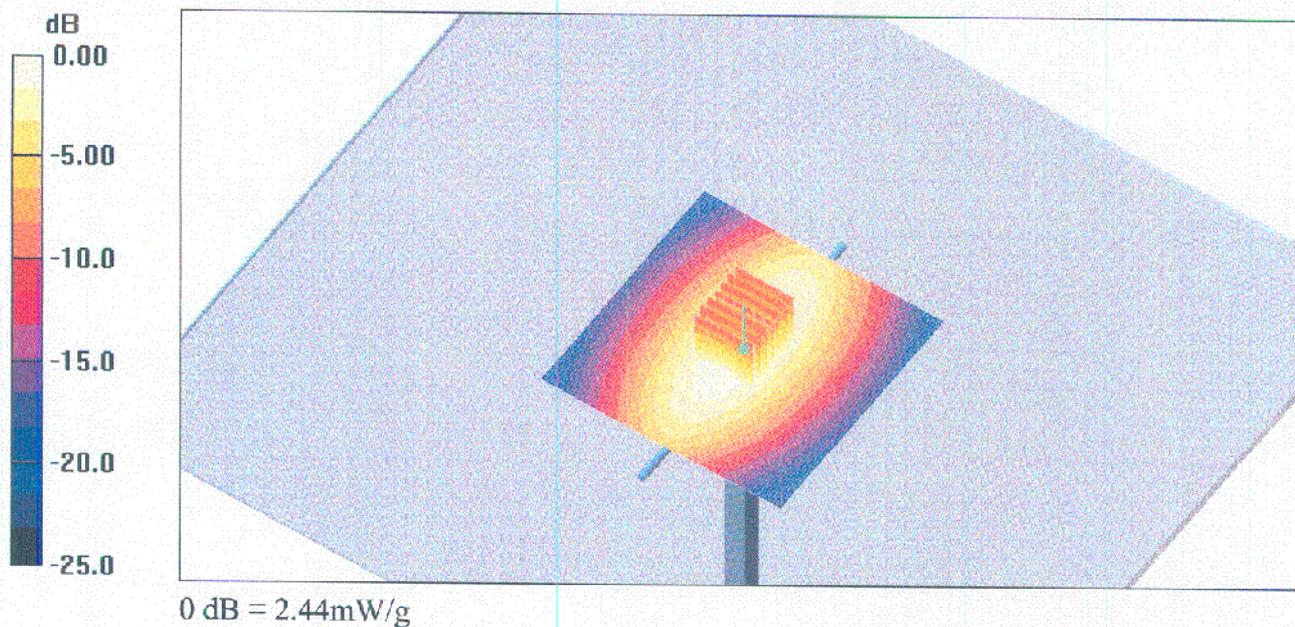

DASY4 Validation Report for Body TSL

Date/Time: 14.03.2005 10:51:59

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN484

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: M900;

Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(5.98, 5.98, 5.98); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 15 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 2.57 mW/g


Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 3.36 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.56 mW/g

Maximum value of SAR (measured) = 2.58 mW/g

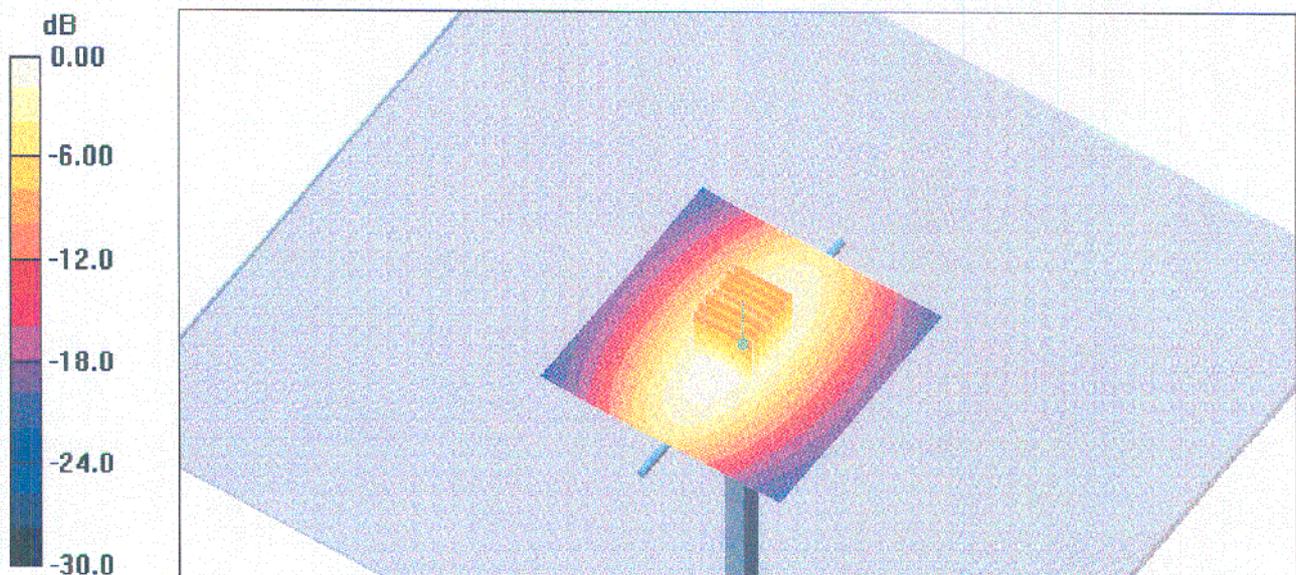

DASY4 Validation Report for Head TSL

Date/Time: 09.03.2005 15:20:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

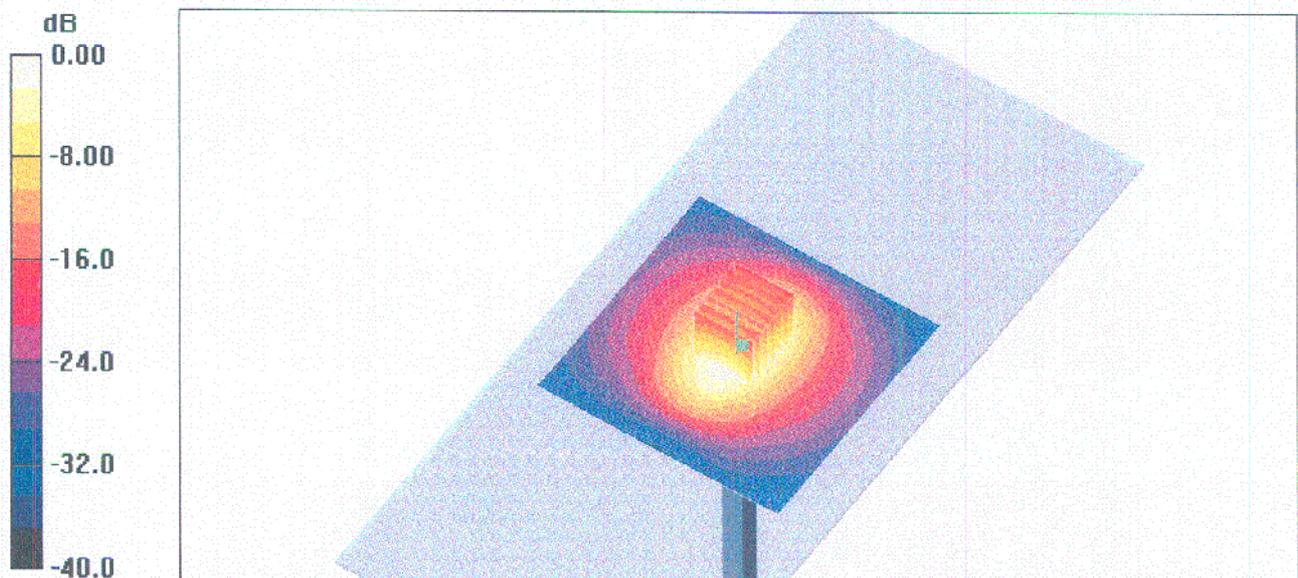

0 dB = 11.0mW/g