



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3463A-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,
Inc. and any use of such marks by Cetecom ICT is under license*

Annex to Test

report no. : 2-4883-47-04/08
Type identification : AAC-1052191-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7A1052191
IC Certification No : 4170B-A1052191
Test standards : 47 CFR Part 15
RSS - 210 Issue 7



Table of contents

1 General information... 3
1.1 Notes ... 3
1.2 Testing laboratory ... 4
1.3 Details of applicant ... 4
1.4 Application details ... 4
2 Technical tests ... 5
2.1 Details of manufacturer ... 5
2.2 Test item(s) and test configuration ... 5
3 Summary of Measurement Results and list of all performed test cases ... 6
4 Measurements and results ... 7
5 Annex A: FCC Part 15 Subpart B ... 8
5.1 Conducted Limits ... 8
5.2 Receiver spurious emission radiated (Idle mode) ... 13
6 Test equipment and ancillaries used for tests ... 20
7 Photographs of the Test Set-up ... 22
8 Photographs of the EUT ... 24

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2008-08-13

Jakob Reschke



Date


Name

Signature

Technical responsibility for area of testing:

2008-08-13

Stefan Bös

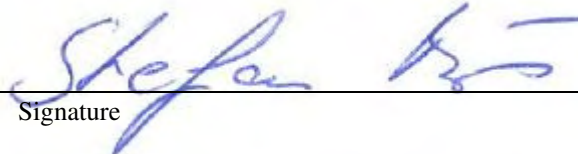

Date

Name

Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentornet
Town:	22188 Lund
Country:	Sweden
Telephone:	+46-46-19-3000
Fax:	+46-46-19-3295
Contact:	Peter Lindeborg
E-mail:	peter.lindeborg@sonyericsson.com
Telephone:	+46-46-212-6180

1.4 Application details

Date of receipt of order:	2008-07-07
Date of receipt of test item:	2008-08-12
Date of start test:	2008-08-12
Date of end test:	2008-08-13
Persons(s) who have been present during the test:	-/-

2 Technical tests

2.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentorget
Town:	22188 Lund
Country:	Sweden

2.2 Test item(s) and test configuration

No.: 1 Standard Charger CST-75 with AAC-1052191-BV

3 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained**
- There were deviations from the technical specifications ascertained

Section in this Report	Test Name	Verdict
5.1	Conducted limits CFR Part 15.207, 15.107 RSS 210, Issue 7, Section 6.6 , 7.4	Pass
5.2	Receiver spurious emission radiated (Idle mode) CFR Part SUBCLAUSE § 15.109 RSS 210, Issue 7, Section 7.3 Receiver Spurious Emissions (Radiated)	Pass

4 Measurements and results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are conforming to specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are conforming to ANSI C63.2-1996 item 15.

9 kHz – 150 kHz ,Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120 KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120 KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.109 and 15.107

5 Annex A: FCC Part 15 Subpart B

5.1 Conducted Limits

Reference

FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 7, Section 6.6 , 7.4


Limits: § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50


* Decreases with the logarithm of the frequency

PCS 1900


Plot 1: Neutral Line
Idle Mode: 150 kHz – 30 MHz

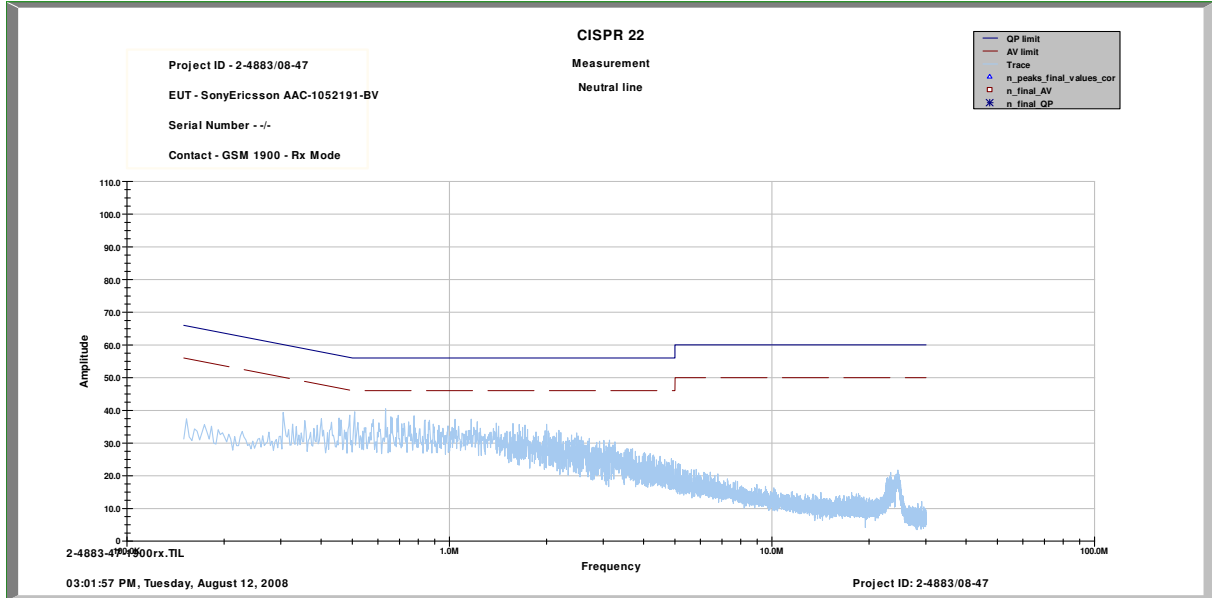


Plot 2: Phase Line
Idle Mode: 150 kHz – 30 MHz

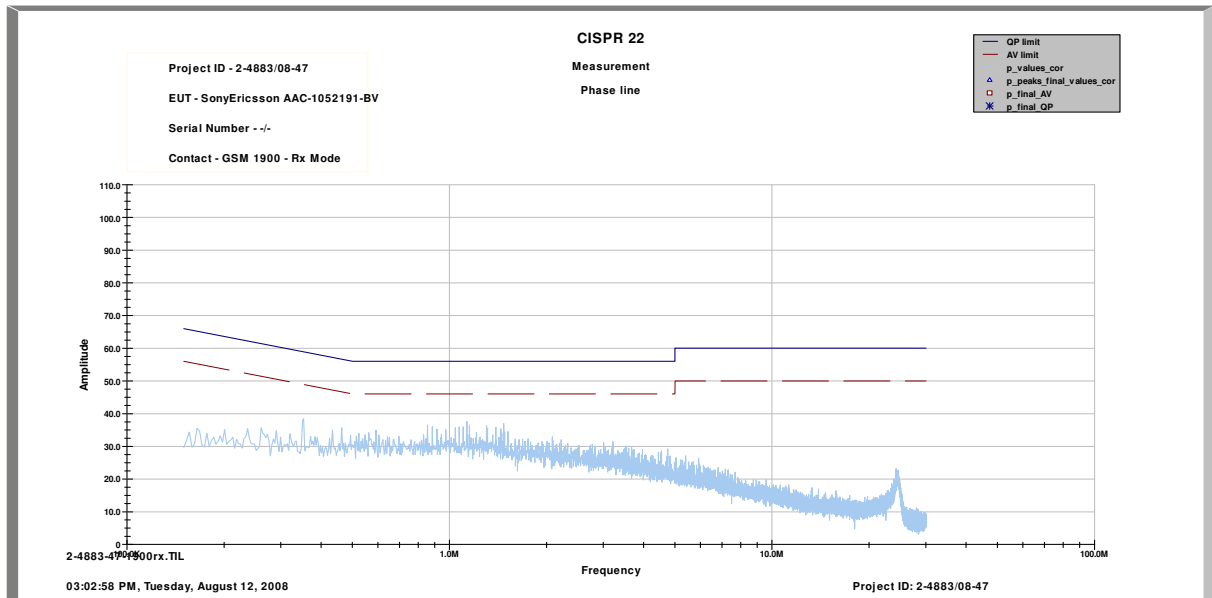

Plot 3: Neutral Line
Traffic Mode : 150 kHz – 30 MHz

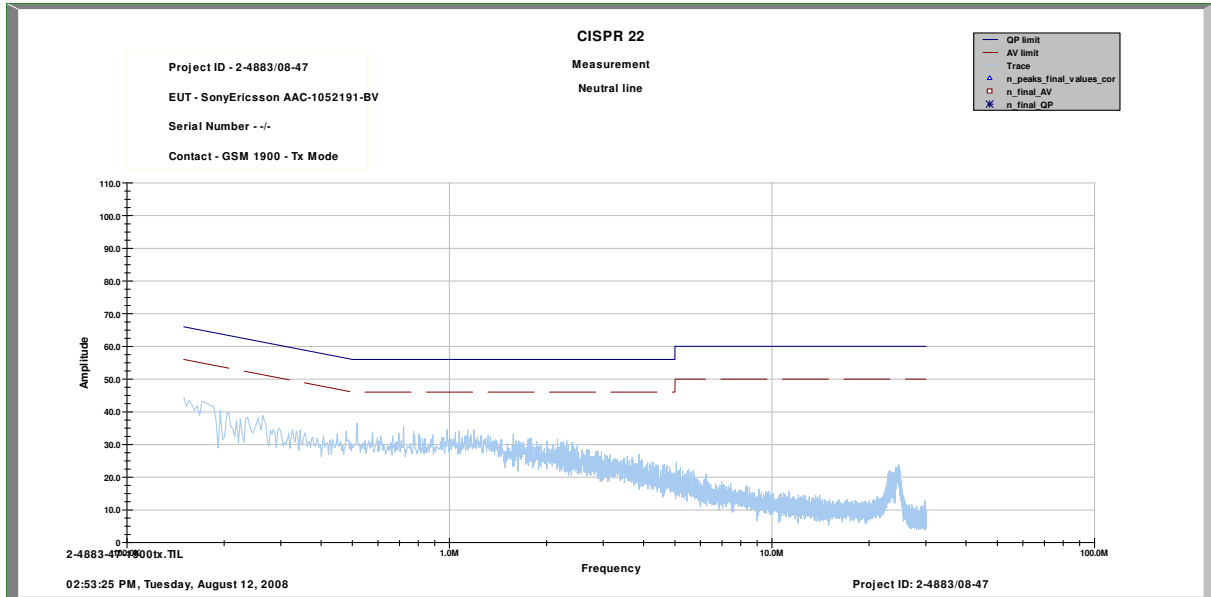


Plot 4: Phase Line
Traffic Mode : 150 kHz – 30 MHz

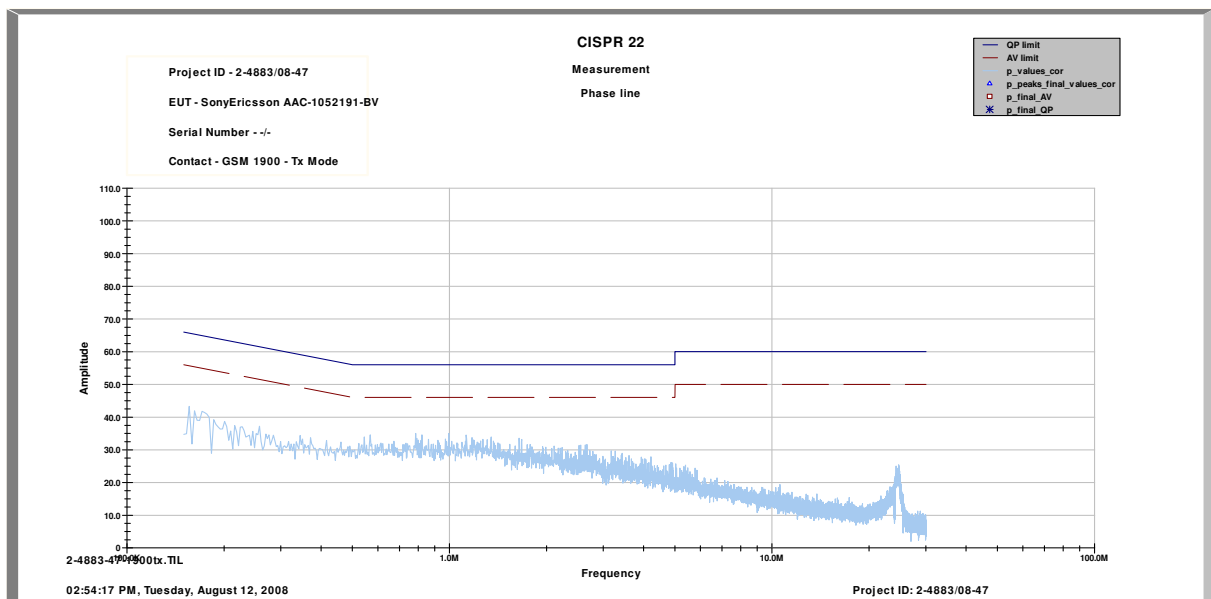


PCS 850


Plot 1: Neutral Line
Idle Mode: 150 kHz – 30 MHz

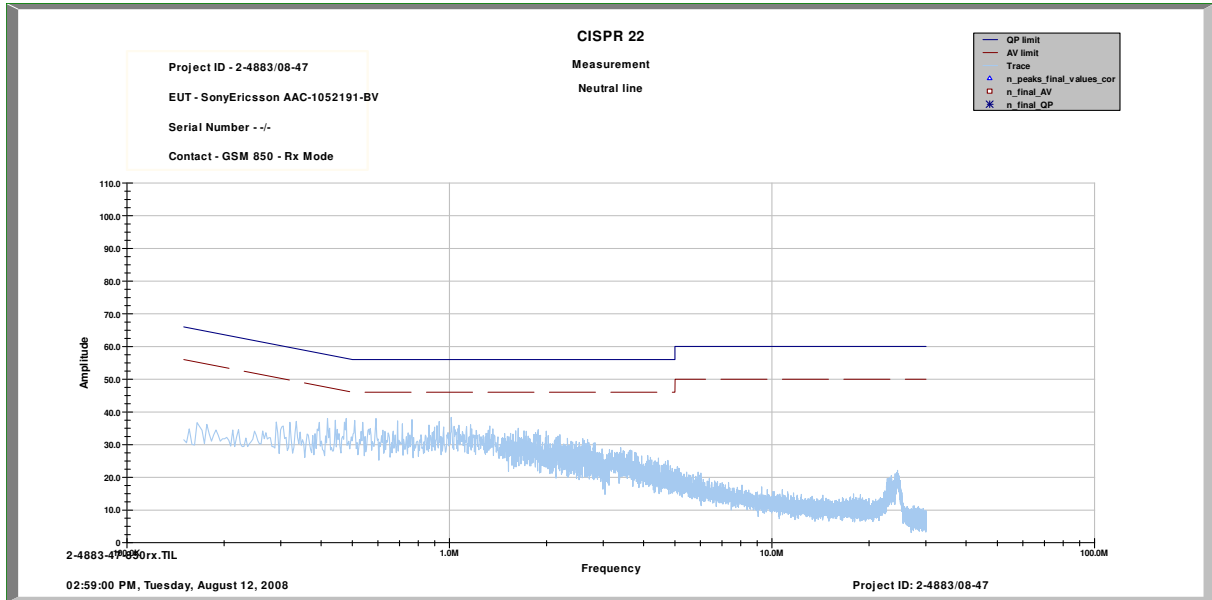


Plot 2: Phase Line
Idle Mode: 150 kHz – 30 MHz

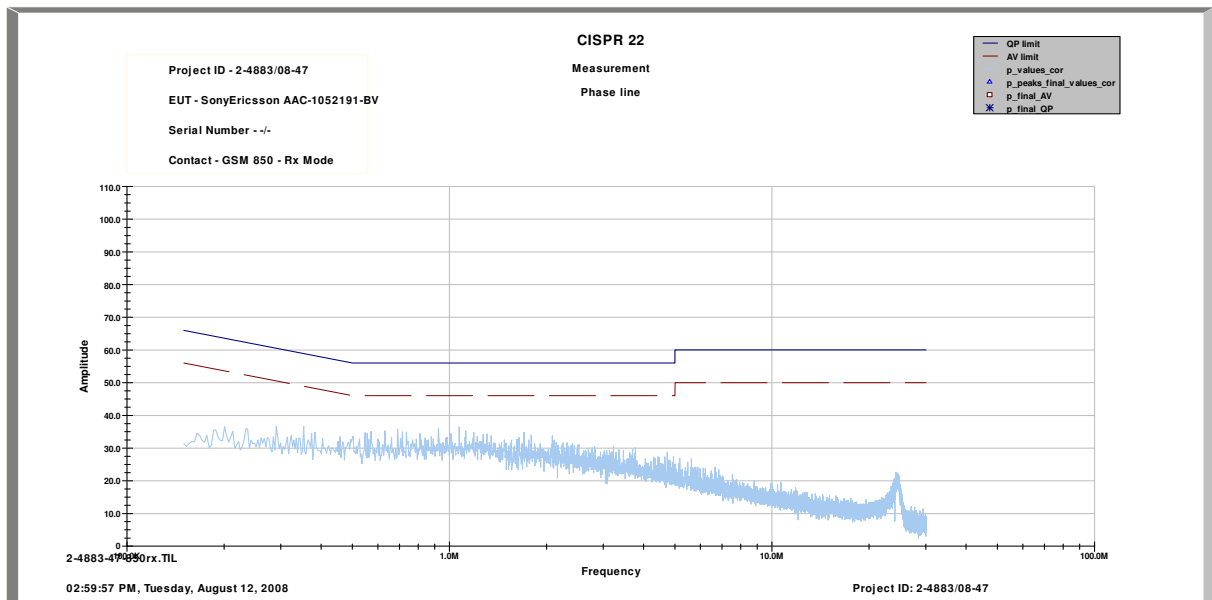

Plot 3: Neutral Line
Traffic Mode : 150 kHz – 30 MHz

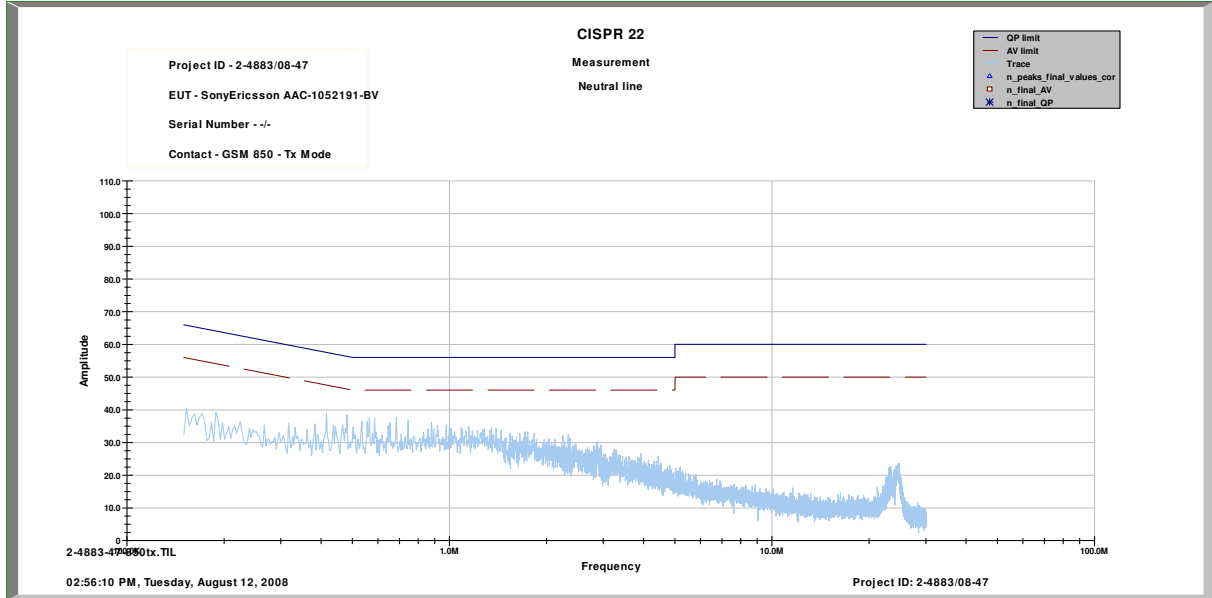

Plot 4: Phase Line
Traffic Mode : 150 kHz – 30 MHz

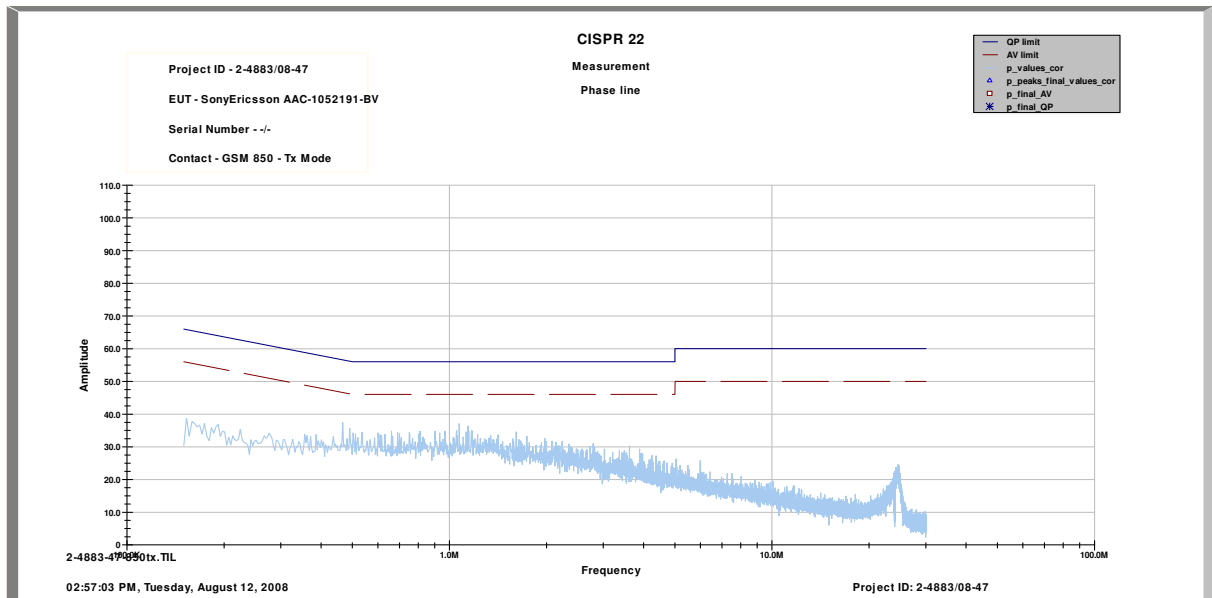

5.2 Receiver spurious emission radiated (Idle mode)

Reference

FCC:	CFR Part SUBCLAUSE § 15.109
IC:	RSS 210, Issue 7, Section 7.3 Receiver Spurious Emissions (Radiated)

Measurement Results

SPURIOUS EMISSIONS LEVEL (dB μ V/m)								
Idle mode			-/-			-/-		
f (MHz)	Detector	Level (dB μ V/m)	f (MHz)	Detector	Level (dB μ V/m)	f (MHz)	Detector	Level (dB μ V/m)
No critical peaks found								
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

H = Horizontal; V= Vertical

For measurement distance see table below

Limits: § 15.109

Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

PCS 1900

Idle Mode (30 MHz - 1 GHz)

Information


EUT:	AAC-1052191-BV + CAA-0002001-BV
Serial Number:	CB5111K7Z0 + 758 B06W06
Test Description:	FCC 15B
Operating Conditions:	Idle 1900
Operator Name:	Kraus
Comment:	Power 115V / 60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	EMI radiated\Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_F_1GHz_Auto

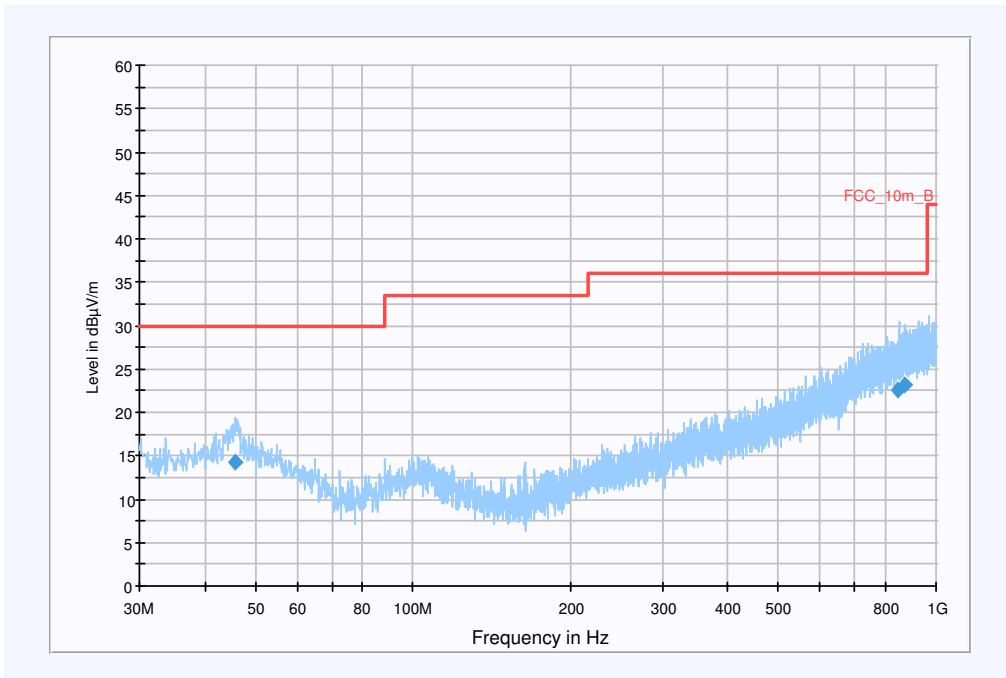

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
45.653650	14.2	15000.000	120.000	121.0	V	249.0	13.5	15.8	30.0	
847.833250	22.5	15000.000	120.000	147.0	V	155.0	25.3	13.5	36.0	
872.843150	23.1	15000.000	120.000	220.0	H	295.0	25.7	12.9	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]
 @ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch
 FW 1.0

Antenna: VULB 9163
 SN 9163-295, FW ---, CAL 08.04.2010
 Correction Table (vertical): VULP6113
 Correction Table (horizontal): VULP6113
 Correction Table: Cabel with switch (0408)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]
 @ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]
 @ GPIB0 (ADR 9)


Idle Mode (1 MHz - 4 GHz)

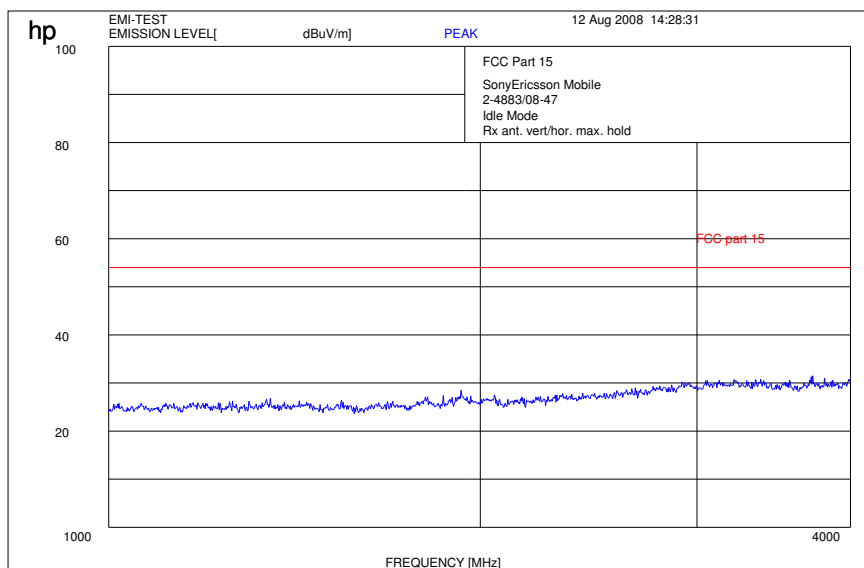

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


Idle Mode (4 GHz – 12.0 GHz)

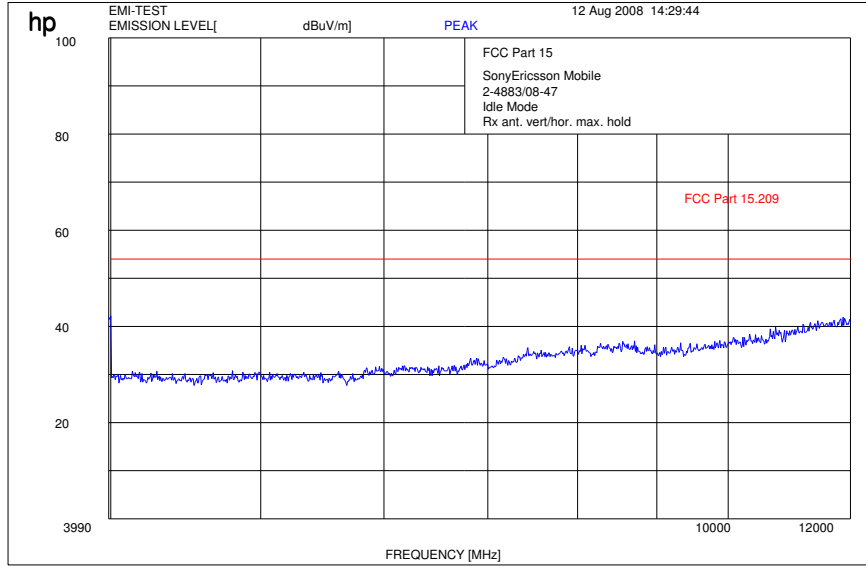

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Idle Mode (12 GHz - 25 GHz)

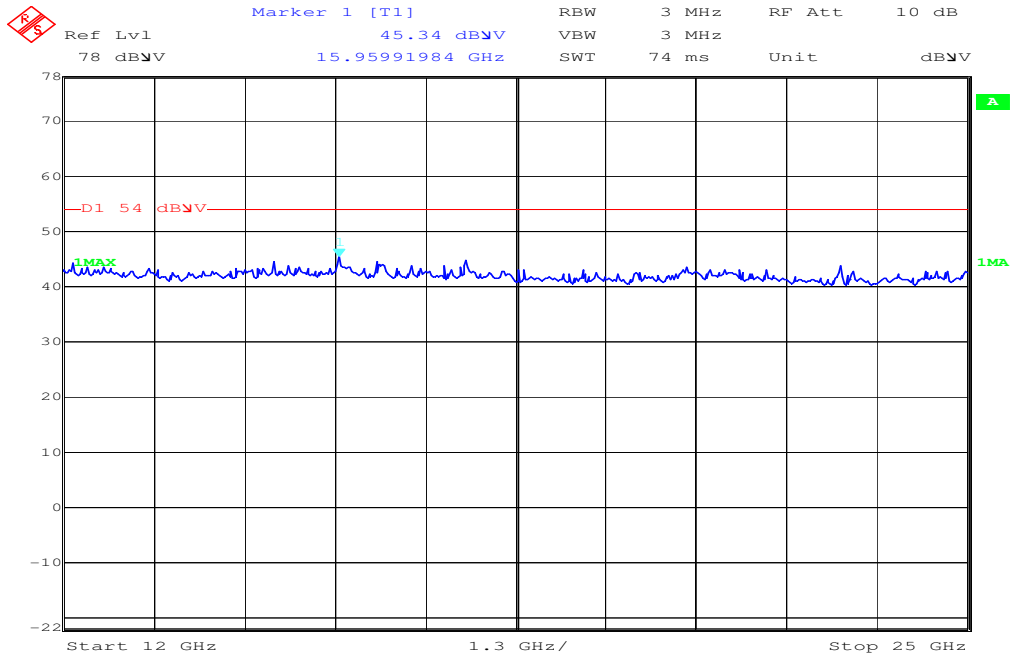

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

PCS 850

Idle-Mode (30 MHz - 1 GHz)

Information


EUT:	AAC-1052191-BV + CAA-0002001-BV
Serial Number:	CB5111K7Z0 + 758 B06W06
Test Description:	FCC 15B
Operating Conditions:	Idle 850
Operator Name:	Kraus
Comment:	Power 115V / 60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	EMI radiated\Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver

FCC_F_1GHz_Auto

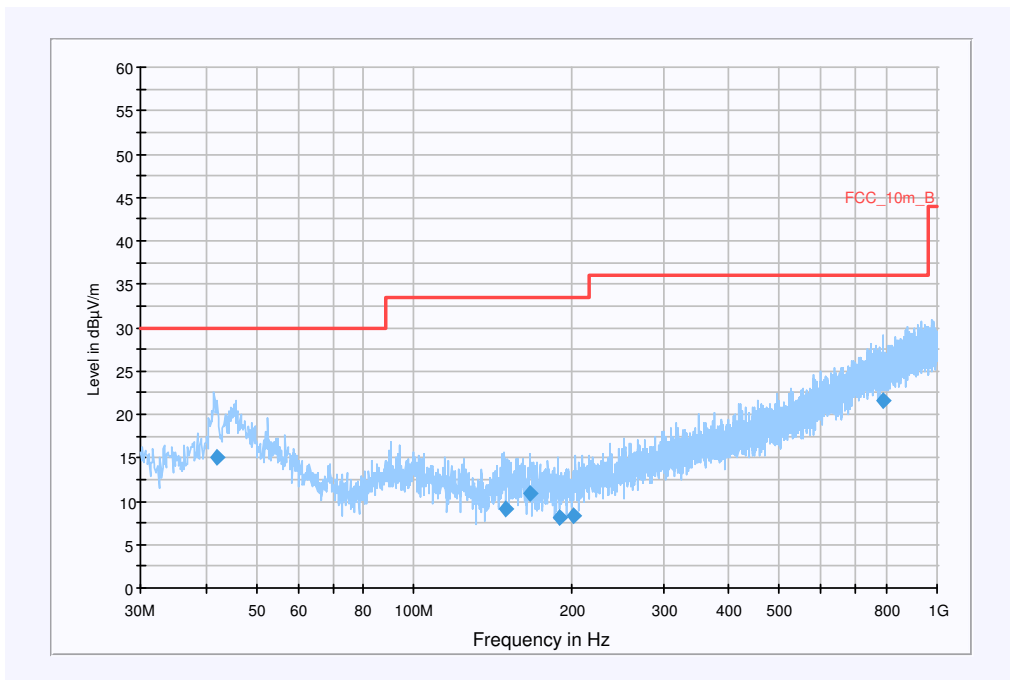

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
41.921350	15.1	15000.000	120.000	100.0	V	18.0	13.6	14.9	30.0	
149.240300	9.1	15000.000	120.000	169.0	V	290.0	9.2	24.4	33.5	
166.937200	11.0	15000.000	120.000	220.0	V	268.0	9.9	22.5	33.5	
189.291450	8.2	15000.000	120.000	138.0	V	206.0	11.3	25.3	33.5	
202.501150	8.2	15000.000	120.000	212.0	V	248.0	12.0	25.3	33.5	
787.586150	21.6	15000.000	120.000	205.0	V	105.0	24.4	14.4	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]
 @ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch
 FW 1.0

Antenna: VULB 9163
 SN 9163-295, FW ---, CAL 08.04.2010
 Correction Table (vertical): VULP6113
 Correction Table (horizontal): VULP6113
 Correction Table: Cabel with switch (0408)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]
 @ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]
 @ GPIB0 (ADR 9)


Idle-Mode (1 GHz - 4 GHz)

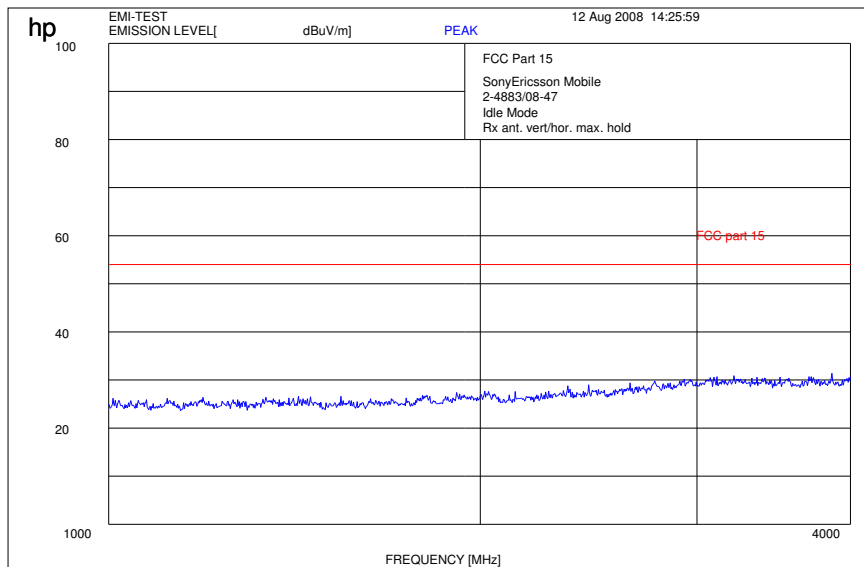

f < 1 GHz : RBW/VBW: 100 kHz


f ≥ 1GHz : RBW / VBW 1 MHz

Idle-Mode (4 GHz – 12.0 GHz)

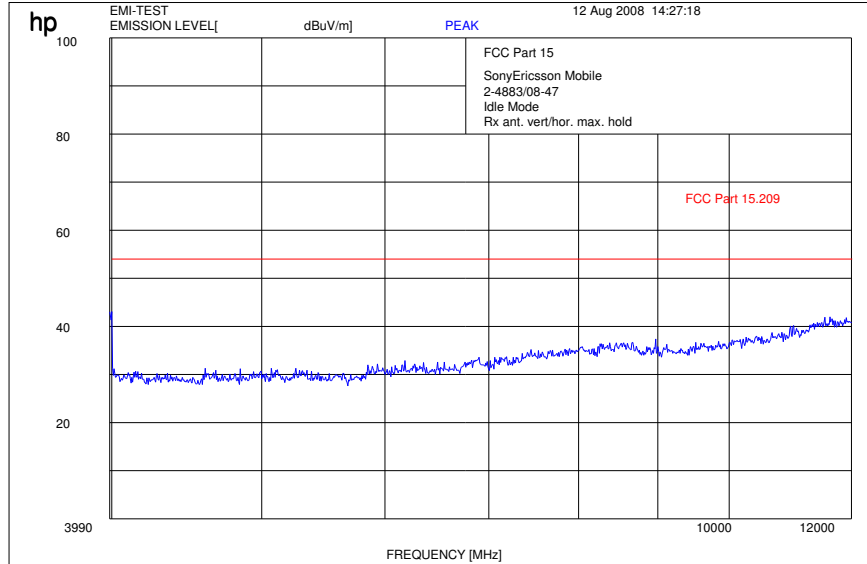

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$ $f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

Idle-Mode (12 GHz - 25 GHz)

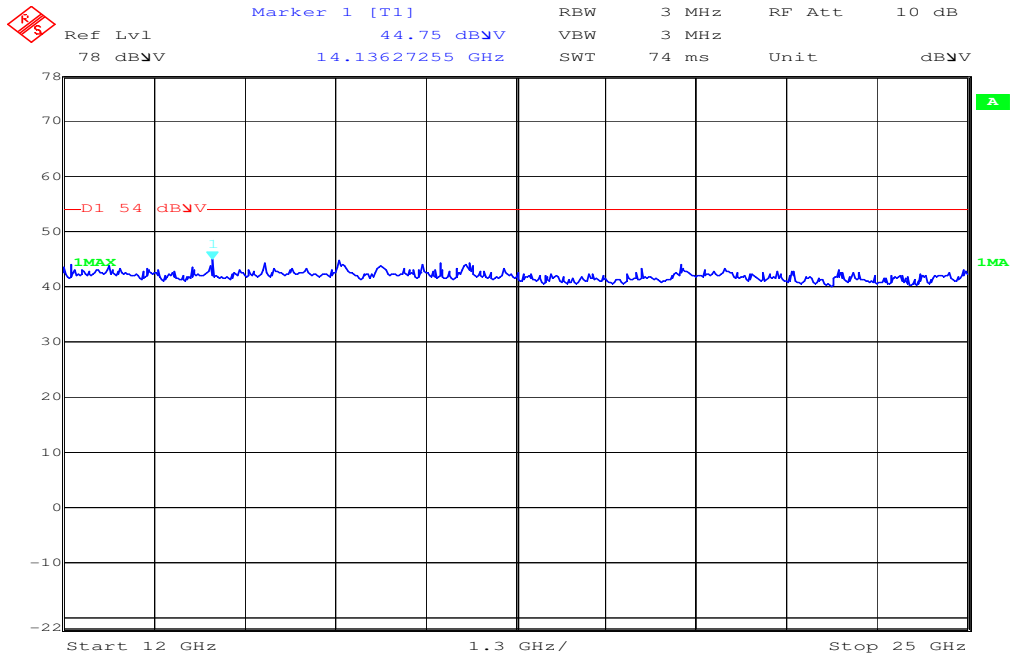

Date: 12.AUG.2008 09:47:36
 $f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$ $f \geq 1 \text{ GHz} : \text{RBW / VBW } 1 \text{ MHz}$

6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

Anechoic chamber C:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	30000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	30000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	2747A05306	300001000	05.10.2006	24	05.10.2008
5	Spektrum Analyzer Display 85662A	HP	2816A16541	300002297	05.10.2006	24	05.10.2008
6	Quasi-Peak-Adapter 85650A	HP	2811A01131	300000999	05.10.2006	24	05.10.2008
7	RF-Preselector 85685A	HP	2837A00779	300000218	08.11.2006	24	08.11.2008
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100623	ICT 300003464	05.10.2007	24	15.10.2009
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verification (System cal.)		
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verification (System cal.)		
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verification (System cal.)		
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

Signalling Units:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
2	CBT	R&S	100185	300003416	21.02.2006	24	21.02.2008
3	CMU-200	R&S	103992	300003231	27.04.2007	12	27.04.2008
4	CMU-200	R&S	106240	300003321	02.05.2006	24	02.05.2008
5	CMU-200	R&S	832221/0055	300002862	20.03.2008	24	20.03.2010

Anechoic chamber F:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna	9163-295	-/-	-/-	30.04.2008	24	30.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2009	24	31.01.2009
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-