



Prepared (also subject responsible if other)

Yulin Cheng(28847649)

Approved

Yulin Cheng(28847649)

Checked

Company Internal  
MARKING DRAWING  
No.

1206-9778

Date

2007-12-13

Rev

1

Reference

31

Approved according to 000 21-LXE 107 42/1

## Product Specification Becky, Made in

### 1 General information

<b>Core Unit label part no</b>	1202-5662
<b>Bar code</b>	<ul style="list-style-type: none"> <li>• <b>Standard:</b> according to Ericsson corporate standard 102 01-109 Uen</li> <li>• <b>Print quality:</b> C, according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01-1003 Uen</li> <li>• <b>Quiet zone:</b> No bar codes are allowed to be closer to a label edge than 2 mm!</li> </ul>
<b>Text</b>	If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.
<b>Coordinates</b>	"(x/y)" under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

MLCI= Main Label Content Information-document.

### 2 Printing information

	Content	Format
<b>Line 1</b> (4,0/15,0)	Sony Ericsson stylized name.	Graphics, height 1,5 mm. According to 1200-1925.
<b>Line 2</b> (6,5/12,5)	SIM card logo	Graphics, height 7,3 mm. According to 1200-9812. Rotated 90° counter-clockwise
<b>Line 3a</b> (8,0/15,0)	Product number without revision of the Sales Item in which the phone is packed, if applicable. "SI: XXXX-XXXX"	Text, height 1,2 mm.
<b>Line 3b</b> (8,0/30,0)	Model Name "Z770"	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
<b>Line 4a</b> (11,0/2,0)	"TYPE: AAD-3052051-BV"	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
<b>Line 4b</b> (11,0/23,0)	HW & SW identification field, if applicable; "FG"	Text, height 1,2 mm. According to Type-testing report in BOM pos 1C.
<b>Line 4c</b> (11,0/29,5)	Location code of where the phone is flashed, if applicable, "XXX"	Text, height 1,2 mm.
<b>Line 5a</b> (14,0/2,0)	"FCC ID: PY7A3052051"	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
<b>Line 5b</b> (14,0/23,0)	Production week (flash), "yy'W'ww" (yy = year, ww = week)	Text, height 1,2 mm.
<b>Line 6a</b> (17,0/2,0)	"IC: 4170B-A3052051"	Text, height 1,2 mm. <i>According to Chapter 1 in MLCI.</i>
<b>Line 6b</b> (17,0/23,0)	Repair week, if applicable. "Ry'W'ww" (y = year, ww = week)	Text, height 1,2 mm.
<b>Line 7</b> (20,0/2,0)	Line 8a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
<b>Line 8a</b> (23,0/2,0)	Supplier's identification for trace-ability of the telephone, as desired by supplier (e.g. "S/N: nnn..." for serial number).	Text, height 1,2 mm. Defined by supplier.

Prepared (also subject responsible if other)

Yulin Cheng(28847649)

Approved

Yulin Cheng(28847649)

Checked

 Company Internal  
**MARKING DRAWING**  
 No.

1206-9778

Date

2007-12-13

Rev

1

Reference


31

	Content	Format
<b>Line 8b</b> (23,0/19,0)	Actual electronic serial number (IMEI) of the Mobile Phone, "00000000-000000-0"	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
<b>Line 9</b> (25,5/2,0)	Line 8b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
<b>Line 10a</b> (33,0/2,0)	CE approval symbol	Graphics, height 5 mm. According to 1202-5482.
<b>Line 10b</b> (33,0/10,0)	The notified body number "0682"	Text, height 1,2 mm.
<b>Line 11</b> (37,0/2,0)	Marking of origin: "Xxx"= actual country of production of the included telephone, in English.	Text, height 1,2 mm.

### 3 Layout

The conceptual picture (for Zebra 90XIII printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

#### 3.1 Conceptual picture

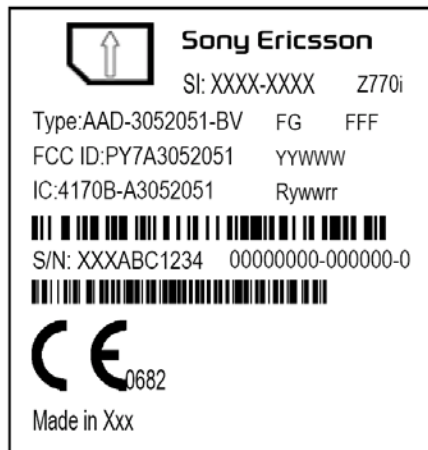

double underlined = major changes since last revision.



Prepared (also subject responsible if other)

Yulin Cheng(28847649)

Approved

Yulin Cheng(28847649)

Checked

Company Internal  
MARKING DRAWING

No.

1206-9778

Date

2007-12-13

Rev

1

Reference

31

### 3.2 Label placement

To find the label follow these steps:

1. Remove the cover on the rear side of the product.
2. Remove the battery.
3. The label is located behind the battery.

