



Prepared (also subject responsible if other)

SEM/BGLDB, Delia Aulio

Approved

SEM/BGLDB, Delia Aulio

Checked

Company Internal
MARKING DRAWING
No.

1222-8189 Uen

Date

2008-12-01

Rev

1

Reference

5

W705a, Mobile Phone label content, Made in...

Rika (1,2,5 NAM/LAM) Type Number: AAD-3880005-BV,

FCC ID:PY7A3880005, Canada IC:4170B-A3880005.

1 General information

The format of the label is based on a label 1207-8040 .

If applicable, or nothing else specified, Zebra printer Scaleable Smooth Font CG Triumvirate Bold Condensed is imposed. When needed, the text is adjusted to fit the label.

All bar codes, when applicable, are according to Ericsson corporate standard 102 01–109 Uen. All bar codes shall fulfil minimum print quality C according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen. No bar codes are allowed to be closer to a label edge than 2 mm! (quiet zone).

“(x/y)” under each line number specifies the bottom / left alignment for text, graphics and bar codes, x is measured vertically, and y horizontally from the upper left corner of the label (landscape format), both in mm. When needed, the alignment is adjusted to fit the label.

MLCI= Main Label Content Information Document

2 Printing information

	Content	Format
Line 1 (10,23)	SIM-card logo	Graphics height 8,0mm According to 1001-4476 document, Rotated at 180 degrees.
Line 2a (12,0/2,0)	Sony Ericsson stylized name.	Graphics, height 1,4 mm. According to 1200-1925
Line 2b (9,0/16,0)	Model Name “W705a”	Text, height 1,2 mm.
Line 3 (14,0/2,0)	Product number of the Sales Item in which the phone is packed, if applicable, without R state “SI XXXX-XXXX”	Text, height 1,2 mm.
Line 4a (16,0/2,0)	Type number of the phone, “Type: AAD-3880005-BV”.	Text, height 1,2 mm.
Line 4b (16,0/23,0)	HW & SW identification field, if applicable;	Text, height 1,2 mm. <i>According to Type-testing report under</i>



Prepared (also subject responsible if other)

SEM/BGLDB, Delia Aulio

Approved

SEM/BGLDB, Delia Aulio

Checked

Company Internal
MARKING DRAWING
No.

1222-8189 Uen

Date

Rev

Reference

2008-12-01

1

5

	"FFGG"	<i>Product Model Specifying Document</i>
Line 4c (16,0/31,0)	Location code of where the phone is flashed, if applicable, "XXX"	Text, height 1,2 mm.
Line 5a (18,0/2,0)	"FCC ID: PY7A3880005"	Text, height 1,2 mm.
Line 5b (18,0/23,0)	Production week (flash), "yy'W'ww" (yy = year, ww = week)	Text, height 1,2 mm.
Line 6a (20,0/2,0)	"IC: 4170B-A3880005"	Text, height 1,2 mm.
Line 6b (20,0/23,0)	Repair week, if applicable. "Ry'W'ww" (y = year, ww = week)	Text, height 1,2 mm. Rotated 90 degrees
Line 7 (24,0/3,7)	Line 6a in bar code. As desired by supplier (e.g. only actual number).	Bar code, height 2,0 mm. As desired by supplier (e.g. Code 128 symbology).
Line 8a (26,0/2,0)	Supplier's identification for traceability of the telephone, as desired by supplier (e.g. "S/N: nnn...." for serial number).	Text, height 1,2 mm. Defined by supplier.
Line 8b (26,0/16,0)	Actual electronic serial number (IMEI) of the Mobile Phone, "00000000-000000-0"	Text, height 1,2 mm. In the format TAC-SNR-CD. TAC and SNR derived from pos 500 in BOM. CD = check digit according to the Luhn formula (ISO/IEC 7812), GSM 02.16.
Line 9 (29,0/3,7)	Line 6b in bar code (only actual number, without data identifier).	Bar code, height 2,0 mm. Code 128 symbology, code C subset. If uneven number of digits, code B subset shall be used for the last digit.
Line 10 (31,5/2,0)	Marking of origin. "Made in Xxx"; "Xxx" = actual country of production of the included telephone, in English	Text, height 1,2 mm.
Line 11a (37,6/2,0)	CE approval symbol	Graphics, height 5 mm. According to 1210-0131.



Prepared (also subject responsible if other)

SEM/BGLDB, Delia Aulisio

Approved

SEM/BGLDB, Delia Aulisio

Checked

Company Internal
MARKING DRAWING
No.

1222-8189 Uen

Date

2008-12-01

Rev

1

Reference

5

Line 11b (37,6/9,4)	The notified body number "0682"	Text, height 1,2 mm.
Line 11c (37,6/14,0)	"Alert Symbol"	Graphics, height 5 mm According to 1001-5859
Line 11d (37,6/23,0)	WEEE trashcan without bar symbol	Graphics, min. height 5mm, according to 1202-5537.



Prepared (also subject responsible if other)

SEM/BGLDB, Delia Aulio

Approved

SEM/BGLDB, Delia Aulio

Checked

Company Internal
MARKING DRAWING
No.

1222-8189 Uen

Date

2008-12-01

Rev

1


Reference

5

3 Layout

The conceptual picture (for Zebra 90Xill printer, or equivalent) should not be considered as specifications, but as an additional help for setting up the label.

3.1 Conceptual picture

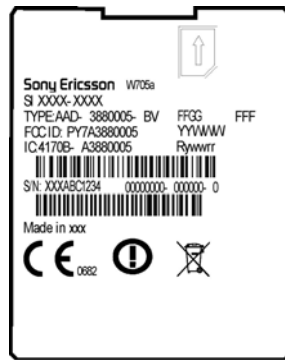

double underlined = major changes since last revision.



Prepared (also subject responsible if other)

SEM/BGLDB, Delia Aulisio

Approved

SEM/BGLDB, Delia Aulisio

Checked

Company Internal
MARKING DRAWING

No.

1222-8189 Uen

Date

2008-12-01

Rev

1

Reference

5

Label placement

To find the label follow these steps:

1. Remove the cover on the rear side of the product.
2. Remove the battery.
3. The label is located behind the battery.

