

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with Bluetooth;
Serial: CB511D23CQ**


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Right Head, Slide In, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.3 V/m
Peak SAR (extrapolated) = 0.382 W/kg
SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.209 mW/g

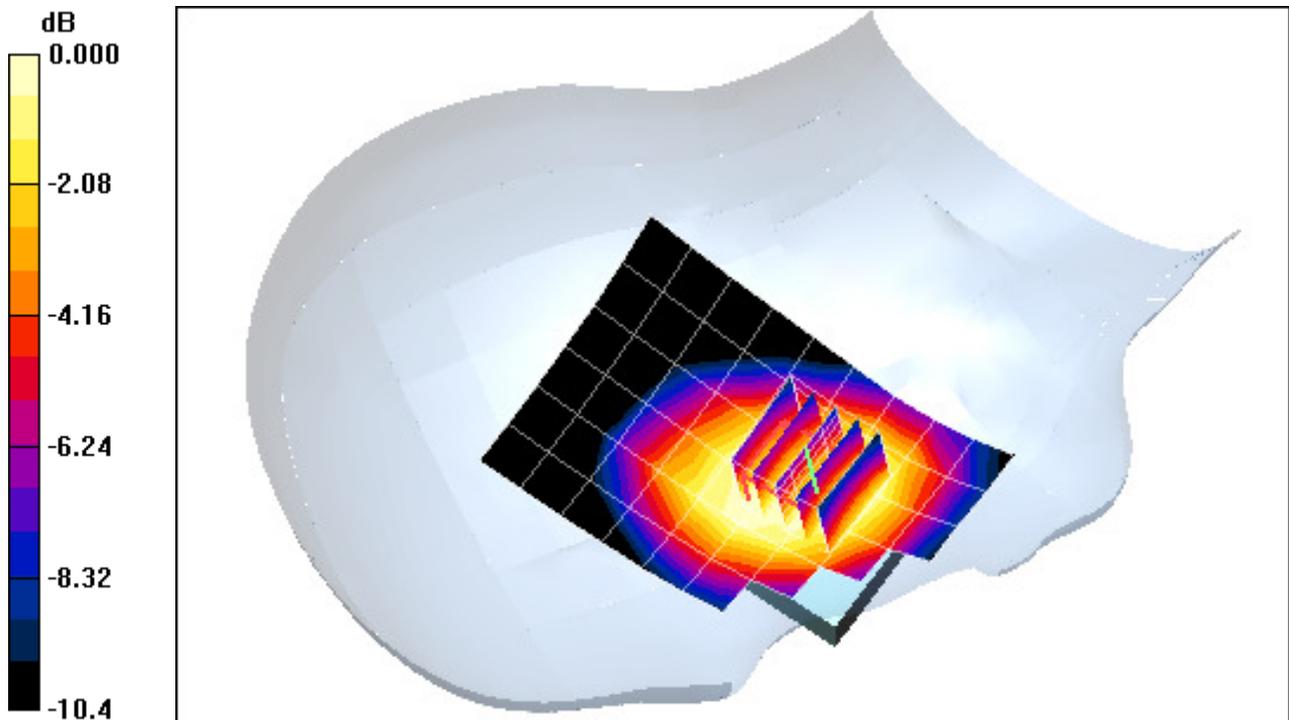

0 dB = 0.312mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Right Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.9 V/m

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.165 mW/g

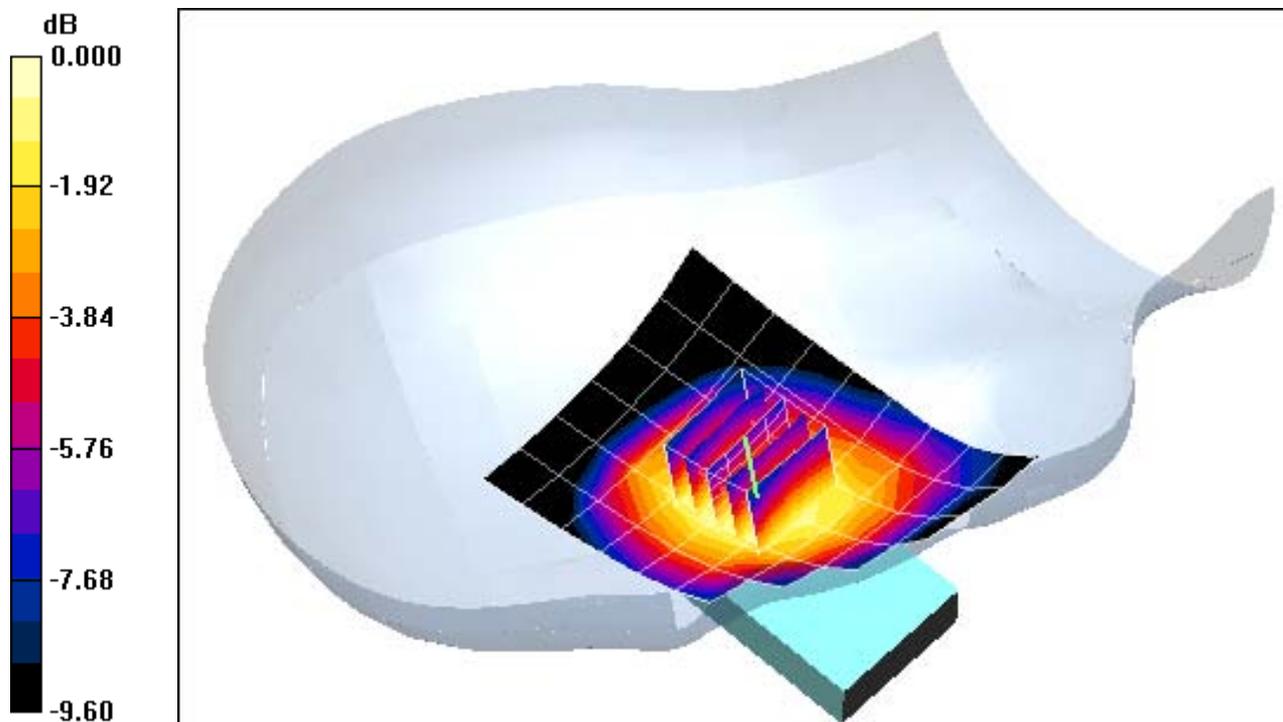

0 dB = 0.250mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Left Head, Slide In, Touch, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.82 V/m

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.235 mW/g

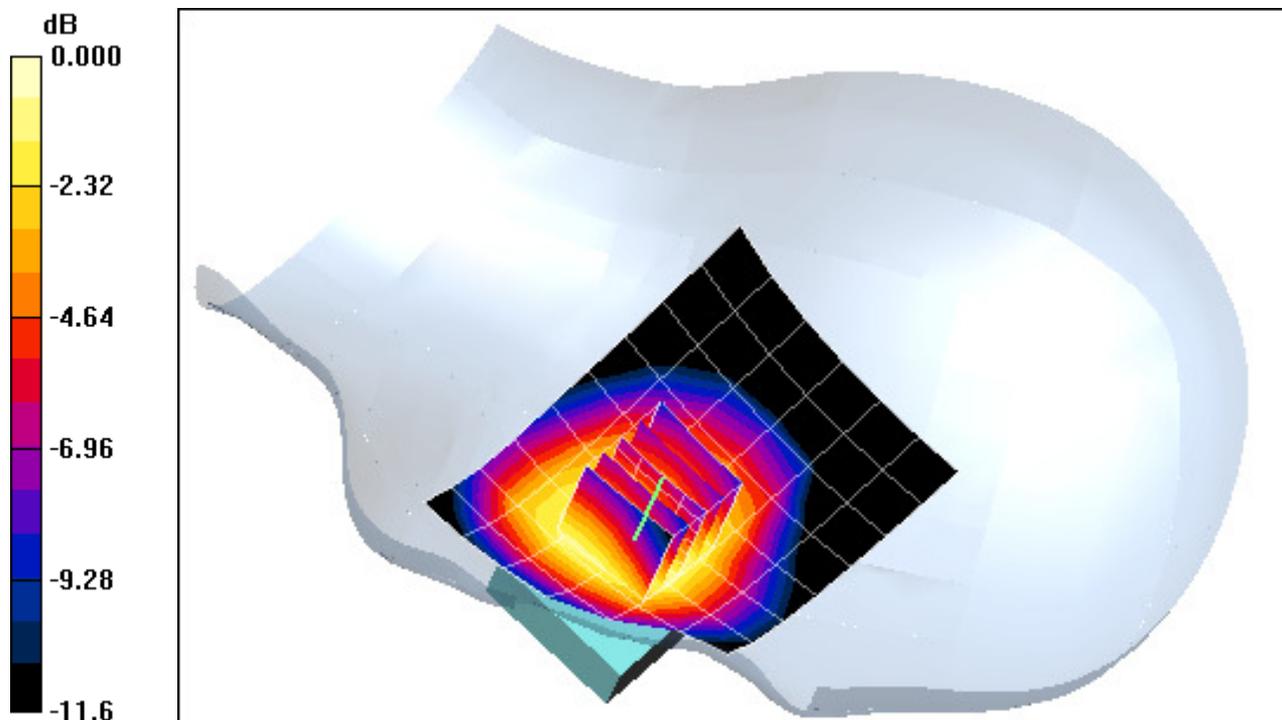

0 dB = 0.350mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Left Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.70 V/m

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.133 mW/g

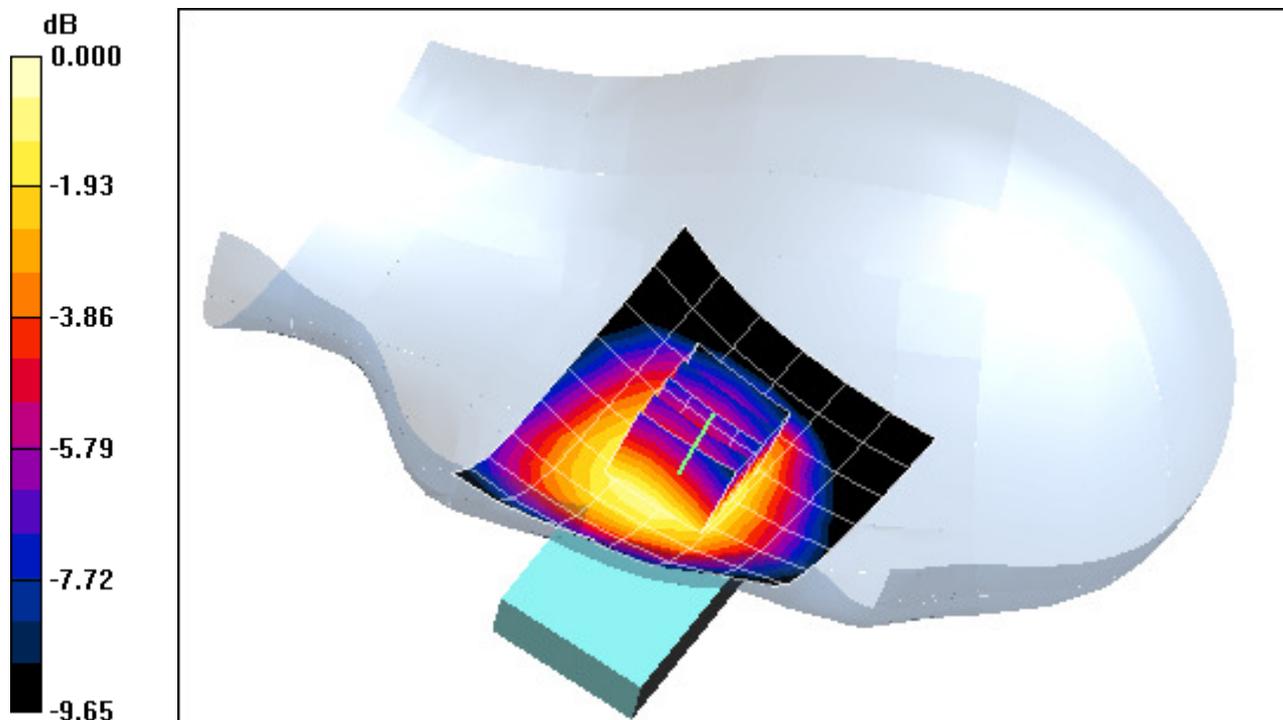

0 dB = 0.203mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Right Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.3 V/m

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.428 mW/g

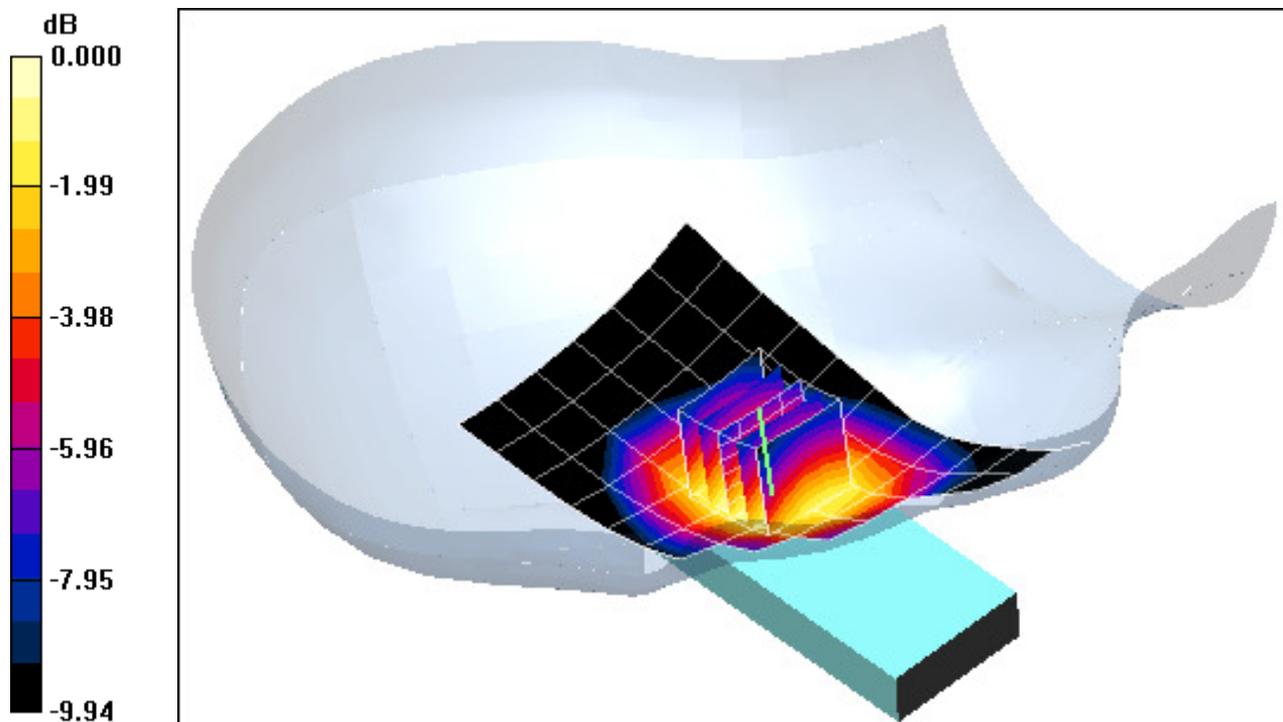

0 dB = 0.648mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6$ MHz; $\sigma = 0.943$ mho/m; $\epsilon_r = 43.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Right Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.1 V/m

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.215 mW/g

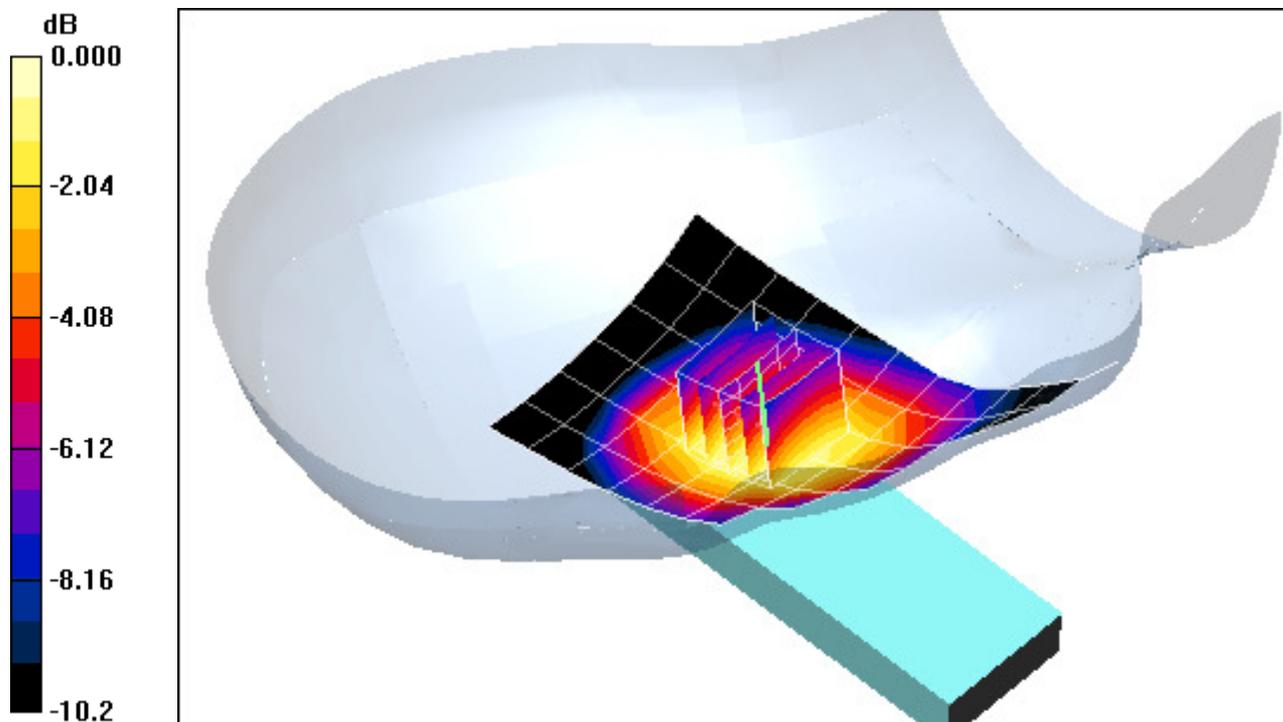

0 dB = 0.322mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Left Head, Slide Out, Touch, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.40 V/m
Peak SAR (extrapolated) = 0.701 W/kg
SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.404 mW/g

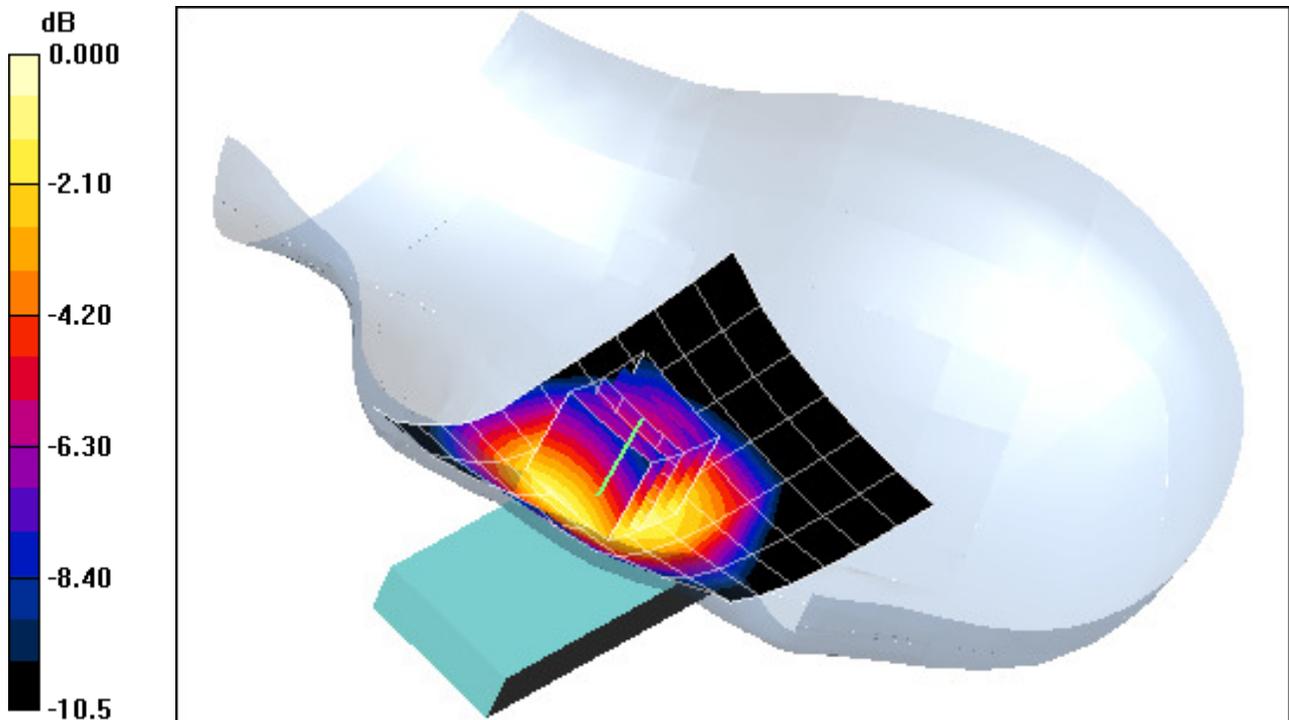

0 dB = 0.607mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 850, Left Head, Slide Out, Tilt, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.98 V/m
Peak SAR (extrapolated) = 0.320 W/kg
SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.186 mW/g

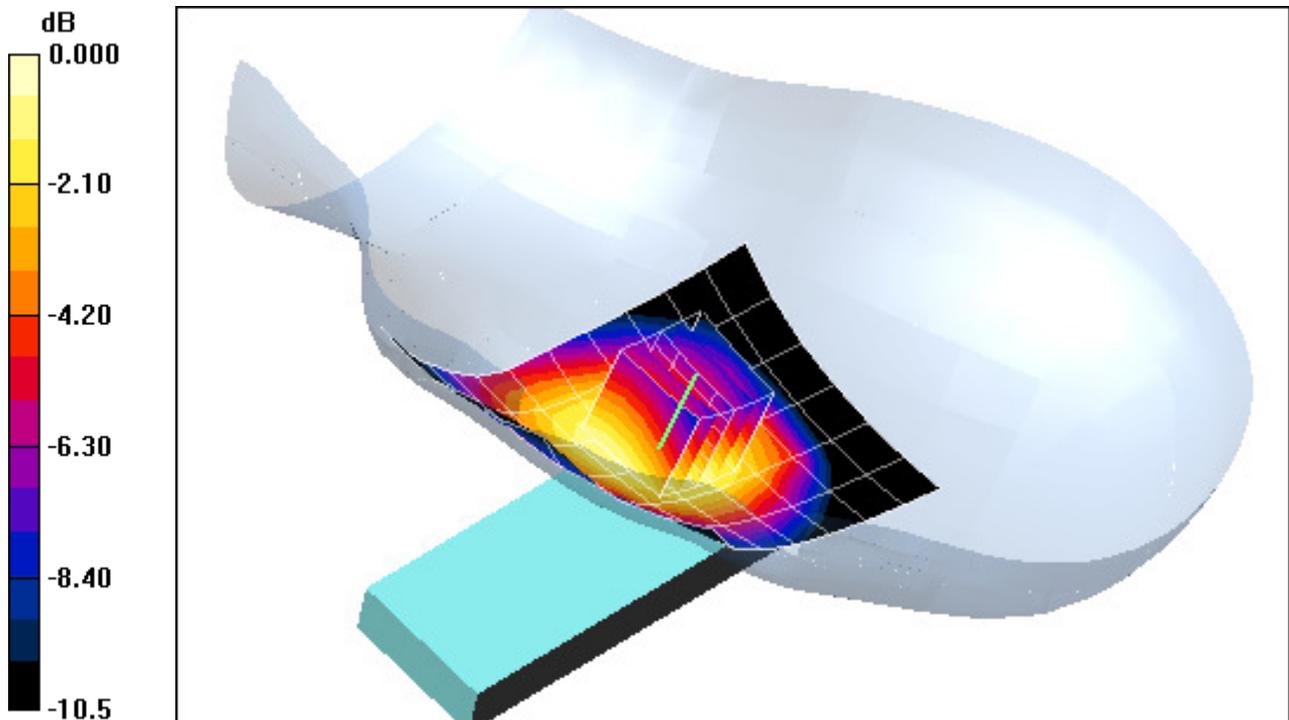

0 dB = 0.275mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850 GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium: 835 Muscle Medium parameters used (interpolated):

$$f = 836.6 \text{ MHz}; \sigma = 0.984 \text{ mho/m}; \epsilon_r = 53.4; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-01-2009; Ambient Temp: 23.5°C; Tissue Temp: 22.9 °C

Probe: ES3DV2 - SN3022; ConvF(5.96, 5.96, 5.96); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GPRS 850, Body SAR, Back side, Slide In, Mid.ch, 2 Tx Slots


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.7 V/m

Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.381 mW/g

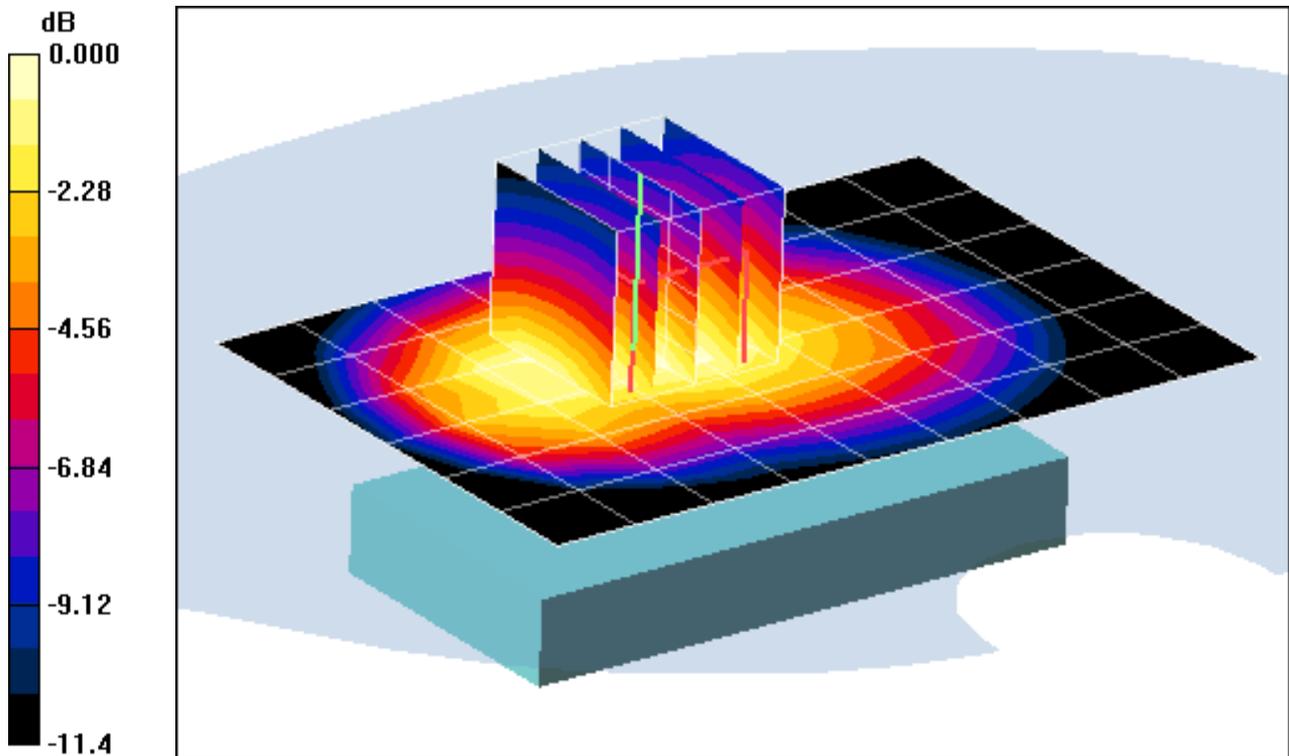

0 dB = 0.651mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15
Medium: 1900 Muscle Medium parameters used:

$$f = 1880 \text{ MHz}; \sigma = 1.54 \text{ mho/m}; \epsilon_r = 51.5; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-01-2009; Ambient Temp: 23.5°C; Tissue Temp: 22.9 °C

Probe: ES3DV2 - SN3022; ConvF(4.5, 4.5, 4.5); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GPRS 1900, Body SAR, Back side, Slide In, Mid.ch, 2 Tx Slots


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.169 mW/g

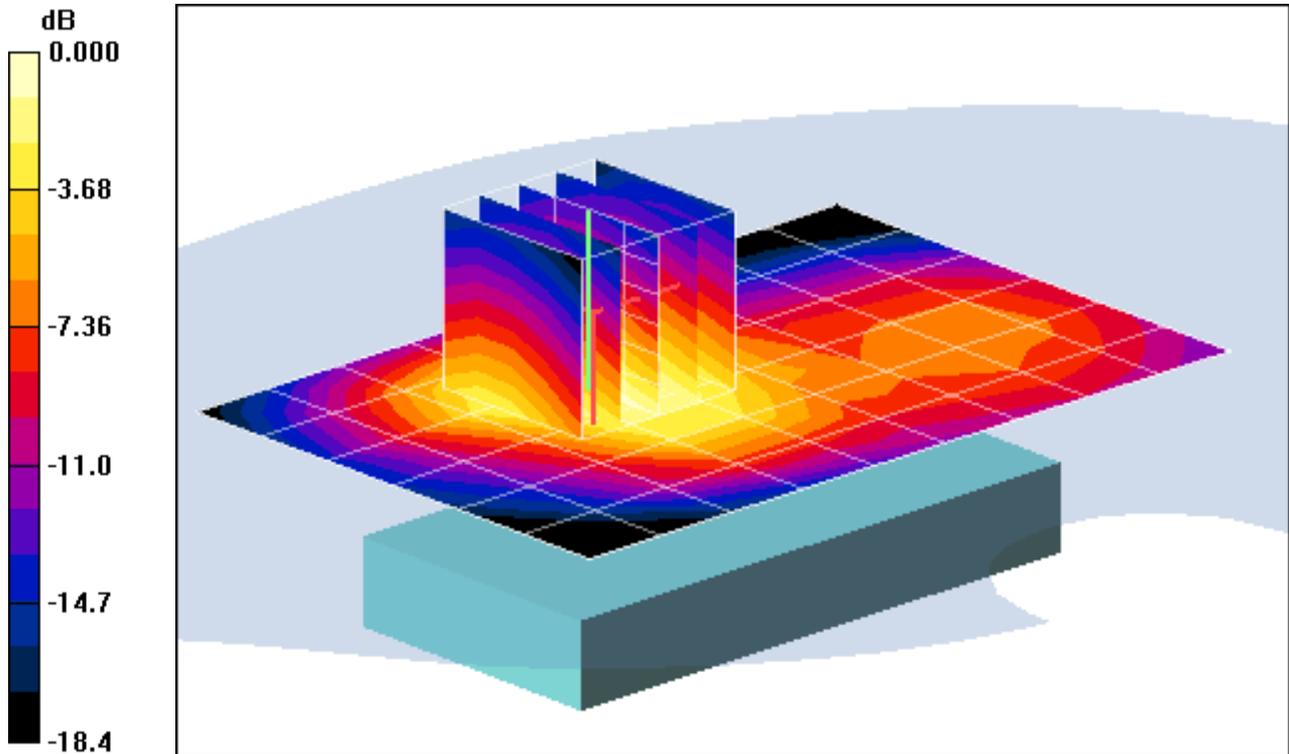

0 dB = 0.367mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Right Head, Slide In, Touch, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.18 V/m

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.197 mW/g

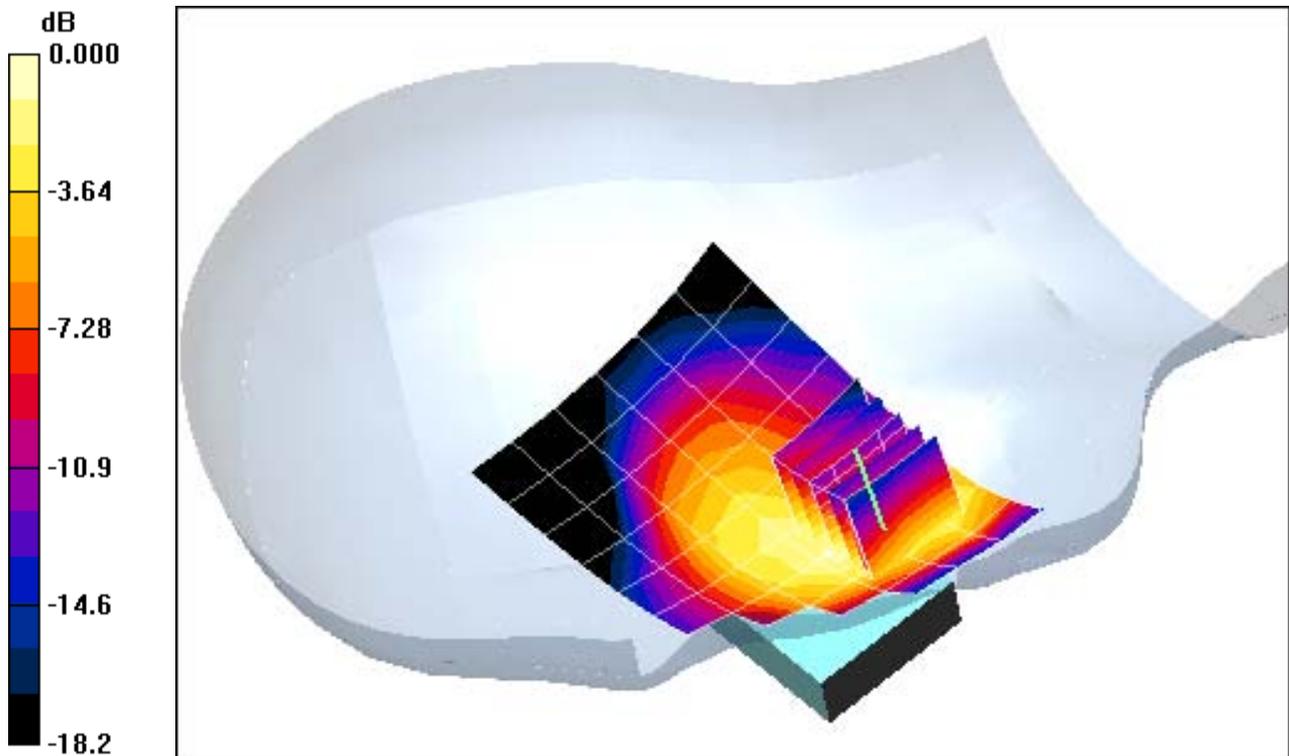

0 dB = 0.387mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Right Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.74 V/m

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.080 mW/g

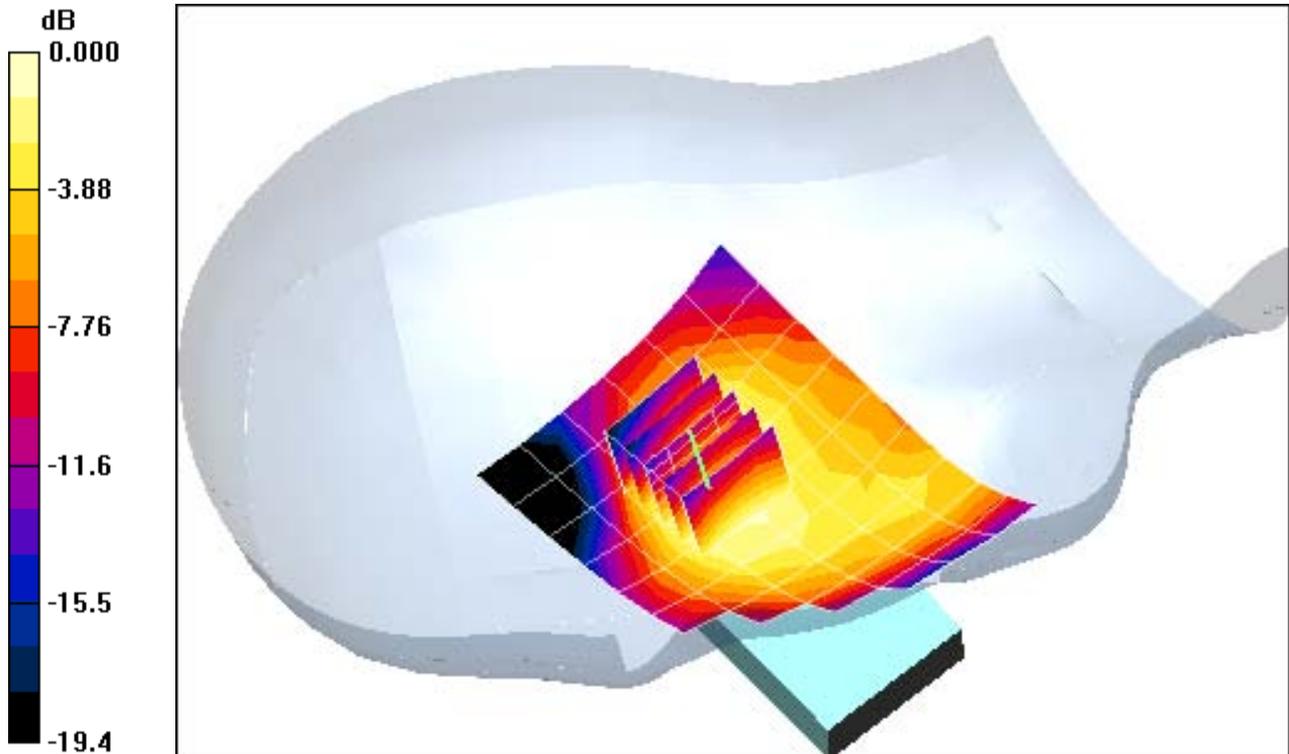

0 dB = 0.150mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Left Head, Slide In, Touch, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.93 V/m

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.195 mW/g

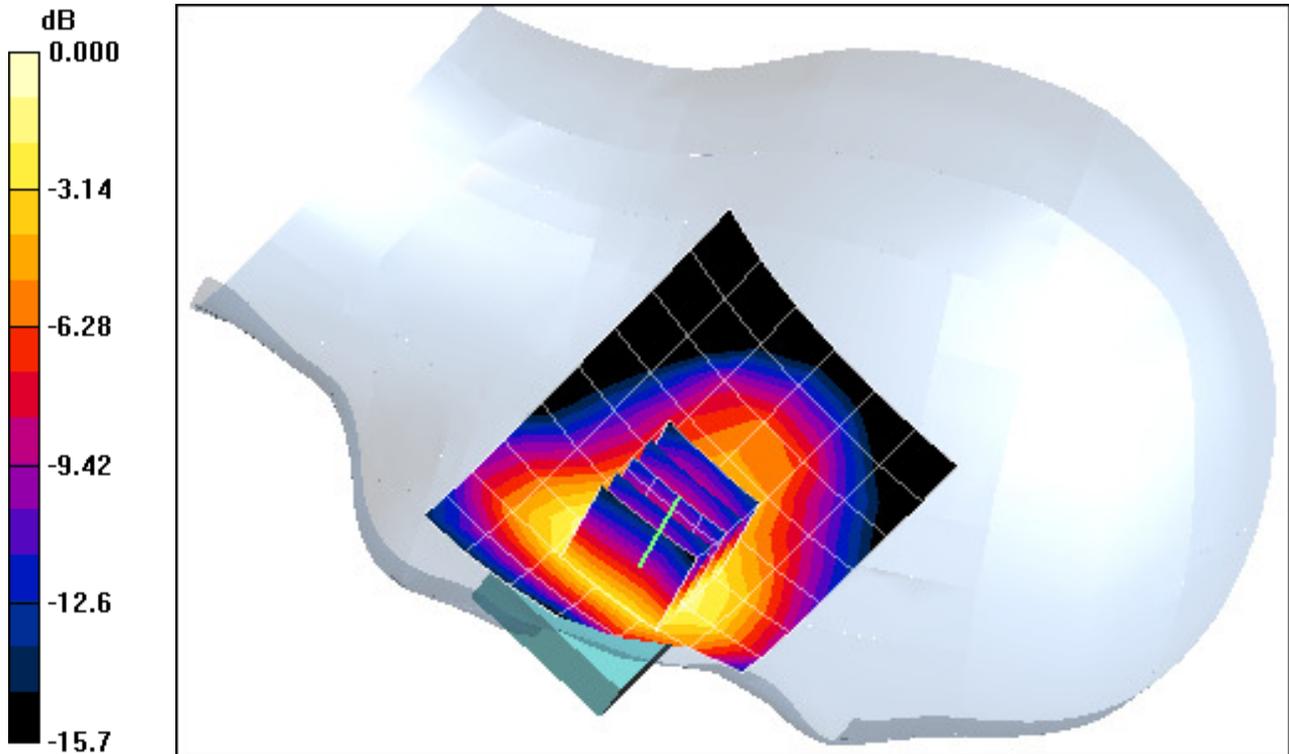

0 dB = 0.378mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Left Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.22 V/m

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.074 mW/g

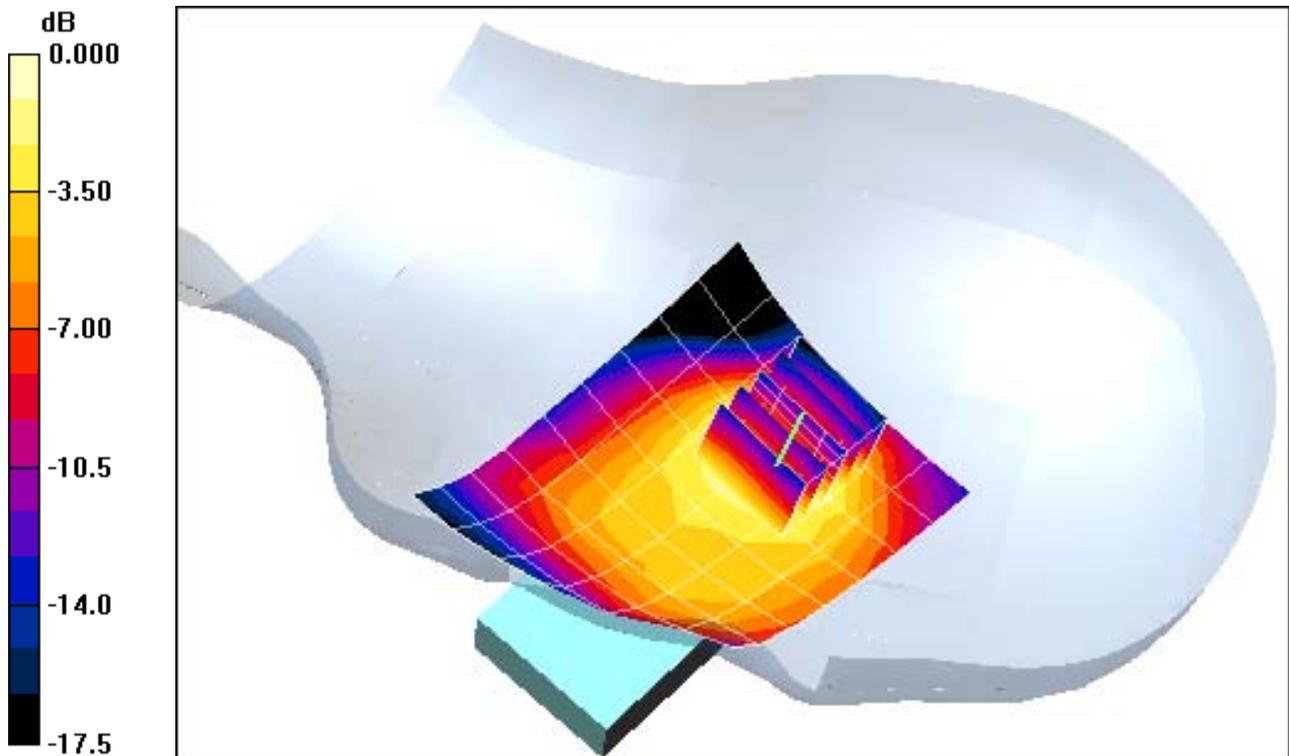

0 dB = 0.148mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Right Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.36 V/m

Peak SAR (extrapolated) = 0.534 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.206 mW/g

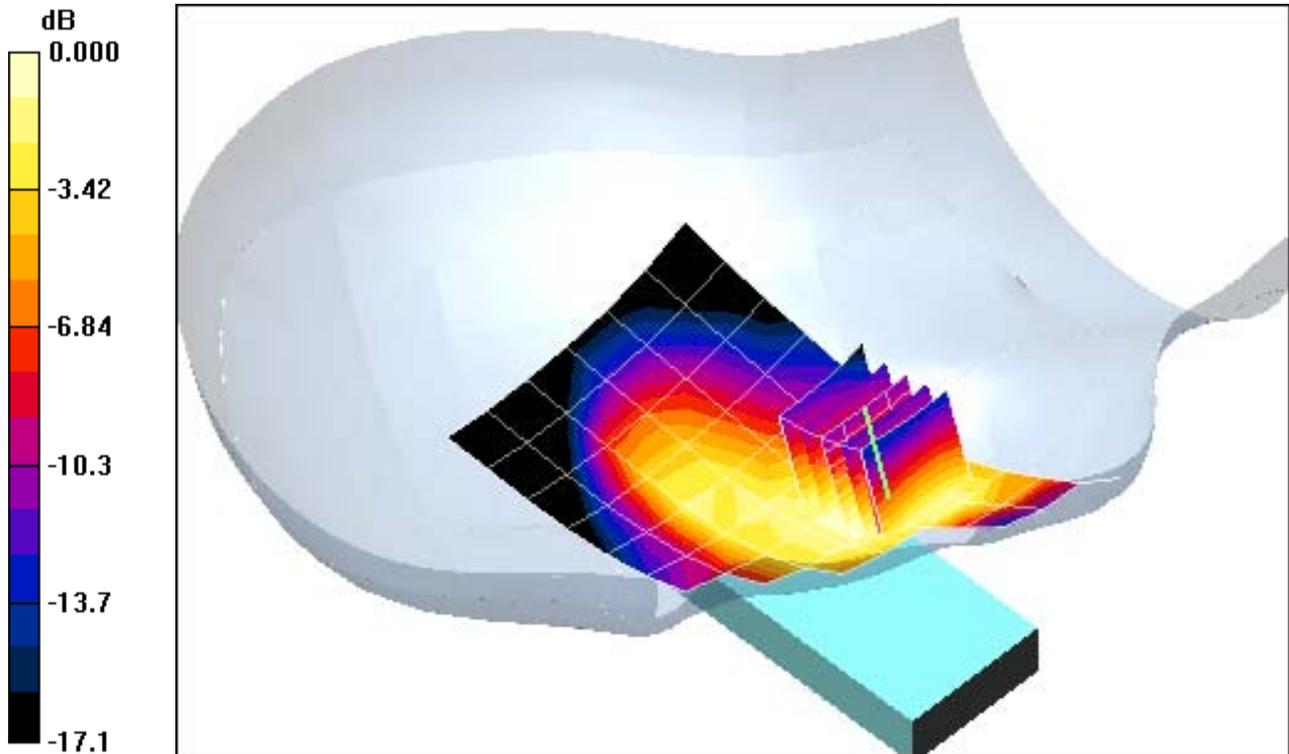

0 dB = 0.385mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Right Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.95 V/m

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.134 mW/g

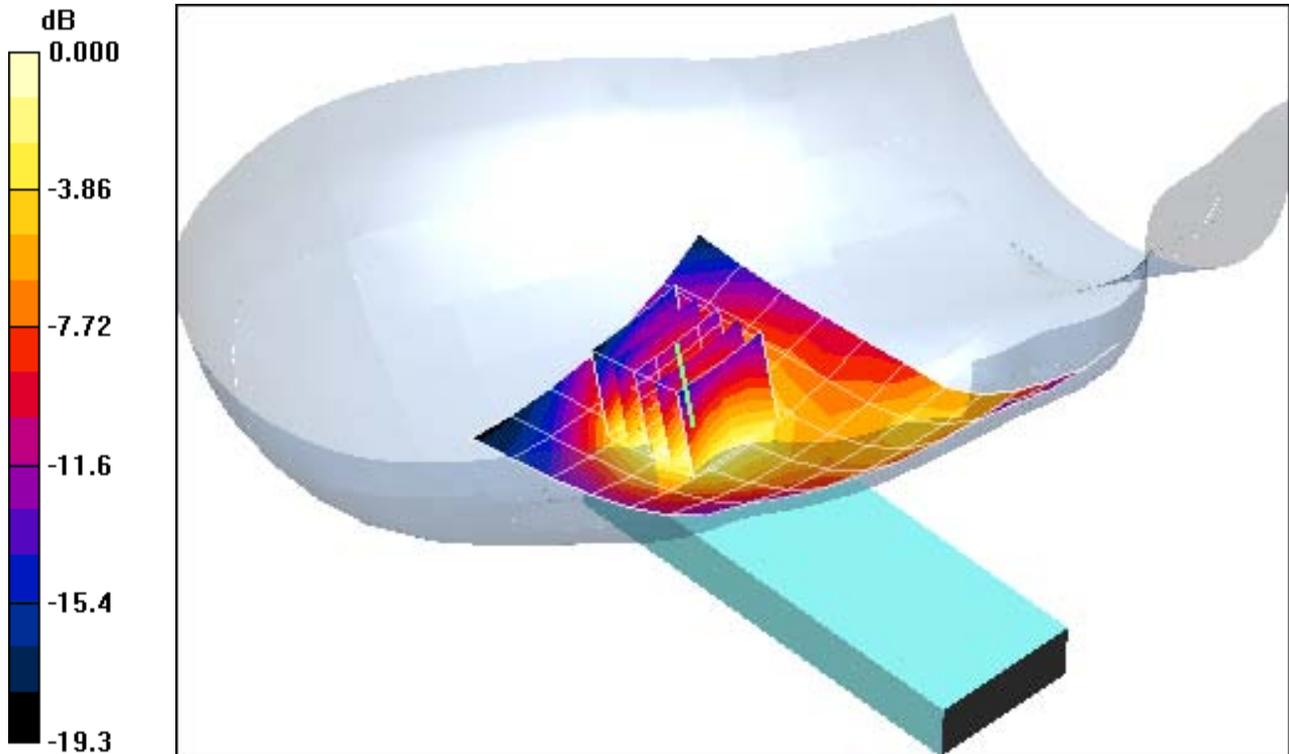

0 dB = 0.260mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Left Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.96 V/m

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.174 mW/g

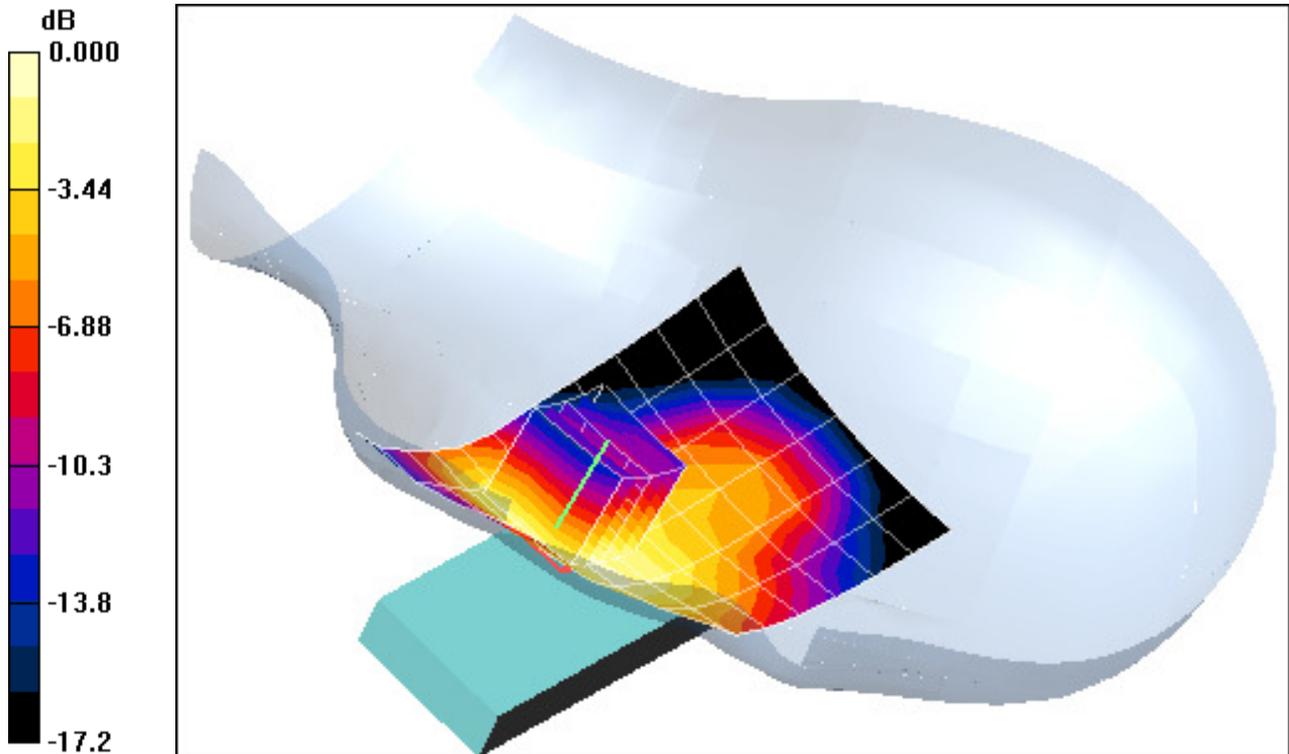

0 dB = 0.332mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GSM 1900, Left Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.108 mW/g

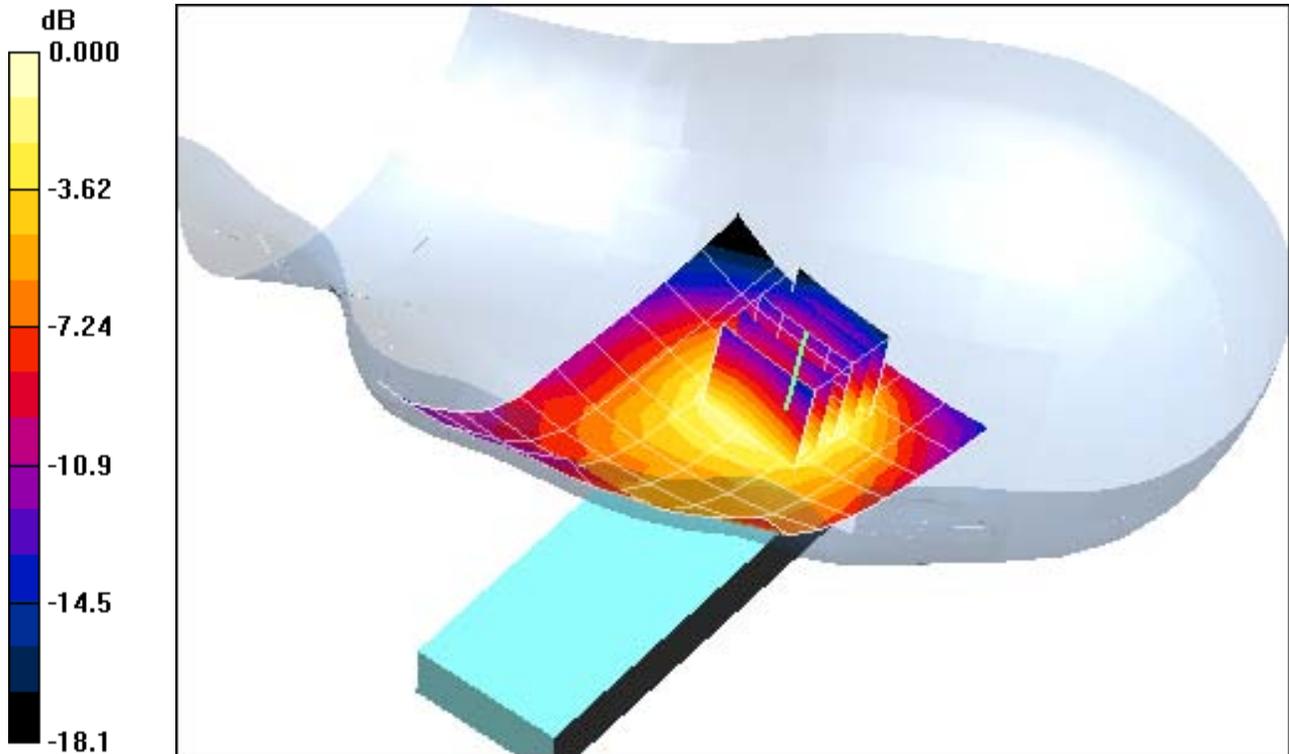

0 dB = 0.210mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Right Head, Slide In, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.8 V/m
Peak SAR (extrapolated) = 0.476 W/kg
SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.247 mW/g

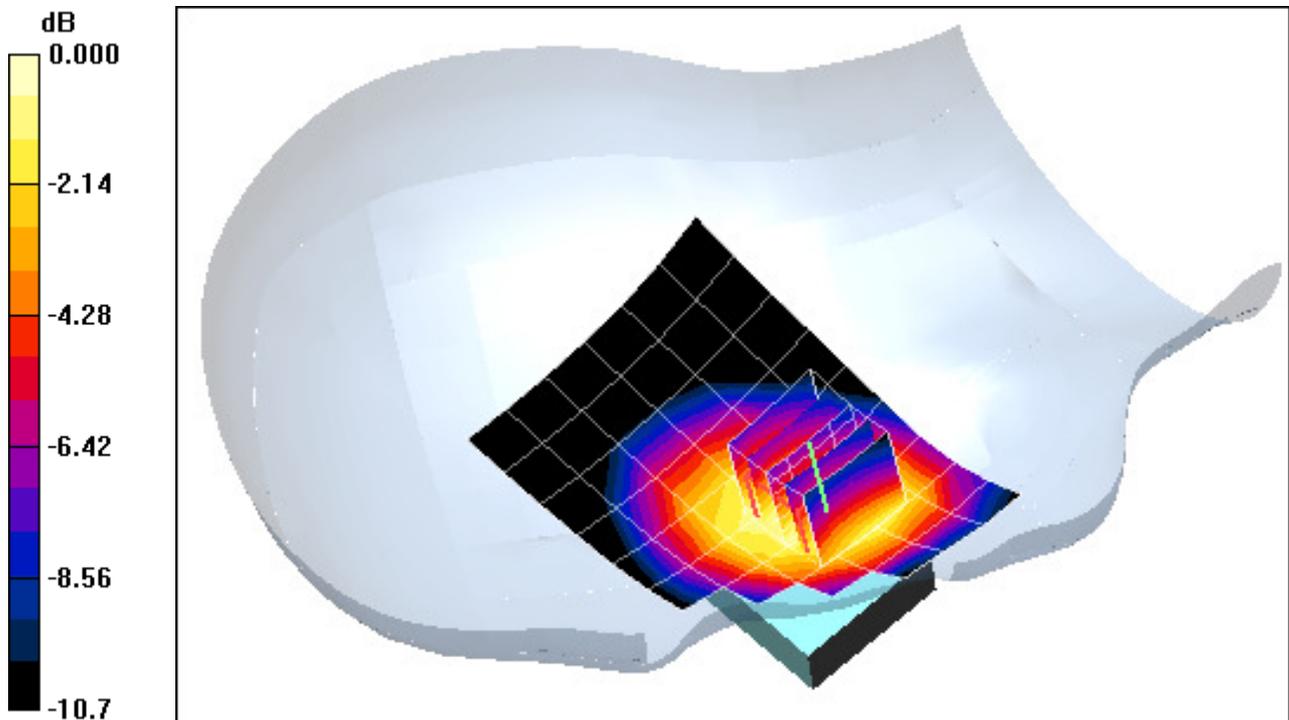

0 dB = 0.382mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Right Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.3 V/m

Peak SAR (extrapolated) = 0.298 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.170 mW/g

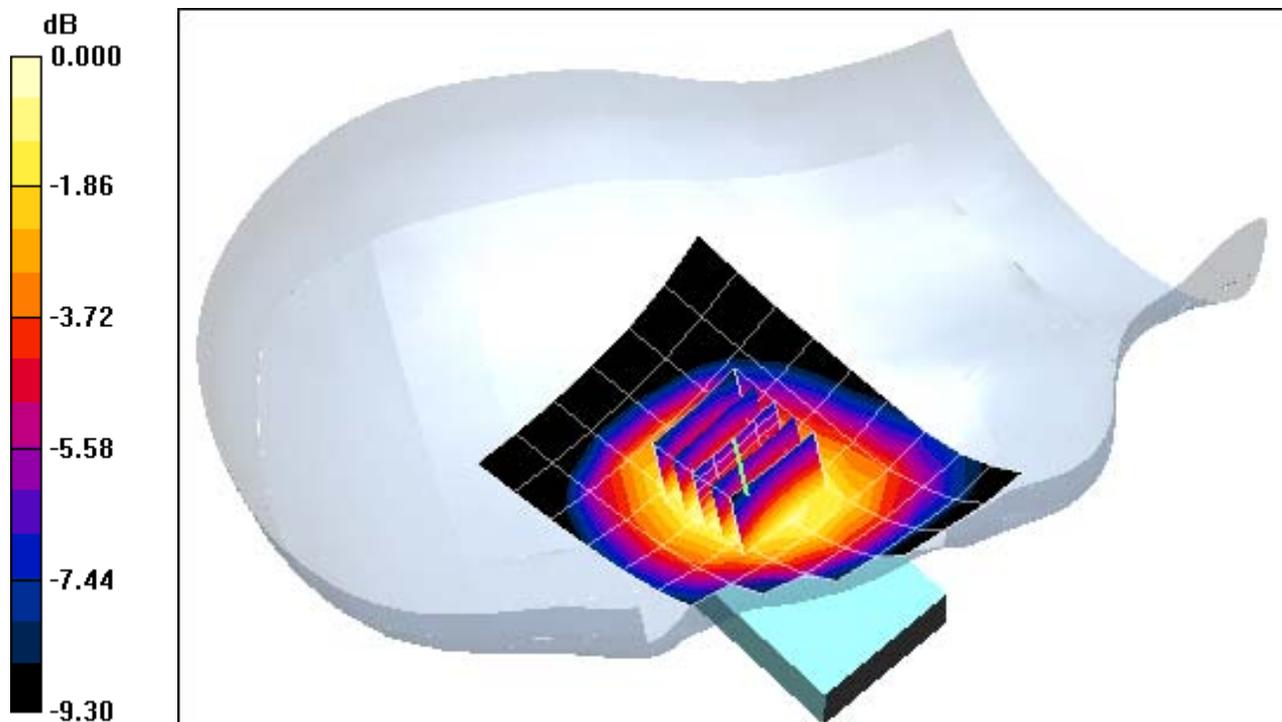

0 dB = 0.256mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Left Head, Slide In, Touch, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.95 V/m
Peak SAR (extrapolated) = 0.412 W/kg
SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.245 mW/g

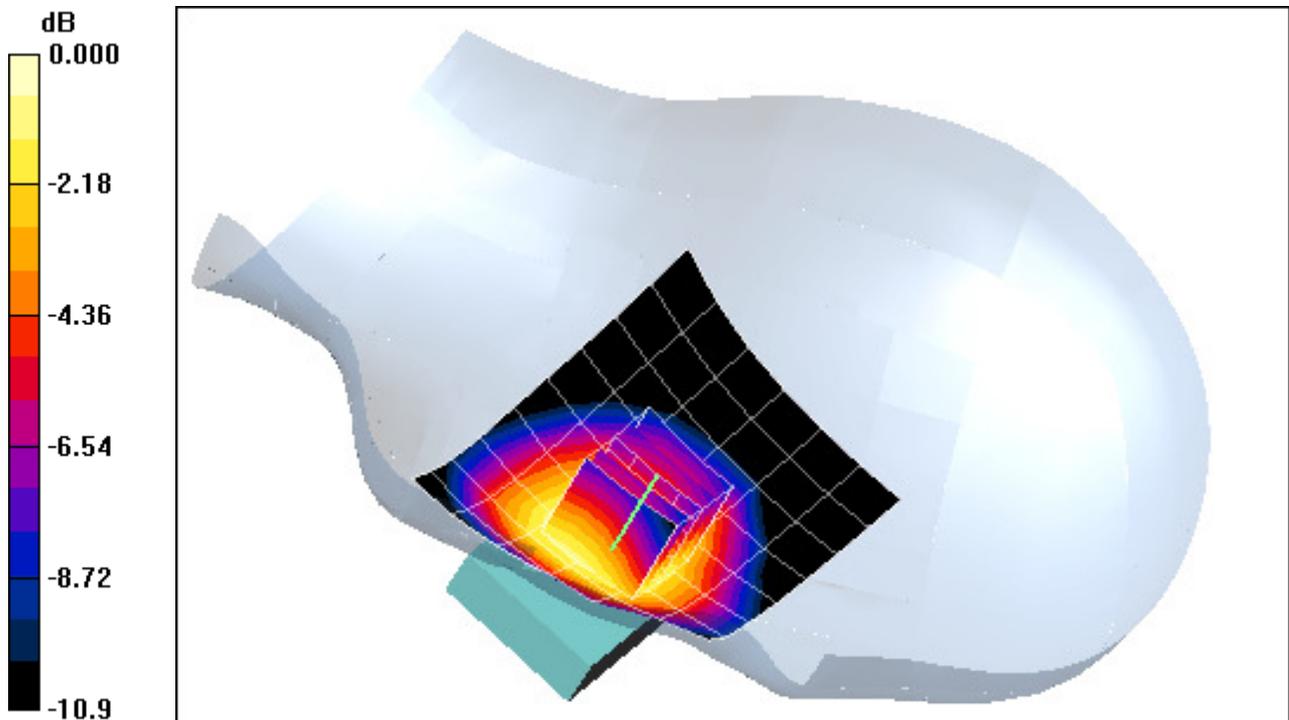

0 dB = 0.363mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Left Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.23 V/m

Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.131 mW/g

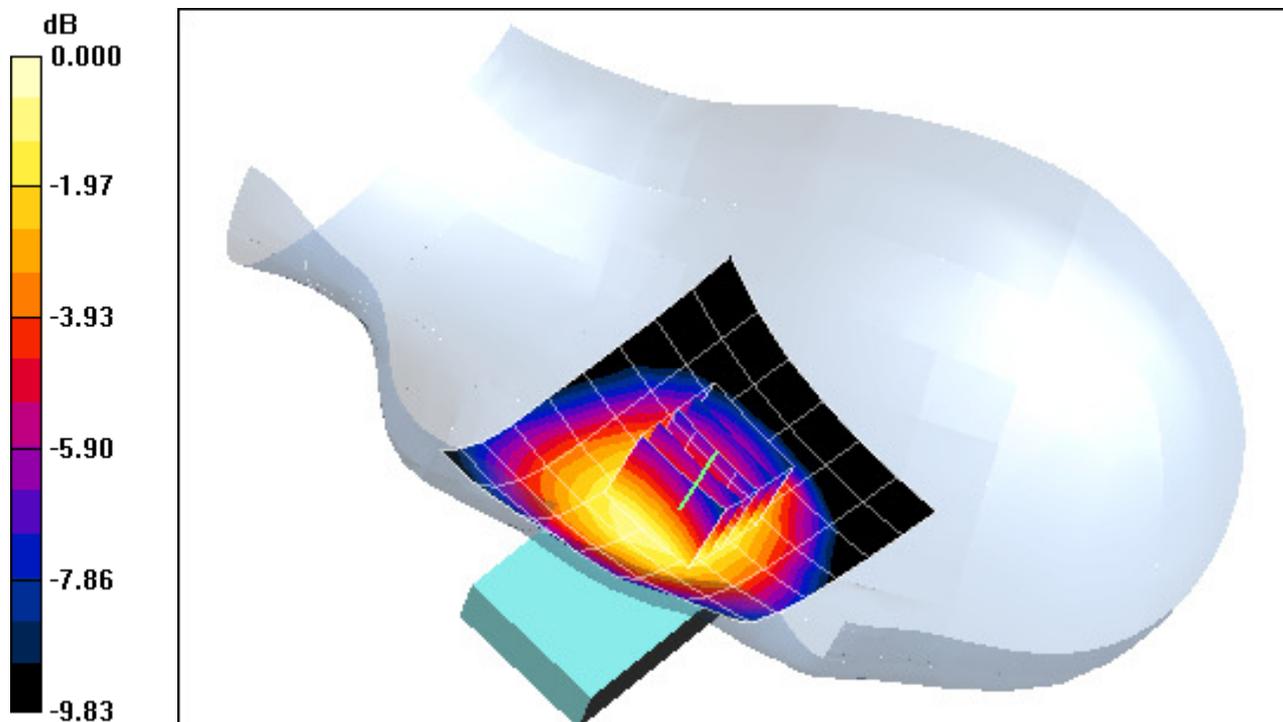

0 dB = 0.197mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Right Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.6 V/m

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.510 mW/g

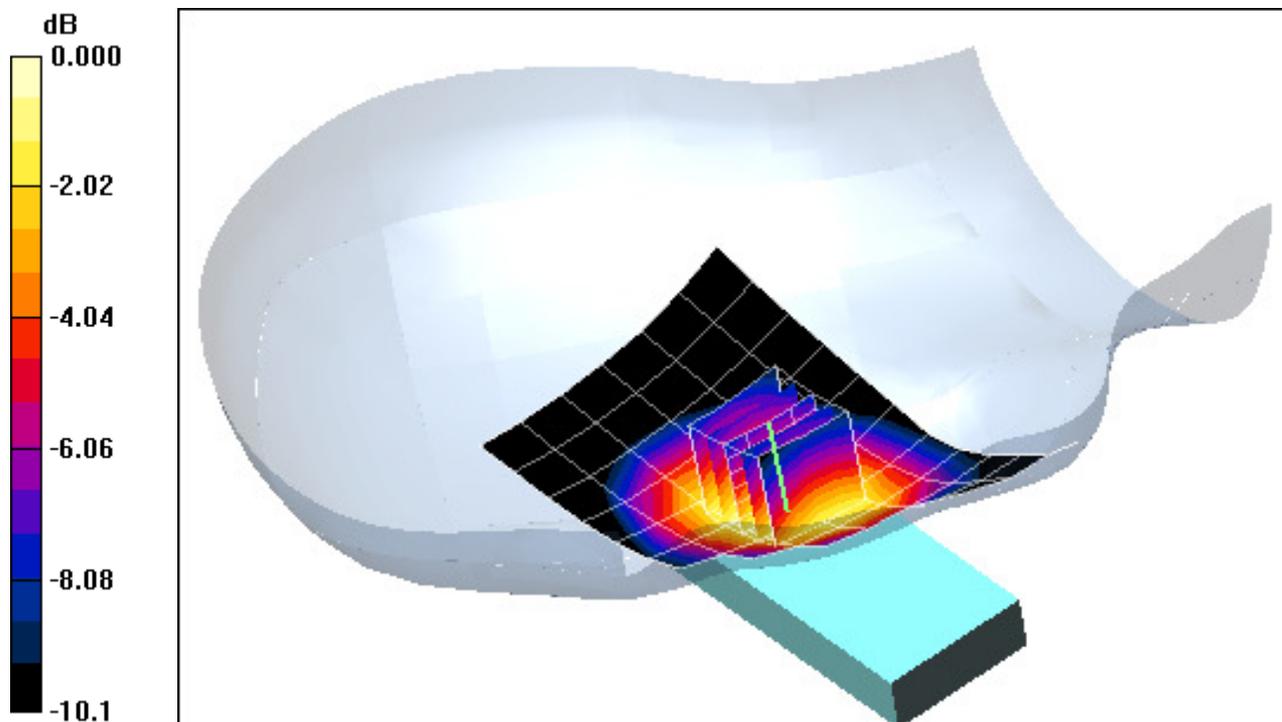

0 dB = 0.774mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Brain Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Right Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.8 V/m

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.383 mW/g; SAR(10 g) = 0.282 mW/g

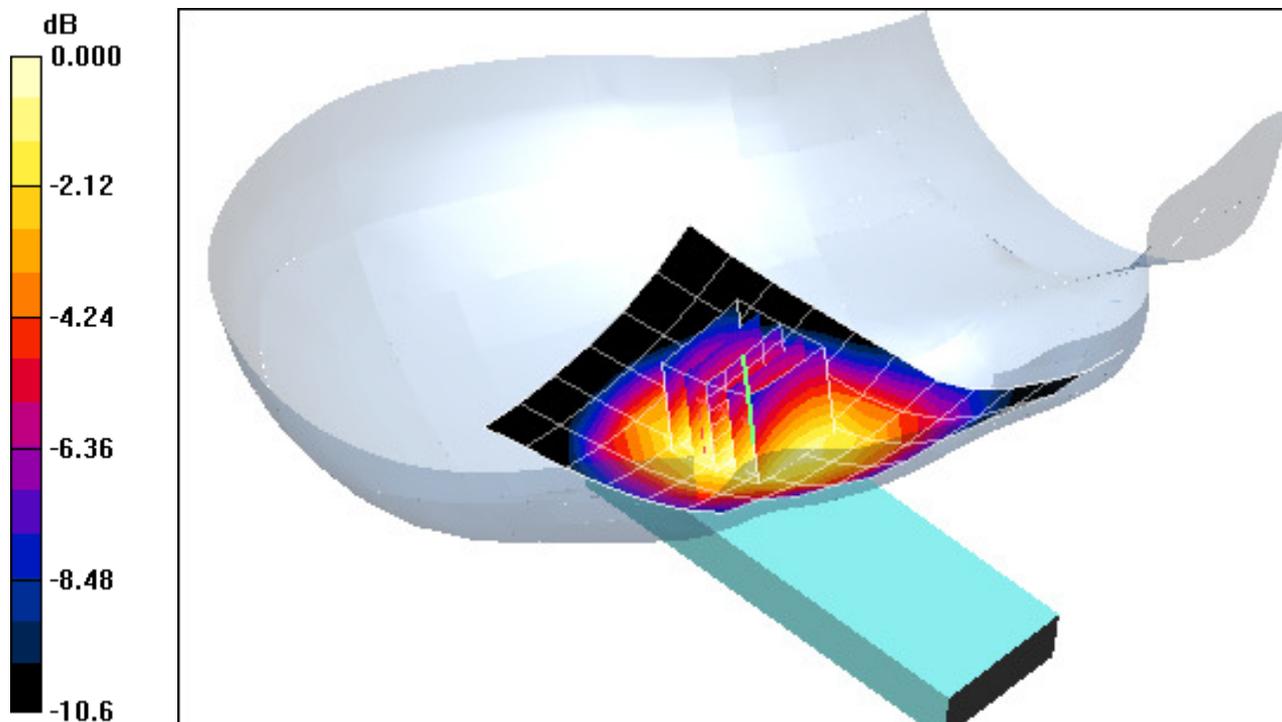

0 dB = 0.424mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Left Head, Slide Out, Touch, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.46 V/m
Peak SAR (extrapolated) = 0.908 W/kg
SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.516 mW/g

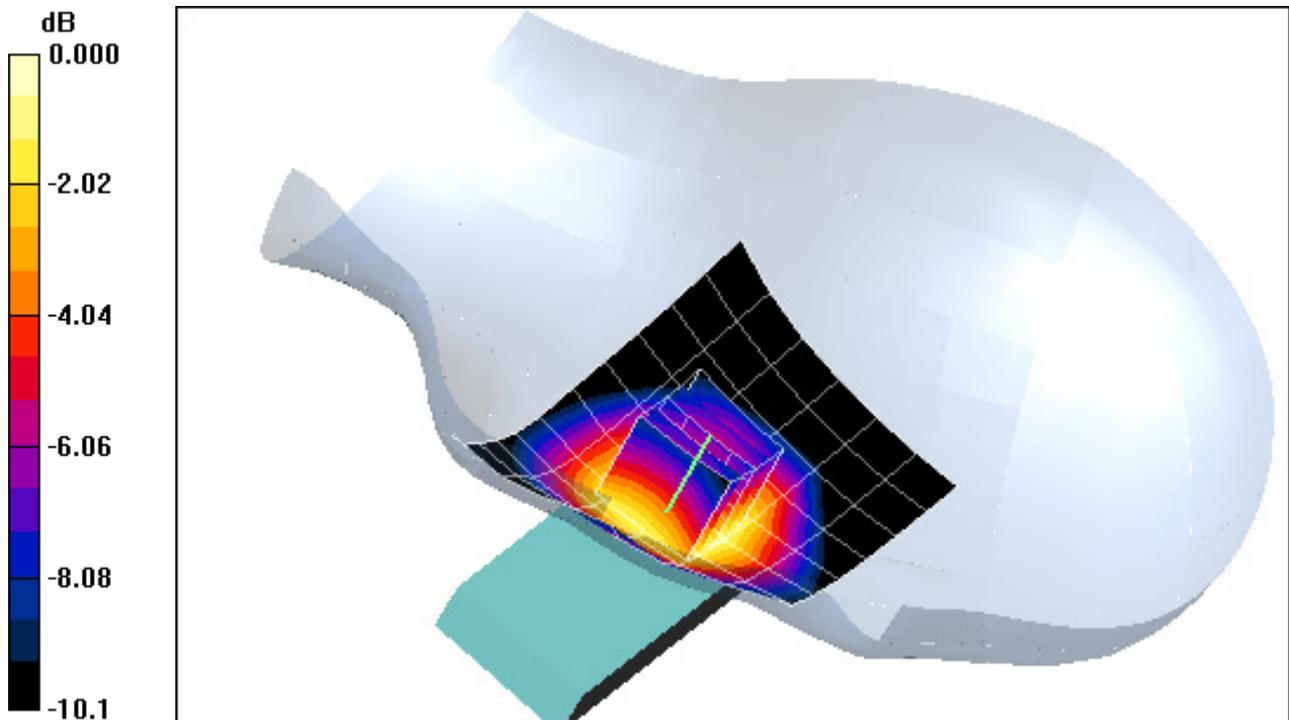

0 dB = 0.795mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Left Head, Slide Out, Tilt, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.0 V/m
Peak SAR (extrapolated) = 0.519 W/kg
SAR(1 g) = 0.399 mW/g; SAR(10 g) = 0.290 mW/g

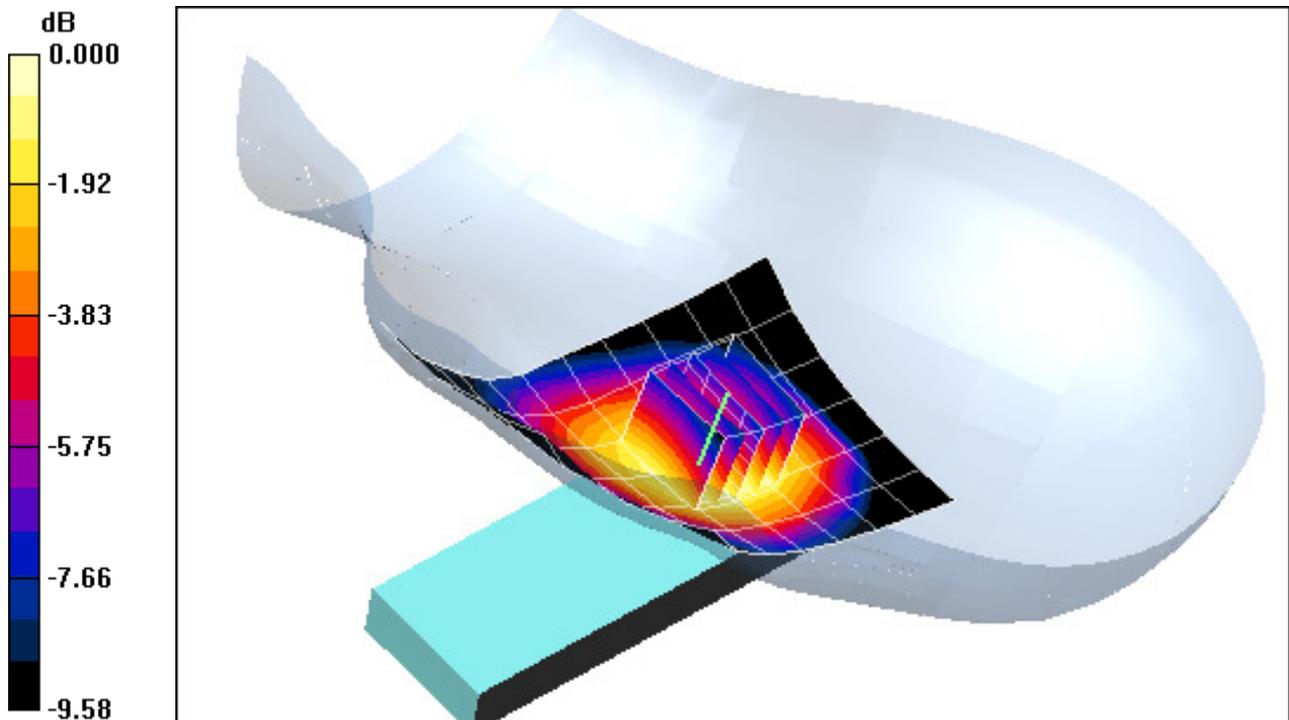

0 dB = 0.445mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Muscle Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.984 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-29-2009; Ambient Temp: 24.0°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(5.96, 5.96, 5.96); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Body SAR, Back side, Slide In, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.8 V/m
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.545 mW/g; SAR(10 g) = 0.369 mW/g

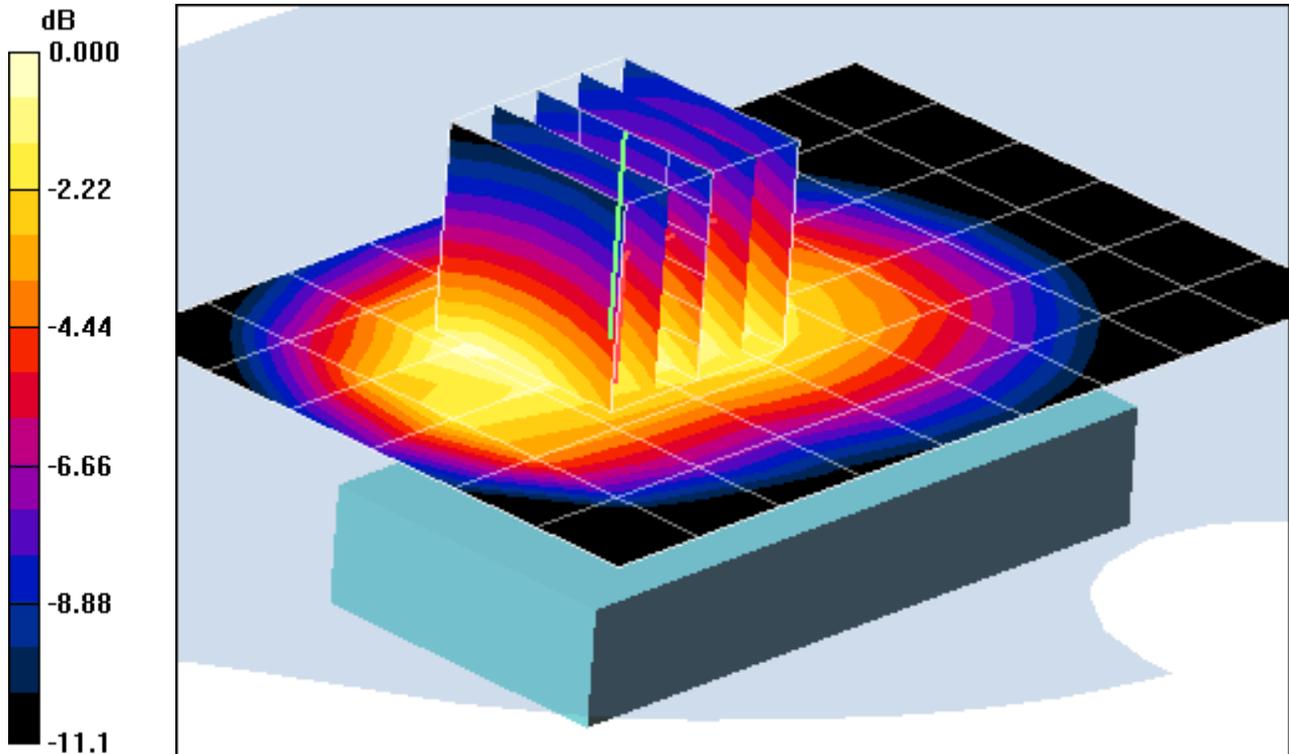

0 dB = 0.625mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Muscle Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.54 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-01-2009; Ambient Temp: 23.5°C; Tissue Temp: 22.9 °C

Probe: ES3DV2 - SN3022; ConvF(4.5, 4.5, 4.5); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Body SAR, Back side, Slide In, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.4 V/m

Peak SAR (extrapolated) = 0.991 W/kg

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.303 mW/g

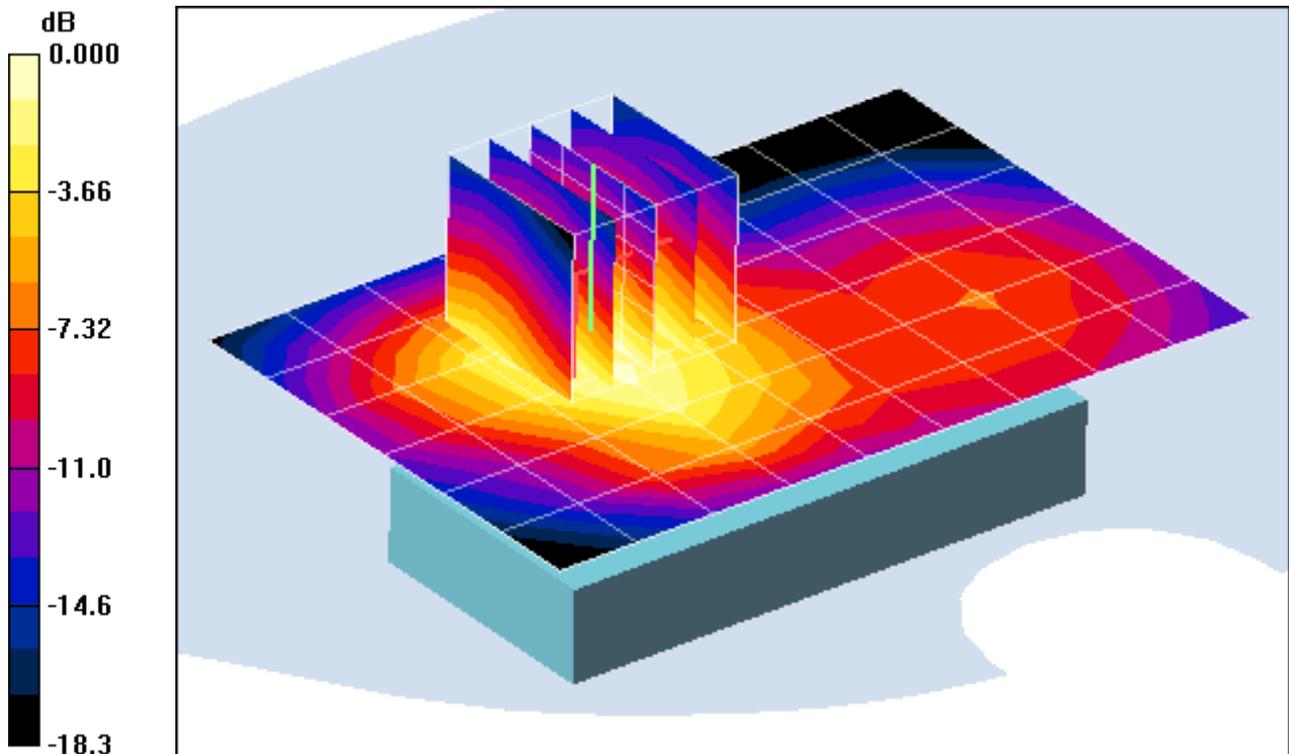

0 dB = 0.648mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$; $\sigma = 1.36 \text{ mho/m}$; $\epsilon_r = 38.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Right Head, Slide In, Touch, Low.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.55 V/m

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.483 mW/g

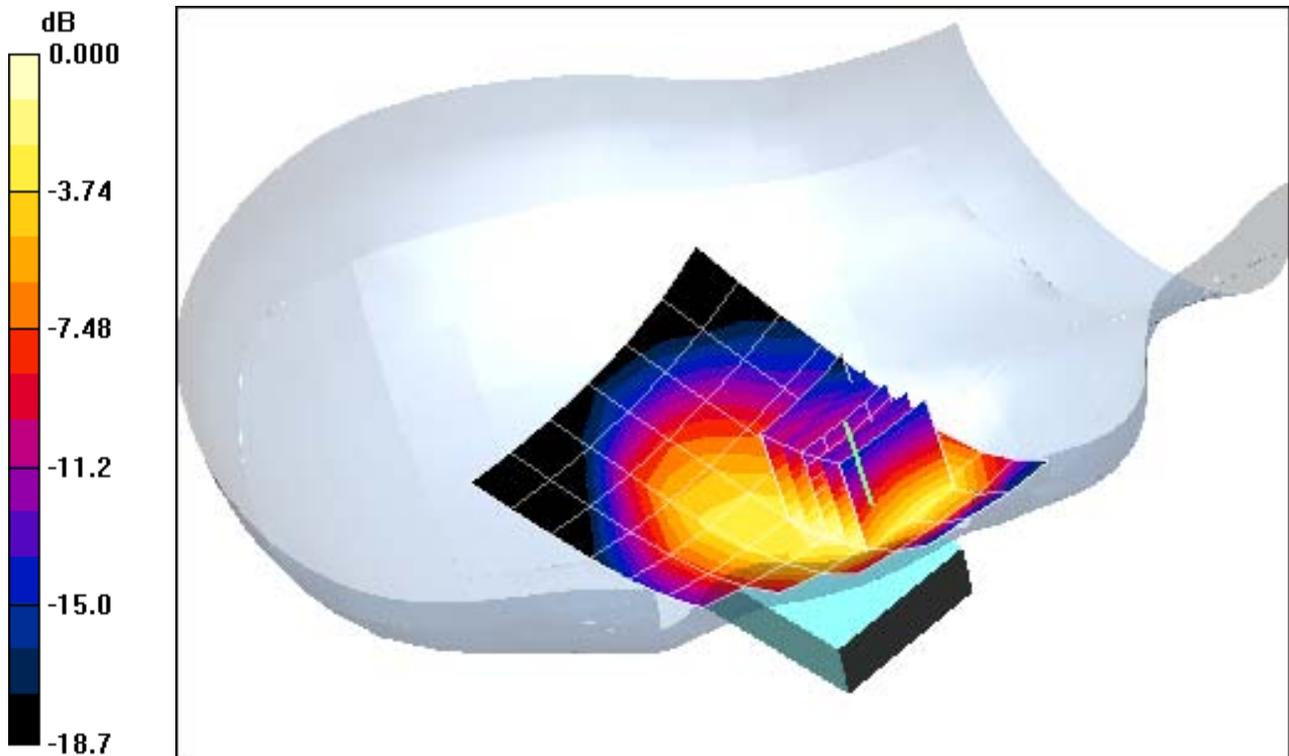

0 dB = 0.994mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Right Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.160 mW/g

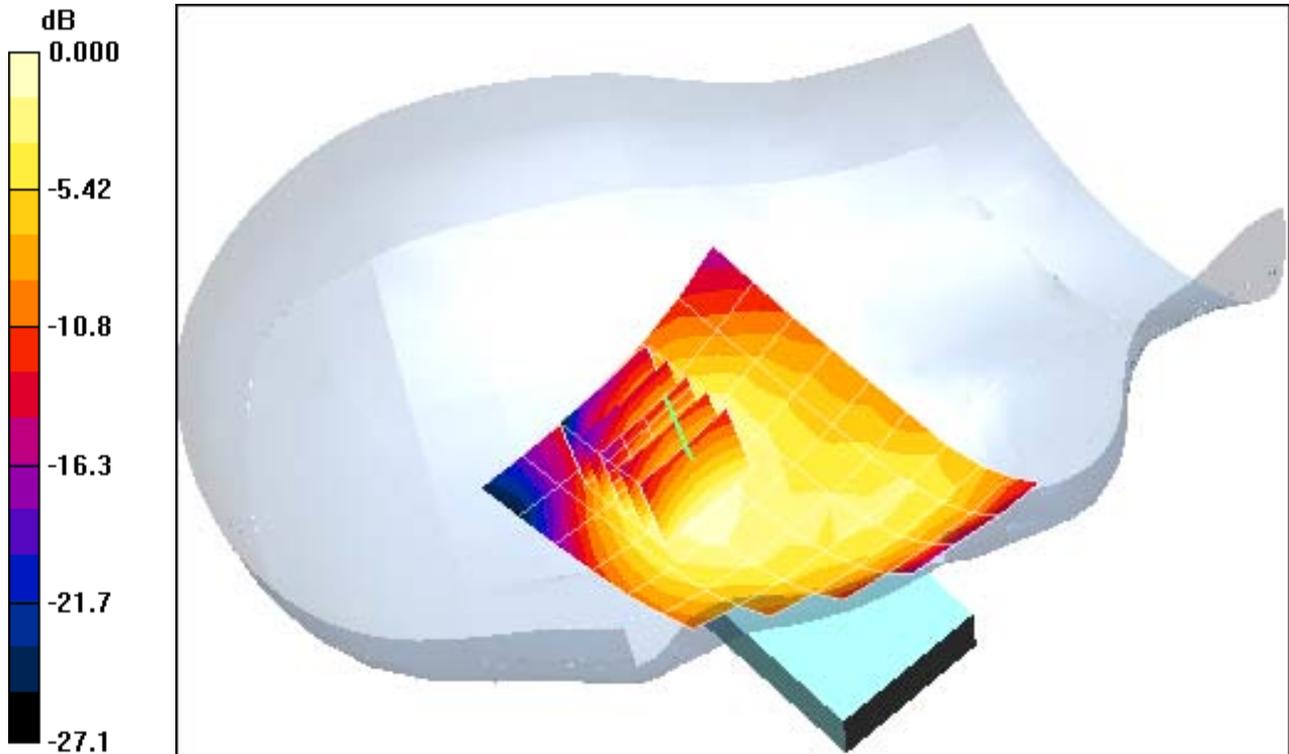

0 dB = 0.304mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Left Head, Slide In, Touch, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.86 V/m

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.377 mW/g

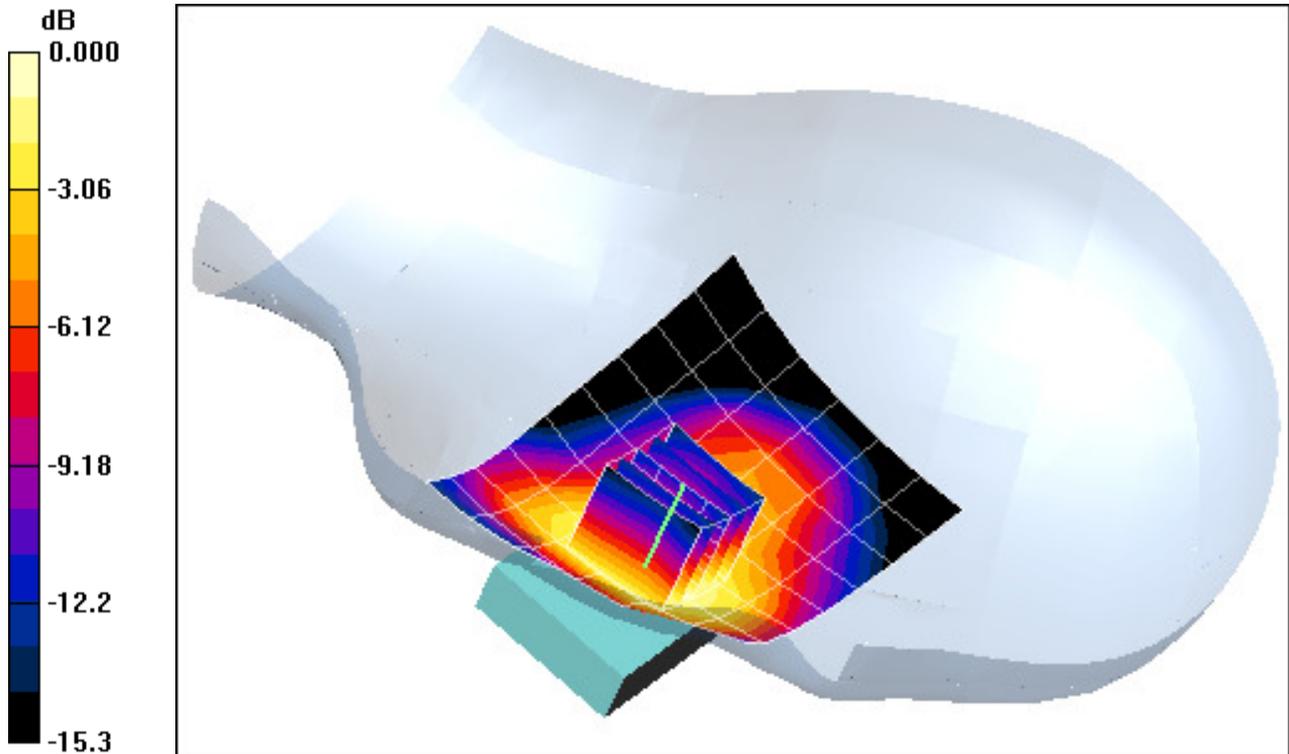

0 dB = 0.705mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Left Head, Slide In, Tilt, Mid.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.138 mW/g

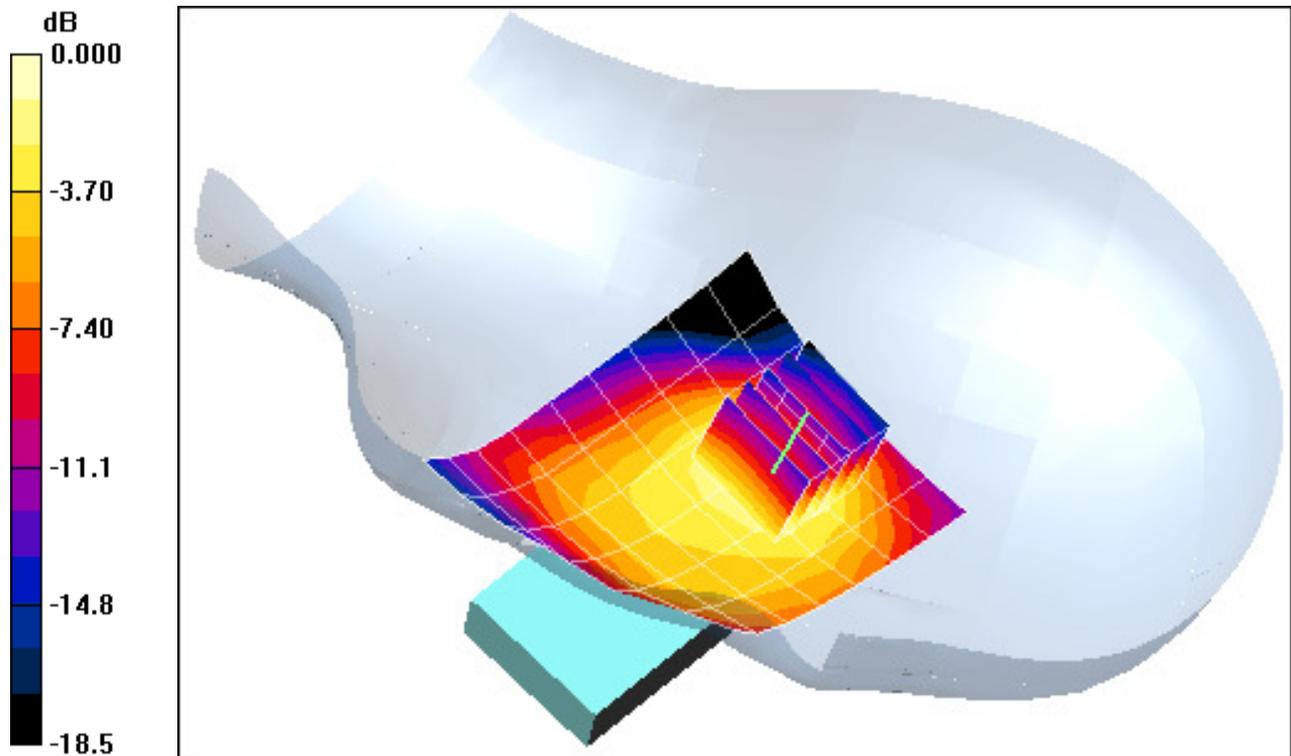

0 dB = 0.280mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Right Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.62 V/m

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.636 mW/g; SAR(10 g) = 0.387 mW/g

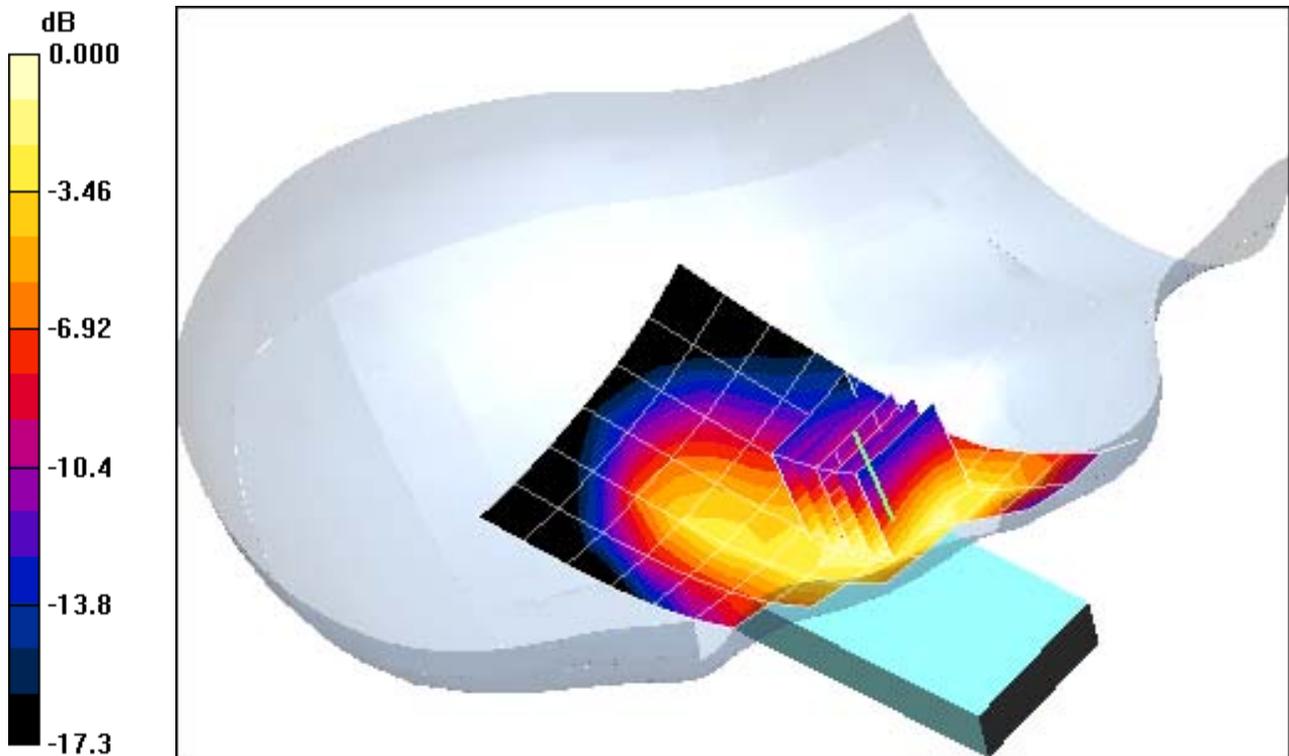

0 dB = 0.749mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Right Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.213 mW/g

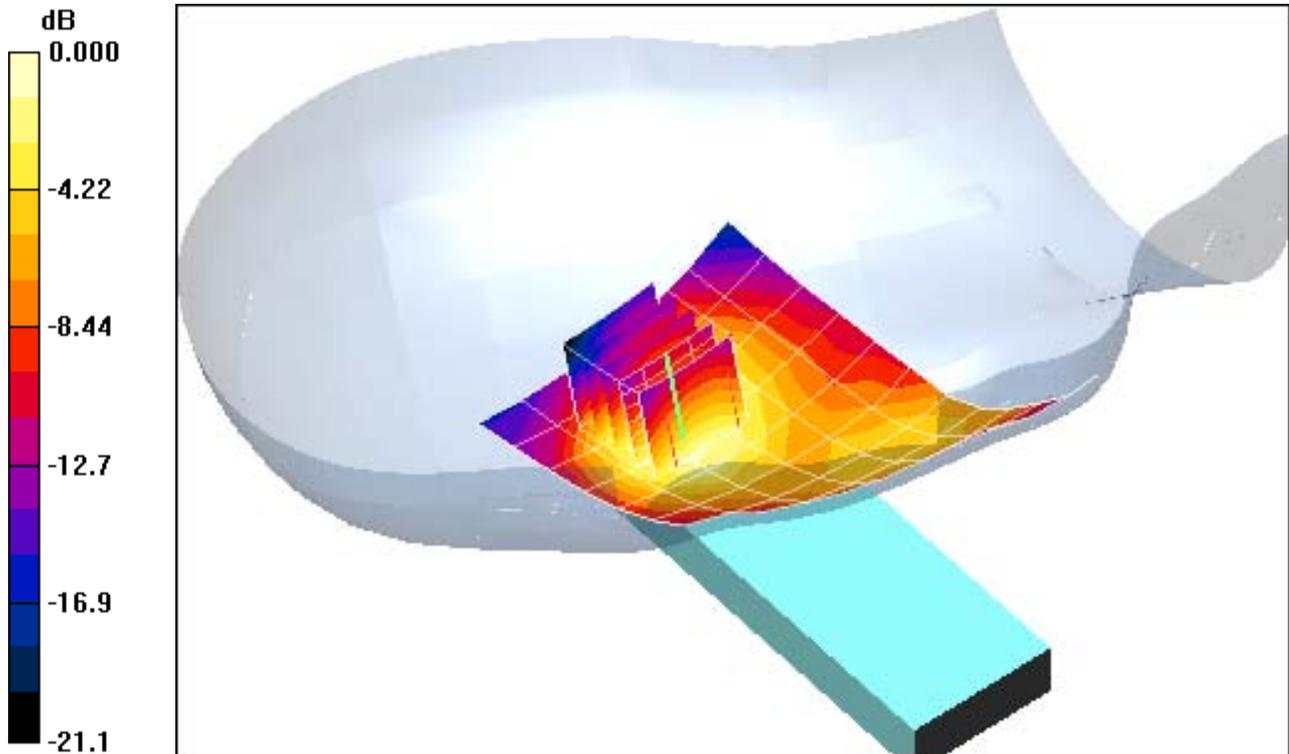

0 dB = 0.411mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used:

$$f = 1880 \text{ MHz}; \sigma = 1.39 \text{ mho/m}; \epsilon_r = 38.7; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Left Head, Slide Out, Touch, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.20 V/m

Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.279 mW/g

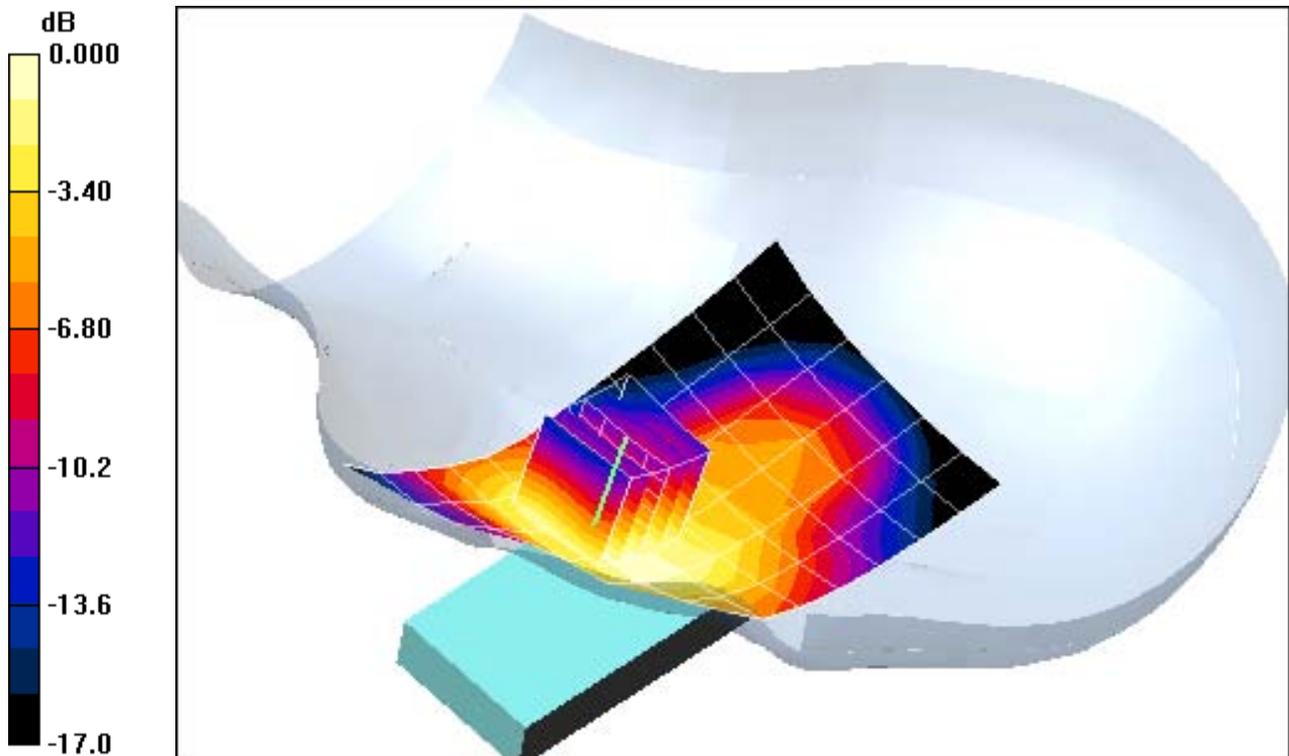

0 dB = 0.524mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT;
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Brain Medium parameters used:

$f = 1880 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Left Head, Slide Out, Tilt, Mid.ch


Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.5 V/m

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.186 mW/g

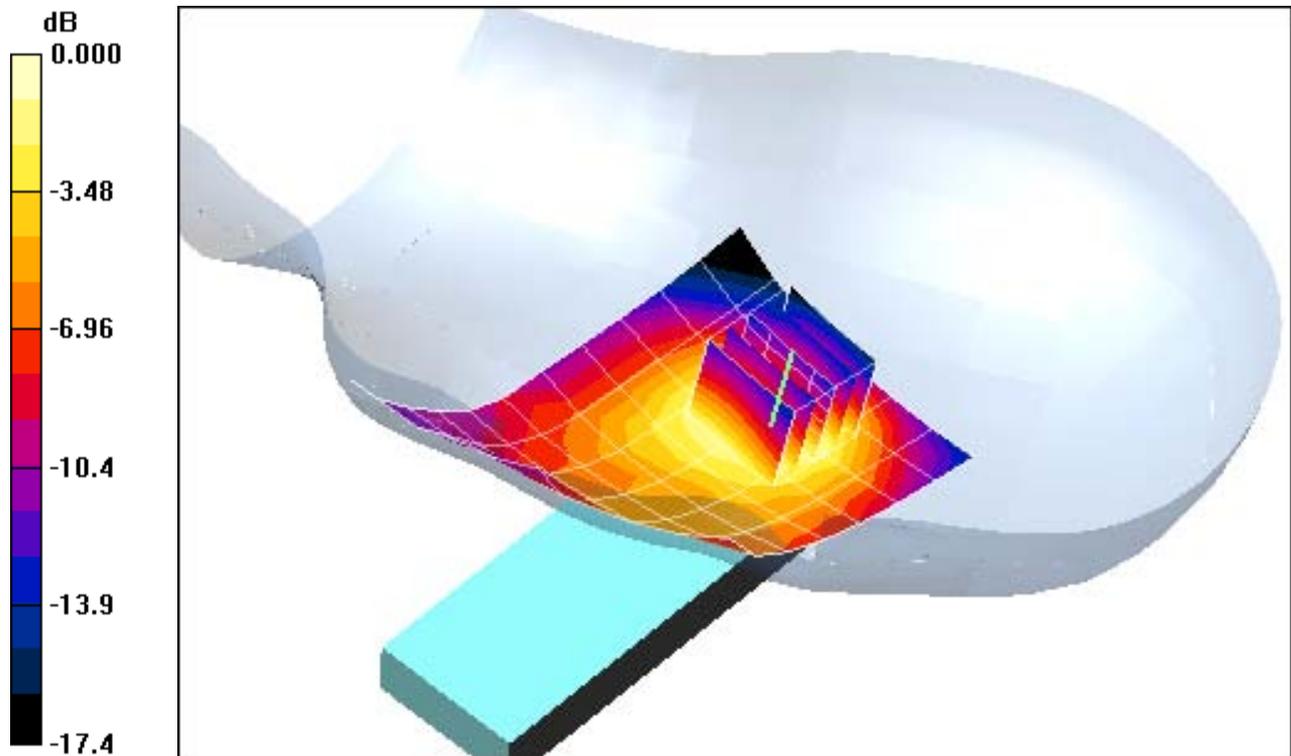

0 dB = 0.362mW/g

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**


Communication System: WCDMA850; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Brain Medium parameters used (interpolated):
 $f = 836.6 \text{ MHz}$; $\sigma = 0.943 \text{ mho/m}$; $\epsilon_r = 43.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

Test Date: 06-29-2009; Ambient Temp: 23.9°C; Tissue Temp: 22.5 °C

Probe: ES3DV2 - SN3022; ConvF(6.15, 6.15, 6.15); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 850, Left Head, Slide Out, Touch, Mid.ch

Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.46 V/m
Peak SAR (extrapolated) = 0.908 W/kg
SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.516 mW/g

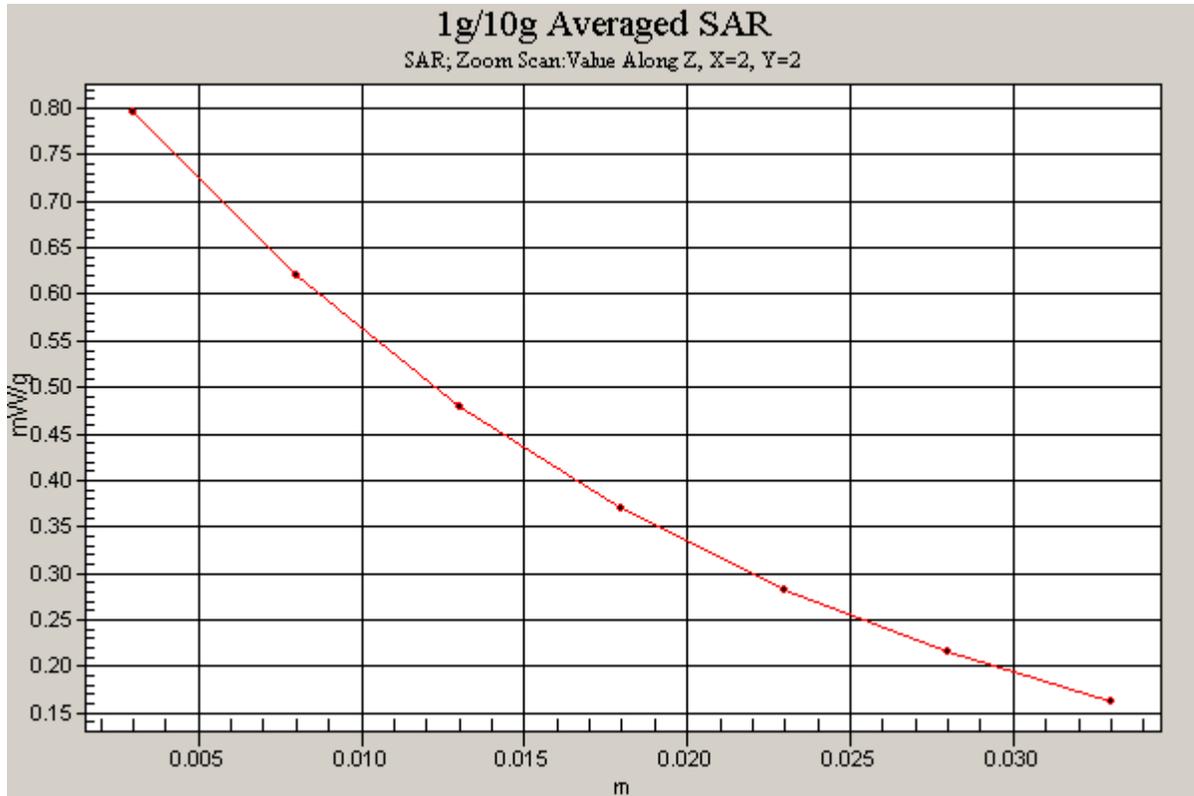

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: GSM850 GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15
Medium: 835 Muscle Medium parameters used (interpolated):

$$f = 836.6 \text{ MHz}; \sigma = 0.984 \text{ mho/m}; \epsilon_r = 53.4; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-29-2009; Ambient Temp: 24.0°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(5.96, 5.96, 5.96); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: GPRS 850, Body SAR, Back side, Slide In, Mid.ch, 2 Tx Slots


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.7 V/m

Peak SAR (extrapolated) = 0.813 W/kg

SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.381 mW/g

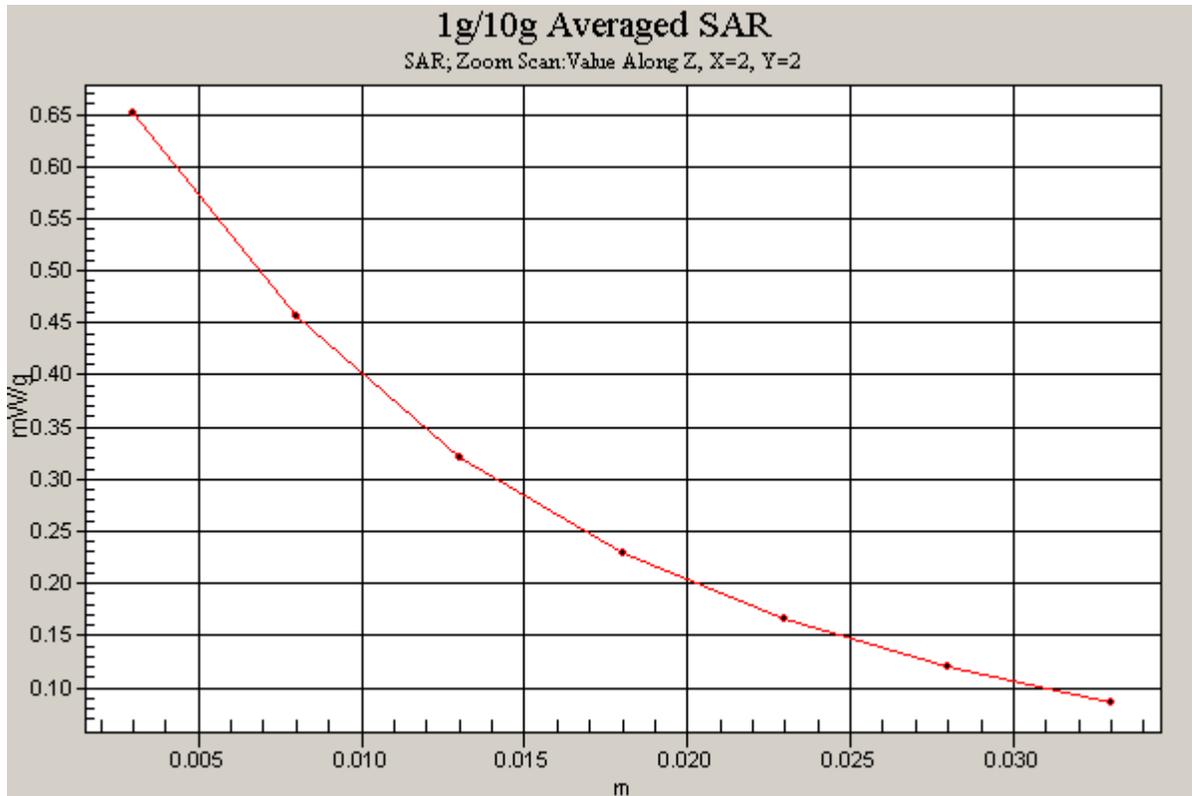

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: 1900 Brain Medium parameters used (interpolated):

$$f = 1852.4 \text{ MHz}; \sigma = 1.36 \text{ mho/m}; \epsilon_r = 38.9; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Right Section

Test Date: 06-30-2009; Ambient Temp: 24.3°C; Tissue Temp: 23.3 °C

Probe: ES3DV2 - SN3022; ConvF(4.8, 4.8, 4.8); Calibrated: 10/21/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn704; Calibrated: 5/14/2009

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Right Head, Slide In, Touch, Low.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.55 V/m

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.483 mW/g

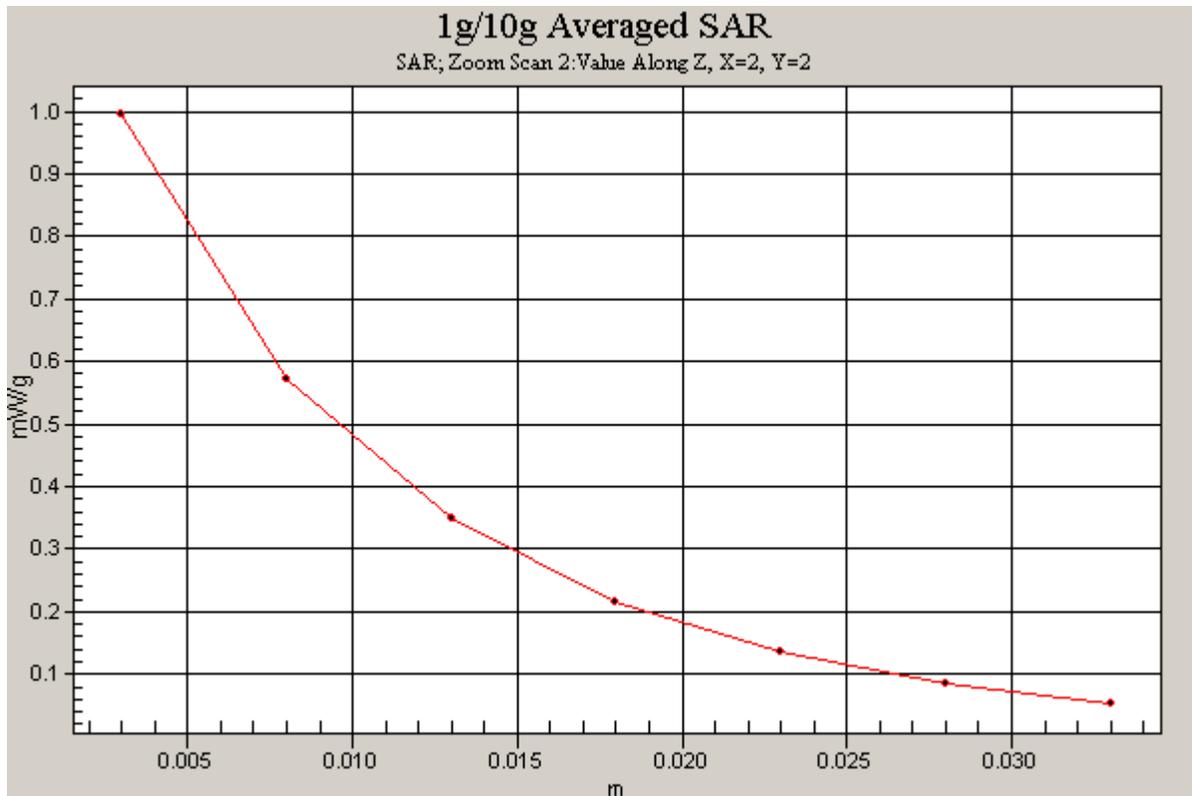

PCTEST ENGINEERING LABORATORY, INC.

**DUT: Yari (Frida); Type: 850/1900 GSM/GPRS/EDGE/UMTS/HSPA Phone with BT
Serial: CB511D23CQ**

Communication System: WCDMA1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: 1900 Muscle Medium parameters used:
 $f = 1880 \text{ MHz}; \sigma = 1.54 \text{ mho/m}; \epsilon_r = 51.5; \rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-01-2009; Ambient Temp: 23.5°C; Tissue Temp: 22.9 °C

Probe: ES3DV2 - SN3022; ConvF(4.5, 4.5, 4.5); Calibrated: 10/21/2008
Sensor-Surface: 3mm (Mechanical Surface Detection)
Electronics: DAE4 Sn704; Calibrated: 5/14/2009
Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

Mode: WCDMA 1900, Body SAR, Back side, Slide In, Mid.ch

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.4 V/m
Peak SAR (extrapolated) = 0.991 W/kg
SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.303 mW/g

