

TEST REPORT

Test Report No.: 1-1954-08-05/10



Testing Laboratory

CETECOM ICT Services GmbH
 Untertürkheimer Straße 6 – 10
 66117 Saarbrücken/Germany
 Phone: + 49 681 5 98 - 0
 Fax: + 49 681 5 98 - 9075
 Internet: <http://www.cetecom-ict.de>
 e-mail: info@ict.cetecom.de

Accredited Test Laboratory:
 The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025

DAR registration number: DGA-PL-176/94-D1

Applicant

Sony Ericsson Mobile Communications AB
 Nya Vattentornet
 22188 Lund/Sweden

Phone: +46-46-19-3000

Contact: Johan Wedin
 e-mail: johan.wedin@sonyericsson.com
 Phone: +46 707 19 57 36
 Fax: +46 46 19 32 95

Manufacturer


Sony Ericsson Mobile Communications AB
 Nya Vattentornet
 22188 Lund/Sweden

Test Standard/s

ANSI C63.19-2007	Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids
FCC 47 CFR §20.19	Hearing Aid Compatible Mobile Headsets

Test Item

Kind of test item:	Mobile Phone GSM 850/900/1800/1900, UMTS FDD1/FDD2
Device type:	portable device
Model name:	AAD-3880070-BV
S/N serial number:	BX901AZ6CL
FCC-ID:	PY7A3880070
IC:	4170B-A3880070
IMEI-Number:	00440214025482-6
Hardware status:	AP2.1
Software status:	R2DA014
Frequency:	see technical details
Antenna:	integrated antenna
Battery option:	standard battery EP500
Accessories:	----
Test sample status:	identical prototype
Combined HAC-rating	M3T3



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test performed:

Test Report authorised:

2010-06-21 Thomas Vogler

2010-06-21 Bernd Rebmann

1 Table of contents

1 Table of contents.....2

2 General information4

2.1 Notes.....4

2.2 Application details4

2.3 Statement of compliance.....4

2.4 Technical details.....5

3 Test standard/s:.....6

3.1 Categories of hearing aid compatibility for wireless devices6

4 Summary of Measurement Results7

5 Test Environment.....7

6 Test Set-up.....8

6.1 Measurement system.....8

 6.1.1 System Description.....8

 6.1.2 Test environment.....9

 6.1.3 Probe description.....9

 6.1.4 HAC test arch description.....10

 6.1.5 Device holder description10

 6.1.6 Test set-up procedure11

 6.1.7 HAC T-Coil measurement procedure13

 6.1.8 Signal flow of ABM1 and ABM2 measurements.....13

 6.1.9 Test data evaluation13

 6.1.10 Measurement uncertainty evaluation for HAC T-Coil measurements.....14

7 Test results15

7.1 Conducted power measurements.....15

 7.1.1 Conducted power measurements GSM 850 MHz.....15

 7.1.2 Conducted power measurements GSM 1900 MHz.....15

 7.1.3 Conducted power measurements WCDMA FDD V (850 MHz).....15

 7.1.4 Conducted power measurements WCDMA FDD II (1900 MHz).....15

7.2 HAC T-Coil testing.....16

 7.2.1 System background noise check.....16

 7.2.2 ABM2 check16

 7.2.3 ABM1 and SNR measurement17

 7.2.4 Frequency response.....18

 7.2.5 Description of test set-up.....18

8 Test equipment and ancillaries used for tests.....19

9 Observations19

Annex A: System performance verification.....20

Annex B: DASY4 measurement results.....23

Annex B.1: HAC T-Coil with GSM 85023

Annex B.2: HAC T-Coil with GSM 190035

Annex B.3: HAC T-Coil with UMTS FDD II.....47

Annex B.1: HAC T-Coil with UMTS FDD V59

Annex C: Photo documentation71

Annex D: HAC Calibration parameters.....75

Annex E: Document History.....78

Annex F: Further Information78

2 General information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2010-02-10
Date of receipt of test item:	2010-06-14
Start of test:	2010-06-16
End of test:	2010-06-17
Person(s) present during the test:	

2.3 Statement of compliance

The AAD-3880070-BV Mobile Phone GSM 850/900/1800/1900, UMTS FDD1/FDD2 has been tested in accordance with ANSI C63.19-2007: American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.

C63.19 HAC Rated Category: T3

2.4 Technical details

Band tested for this SAR test report	Technology	Frequency band	Lowest transmit frequency/MHz	Highest transmit frequency/MHz	Lowest receive Frequency/MHz	Highest receive Frequency/MHz	Kind of modulation	Power Class	Tested power control level	GPRS/EGPRS mobile station class	GPRS/EGPRS multislotted class	(E)GPRS voice mode or DTM	Test channel low	Test channel middle	Test channel high	Maximum output power/dBm)*
<input type="checkbox"/>	GSM	GSM	880.2	914.8	925.2	959.8	GMSK 8-PSK	4 E2	5	B	10	no	975	37	124	--
<input type="checkbox"/>	GSM	DCS	1710.2	1784.8	1805.2	1879.8	GMSK 8-PSK	1 E2	0	B	10	no	512	698	885	--
<input checked="" type="checkbox"/>	GSM	cellular	824.2	848.8	869.2	893.8	GMSK 8-PSK	4 E2	5	B	10	no	128	190	251	33.3
<input checked="" type="checkbox"/>	GSM	PCS	1850.2	1909.8	1930.2	1989.8	GMSK 8-PSK	1 E2	0	B	10	no	512	661	810	33.1
<input type="checkbox"/>	UMTS	FDD I	1922.4	1977.6	2112.4	2167.6	QPSK	3	max	--	--	--	9612	9750	9888	--
<input checked="" type="checkbox"/>	UMTS	FDD II	1852.4	1907.6	1982.4	1987.6	QPSK	3	max	--	--	--	9262	9400	9538	24.2
<input type="checkbox"/>	UMTS	FDD IV	1712.4	1752.6	1807.4	1877.6	QPSK	3	max	--	--	--	1312	1412	1513	--
<input checked="" type="checkbox"/>	UMTS	FDD V	826.4	846.6	871.4	891.6	QPSK	3	max	--	--	--	4132	4182	4233	24.2
<input type="checkbox"/>	UMTS	FDD VIII	882.4	912.6	927.4	957.6	QPSK	3	max	--	--	--	2712	2787	2863	--
<input type="checkbox"/>	WLAN	ISM	2412	2472	2412	2472	CCK OFDM	--	max	--	--	--	1	7	13	--
<input type="checkbox"/>	WLAN US	ISM	2412	2462	2412	2462	CCK OFDM	--	max	--	--	--	1	6	11	n.a.
<input type="checkbox"/>	BT	ISM	2412	2462	2412	2462	GFSK	3	max	--	--	--	0	39	78	<5.0

)*: slotted peak power for GSM, averaged max. RMS power for UMTS, WLAN and BT.

3 Test standard/s:

Test Standard	Version	Test Standard Description
ANSI C63.19	2007	Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids
FCC 47 CFR §20.19		Hearing Aid Compatible Mobile Headsets

3.1 Categories of hearing aid compatibility for wireless devices

Minimum intensity of magnetic field		
axial field intensity	≥ -18 dBA/m	radial field intensity ≥ -18 dBA/m
Frequency response		
the frequency response curve shall be within the limits acc. to EIA RS-504-1983		
axial field > -10 dBA/m at 1 kHz		axial field < -10 dBA/m at 1 kHz
Signal quality requirement of magnet coupling (SNR) (This parameter defines the T classification of ANSI C63.19)		
T 1	0 to 10 dB	
T 2	10 to 20 dB	
T 3	20 to 30 dB	
T 4	> 30 dB	

4 Summary of Measurement Results

<input checked="" type="checkbox"/>	No deviations from the technical specifications ascertained
	HAC-Category : T3
<input type="checkbox"/>	Deviations from the technical specifications ascertained

5 Test Environment


Ambient temperature: 20 – 24 °C
Relative humidity content: 40 – 50 %
Air pressure: not relevant for this kind of testing
Power supply: 230 V / 50 Hz

6 Test Set-up

6.1 Measurement system

6.1.1 System Description

For performing HAC measurements the Schmid & Partner DASY4 dosimetric assessment system is used which is described below. Instead of dosimetric probes E-field and H-field probes for measurement in air are in use together with a HAC test arch:

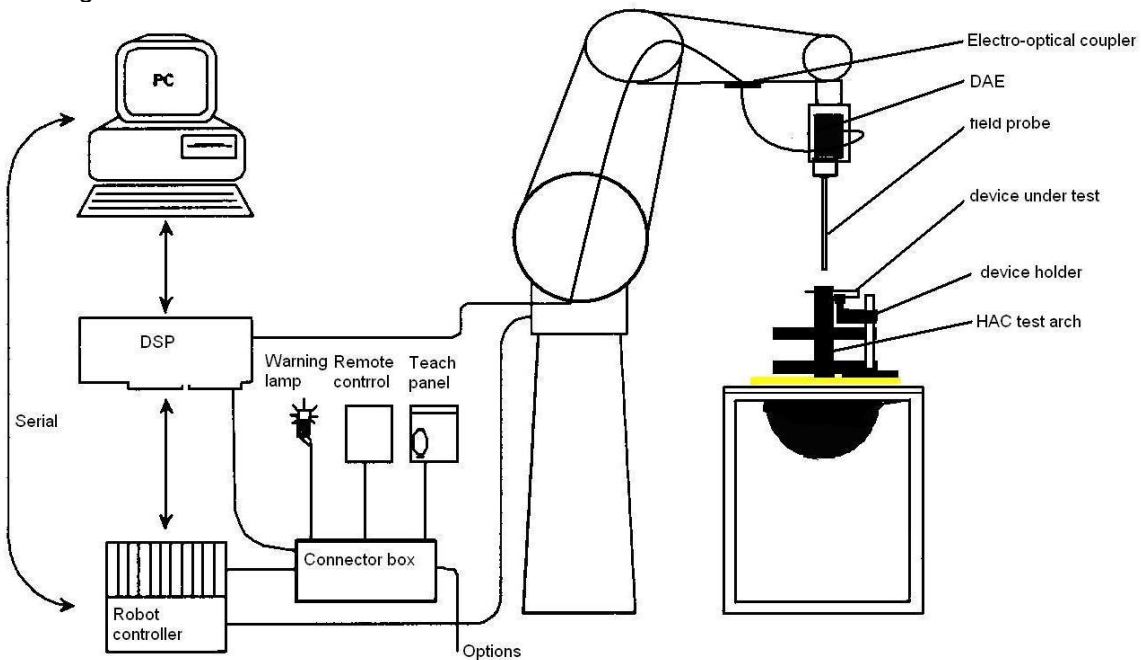

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2000
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

6.1.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions : 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Additional absorbers are placed around the HAC test set-up to prevent reflections from the robot arm.


Picture 1 of the photo documentation shows a complete view of the the test environment.

The system allows the measurement of E-field values larger than 2 V/m and H-field values larger than 10mA/m.

6.1.3 Probe description

Audio magnetic field probe AM1DV2 (Technical data according to manufacturer information)	
Construction	One tilted probe coil is used to measure all three orthogonal field components by rotating the probe.
Calibration	In air using the Audio Magnetic Calibration Coil (AMCC)
Frequency	100 Hz to 20 kHz
Sensitivity	< -50 dBA/m at 1 kHz
Dimensions	Overall length: 296 mm Body diameter: 18 mm; Tip diameter: 6 mm Distance from probe tip to sensor: 3 mm

AMMI description (Technical data according to manufacturer information)	
Construction	desktop unit containing waveform generator, sampling unit and audio volt meter.
data rate	48 KHz / 24 bit
Dynamic range	85 dB
Dimensions	19 mm x 65 mm x 270 mm

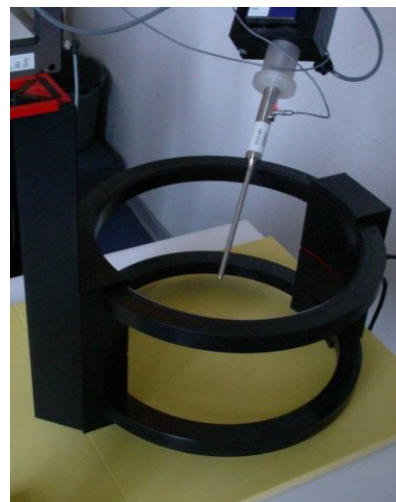


Certificates of conformity for AM1D and AMCC included in the calibration data of this test report show further technical details.

6.1.4 HAC test arch description

The HAC test arch is especially designed for performing measurements according to the requirements of ANSI C63.19. It allows centering the wireless device inside a 5 x 5 cm control area marked with 4 points for position adjustment. Plastic bridges allow an exact adjustment of the measurement distance to 1 cm from the DUT, which also includes the distance of the dipole center to the probe tip. For centering the mobile phone speaker inside the control area and for adjusting the validation dipole position the test arch contains a nylon thread for alignment (see picture).

The HAC test arch is placed on the cover of the DASY4 SAM phantom.

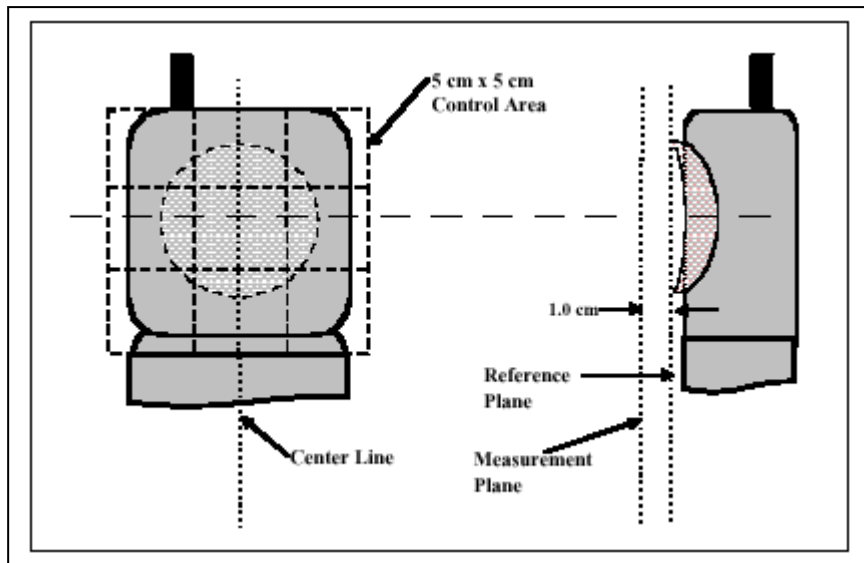


6.1.5 Device holder description

The DASY4 device holder (see picture above) has three scales for device inclination, height and side adjustment. The device holder position is adjusted to the standard measurement position e.g. center of the DUT speaker to the center of the 5 x 5 cm² control area with the device touching the plastic bridge of the HAC test arch. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

6.1.6 Test set-up procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All tests are performed with the same configuration of test steps in accordance with the requirements described in C63.19-2007.

Before starting the measurement cabling of test set-up needs to be verified according to the following description :

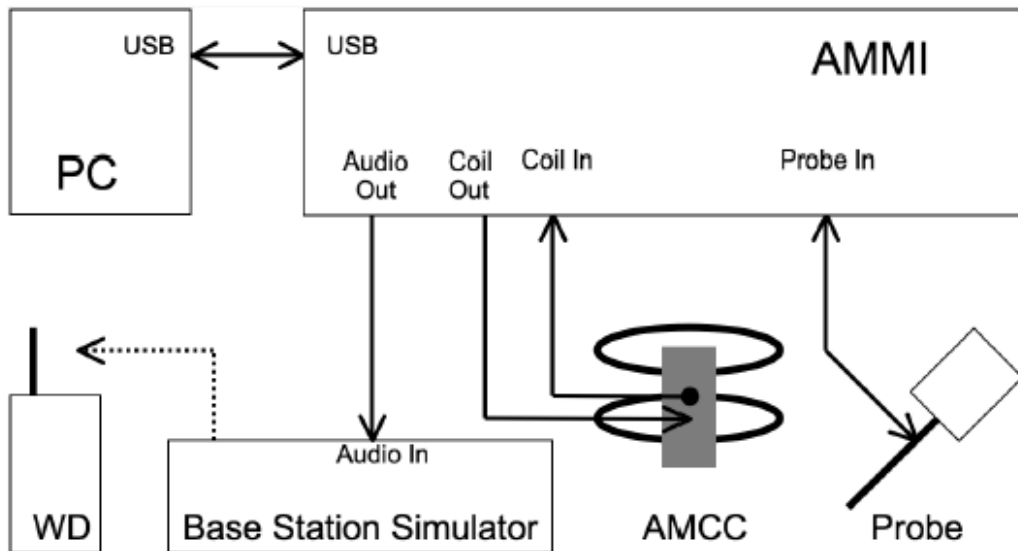

The AMMI is used to generate audio test signals via 'Audio Out' and 'Coil Out' as well as measuring audio levels via 'Coil In' and 'Probe In'.

At the beginning of the measurement a probe calibration is performed inside the AMCC Helmholtz coil. Frequency response and sensitivity are measured and can be compared with coil monitoring signal measured at 'Coil in'. See annex A for details.

These data are used as a reference during the following audio magnetic field measurements with the DUT.

Next step is the signal verification.

According to ANSI C63.19-2007 an audio input level of -16 dBm0 for GSM or WCDMA needs to be generated at the DUT. Audio speech codec option of CMU 200 offers different calibration procedures for adjusting the audio output level of the AMMI to the required level, which is described by the following routine recommended by SPEAG:

Audio Out of AMMI is connected to Speech codec handset in (9-pin connector) at CMU

Speech codec 'handset out' is connected to 'Coil in' of AMMI which can be used as audio volt meter after calibration.

Audio calibration requires setting up a call to the wireless device.

'Decoder Cal' at CMU is selected. This generates a 1 kHz sine with a level of 3.14 dBm0 at 'Handset Out'.

A measurement of the 'Coil In signal' is started, which is the CMU output signal now. The measured dBV value corresponds to 3.14dBm0 and the required value in dBV for -16 dBm0 can be calculated

A 1 kHz sine signal with AMMI gain value 10 is continuously generated by the AMMI.

'Codec Cal' is selected at the CMU. The input signal at the CMU is now sent back to AMMI input.

Measurement of 'Coil In Signal'. The measured dBV value corresponds to the gain value of 10 and the required gain value for -16 dBm0 can be calculated.

'Speech codec handset low' is selected at the CMU for measuring the audio output of the wireless device.

Compared to the 1 kHz sine any other selected audio signal requires different gain settings as those signals have a different peak-to-RMS ratio. The correction factors for the gain setting can be determined by directly connecting 'Audio Out' to 'Coil In' and measuring the signal levels.

CMU200 decoder calibration is device specific and needs to be performed after each re-calibration and adjustment.



For CMU200 S/N 106826 the following values have been determined :

3.14 dBm0 corresponds to -2.57 dBV → -16 dBm0 = -21.71 dBV
 gain 10 corresponds to 20.6 dBV → required gain setting for -21.71 dBV and 1 kHz sine : 8.8

gain settings for different signal types used in this report :

Signal	Duration	Peak to RMS [dB]	RMS [dB]	required gain factor	gain setting
1 kHz sine	---	3.0	0.0	1.0	8.8
48k voice 1kHz	1 s	16.2	-12.7	4.33	38.1
48k voice 300 – 3000 Hz	2 s	21.6	-18.6	8.48	74.6

broadband signal and narrowband signal compared to noise level:

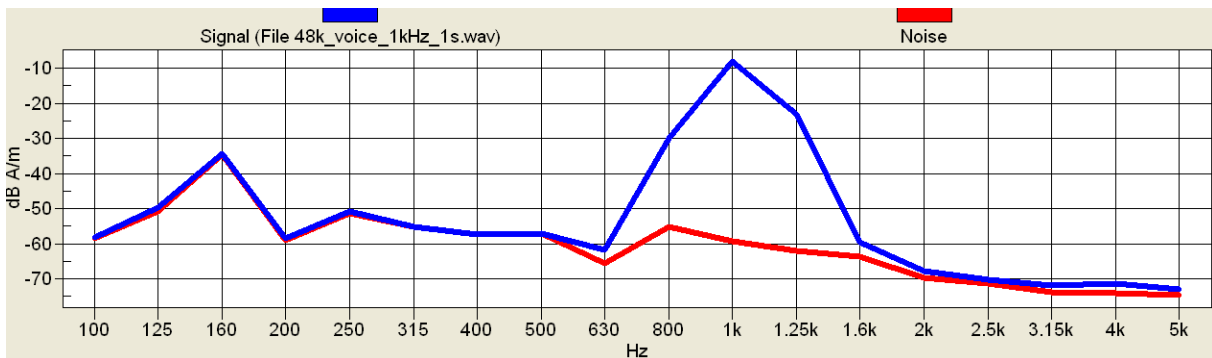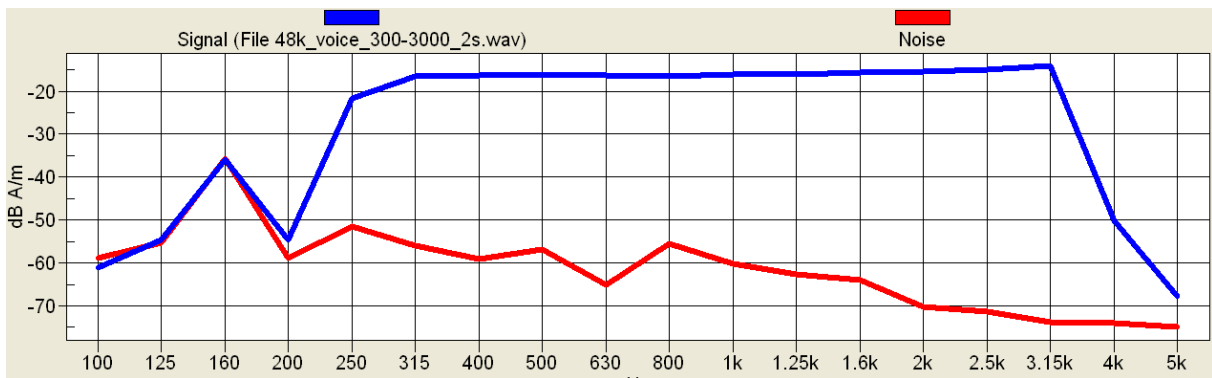

6.1.7 HAC T-Coil measurement procedure

1. The HAC test setup including AMCC is placed at the pre-defined position on top of the SAR phantom cover.
2. A phantom adjustment and verification is performed, which allows checking the borders and centre position of the 5 x 5 cm² control area. The probe tip touches down on the 4 points at the corners of the control area.
3. The probe distance of 0.7 mm to the test arch is calibrated by using the manual robot control. The corresponding robot settings and instructions are included in the pre-defined measurement files.
4. A probe calibration is performed with a calibration signal and a broadband voice signal to check frequency response.
5. A background noise check is performed inside AMCC and in test position with DUT removed.
6. The wireless device (WD) is oriented in its intended test position (see photo documentation) with the reference plane in the horizontal plane and secured by the device holder. The acoustical output is placed in the centre of the control area (predefined by the HAC test arch).
7. DUT is switched on and call is initiated at maximum RF output power, with T-Coil active at maximum volume. Additionally settings causing additional noise to T-Coil connection (e.g. backlight on) can be tested.
8. A course scan for axial, longitudinal and transversal magnetic field at 50 x 50 mm with 4.2 mm spacing is performed with a narrowband voice signal at 1 kHz and with noise only at a distance of 0.7 mm above the HAC test arch.
9. At the position of best SNR in course scans a fine scan of 8 x 8 mm at 2 mm spacing is performed with a narrowband voice signal and noise only. Steps 8 and 9 are performed for all 3 probe orientations (axial, longitudinal transversal).
10. At the position with best SNR in fine scan of the axial component a broadband voice measurement is performed to determine the frequency response.

6.1.8 Signal flow of ABM1 and ABM2 measurements

ABM1 :

Magnetic field probe AM1D delivers a voltage corresponding to a certain magnetic field intensity. This signal is amplified by 40 dB and measured by the AMMI. The measured value is corrected by the probe sensitivity factor (e.g. -32 dBV/(A/m)) for the measured frequency as determined during probe calibration, as well as by the 40 dB pre-amplification.

After filtering the signal by a 1/3 octave filter the ABM1 value for magnetic field intensity is obtained.

ABM2 :

ABM2 is measured by turning the audio signal off and measuring noise. The measured noise level is corrected as above and is additionally filtered using half band integration and A-weighting filters by applying convolution in time-domain. ABM2 is obtained as the power sum inside the 0.1 to 10 kHz band.

6.1.9 Test data evaluation

- ABM1, ABM2 and ABM1/ABM2 (SNR) can be evaluated with the SEMCAD post processor. Values for each measurement position can be read directly by using a cursor.

All values can be displayed in dB (A/m). Therefore one of the three values can be derived from the two others by using the formula $SNR = ABM1 - ABM2$

- Frequency response from 300 to 3000 Hz can be evaluated from z-axis frequency response measurement and can be compared to limit lines which depend on the signal level at 1 kHz according to ANSI C.63-19 chapter 7.3.

For details about ABM1 and SNR see annex B. Section 7 summarizes the test results.

Test procedures and data evaluation are referred to ANSI-C63.19-2007.

6.1.10 Measurement uncertainty evaluation for HAC T-Coil measurements

This measurement uncertainty budget is suggested by ANSI-C63.19 and determined by Schmid & Partner Engineering AG. It is valid for the frequency range 800 MHz – 3 GHz and represents a worst case analysis. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divi-sor	c _i AB M1	c _i AB M2	Standard Uncertainty ABM1	Standard Uncertainty ABM2
Probe Sensitivity							
Reference level	± 3.0%	Normal	1	1	1	± 3.0%	± 3.0%
AMCC geometry	± 0.4%	Rectangular	√3	1	1	± 0.2%	± 0.2%
AMCC current	± 0.6%	Rectangular	√3	1	1	± 0.4%	± 0.4%
Probe position during calibration	± 1.0%	Rectangular	√3	1	1	± 0.6%	± 0.6%
Noise contribution	± 0.7%	Rectangular	√3	0.014	1	± 0.0%	± 0.4%
Frequency slope	± 5.9%	Rectangular	√3	0.1	1	± 0.3%	± 3.5%
Probe System							
Repeatability / drift	± 1.0%	Rectangular	√3	1	1	± 0.6%	± 0.6%
Linearity / dynamic range	± 0.6%	Rectangular	√3	1	1	± 0.4%	± 0.4%
Acoustic noise	± 1.0%	Rectangular	√3	0.1	1	± 0.1%	± 1.0%
Probe angle	± 2.3%	Rectangular	√3	1	1	± 1.4%	± 1.4%
Spectral processing	± 0.9%	Rectangular	√3	1	1	± 0.5%	± 0.5%
Integration time	± 0.6%	Normal	1	1	5	± 0.6%	± 3.0%
field disturbance	± 0.2%	Rectangular	√3	1	1	± 0.1%	± 0.1%
Test signal							
Reference signal spectral response	± 0.6%	Rectangular	√3	0	1	± 0.0%	± 0.4%
Positioning							
Probe positioning	± 1.9%	Normal	1	1	1	± 1.1%	± 1.1%
Phantom thickness	± 0.9%	Normal	1	1	1	± 0.5%	± 0.5%
DUT positioning	± 1.9%	Rectangular	√3	1	1	± 1.1%	± 1.1%
External contributions							
RF interference	± 0.0%	Rectangular	√3	1	1	± 0.0%	± 0.0%
test signal variation	± 2.0%	Rectangular	√3	1	1	± 1.2%	± 1.2%
Expanded Std. Uncertainty						± 8.2%	± 12.3%

Table 1: Measurement uncertainties

7 Test results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. The output power was measured using an integrated RF connector and attached RF cable.

Note: CMU200 measures GSM peak and average output power for active timeslots.

For SAR e.g. the timebased average power is relevant. The difference inbetween depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1 : 8	1: 4	1 : 2.66	1 : 2
timebased avg. power compared to slotted avg. power	- 9 dB	- 6 dB	- 4.25 dB	- 3 dB

7.1.1 Conducted power measurements GSM 850 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	timebased avg. power (calculated)
128 / 824.2 MHz	GMSK	1	33.3dBm	24.3dBm
190 / 836.6 MHz	GMSK	1	33.2dBm	24.2dBm
251 / 848.0 MHz	GMSK	1	33.1dBm	24.1dBm

Table 2: Test results conducted power measurement GSM 850 MHz

7.1.2 Conducted power measurements GSM 1900 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	timebased avg. power (calculated)
512 / 1850.2 MHz	GMSK	1	29.9dBm	20.9dBm
661 / 1880.0 MHz	GMSK	1	30.0dBm	21.0dBm
810 / 1909.8 MHz	GMSK	1	30.0dBm	21.0dBm

Table 3: Test results conducted power measurement GSM 1900 MHz

7.1.3 Conducted power measurements WCDMA FDD V (850 MHz)

Max. RMS output power 850 MHz (FDD V) / dBm			
mode	Channel / frequency		
	4132 / 826.4 MHz	4182 / 836.6 MHz	4233 / 846.6 MHz
AMR 12.2 kbit/s	24.20	24.20	24.17

Table 4: Test results conducted power measurement WCDMA 850

7.1.4 Conducted power measurements WCDMA FDD II (1900 MHz)

Max. RMS output power 1900 MHz (FDD II) / dBm			
mode	Channel / frequency		
	9262 / 1852.4 MHz	9400 / 1880.0 MHz	9538 / 1907.6 MHz
AMR 12.2 kbit/s	24.20	24.00	23.43

Table 5: Test results conducted power measurement WCDMA 1900

7.2 HAC T-Coil testing

7.2.1 System background noise check

The background noise was checked in axial, longitudinal and transversal probe orientations. The noise spectrum is shown in annex A. Highest noise levels at 1 kHz do not exceed -52 dBA/m.

7.2.2 ABM2 check

ABM2 has been evaluated at T-coil position to select the channel with highest noise as test channel (1 frequency per band / communication system).

ABM2 comparison	
Mode / channel	ABM2 / dBA/m (noise level at T-Coil position)
GSM850 / 128	-24.81
GSM850 / 190	-24.23
GSM850 / 251	-26.20
GSM1900 / 512	-26.80
GSM1900 / 698	-29.32
GSM1900 / 885	-30.28
FDD V / 4132	-37.74
FDD V / 4182	-37.94
FDD V / 4233	-37.54
FDD II / 9262	-38.08
FDD II / 9400	-37.73
FDD II / 9538	-37.92

7.2.3 ABM1 and SNR measurement

ABM1 minimum field level requirement: **-18 dBA/m**
 T-Coil requirement: **T4 : minimum 30 dB**
T3 : minimum 20 dB

Note: the ABM1 value in the table below represents the field maximum with best SNR. For radial V and radial H orientation this is not necessarily the highest maximum.

Hearing Aid Compatibility results for T-Coil with GSM 850							
Channel / frequency	probe orientation	measured position (x/y)	ABM1 dBA/m	ABM2 dBA/m	SNR	category	air temperature
190 / 836.6 MHz	axial (z)	(4 , -1.6)	6.91	-22.7	29.6	T3	22.8 °C
190 / 836.6 MHz	radial V (x)	(4.3 , -4)	-0.38	-25.0	24.6	T3	22.8 °C
190 / 836.6 MHz	radial H (y)	(2.2 , -10.3)	-0.59	-40.5	39.9	T4	22.8 °C

Table 6: Test results GSM 850

Hearing Aid Compatibility results for T-Coil with GSM 1900							
Channel / frequency	probe orientation	measured position (x/y)	ABM1 dBA/m	ABM2 dBA/m	SNR	category	air temperature
512 / 1850.2 MHz	axial (z)	(4 , -1.6)	6.97	-24.5	31.5	T4	22.8 °C
512 / 1850.2 MHz	radial V (x)	(-6.5 , -0.8)	-0.28	-26.2	26.5	T3	22.8 °C
512 / 1850.2 MHz	radial H (y)	(2.6 , -10.1)	-0.64	-41.1	40.5	T4	22.8 °C

Table 7: Test results GSM 1900

Hearing Aid Compatibility results for T-Coil with FDD V							
Channel / frequency	probe orientation	measured position (x/y)	ABM1 dBA/m	ABM2 dBA/m	SNR	category	air temperature
4132 / 826.4 MHz	axial (z)	(2.4 , -2.2)	5.32	-38.4	43.7	T4	22.6 °C
4132 / 826.4 MHz	radial V (x)	(-2 , -4.2)	-3.95	-39.3	35.3	T4	22.6 °C
4132 / 826.4 MHz	radial H (y)	(-4.3 , -1.6)	-3.10	-44.2	41.1	T4	22.6 °C

Table 8: Test results WCDMA FDD V


Hearing Aid Compatibility results for T-Coil with FDD II							
Channel / frequency	probe orientation	measured position (x/y)	ABM1 dBA/m	ABM2 dBA/m	SNR	category	air temperature
9400 / 1880.0 MHz	axial (z)	(2.6 , -1.8)	6.80	-36.5	43.3	T4	22.8 °C
9400 / 1880.0 MHz	radial V (x)	(-3.8 , -4)	-2.2	-39.4	37.2	T4	22.8 °C
9400 / 1880.0 MHz	radial H (y)	(2.0 , -10.9)	-0.75	-42.3	41.5	T4	22.8 °C

Table 9: Test results WCDMA FDD II

Overall category: T3

7.2.4 Frequency response

Frequency response has been measured at position with best SNR using a voice-like signal of 300 – 3000 Hz. Measurement was performed with maximum volume. The frequency response margin is shown in the plots ('Diff').

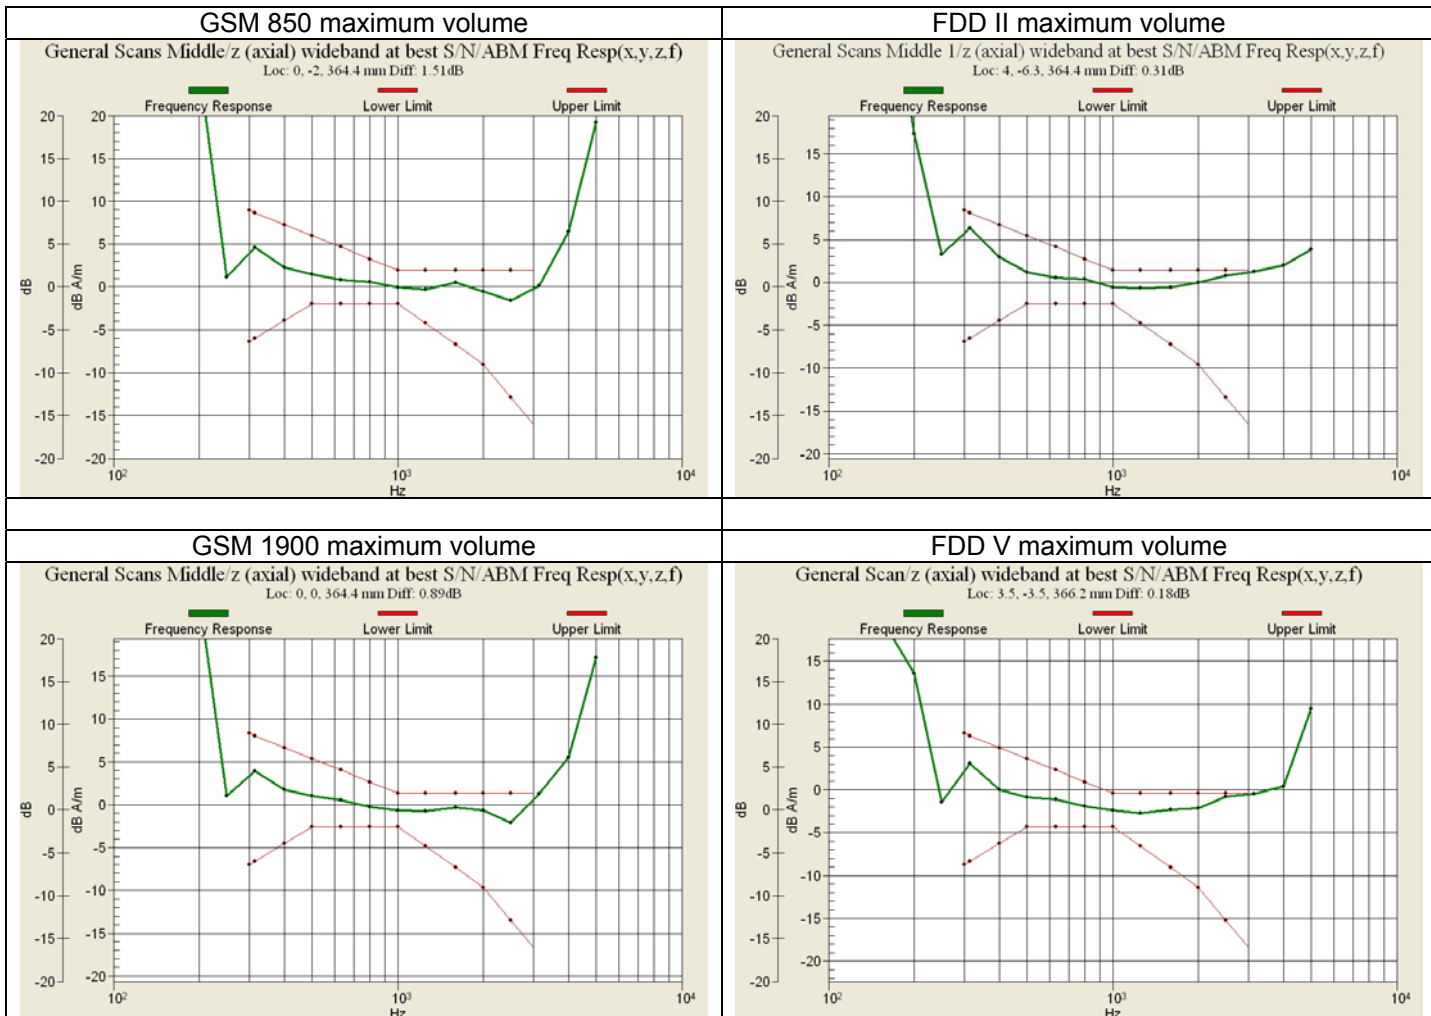

Frequency response verdict: passed

7.2.5 Description of test set-up

The device was tested using a CMU 200 communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. The conducted output power was measured using an integrated RF connector and attached RF cable.

The test was performed under the following conditions:

- Speaker muted
- Backlight off
- Maximum volume
- Bluetooth off
- T-Coil HAC mode on
- UMTS with AMR 12.2 kbit/s

8 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

No	used	Equipment	Type	Manufacturer	Serial No.	Last Calibration	Frequency (months)
1	<input checked="" type="checkbox"/>	Audio Magnetic 1D Field Probe	AM1DV2	Schmid & Partner Engineering AG	1005	2009-08-19	12
2	<input checked="" type="checkbox"/>	Audio Magnetic Measurement Instrument	AMMI SE UMS 010 AA	Schmid & Partner Engineering AG	1006	N/A	--
3	<input checked="" type="checkbox"/>	Audio Magnetic Calibration Coil	AMCC SD HAC P02 AB	Schmid & Partner Engineering AG	1007	N/A	--
6	<input checked="" type="checkbox"/>	Data acquisition electronics	DAE3V1	Schmid & Partner Engineering AG	477	May 7, 2010	12
7	<input checked="" type="checkbox"/>	Software	DASY 4 V4.7	Schmid & Partner Engineering AG	---	N/A	--
8	<input checked="" type="checkbox"/>	HAC test arch	SD HAC P01 BA	Schmid & Partner Engineering AG	1022	N/A	--
9	<input checked="" type="checkbox"/>	Universal Radio Communication Tester	CMU 200	Rohde & Schwarz	106826	January 12, 2010	12


Measurement devices are in a 1 or 2 year calibration cycle. System calibration with AMCC performed before each measurement. The DAE is not an active part of the HAC T-coil measurement system.

9 Observations

No observations exceeding those reported with the single test cases have been made.


Annex A: System performance verification

Probe calibration is performed using the AMCC Helmholtz coil. Frequency response and sensitivity is measured according to the following screen shot

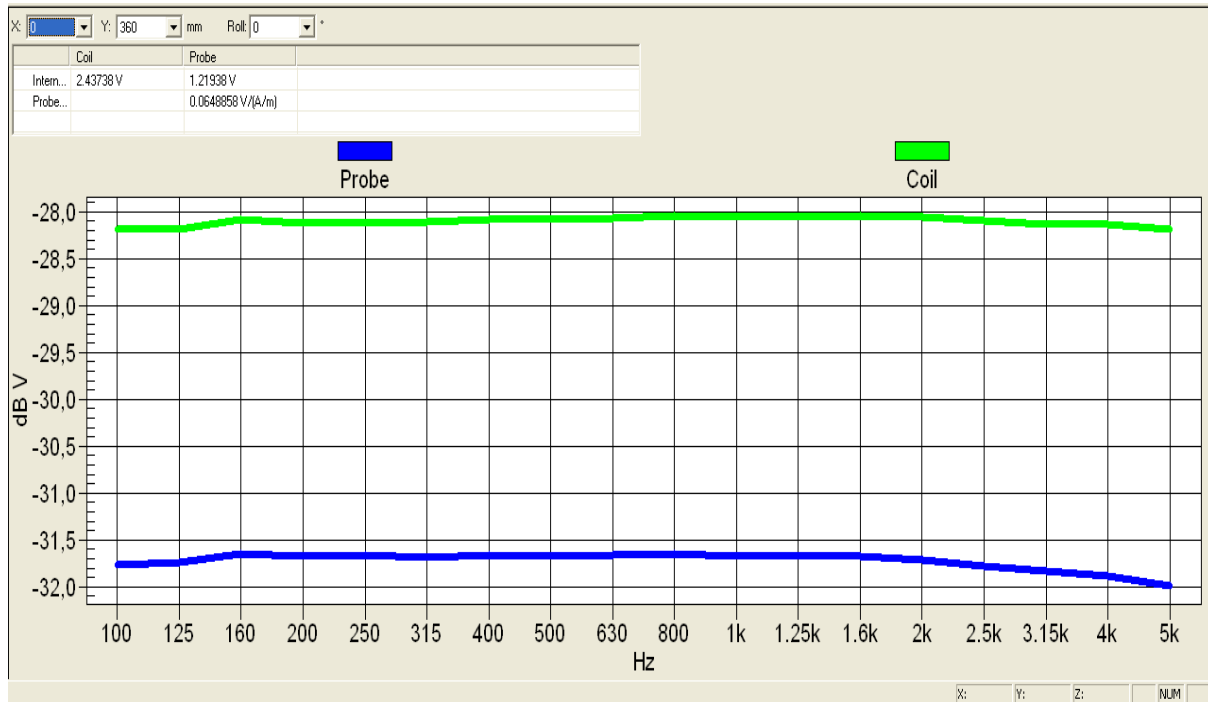


Remark : appearance of calibration result has changed since DASY4 V4.7. The constant offset between coil and probe channel has replaced the slope starting at -50 dBV for 100 Hz and ending at -20 dBV for 4 kHz showing probe coil sensitivity as defined in chapter C.5 of ANSI C63.19.


Noise floor of axial probe orientation

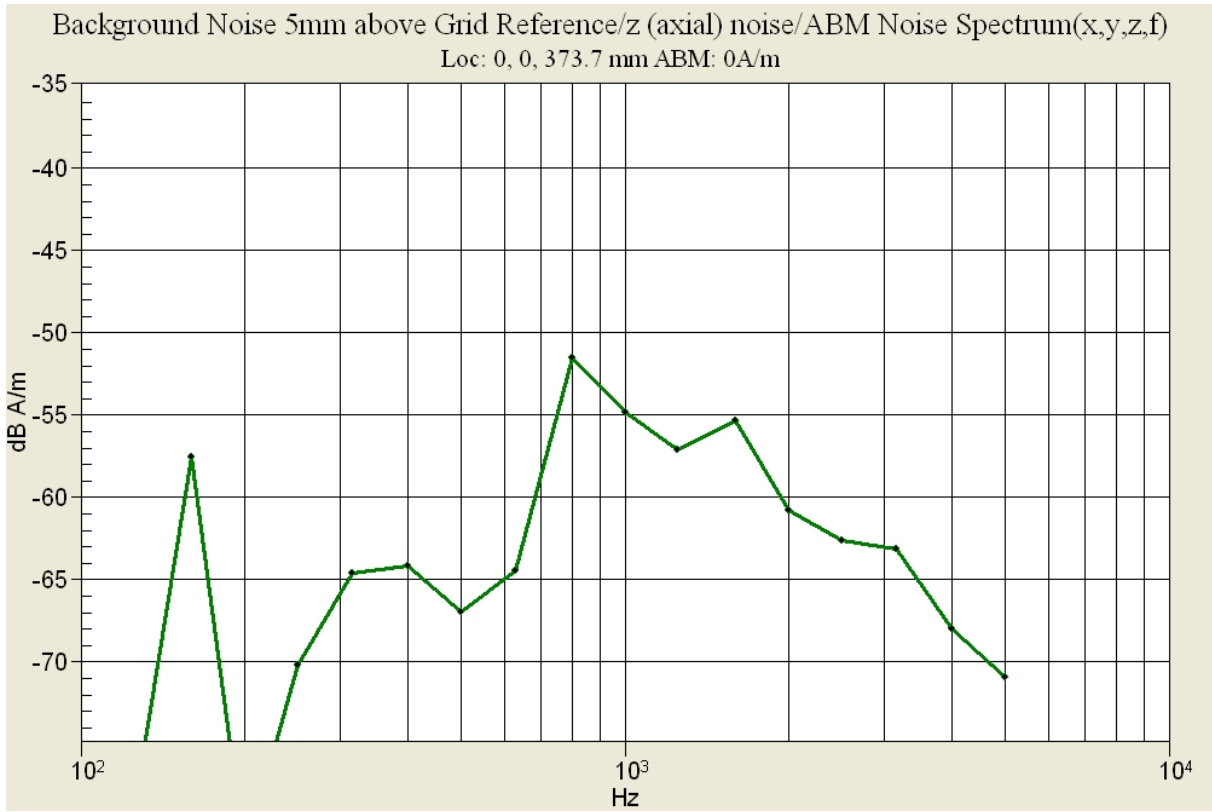

Noise floor of longitudinal probe orientation

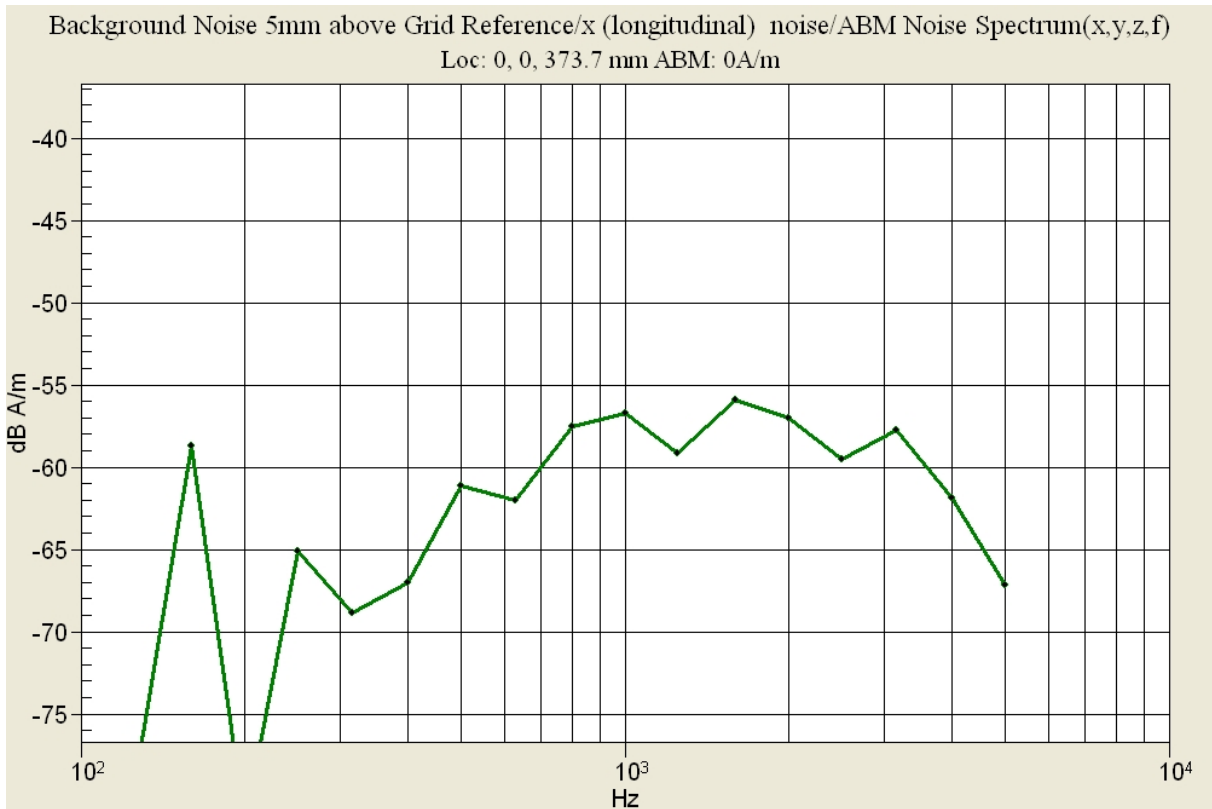

Noise floor of transversal probe orientation

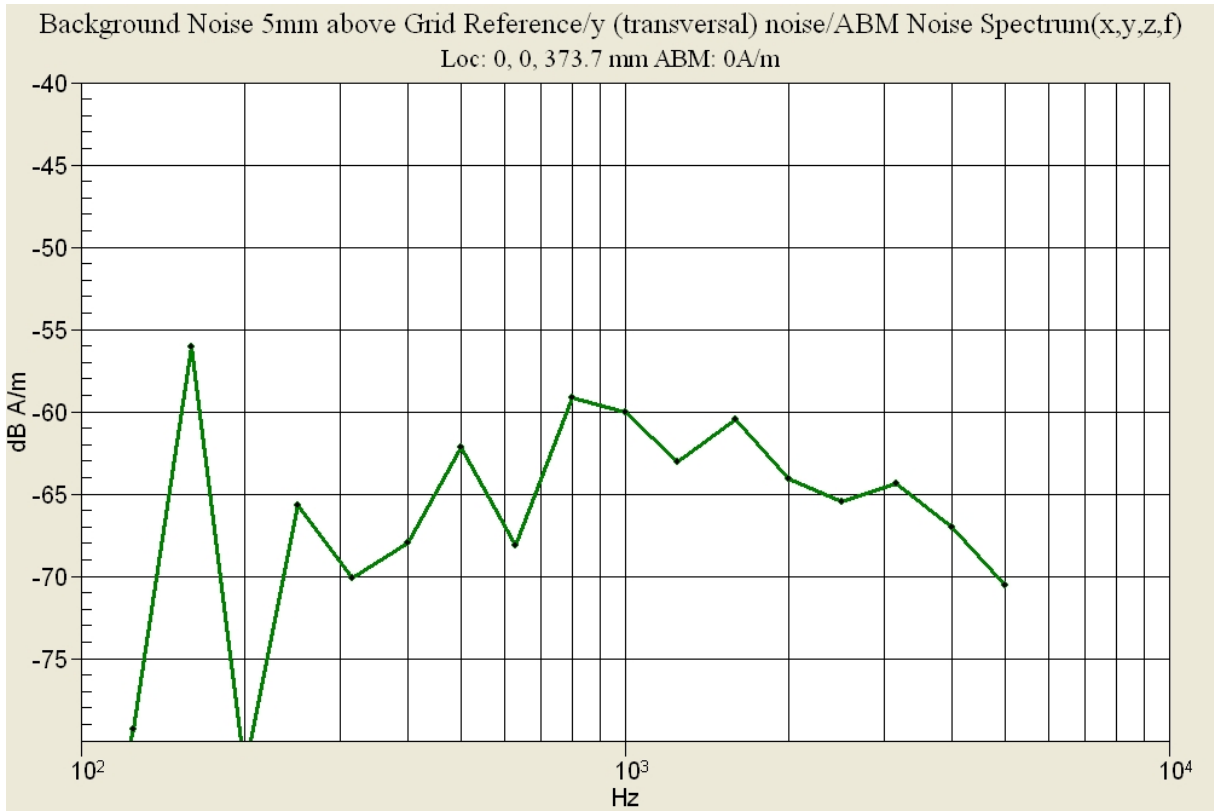

Annex B: DASY4 measurement results

The following plots show both the audio signal intensity (ABM1) and the signal-to-noise-ratio (ABM1/ABM2) for each of the three field orientations at the RF frequency with highest noise.

Annex B.1: HAC T-Coil with GSM 850

Date/Time: 16.06.2010 13:22:17

HAC_TCoil_850_z**DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z)
(41x41x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.91 dB A/m

BWC Factor = 0.148042 dB

Location: 4, -1.6, 364.4 mm

**General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)
(121x121x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.87 dB A/m

BWC Factor = 0.148042 dB

Location: 3.8, -1.7, 364.4 mm

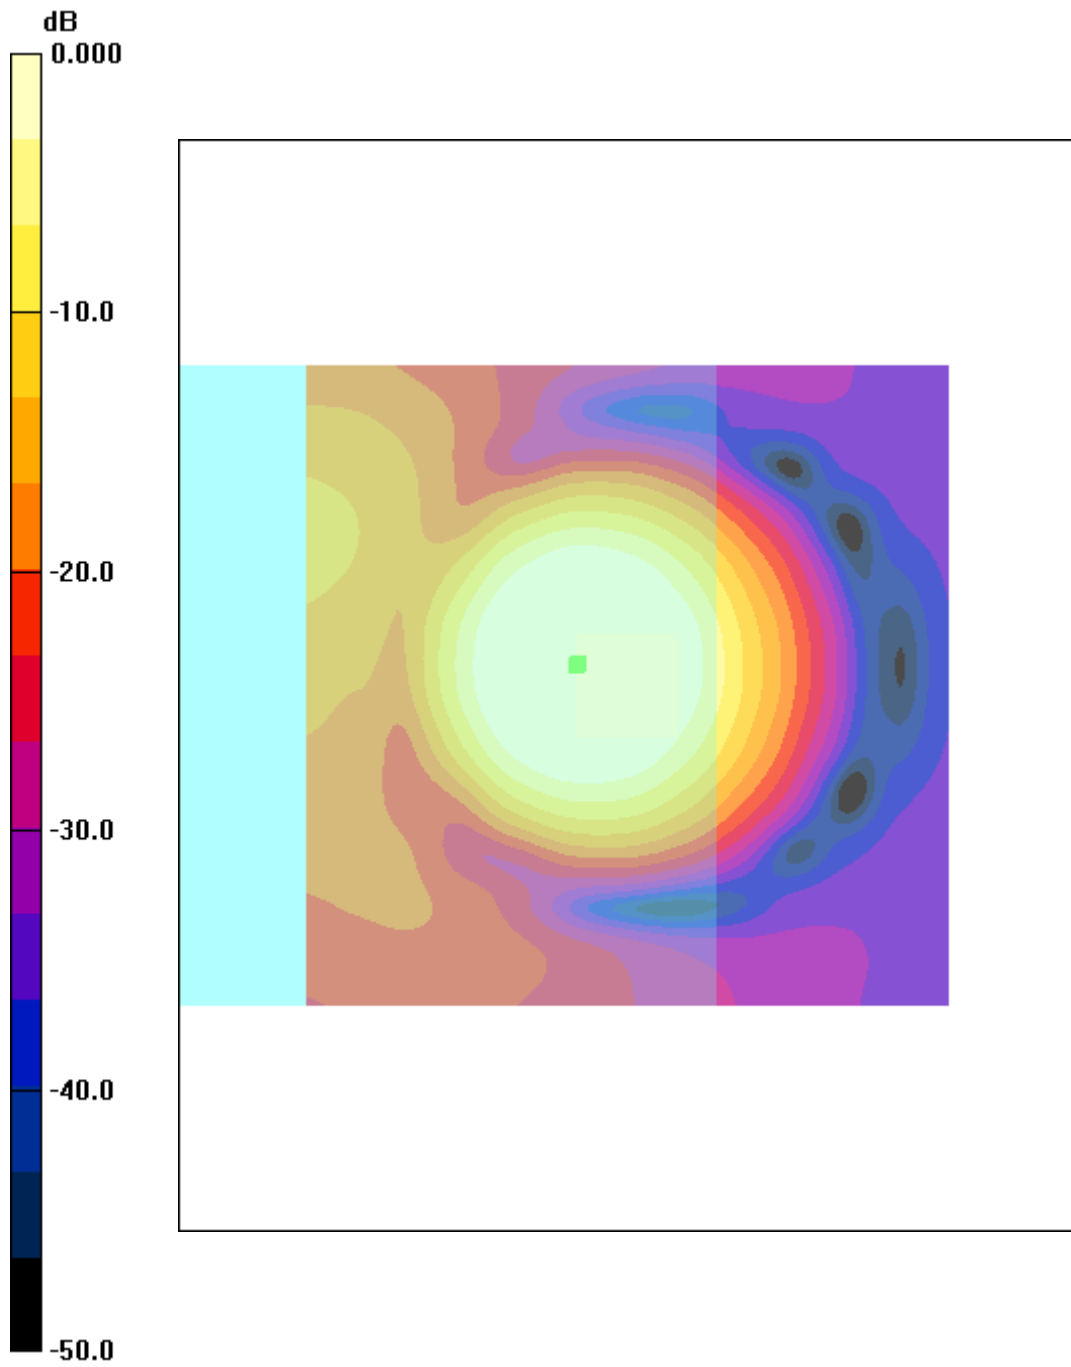

0 dB = 1.00A/m

Date/Time: 16.06.2010 13:22:17

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**Program Name: HAC_TCoil_WD_Emission**

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 29.6 dB

ABM1 comp = 4.79 dB A/m

BWC Factor = 0.148042 dB

Location: -0.6, -1.6, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 29.5 dB

ABM1 comp = 4.65 dB A/m

BWC Factor = 0.148042 dB
Location: -0.4, 0.4, 364.4 mm

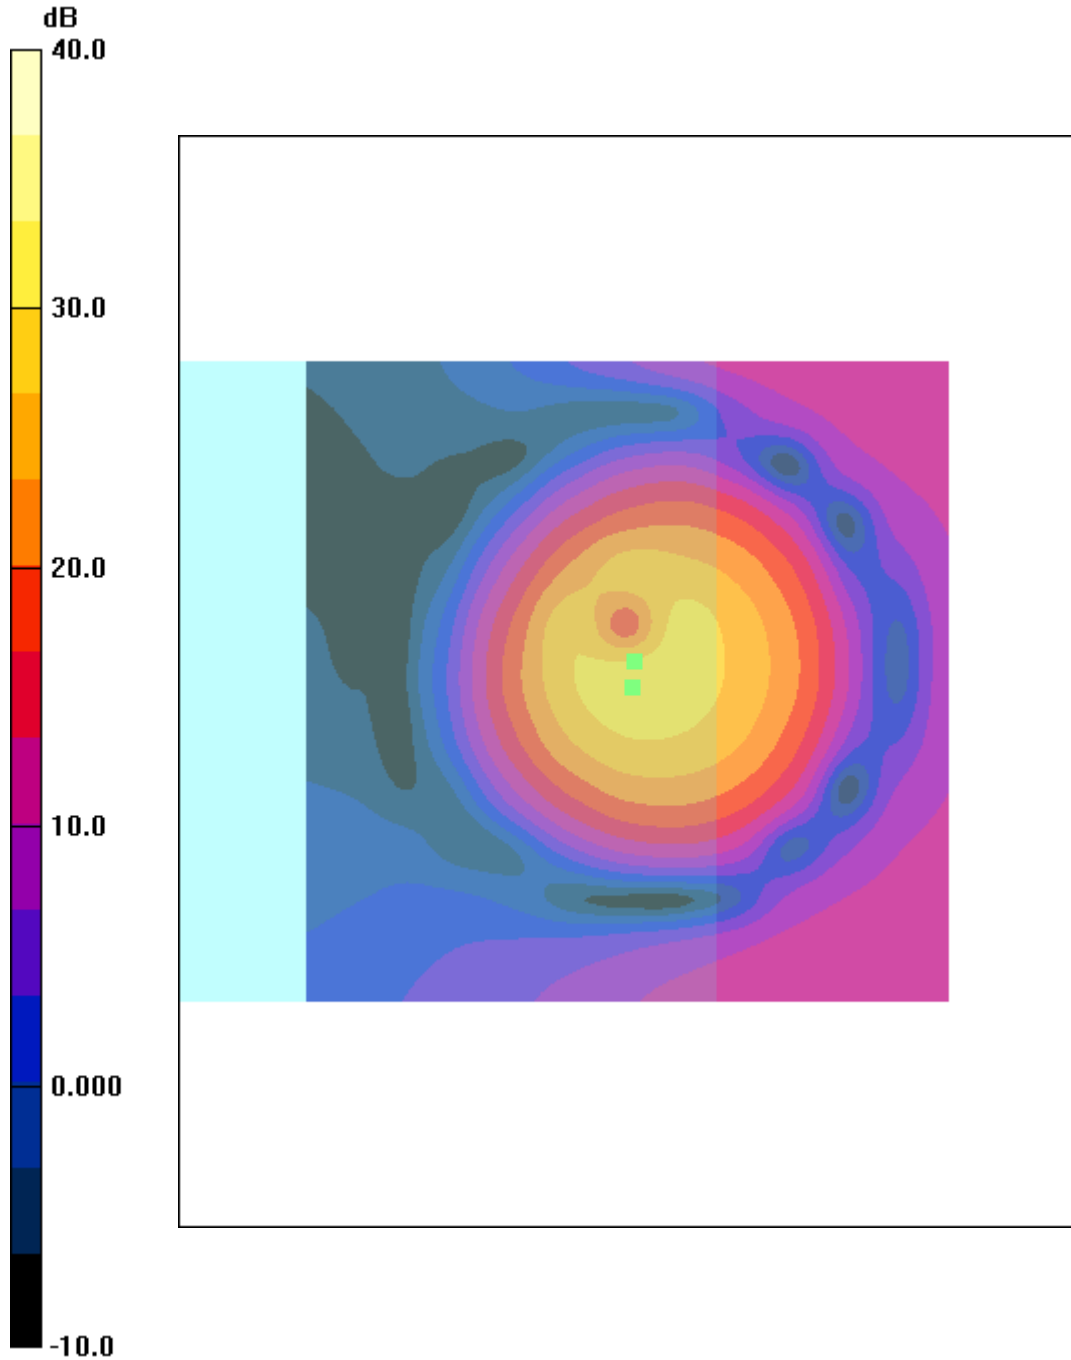

0 dB = 1.00

Date/Time: 16.06.2010 13:25:18

HAC_TCoil_850_x**DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated**Signal(x,y,z) (41x41x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.308 dB A/m

BWC Factor = 0.148042 dB

Location: -4.3, -4, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated**Signal(x,y,z) (121x121x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 1.07 dB A/m

BWC Factor = 0.148042 dB

Location: 10, -3.3, 364.4 mm

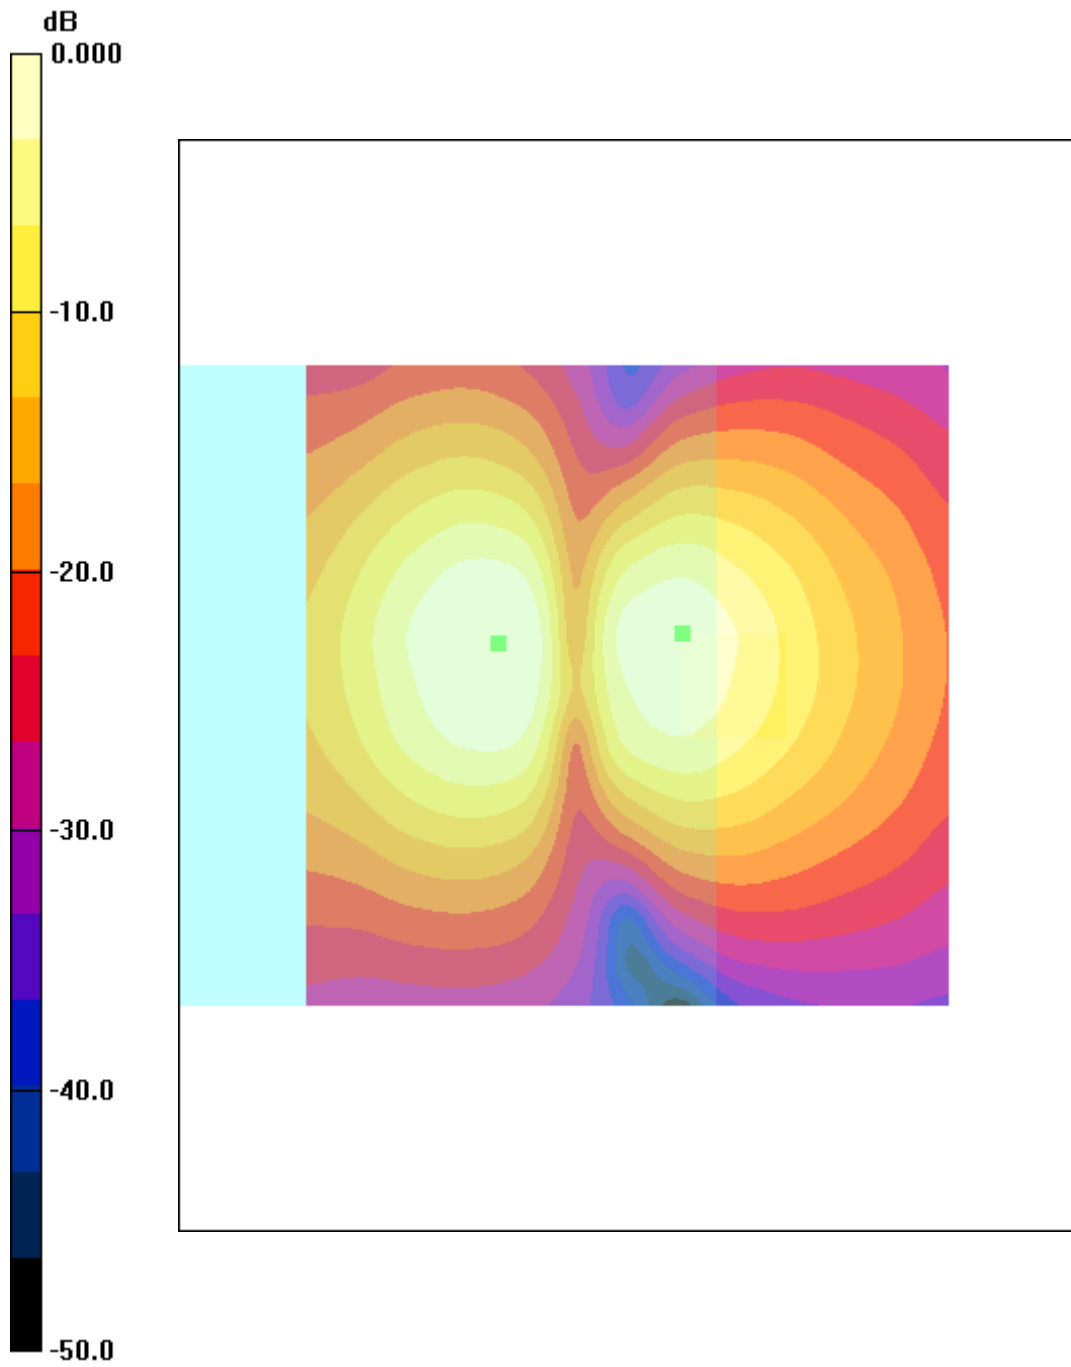

0 dB = 1.00A/m

Date/Time: 16.06.2010 13:25:18

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**Program Name: HAC_TCoil_WD_Emission**

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 24.6 dB

ABM1 comp = -1.89 dB A/m

BWC Factor = 0.148042 dB

Location: -6.3, -0.2, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 24.6 dB

ABM1 comp = -1.66 dB A/m

BWC Factor = 0.148042 dB
Location: -6.7, -2.1, 364.4 mm

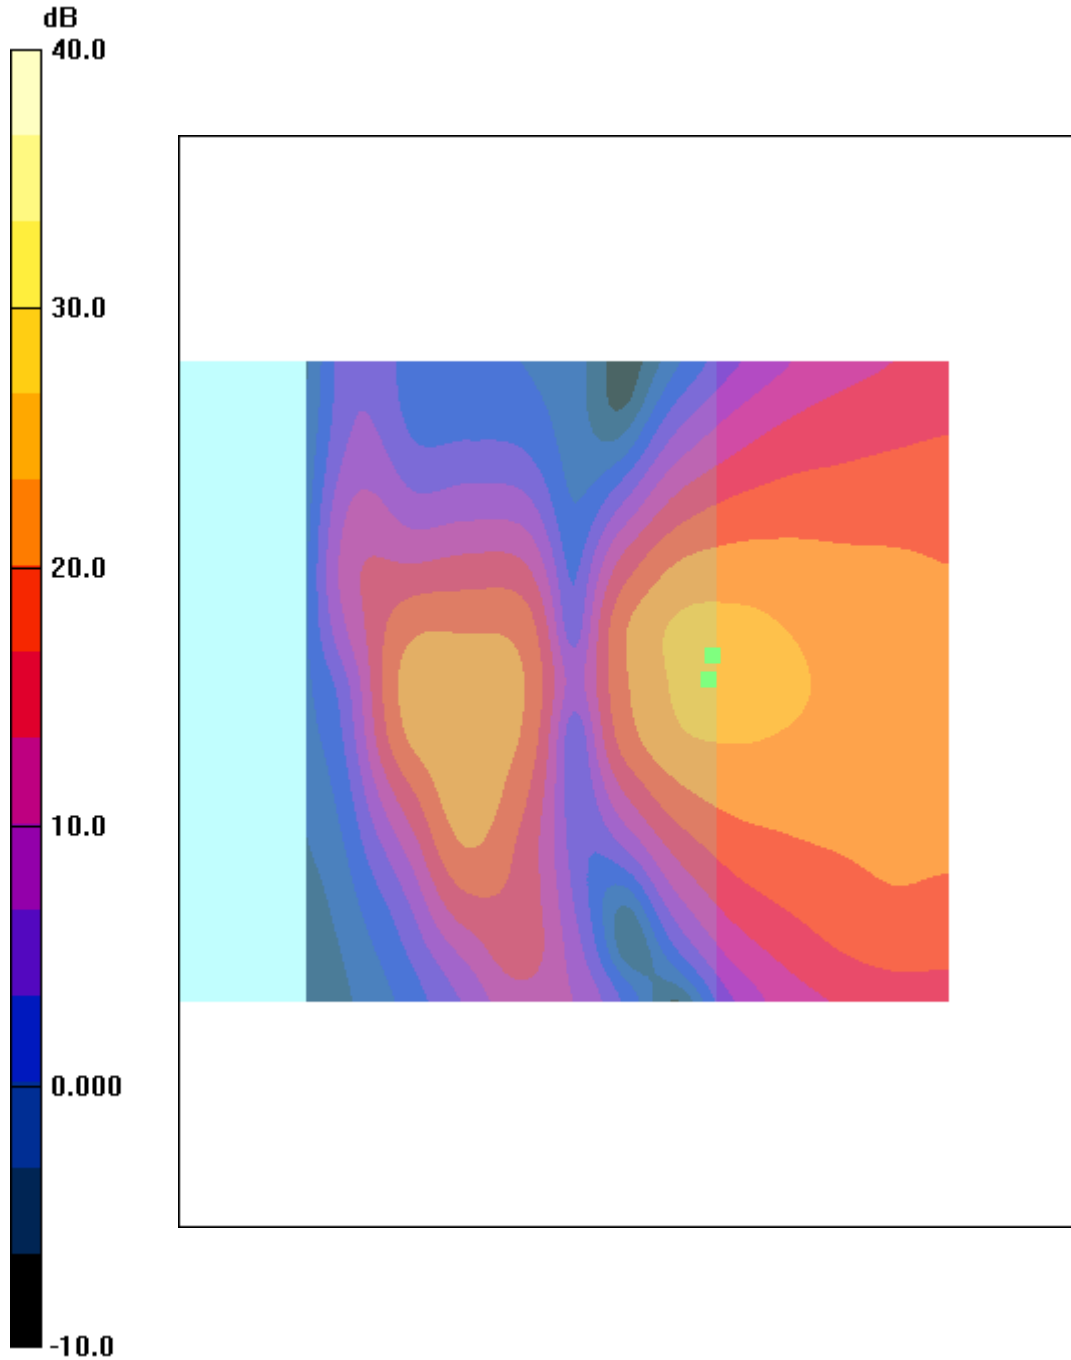

0 dB = 1.00

Date/Time: 16.06.2010 13:28:03

HAC_TCoil_850_y

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated

Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.594 dB A/m

BWC Factor = 0.148042 dB

Location: 2.2, -10.3, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated

Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.156 dB A/m

BWC Factor = 0.148042 dB

Location: 2.9, 4.6, 364.4 mm

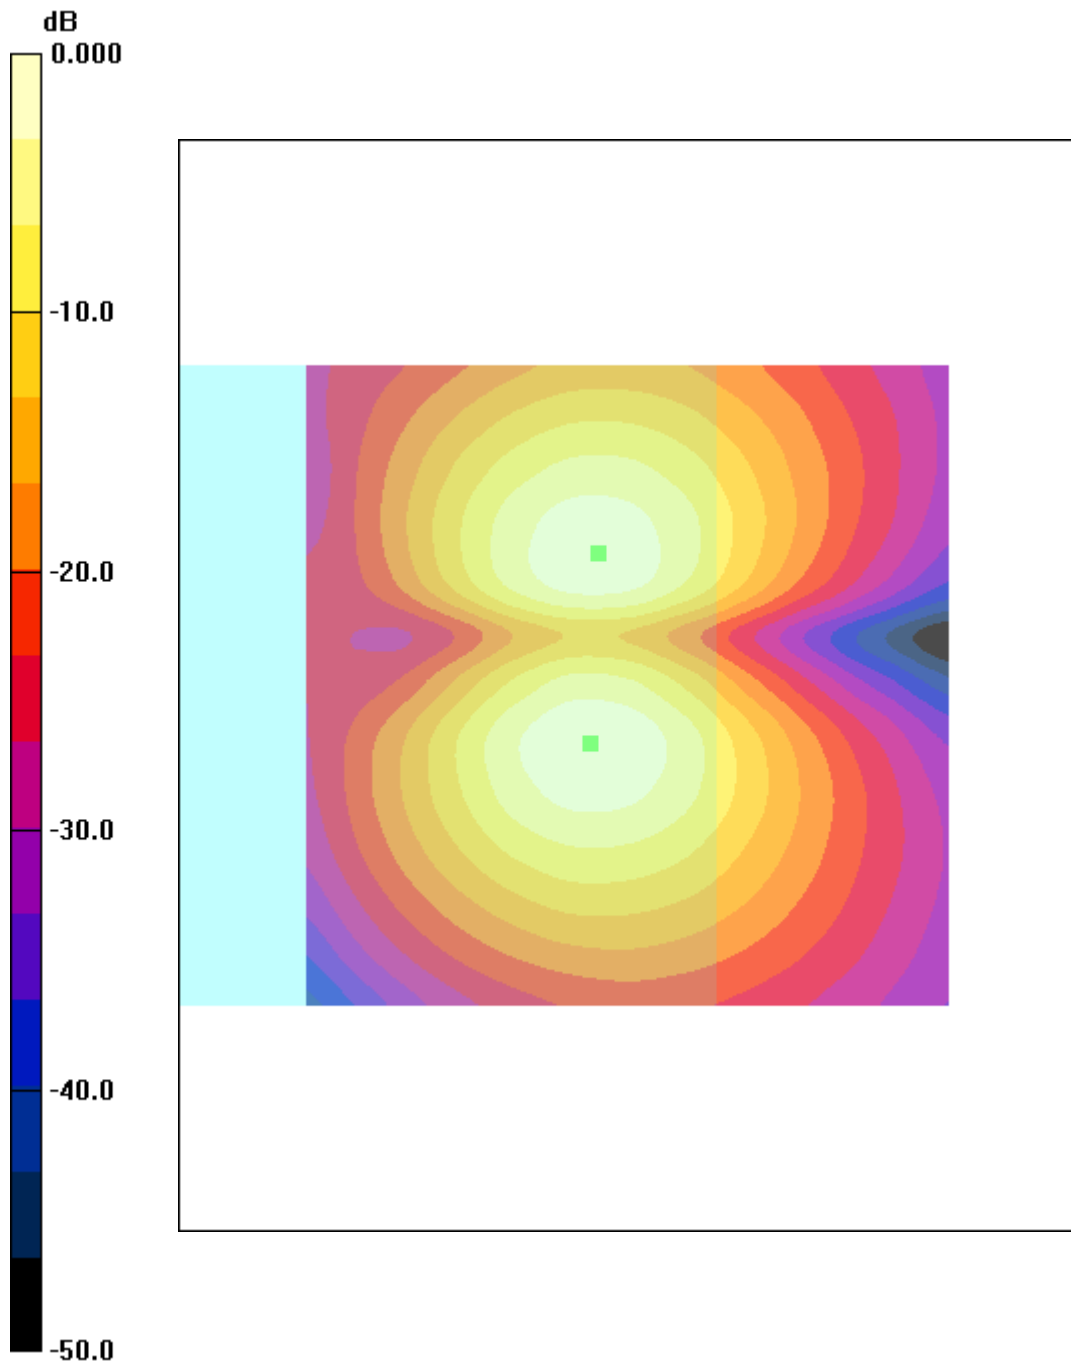

0 dB = 1.00A/m

Date/Time: 16.06.2010 13:28:03

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 39.9 dB

ABM1 comp = -2.03 dB A/m

BWC Factor = 0.148042 dB

Location: -0.6, -8.3, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.148042 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 39.5 dB

ABM1 comp = -2.12 dB A/m

BWC Factor = 0.148042 dB
Location: -1.2, -8.8, 364.4 mm

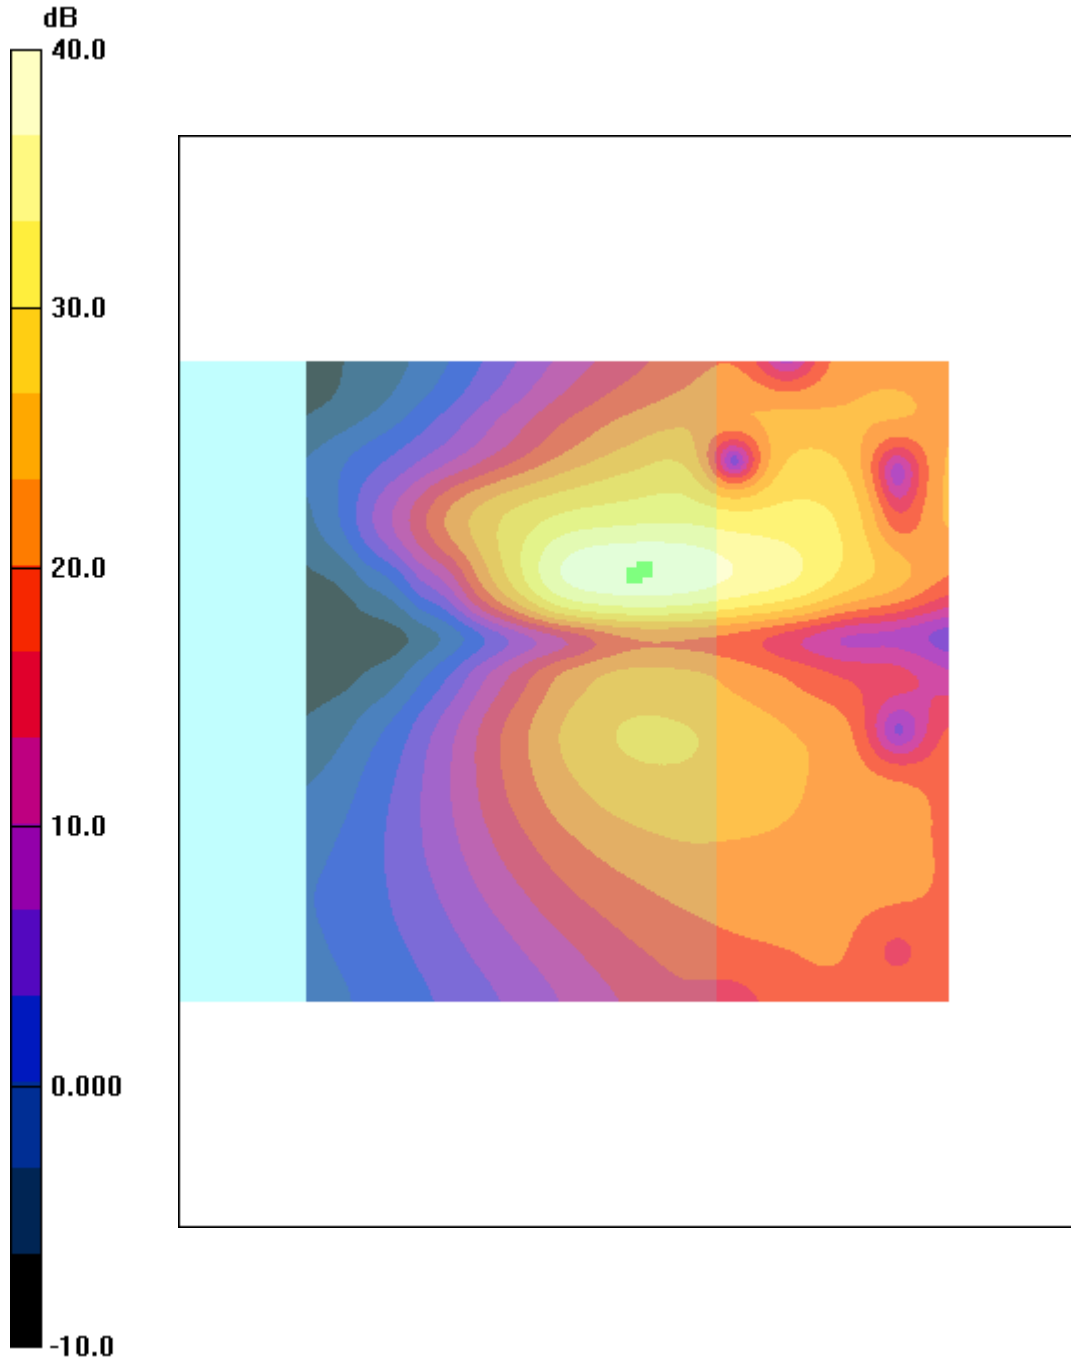

0 dB = 1.00

Annex B.2: HAC T-Coil with GSM 1900

Date/Time: 16.06.2010 14:40:03

HAC_TCoil_1900_z**DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z)**(41x41x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.97 dB A/m

BWC Factor = 0.150005 dB

Location: 4, -1.6, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**(121x121x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.92 dB A/m

BWC Factor = 0.150005 dB

Location: 3.8, -1.3, 364.4 mm

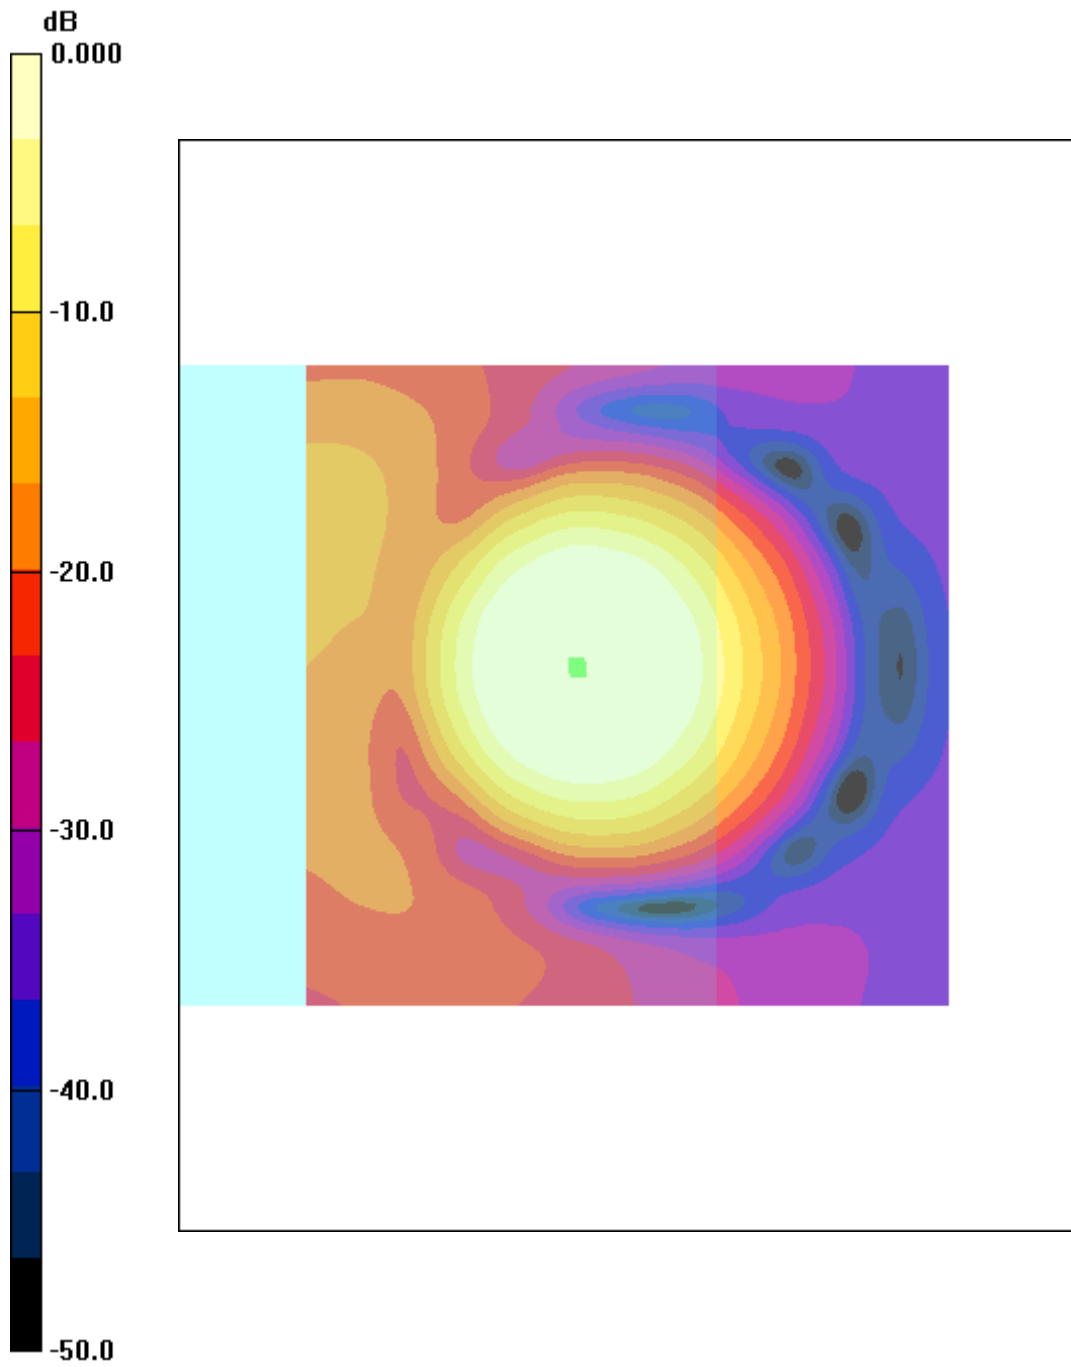

0 dB = 1.00A/m

Date/Time: 16.06.2010 14:40:03

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL**Program Name: HAC_TCoil_WD_Emission**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 31.5 dB

ABM1 comp = 4.74 dB A/m

BWC Factor = 0.150005 dB

Location: -0.6, -0.8, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 31.6 dB

ABM1 comp = 4.60 dB A/m

BWC Factor = 0.150005 dB
Location: -0.8, -0.8, 364.4 mm

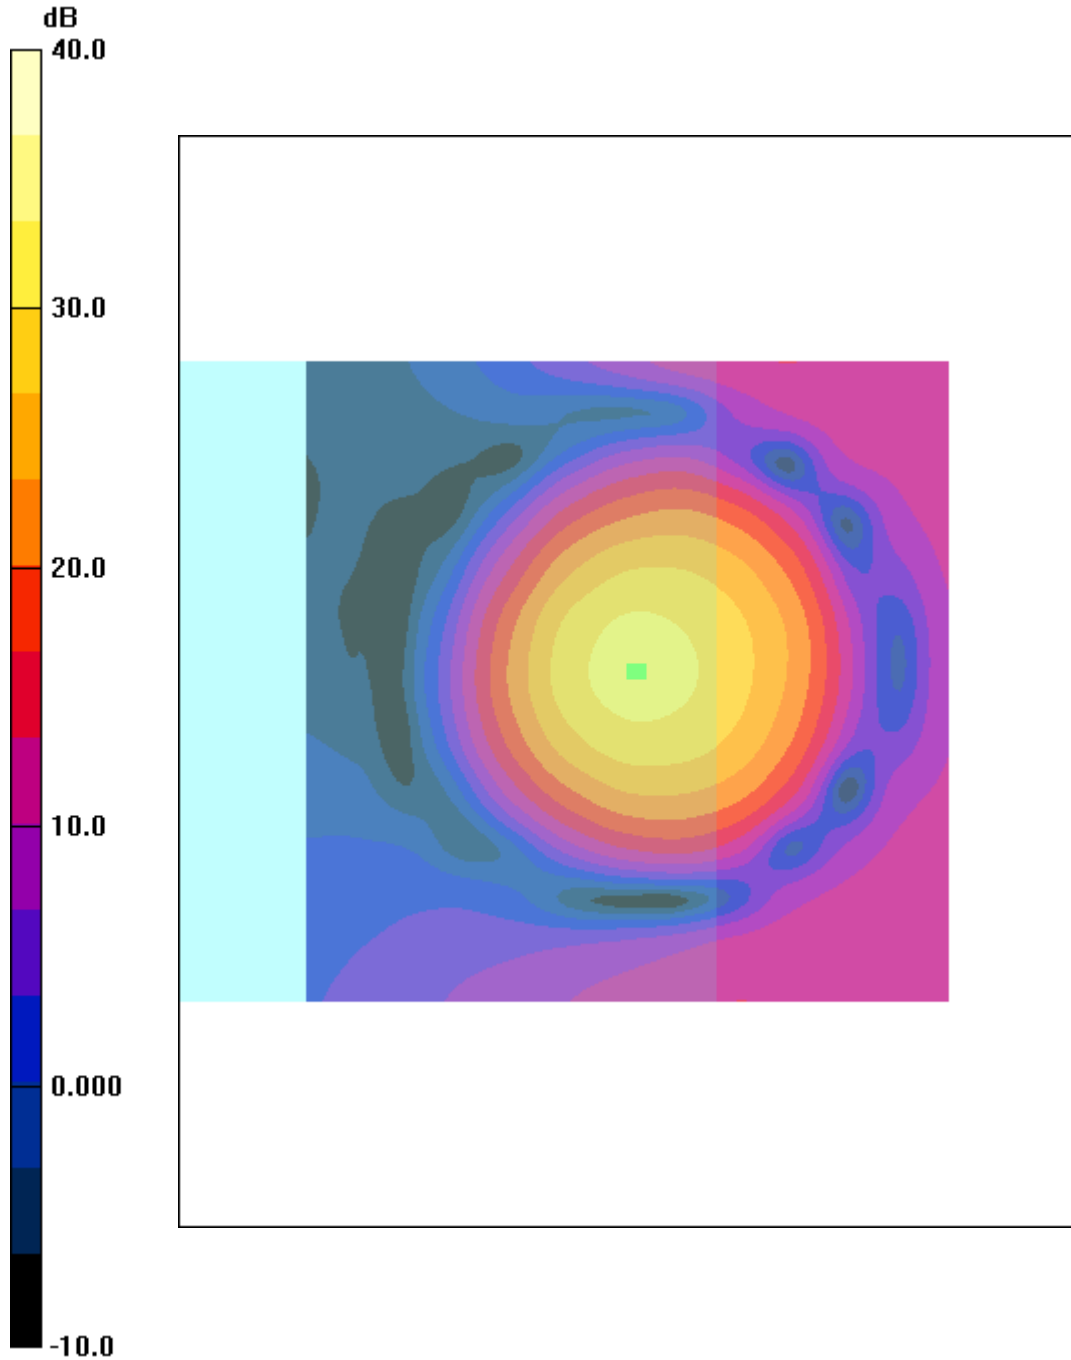

0 dB = 1.00

Date/Time: 16.06.2010 14:43:11

HAC_TCoil_1900_x

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.280 dB A/m

BWC Factor = 0.150005 dB

Location: -4.3, -4, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 1.19 dB A/m

BWC Factor = 0.150005 dB

Location: 10.4, -3.8, 364.4 mm

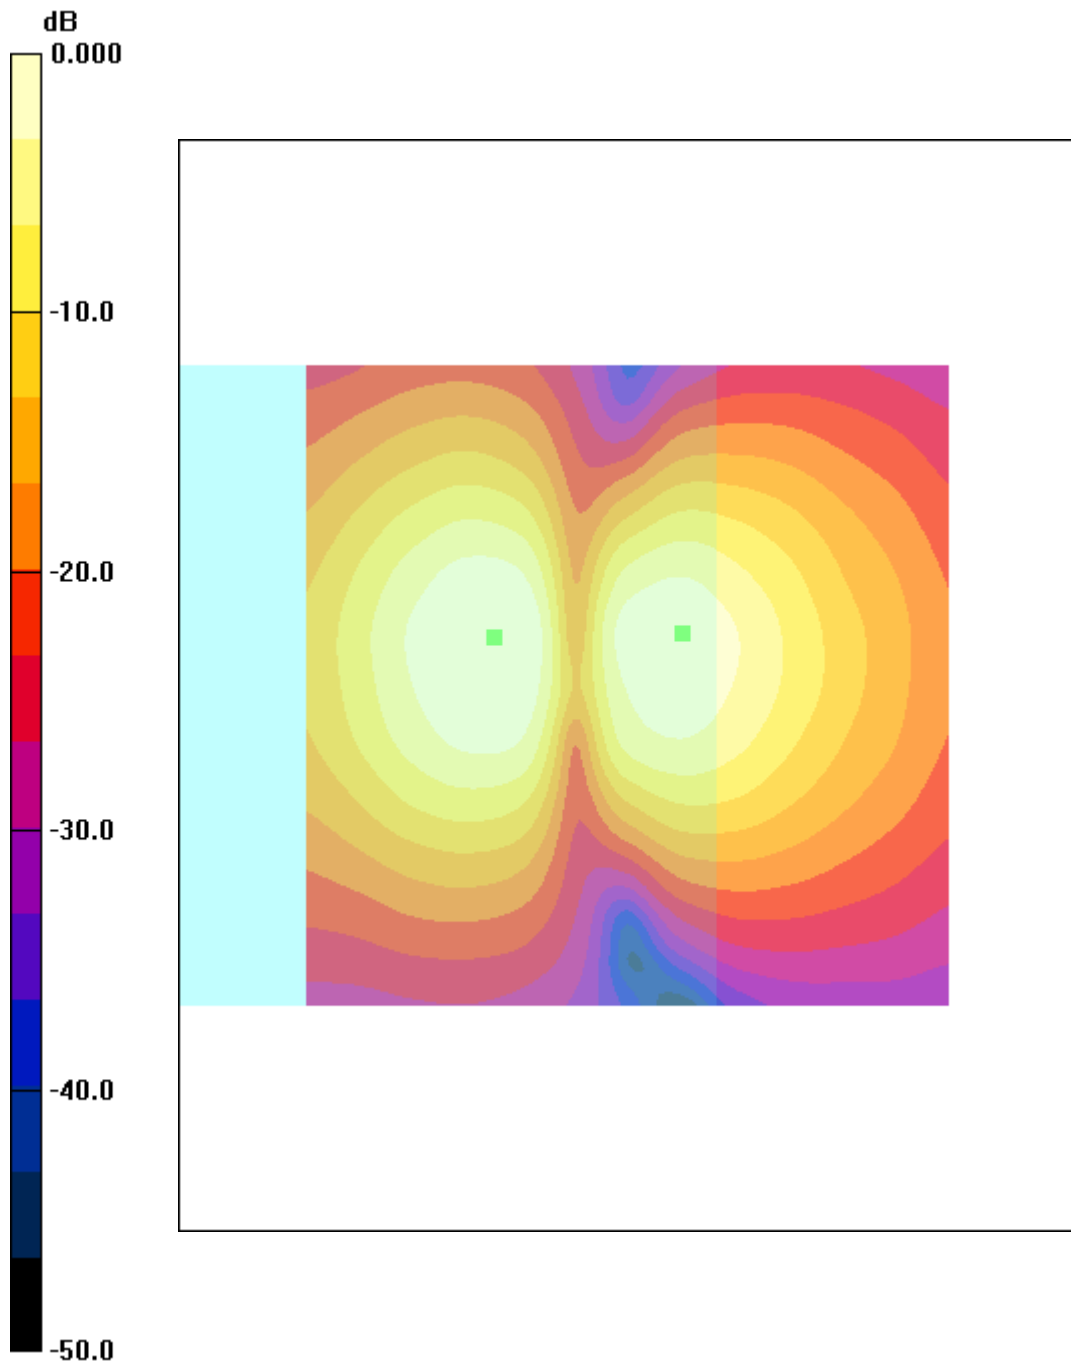

Date/Time: 16.06.2010 14:43:11

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL**Program Name: HAC_TCoil_WD_Emission**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 26.5 dB

ABM1 comp = -1.85 dB A/m

BWC Factor = 0.150005 dB

Location: -6.5, -0.8, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 26.5 dB

ABM1 comp = -1.38 dB A/m

BWC Factor = 0.150005 dB
Location: -6.2, -1.7, 364.4 mm

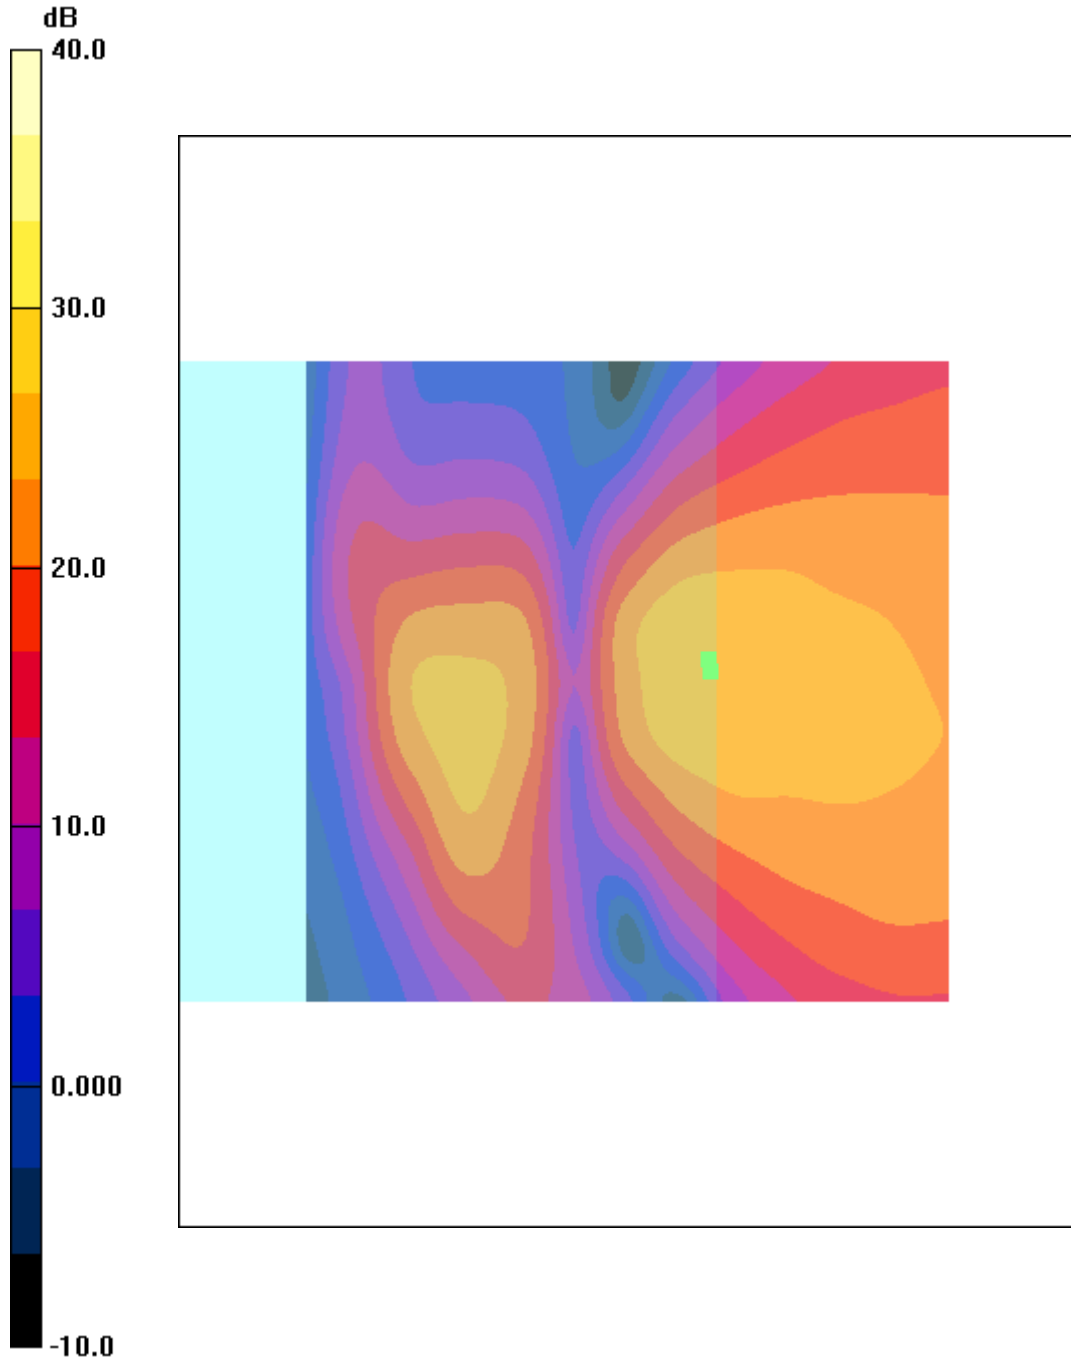

0 dB = 1.00

Date/Time: 16.06.2010 14:46:04

HAC_TCoil_1900_y

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated

Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.644 dB A/m

BWC Factor = 0.150005 dB

Location: 2.6, -10.1, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated

Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.118 dB A/m

BWC Factor = 0.150005 dB

Location: 2.9, 4.6, 364.4 mm

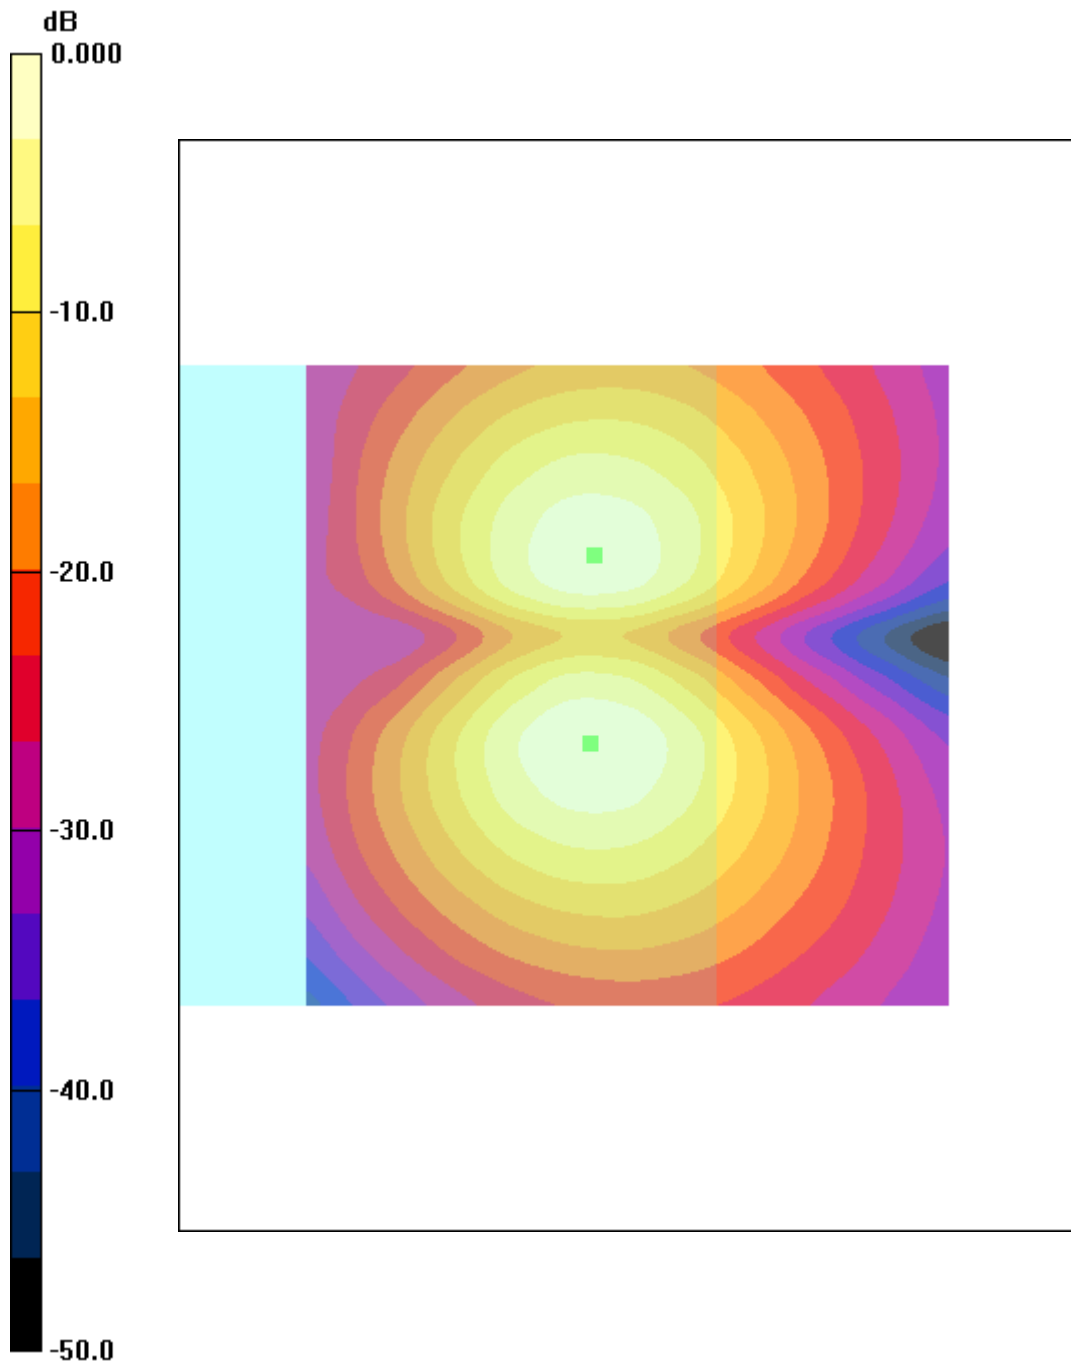

0 dB = 1.00A/m

Date/Time: 16.06.2010 14:46:04

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6ZL**Program Name: HAC_TCoil_WD_Emission**

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 40.5 dB

ABM1 comp = -1.76 dB A/m

BWC Factor = 0.150005 dB

Location: -0.4, -8.5, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 40.3 dB

ABM1 comp = -1.69 dB A/m

BWC Factor = 0.150005 dB
Location: -0.4, -8.8, 364.4 mm

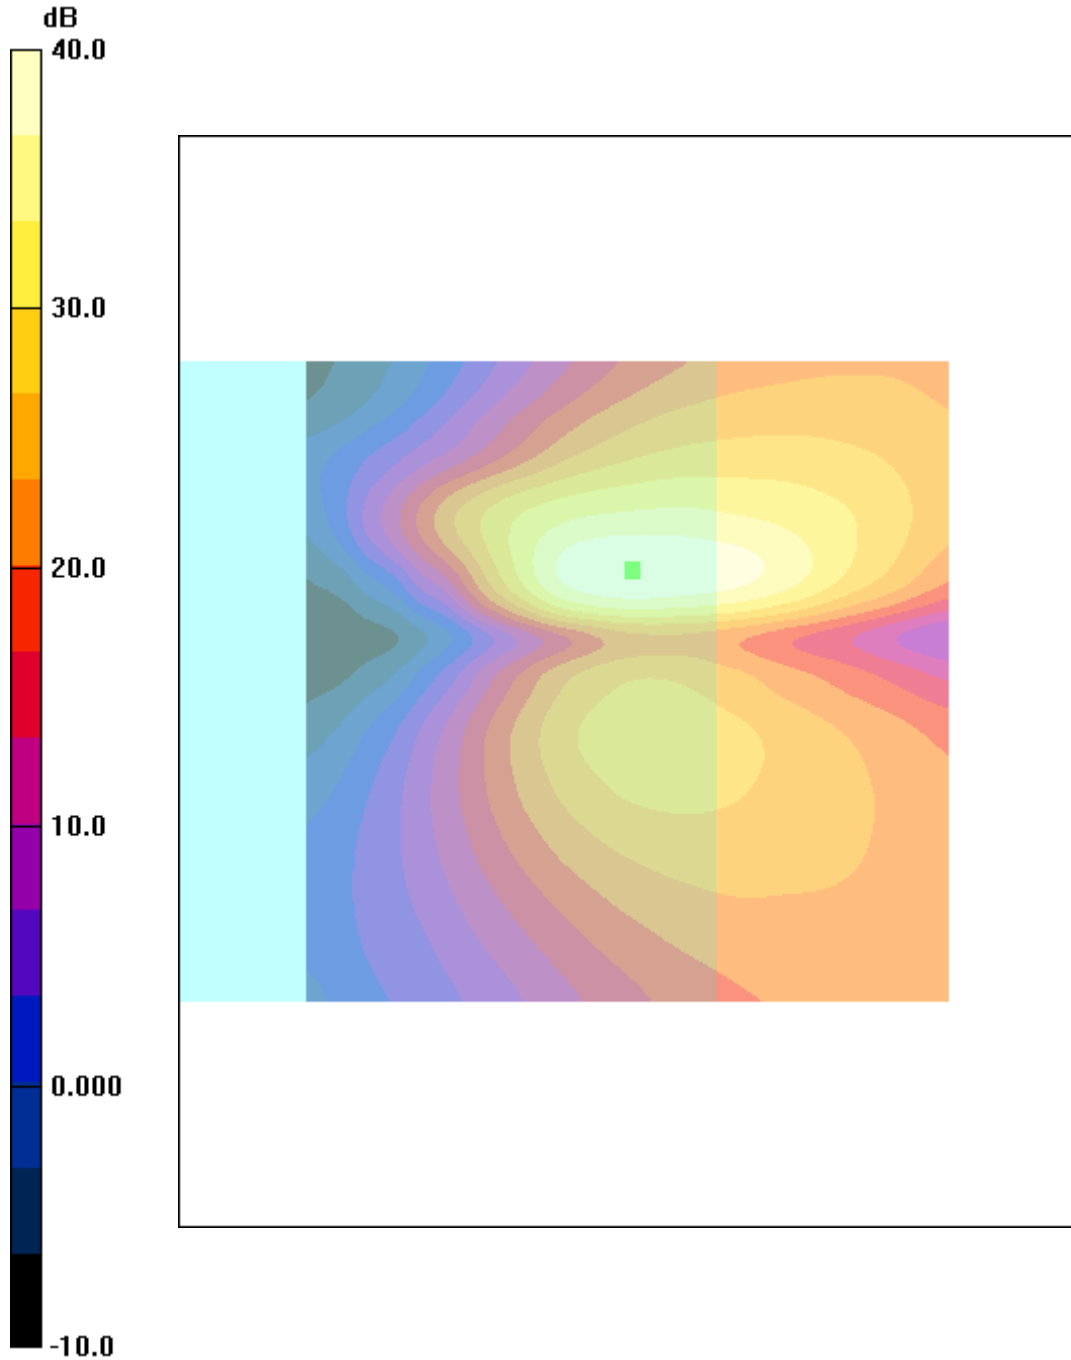

0 dB = 1.00

Annex B.3: HAC T-Coil with UMTS FDD II

Date/Time: 16.06.2010 12:10:34

HAC_TCoil_FDDII_z**DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

**General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z)
(41x41x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.80 dB A/m

BWC Factor = 0.150005 dB

Location: 2.6, -1.8, 364.4 mm

**General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)
(121x121x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 6.82 dB A/m

BWC Factor = 0.150005 dB

Location: 3.3, -1.3, 364.4 mm

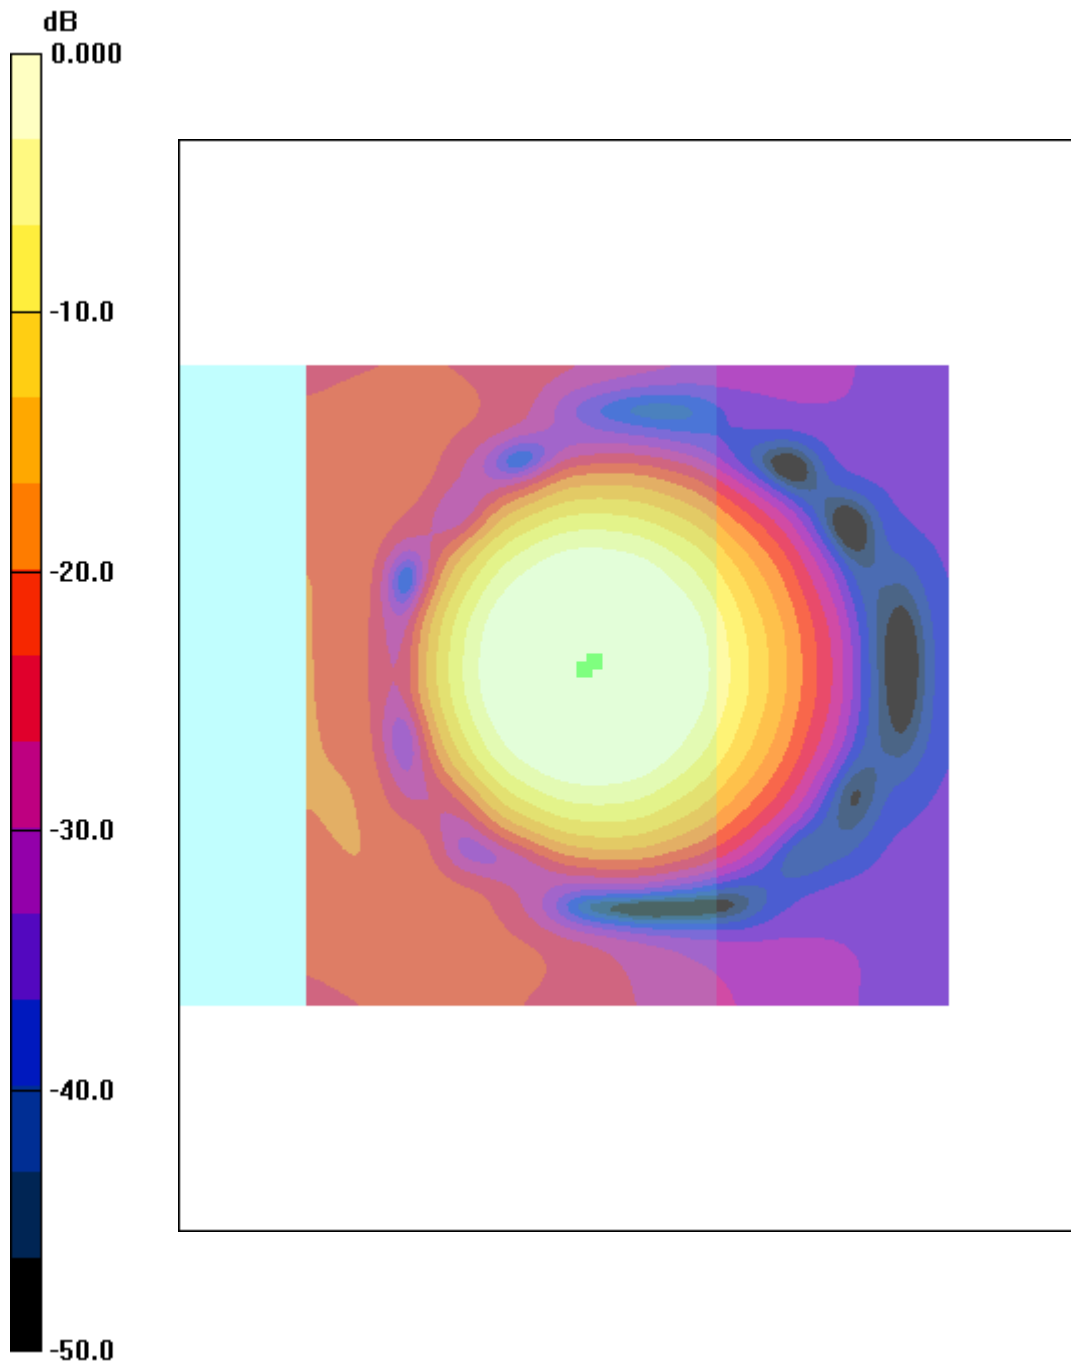

0 dB = 1.00A/m

Date/Time: 16.06.2010 12:10:34

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**Program Name: HAC_TCoil_WD_Emission**

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.3 dB

ABM1 comp = 5.82 dB A/m

BWC Factor = 0.150005 dB

Location: 0.2, -2, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.1 dB

ABM1 comp = 6.20 dB A/m

BWC Factor = 0.150005 dB
Location: 0.8, -1.3, 364.4 mm

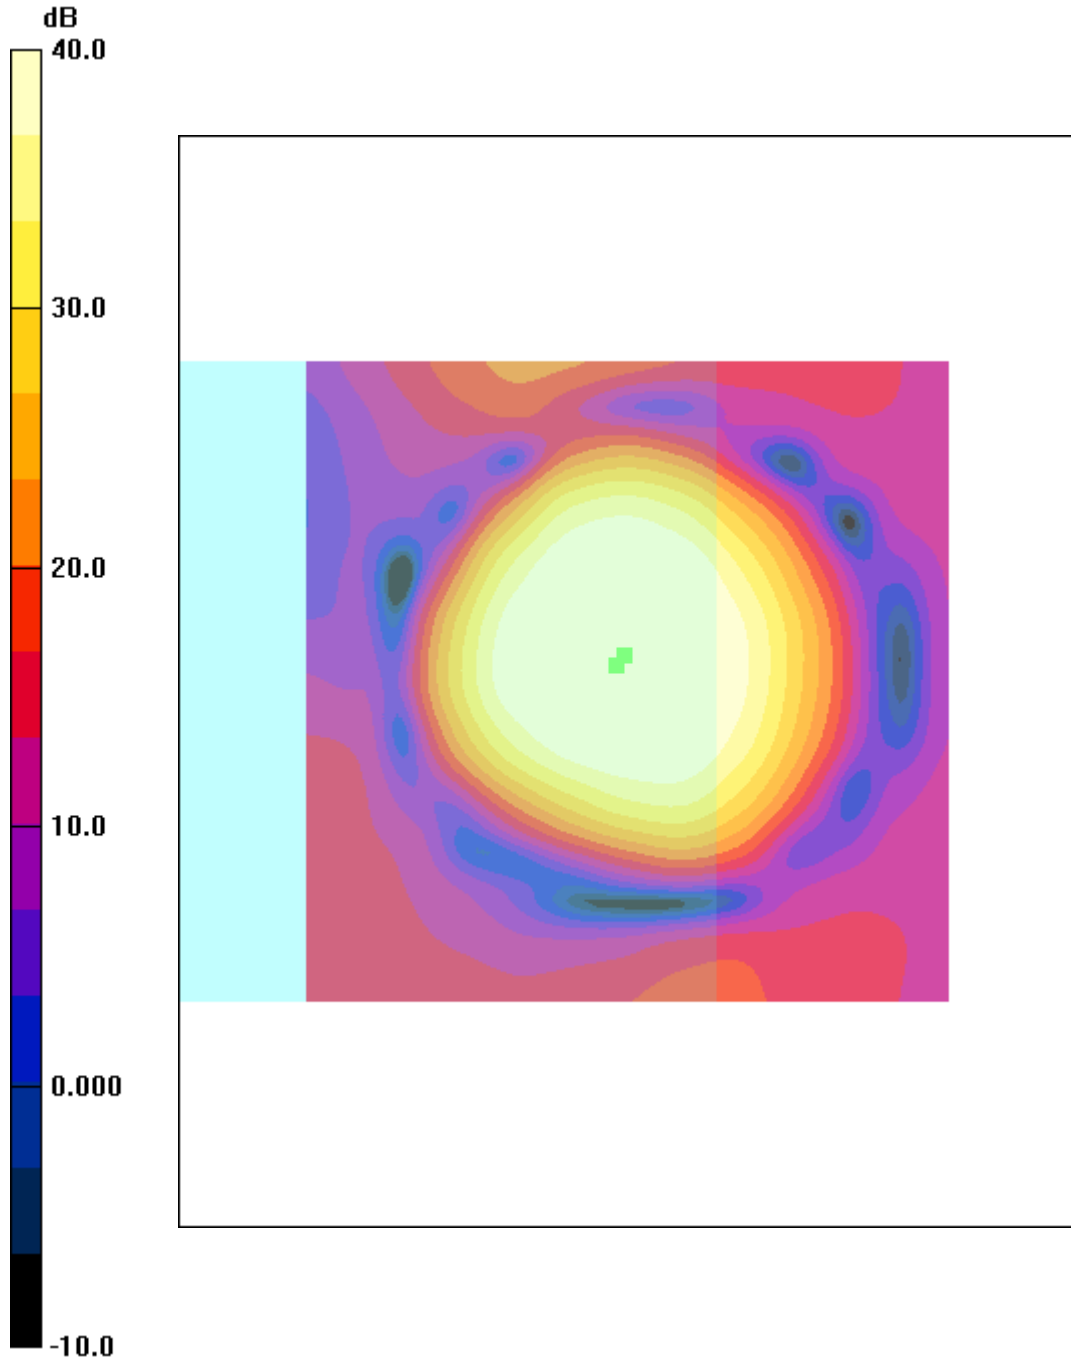

0 dB = 1.00

Date/Time: 16.06.2010 12:13:42

HAC_TCoil_FDDII_x

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.218 dB A/m

BWC Factor = 0.150005 dB

Location: -3.8, -4, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 1.31 dB A/m

BWC Factor = 0.150005 dB

Location: 9.6, -3.8, 364.4 mm

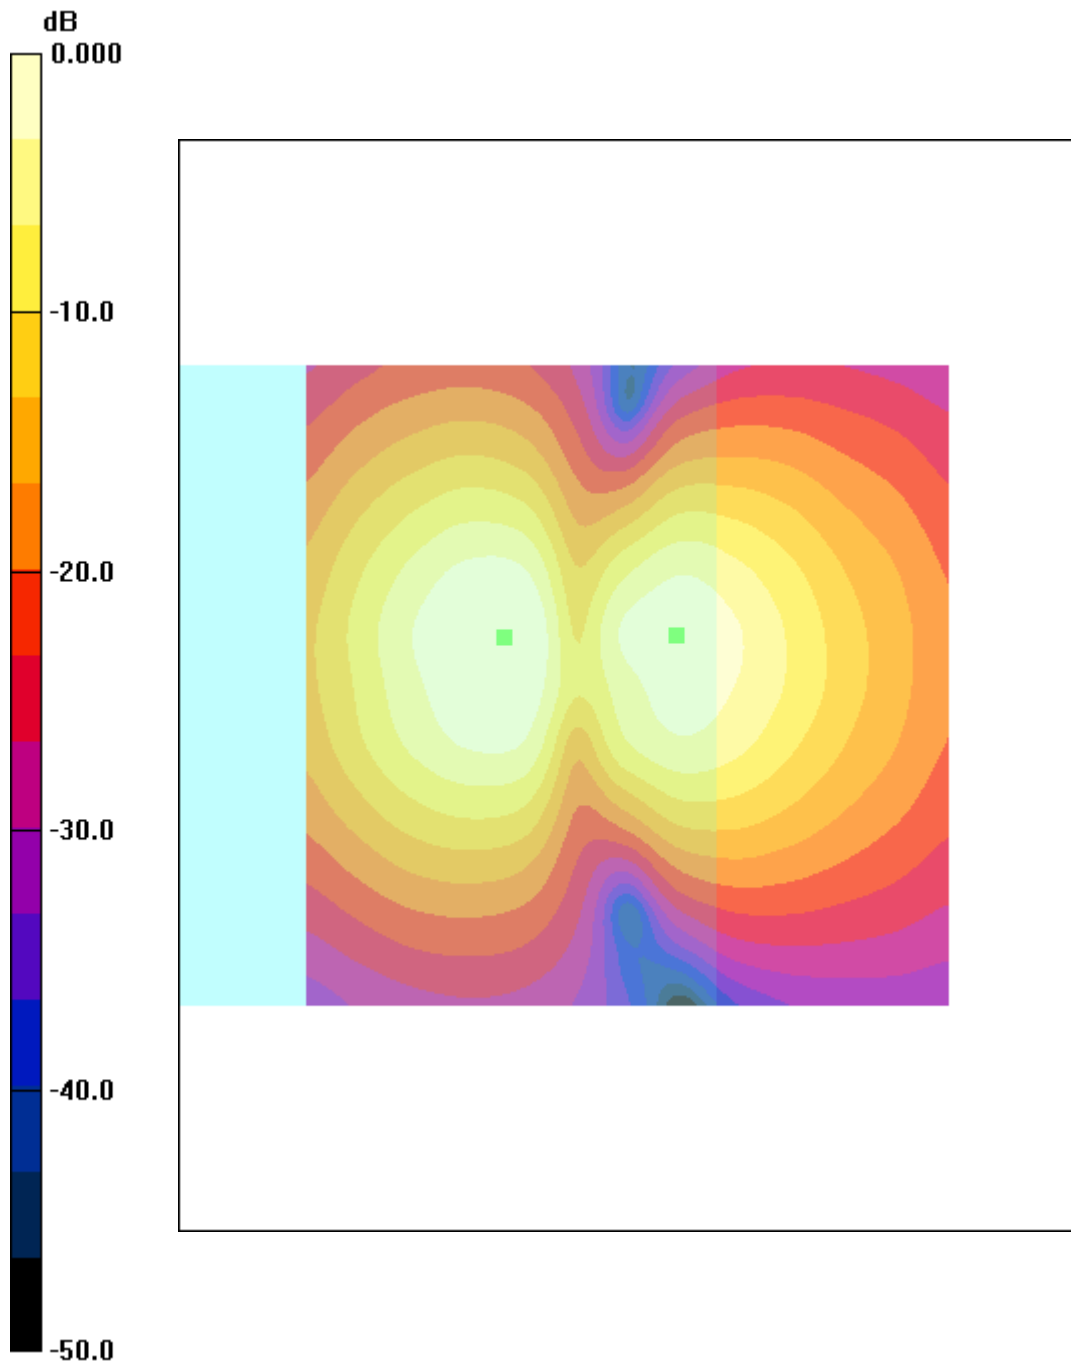

0 dB = 1.00A/m

Date/Time: 16.06.2010 12:13:42

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**Program Name: HAC_TCoil_WD_Emission**

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 37.2 dB

ABM1 comp = -0.586 dB A/m

BWC Factor = 0.150005 dB

Location: -5.2, -4, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 37.1 dB

ABM1 comp = -0.465 dB A/m

BWC Factor = 0.150005 dB
Location: -5.4, -3.8, 364.4 mm

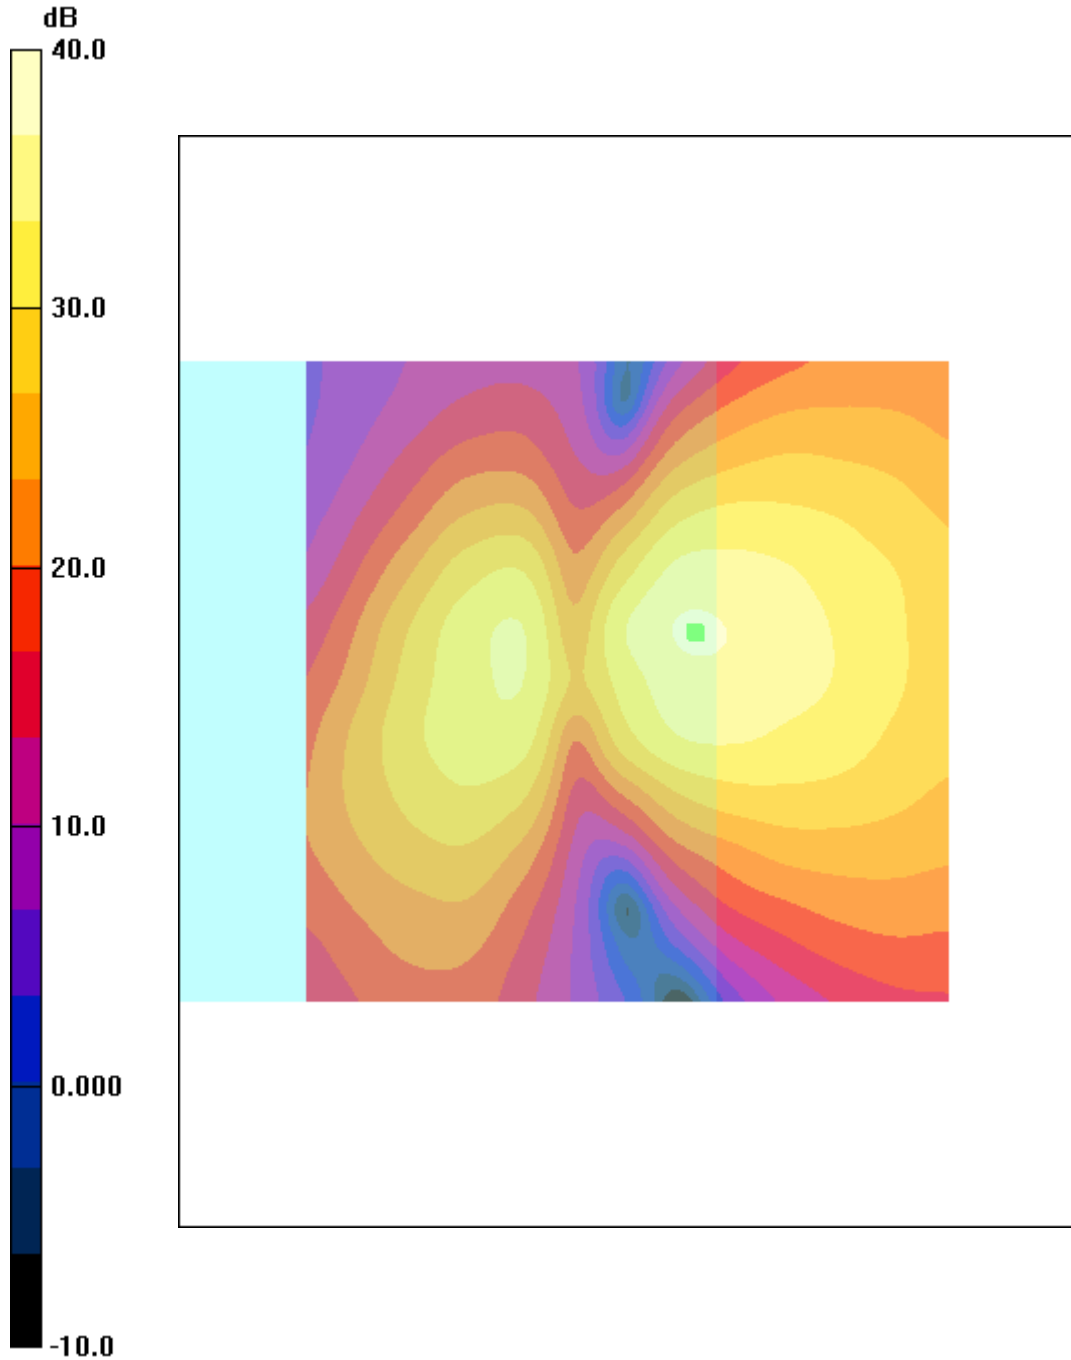

Date/Time: 16.06.2010 12:16:40

HAC_TCoil_FDDII_y

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated

Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.753 dB A/m

BWC Factor = 0.150005 dB

Location: 2, -10.9, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated

Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -0.232 dB A/m

BWC Factor = 0.150005 dB

Location: 2.5, 4.6, 364.4 mm

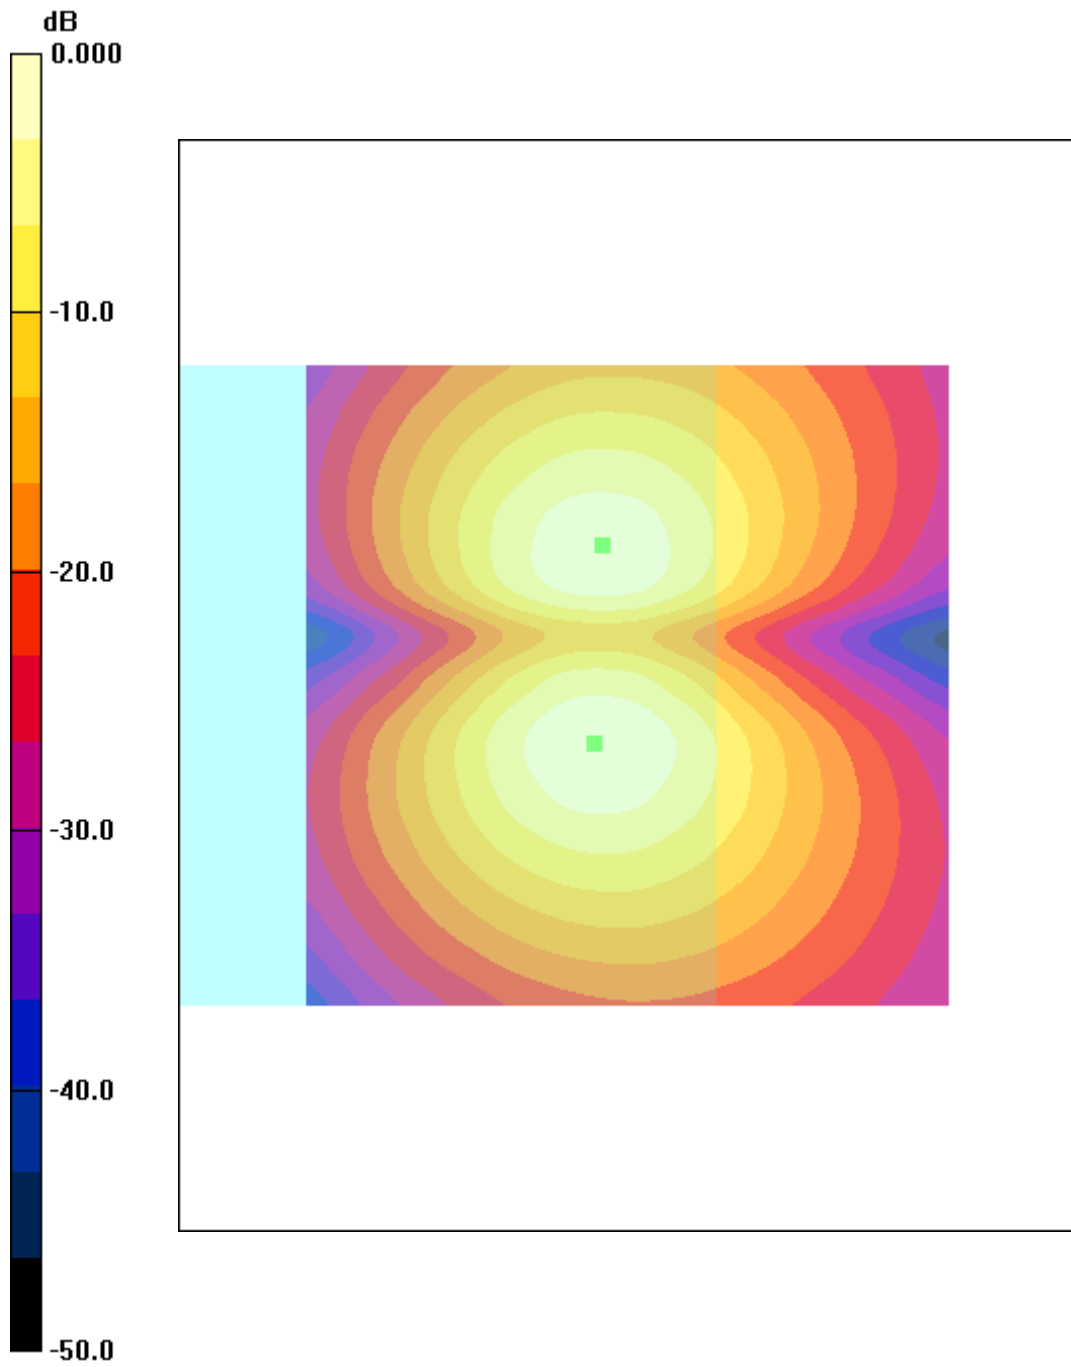

0 dB = 1.00A/m

Date/Time: 16.06.2010 12:16:40

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Program Name: HAC_TCoil_WD_Emission

Communication System: WCDMA FDD II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = -41.5 dB

ABM1 comp = -63.8 dB A/m

BWC Factor = 0.150005 dB

Location: -0.2, -10.9, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 41.4 dB

ABM1 comp = -1.29 dB A/m

BWC Factor = 0.150005 dB
Location: -0.4, -10.4, 364.4 mm

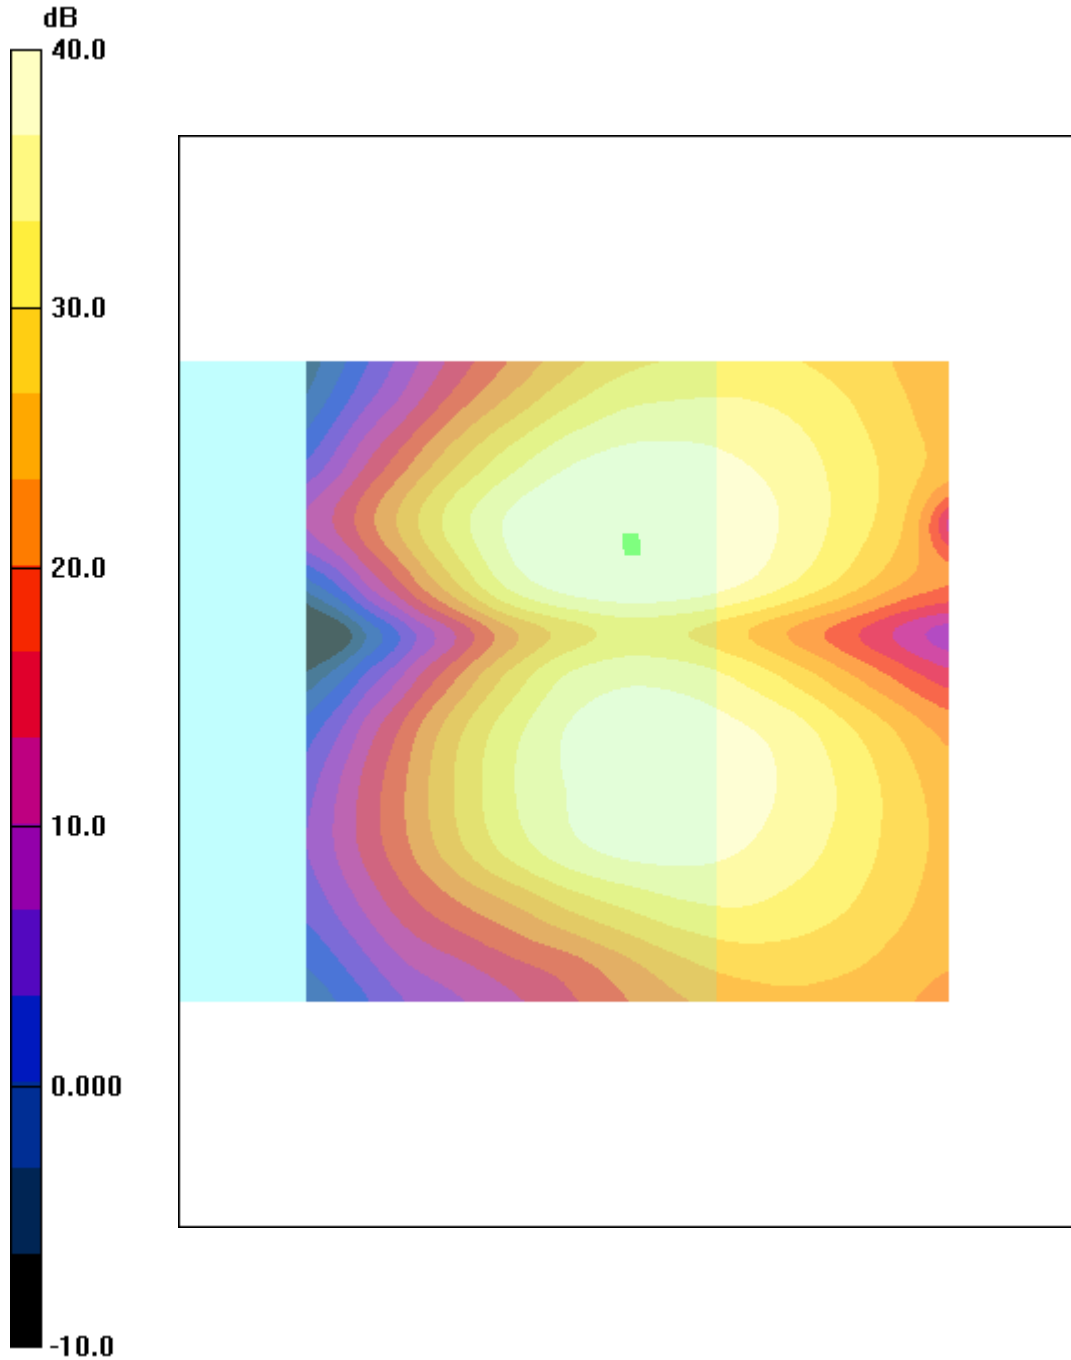

0 dB = 1.00

Annex B.1: HAC T-Coil with UMTS FDD V

Date/Time: 22.06.2010 10:21:40

HAC_TCoil_FDDV**DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL**

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated Signal(x,y,z)**(41x41x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 5.32 dB A/m

BWC Factor = 0.150005 dB

Location: 2.4, -2.2, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated Signal(x,y,z)**(121x121x1):**

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = 5.48 dB A/m

BWC Factor = 0.150005 dB

Location: 2.9, -2.1, 364.4 mm

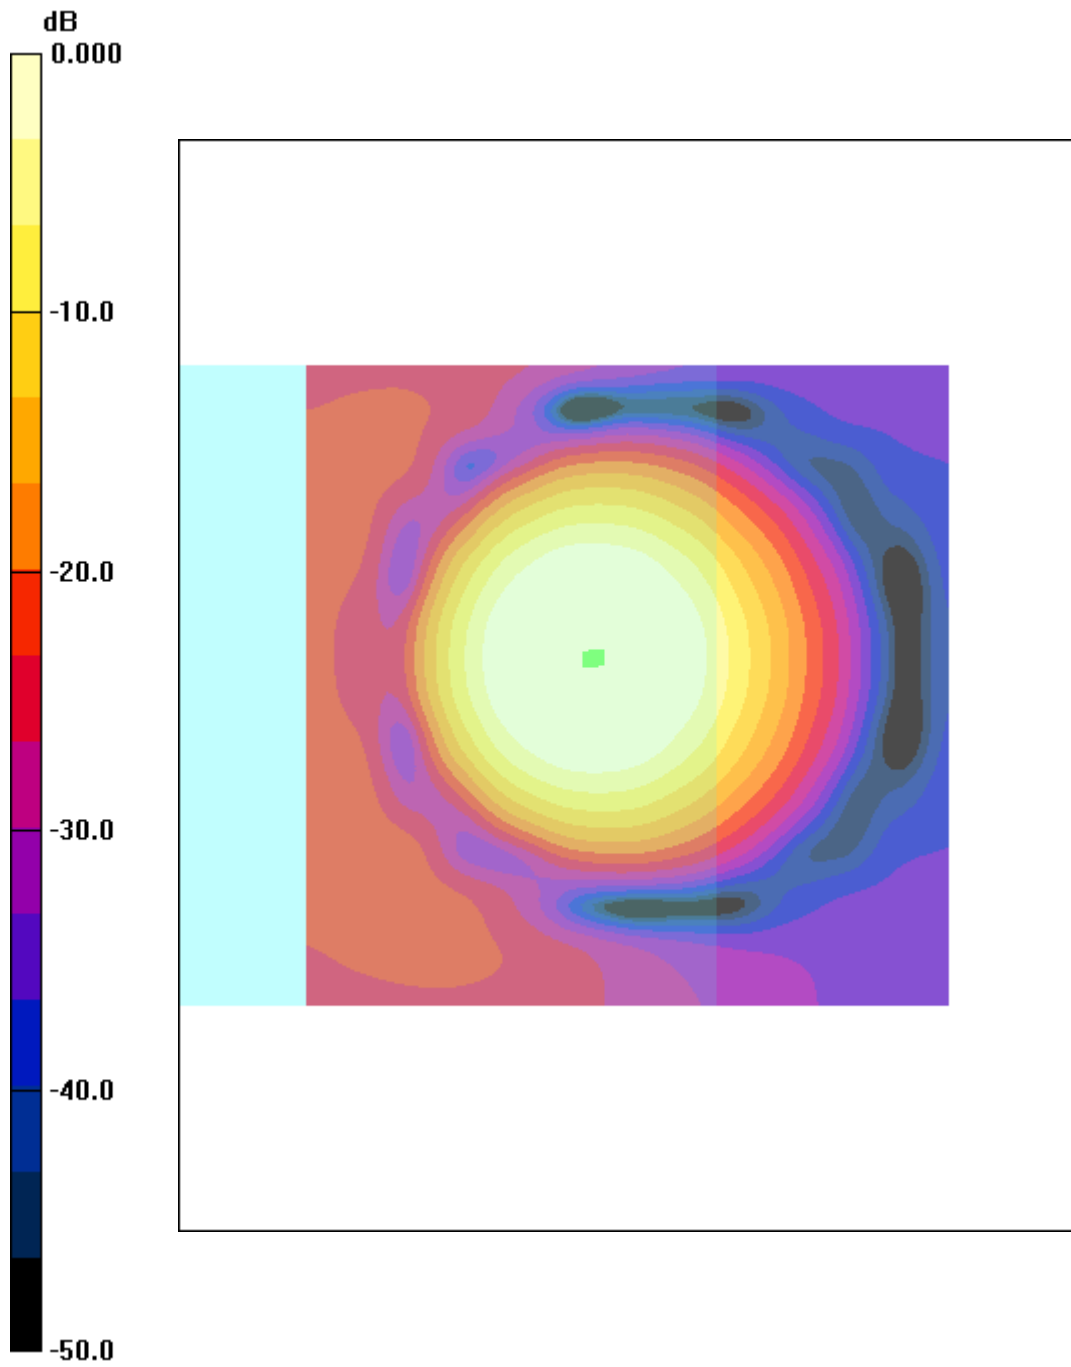

0 dB = 1.00A/m

Date/Time: 22.06.2010 10:21:40

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Program Name: HAC_TCoil_WD_Emission

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/z (axial) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.7 dB

ABM1 comp = 2.10 dB A/m

BWC Factor = 0.150005 dB

Location: -2, -4.2, 364.4 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 43.4 dB

ABM1 comp = 4.70 dB A/m

BWC Factor = 0.150005 dB
Location: 0.4, -3.3, 364.4 mm

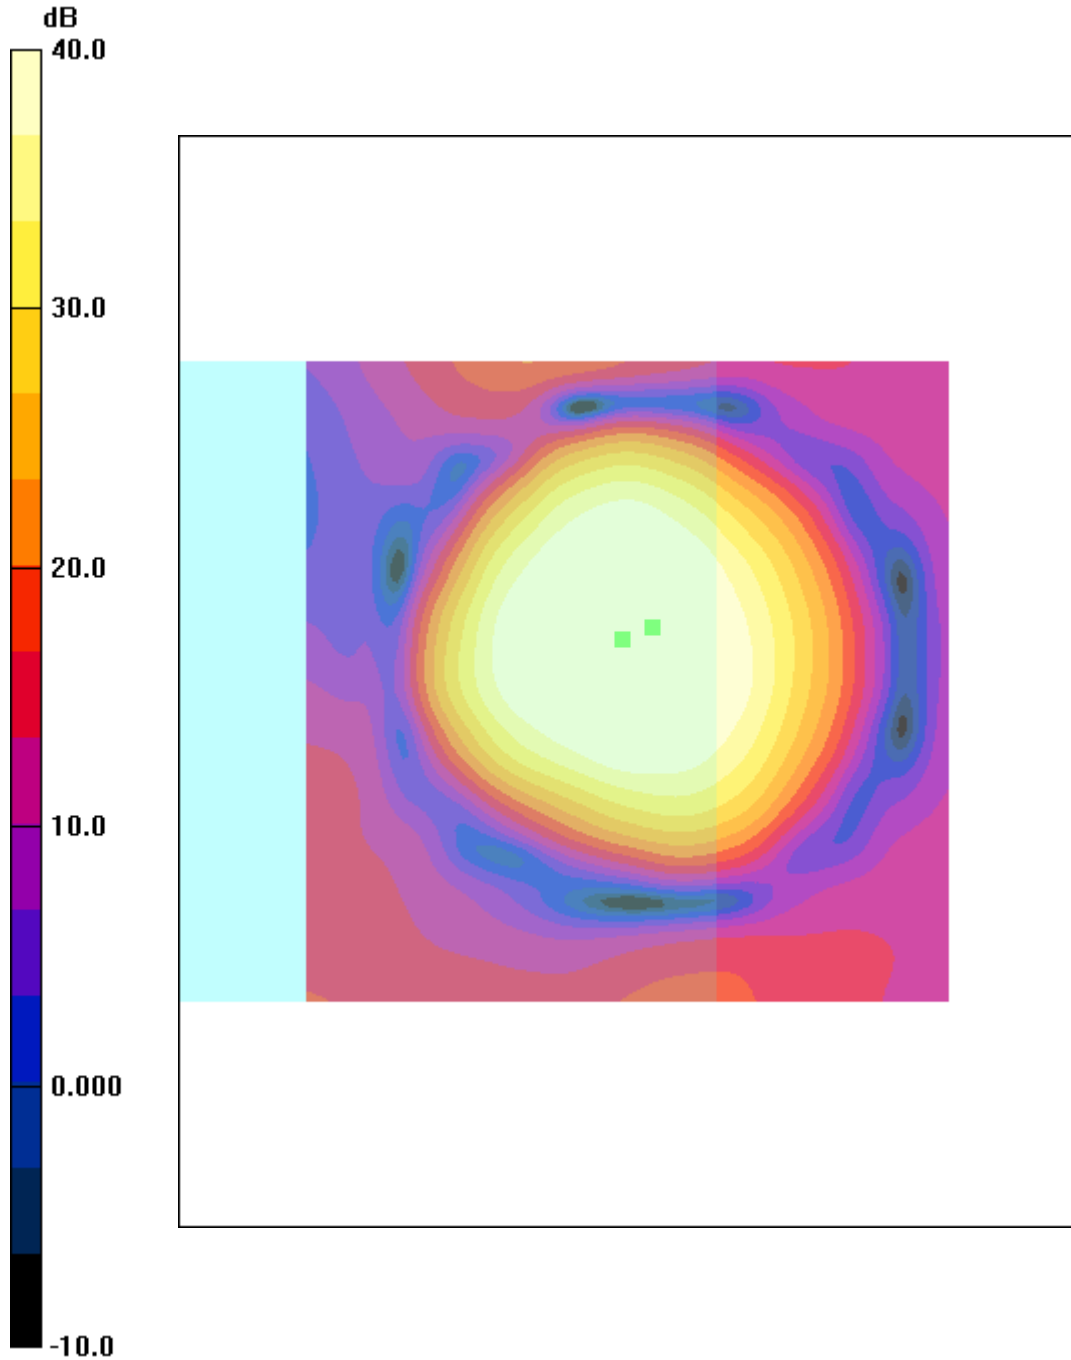

0 dB = 1.00

Date/Time: 22.06.2010 10:30:44

HAC_TCoil_FDDV_x

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated

Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -3.95 dB A/m

BWC Factor = 0.150005 dB

Location: -4.3, -1.6, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated

Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -2.59 dB A/m

BWC Factor = 0.150005 dB

Location: 10, -2.1, 364.4 mm

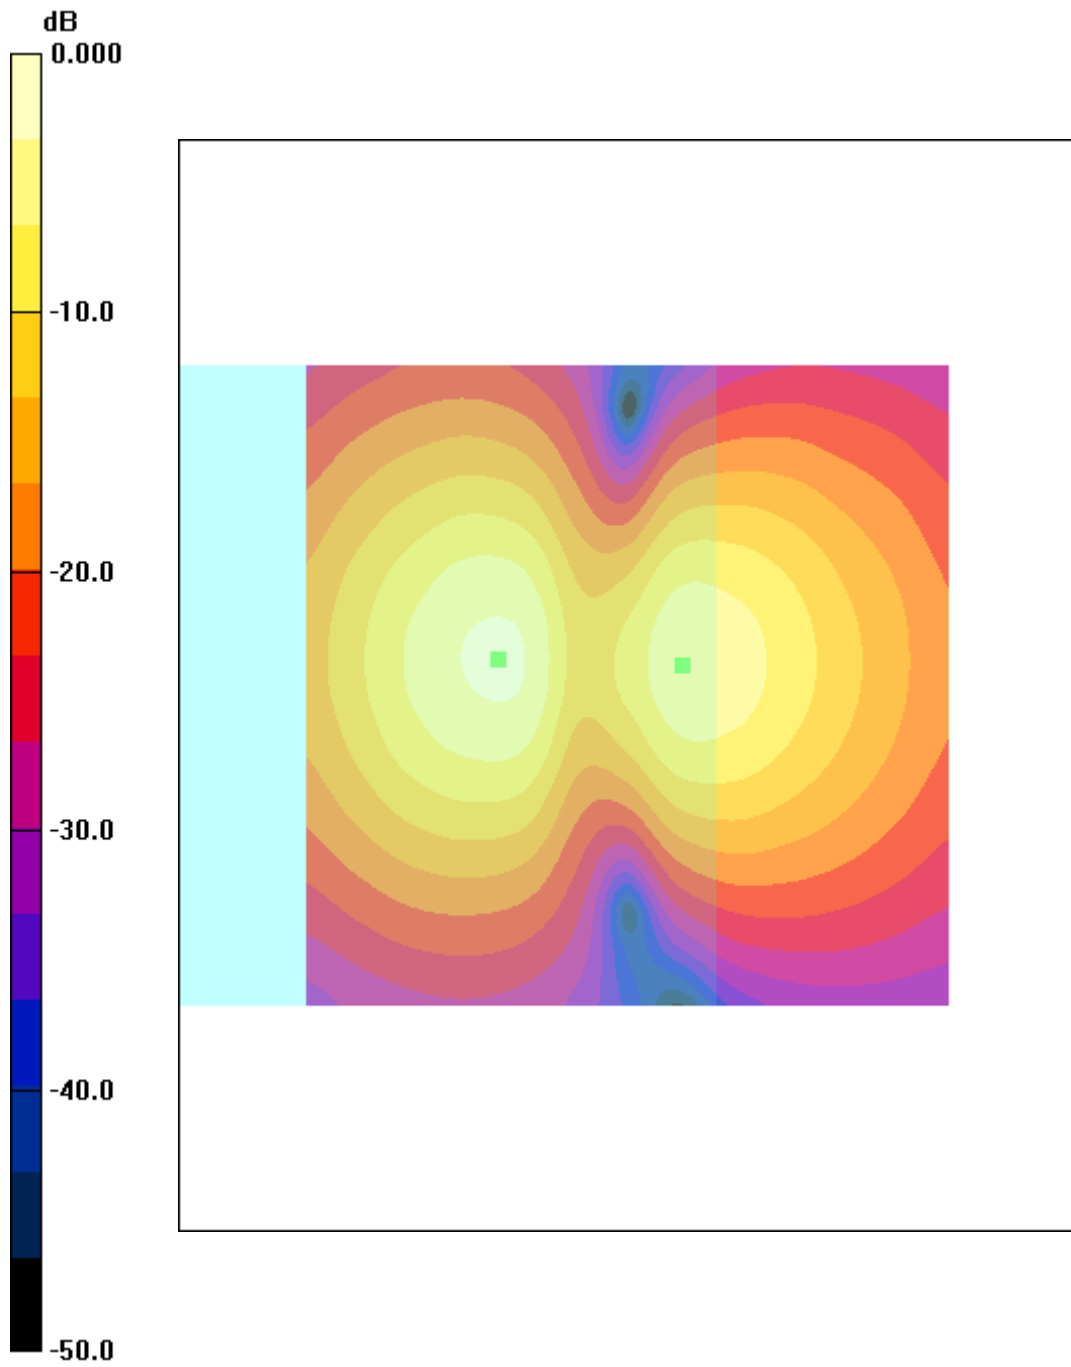

0 dB = 1.00A/m

Date/Time: 22.06.2010 10:30:44

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Program Name: HAC_TCoil_WD_Emission

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/x (longitudinal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 35.3 dB

ABM1 comp = -4.23 dB A/m

BWC Factor = 0.150005 dB

Location: -6.7, -2, 364.4 mm

General Scans/x (longitudinal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 35.2 dB

ABM1 comp = -4.65 dB A/m

BWC Factor = 0.150005 dB
Location: -7.5, -1.7, 364.4 mm

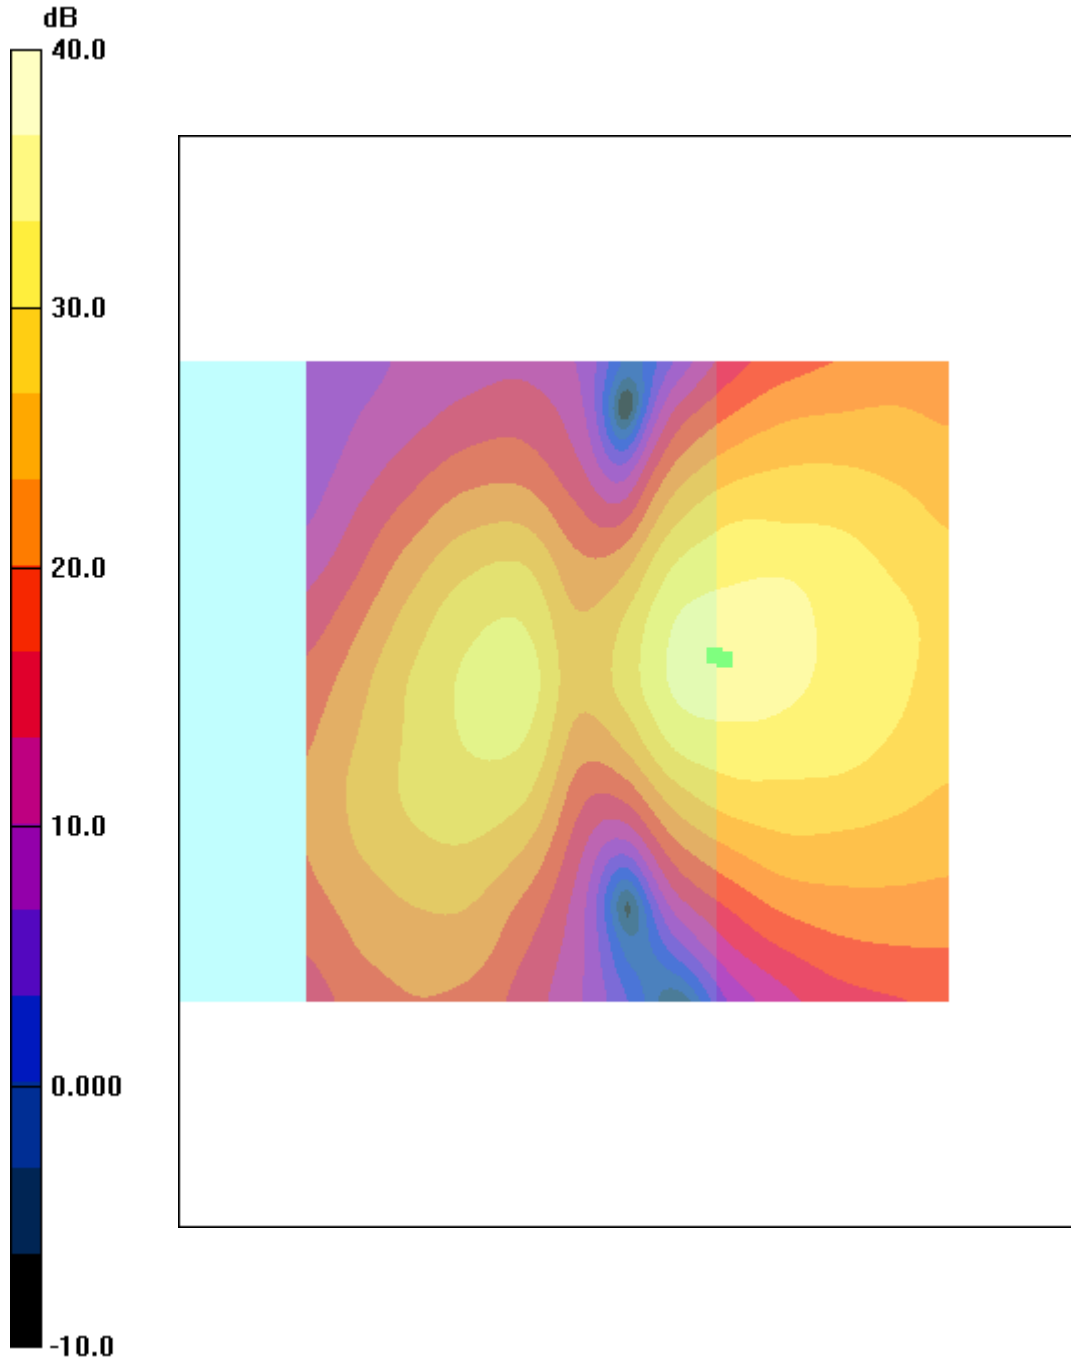

0 dB = 1.00

Date/Time: 22.06.2010 10:34:06

HAC_TCoil_FDDV_y

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated

Signal(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -3.10 dB A/m

BWC Factor = 0.150005 dB

Location: 2.6, -9.7, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated

Signal(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB


Device Reference Point: 0.000, 0.000, 353.7 mm

Cursor:

ABM1 = -2.64 dB A/m

BWC Factor = 0.150005 dB

Location: 3.3, 5.4, 364.4 mm

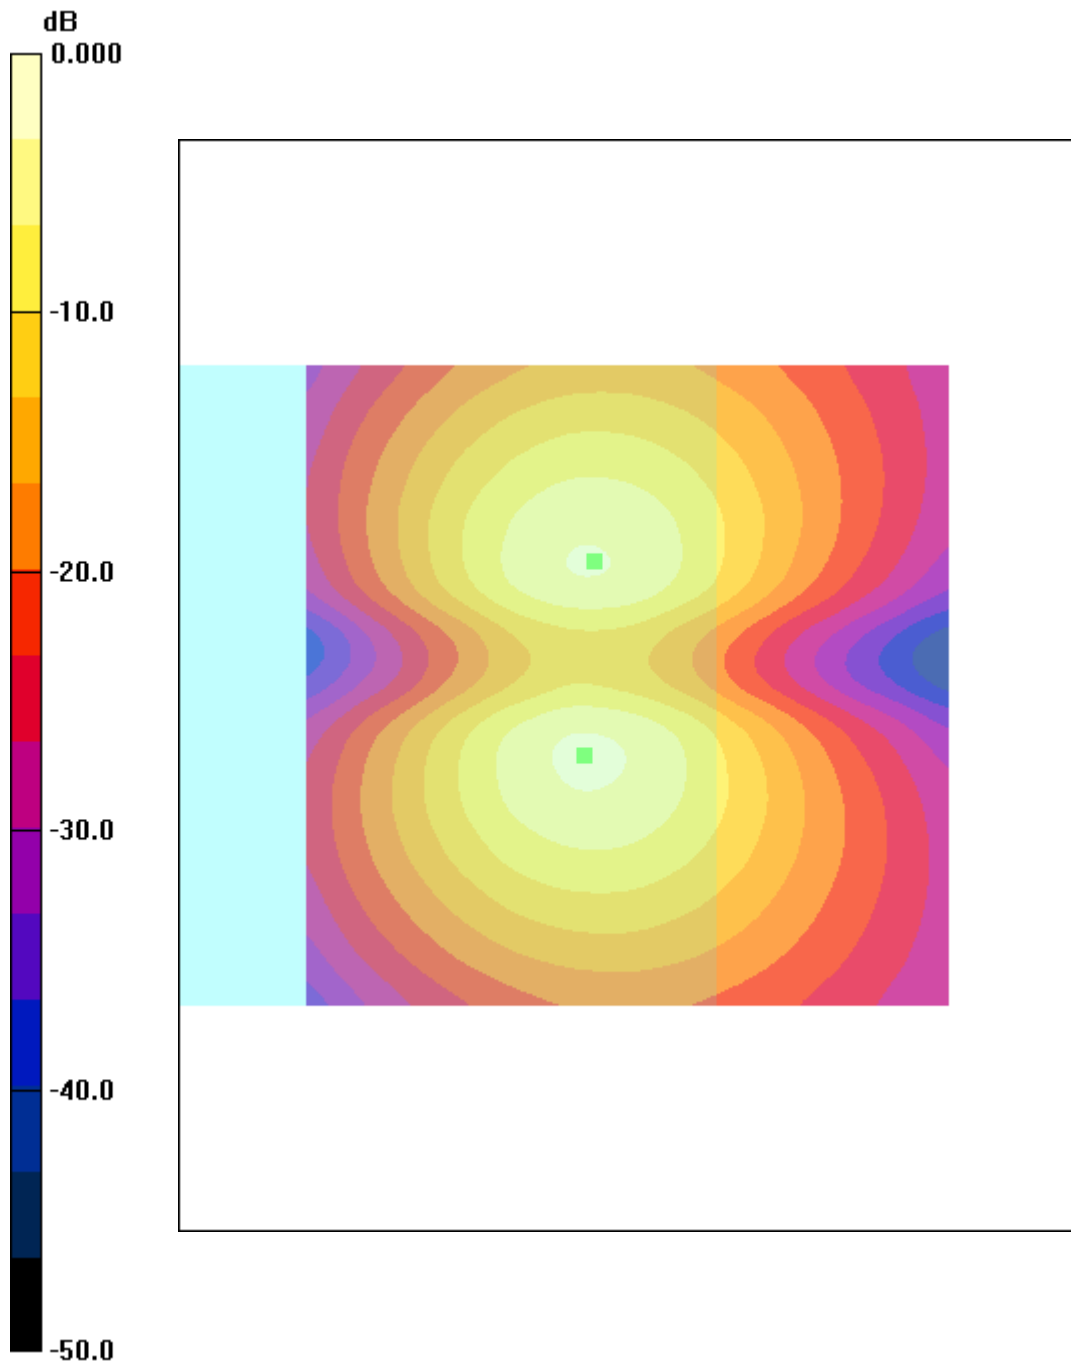

0 dB = 1.00A/m

Date/Time: 22.06.2010 10:34:06

DUT: Sony Ericsson; Type: AAD-3880070-BV; Serial: BX901AZ6CL

Program Name: HAC_TCoil_WD_Emission

Communication System: WCDMA FDD V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1005; ; Calibrated: 17.08.2009
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn477; Calibrated: 07.05.2010
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA; Serial: 1022
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

General Scans/y (transversal) fine 2mm 8 x 8/ABM Interpolated SNR(x,y,z) (41x41x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 41.1 dB

ABM1 comp = -3.16 dB A/m

BWC Factor = 0.150005 dB

Location: 1.8, -10.1, 364.4 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):

Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 38.1

Measure Window Start: 0ms

Measure Window Length: 1000ms

BWC applied: 0.150005 dB

Device Reference Point: 0.000, 0.000, 353.7 mm


Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Cursor:

ABM1/ABM2 = 41.2 dB

ABM1 comp = -3.71 dB A/m

BWC Factor = 0.150005 dB
Location: 0, -9.6, 364.4 mm

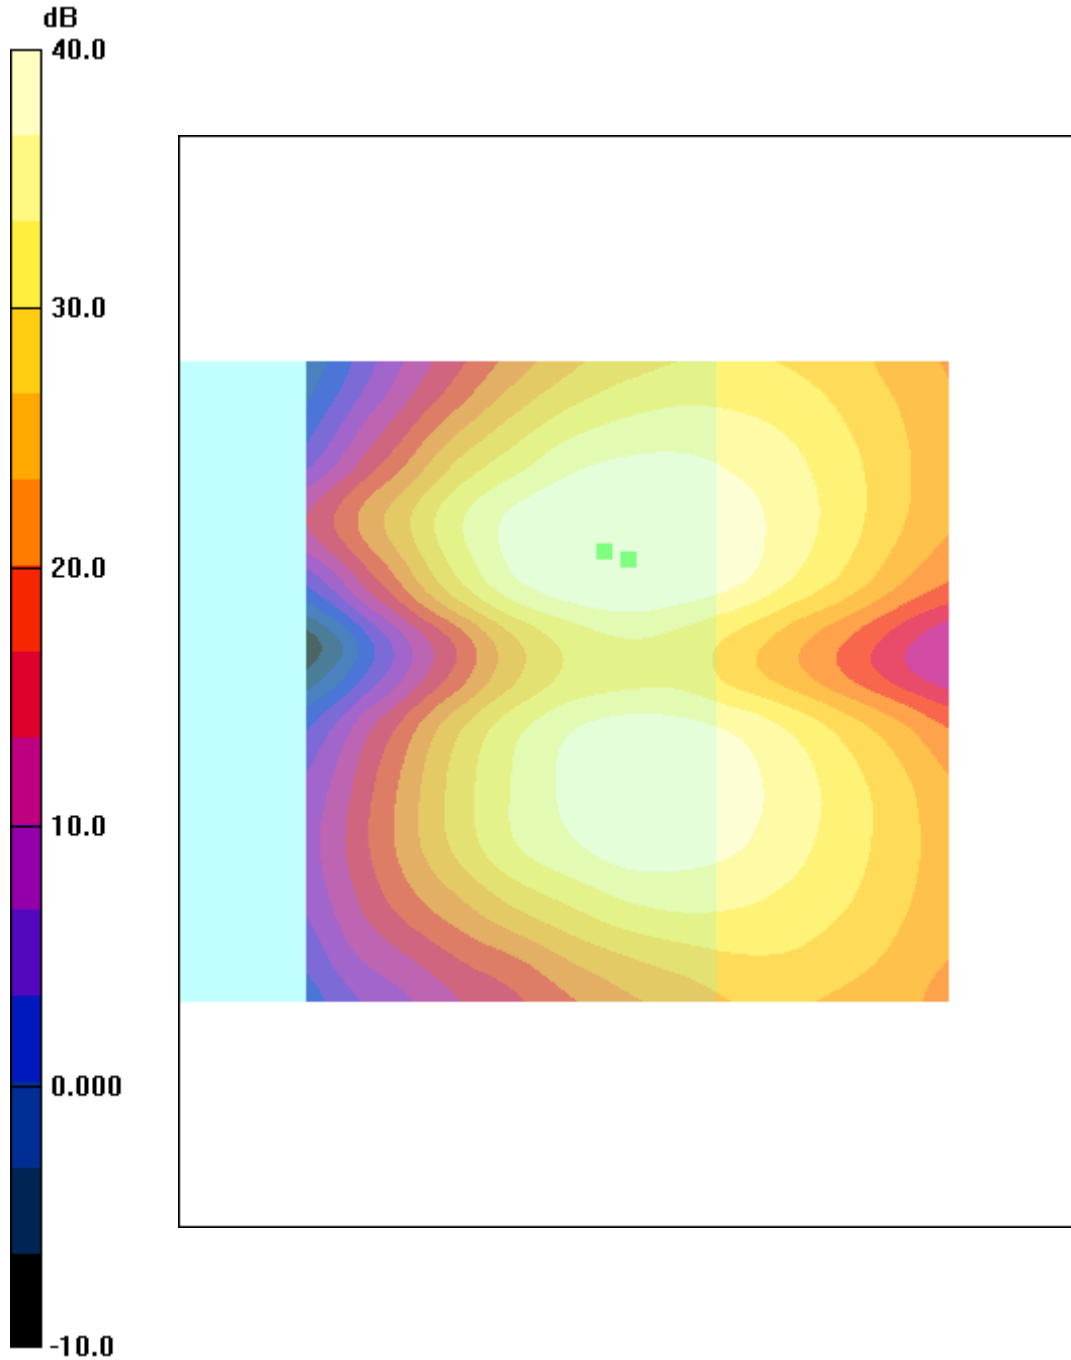

0 dB = 1.00

Annex D: HAC Calibration parameters

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Cetecom**

Certificate No: **AM1DV2-1005_Aug09**

CALIBRATION CERTIFICATE

Object: **AM1DV2 - SN: 1005**

Calibration procedure(s): **QA CAL-24.v2
Calibration procedure for AM1D magnetic field probes and TMFS in the
audio range**

Calibration date: **August 17, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Koithley Multimeter Type 2001	SN: 0610270	30-Sep-08 (No: 7670)	Sep-09
Reference Probe AM1DV2	SN: 1008	12-Jan-09 (No. AM1D-1008_Jan09)	Jan-10
DAE4	SN: 781	20-Feb-09 (No. DAE4-781_Feb09)	Feb-10

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	30-Jul-09 (in House check Jul 09)	Jul-10

	Name	Function	Signature
Calibrated by:	Mike Meili	RF Technician	<i>[Signature]</i>
Approved by:	Fin Borchelt	R&D Director	<i>[Signature]</i>

Issued: August 20, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

References

- [1] ANSI C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] DASY4 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [2], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

AM1D probe identification and configuration data

Item	AM1DV2 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 AA
Serial No	1005

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	40 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zurich, Switzerland
Manufacturing date	Feb-2006
Last calibration date	August 19, 2008

Calibration data

Connector rotation angle	(in DASY system)	181.7 °	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	2.45 °	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	0.0661 V / (A/m)	+/- 2.2 % (k=2)

Annex E: Document History

Version	Applied Changes	Date of Release
	Initial Release	2010-06-21

Annex F: Further Information**Glossary**

DUT	-	Device under Test
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HAC	-	Hearing Aid Compatibility
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
SAR	-	Specific Absorption Rate
S/N	-	Serial Number
SW	-	Software